

Gap should be as min as possible to avoid the damage of rail during vehicle moment

In NIHVA Scope

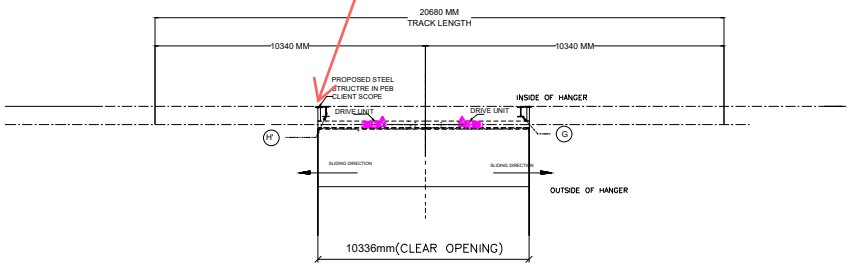


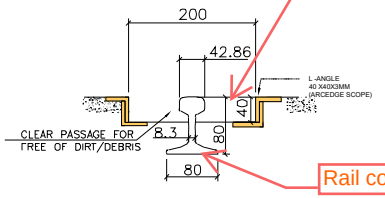


Rail code is required

15KG/M RAIL DETAILS

In NIHVA Scope

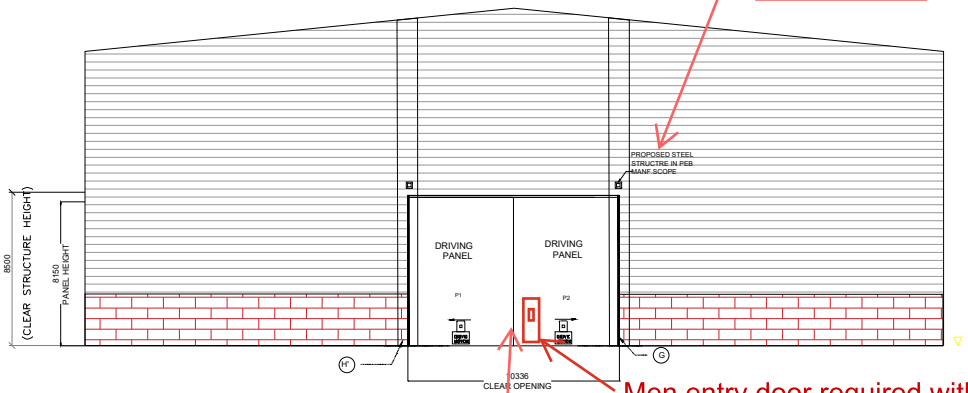





GUIDE BEAM – H-BEAM


Men entry door required with viewing glass

Water and dust should not enter in this gap between the Doors when it is in close



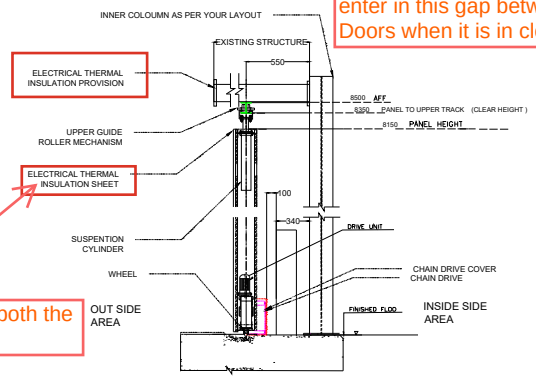

sheet to be place on both the side

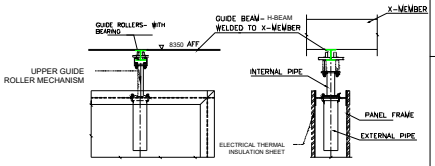

TOP ASSEMBLY

TECHANICAL SPECIFICATION -

DOOR SIZE - 10336 MM X 8150MM (INCLUDE I-CHANEL)
CLEAR OPENING - 10336 MM X 8500 (CLEAR HEIGHT IS DEPEND ON STRUCTURAL BEAM DEFLECTION.)
NUMBER OF PANEL - 02 Nos. (1 PANEL EACH SIDE)
PANEL SIZE - 5168 MM X 8150 MM
NUMBER OF MOTORS - 2 Nos.

NOTE:-
1. ALL DIMENSION ARE IN MM
2. REQUIRED ALL CIVIL WORK WILL BE IN CLIENT SCOPE
3. GIVEN GA DRAWING IS ONLY FOR THE CLIENT APPROVAL PURPOSE
4. DIMENSION AND LEAF PANEL ARE MAY VARY AS PER SITE CONDITION.
5. TOP STRUCTURE FRAME TO MOUNT TOP TRACK OF HANGER DOOR IN CLIENT SCOPE.

This drawing & designing is the property of NIHVA TECHNOLOGIES, Not be sold or copy to any other concern.

TITLE	DOOR AUTOMATION		NIHVA TECHNOLOGY PVT. LTD. PUNE
	SIGN	DATE	Email:- Sales@nihva.com Website:- www.nihva.com
DRAWN	B.S	01/06/26	CLIENT - NEOTRAFO
CHECK	V.T	01/06/26	PROJECT -BI-PARTING SLIDING HANGER DOOR
APPROVAL	V.T	01/06/26	
REV	00		SITE - HYDERABAD
If any queries contact : Design@nihva.com			SCALE: 01 / WT: / SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			DWG. NO. : NIHVA/25-26/178