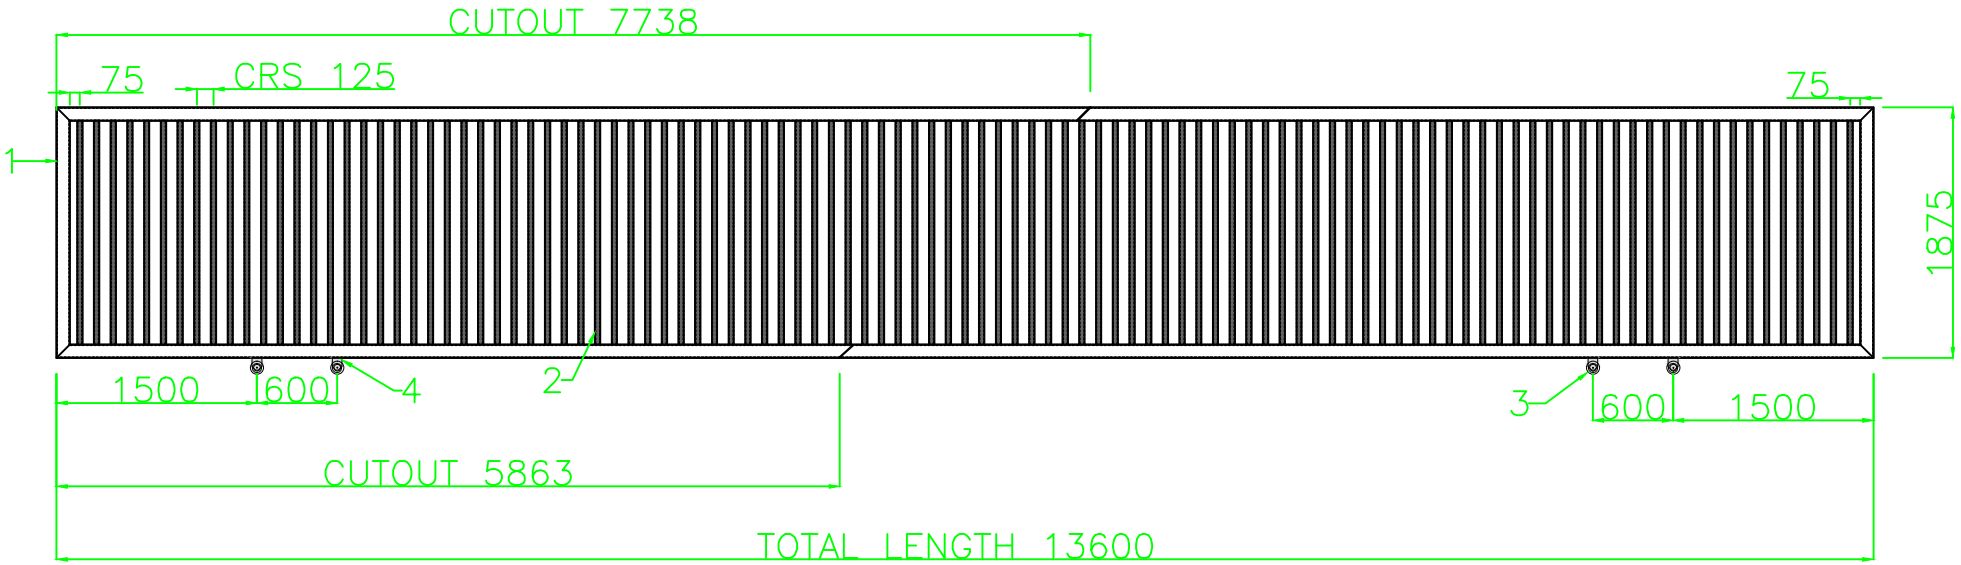


NOTE:
1. COATING : EPOXY POLYAMIIDE BASED ENAMEL FINISH.
2. GATE SHOULD BE MANUFACTURED IN TWO PARTS FOR TRANSPORTATION PURPOSE

SR. NO.	DESCRIPTION	SPECIFICATION	QTY
1	SQ. TUBE	100 X 100 X 3.6, 13600 LENGTH	2 NOS
2	SQ. TUBE	100 X 100 X 3.6, 1875 LENGTH	2 NOS
3	SQ. TUBE	40 X 40 X 3.2, 1675 LENGTH	107 NOS
4	WHEEL	4" CASTOR WHEEL	4 NOS
5	BRACKET	STANDARD WHEEL BKT	4 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

MOTORIZED SLIDING GATE

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

		SIGN	DATE
DRAWN	G.P.		15.09.21
CHECK	A.K.		15.09.21
APPRD.	V.T.		15.09.21

If any queries contact : projectsautomation @nihva.com

ALL DIMENSION ARE IN mm

CLIENT -M/s FUJI SILVERTECH CONCRETE P. LTD.
LOCATION - AURANGABAD
PRODUCT - MOTORIZED SLIDING GATE
NIHVA\21-22\VDR\0140 REV- 00
SCALE: NTS SHEET: 01 OF 01