

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm (iclean)


(b) LOCK : Panic Bar (iclean), Mortise lock with half cylinder External trim (iclean)

(c) DOOR CLOSER (iclean)


(d) GLASS : Single Glazed Vision size 200x800mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors


NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

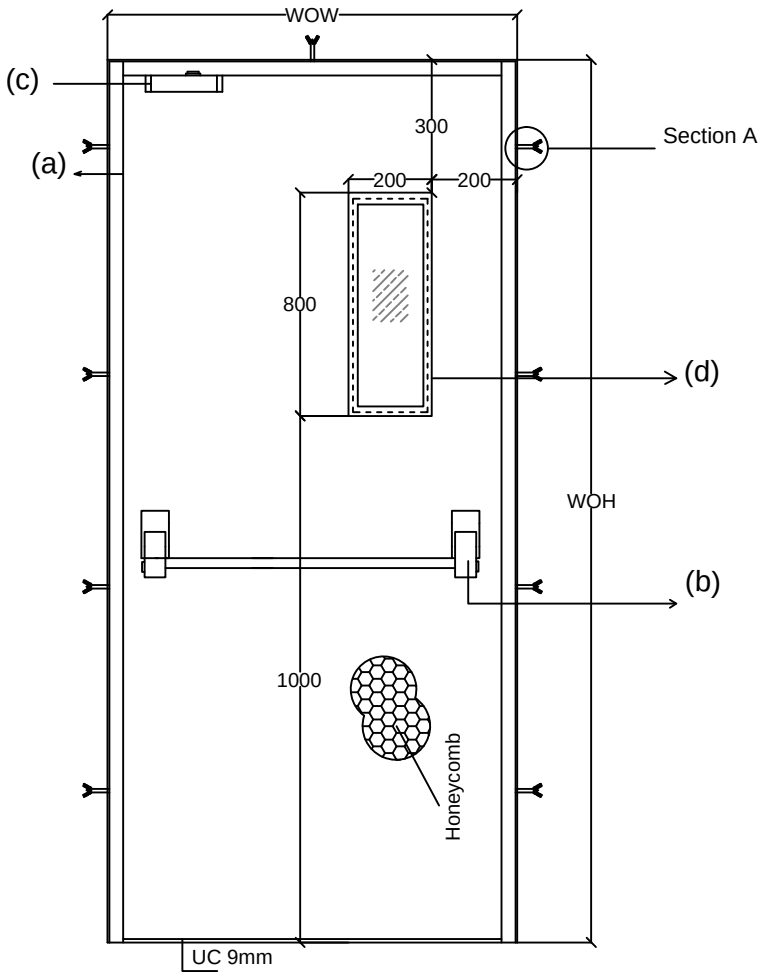

Elevation



Top View

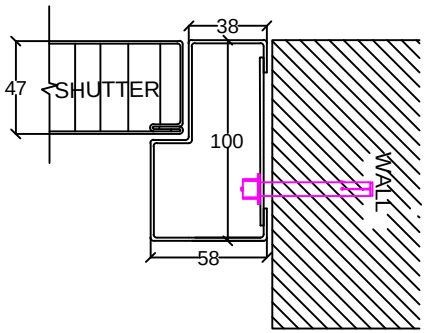

Detail view of Section A

FIRE DOOR SIZE			
WOW	WOH	QUANTITY	LOCATION
1000	2100	11	FIRST FLOOR

COLOR -

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	11/03/16	
CHECK	ANIL	11/03/16	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - HYOSUNG T&D
PROJECT -
SITE -
DWG. NO. - NIHVA/15-16/238
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com