
ALUSPEED DOOR
HIGH SPEED ALUMINIUM ROLL UP DOOR

High Speed Door for interior & exterior applications

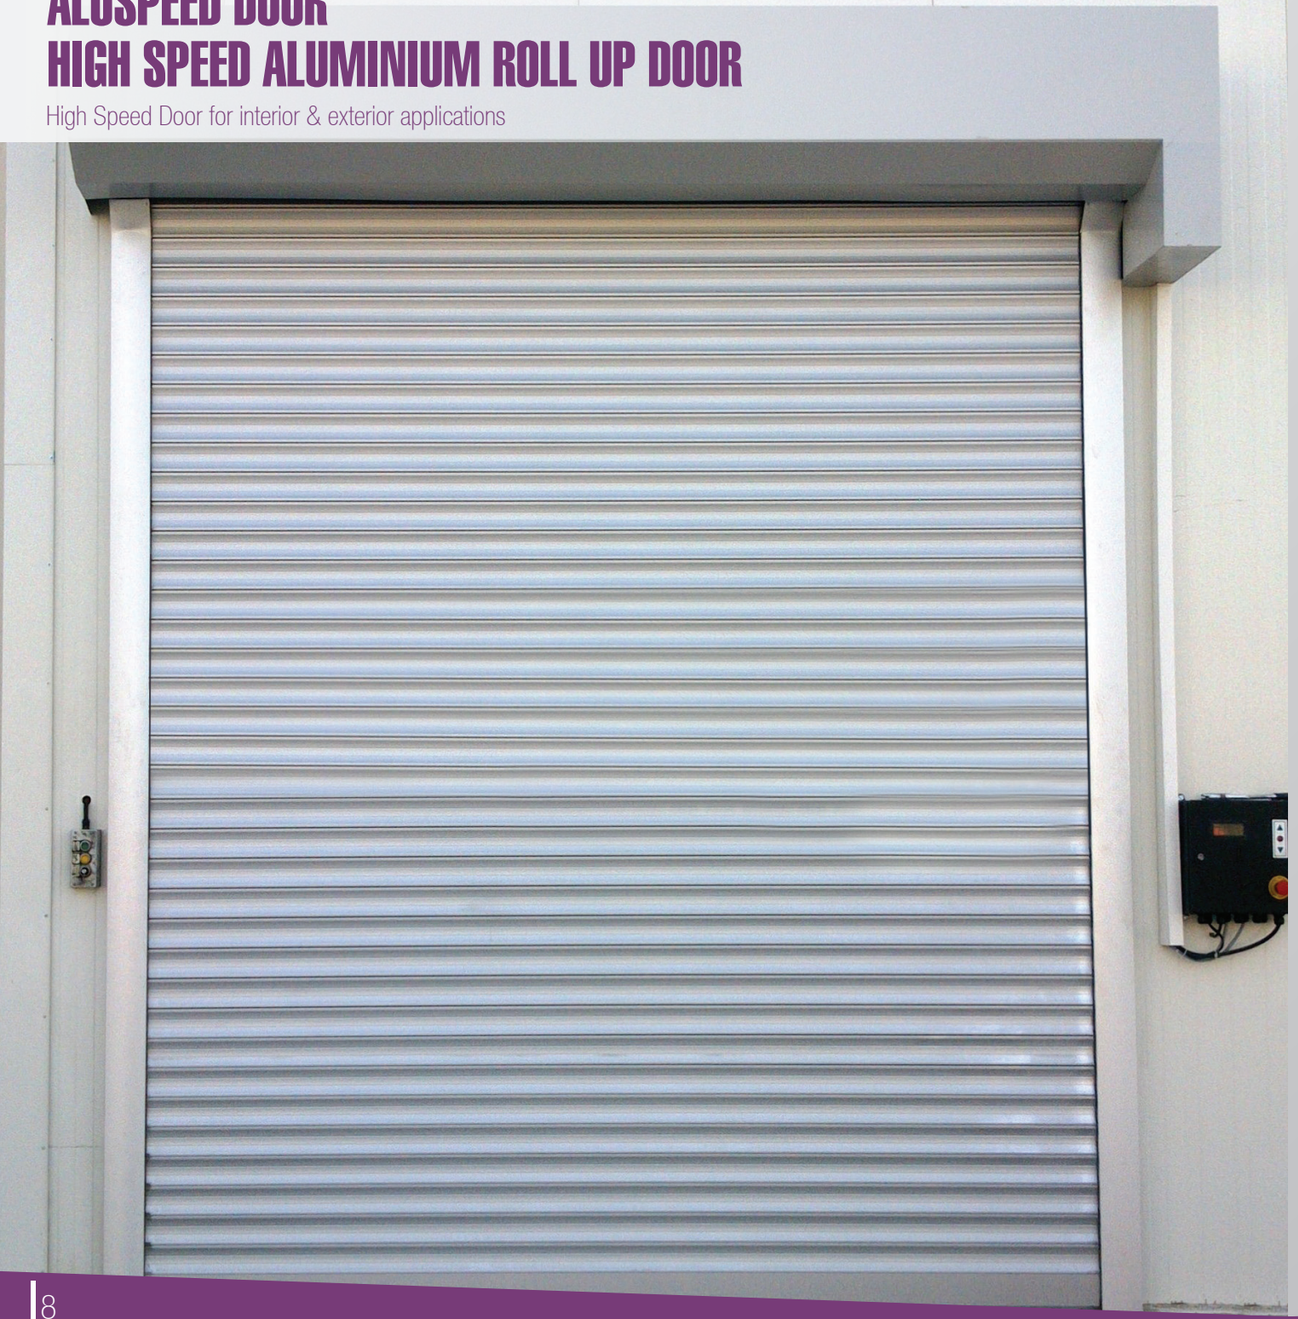

HIGH TECH ROLL UP FAST ALUMINIUM DOOR | TECHNICAL SPECIFICATIONS

NIHVA Technologies Pvt. Ltd.

- Ideal solution in areas with high demand for logistics efficiency and heavy traffic
- Automatic super fast opening and closing
- Reduces leakage of heat and air, heat preservation
- Moveable shaft system
- No torsion spring, less need for spareparts, minimum cost
- Patented rubber drive method

Door Type			Roll-up
Use	Internal / External Door		Standard
Door Sizes	Max Width Max Height		5500 mm 5500 mm
Speed	Inverter Motion system to adjust different speeds, with progressive control of acceleration & deceleration during braking		
	Opening Speed up to Closing Speed		3,0 m/s 0,7 m/s
Security Features	EN 13241-1		Standard
Resistance to Wind Load	EN 12424		Class 3
Door Leaf Material / Surface	Polyurethane filled RAL 9006 aluminium lamella		Standard
Curtain	Aluminium	19.0 mm	Standard
Guide Material / Surface	Aluminium Anodized Painting in any RAL color		Standard Optional
Shaft / Operator Cover	Straight		Optional
Operator and Control (German brand)	Connecting Voltage	1-phase 3-phase	220V - 1 ph, N 380V - 3 ph, N
	Open-Stop-Close Button		Standard
	Protection Category (Operator / Control)		IP 54 / IP 65
	Emergency-OFF Button		Standard
	Closing Zone Monitoring	Light Grille IP 67	Standard
	External Route Monitoring	Photocell	Optional
	Door area Monitoring	Radar Presence Detector Induction Loop	Optional Optional
	Electronic Limit Switch		Standard
Emergency Opening	Crank Handle		Standard
	Chain		Optional
Standard Curtain Colours	White Similar to RAL 9016 Ivory Similar to RAL 1015 Light beige	Brown Similar to RAL 8014 Green Similar to RAL 6005 Anthracite grey Similar to RAL 7016	