www.brakelli.com
www.akpinarmotor.com

INDUSTRIAL DOOR DRIVE SYSTEM

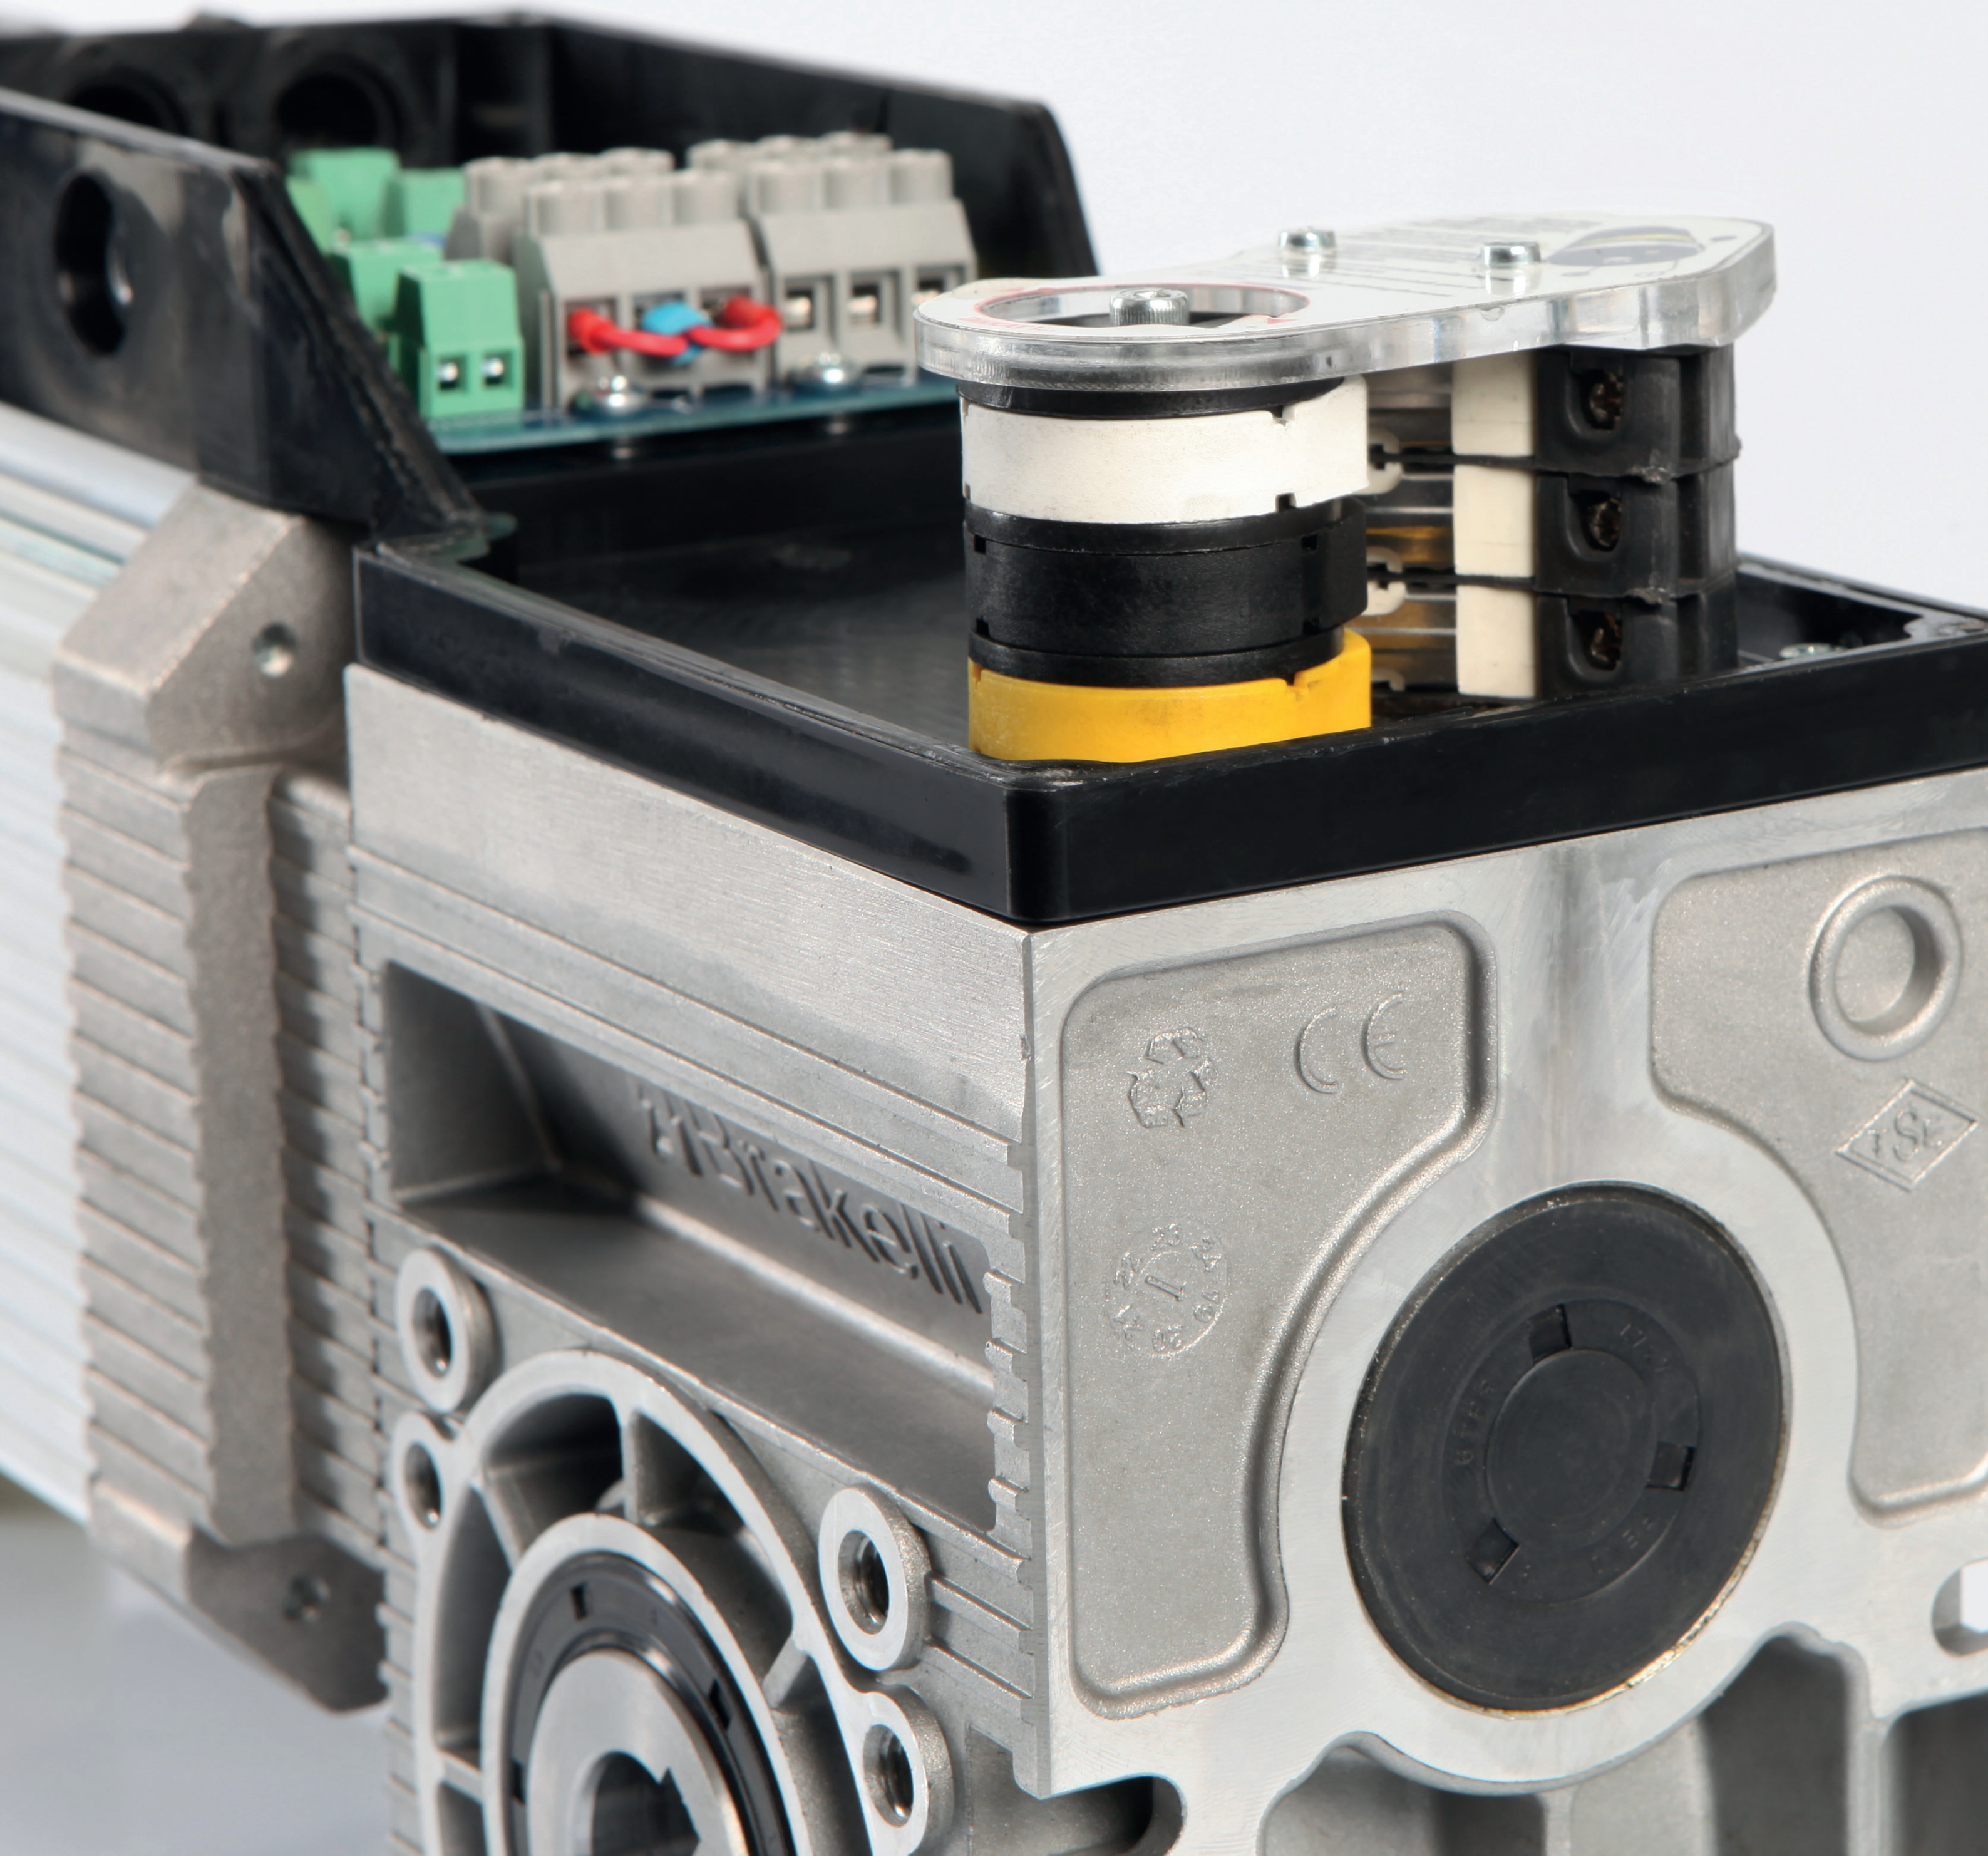

AKPINAR
REDÜKTÖR MOTOR MAKİNA

BRAKELLİ
ELEKTRO MANYETİK FREN SİSTEMLERİ

AKPINAR REDÜKTÖR MOTOR MAKİNA | BRAKELLI ELEKTRO MANYETİK FREN SİSTEMLERİ

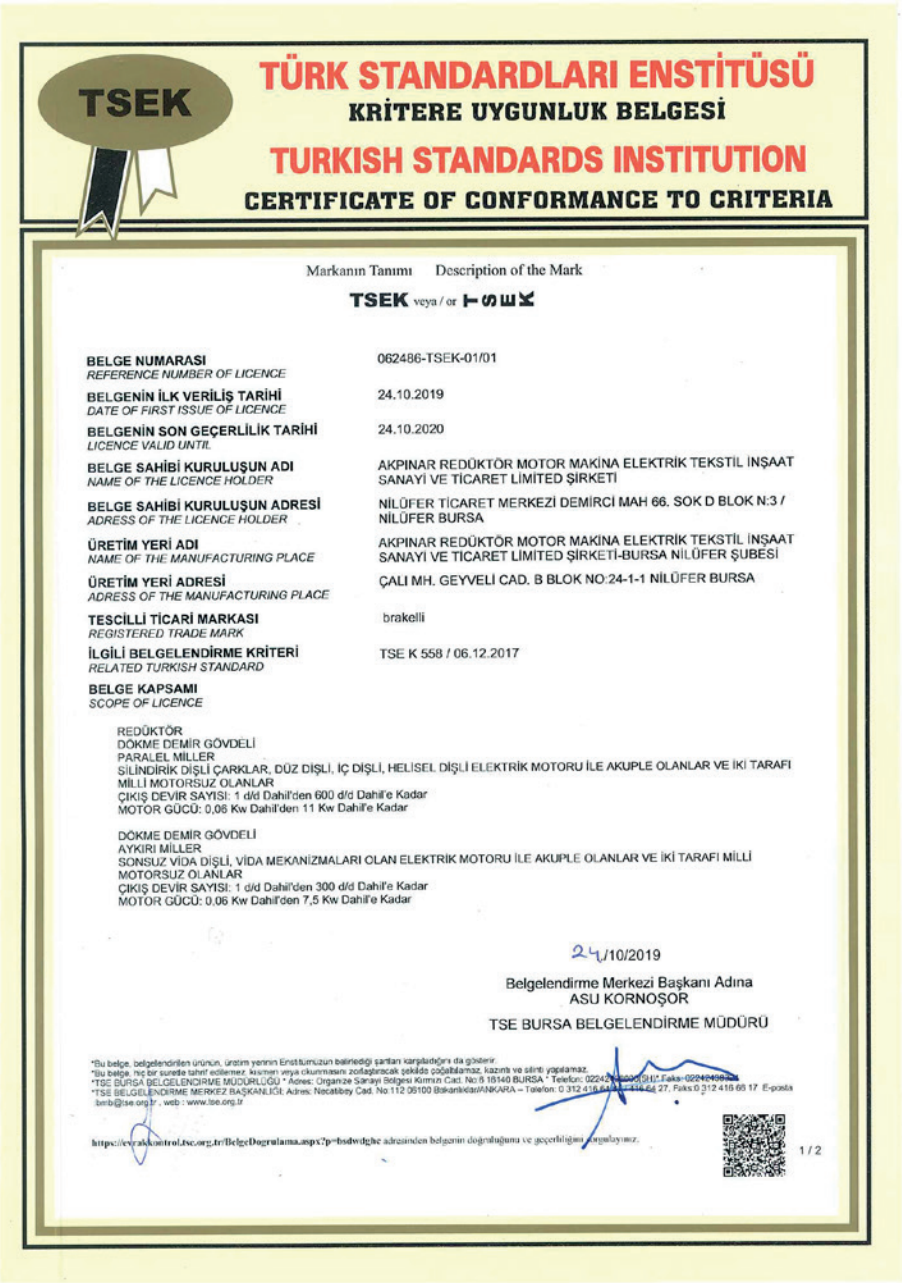

TÜRK STANDARDLARI ENSTİTÜSÜ
KRİTERE UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMANCE TO CRITERIA

Markanın Tanımı Description of the Mark
TSEK veya / or TSEK

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	062486-TSEK-01/01
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	24.10.2019
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	24.10.2020
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	AKPINAR REDÜKTÖR MOTOR MAKİNA ELEKTRİK TEKSTİL İNŞAAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	NİLÜFER TİCARET MERKEZİ DEMİRCİ MAH 66. SOK D BLOK N:3 / NİLÜFER BURSA
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	AKPINAR REDÜKTÖR MOTOR MAKİNA ELEKTRİK TEKSTİL İNŞAAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ-BURSA NİLÜFER ŞUBESİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	ÇALI MH. GEYVELİ CAD. B BLOK NO:24-1-1 NİLÜFER BURSA
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	brakelli
İLGİLİ BELGELENDİRME KRİTERİ *RELATED TURKISH STANDARD*	TSE K 558 / 06.12.2017

BELGE KAPSAMI
SCOPE OF LICENCE

REDÜKTÖR
DÖKME DEMİR GÖVDELİ
PARALEL MİLLER
SİLİNDİRİK DİŞLİ ÇARKLAR, DÜZ DİŞLİ, İÇ DİŞLİ, HELİSEL DİŞLİ ELEKTRİK MOTORU İLE AKUPLE OLANLAR VE İKİ TARAFI MİLLİ MOTORSUZ OLANLAR
ÇIKIŞ DEVİR SAYISI: 1 d/d Dahil'den 600 d/d Dahil'e Kadar
MOTOR GÜCÜ: 0,06 Kw Dahil'den 11 Kw Dahil'e Kadar

DÖKME DEMİR GÖVDELİ
AYKIRI MİLLER
SONSUZ VİDA DİŞLİ, VİDA MEKANİZMALARI OLAN ELEKTRİK MOTORU İLE AKUPLE OLANLAR VE İKİ TARAFI MİLLİ MOTORSUZ OLANLAR
ÇIKIŞ DEVİR SAYISI: 1 d/d Dahil'den 300 d/d Dahil'e Kadar
MOTOR GÜCÜ: 0,06 Kw Dahil'den 7,5 Kw Dahil'e Kadar

24/10/2019

Belgelendirme Merkezi Başkanı Adına
ASU KORNOŞOR
TSE BURSA BELGELENDİRME MÜDÜRÜ

*Bu belge, belgelendirilen ürünün, üretim yerinin Enstitümüzün belirlediği şartları karşıladığını da gösterir.
*Bu belge, hiç bir surette tahrif edilemez, kısmen veya okunmasını zorlaştıracak şekilde çoğaltılamaz, kazıntı ve silinti yapılamaz.
*TSE BURSA BELGELENDİRME MÜDÜRLÜĞÜ * Adres: Organize Sanayi Bölgesi Kırmızı Cad. No:6 16140 BURSA * Telefon: 02242[illegible](5H)* Faks: 0224243[illegible]
*TSE BELGELENDİRME MERKEZ BAŞKANLIĞI: Adres: Necatibey Cad. No:112 06100 Bakanlıklar/ANKARA – Telefon: 0 312 416 [illegible] 416 64 27, Faks:0 312 416 66 17 E-posta bmb@tse.org.tr , web : www.tse.org.tr

https://evrakkontrol.tse.org.tr/BelgeDogrulama.aspx?p=bsdwdghc adresinden belgenin doğruluğunu ve geçerliliğini sorgulayınız.

1 / 2

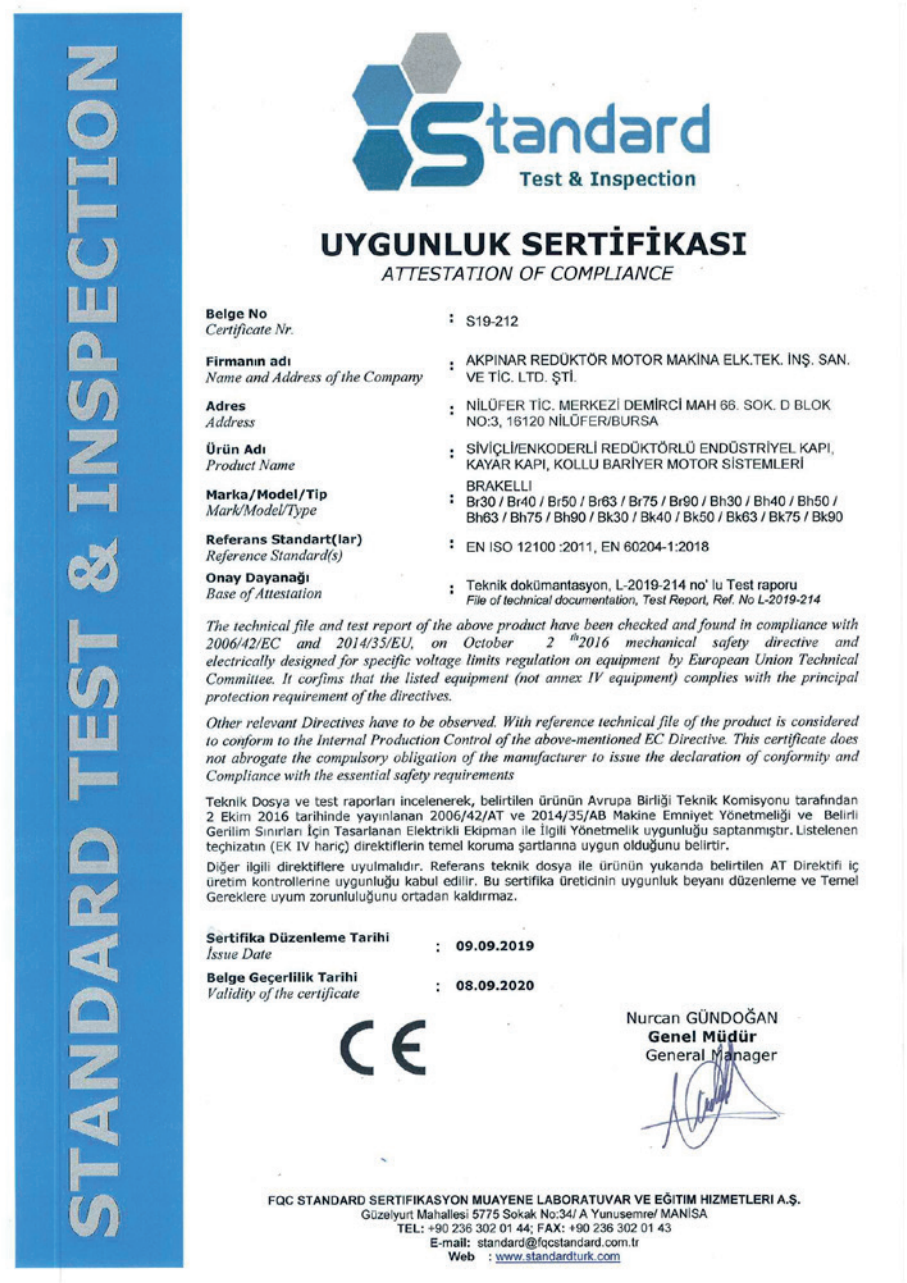

STANDARD TEST & INSPECTION

Standard Test & Inspection

UYGUNLUK SERTİFİKASI
ATTESTATION OF COMPLIANCE

Belge No *Certificate Nr.*	: S19-212
Firmanın adı *Name and Address of the Company*	: AKPINAR REDÜKTÖR MOTOR MAKİNA ELK.TEK. İNŞ. SAN. VE TİC. LTD. ŞTİ.
Adres *Address*	: NİLÜFER TİC. MERKEZİ DEMİRCİ MAH 66. SOK. D BLOK NO:3, 16120 NİLÜFER/BURSA
Ürün Adı *Product Name*	: SİVİÇLİ/ENKODERLİ REDÜKTÖRLÜ ENDÜSTRİYEL KAPI, KAYAR KAPI, KOLLU BARİYER MOTOR SİSTEMLERİ
Marka/Model/Tip *Mark/Model/Type*	: BRAKELLI Br30 / Br40 / Br50 / Br63 / Br75 / Br90 / Bh30 / Bh40 / Bh50 / Bh63 / Bh75 / Bh90 / Bk30 / Bk40 / Bk50 / Bk63 / Bk75 / Bk90
Referans Standart(lar) *Reference Standard(s)*	: EN ISO 12100 :2011, EN 60204-1:2018
Onay Dayanağı *Base of Attestation*	: Teknik dokümantasyon, L-2019-214 no' lu Test raporu *File of technical documentation, Test Report, Ref. No L-2019-214*

The technical file and test report of the above product have been checked and found in compliance with 2006/42/EC and 2014/35/EU, on October 2 th2016 mechanical safety directive and electrically designed for specific voltage limits regulation on equipment by European Union Technical Committee. It corfims that the listed equipment (not annex IV equipment) complies with the principal protection requirement of the directives.

Other relevant Directives have to be observed. With reference technical file of the product is considered to conform to the Internal Production Control of the above-mentioned EC Directive. This certificate does not abrogate the compulsory obligation of the manufacturer to issue the declaration of conformity and Compliance with the essential safety requirements

Teknik Dosya ve test raporları incelenerek, belirtilen ürünün Avrupa Birliği Teknik Komisyonu tarafından 2 Ekim 2016 tarihinde yayınlanan 2006/42/AT ve 2014/35/AB Makine Emniyet Yönetmeliği ve Belirli Gerilim Sınırları İçin Tasarlanan Elektrikli Ekipman ile İlgili Yönetmelik uygunluğu saptanmıştır. Listelenen teçhizatın (EK IV hariç) direktiflerin temel koruma şartlarına uygun olduğunu belirtir.

Diğer ilgili direktiflere uyulmalıdır. Referans teknik dosya ile ürünün yukarıda belirtilen AT Direktifi iç üretim kontrollerine uygunluğu kabul edilir. Bu sertifika üreticinin uygunluk beyanı düzenleme ve Temel Gereklere uyum zorunluluğunu ortadan kaldırmaz.

Sertifika Düzenleme Tarihi *İssue Date*	: **09.09.2019**
Belge Geçerlilik Tarihi *Validity of the certificate*	: **08.09.2020**

CE

Nurcan GÜNDOĞAN
Genel Müdür
General Manager

FQC STANDARD SERTIFIKASYON MUAYENE LABORATUVAR VE EĞITIM HIZMETLERI A.Ş.
Güzelyurt Mahallesi 5775 Sokak No:34/ A Yunusemre/ MANİSA
TEL: +90 236 302 01 44; **FAX:** +90 236 302 01 43
E-mail: standard@fqcstandard.com.tr
Web : www.standardturk.com

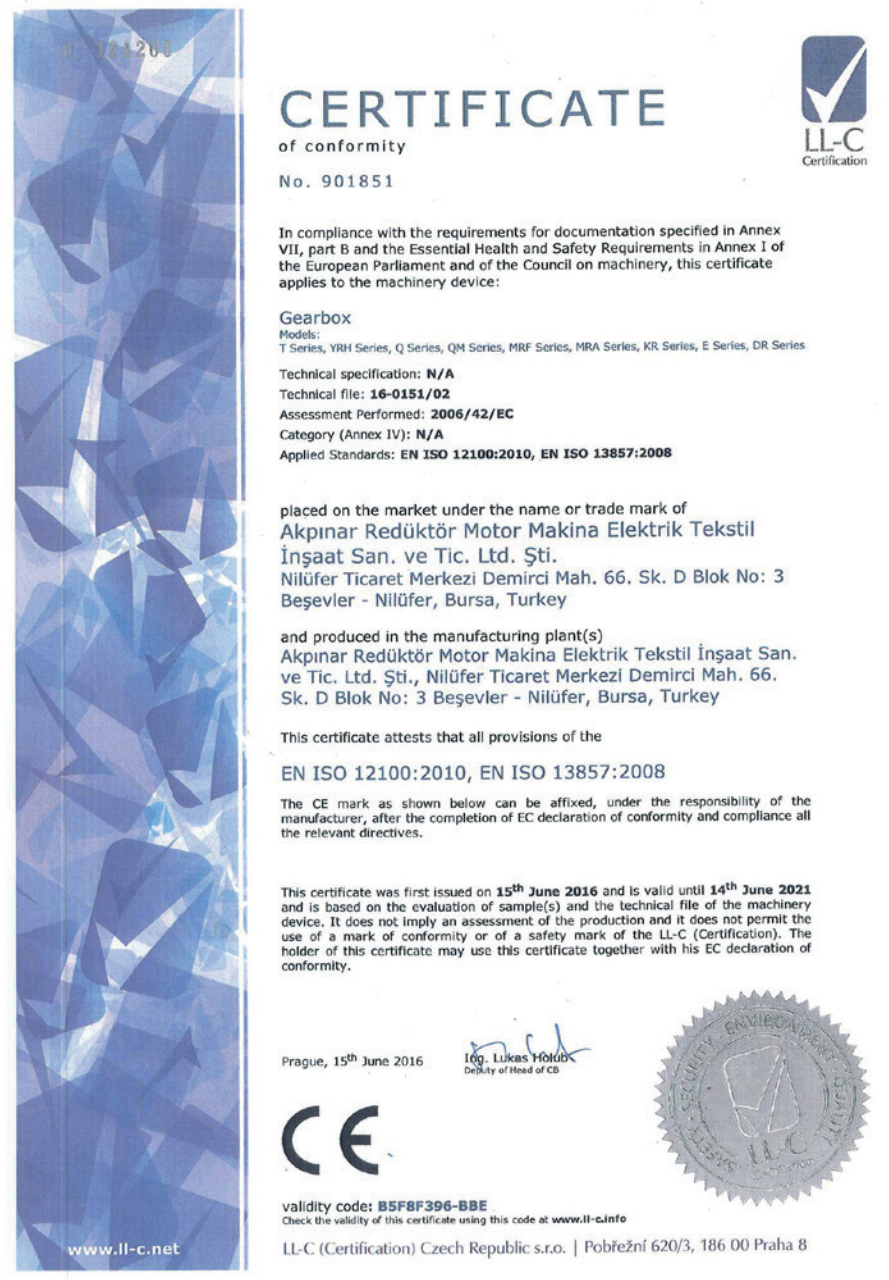

CERTIFICATE
of conformity
No. 901851

LL-C Certification

In compliance with the requirements for documentation specified in Annex VII, part B and the Essential Health and Safety Requirements in Annex I of the European Parliament and of the Council on machinery, this certificate applies to the machinery device:

Gearbox
Models:
T Series, YRH Series, Q Series, QM Series, MRF Series, MRA Series, KR Series, E Series, DR Series

Technical specification: **N/A**
Technical file: **16-0151/02**
Assessment Performed: **2006/42/EC**
Category (Annex IV): **N/A**
Applied Standards: **EN ISO 12100:2010, EN ISO 13857:2008**

placed on the market under the name or trade mark of
Akpınar Redüktör Motor Makina Elektrik Tekstil İnşaat San. ve Tic. Ltd. Şti.
Nilüfer Ticaret Merkezi Demirci Mah. 66. Sk. D Blok No: 3 Beşevler - Nilüfer, Bursa, Turkey

and produced in the manufacturing plant(s)
Akpınar Redüktör Motor Makina Elektrik Tekstil İnşaat San. ve Tic. Ltd. Şti., Nilüfer Ticaret Merkezi Demirci Mah. 66. Sk. D Blok No: 3 Beşevler - Nilüfer, Bursa, Turkey

This certificate attests that all provisions of the

EN ISO 12100:2010, EN ISO 13857:2008

The CE mark as shown below can be affixed, under the responsibility of the manufacturer, after the completion of EC declaration of conformity and compliance all the relevant directives.

This certificate was first issued on **15th June 2016** and is valid until **14th June 2021** and is based on the evaluation of sample(s) and the technical file of the machinery device. It does not imply an assessment of the production and it does not permit the use of a mark of conformity or of a safety mark of the LL-C (Certification). The holder of this certificate may use this certificate together with his EC declaration of conformity.

Prague, 15th June 2016

Ing. Lukas Holub
Deputy of Head of CB

CE

validity code: **B5F8F396-BBE**
Check the validity of this certificate using this code at **www.ll-c.info**

LL-C (Certification) Czech Republic s.r.o. | Pobřežní 620/3, 186 00 Praha 8

www.ll-c.net

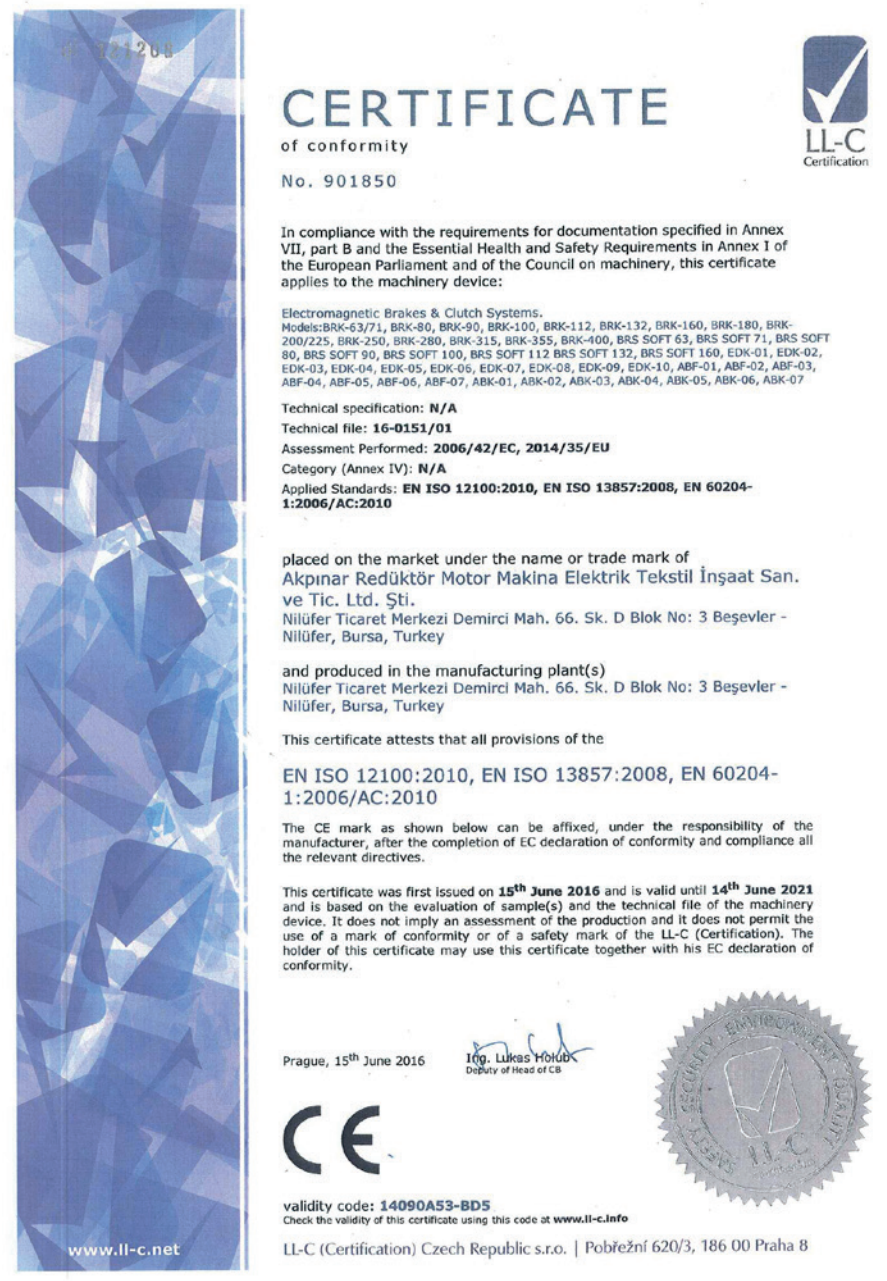

CERTIFICATE
of conformity
No. 901850

LL-C Certification

In compliance with the requirements for documentation specified in Annex VII, part B and the Essential Health and Safety Requirements in Annex I of the European Parliament and of the Council on machinery, this certificate applies to the machinery device:

Electromagnetic Brakes & Clutch Systems.
Models:BRK-63/71, BRK-80, BRK-90, BRK-100, BRK-112, BRK-132, BRK-160, BRK-180, BRK-200/225, BRK-250, BRK-280, BRK-315, BRK-355, BRK-400, BRS SOFT 63, BRS SOFT 71, BRS SOFT 80, BRS SOFT 90, BRS SOFT 100, BRS SOFT 112 BRS SOFT 132, BRS SOFT 160, EDK-01, EDK-02, EDK-03, EDK-04, EDK-05, EDK-06, EDK-07, EDK-08, EDK-09, EDK-10, ABF-01, ABF-02, ABF-03, ABF-04, ABF-05, ABF-06, ABF-07, ABK-01, ABK-02, ABK-03, ABK-04, ABK-05, ABK-06, ABK-07

Technical specification: **N/A**
Technical file: **16-0151/01**
Assessment Performed: **2006/42/EC, 2014/35/EU**
Category (Annex IV): **N/A**
Applied Standards: **EN ISO 12100:2010, EN ISO 13857:2008, EN 60204-1:2006/AC:2010**

placed on the market under the name or trade mark of
Akpınar Redüktör Motor Makina Elektrik Tekstil İnşaat San. ve Tic. Ltd. Şti.
Nilüfer Ticaret Merkezi Demirci Mah. 66. Sk. D Blok No: 3 Beşevler - Nilüfer, Bursa, Turkey

and produced in the manufacturing plant(s)
Nilüfer Ticaret Merkezi Demirci Mah. 66. Sk. D Blok No: 3 Beşevler - Nilüfer, Bursa, Turkey

This certificate attests that all provisions of the

EN ISO 12100:2010, EN ISO 13857:2008, EN 60204-1:2006/AC:2010

The CE mark as shown below can be affixed, under the responsibility of the manufacturer, after the completion of EC declaration of conformity and compliance all the relevant directives.

This certificate was first issued on **15th June 2016** and is valid until **14th June 2021** and is based on the evaluation of sample(s) and the technical file of the machinery device. It does not imply an assessment of the production and it does not permit the use of a mark of conformity or of a safety mark of the LL-C (Certification). The holder of this certificate may use this certificate together with his EC declaration of conformity.

Prague, 15th June 2016

Ing. Lukas Holub
Deputy of Head of CB

CE

validity code: **14090A53-BD5**
Check the validity of this certificate using this code at **www.ll-c.info**

LL-C (Certification) Czech Republic s.r.o. | Pobřežní 620/3, 186 00 Praha 8

www.ll-c.net

FIRST REDUCTOR
IN TURKEY
WITH SWITCH AND ENCODER

AKPINAR REDÜKTOR MOTOR is on the market since 2001. Our experienced team members have been doing their best in order to provide you with our support and services. We have been working with electric motors, reductors, electromagnetic brake sales and applications.

In order to expand the design development, we opened Brakelli production of 1000 square meters in the Bursa city Industrial Zone as a new breath to the sector. We started not only sell electric motors and reductors, but also manufacture special gearboxes in a company-oriented machinery. We listen to our valuable customers when manufacturing our products: electric motors, reductors, electromagnetic brakes, gear wheels, etc. We also produce all kinds of gears from 1 module to 10 module and 800 mm diameter and we produce specially designed gears with different power and torque. All the parts used in our products manufacturing are also made by experienced staff in our machine park. They work on our **CNC TURNING & MILLING, BALANCE MACHINE, CNC HOBBING & GRINDING,** and other machines.

INDUSTRIAL DOOR DRIVE SYSTEM
50 BODY WITH BRAKE

Braked industrial door drive systems are being manufactured in Turkey under the guarantee of Akpınar Reduktor Motor with the brand name of Brakelli. Thanks to the Switch & Encoder shaft that is coming out of the monobloc structure, the reductors are able to precisely determine the location without the need for an external sensor.
With the support of brake behind the square body electric motor, the ability to stop at the desired position and time is provided. In the event of electric shortage, by deactivating the brake with manual intervention, it enables external intervention with the motor.
Motor power options: 1.1 kW Compact (1.5 HP Compact), 0.75 kW (1 HP), 0.55 kW (0.75 HP)

SAMPLE ORDER **CODE**

BRKM25406-60-1.5-4F-VP-0-0 (1.5 kW square engine, reductor through hole diameter Ø25,40, key width 6, ratio i:60, with 4 mechanic switches, brakes, cooling, manual intervention safety unit, without a board, without an energy cable)
BRKM31758-10-0.75-EF-YN-380-5 (0,5 kW square engine, reductor through hole diameter Ø31,75, key width 8, ratio i:10, with an encoder, brakes, without cooling, without manual intervention safety, driverless board, with energy cable of 5 meters)

BRKM ▶	It indicates the square motor
2500 ▶	First two digits indicates the reductor through hole diameter in whole number. Last two digits indicate the decimal and percentile value of the reductor through hole diameter.
8 ▶	Key-width size
15 ▶	Reducer ratio
1.1C ▶	Motor power [Kw] (If motor is not compact, C is not written)
EF ▶	E indicates that **encoder** is available. When it is mechanical switch, only switch number is written in number. F indicates the brakes.
VB ▶	V indicates that cooling is available. If cooling is not available, Y is written. P indicates the manual intervention security unit behind the vessel. If there won't be a unit, N is written.
220 ▶	It indicates the board. If the board has a driver, **220** is written, if it is driverless, **380** is written. If a board is not wanted, **"0"** is written.
3 ▶	It indicates the length of the cable between the board and motor. Standard cable lengths are **3**m, **5**m, **7**m If cable is not wanted, **"0"** is written.

Note: When the engine is compact, it interlaces with the subframe, hence a subframe reducer is mounted on the motor.
Note: F inscription always has to be present in an order for motor with brakes.

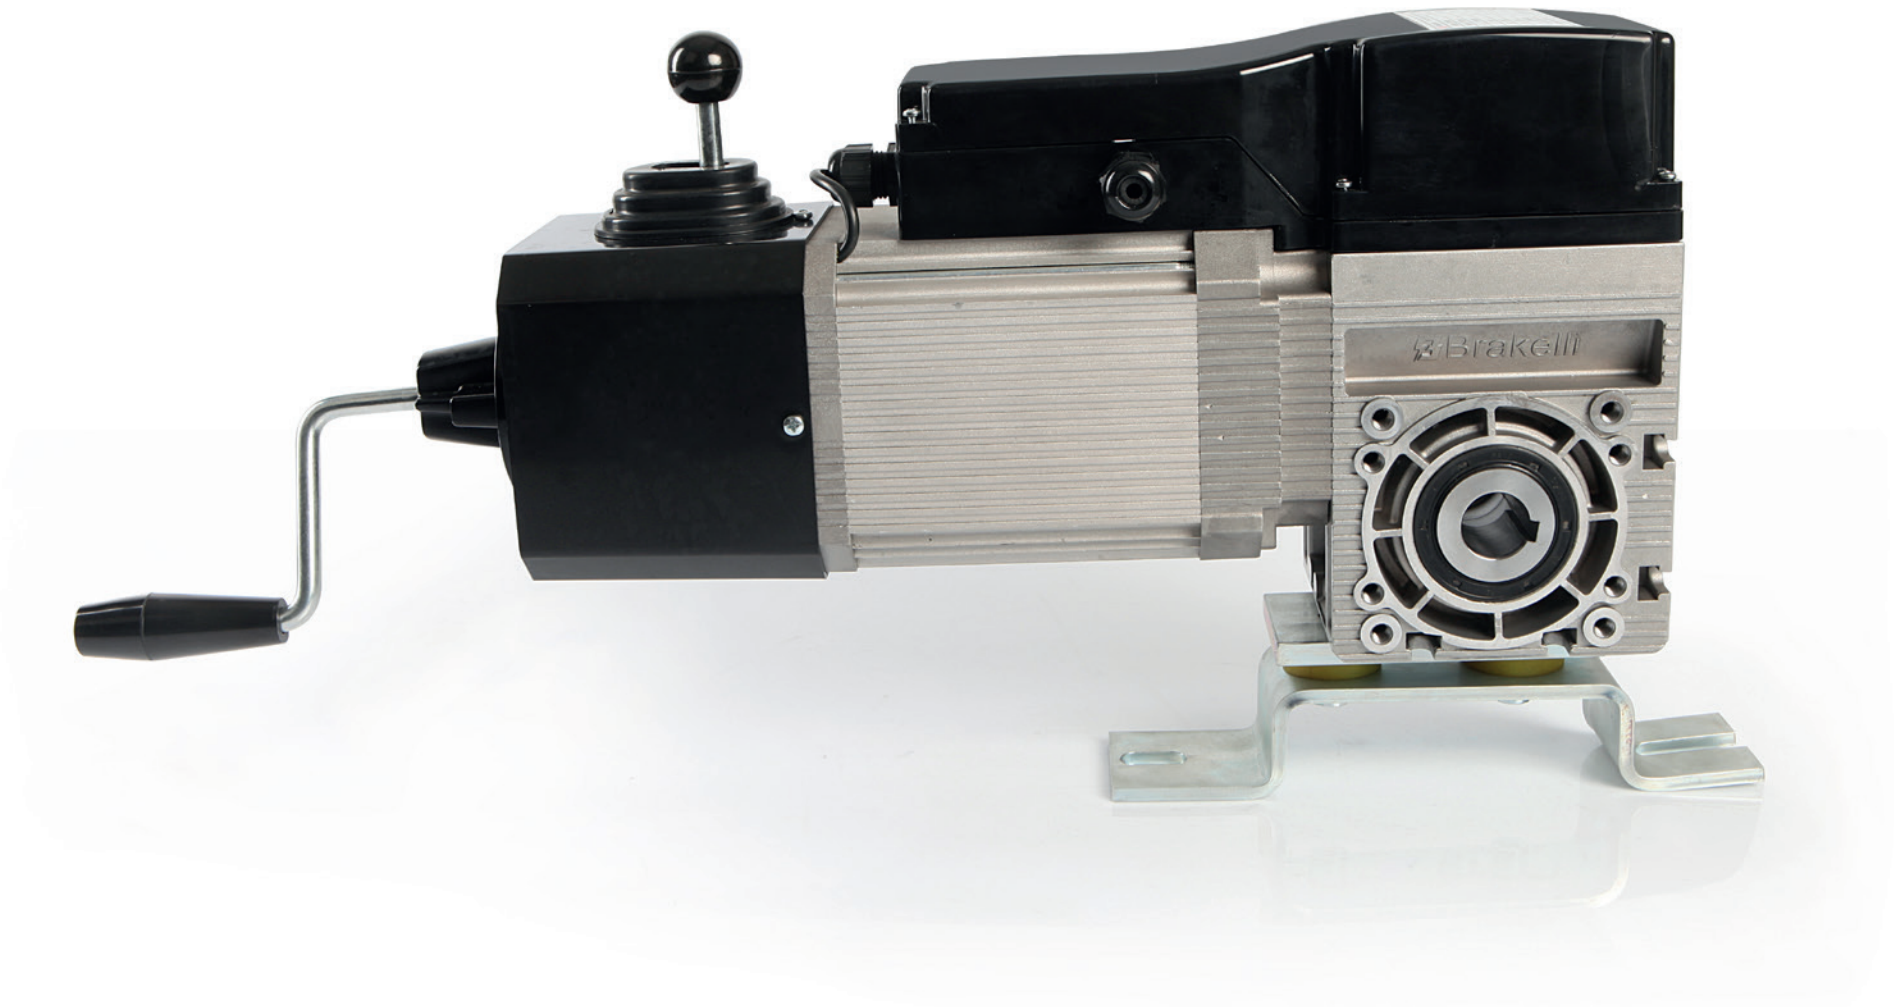

MOTOR POWER	OUTPUT TORQUE	OUTPUT SPEED	LIMIT CAPACITY	THROUGH HOLE DIAMETER	OPERATING VOLTAGE	DUTY CYCLE ENGINE	NOMINAL CURRENTAT 400 VAC	PROTECTION CLASS	BRAKE	LENGHT			
P [kW]	**M_N** [Nm]	**n*** [min^{-1}]	i_{Stw}	**D*** [mm]	**U** [V]	**S1** [%]	**I_N** [A]	**IP**	**80** TYPE	**L1** [mm]	**L2** [mm]	**L3** [mm]	**L4*** [mm]
0,55	38-25	93-140	15-22,5 - 45	25	110 DC	69,1	1,6	55	Existing	396	464	501	80
0,75	60-40	93-140	15-22,5 - 45	25	110 DC	79,6	2,1	55	Existing	419	487	524	80
1,1 C	90-60	93-140	15-22,5 - 45	25	110 DC	82,0	2,6	55	Existing	431	499	536	80

Optional : The values producing customer demanding

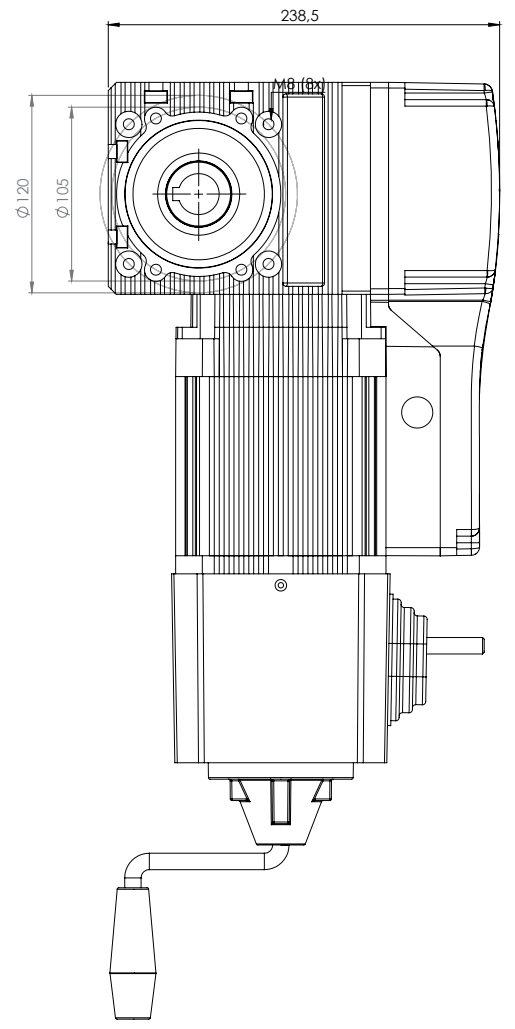

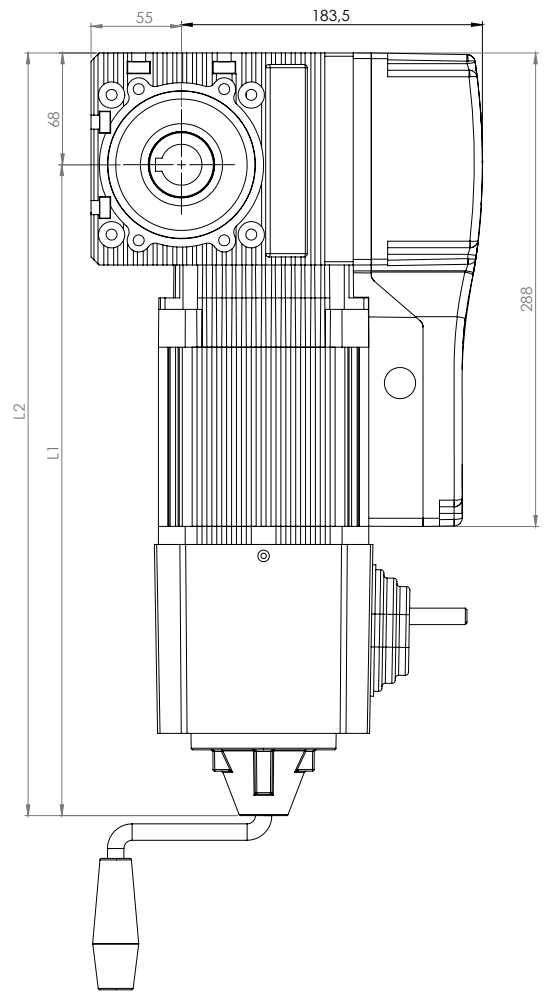

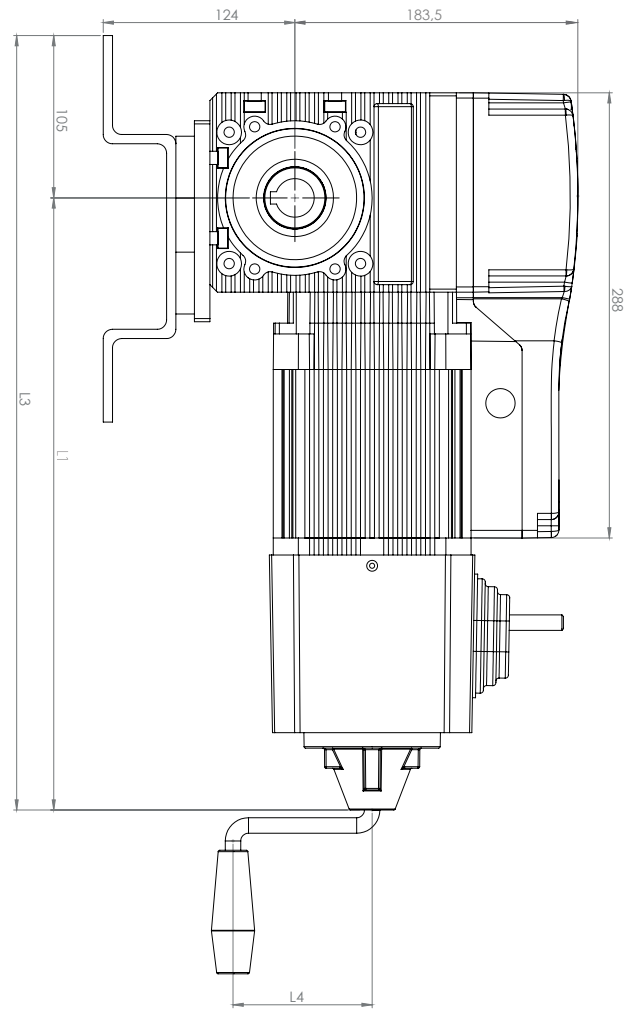

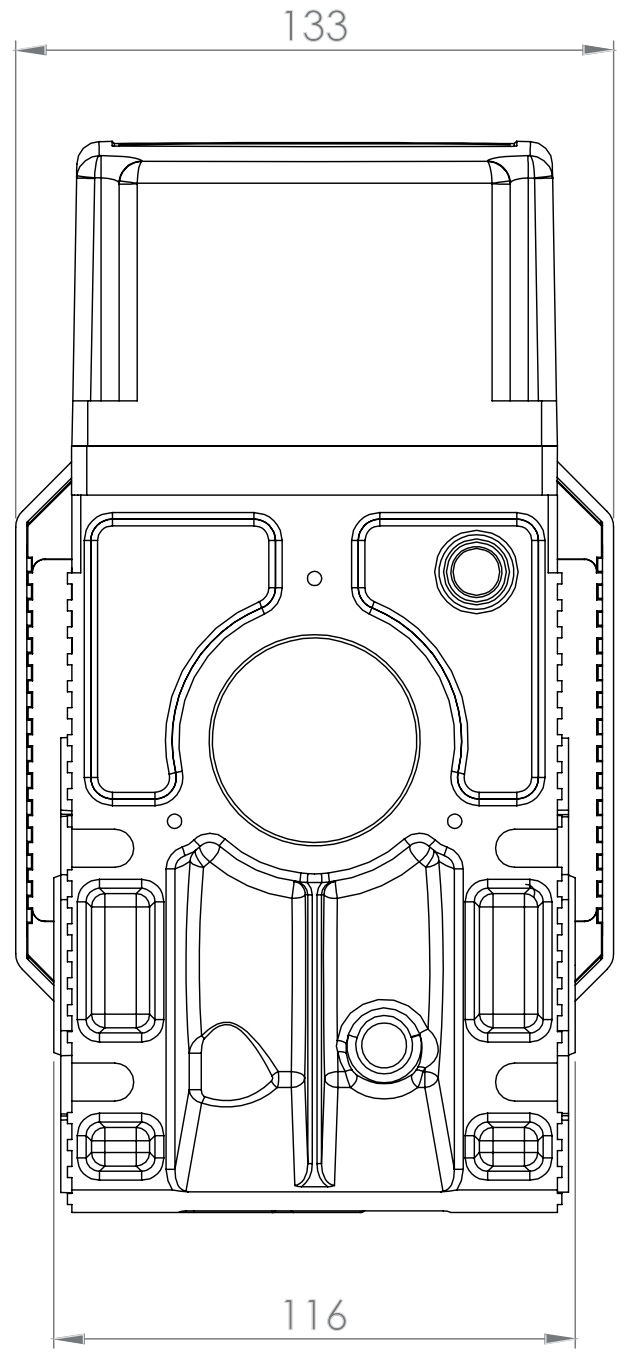

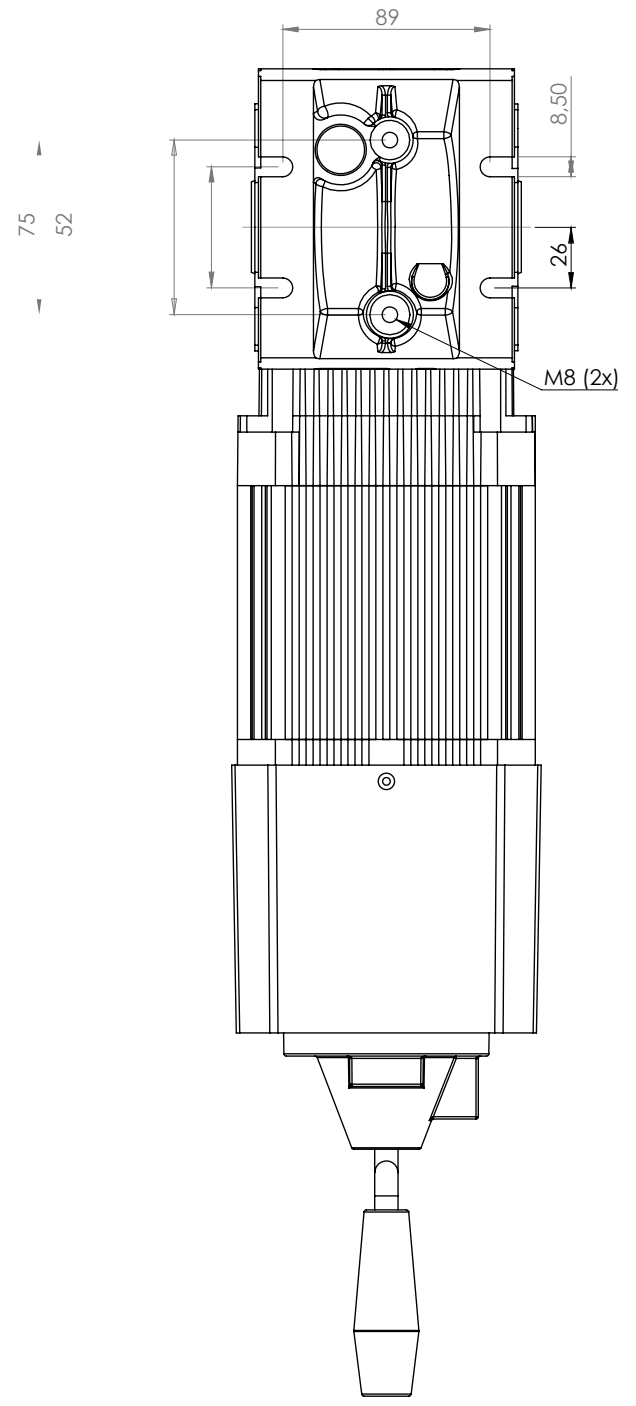

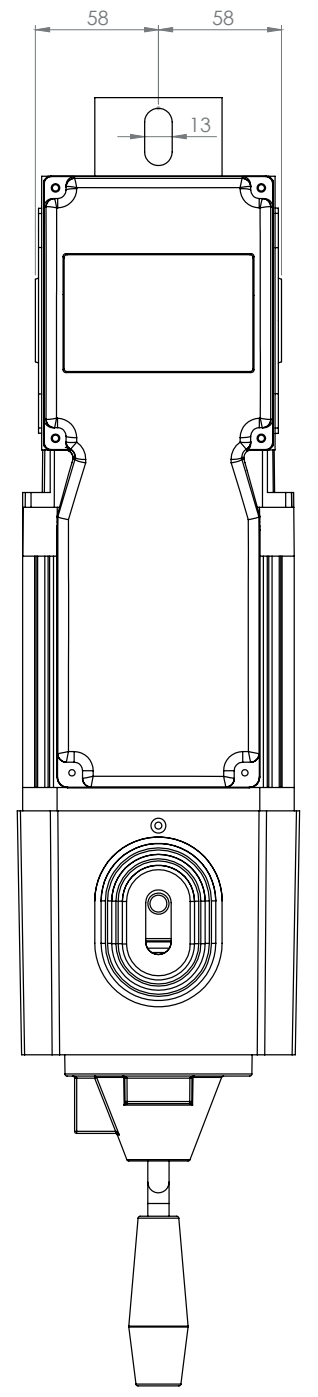

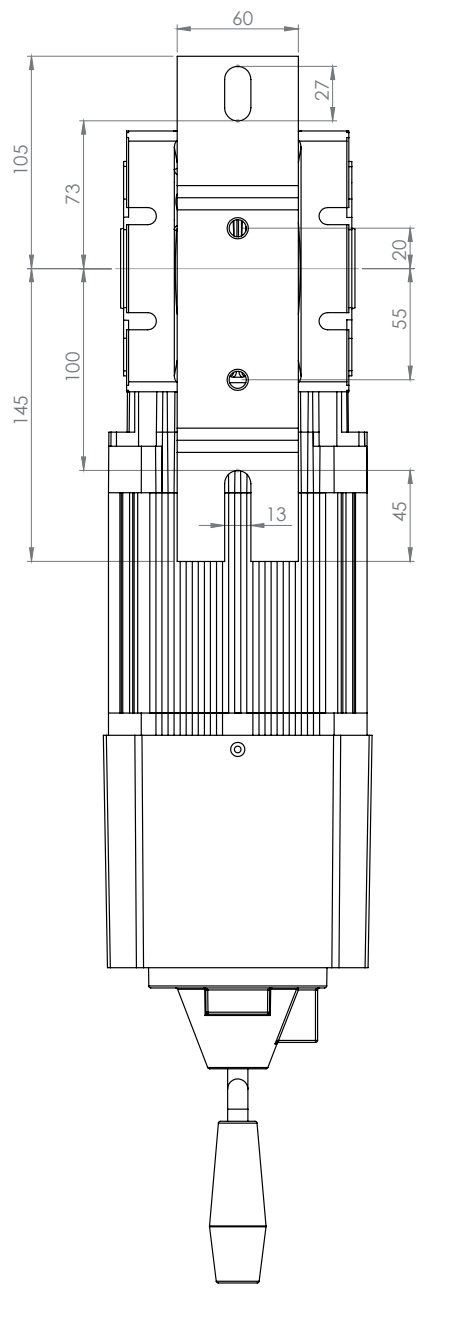

INDUSTRIAL DOOR DRIVE SYSTEM
50 BODY WITH CHAIN UNIT

Chain unit industrial door drive systems are being manufactured in Turkey under the guarantee of Akpinar Reduktor Motor with the brand name of Brakelli. Thanks to the Switch & Encoder shaft that is coming out of the monobloc structure, the reductors are able to precisely determine the location without the need for an external sensor.
With the support of brake integrated to the back of the square body electric motor, the ability to externally intervene the motor in the event of electric shortage is provided. The height of the chain can be determined according to the height of the door and the request of the customer.
Motor power options: 1.1 kW Compact (1.5 HP Compact), 0.75 kW (1 HP), 0.55 kW (0.75 HP)

SAMPLE ORDER CODE

BRKM25008-15-1.1C-EZ-10-220-7 (1.1 kW compact square engine, reductor through hole diameter Ø25,00, key width 8, ratio i:15, with Encoder, manual chain-intervention unit, 10-meters long chain, board with driver, 7-meters long energy cable)

BRKM280010-30-0,55-3Z-08-380-0 (0,55 kW square engine, reductor through hole diameter Ø28,00, key width 10, ratio i:30, with 3 mechanic switches, manual chain-intervention unit, 8-meters long chain, driverless board, without an energy cable)

BRKM ▶	It indicates the square motor
2500 ▶	First two digits indicates the reductor through hole diameter in whole number. Last two digits indicate the decimal and percentile value of the reductor through hole diameter.
8 ▶	Key-width size
15 ▶	Reducer ratio
1.1C ▶	Motor power [Kw] (If motor is not compact, C is not written)
EZ ▶	E indicates that **encoder** is available. When it is mechanical switch, only switch number is written in number. F indicates the brakes.
08 ▶	It indicates the length of the chain in meters when unclasped.
220 ▶	It indicates the board. If the board has a driver, **220** is written, if it is driverless, **380** is written. If a board is not wanted, **"0"** is written.
0 ▶	It indicates the length of the cable between the board and motor. Standard cable lengths are **3**m, **5**m, **7**m If cable is not wanted, **"0"** is written.

Note: When the engine is compact, it interlaces with the subframe, hence a subframe reducer is mounted on the motor.
Note: Z inscription always has to be present in an order for motor with manual chain intervention.

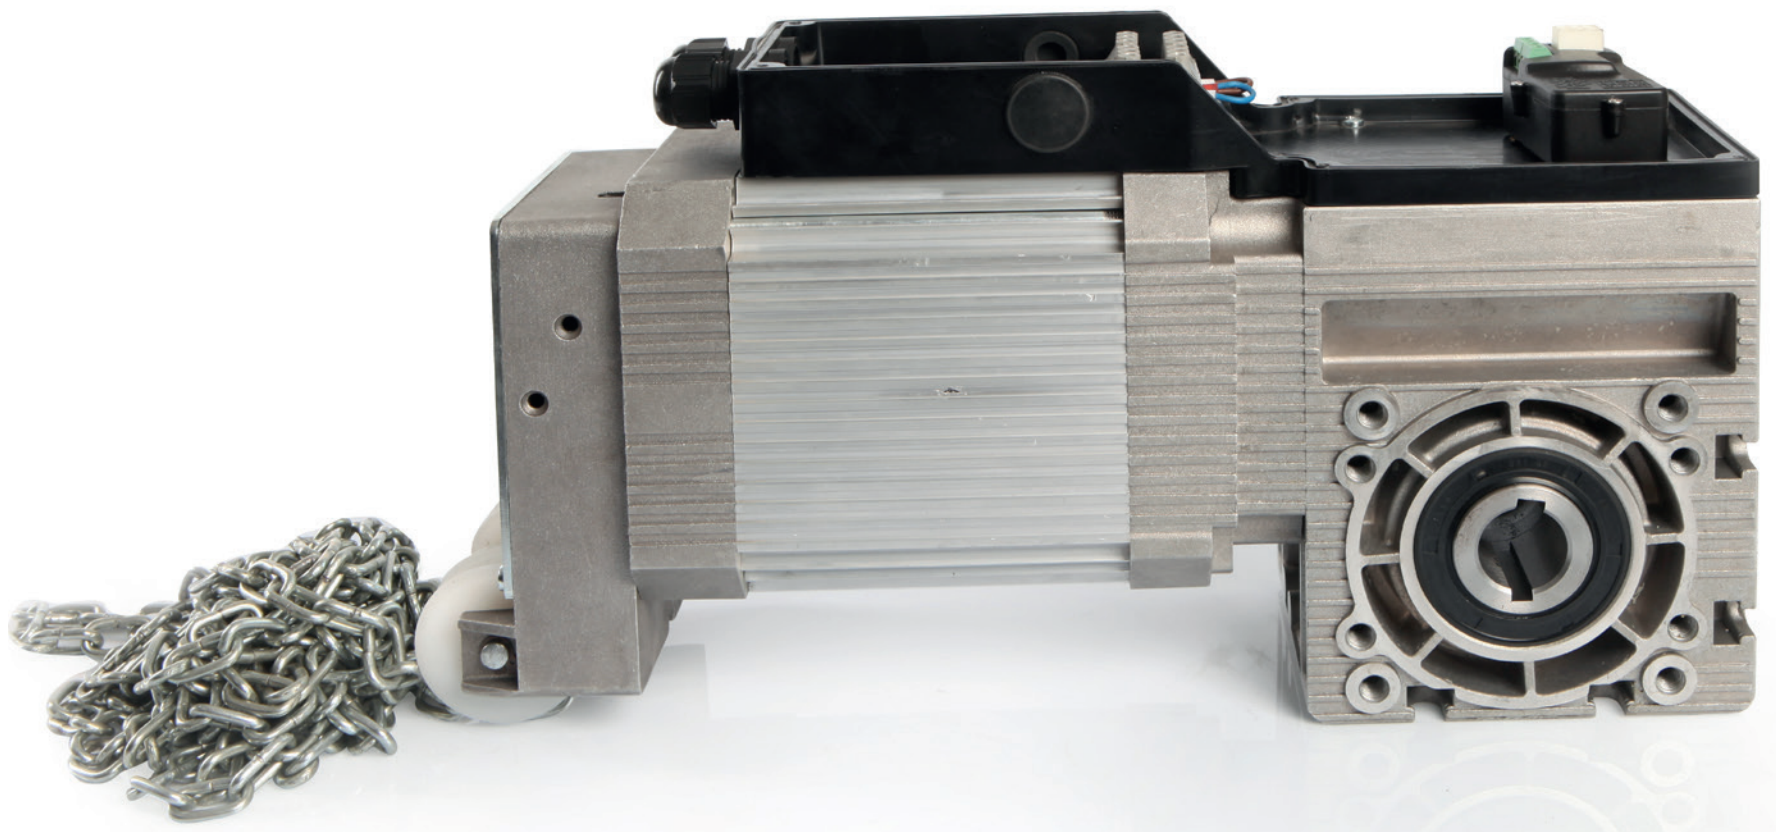

MOTOR POWER	OUTPUT TORQUE	OUTPUT SPEED	LIMIT CAPACITY	THROUGH HOLE DIAMETER	DUTY CYCLE ENGINE	NOMINAL CURRENTAT 400 VAC	PROTECTION CLASS	LENGHT		
P [kW]	**M**$_N$ [Nm]	**n*** [min^{-1}]	i Stw	**D*** [mm]	**S1** [%]	**I**$_N$ [A]	**IP**	**L1** [mm]	**L2** [mm]	**L3** [mm]
0,55	155	23	15-22,5 - 45	25,4	69,1	1,6	55	317,5	385,5	422,5
0,75	245	23	15-22,5 - 45	25,4	79,6	2,1	55	340,5	408,5	445,5
1,1 C	370	23	15-22,5 - 45	25,4	82,0	2,6	55	352,5	420,5	457,5

Optional : The values producing customer demanding

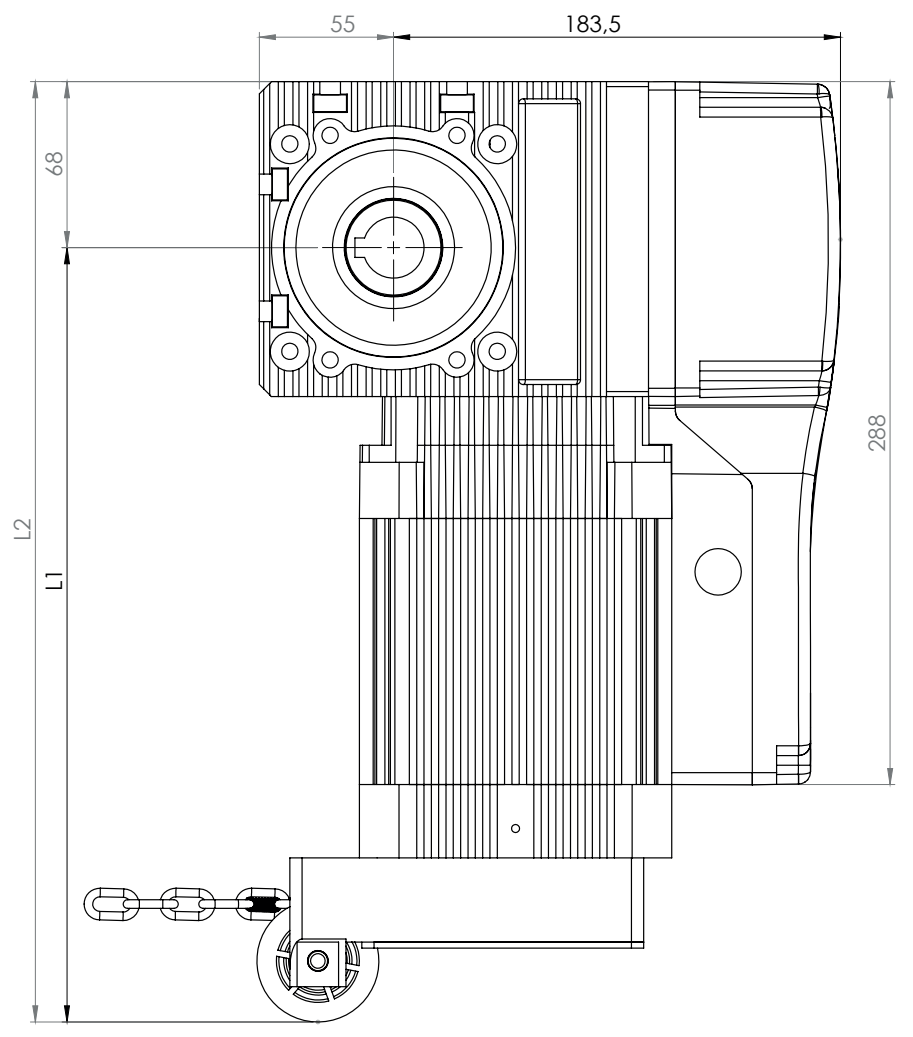

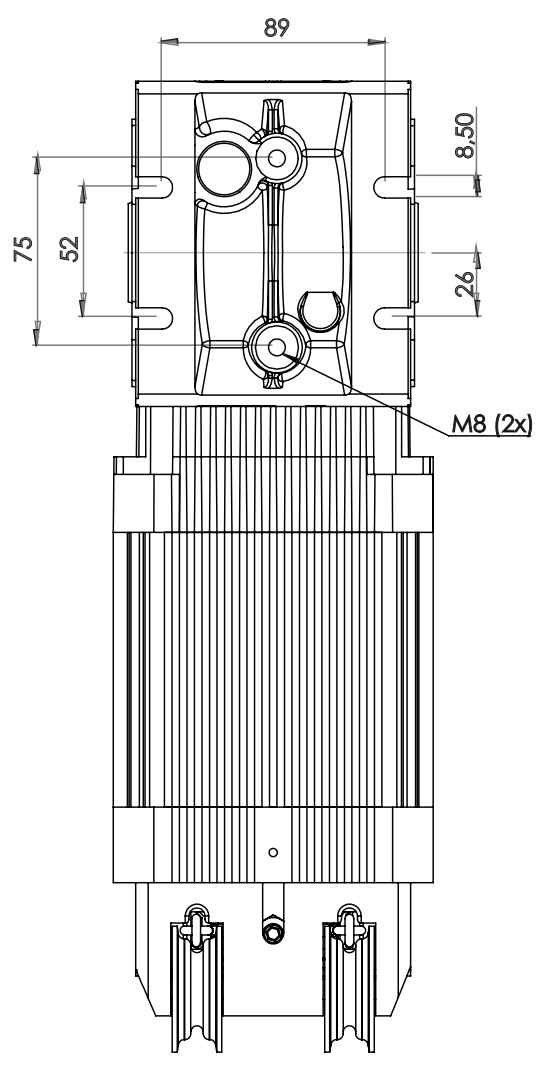

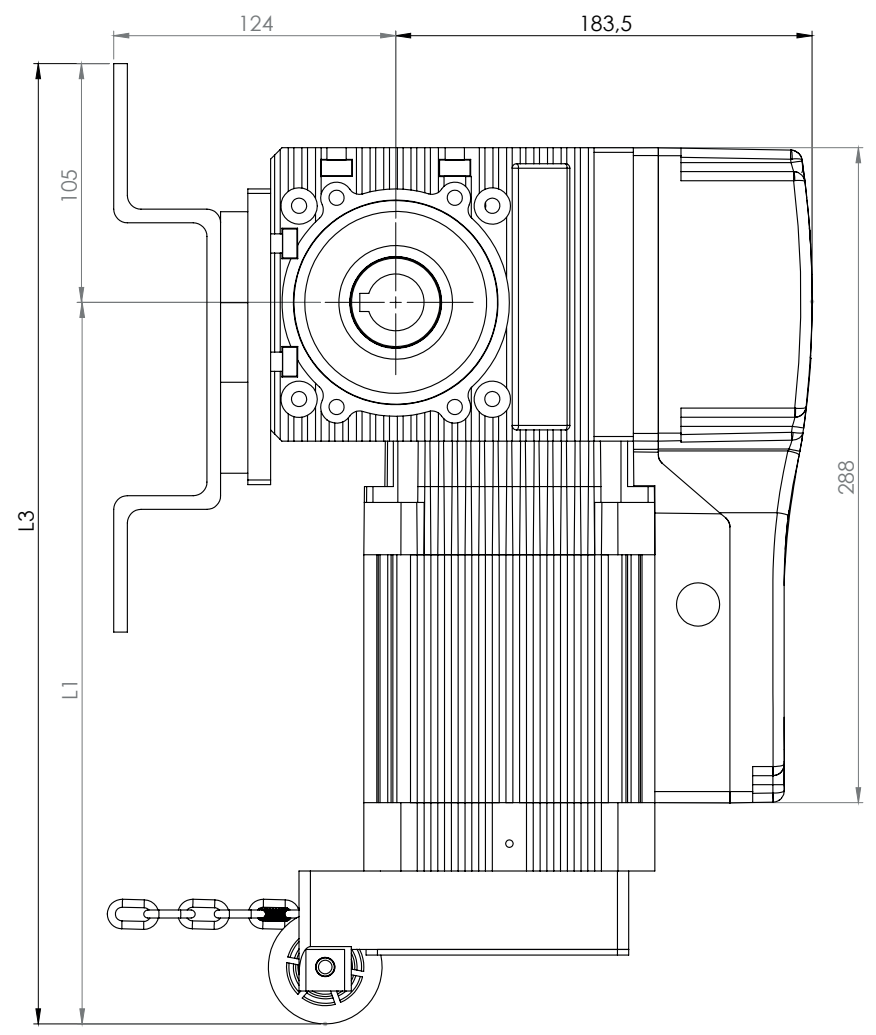

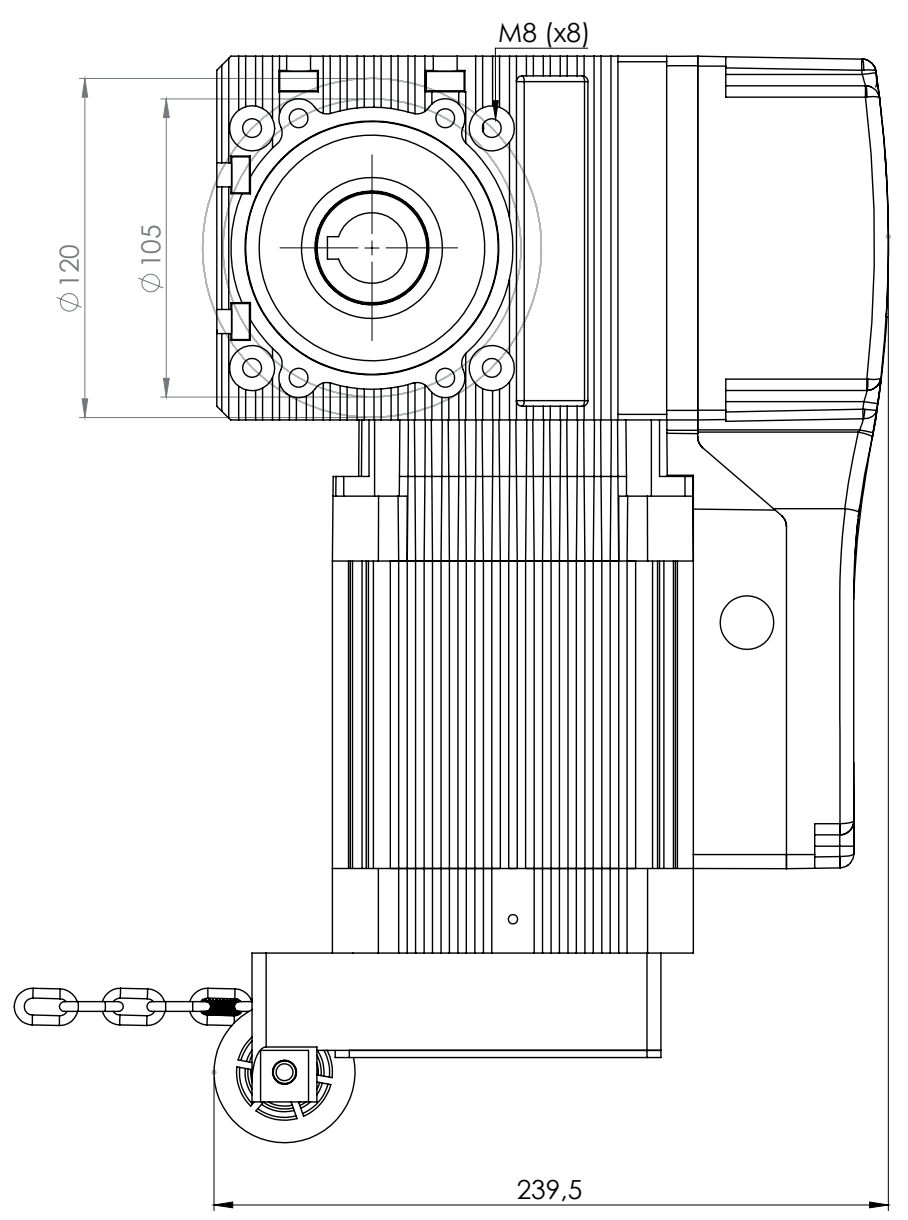

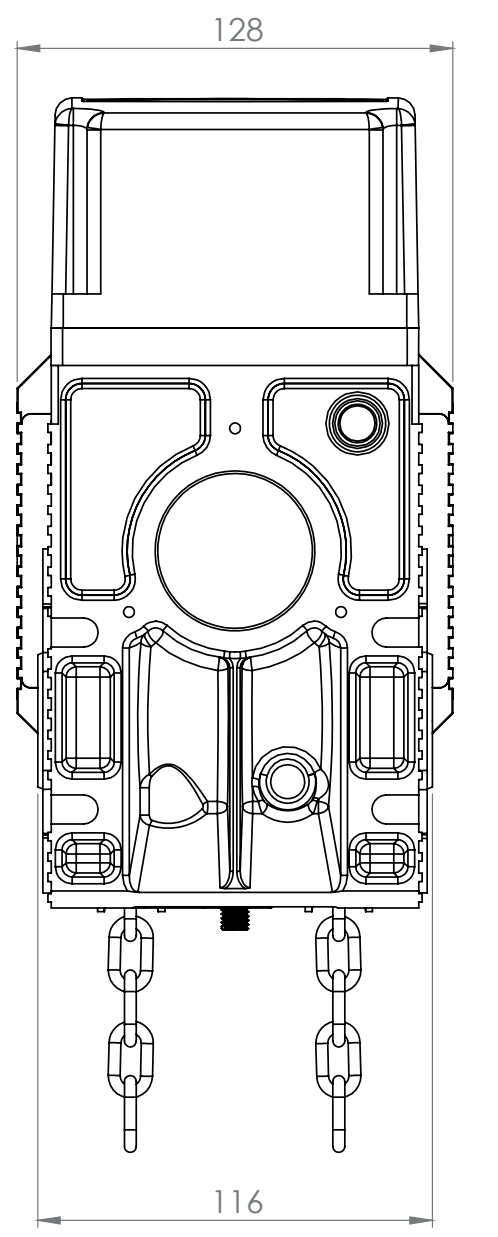

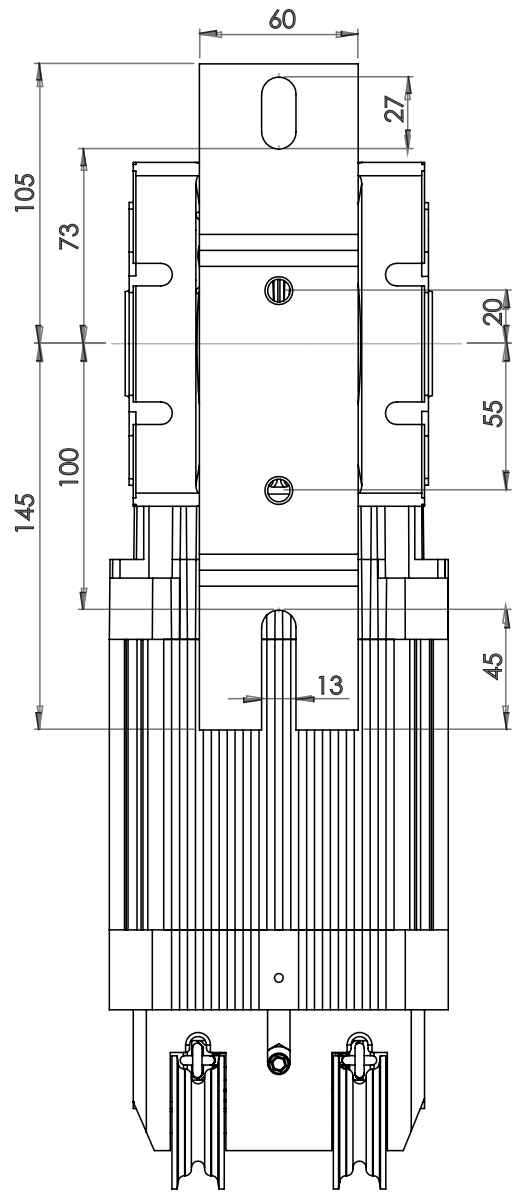

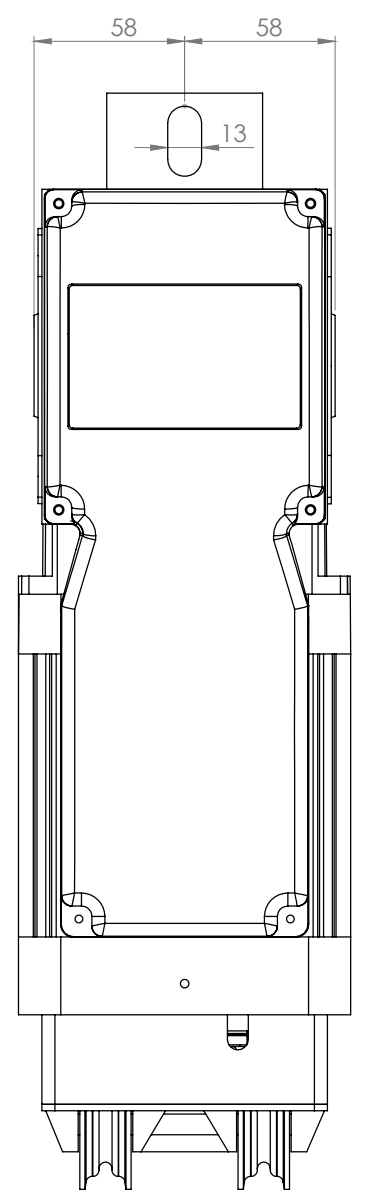

INDUSTRIAL DOOR DRIVE SYSTEM

63 BODY WITH BRAKE

Braked industrial door drive systems are being manufactured in Turkey under the guarantee of Akpinar Reduktor Motor with the brand name of Brakelli. Thanks to the Switch & Encoder shaft that is coming out of the monobloc structure, the reductors are able to precisely determine the location without the need for an external sensor.
With the support of brake behind the square body electric motor, the ability to stop at the desired position and time is provided. In the event of electric shortage, by deactivating the brake with manual intervention, it enables external intervention with the motor.
Motor power options: 2.2 kW Compact (3 HP Compact), 1.5 kW (2 HP), 1.1 kW (1.5 HP)

SAMPLE ORDER **CODE**

BRKM30008-60-1.5-4F-VP-0-0 (1.5 kW square engine, reductor through hole diameter Ø30,00, key width 8, ratio i:60, with 4 mechanic switches, brakes, cooling, manual intervention safety unit, without a board, without an energy cable)
BRKM400010-10-1.1-EF-YN-380-5 (1,1 kW square engine,reductor through hole diameter Ø40,00, key width 10, ratio i:10, with an encoder, brakes, without cooling, without manual intervention safety, driverless board, with energy cable of 5 meters)

BRKM ▶	It indicates the square motor
4000 ▶	First two digits indicates the reductor through hole diameter in whole number. Last two digits indicate the decimal and percentile value of the reductor through hole diameter.
10 ▶	Key-width size
15 ▶	Reducer ratio
2.2C ▶	Motor power [Kw] (If motor is not compact, C is not written)
EF ▶	E indicates that **encoder** is available. When it is mechanical switch, only switch number is written in number. F indicates the brakes.
VB ▶	V indicates that cooling is available. If cooling is not available, Y is written. P indicates the manual intervention security unit behind the vessel. If there won't be a unit, N is written.
220 ▶	It indicates the board. If the board has a driver, **220** is written, if it is driverless, **380** is written. If a board is not wanted, **"0"** is written.
3 ▶	It indicates the length of the cable between the board and motor. Standard cable lengths are **3**m, **5**m, **7**m If cable is not wanted, **"0"** is written.

Note: When the engine is compact, it interlaces with the subframe, hence a subframe reducer is mounted on the motor.
Note: F inscription always has to be present in an order for motor with brakes.

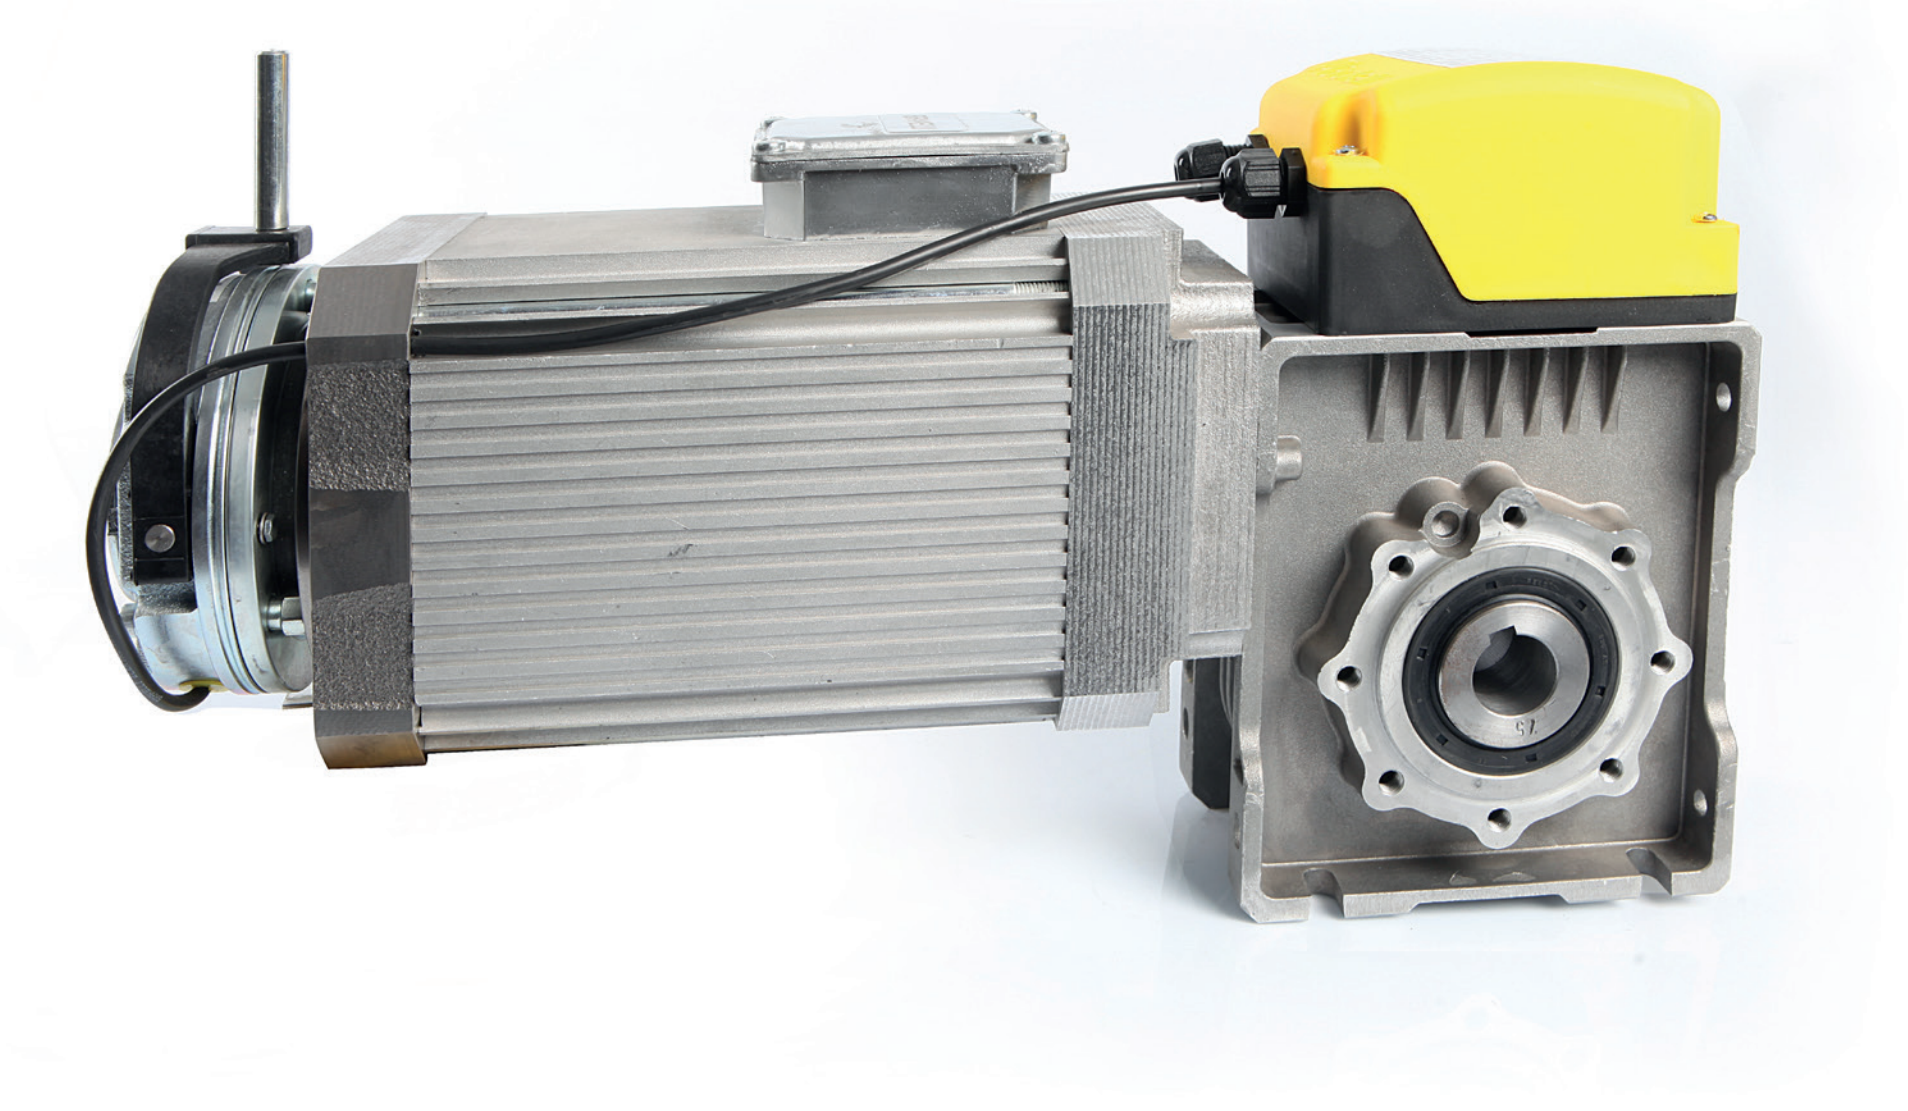

MOTOR POWER	OUTPUT TORQUE	OUTPUT SPEED	LIMIT CAPACITY	THROUGH HOLE DIAMETER	OPERATING VOLTAGE	DUTY CYCLE ENGINE	NOMINAL CURRENTAT 400 VAC	PROTECTION CLASS	BRAKE	LENGHT	
P [kW]	**M**$_N$ [Nm]	**n*** [min^{-1}]	i Stw	**D*** [mm]	**U** [V]	**S1** [%]	**I**$_N$ [A]	**IP**	**90** TYPE	**L1** [mm]	**L2** [mm]
1,1	92-62	93-140	15-22,5 - 45	25	110 DC	82,0	2,6	55	Existing	455	528
1,5	127-85	93-140	15-22,5 - 45	25	110 DC	83,0	3,5	55	Existing	465	538
2,2 C	190-127	93-140	15-22,5 - 45	25	110 DC	84,5	5,0	55	Existing	495	568

Optional : The values producing customer demanding

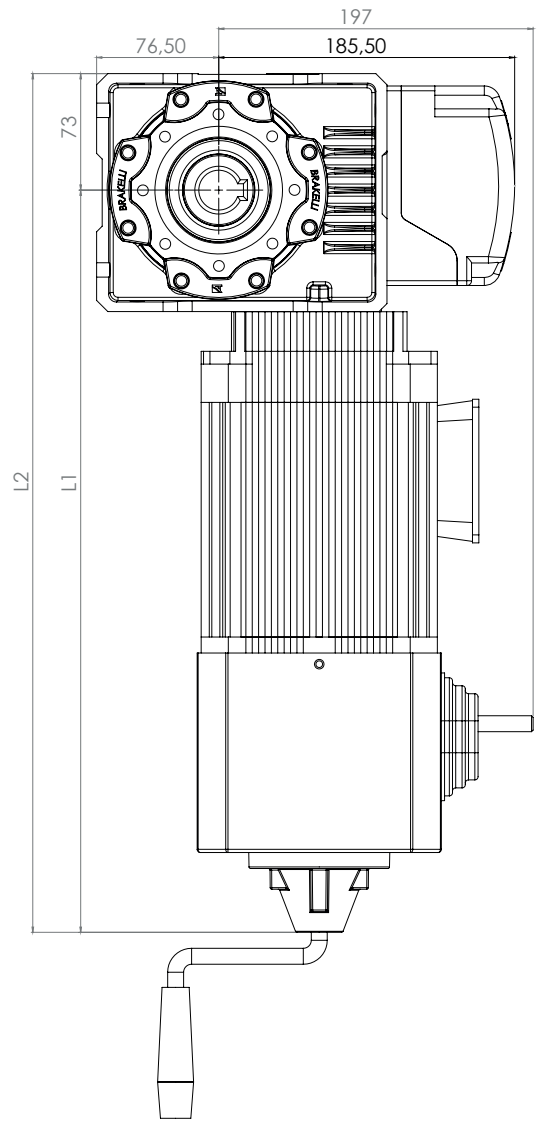

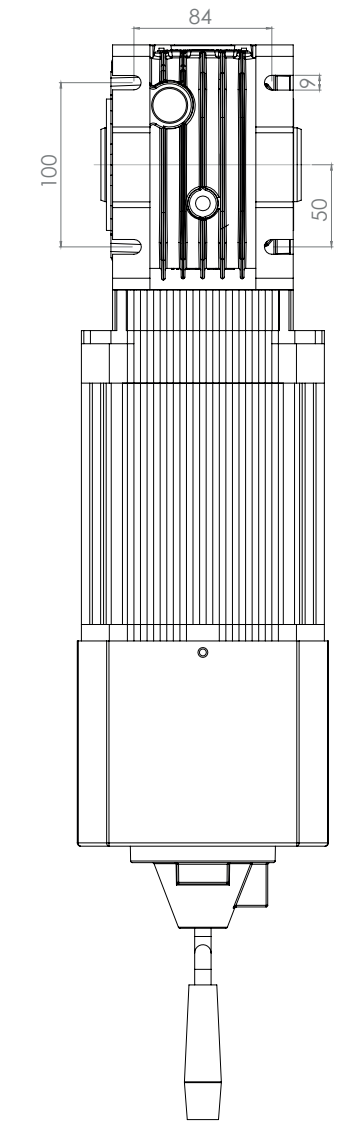

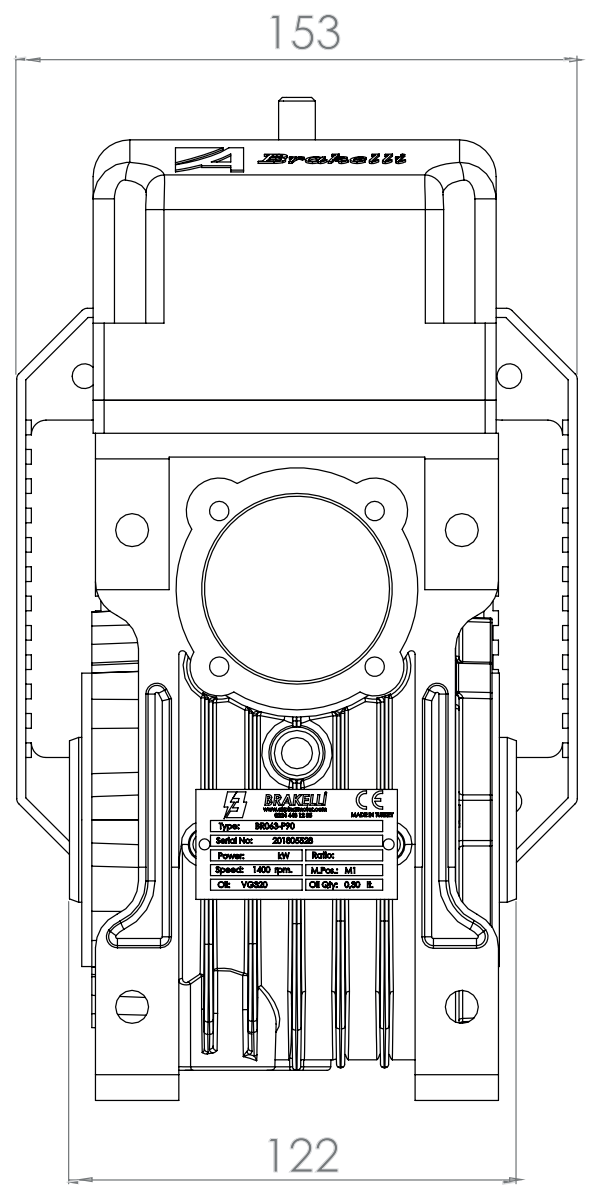

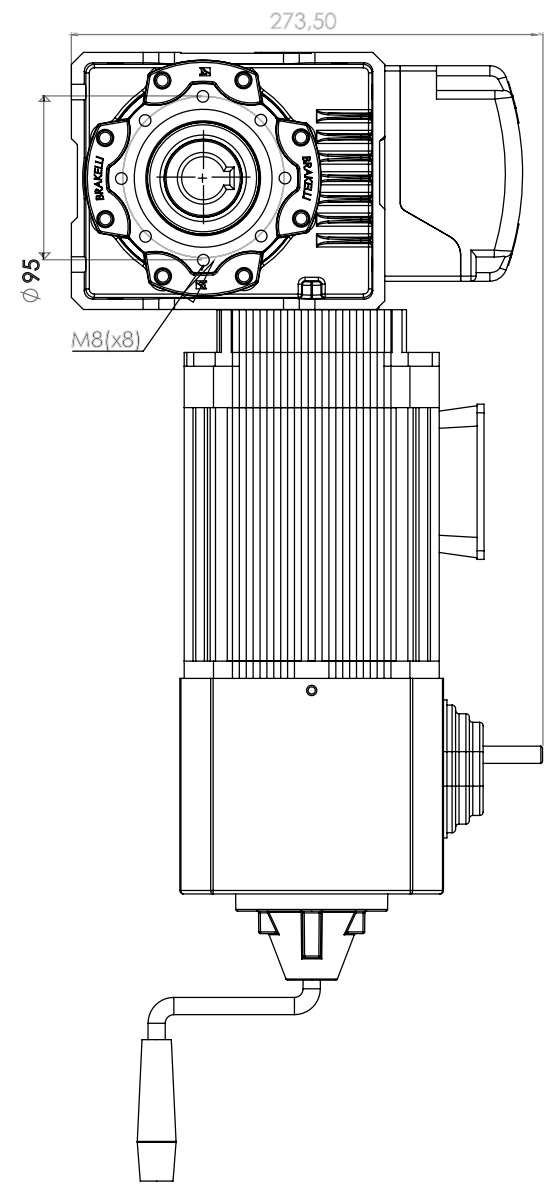

INDUSTRIAL DOOR DRIVE SYSTEM

63 BODY WITH CHAIN UNIT

Chain unit industrial door drive systems are being manufactured in Turkey under the guarantee of Akpinar Reduktor Motor with the brand name of Brakelli. Thanks to the Switch & Encoder shaft that is coming out of the monobloc structure, the reductors are able to precisely determine the location without the need for an external sensor.

With the support of brake integrated to the back of the square body electric motor, the ability to externally intervene the motor in the event of electric shortage is provided. The height of the chain can be determined according to the height of the door and the request of the customer.

Motor power options: 2.2 kW Compact (3 HP Compact), 1.5 kW (2 HP), 1.1 kW (1.5 HP)

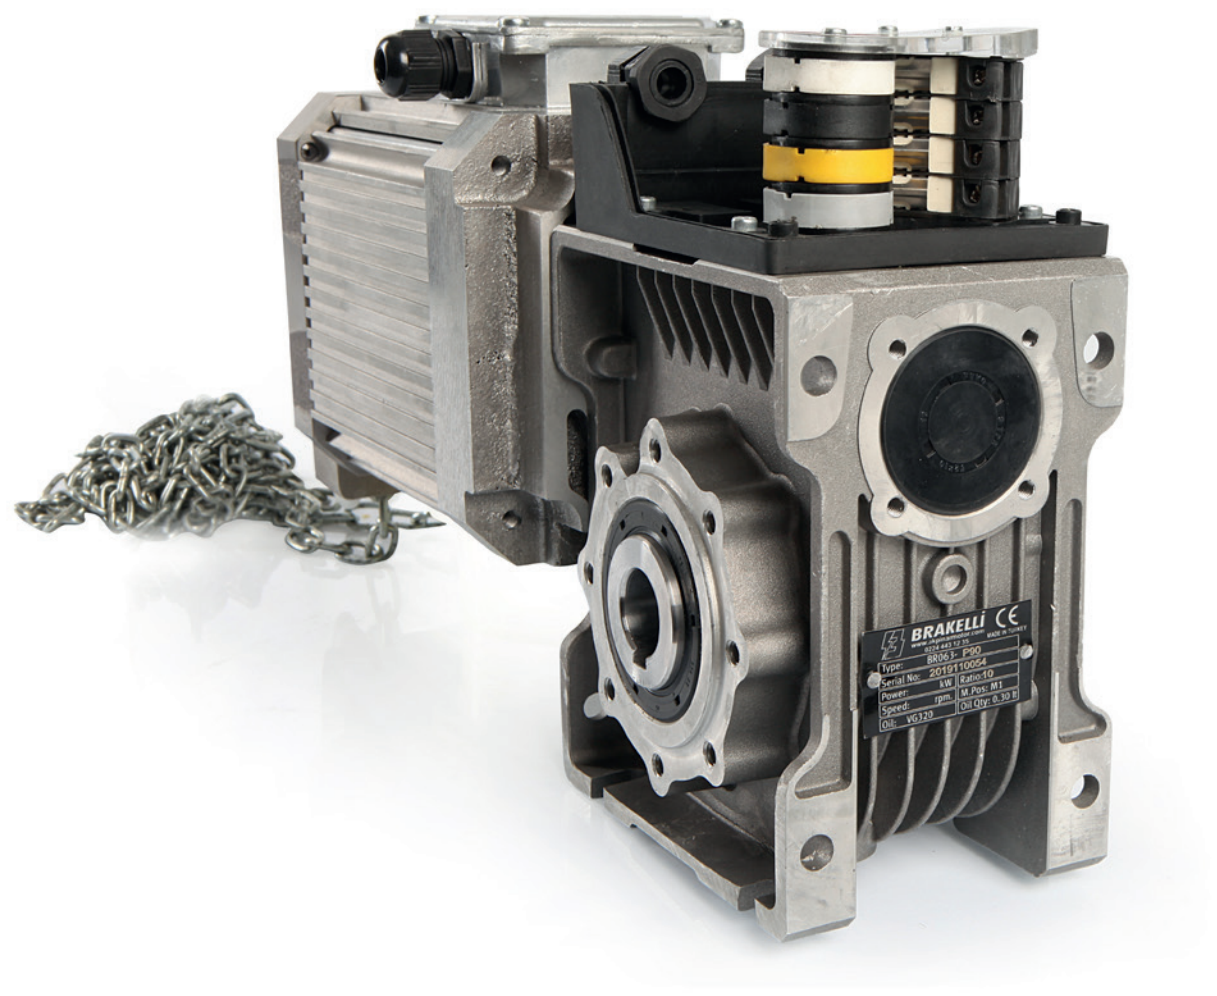

SAMPLE ORDER **CODE**

BRKM32008-30-1.1C-EZ-10-220-7 (1.1 kW compact square engine, reductor through hole diameter Ø32,00, key width 8, ratio i:30, with Encoder, manual chain-intervention unit, 10-meters long chain, board with driver, 7-meters long energy cable)

BRKM300010-40-0,55-3Z-08-380-0 (0,55 kW square engine, reductor through hole diameter Ø30,00, key width 10, ratio i:40, with 3 mechanic switches, manual chain-intervention unit, 8-meters long chain, driverless board, without an energy cable)

BRKM ▶	It indicates the square motor
2500 ▶	First two digits indicates the reductor through hole diameter in whole number. Last two digits indicate the decimal and percentile value of the reductor through hole diameter.
8 ▶	Key-width size
15 ▶	Reducer ratio
1.1C ▶	Motor power [Kw] (If motor is not compact, C is not written)
EZ ▶	E indicates that **encoder** is available. When it is mechanical switch, only switch number is written in number. F indicates the brakes.
10 ▶	It indicates the length of the chain in meters when unclasped.
380 ▶	It indicates the board. If the board has a driver, **220** is written, if it is driverless, **380** is written. If a board is not wanted, **"0"** is written.
7 ▶	It indicates the length of the cable between the board and motor. Standard cable lengths are **3**m, **5**m, **7**m If cable is not wanted, **"0"** is written.

Note: When the engine is compact, it interlaces with the subframe, hence a subframe reducer is mounted on the motor.
Note: Z inscription always has to be present in an order for motor with manual chain intervention.

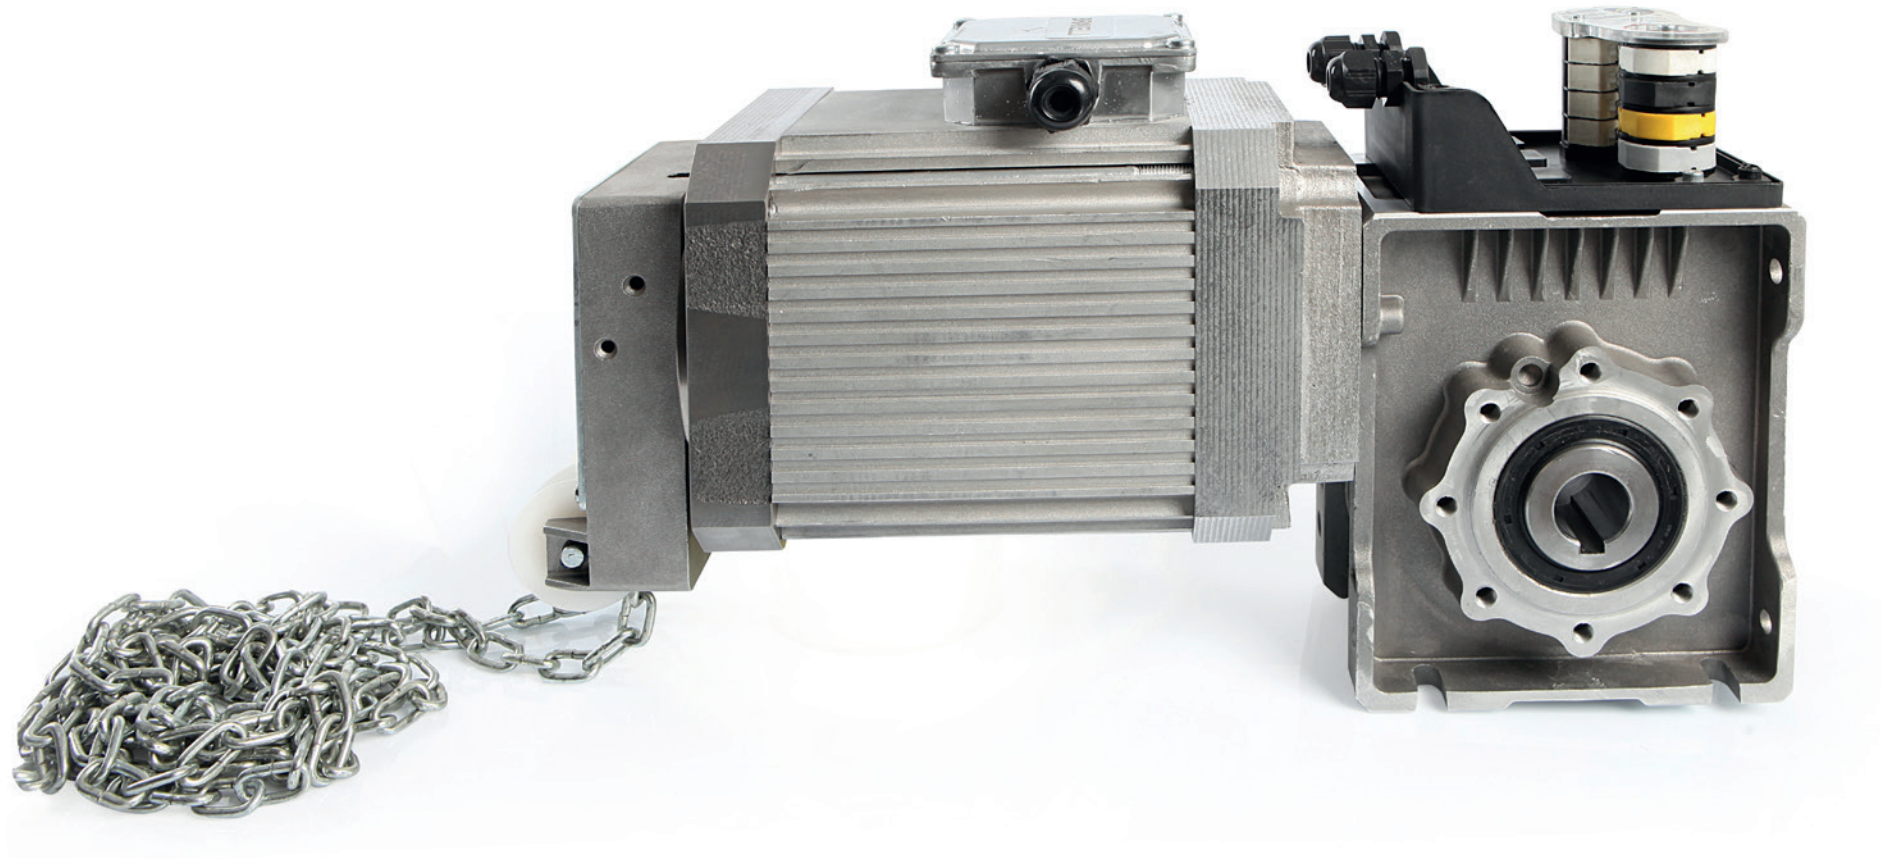

MOTOR POWER	OUTPUT TORQUE	OUTPUT SPEED	LIMIT CAPACITY	THROUGH HOLE DIAMETER	OPERATING VOLTAGE	DUTY CYCLE ENGINE	NOMINAL CURRENTAT 400 VAC	PROTECTION CLASS	LENGHT	
P [kW]	**M_N** [Nm]	**n*** [min^{-1}]	i_{Stw}	**D*** [mm]	**U** [V]	**S1** [%]	**I_N** [A]	**IP**	**L1** [mm]	**L2** [mm]
1,1	315	23	15-22,5 - 45	31,75	110 DC	82,0	2,6	55	369,25	442,25
1,5	515	23	15-22,5 - 45	31,75	110 DC	83,0	3,5	55	379,25	452,25
2,2 C	770	23	15-22,5 - 45	31,75	110 DC	84,5	5,0	55	409,25	482,25

Optional : The values producing customer demanding

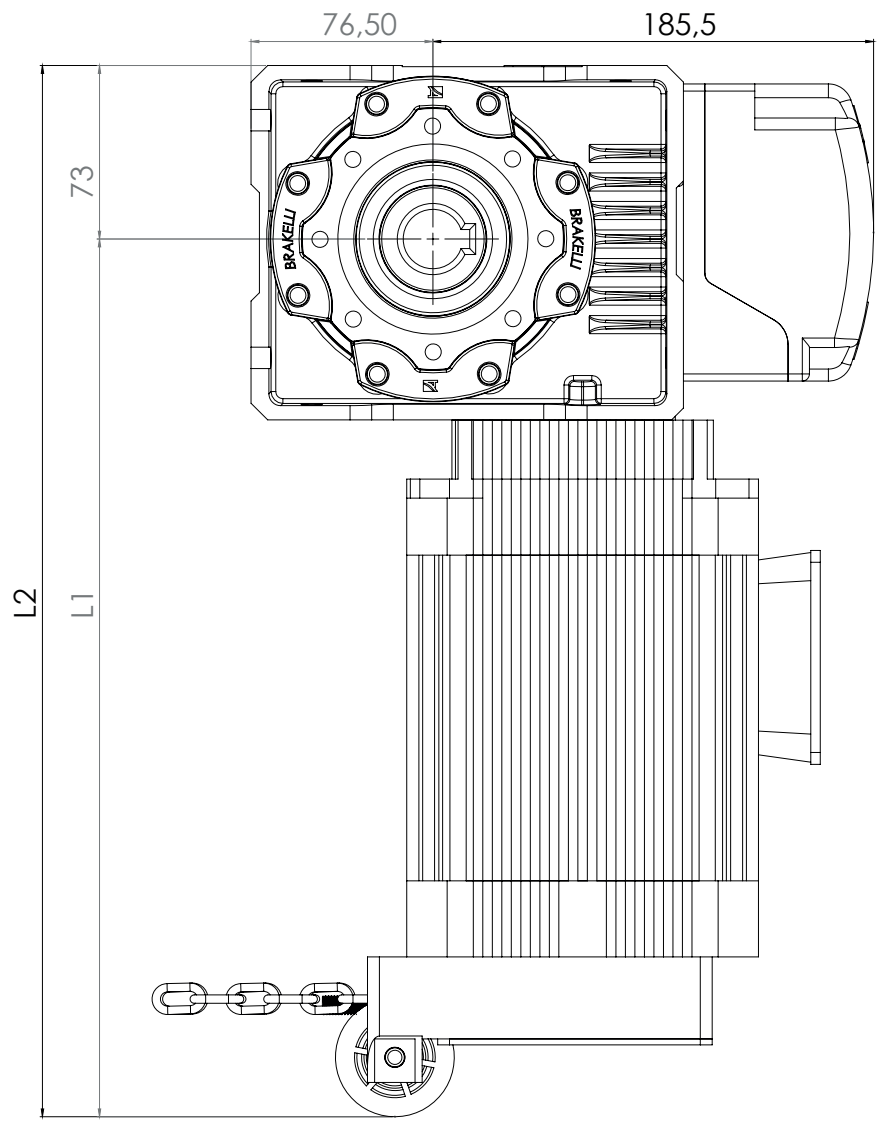

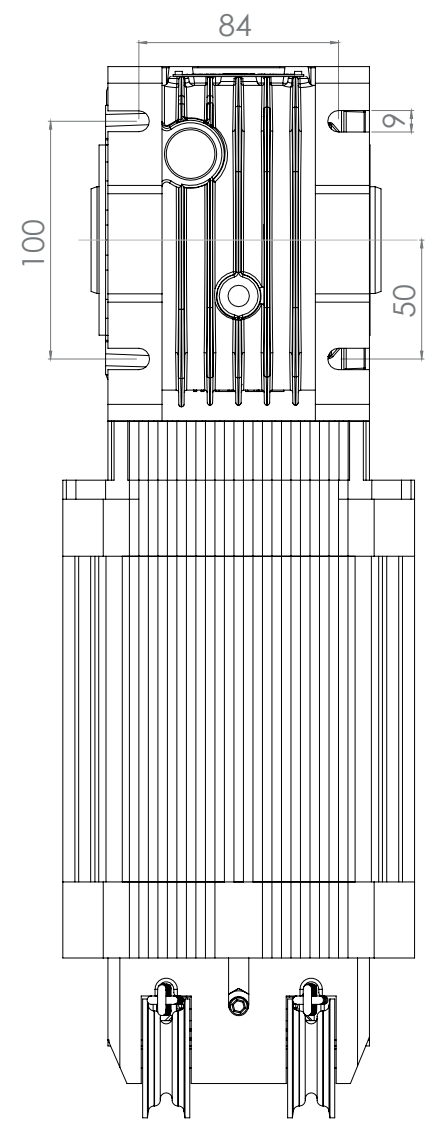

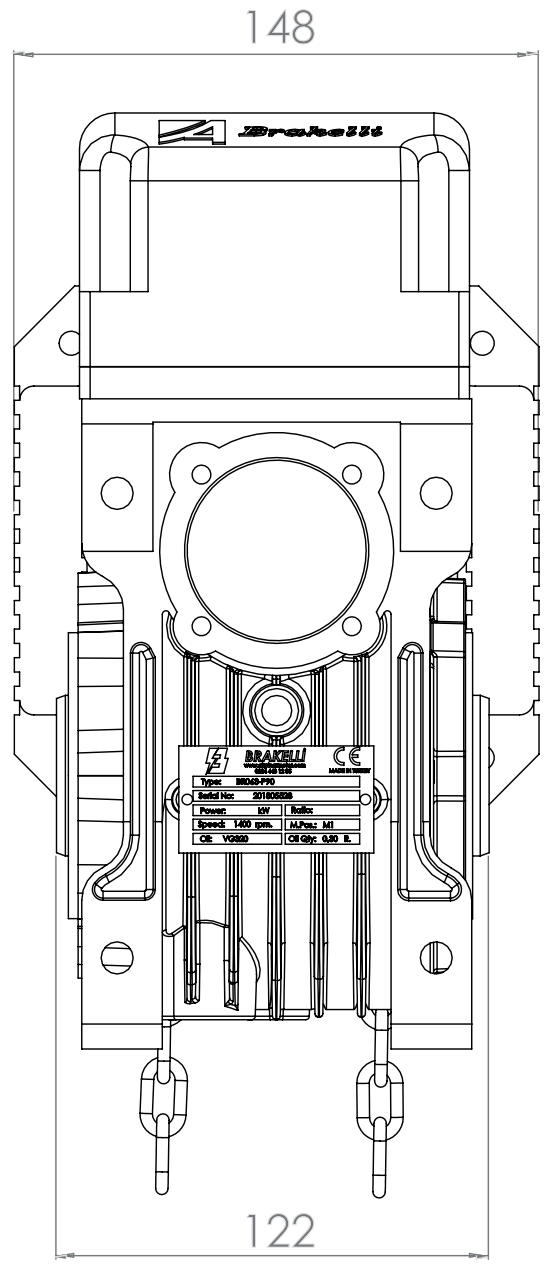

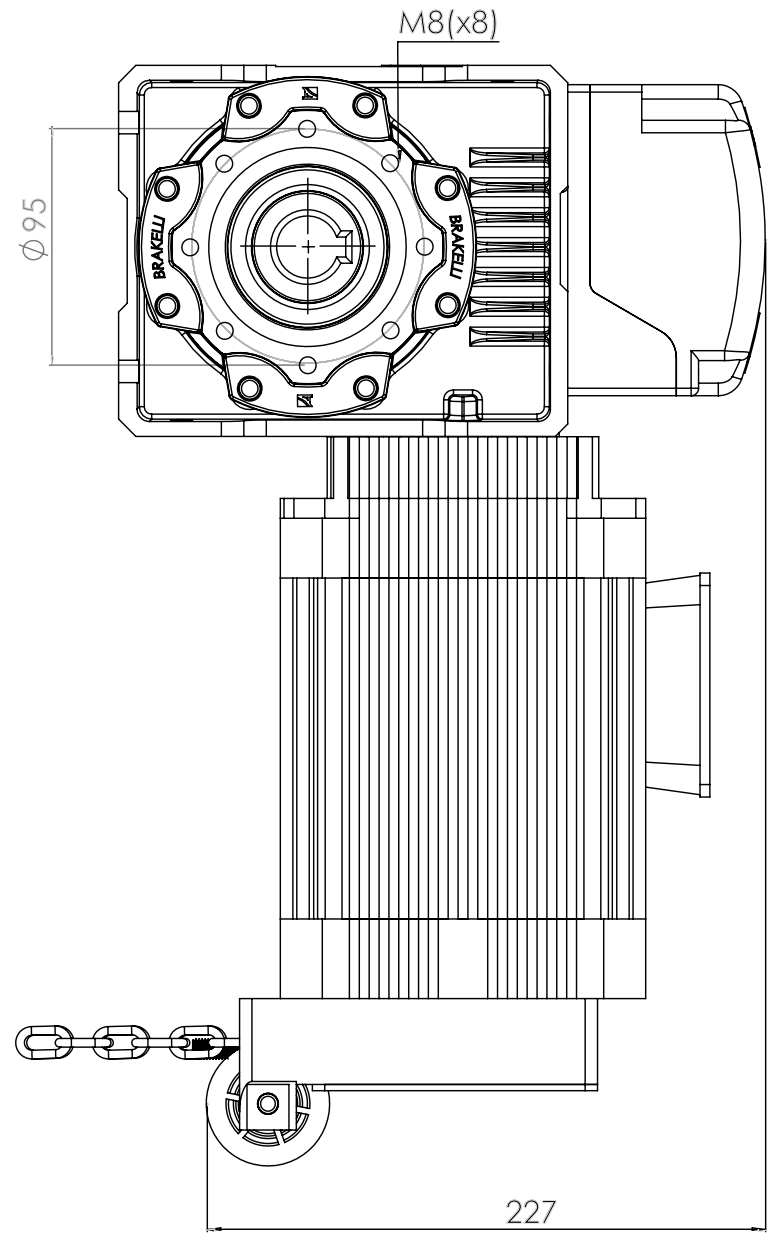

www.**brakelli**.com | www.**akpinarmotor**.com

MANUFACTURING PLANT
AKPINAR REDÜKTÖR MAKİNA SAN. TİC. LTD. ŞTİ.
Çalı Mah. Geyveli Cad. No.24 / 1-1
Nilüfer BURSA / TURKEY
T. +90 224 **443 2125 - 443 1235 - 443 0941**
T. +90 224 **441 9751 - 443 2173**
F. +90 224 **443 1594**

SALES OFFICE 1
Nilüfer Ticaret Merkezi Demirci Mah. 66 Sok. D Blok No:3 Beşevler
Nilüfer BURSA / TURKEY

SALES OFFICE 2
Alaattinbey Pazar Cad. No.14
Nilüfer BURSA / TURKEY
T. +90 224 **441 2173**
F. +90 224 **443 1594**

E.
info@**akpinarmotor**.com
www.**brakelli**.com
www.**akpinarmotor**.com