
Specifications


	Equipment		STACKER
Dimensions	Rated Capacity	Kgs	1600
	Forks Length	mm	1150
	Width	mm	575
	Overall Length	mm	2065
	Width	mm	DW
	(Excluding Mast) Height	mm	1450
	Ground Clearance	mm	30
Wheels	PU Wheels		
	Load Wheel	mm	Ø83X70
	Drive Wheel	mm	Ø230X70
Drive	Lift Motor DC	KW	3
	Drive Motor AC	KW	1.5
	Battery	V/AH	24/280


Lift height	DW
UP TO 3600	835 mm
3600 to 4500	1040 mm
4500 to 6300	1140 mm



LOAD CENTER

Lift Height H mm	Actual Capacity Kgf @ LC	
	A	B
2500	1600	1100
3100	1200	900
3500	1000	800
4000	970	700
4500	950	800
5000	900	850
5500	850	750
6000	800	450
6300	600	300

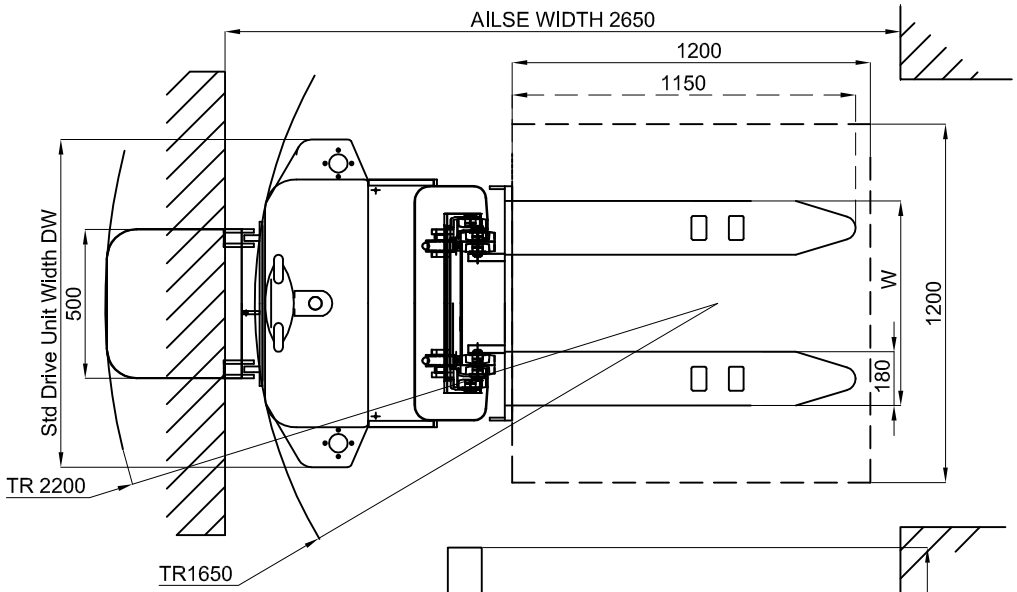

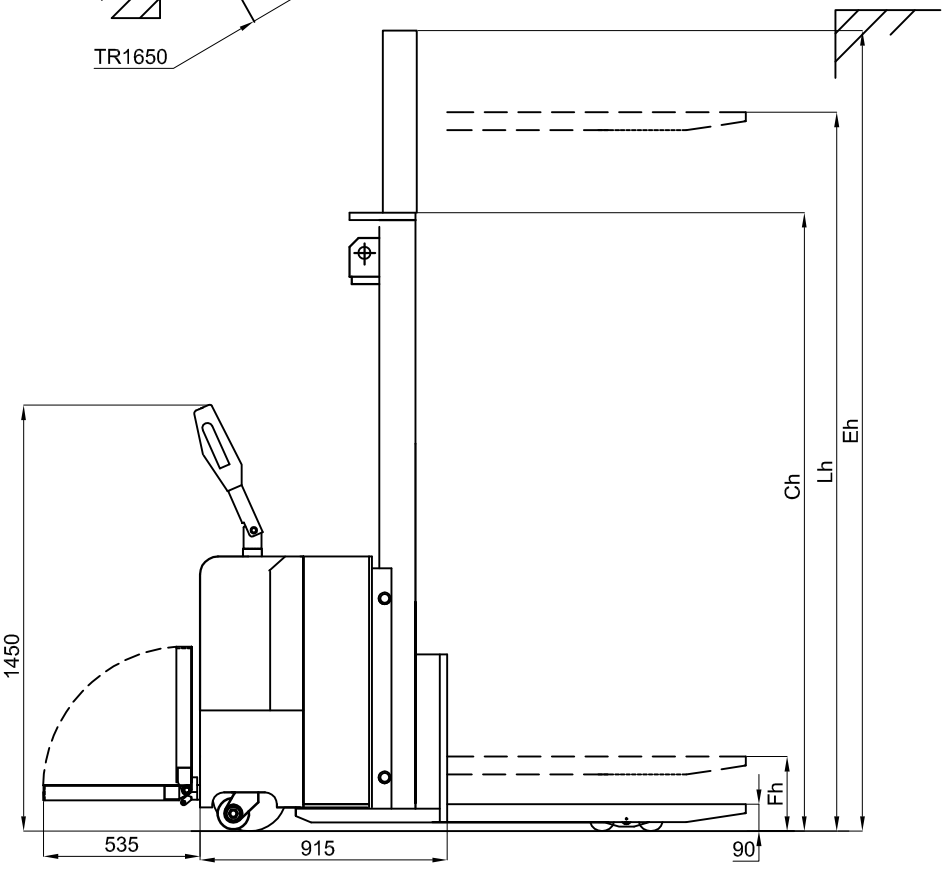

Specifications	TWIN MAST				TRIPPLE MAST						
Max. Lift Height (Lh)	2500	3000	3600	4500	3600	4500	4800	5000	5500	6000	6300
Mast Closed Height (Ch)	1800	2050	2350	2445	1765	2065	2165	2332	2398	2665	2665
Free Lift (Fh)	250	250	250	250	1250	1550	1650	1720	1880	2050	2150
Extended Mast Height(Eh)	3020	3520	4120	5020	4120	5020	5320	5520	6020	6520	6820
Drive Unit Width	830	830	830	1040	850	1040	1040	1040	1140	1140	1140
Width Over Forks	575	575	575	575	575	575	575	575	750	750	750

CAPACITY 1600 KGS

BATTERY OPERATED
STACKER