

Orion

Conveyor System Rev 05

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

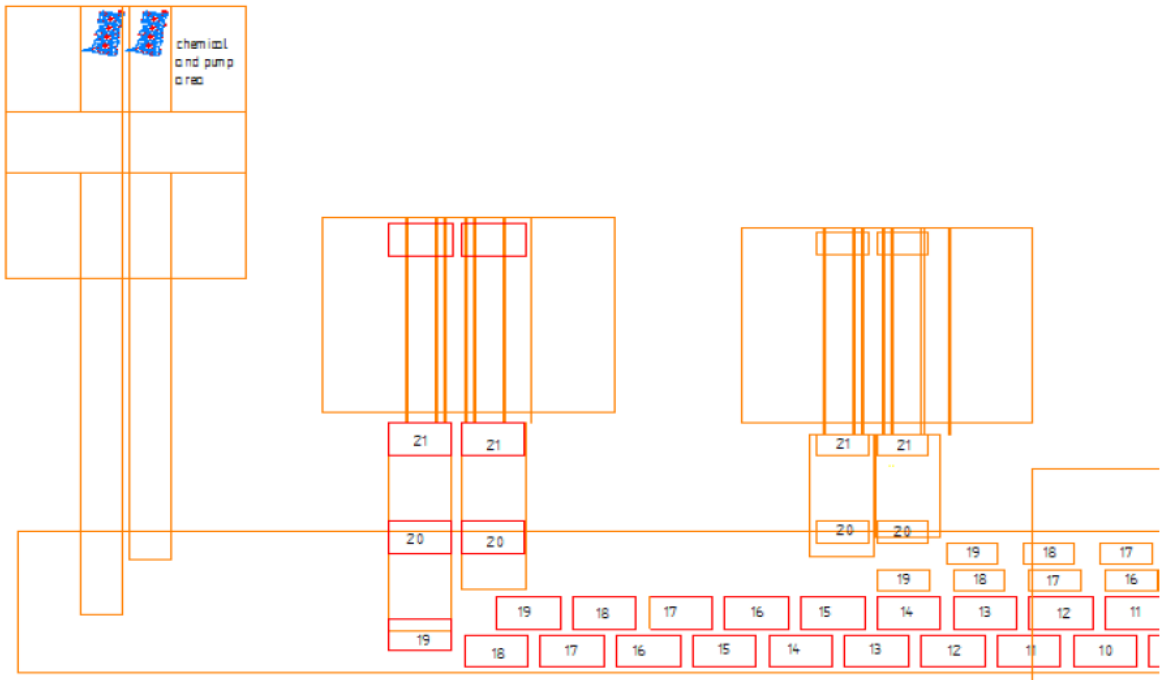

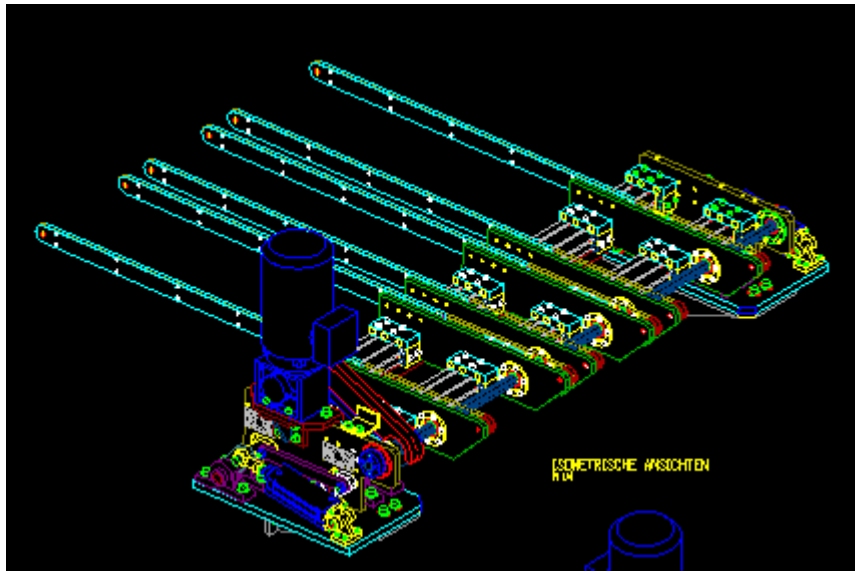

- Dimension of the layers to be transferred from SPT and NBR are as follow:


	Min	Max
Length	100mm	600mm
Width	100 mm	400mm
Height	0.1 mm	1.0 mm
Weight	14 gram	200 gram

2.1 Mechanical Specification

Belts	Belt 1	Belt 2	Belt 3	Belt 4	Belt 5	Belt 6
	NBR		SPT-1		SPT-2	
Length(mm) (Minimum)	1100	1100	750	750	650	650
Length(mm) (Maximum)	1700	1700	1700	1700	1300	1300
Length(mm) (Fixed)	1000	1000	650	650	650	650
Width (mm)	330	330	650	650	650	650
Height (mm) (Adjustable) (from ground to the top of the belt)	950-1100	950-1100	950-1100	950-1100	950-1100	950-1100
Belt Material	PVC	PVC	PVC	PVC	PVC	PVC
Belt Speed (m/min)	0-10	0-10	0-10	0-10	0-10	0-10
Idler Diameter for the belt (mm)	50	50	50	50	50	50

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

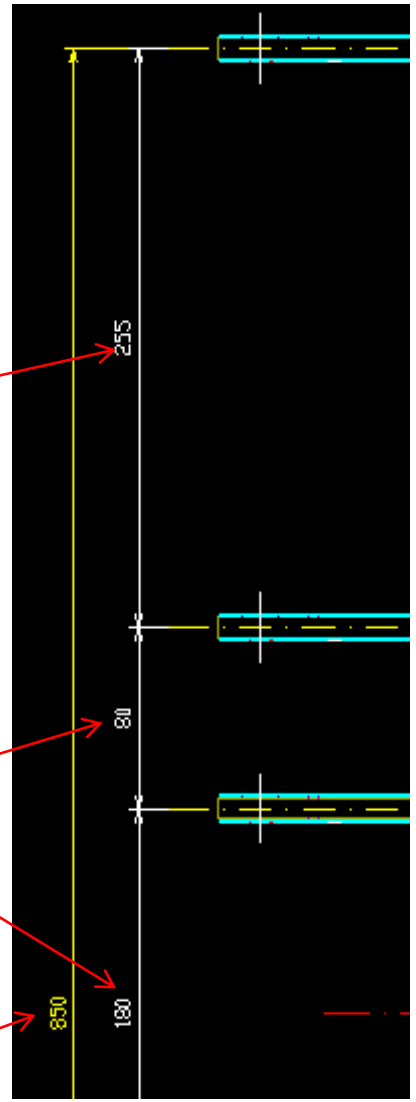



225

80

90

850

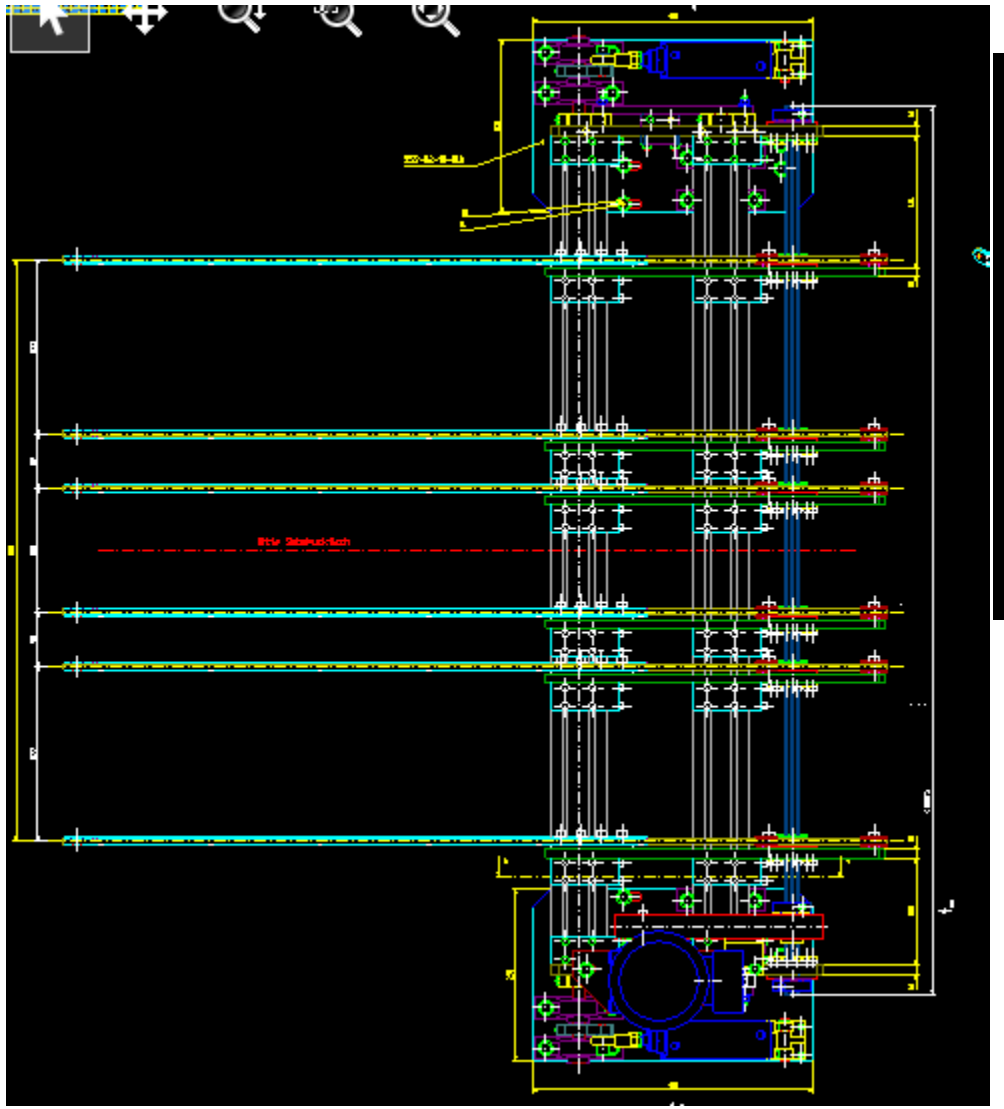

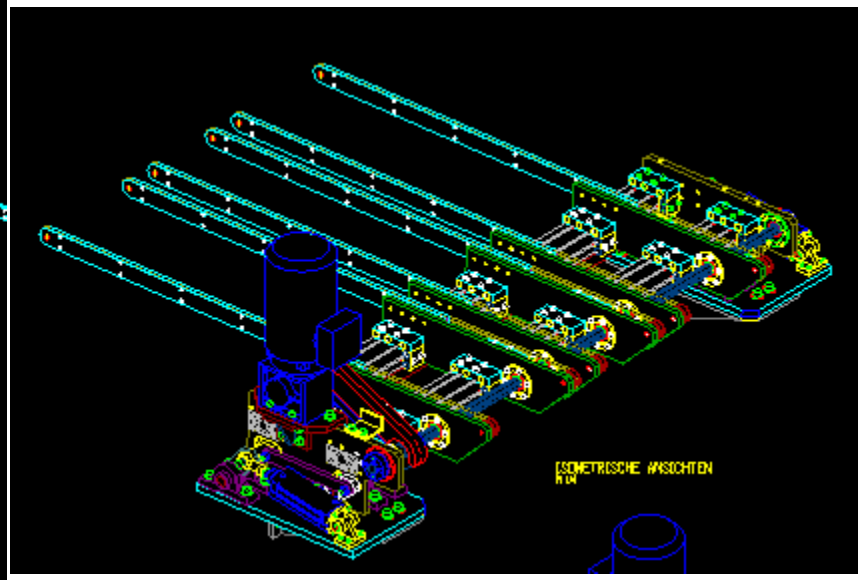

Orion Technologies.


Mechanical Design & Analysis Services at Orion Technologies India.

oriondesignt@gmail.com


+91 8087333327.

Orion

CASE-01

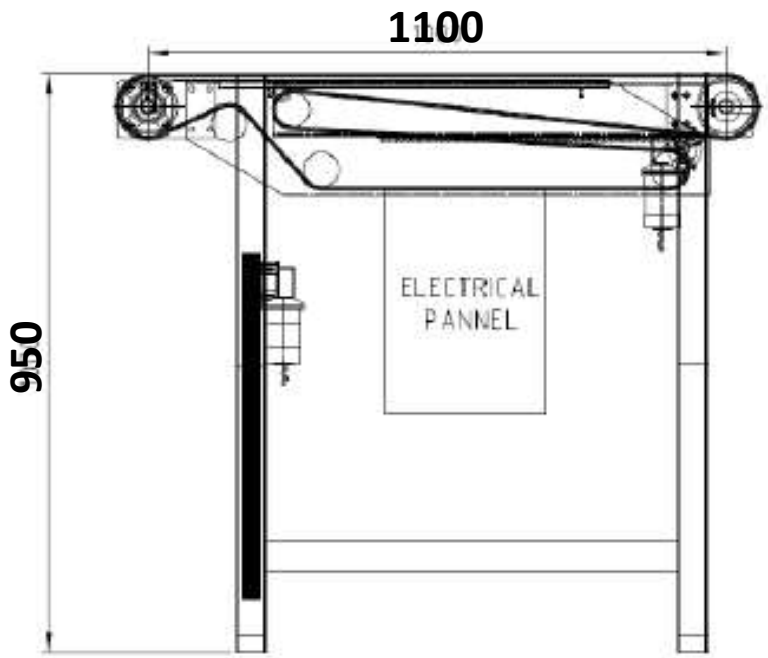

STANDARD POSITION

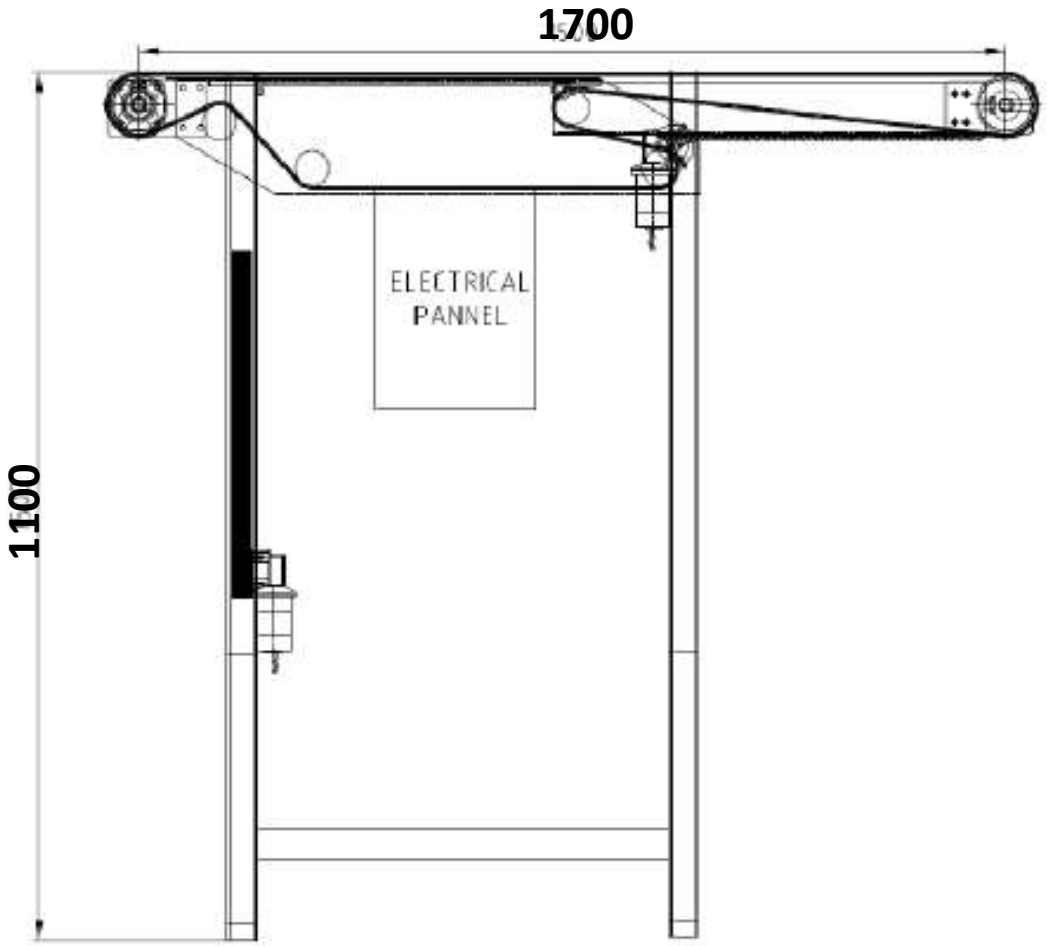


EXPANDED POSITION

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion


CASE-01

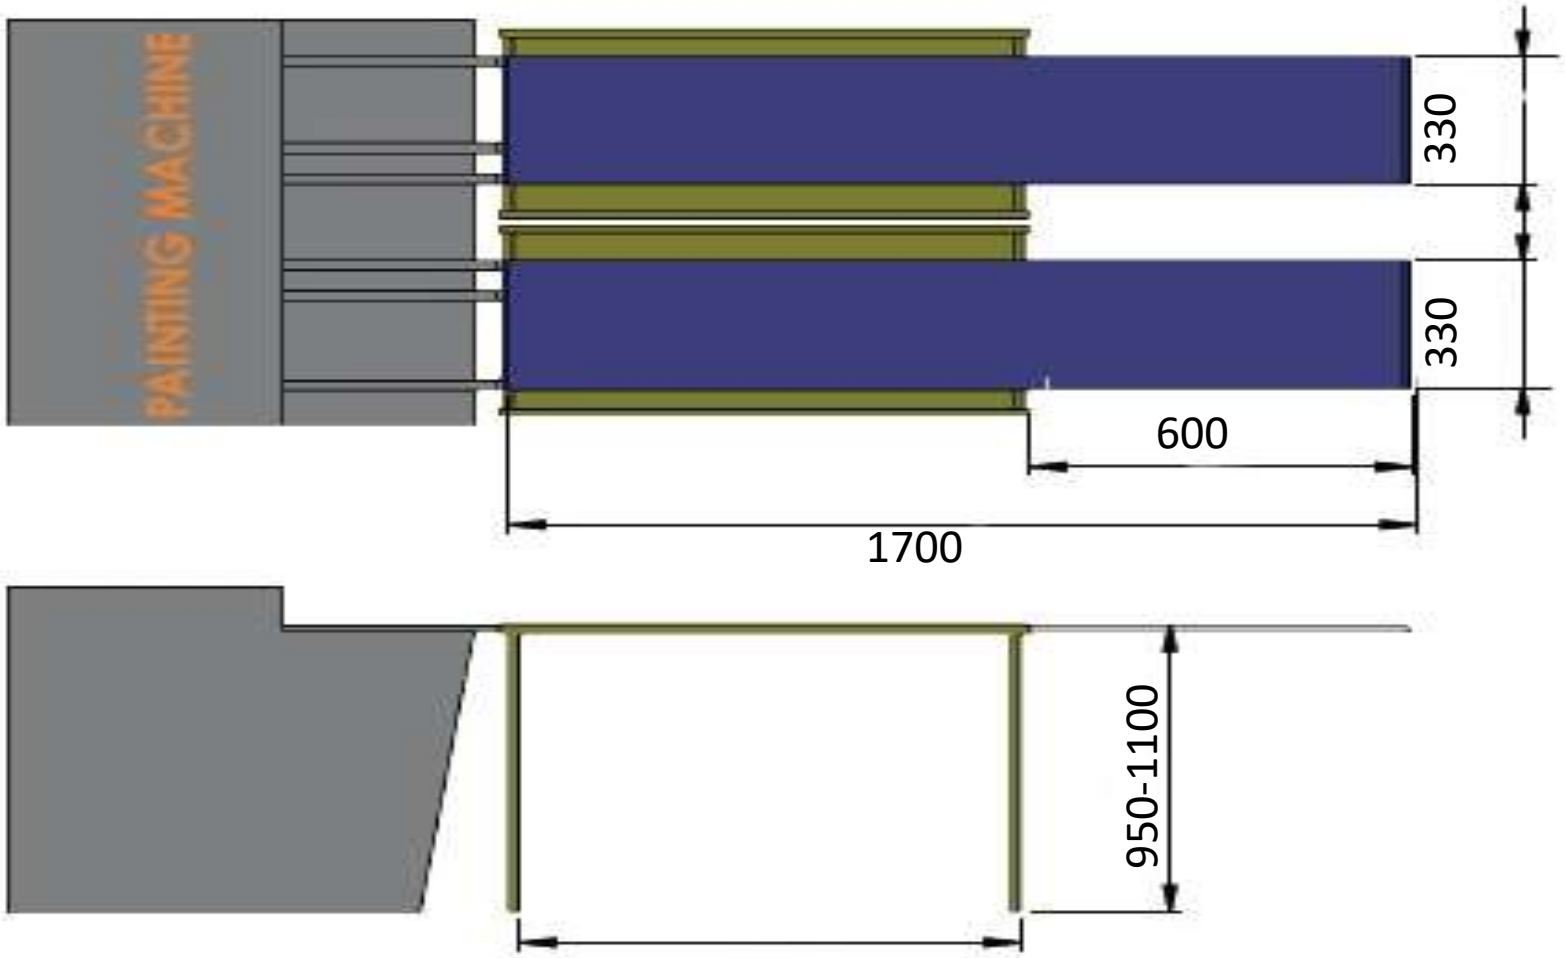


Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

CASE-02

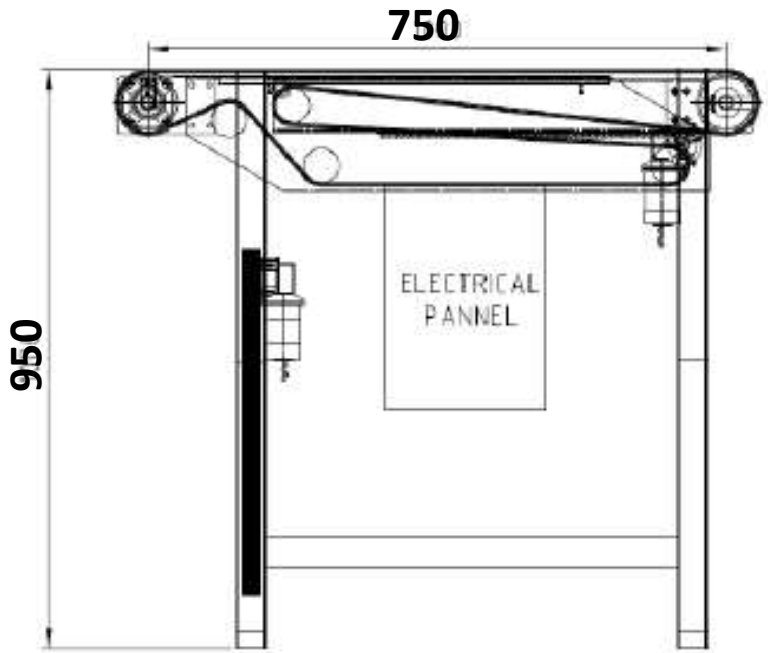

STANDARD POSITION

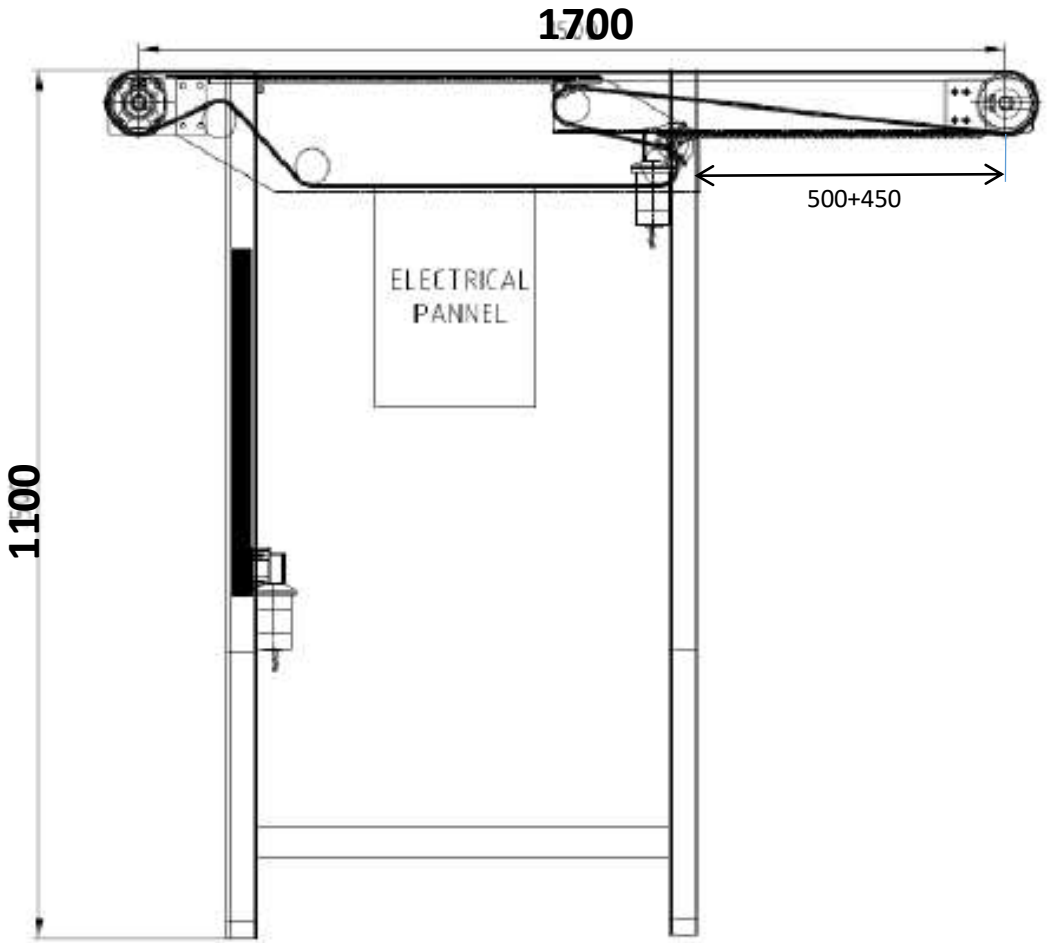


EXPANDED POSITION

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion


CASE-02

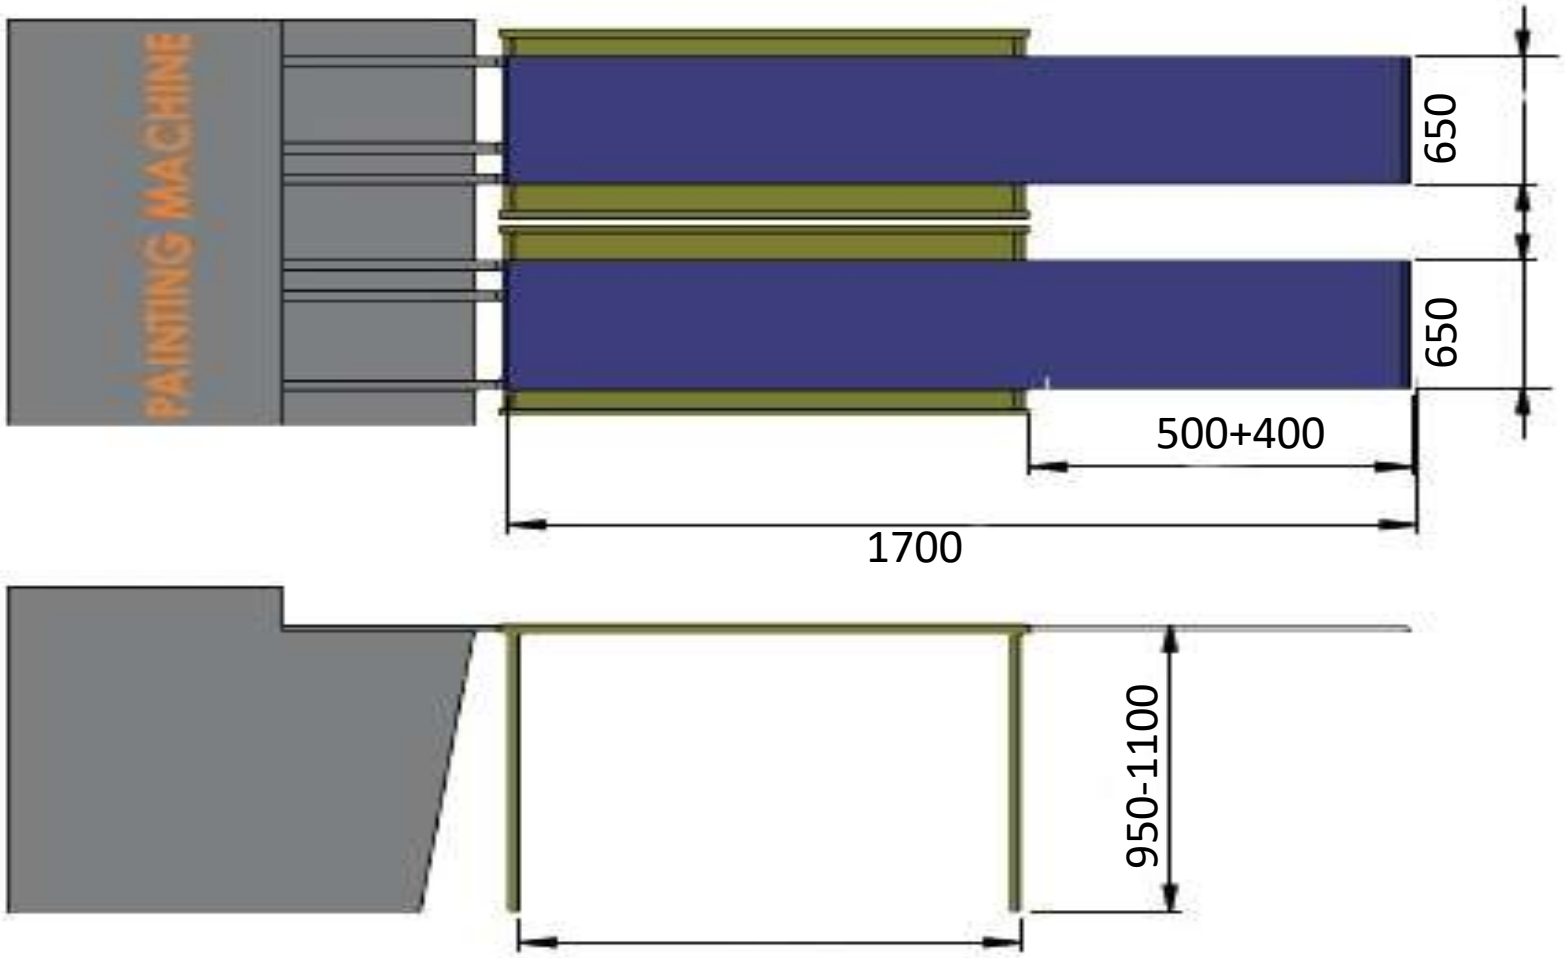


Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

CASE-03

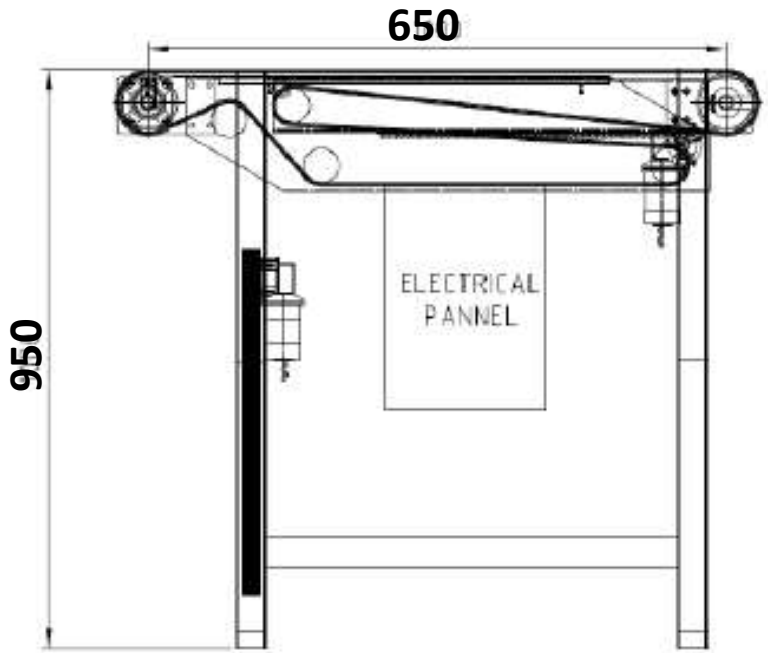

STANDARD POSITION

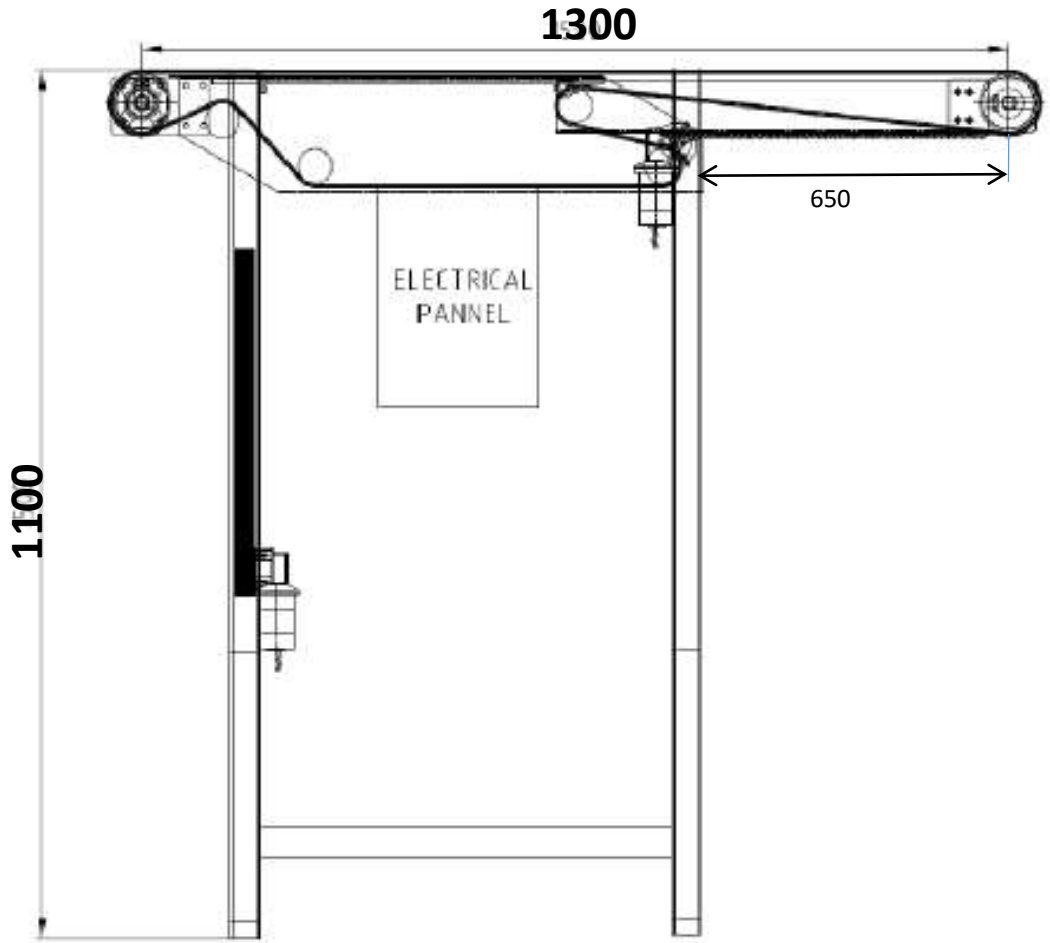


EXPANDED POSITION

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

CASE-03

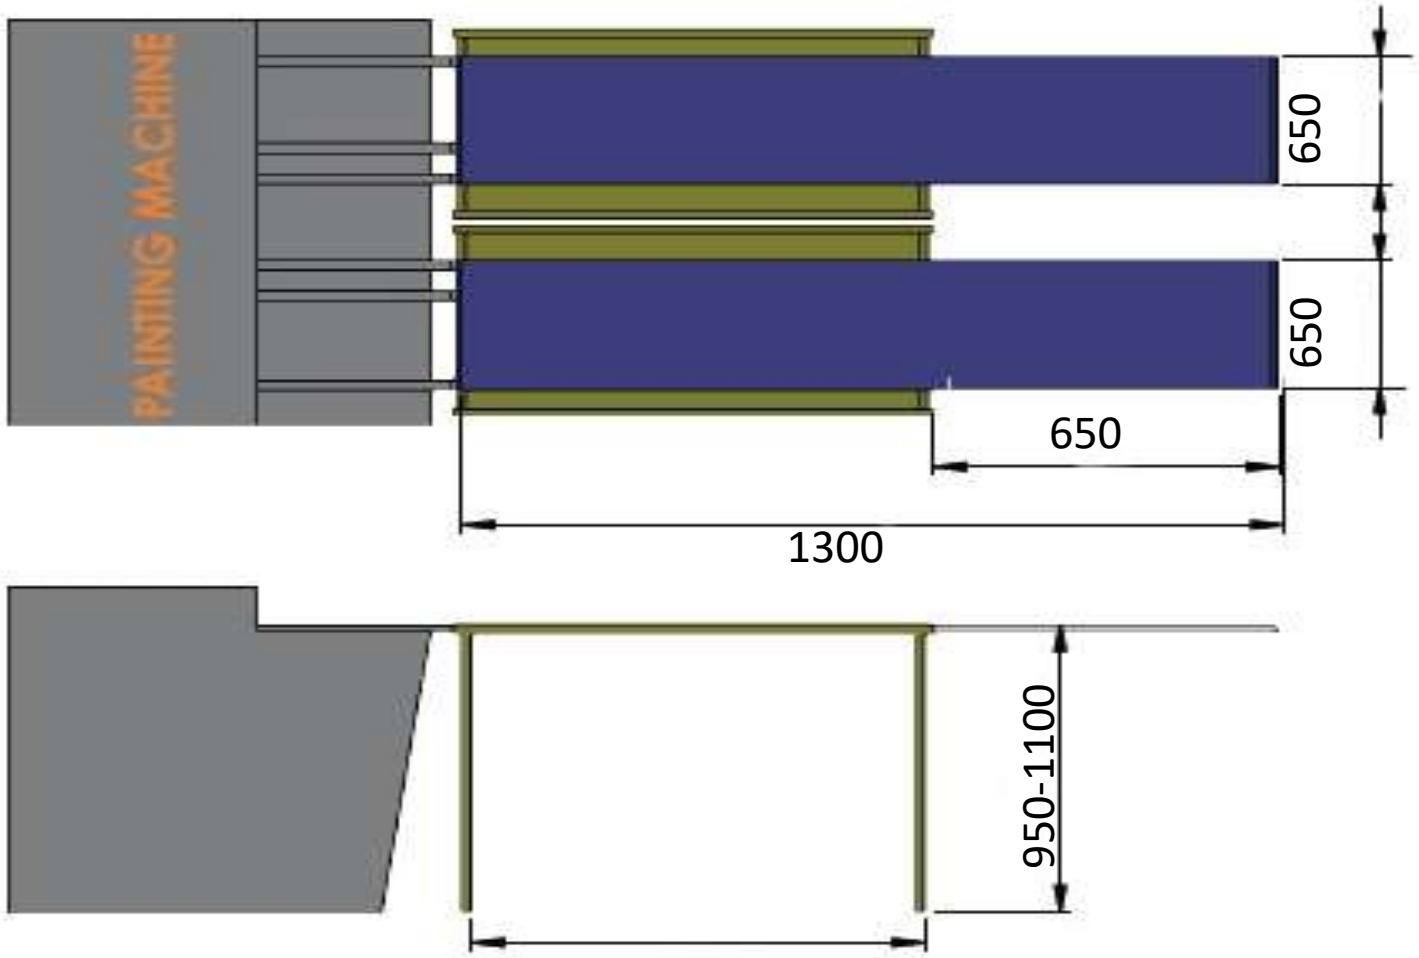

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.

Orion

Technical Parameters

- The transfer mechanism should have a belt cleaning system.
- These belts should be adjustable length except for belt 5.
- Belt Conveyor:
  - Makes no imprints or scratches on the layers
  - Belt material should be PVC
  - Belt durability
  - Easy to change
  - Belt tension should be maintained all the time
  - Belt aligning must be provided
- Motor should be servomotor, NOTE: The motor will be near explosive area. (Suitable option for the same can be used with prior approval from EK)
- The Motor should have frequency changer, no gears
- No Brush required at the start and end of the belts.
- The whole Transfer Mechanism system will rest on floor with bolts except for Belt 1 & 2 Transfer Mechanism (The belt 1 & 2 Transfer Mechanisms will be on wheels)
- The conveyor belts should be open
- Conveyor orientation should be flat throughout the length.
- The construction needs to be built in such a way that no big movements will be happen during using.
- To ensure the correct positioning each unit can be fix with a physically connection with the feed zone
- No vibration has to be there at free end of all conveyors. If required support can be given from other side with prior approval from EK)
- Aluminium profiles to be used for structure.

Orion

Electrical Parameters

- For communication between Transfer mechanism and Oven we need PROFInet connection.
- PLC Connection type
  - Siemens **7-1515F-2PN**
- PN/PN coupler coupling module for connecting two PROFInet network
  - Model No. **6ES7158-3ADO1-OXAO**
  - Mounting: mounting rail 7.5mm and 15mm
  - Quantity 1(Please confirm)

Orion

Electrical Parameters

- PLC Connection type

Siemens 7-1515F-2PN

Application

The CPU 1515F-2 PN is the CPU with a medium program and data memory for standard and fail-safe applications that also contain distributed automation structures alongside central I/O. It can be used as a **PROFINET IO controller** or as distributed intelligence (PROFINET I-Device). The integrated PROFINET IO IRT interface is designed as a 2-port switch so that a linear topology can be set up in the system. The additional integrated PROFINET interface with separate IP address can be used, for example, for network separation. In addition, the CPU offers comprehensive control functionalities as well as the ability to connect drives via standardized PLC-open blocks.

Orion

Electrical Parameters

- PN/PN coupler coupling module for connecting two PROFInet network
- Model No. 6ES7158-3ADO1-OXAO

PROFINET (profinet acronym for Process Field Net) is an industry technical standard for data communication over Industrial Ethernet, designed for collecting data from, and controlling, equipment in industrial systems, with a particular strength in delivering data under tight time constraints (on the order of 1ms or ...

Orion

Thank-You

Orion Technologies.
Mechanical Design & Analysis Services at Orion Technologies India.
oriondesignt@gmail.com
+91 8087333327.