
THPL

TARGET

HYDRAUTECH PVT. LTD.

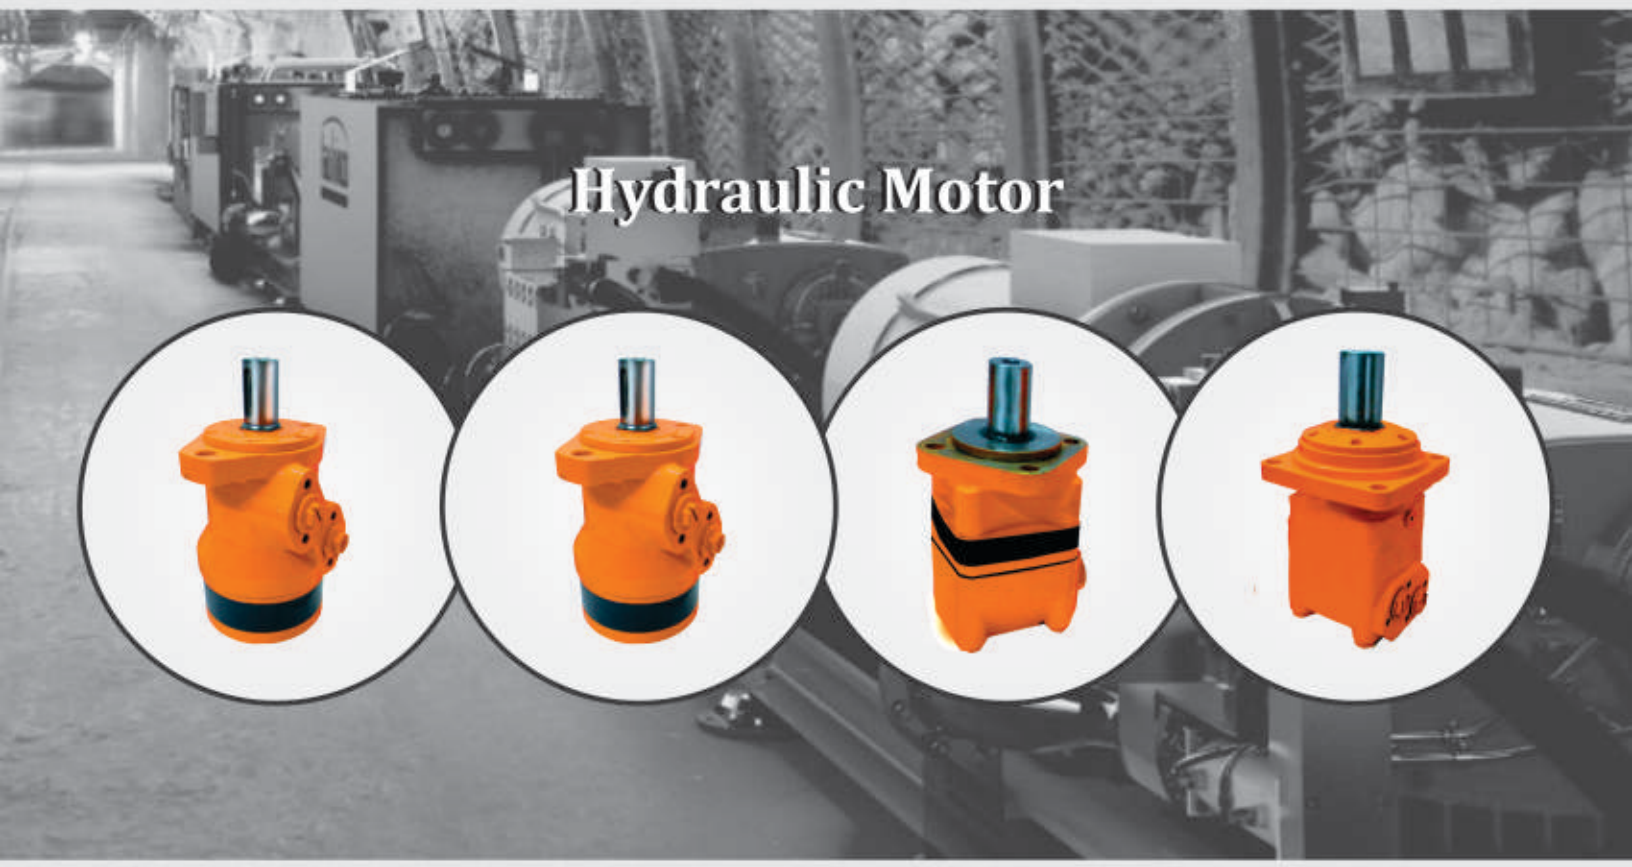

TORQUE®

House Of Hydraulics

Hydraulic Valves, Motors, Pumps,
AC / DC Compact Power Pack & Accessories

www.targethyd.com

INTRODUCTION

TMP series motor is compact , sturdy design motors used for their economical type which adapts gerotor type with high power. It is widely used in winches ,moulding machine ,sweepers, rollers etc.



TMP CHARACTERISTICS :

(1) Advanced design of gerotor gear set which provide small volume , good efficiency and long life.
(2) Stable speed ,easy to install .
(3) Low cost motor.


TMP TECHNICAL DATA


TYPE		TMP-50 TMPH-50	TMP-80 TMPH-80	TMP-100 TMPH-100	TMP-125 TMPH-125	TMP-160 TMPH-160	TMP-200 TMPH-200	TMP-250 TMPH-250	TMP-315 TMPH-315	TMP-400 TMPH-400
DISPLACEMENT		52.9	79.3	98.2	120.9	158.7	196.4	241.8	317.3	392.9
Max.Pressure Drop (Mpa)	Cont.	12.5	12.5	12.5	12.5	11.5	11	10	9	7
	int.	16.5	16.5	16.5	16.5	16	15	14	11	9
	Peak.	20	20	20	20	20	20	16	13	11
Max.torque (Nm)	Cont.	78	120	149	180	219	262	300	338	324
	int.	104	157	197	238	305	358	416	413	429
	Peak.	31	215	268	336	430	506	537	537	537
Max.Cont.Speed(r/min)		10-800	10-770	10-615	10-480	10-385	10-310	10-250	10-195	10-155
Max.Flow(cont.)(L/min)		40	60	60	60	60	60	60	60	60
Max.Output.Power(cont.)(Kw)		7	10	10	10	10	8	6	5	4
Weight(kg)		5.6	5.7	5.9	6.0	6.2	6.4	6.6	6.9	7.4

Intermittent operation the permissible values may occur for max i.e 6seconds of every minute
peak load the permissible values may occur for max i.e 6seconds every minute

TMP INSTALLATION

A II, Version 2-hole oval flange

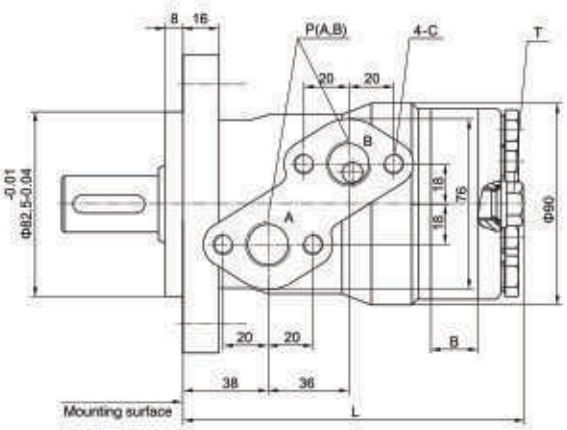

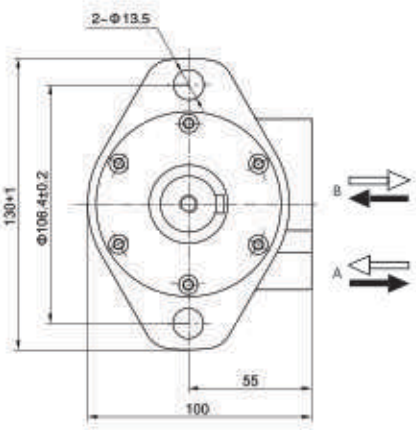

TYPE	L	L1	B
TMP-50	141	148	7
TMP-80	145	151	11
TMP-100	147	154	13
TMP-125	150	157	16
TMP-160	155	162	21
TMP-200	160	167	26
TMP-250	166	173	32
TMP-315	176	183	42
TMP-400	186	193	52

INTRODUCTION

TMR series motor is a compact low noise , high efficient motor with low speed .It offers a a reliable smooth start up at low pressure. It can be used for mould height adjustment, washers, road roller, lawn mover etc.



TMR CHARACTERISTICS :

1) Advanced design of spool valve distribution, small size and higher distribution accuracy.
2) With deep groove ball bearing ,cycloid group it has small friction and high mechanical efficiency.
3) With two internal check valves for no drain.


TMR TECHNICAL DATA


Type		TMR TMRW TMRS 50	TMR TMRW TMRS 80	TMR TMRW TMRS 100	TMR TMRW TMRS 125	TMR TMRW TMRS 160	TMR TMRW TMRS 200	TMR TMRW TMRS 250	TMR TMRW TMRS 315	TMR TMRW TMRS 400
Displacement.(ml/r)	Cont.	51.7	80.5	100.5	126.3	160.8	200.9	252.6	321.5	401.9
Max.Pressure Drop (Mpa)	Cont.	14	14	14	14	14	14	11	9	7
	int.	17.5	17.5	17.5	17.5	17.5	17.5	14	11	9
	Peak	20	20	20	20	20	20	16	13	11
Max.torque (Nm)	Cont.	93	152	194	237	310	369	380	380	380
	int.	118	189	236	296	378	450	470	470	470
	Peak	135	216	270	338	433	509	540	540	540
Speed Range(cont.)(L/min)		10-775	10-750	10-600	10-475	10-375	10-300	10-240	10-190	10-190
Max.Flow(cont.)(L/min)		40	60	60	60	60	60	60	60	60
Max.Output.Power(cont.)		7	10	10	10	10	8	6	5	4
Weight (kg)		6.5	6.9	7.0	7.3	7.5	8.0	8.5	9.0	11

Intermittent operation the permissible values may occur for max i.e 6seconds of every minute
peak load the permissible values may occur for max i.e 6seconds every minute

TMR INSTALLATION

A II, Version 2-hole oval flange

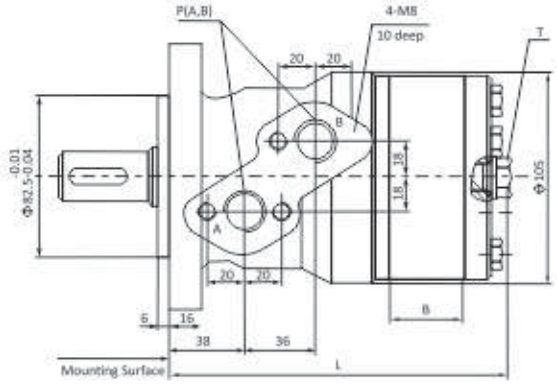

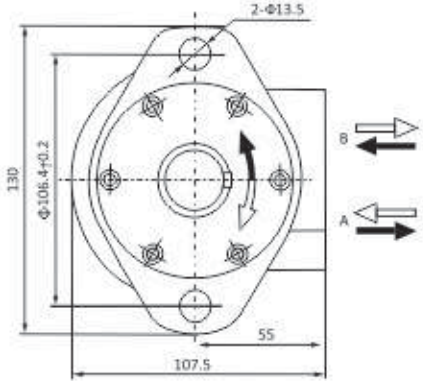

TYPE	L	B
TMH-200	168	28
TMH-250	175	35
TMH-315	184	44
TMH-400	196	56
TMH-500	205	65

INTRODUCTION

TMS series of motor are gear set design of Disc distribution flow and high pressure .These motors can be supplied with multifunctional operations In accordance with the application requirements. It is used in wide field for good torque requirements.



TMS CHARACTERISTICS :

(1) The output shaft tapered roller bearing permit high axial and radial forces offering smooth operation.

(2) A variety of flange, shafts can be arranged.


TMS TECHNICAL DATA


TYPE		TMS-80 TMSW-80 TMS5-80	TMS-100 TMSW-100 TMS5-100	TMS-125 TMSW-125 TMS5-125	TMS-160 TMSW-160 TMS5-160	TMS-200 TMSw-200 TMS5-200	TMS-250 TMSW-250 TMS5-250	TMS-315 TMSW-315 TMS5-315	TMS-400 TMSW-400 TMS5-400	TMS-500
DISPLACEMENT		80.5	100.5	126.3	160.8	200.9	252.6	321.5	401.9	471.1
Max.Pressure Drop (Mpa)	Cont.	17.5	17.5	17.5	16	16	12.5	12.5	10	10
	int.	20	20	20	20	20	16	16	14	14
	Peak.	22.5	22.5	22.5	22.5	22.5	20	20	17.5	17.5
Max.torque (Nm)	Cont.	194	242	303	358	438	440	551	580	636
	int.	218	283	345	429	540	580	625	687	890
	Peak.	271	318	373	459	576	700	831	865	1113
Speed.Range(cont.)(r/min)		10-810	10-750	9-600	7-470	6-375	6-300	5-240	5-180	5-155
Max.Flow(cont.)(L/min)		65	75	75	75	75	75	75	75	75
Max.Output.Power(cont.)(Kw)		14	16	16	14	14	11	10	8	8
Weight(kg)		9.8	10.0	10.3	10.7	11.1	11.6	12.3	13.1	14

Intermittent operation the permissible values may occur for max.10% of every minute
Peak Load: the permissible values may occur for max. 1% of every minute

TMS INSTALLATION

A Square flange

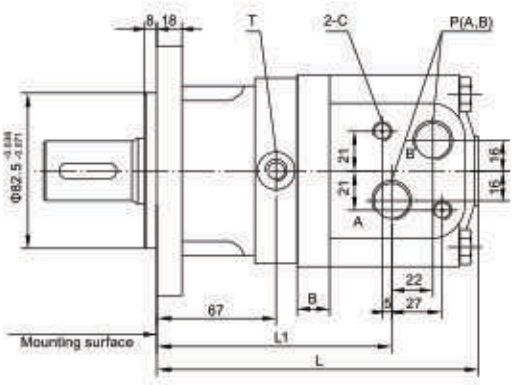

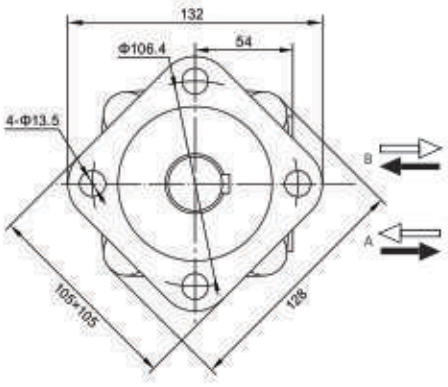

TYPE	L	L1	B
TMS-80	167	124	11
TMS-100	170.5	127.5	14.5
TMS-125	175	132	19
TMS-160	181	138	25
TMS-200	188	145	32
TMS-250	197	154	41
TMS-315	209	166	53
TMS-400	223	180	67

INTRODUCTION

TMV series motors are disc valve motors that can be used in parallel or series configurations. A diverse offering of mounting flanges, shafts, ports, and displacements along with wheel and bearingless motors allow for easy installation, product replacement or OEM application



TMV CHARACTERISTICS : IMPROVED

(1) Dual high efficiency tapered roller bearings, providing excellent low speed and high speed operation with high side load capabilities

(2) High pressure shaft seal, which allows for higher back pressures and an increased ability to handle high pressure spike conditions (no shaft seal on bearingless motors)

(3) Dual high efficiency tapered roller bearings, providing excellent low speed and high speed operation with high side load capabilities


TMV TECHNICAL DATA


TYPE		TMV-315 TMVS-315 TMVW-315	TMV-400 TMVS-400 TMVW-400	TMV-500 TMVS-500 TMVW-500	TMV-630 TMVS-630 TMVW-630	TMV-800 TMVS-800 TMVW-800	TMV-985 TMVS-985 TMVW-985
DISPLACEMENT		314.9	399.7	496.6	617.8	787.4	969.1
Max.Pressure Drop (Mpa)	Cont.	20	20	20	18	16	14
	int.	24	24	24	21	18	16
	Peak.	28	28	28	24	21	18
Max.torque (Nm)	Cont.	873	1108	1385	1570	1773	1900
	int.	1119	1440	1783	1951	2122	2133
	Peak.	1293	1650	2060	2249	2481	2399
Speed.Range(cont.)(r/min)		10-475	9-375	8-300	6-238	5-187	5-154
Max.Flow(cont.)(L/min)		150	150	150	150	150	150
Max.Output.Power(cont.)(Kw)		32	32	32	32	32	24
Weight(kg)		30.7	31.5	32.4	33.6	35.2	37.2

Intermittent operation the permissible values may occur for max i.e 6seconds per minute
peak load the permissible values may occur for max i.e 6seconds per minute

TMV INSTALLATION

A Square flange

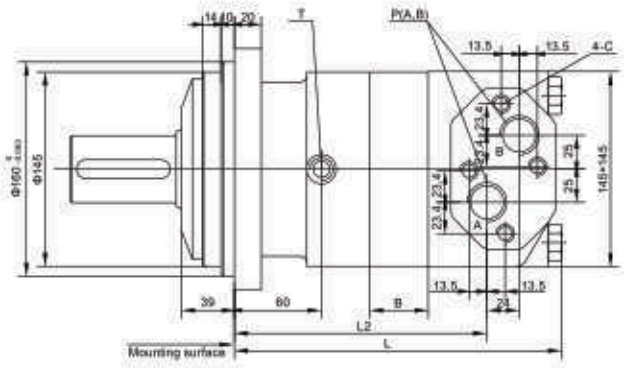

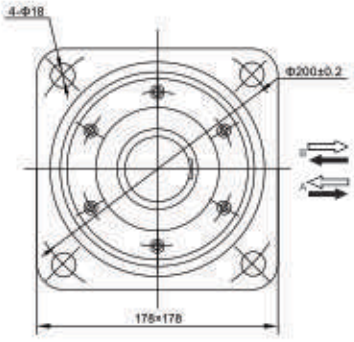

TYPE	L	L2	B
TMV-315	214	156	19
TMV-400	221	163	26
TMV-500	229	171	34
TMV-630	239	181	44
TMV-800	253	195	58
TMV-985	268	210	73

INTRODUCTION

TMH series motor is a compact low noise ,high efficient high torque low speed design. It offers a reliable start at low inertia. It is widely used in reeling machine ,concrete mixers , mixing machines etc.

TMH CHARACTERISTICS :

(1) It can bear axial and radial load, due to advanced bearing technology.

(2) Advanced cycloid group , bears small friction and high mechanical efficiency.

(3) Rotation of motor can be controlled easily.


TMH TECHNICAL DATA


TYPE		TMH-200	TMH-250	TMH-315	TMH-400	TMH-500
DISPLACEMENT		203	253.7	318.9	405.9	471.1
Max.Pressure Drop (Mpa)	Cont.	15.5	15.5	13.5	10.5	8.5
	int.	17.5	17.5	15.5	12.5	10
	Peak.	20	20	19	15.5	13
Max.torque (Nm)	Cont.	419	493	541	535	541
	int.	473	557	621	636	637
	Peak.	541	636	762	789	778
Max.Cont.Speed(r/min)		370	295	235	185	155
Max.Flow(cont.)(L/min)		75	75	75	75	75
Max.Output.Power(cont.)(Kw)		14	12.5	12.5	10	8.5
Weight(kg)		10.5	11	11.5	12.5	13

Intermittent operation the permissible values may occur for max i.e 6seconds per minute
peak load the permissible values may occur for max i.e 6seconds per minute

TMH INSTALLATION

6-hole oval flange AIV

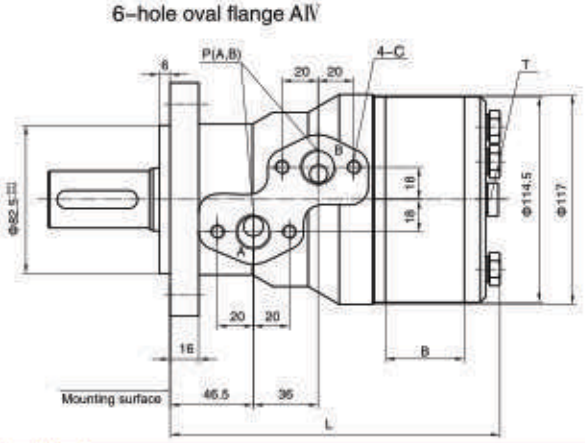

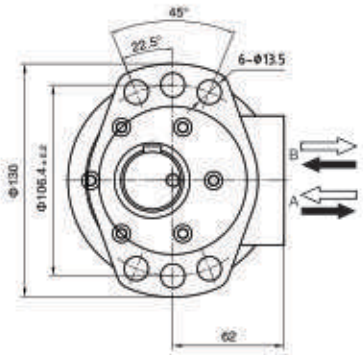

TYPE	L	B
TMH-200	168	28
TMH-250	175	35
TMH-315	184	44
TMH-400	196	56
TMH-500	205	65

INTRODUCTION

TMT series motors are disc valve motors that can be used in parallel or series configurations. A diverse offering of mounting flanges, shafts, ports, and displacements along with wheel and bearingless motors allow for easy installation, product replacement or OEM application

TMT CHARACTERISTICS : IMPROVED

(1) Dual high efficiency tapered roller bearings, providing excellent low speed and high speed operation with high side load capabilities

(2) High pressure shaft seal, which allows for higher back pressures and an increased Ability to handle high pressure spike conditions (no shaft seal on bearing less motors)

(3) Dual high efficiency tapered roller bearings, providing excellent low speed and high speed operation with high side load capabilities


TMT TECHNICAL DATA

TYPE		TMT-160 TMTS-160 TMTW-160	TMT-200 TMTS-200 TMTW-200	TMT-250 TMTS-250 TMTW-250	TMT-320 TMTS-320 TMTW-320	TMT-400 TMTS-400 TMTW-400	TMT-500 TMTS-500 TMTW-500
DISPLACEMENT		158.5	200.8	252.2	317.5	401.6	535.3
Max.Pressure Drop (Mpa)	Cont.	20	20	20	20	18	16
	int.	24	24	24	24	21	18
	Peak.	28	26	28	28	24	21
Max.torque (Nm)	Cont.	450	561	710	902	1006	1121
	int.	559	714	883	1143	1255	1377
	Peak.	663	818	1021	1322	1431	1598
Speed.Range(cont.)(r/min)		10-625	9-500	8-400	7-312	6-250	5-175
Max.Flow(cont.)(L/min)		100	100	100	100	100	100
Max.Output.Power(cont.)(Kw)		20.1	25.2	25.2	25.2	22	21
Weight(kg)		20.3	20.8	21.4	22.4	23	24


Intermittent operation the permissible values may occur for max i.e 6seconds per minute
peak load the permissible values may occur for max i.e 6seconds per minute

TMT INSTALLATION

A Square flange

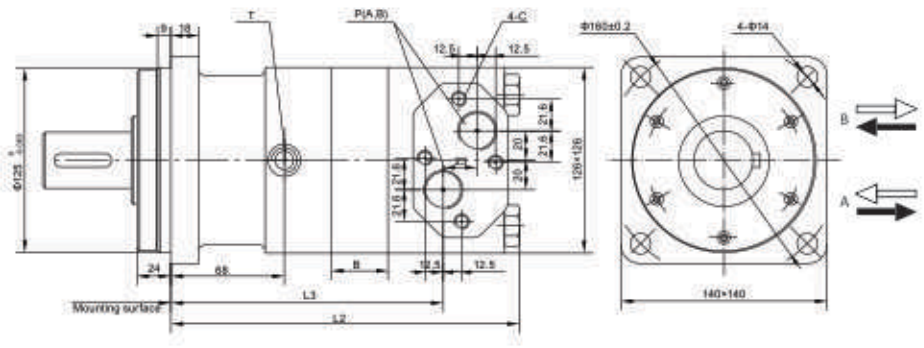

TYPE	L	L1	B	L2	L3
TMT-160	213	163	12	201	150
TMT-200	217.5	167	16.5	205.5	155
TMT-250	223	173	22	211	160
TMT-320	230	180	29	218	167
TMT-400	239	189	38	227	176
TMT-500	257.5	207	56.5	245.5	195

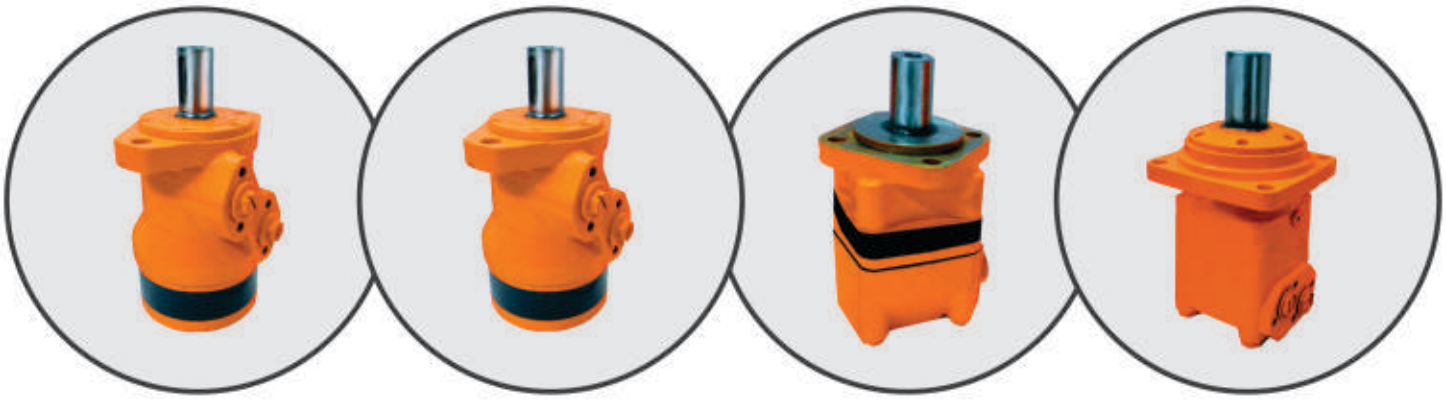

THPL

TARGET

HYDRAUTECH PVT. LTD.

PRODUCT RANGE

- Solenoid and Modular Valves.
- Proportional & Relief Valves.
- Mobile Control Valve.
- Hydraulic Motors : Radial Piston & Orbital.
- Variable Displacement Axial Piston Pump.
- Fixed Displacement Axial Piston Pump.
- D.C. Compact Power Pack 12 V & 24 V.
- A.C. Power Pack 1 HP to 5 HP.
- A.C. & D.C. Car Lift Block.
- Gear Pump
- Power Pack & Accessories.

Sales Off. :

Unit No.112, Vasundhara Industrial Estate, K.T.Park Phase 1,
Opp. Arrow House, Goraipada, Vasai (East) - 401 208
(Mumbai) Maharashtra (INDIA)
Tel. : +91- 8691852761 / 8080750080 / 8080869456
Email : sales@targethyd.com Web : targethyd.com

BRANCHES :

AHMEDABAD : 890538811 RAJKOT : 8080139929

TORQUE®

House Of Hydraulics