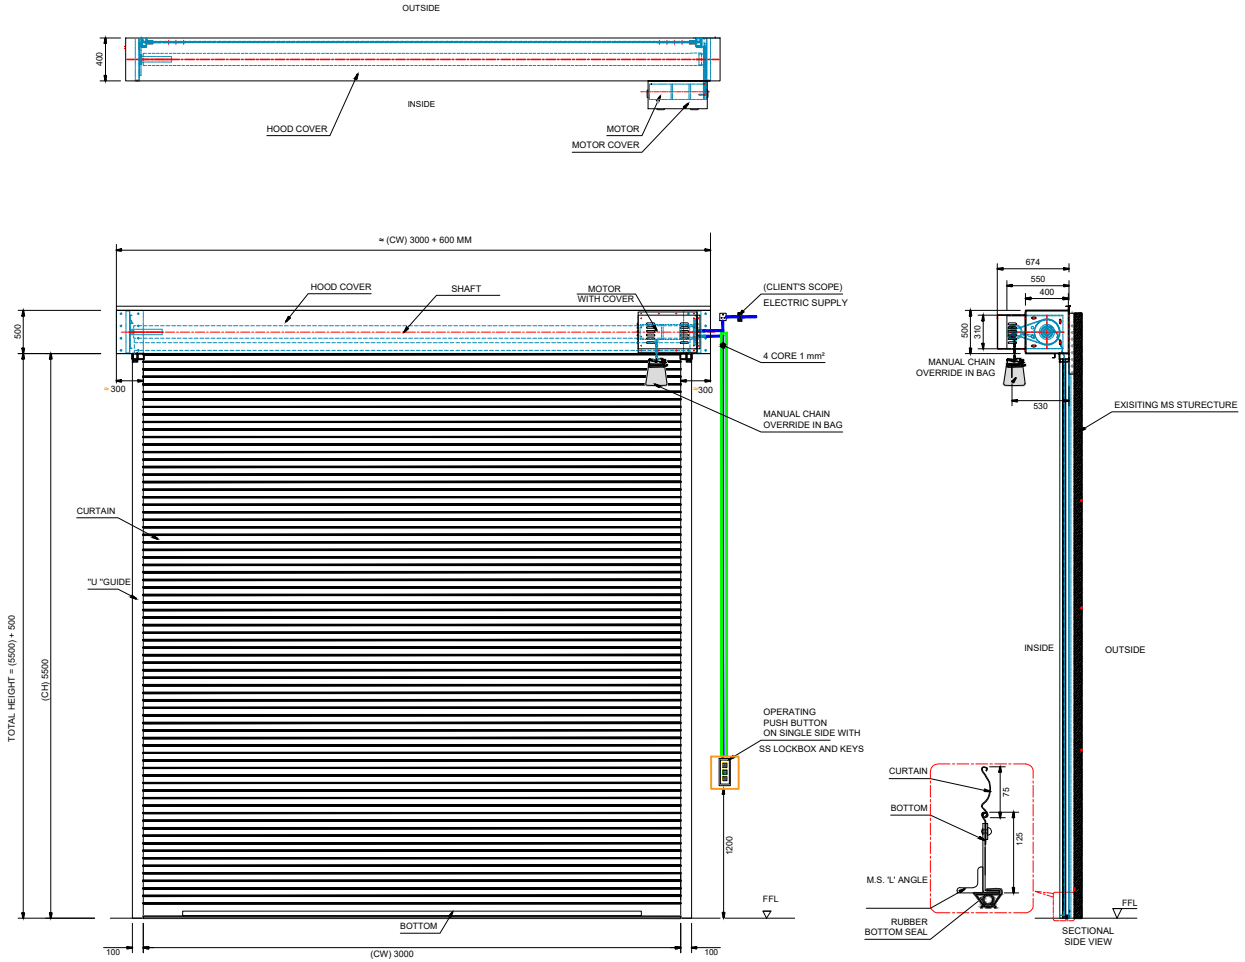



**INSIDE ELEVATION**

## TECHNICAL SPECIFICATION:-

| SR. | SPECIFICATION | DETAILS |
|---|---|---|
| 1. | Description & Drive | Motorised Rolling Shutter ( Indirect Drive ) with Manual Chain Arrangment |
| 2. | Location Area | Inside |
| 3. | Mounting Surface | Side Brackets: Structure |
| 4. | Slat | Curved 75 mm GI Sheet - 1.0 mm Thk |
| 5. | Bottom Profile | MS Plate 125 x 2.5 mm thick with Angle Stiffner with rubber seal |
| 6. | Guide Profile | M.S." U " Shape profile 100 x 2.5 mm Thk. |
| 7. | Hood Cover & Motor Cover | Made of GI Sheet Thickness 0.9 mm |
| 8. | Accessories | Push Button Single side |

## SHUTTER SIZES :-

| SR. | CLEAR WIDTH | CLEAR HEIGHT | QTY. |
|---|---|---|---|
| 01 | 3000 mm | 5500 mm | 01 |

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

| | NAME | DATE | |
|---|---|---|---|
| DRAWN | S.J | 17/06/2024 | CLIENT - UNIQUE CONSTRUCTION |
| CHECK | B.B | 17/06/2024 | PROJECT - ROLLING SHUTTER |
| APPROVAL | V.T. | 17/06/2024 | FORMAT NO - NIHVA-DD-F-03 |
| | | | DWG. NO. : NIHVA/24-25/UC/2406001 REV-00 |
| | | | SCALE: NTS WT: SHEET: 01 OF 01 |
| ALL DIMENSION ARE IN mm | | | If any queries contact : design@nihva.com |