EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

71715	A-38	B14-5	BB-37	CC-14
CC-63	LL-23	LL-57	N-315	Q-16

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt


FR
Cette fiche technique est présentée par le fabricant

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

COMPRESSION SPRINGS

Century Spring warehouses the largest inventory of high-grade, straight, cylindrically-shaped compression springs in the world. All the springs found in this section of the catalog are fabricated from round wire. Rectangular wire is sometimes employed to reduce the solid (totally compressed) height or increase the space efficiency of the design. ***Century Spring's*** die springs are made from rectangular wire for this reason. (See the "Die Spring" section of this catalog.)

Selecting a Compression Spring:

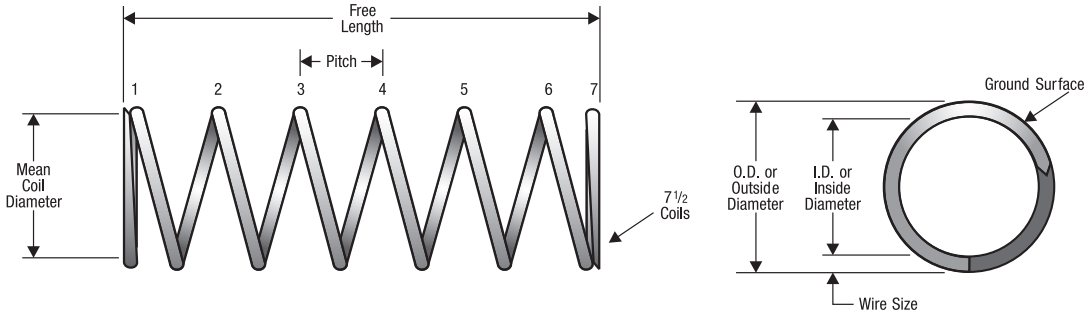

Turn to the inventory page with the desired outside diameter (O.D.). Outside diameters increase as page numbers increase and are found in the left column of the page.

- Next, find the length or rate (strength) you require. These, too, are normally in increasing order.

  Spring rate is the load (pounds) it takes to deflect (compress) the spring one theoretical inch, i.e., if the rate = 40 lbs./in., it would take 10 pounds to deflect it 1/4 inch, or 80 pounds for 2 inches, etc..

- If the length or rate is not known but the installed working length (W.L.) is, then select a spring — say 30% longer — than the W.L..

  You must know the load at the W.L.. Just subtract the W.L. from the spring's selected free length and multiply by its rate to obtain the load to compare with your required value.

- If the load required is not obtained, select a new candidate with either an increase or decrease in rate (strength) or free length.

- Be certain that the tabulated solid length (completely compressed) for your candidate spring indicates enough room for deflection and, also, that the deflection is not significantly greater than the tabulated "Maximum Suggested" for stress reasons.

Note: If the spring needed for your application cannot be found in our catalog inventory, we can fabricate it for you. Often, there is no cost increase for this service as we have low quantity requirements.

Design Information

The basic compression rate and wire stress for a compression spring can be estimated with the following:

$$R = \frac{Gd^4}{8nD^3} \quad \text{and} \quad R = \frac{P}{\Delta}$$

$$S = \frac{8PDK}{\pi d^3} \quad \text{or} \quad S = \frac{8RDK\Delta}{\pi d^3}$$

Note: One should not employ the curvature (k) correction stress in an expression solving for deflection. Use the uncorrected stress only or errors will occur. The uncorrected stress can be used for static applications.

Large wire and bar stock sizes also require an empirically-derived reduction in the standard rate calculation of up to 9%. For these reasons, refinements in large spring design should be left to the experienced spring designer.

Where: **D** = Mean diameter, (O.D. - d) inches
d = Wire diameter, inches
G = Modulus (spring steel = 11.5×10^6, stainless = 10×10^6), p.s.i.
K = Stress correction factor (see plot)
N = Number of total coils
n = Number of active coils (see table)
P = Applied load, pounds
p = Pitch, distance between centerlines of wires of adjoining coils
R = Spring rate, pounds per inch (lbs./in.)
S = Wire stress, psi
Δ = Deflection, inches
π = 3.14

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


Design Information *(continued)*

The suggested maximum allowable spring-wire stress values can be derived from the "Minimum Tensile Strength" (MTS) tables found in the "Material Properties" section of this catalog. The MTS values vary with the spring-wire diameter. Further, 30 to 45 percent of the MTS value, depending on the material type, is used as a corrected stress target to produce a long fatigue life. The table, "Properties of Common Spring Materials", found also in the "Material Properties" section of this catalog, indicates the appropriate percentage value of the MTS to use for a given spring material.

For free custom spring designs, call or fax our ***Custom Spring Department***. For quick stress checks on stock or custom spring designs, or technical information, call or fax our ***Engineering Department***.

SPRING CHARACTERISTICS	TYPE OF ENDS			
	OPEN	OPEN & GROUND	CLOSED	CLOSED & GROUND
SOLID LENGTH	d(N+1)	d x N	d(N+1)	d x N
ACTIVE COILS (n)	N	N - 1	N - 2	N - 2
TOTAL COILS (N)	n	N	n + 2	n + 2
FREE LENGTH (L)	(p x N) + d	p x N	(p x n) + 3d	(p x n) + 2d

WAHL CURVATURE STRESS CORRECTION

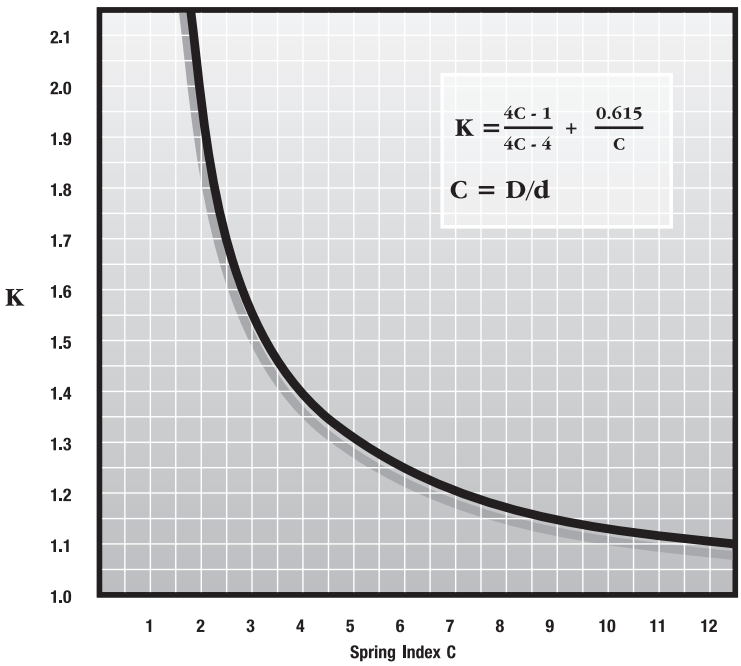

Spring Characteristics

Service Life

It should be noted that if critical force-versus-deflection linearity is required, only the center 60 to 80 percent of the available deflection range should be employed. Thus, reserve at least the first and last 15 to 20 percent of the range for potential spring-end and adjacent coil-contact effects. These effects can be largely ignored for the majority of spring applications.

The column "Suggested Maximum Deflection" found in the following pages of inventory reflects the recommended inches of travel to obtain a statistical service-life of approximately 100,000 cycles (deflections) with infrequent breakage. This can be realized if the spring in question is not subjected to shock loads, rapid cycling, temperature extremes, corrosion or stress values above those previously recommended. If the spring is statically loaded (not cycling), a near-infinite life can be expected. Extended spring service-life can be expected by applying recommendations found in the "Material Properties" section of this catalog.

Materials

The highest grades of spring wire are used for fabricating our springs. To create cost-effective warehousing of our stock spring inventory for our customers, we offer material certification for custom springs only. Certifications of conformance for geometric tolerances set by the Spring Manufacturers Institute (SMI) are available for our stock springs upon request. See the "Custom Spring" section of this catalog if material trace certifications or unique materials are required.

"Spring Steel" is a stock inventory term covering:
- Music wire
- Hard-drawn (MB) wire
- Oil-tempered wire

Additionally, stock compression-spring materials include:
- Stainless Steel (300 series)
- Beryllium Copper
- Phosphor Bronze

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

Spring Characteristics *(continued)*

Tolerances

Century Spring manufactures stock springs to commercial tolerances defined by the SMI. Calculated rates and loads based on the SMI geometric tolerances have an approximate +/- ten percent. Low or high-index springs will have higher values. Compression springs characteristically have an hourglass shape when coiled on an automatic coiler; therefore, outside/inside tolerancing is applied to end coils only. This is an important consideration when selecting a spring that fits over a rod or inside a cylinder. Call us if tighter tolerance values are required.

Regarding angle tolerance, the plane of the ground end of a spring is usually within three degrees of the perpendicular-to-the-body axis of the spring.

Direction of Helix (wind)

The wind direction of our stock springs varies, both RHW and LHW. Stock springs are not sorted for wind direction. To order springs wound to a specific direction, please see page 376 for more information or contact our Custom Division at 800-237-5225.

Ends

The compression spring ends configuration is indicated in the "Ends" column of our inventory listings which are:

Closed (C) - The last coil at each end is bent back to touch the previous coil to create a flat base.

Closed and Ground (C&G) - The closed ends of a spring ground to a more accurate flat base. This will also reduce the solid length.


Open (O) - The spring end coils remain open, maintaining the spring machine's helical wind shape.

Finish

The finishes available for our compression springs are as indicated in the "Finish" column of our inventory listing which include:

Zinc
Gold Irridite
Black Oxide
Passivated (upon request)
None (can be plated upon request)

Data Required For Compression Springs

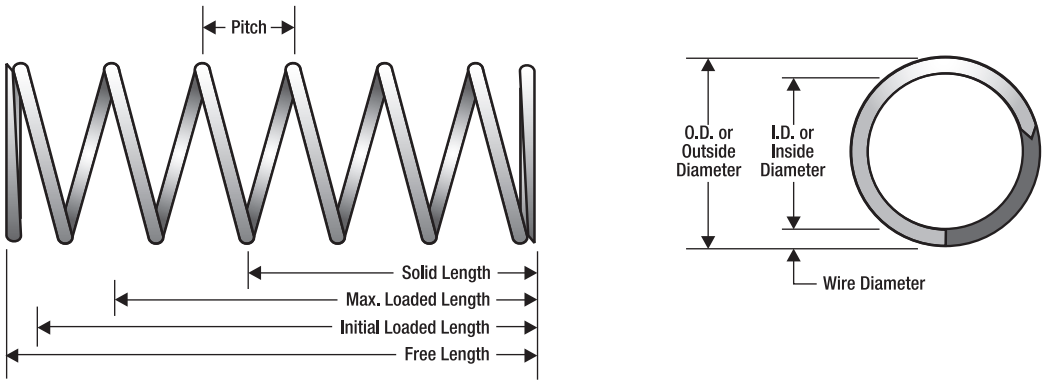

CURRENT DESIGN

Outside Diameter _____in.

Free Length_____in.

Wire Dia. _____dec.

Material _____

Total Coils _____(or pitch)_____in.

Finish _____

SPRING TO BE DESIGNED

To work in _____in. hole

To work over_____in. dia. shaft

To support ___lbs. ±____lbs. at_____in.

Rate per in. _____lbs. ±

Max. solid height_____in.

Max. deflection _____

ADD'L. INFO IF AVAILABLE

Material _____

Wind: Optional____Right ____Left ____


Finish _____

Style of ends: Cl. & Grd. _____

Closed only _____

Open or Plain _____

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.036	.91	10075	.59	15.1	.022	.6	2.6	.46	.15	3.8	.39	1.7	.35	8.9	0.007	0.2	49.0	SST	C	N
0.036	.91	JJ-7	.63	15.9	.024	.6	1.6	.28	.16	4.1	.25	1.1	.25	6.2	0.006	0.2	40.0	SST	C	N
0.040	1.02	2924	.66	16.8	.020	.5	11	2.0	.13	3.2	1.4	6.4	.50	12.6	0.010	0.3	48.5	MW	C	N
0.040	1.02	10778	.69	17.5	.028	.7	1.0	.17	.35	8.9	.35	1.6	.30	7.7	0.006	0.2	49.5	MW	C	N
0.054	1.37	RR-6	.25	6.4	.036	.9	6.2	1.1	.09	2.2	.56	2.5	.16	4.1	0.009	0.2	16.5	SST	C	N
0.054	1.37	10619	.72	18.3	.038	1.0	1.6	.29	.37	9.3	.60	2.7	.32	8.1	0.008	0.2	39.0	MW	C	N
0.057	1.45	70000	.13	3.3	.045	1.1	3.7	.66	.07	1.7	.25	1.1	.04	1.0	0.006	0.2	5.75	MW	C	N
0.057	1.45	70000S	.13	3.3	.045	1.1	3.3	.57	.05	1.3	.17	.74	.04	1.0	0.006	0.2	5.75	SST	C	N
0.057	1.45	70009	.13	3.3	.043	1.1	6.9	1.2	.06	1.5	.40	1.8	.05	1.2	0.007	0.2	6.00	MW	C	N
0.057	1.45	70009S	.13	3.3	.043	1.1	6.0	1.1	.04	1.1	.26	1.2	.05	1.2	0.007	0.2	6.00	SST	C	N
0.057	1.45	70018	.13	3.3	.041	1.0	12	2.1	.05	1.2	.57	2.5	.06	1.4	0.008	0.2	6.13	MW	C	N
0.057	1.45	70018S	.13	3.3	.041	1.0	11	1.8	.03	.88	.37	1.6	.06	1.4	0.008	0.2	6.13	SST	C	N
0.057	1.45	70001	.19	4.8	.045	1.1	2.3	.40	.11	2.8	.25	1.1	.06	1.4	0.006	0.2	8.13	MW	C	N
0.057	1.45	70001S	.19	4.8	.045	1.1	2.0	.35	.08	2.1	.17	.74	.06	1.4	0.006	0.2	8.13	SST	C	N
0.057	1.45	70010	.19	4.8	.043	1.1	4.0	.70	.10	2.5	.40	1.8	.07	1.8	0.007	0.2	8.88	MW	C	N
0.057	1.45	70010S	.19	4.8	.043	1.1	3.5	.61	.07	1.9	.26	1.2	.07	1.8	0.007	0.2	8.88	SST	C	N
0.057	1.45	70019	.19	4.8	.041	1.0	7.4	1.3	.08	2.0	.57	2.5	.08	2.0	0.008	0.2	8.75	MW	C	N
0.057	1.45	70019S	.19	4.8	.041	1.0	6.4	1.1	.06	1.4	.37	1.6	.08	2.0	0.008	0.2	8.75	SST	C	N
0.057	1.45	70002	.25	6.4	.045	1.1	1.7	.30	.15	3.8	.25	1.1	.07	1.7	0.006	0.2	10.3	MW	C	N
0.057	1.45	70002S	.25	6.4	.045	1.1	1.5	.26	.11	2.8	.17	.74	.07	1.7	0.006	0.2	10.3	SST	C	N
0.057	1.45	70011	.25	6.4	.043	1.1	3.1	.54	.13	3.3	.40	1.8	.08	2.1	0.007	0.2	11.0	MW	C	N
0.057	1.45	70011S	.25	6.4	.043	1.1	2.7	.47	.10	2.5	.26	1.2	.08	2.1	0.007	0.2	11.0	SST	C	N
0.057	1.45	70020	.25	6.4	.041	1.0	5.3	.92	.11	2.8	.57	2.5	.10	2.5	0.008	0.2	11.5	MW	C	N
0.057	1.45	70020S	.25	6.4	.041	1.0	4.6	.80	.08	2.0	.37	1.6	.10	2.5	0.008	0.2	11.5	SST	C	N
0.057	1.45	70003	.31	7.9	.045	1.1	1.4	.24	.19	4.7	.25	1.1	.08	2.0	0.006	0.2	12.4	MW	C	N
0.057	1.45	70003S	.31	7.9	.045	1.1	1.2	.21	.14	3.6	.17	.74	.08	2.0	0.006	0.2	12.4	SST	C	N
0.057	1.45	70012	.31	7.9	.043	1.1	2.4	.42	.17	4.2	.40	1.8	.10	2.6	0.007	0.2	13.5	MW	C	N
0.057	1.45	70012S	.31	7.9	.043	1.1	2.1	.37	.12	3.2	.26	1.2	.10	2.6	0.007	0.2	13.5	SST	C	N
0.057	1.45	70021	.31	7.9	.041	1.0	4.1	.72	.14	3.6	.57	2.5	.12	3.1	0.008	0.2	14.3	MW	C	N
0.057	1.45	70021S	.31	7.9	.041	1.0	3.6	.62	.10	2.6	.37	1.6	.12	3.1	0.008	0.2	14.3	SST	C	N
0.057	1.45	70004	.38	9.7	.045	1.1	1.1	.19	.23	5.8	.25	1.1	.10	2.4	0.006	0.2	14.8	MW	C	N
0.057	1.45	70004S	.38	9.7	.045	1.1	.96	.17	.17	4.4	.17	.74	.10	2.4	0.006	0.2	14.8	SST	C	N
0.057	1.45	70013	.38	9.7	.043	1.1	2.0	.35	.20	5.0	.40	1.8	.12	3.0	0.007	0.2	15.8	MW	C	N
0.057	1.45	70013S	.38	9.7	.043	1.1	1.7	.31	.15	3.8	.26	1.2	.12	3.0	0.007	0.2	15.8	SST	C	N
0.057	1.45	70022	.38	9.7	.041	1.0	3.4	.59	.17	4.3	.57	2.5	.14	3.6	0.008	0.2	16.8	MW	C	N
0.057	1.45	70022S	.38	9.7	.041	1.0	3.0	.52	.12	3.1	.37	1.6	.14	3.6	0.008	0.2	16.8	SST	C	N
0.057	1.45	70005	.44	11.2	.045	1.1	.95	.17	.26	6.7	.25	1.1	.11	2.7	0.006	0.2	16.8	MW	C	N
0.057	1.45	70005S	.44	11.2	.045	1.1	.83	.14	.20	5.1	.17	.74	.11	2.7	0.006	0.2	16.8	SST	C	N
0.057	1.45	70014	.44	11.2	.043	1.1	1.7	.30	.23	5.9	.40	1.8	.14	3.4	0.007	0.2	18.3	MW	C	N
0.057	1.45	70014S	.44	11.2	.043	1.1	1.5	.26	.18	4.5	.26	1.2	.14	3.4	0.007	0.2	18.3	SST	C	N
0.057	1.45	70023	.44	11.2	.041	1.0	2.8	.50	.20	5.1	.57	2.5	.17	4.2	0.008	0.2	19.6	MW	C	N
0.057	1.45	70023S	.44	11.2	.041	1.0	2.5	.43	.15	3.8	.37	1.6	.17	4.2	0.008	0.2	19.6	SST	C	N
0.057	1.45	70006	.50	12.7	.045	1.1	.85	.15	.30	7.5	.25	1.1	.12	3.0	0.006	0.2	18.5	MW	C	N
0.057	1.45	70006S	.50	12.7	.045	1.1	.74	.13	.22	5.7	.17	.74	.12	3.0	0.006	0.2	18.5	SST	C	N
0.057	1.45	70015	.50	12.7	.043	1.1	1.5	.26	.26	6.7	.40	1.8	.15	3.8	0.007	0.2	20.4	MW	C	N
0.057	1.45	70015S	.50	12.7	.043	1.1	1.3	.23	.20	5.1	.26	1.2	.15	3.8	0.007	0.2	20.4	SST	C	N
0.057	1.45	70024	.50	12.7	.041	1.0	2.5	.43	.23	5.9	.57	2.5	.19	4.7	0.008	0.2	22.4	MW	C	N
0.057	1.45	70024S	.50	12.7	.041	1.0	2.1	.37	.17	4.3	.37	1.6	.19	4.7	0.008	0.2	22.4	SST	C	N
0.057	1.45	70007	.56	14.2	.045	1.1	.75	.13	.34	8.6	.25	1.1	.13	3.3	0.006	0.2	20.8	MW	C	N
0.057	1.45	70007S	.56	14.2	.045	1.1	.65	.11	.25	6.5	.17	.74	.13	3.3	0.006	0.2	20.8	SST	C	N
0.057	1.45	70016	.56	14.2	.043	1.1	1.3	.23	.31	7.7	.40	1.8	.17	4.3	0.007	0.2	23.3	MW	C	N
0.057	1.45	70016S	.56	14.2	.043	1.1	1.1	.20	.23	5.9	.26	1.2	.17	4.3	0.007	0.2	23.3	SST	C	N
0.057	1.45	70025	.56	14.2	.041	1.0	2.2	.39	.26	6.6	.57	2.5	.21	5.2	0.008	0.2	24.8	MW	C	N
0.057	1.45	70025S	.56	14.2	.041	1.0	1.9	.34	.19	4.8	.37	1.6	.21	5.2	0.008	0.2	24.8	SST	C	N
0.057	1.45	70008	.63	16.0	.045	1.1	.65	.11	.39	9.9	.25	1.1	.15	3.8	0.006	0.2	23.6	MW	C	N
0.057	1.45	70008S	.63	16.0	.045	1.1	.57	.10	.29	7.5	.17	.74	.15	3.8	0.006	0.2	23.6	SST	C	N
0.057	1.45	70017	.63	16.0	.043	1.1	1.2	.20	.34	8.8	.40	1.8	.19	4.8	0.007	0.2	26.0	MW	C	N
0.057	1.45	70017S	.63	16.0	.043	1.1	1.0	.18	.26	6.6	.26	1.2	.19	4.8	0.007	0.2	26.0	SST	C	N
0.057	1.45	70026	.63	16.0	.041	1.0	2.0	.35	.29	7.3	.57	2.5	.22	5.7	0.008	0.2	27.0	MW	C	N
0.057	1.45	70026S	.63	16.0	.041	1.0	1.7	.30	.21	5.3	.37	1.6	.22	5.7	0.008	0.2	27.0	SST	C	N
0.062	1.57	FF-21	.13	3.2	.048	1.2	4.1	.73	.07	1.8	.29	1.3	.06	1.4	0.007	0.2	7.00	MW	C	N
0.062	1.57	HH-3	.13	3.2	.044	1.1	11	1.8	.04	1.1	.46	2.1	.08	2.1	0.009	0.2	8.00	MW	C	N
0.062	1.57	3724	.13	3.3	.042	1.1	20	3.6	.05	1.3	1.0	4.5	.08	2.0	0.010	0.3	7.00	MW	C	N
0.062	1.57	N-157	.14	3.6	.036	.9	50	8.7	.01	.25	.50	2.2	.13	3.3	0.013	0.3	9.00	MW	C	N
0.062	1.57	3723	.16	4.0	.052	1.3	.33	.06	.07	1.7	.02	.10	.09	2.2	0.005	0.1	16.5	MW	C	N
0.062	1.57	S-1011	.16	4.0	.034	.9	72	13	.02	.59	1.7	7.4	.13	3.2	0.014	0.4	8.00	SST	C	N
0.062	1.57	B1-7	.16	4.0	.032	.8	156	27	.02	.47	2.9	13	.11	2.9	0.015	0.4	6.50	MW	C	N
0.062	1.57	12496	.19	4.7	.050	1.3	1.8	.31	.13	3.3	.23	1.0	.05	1.4	0.006	0.2	8.00	MW	C	N
0.062	1.57	JJ-49	.25	6.4	.048	1.2	2.6	.45	.09	2.4	.24	1.1	.07	1.8	0.007	0.2	9.00	SST	C	N
0.062	1.57	B1-2	.25	6.4	.046	1.2	5.3	.94	.10	2.5	.53	2.4	.08	2.0	0.008	0.2	9.00	MW	C	N
0.062	1.57	J-36	.25	6.4	.044	1.1	5.8	1.0	.12	3.1	.71	3.2	.13	3.2	0.009	0.2	13.0	MW	C	N
0.062	1.57	N-13	.25	6.4	.042	1.1	7.0	1.2	.09	2.3	.63	2.8	.16	4.1	0.010	0.3	15.0	SST	C	N
0.062	1.57	10749	.28	7.1	.046	1.2	3.0	.52	.16	4.0	.47	2.1	.12	3.1	0.008	0.2	14.5	MW	C	N
0.062	1.57	B-59-A	.31	7.9	.046	1.2	5.2	.90	.10	2.6	.53	2.4	.08	2.1	0.008	0.2	9.25	MW	C	N
0.062	1.57	A14-23	.34	8.7	.052	1.3	.46	.08	.19	4.9	.09	.40	.06	1.5	0.005	0.1	11.25	SST	C	N
0.062	1.57	A15-1	.38	9.5	.044	1.1	5.5	.96	.14	3.4	.75	3.3	.13	3.3	0.009	0.2	13.5	MW	C	N
0.062	1.57	B-401	.50	12.7	.046	1.2	1.7	.30	.30	7.6	.51	2.3	.20	5.1	0.008	0.2	24.0	MW	C	Z
0.062	1.57	B-402	.50	12.7	.042	1.1	4.4	.76	.23	5.9	1.0	4.5	.27	6.7	0.010	0.3	25.5	MW	C	Z
0.062	1.57	3623	.69	17.4	.044	1.1	2.6	.46	.28	7.2	.75	3.3	.24	6.2	0.009	0.2	26.0	MW	C	N
0.062	1.57	3720	.72	18.2	.046	1.2	1.0	.18	.40	10	.41	1.8	.32	8.1	0.008	0.2	38.8	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.062	1.57	2534	.91	23.0	.044	1.1	1.3	.23	.45	11	.60	2.7	.46	11.6	0.009	0.2	49.8	MW	C	N
0.062	1.57	N-18	.97	24.6	.052	1.3	.06	.01	.61	16	.04	.17	.36	9.0	0.005	0.1	70.0	SST	C	N
0.068	1.73	10938	.31	8.0	.046	1.2	8.1	1.4	.10	2.5	.78	3.5	.17	4.3	0.011	0.3	14.5	SST	C	N
0.068	1.73	A10-13	.34	8.7	.052	1.3	2.6	.45	.19	4.8	.49	2.2	.11	2.7	0.008	0.2	12.5	MW	C	GI
0.072	1.83	A10-3	.50	12.7	.042	1.1	56	9.8	.05	1.2	2.6	11	.15	3.8	0.015	0.4	9.00	MW	C	N
0.075	1.91	KK-29	.20	5.2	.059	1.5	4.4	.76	.10	2.6	.44	2.0	.06	1.5	0.008	0.2	6.50	MW	C	N
0.078	1.98	N-2	.19	4.8	.068	1.7	.21	.04	.12	3.0	.02	.11	.07	1.8	0.005	0.1	13.0	MW	C	N
0.078	1.98	N-11	.22	5.6	.058	1.5	9.5	1.7	.06	1.4	.53	2.3	.07	1.8	0.010	0.3	6.25	SST	C	N
0.078	1.98	N-78	.25	6.4	.068	1.7	.38	.07	.21	5.2	.08	.35	.05	1.1	0.005	0.1	8.00	MW	C	N
0.078	1.98	S-1013	.25	6.4	.050	1.3	24	4.3	.06	1.4	1.4	6.2	.15	3.7	0.014	0.4	9.50	SST	C	N
0.078	1.98	12526	.25	6.4	.048	1.2	49	8.5	.05	1.3	2.4	11	.14	3.4	0.015	0.4	8.00	MW	C	N
0.078	1.98	M-6	.25	6.4	.044	1.1	56	9.8	.04	.95	2.1	9.3	.21	5.4	0.017	0.4	11.5	MW	C	N
0.078	1.98	S-904	.28	7.1	.054	1.4	12	2.1	.07	1.9	.89	4.0	.13	3.2	0.012	0.3	9.50	SST	C	N
0.078	1.98	LL-1	.31	7.9	.046	1.2	61	11	.05	1.2	2.9	13	.15	3.9	0.016	0.4	8.50	MW	C	N
0.078	1.98	11146	.34	8.7	.054	1.4	12	2.0	.12	3.1	1.4	6.2	.14	3.7	0.012	0.3	11.0	MW	C	N
0.078	1.98	DD-73	.34	8.7	.058	1.5	5.1	.89	.16	4.1	.82	3.7	.12	3.0	0.010	0.3	11.0	MW	C	N
0.078	1.98	4345	.50	12.7	.066	1.7	.19	.03	.32	8.2	.06	.27	.18	4.5	0.006	0.2	28.5	MW	C	N
0.078	1.98	10213	1.13	28.6	.054	1.4	2.6	.45	.54	14	1.4	6.2	.52	13.1	0.012	0.3	42.0	MW	C	Z
0.078	1.98	B4-1	1.50	38.1	.054	1.4	2.9	.51	.31	7.8	.89	4.0	.41	10.4	0.012	0.3	33.0	SST	C	N
0.083	2.11	LL-66	.25	6.4	.055	1.4	22	3.9	.06	1.5	1.3	5.9	.13	3.4	0.014	0.4	8.50	SST	C	N
0.083	2.11	NN-81	.88	22.2	.059	1.5	2.2	.38	.39	9.9	.84	3.8	.44	11.3	0.012	0.3	36.0	SST	C	N
0.084	2.13	B6-19	.28	7.0	.074	1.9	.36	.06	.00	.00	.00	.00	.04	1.0	0.005	0.1	7.00	SPR	C	N
0.088	2.24	70027	.13	3.3	.072	1.8	5.8	1.0	.07	1.7	.38	1.7	.04	1.0	0.008	0.2	4.00	MW	C	N
0.088	2.24	70027S	.13	3.3	.072	1.8	5.0	.88	.05	1.2	.24	1.1	.04	1.0	0.008	0.2	4.00	SST	C	N
0.088	2.24	70036	.13	3.3	.068	1.7	13	2.2	.06	1.5	.74	3.3	.05	1.4	0.010	0.3	4.38	MW	C	N
0.088	2.24	70036S	.13	3.3	.068	1.7	11	1.9	.04	1.1	.47	2.1	.05	1.4	0.010	0.3	4.38	SST	C	N
0.088	2.24	70047	.13	3.3	.064	1.6	26	4.5	.05	1.2	1.3	5.6	.07	1.7	0.012	0.3	4.63	MW	C	N
0.088	2.24	70047S	.13	3.3	.064	1.6	22	3.9	.04	.90	.80	3.6	.07	1.7	0.012	0.3	4.63	SST	C	N
0.088	2.24	KK-17	.19	4.7	.068	1.7	10	1.8	.07	1.9	.74	3.3	.06	1.5	0.010	0.3	5.00	MW	C	N
0.088	2.24	70028	.19	4.8	.072	1.8	3.5	.62	.11	2.7	.38	1.7	.05	1.3	0.008	0.2	5.25	MW	C	N
0.088	2.24	70028S	.19	4.8	.072	1.8	3.1	.54	.08	2.0	.24	1.1	.05	1.3	0.008	0.2	5.25	SST	C	N
0.088	2.24	70037	.19	4.8	.068	1.7	6.9	1.2	.11	2.7	.74	3.3	.07	1.9	0.010	0.3	6.38	MW	C	N
0.088	2.24	70037S	.19	4.8	.068	1.7	6.0	1.1	.08	2.0	.47	2.1	.07	1.9	0.010	0.3	6.38	SST	C	N
0.088	2.24	70048	.19	4.8	.064	1.6	15	2.6	.09	2.2	1.3	5.6	.09	2.3	0.012	0.3	6.63	MW	C	N
0.088	2.24	70048S	.19	4.8	.064	1.6	13	2.2	.06	1.6	.80	3.6	.09	2.3	0.012	0.3	6.63	SST	C	N
0.088	2.24	70029	.25	6.4	.072	1.8	2.5	.44	.15	3.9	.38	1.7	.06	1.5	0.008	0.2	6.63	MW	C	N
0.088	2.24	70029S	.25	6.4	.072	1.8	2.2	.38	.11	2.9	.24	1.1	.06	1.5	0.008	0.2	6.63	SST	C	N
0.088	2.24	70038	.25	6.4	.068	1.7	5.0	.88	.15	3.7	.74	3.3	.09	2.3	0.010	0.3	8.00	MW	C	N
0.088	2.24	70038S	.25	6.4	.068	1.7	4.4	.77	.11	2.7	.47	2.1	.09	2.3	0.010	0.3	8.00	SST	C	N
0.088	2.24	70049	.25	6.4	.064	1.6	11	1.9	.12	3.0	1.3	5.6	.11	2.9	0.012	0.3	8.38	MW	C	N
0.088	2.24	70049S	.25	6.4	.064	1.6	9.3	1.6	.09	2.2	.80	3.6	.11	2.9	0.012	0.3	8.38	SST	C	N
0.088	2.24	70030	.31	7.9	.072	1.8	2.0	.36	.19	4.8	.38	1.7	.07	1.8	0.008	0.2	7.63	MW	C	N
0.088	2.24	70030S	.31	7.9	.072	1.8	1.8	.31	.14	3.5	.24	1.1	.07	1.8	0.008	0.2	7.63	SST	C	N
0.088	2.24	70039	.31	7.9	.068	1.7	3.9	.68	.19	4.8	.74	3.3	.11	2.7	0.010	0.3	9.75	MW	C	N
0.088	2.24	70039S	.31	7.9	.068	1.7	3.4	.60	.14	3.5	.47	2.1	.11	2.7	0.010	0.3	9.75	SST	C	N
0.088	2.24	70050	.31	7.9	.064	1.6	8.2	1.4	.15	3.9	1.3	5.6	.14	3.4	0.012	0.3	10.3	MW	C	N
0.088	2.24	70050S	.31	7.9	.064	1.6	7.2	1.3	.11	2.8	.80	3.6	.14	3.4	0.012	0.3	10.3	SST	C	N
0.088	2.24	12767	.34	8.7	.056	1.4	39	6.8	.07	1.7	2.6	12	.15	3.9	0.016	0.4	8.50	MW	C	N
0.088	2.24	70031	.38	9.7	.072	1.8	1.6	.27	.25	6.2	.38	1.7	.08	2.1	0.008	0.2	9.38	MW	C	N
0.088	2.24	70031S	.38	9.7	.072	1.8	1.4	.24	.18	4.6	.24	1.1	.08	2.1	0.008	0.2	9.38	SST	C	N
0.088	2.24	70040	.38	9.7	.068	1.7	3.3	.58	.22	5.6	.74	3.3	.12	3.1	0.010	0.3	11.1	MW	C	N
0.088	2.24	70040S	.38	9.7	.068	1.7	2.9	.51	.16	4.1	.47	2.1	.12	3.1	0.010	0.3	11.1	SST	C	N
0.088	2.24	70051	.38	9.7	.064	1.6	6.6	1.2	.19	4.8	1.3	5.6	.16	4.0	0.012	0.3	12.3	MW	C	N
0.088	2.24	70051S	.38	9.7	.064	1.6	5.8	1.0	.14	3.5	.80	3.6	.16	4.0	0.012	0.3	12.3	SST	C	N
0.088	2.24	70032	.44	11.2	.072	1.8	1.4	.24	.27	7.0	.38	1.7	.09	2.3	0.008	0.2	10.3	MW	C	N
0.088	2.24	70032S	.44	11.2	.072	1.8	1.2	.21	.20	5.1	.24	1.1	.09	2.3	0.008	0.2	10.3	SST	C	N
0.088	2.24	70041	.44	11.2	.068	1.7	2.9	.50	.26	6.6	.74	3.3	.14	3.5	0.010	0.3	12.6	MW	C	N
0.088	2.24	70041S	.44	11.2	.068	1.7	2.5	.43	.19	4.8	.47	2.1	.14	3.5	0.010	0.3	12.6	SST	C	N
0.088	2.24	70052	.44	11.2	.064	1.6	5.8	1.0	.22	5.5	1.3	5.6	.18	4.5	0.012	0.3	13.8	MW	C	N
0.088	2.24	70052S	.44	11.2	.064	1.6	5.0	.88	.16	4.0	.80	3.6	.18	4.5	0.012	0.3	13.8	SST	C	N
0.088	2.24	70033	.50	12.7	.072	1.8	1.2	.21	.32	8.1	.38	1.7	.10	2.6	0.008	0.2	11.6	MW	C	N
0.088	2.24	70033S	.50	12.7	.072	1.8	1.0	.18	.23	6.0	.24	1.1	.10	2.6	0.008	0.2	11.6	SST	C	N
0.088	2.24	70042	.50	12.7	.068	1.7	2.4	.42	.31	7.8	.74	3.3	.16	4.0	0.010	0.3	14.6	MW	C	N
0.088	2.24	70042S	.50	12.7	.068	1.7	2.1	.37	.23	5.7	.47	2.1	.16	4.0	0.010	0.3	14.6	SST	C	N
0.088	2.24	70053	.50	12.7	.064	1.6	4.9	.86	.25	6.5	1.3	5.6	.20	5.1	0.012	0.3	15.8	MW	C	N
0.088	2.24	70053S	.50	12.7	.064	1.6	4.3	.75	.19	4.7	.80	3.6	.20	5.1	0.012	0.3	15.8	SST	C	N
0.088	2.24	70034	.56	14.2	.072	1.8	1.0	.18	.37	9.3	.38	1.7	.11	2.8	0.008	0.2	13.0	MW	C	N
0.088	2.24	70034S	.56	14.2	.072	1.8	.91	.16	.27	6.8	.24	1.1	.11	2.8	0.008	0.2	13.0	SST	C	N
0.088	2.24	70043	.56	14.2	.068	1.7	2.1	.38	.34	8.7	.74	3.3	.17	4.3	0.010	0.3	16.1	MW	C	N
0.088	2.24	70043S	.56	14.2	.068	1.7	1.9	.33	.25	6.4	.47	2.1	.17	4.3	0.010	0.3	16.1	SST	C	N
0.088	2.24	70054	.56	14.2	.064	1.6	4.5	.78	.28	7.2	1.3	5.6	.22	5.6	0.012	0.3	17.3	MW	C	N
0.088	2.24	70054S	.56	14.2	.064	1.6	3.9	.68	.21	5.3	.80	3.6	.22	5.6	0.012	0.3	17.3	SST	C	N
0.088	2.24	70035	.63	16.0	.072	1.8	.95	.17	.40	10	.38	1.7	.12	3.1	0.008	0.2	14.1	MW	C	N
0.088	2.24	70035S	.63	16.0	.072	1.8	.83	.14	.30	7.5	.24	1.1	.12	3.1	0.008	0.2	14.1	SST	C	N
0.088	2.24	70044	.63	16.0	.068	1.7	1.9	.32	.40	10	.74	3.3	.19	4.9	0.010	0.3	18.4	MW	C	N
0.088	2.24	70044S	.63	16.0	.068	1.7	1.6	.28	.29	7.4	.47	2.1	.19	4.9	0.010	0.3	18.4	SST	C	N
0.088	2.24	70055	.63	16.0	.064	1.6	3.9	.67	.33	8.3	1.3	5.6	.25	6.3	0.012	0.3	19.6	MW	C	N
0.088	2.24	70055S	.63	16.0	.064	1.6	3.4	.59	.24	6.1	.80	3.6	.25	6.3	0.012	0.3	19.6	SST	C	N
0.088	2.24	70045	.69	17.5	.068	1.7	1.7	.30	.43	11	.74	3.3	.21	5.3	0.010	0.3	19.9	MW	C	N
0.088	2.24	70045S	.69	17.5	.068	1.7	1.5	.26	.32	8.1	.47	2.1	.21	5.3	0.010	0.3	19.9	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.088	2.24	70056	.69	17.5	.064	1.6	3.5	.61	.36	9.1	1.3	5.6	.27	6.8	0.012	0.3	21.4	MW	C	N
0.088	2.24	70056S	.69	17.5	.064	1.6	3.0	.53	.26	6.7	.80	3.6	.27	6.8	0.012	0.3	21.4	SST	C	N
0.088	2.24	70046	.75	19.1	.068	1.7	1.6	.28	.46	12	.74	3.3	.22	5.6	0.010	0.3	20.9	MW	C	N
0.088	2.24	70046S	.75	19.1	.068	1.7	1.4	.24	.34	8.5	.47	2.1	.22	5.6	0.010	0.3	20.9	SST	C	N
0.088	2.24	70057	.75	19.1	.064	1.6	3.1	.54	.40	10	1.3	5.6	.30	7.6	0.012	0.3	23.9	MW	C	N
0.088	2.24	70057S	.75	19.1	.064	1.6	2.7	.47	.30	7.5	.80	3.6	.30	7.6	0.012	0.3	23.9	SST	C	N
0.092	2.34	11161	.50	12.7	.072	1.8	1.6	.29	.33	8.5	.55	2.4	.12	3.0	0.010	0.3	11.0	BC	C	N
0.094	2.39	EE-21	.13	3.2	.066	1.7	48	8.4	.02	.63	1.2	5.2	.07	1.8	0.014	0.4	4.00	SST	C	N
0.094	2.39	S-1010	.14	3.6	.054	1.4	144	25	.01	.25	1.4	6.4	.13	3.3	0.020	0.5	5.50	SST	C	N
0.094	2.39	3719	.16	4.0	.068	1.7	24	4.2	.06	1.6	1.5	6.6	.08	2.1	0.013	0.3	5.25	MW	C	N
0.094	2.39	BB-5	.17	4.3	.078	2.0	2.3	.41	.12	2.9	.27	1.2	.06	1.4	0.008	0.2	6.00	MW	C	N
0.094	2.39	O-23	.19	4.7	.074	1.9	2.7	.47	.07	1.7	.18	.80	.12	3.0	0.010	0.3	11.0	MW	C	Z
0.094	2.39	2870	.19	4.8	.072	1.8	7.2	1.3	.10	2.5	.71	3.1	.09	2.3	0.011	0.3	7.13	MW	C	Z
0.094	2.39	II-22	.22	5.5	.074	1.9	1.9	.33	.06	1.5	.11	.48	.16	4.1	0.010	0.3	15.0	MW	C	N
0.094	2.39	BB-21	.22	5.6	.078	2.0	2.7	.47	.09	2.2	.23	1.0	.05	1.2	0.008	0.2	5.00	SST	C	N
0.094	2.39	N-79	.25	6.4	.084	2.1	.18	.03	.20	5.1	.04	.16	.05	1.3	0.005	0.1	9.00	MW	C	N
0.094	2.39	JJ-68	.25	6.4	.074	1.9	4.3	.75	.10	2.6	.44	2.0	.08	2.0	0.010	0.3	7.00	SST	C	N
0.094	2.39	N-99	.25	6.4	.070	1.8	6.7	1.2	.12	3.0	.78	3.4	.13	3.4	0.012	0.3	10.1	MW	C	GI
0.094	2.39	11923	.25	6.4	.070	1.8	7.7	1.4	.13	3.3	1.0	4.5	.12	3.0	0.012	0.3	9.00	MW	C	N
0.094	2.39	3648	.25	6.4	.066	1.7	22	3.8	.09	2.2	1.9	8.2	.11	2.8	0.014	0.4	7.00	MW	C	Z
0.094	2.39	M-118	.25	6.4	.064	1.6	30	5.2	.07	1.8	2.1	9.1	.12	3.0	0.015	0.4	7.00	MW	C	Z
0.094	2.39	II-96	.25	6.4	.052	1.3	125	22	.03	.72	3.5	16	.17	4.3	0.021	0.5	7.00	SST	C	N
0.094	2.39	O-148	.28	7.1	.048	1.2	250	44	.03	.69	6.8	30	.17	4.4	0.023	0.6	6.50	MW	C	N
0.094	2.39	DD-7	.30	7.5	.068	1.7	7.7	1.4	.13	3.4	1.0	4.6	.14	3.6	0.013	0.3	10.0	HD	O	Z
0.094	2.39	LL-37	.31	7.9	.074	1.9	3.0	.53	.15	3.7	.44	2.0	.10	2.5	0.010	0.3	9.00	SST	C	N
0.094	2.39	10219	.31	7.9	.072	1.8	4.6	.81	.19	4.9	.88	3.9	.12	3.1	0.011	0.3	10.0	MW	C	N
0.094	2.39	10083	.31	7.9	.068	1.7	15	2.7	.10	2.5	1.5	6.6	.10	2.6	0.013	0.3	7.00	MW	C	N
0.094	2.39	O-56	.31	8.0	.070	1.8	5.4	.95	.16	4.0	.85	3.8	.16	4.0	0.012	0.3	12.0	MW	C	Z
0.094	2.39	OO-10	.31	7.9	.052	1.3	82	14	.06	1.6	5.3	24	.20	5.2	0.021	0.5	8.75	MW	O	N
0.094	2.39	10874	.34	8.7	.064	1.6	16	2.8	.09	2.2	1.4	6.1	.17	4.3	0.015	0.4	10.3	SST	C	N
0.094	2.39	S-1526	.34	8.7	.060	1.5	35	6.2	.06	1.4	2.0	8.7	.16	4.1	0.017	0.4	8.50	SST	C	N
0.094	2.39	11113	.34	8.7	.058	1.5	43	7.5	.08	2.0	3.5	15	.20	5.0	0.018	0.5	10.0	MW	C	N
0.094	2.39	M-56	.34	8.7	.052	1.3	62	11	.06	1.4	3.5	16	.27	6.9	0.021	0.5	12.0	SST	C	N
0.094	2.39	N-315	.34	8.7	.066	1.7	13	2.4	.14	3.5	1.9	8.2	.15	3.9	0.014	0.4	10.0	MW	C	N
0.094	2.39	10932	.34	8.7	.062	1.6	24	4.2	.10	2.6	2.5	11	.18	4.6	0.016	0.4	10.3	MW	C	GI
0.094	2.39	FF-33	.38	9.5	.070	1.8	5.7	1.0	.21	5.3	1.2	5.3	.15	3.8	0.012	0.3	11.5	MW	C	N
0.094	2.39	LL-2	.38	9.5	.070	1.8	2.0	.34	.16	4.0	.31	1.4	.22	5.5	0.012	0.3	17.0	MW	C	N
0.094	2.39	3778	.38	9.5	.066	1.7	13	2.4	.14	3.5	1.9	8.2	.15	3.9	0.014	0.4	10.0	MW	C	Z
0.094	2.39	N-15	.41	10.3	.074	1.9	2.9	.50	.24	6.2	.69	3.1	.12	2.9	0.010	0.3	10.5	MW	C	N
0.094	2.39	V-92	.41	10.3	.058	1.5	43	7.5	.08	2.0	3.5	15	.20	5.0	0.018	0.5	10.0	MW	C	N
0.094	2.39	11127	.44	11.1	.066	1.7	9.0	1.6	.21	5.2	1.9	8.2	.21	5.3	0.014	0.4	14.0	MW	C	N
0.094	2.39	O-8	.44	11.1	.064	1.6	15	2.6	.14	3.5	2.1	9.1	.20	5.0	0.015	0.4	12.0	MW	C	N
0.094	2.39	2541	.44	11.1	.062	1.6	18	3.2	.14	3.5	2.5	11	.22	5.7	0.016	0.4	13.0	MW	C	Z
0.094	2.39	N-40	.44	11.1	.062	1.6	17	2.9	.15	3.8	2.5	11	.24	6.1	0.016	0.4	14.0	MW	C	Z
0.094	2.39	N-26	.44	11.1	.060	1.5	24	4.2	.12	3.1	2.9	13	.24	6.0	0.017	0.4	13.0	MW	C	N
0.094	2.39	N-149	.44	11.1	.058	1.5	31	5.4	.11	2.9	3.5	15	.26	6.5	0.018	0.5	13.3	MW	C	Z
0.094	2.39	3902	.44	11.1	.054	1.4	52	9.0	.09	2.3	4.6	21	.28	7.1	0.020	0.5	13.0	MW	C	N
0.094	2.39	CC-92	.44	11.1	.050	1.3	69	12	.09	2.2	5.9	26	.35	8.9	0.022	0.6	15.0	MW	C	Z
0.094	2.39	N-7	.47	11.9	.066	1.7	8.0	1.4	.23	5.9	1.9	8.2	.23	5.9	0.014	0.4	15.5	MW	C	N
0.094	2.39	10782	.50	12.7	.078	2.0	.64	.11	.26	6.6	.17	.74	.09	2.4	0.008	0.2	10.8	BC	C	N
0.094	2.39	1904	.50	12.7	.074	1.9	1.6	.28	.32	8.1	.52	2.3	.18	4.6	0.010	0.3	17.0	MW	C	Z
0.094	2.39	A9-20	.50	12.7	.074	1.9	2.6	.45	.27	6.9	.69	3.1	.13	3.2	0.010	0.3	11.5	MW	C	Z
0.094	2.39	B-403	.50	12.7	.074	1.9	1.8	.31	.33	8.4	.59	2.6	.17	4.3	0.010	0.3	15.8	MW	C	Z
0.094	2.39	B-404	.50	12.7	.070	1.8	3.5	.61	.28	7.1	.97	4.3	.22	5.6	0.012	0.3	17.5	MW	C	Z
0.094	2.39	G-6	.50	12.7	.068	1.7	7.4	1.3	.20	5.2	1.5	6.6	.18	4.5	0.013	0.3	12.5	MW	C	BO
0.094	2.39	B-405	.50	12.7	.066	1.7	6.7	1.2	.23	5.9	1.6	7.0	.27	6.8	0.014	0.4	18.0	MW	C	Z
0.094	2.39	B-406	.50	12.7	.062	1.6	12	2.2	.20	5.0	2.4	11	.30	7.7	0.016	0.4	18.0	MW	C	Z
0.094	2.39	S-860	.53	13.5	.068	1.7	6.1	1.1	.16	4.0	.95	4.2	.18	4.6	0.013	0.3	13.0	SST	C	N
0.094	2.39	B15-14	.53	13.5	.066	1.7	5.8	1.0	.23	5.8	1.3	6.0	.30	7.6	0.014	0.4	20.5	MW	C	N
0.094	2.39	N-101	.53	13.5	.064	1.6	7.4	1.3	.19	4.7	1.4	6.1	.35	8.8	0.015	0.4	22.0	MW	C	Z
0.094	2.39	HH-62	.56	14.3	.078	2.0	.77	.14	.44	11	.34	1.5	.12	3.0	0.008	0.2	14.0	MW	C	GI
0.094	2.39	3066	.56	14.3	.074	1.9	1.7	.29	.39	9.8	.65	2.9	.18	4.4	0.010	0.3	16.5	MW	C	Z
0.094	2.39	B10-14	.56	14.3	.068	1.7	4.0	.70	.27	6.9	1.1	4.9	.29	7.3	0.013	0.3	21.3	MW	C	Z
0.094	2.39	YY-9	.56	14.3	.066	1.7	7.2	1.3	.16	4.2	1.2	5.2	.22	5.7	0.014	0.4	15.0	SST	C	N
0.094	2.39	G-14	.59	15.1	.066	1.7	6.5	1.1	.28	7.2	1.9	8.2	.27	6.9	0.014	0.4	18.5	MW	C	N
0.094	2.39	S-1577	.59	15.1	.054	1.4	63	11	.05	1.2	3.1	14	.20	5.1	0.020	0.5	10.0	SST	CG	N
0.094	2.39	II-10	.63	15.9	.082	2.1	.24	.04	.43	11	.10	.46	.08	2.0	0.006	0.2	12.0	SST	C	N
0.094	2.39	B2-3	.63	15.9	.070	1.8	3.2	.56	.37	9.4	1.2	5.3	.24	6.1	0.012	0.3	19.0	MW	C	N
0.094	2.39	3642	.63	15.9	.066	1.7	9.0	1.6	.21	5.2	1.9	8.2	.21	5.3	0.014	0.4	14.0	MW	C	Z
0.094	2.39	VV-24	.75	19.1	.074	1.9	.94	.16	.47	12	.44	2.0	.26	6.5	0.010	0.3	24.5	SST	C	N
0.094	2.39	OO-23	.75	19.1	.066	1.7	6.0	1.0	.31	7.8	1.9	8.2	.29	7.5	0.014	0.4	20.0	MW	C	BO
0.094	2.39	4214	.81	20.7	.074	1.9	.62	.11	.39	10	.24	1.1	.42	10.7	0.010	0.3	41.0	MW	C	N
0.094	2.39	OO-13	.94	23.8	.074	1.9	.88	.15	.50	13	.44	2.0	.27	6.9	0.010	0.3	26.0	SST	C	N
0.094	2.39	NN-25	1.00	25.4	.064	1.6	5.4	.94	.38	9.7	2.1	9.1	.43	10.9	0.015	0.4	27.5	MW	O	N
0.094	2.39	DD-59	1.13	28.6	.074	1.9	.57	.10	.72	18	.40	1.8	.41	10.4	0.010	0.3	40.0	SST	C	N
0.094	2.39	RR-21	1.19	30.1	.074	1.9	.96	.17	.46	12	.44	2.0	.25	6.4	0.010	0.3	24.0	SST	C	N
0.094	2.39	G-40	1.31	33.3	.064	1.6	3.8	.66	.54	14	2.1	9.1	.63	16.0	0.015	0.4	41.0	MW	C	Z
0.100	2.54	A9-8	.19	4.7	.076	1.9	11	1.9	.10	2.6	1.1	5.0	.08	2.1	0.012	0.3	6.00	MW	C	Z
0.100	2.54	B2-43	.20	5.2	.080	2.0	3.9	.69	.12	3.1	.49	2.2	.08	2.0	0.010	0.3	7.00	MW	C	N
0.100	2.54	12479	.22	5.5	.074	1.9	14	2.4	.07	1.7	.90	4.0	.08	2.0	0.013	0.3	6.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.100	2.54	10434	.22	5.6	.086	2.2	.86	.15	.16	4.1	.14	.62	.06	1.4	0.007	0.2	7.00	MW	C	N
0.100	2.54	A9-16	.25	6.4	.082	2.1	2.3	.40	.17	4.4	.39	1.8	.08	1.9	0.009	0.2	7.50	MW	C	N
0.100	2.54	00-41	.31	7.9	.076	1.9	6.3	1.1	.11	2.9	.71	3.2	.11	2.7	0.012	0.3	8.00	SST	C	N
0.100	2.54	10007	.34	8.7	.068	1.7	18	3.1	.13	3.4	2.3	10	.19	4.9	0.016	0.4	11.0	MW	C	N
0.100	2.54	00-25	.38	9.5	.060	1.5	57	10	.05	1.3	2.9	13	.20	5.1	0.020	0.5	9.00	SST	C	N
0.100	2.54	NN-7	.44	11.1	.060	1.5	35	6.1	.08	2.2	2.9	13	.25	6.4	0.020	0.5	11.5	SST	O	N
0.105	2.67	BB-31	.28	7.0	.089	2.3	.86	.15	.20	5.1	.17	.76	.08	1.9	0.008	0.2	8.50	SST	C	N
0.109	2.77	A9-10	.13	3.2	.065	1.7	227	40	.02	.38	3.4	15	.11	2.8	0.022	0.6	4.00	SST	C	N
0.109	2.77	N-17	.16	4.0	.101	2.6	.03	.005	.10	2.6	.003	.01	.05	1.3	0.004	0.1	12.0	SST	C	N
0.109	2.77	EE-23	.17	4.4	.069	1.8	124	22	.03	.84	4.1	18	.11	2.7	0.020	0.5	4.00	MW	C	GI
0.109	2.77	L-71	.19	4.7	.093	2.4	1.1	.20	.12	3.1	.14	.63	.06	1.6	0.008	0.2	7.00	MW	C	N
0.109	2.77	2500	.19	4.8	.089	2.3	3.7	.65	.12	3.0	.44	1.9	.07	1.8	0.010	0.3	6.00	MW	C	Z
0.109	2.77	B15-29	.22	5.6	.091	2.3	1.3	.24	.13	3.3	.17	.77	.09	2.3	0.009	0.2	9.00	MW	C	Z
0.109	2.77	JJ-20	.25	6.4	.093	2.4	.99	.17	.19	4.7	.18	.82	.06	1.6	0.008	0.2	7.00	SST	C	N
0.109	2.77	3722	.25	6.4	.089	2.3	2.5	.43	.16	4.1	.40	1.8	.09	2.3	0.010	0.3	8.00	MW	C	N
0.109	2.77	JJ-1	.25	6.4	.089	2.3	4.3	.74	.09	2.3	.38	1.7	.06	1.5	0.010	0.3	5.00	SST	C	N
0.109	2.77	N-9	.25	6.4	.085	2.2	5.3	.92	.12	3.2	.66	2.9	.10	2.6	0.012	0.3	7.50	SST	C	N
0.109	2.77	V-70	.25	6.4	.081	2.1	5.9	1.0	.05	1.4	.32	1.4	.20	5.0	0.014	0.4	13.0	MW	C	N
0.109	2.77	B-21	.25	6.4	.079	2.0	25	4.4	.05	1.2	1.2	5.3	.09	2.3	0.015	0.4	5.00	SST	C	N
0.109	2.77	O-118	.28	7.1	.091	2.3	1.3	.24	.20	5.1	.27	1.2	.08	2.1	0.009	0.2	9.00	MW	CG	N
0.109	2.77	O-5	.28	7.1	.085	2.2	6.5	1.1	.16	4.0	1.0	4.6	.10	2.4	0.012	0.3	7.00	MW	C	N
0.109	2.77	A15-49	.28	7.1	.073	1.9	33	5.8	.09	2.3	3.0	14	.14	3.7	0.018	0.5	8.00	MW	CG	N
0.109	2.77	QQ-11	.28	7.1	.067	1.7	59	10	.05	1.3	3.1	14	.19	4.8	0.021	0.5	8.00	SST	C	N
0.109	2.77	12527	.30	7.5	.079	2.0	15	2.6	.12	3.1	1.8	8.0	.14	3.4	0.015	0.4	8.00	MW	C	N
0.109	2.77	B15-45	.31	7.9	.095	2.4	.58	.10	.24	6.2	.14	.63	.06	1.4	0.007	0.2	7.00	SST	C	N
0.109	2.77	S-1089	.31	7.9	.091	2.3	1.6	.29	.17	4.4	.28	1.3	.07	1.8	0.009	0.2	7.00	SST	C	N
0.109	2.77	G-16	.31	7.9	.085	2.2	3.2	.55	.17	4.3	.53	2.4	.14	3.7	0.012	0.3	11.0	SST	C	N
0.109	2.77	BB-12	.31	7.9	.083	2.1	5.8	1.0	.14	3.7	.83	3.7	.13	3.3	0.013	0.3	9.00	SST	C	N
0.109	2.77	N-1	.31	7.9	.081	2.1	9.9	1.7	.16	4.1	1.6	7.2	.13	3.4	0.014	0.4	8.50	MW	C	GI
0.109	2.77	12531	.31	7.9	.079	2.0	17.5	3.0	.11	2.8	1.8	8.0	.12	3.0	0.015	0.4	7.00	MW	C	N
0.109	2.77	BB-14	.31	7.9	.069	1.8	50	8.8	.08	2.1	4.1	18	.19	4.8	0.020	0.5	8.50	MW	C	N
0.109	2.77	12454	.34	8.7	.085	2.2	4.8	.85	.14	3.5	.66	2.9	.11	2.7	0.012	0.3	8.00	SST	C	N
0.109	2.77	J-48	.34	8.7	.069	1.8	33	5.7	.08	2.1	2.7	12	.26	6.6	0.020	0.5	12.0	MW	C	N
0.109	2.77	LL-63	.34	8.7	.065	1.7	74	13	.05	1.2	3.6	16	.20	5.0	0.022	0.6	8.00	SST	C	N
0.109	2.77	12534	.34	8.7	.093	2.4	.66	.12	.26	6.6	.17	.77	.08	2.1	0.008	0.2	9.50	SST	C	N
0.109	2.77	00-26	.34	8.7	.073	1.9	22	3.9	.09	2.3	2.0	9.0	.20	5.0	0.018	0.5	10.0	SST	C	N
0.109	2.77	A12-33	.38	9.5	.093	2.4	.71	.13	.29	7.3	.20	.91	.09	2.2	0.008	0.2	10.0	MW	C	N
0.109	2.77	KK-10	.38	9.5	.071	1.8	33	5.7	.07	1.8	2.4	11	.19	4.8	0.019	0.5	9.00	SST	C	N
0.109	2.77	A9-17	.38	9.5	.069	1.8	59	10	.07	1.8	4.1	18	.17	4.3	0.020	0.5	7.50	MW	C	N
0.109	2.77	GG-19	.38	9.5	.069	1.8	23	4.1	.10	2.4	2.2	9.9	.28	7.1	0.020	0.5	14.0	SST	CG	N
0.109	2.77	2937	.41	10.3	.087	2.2	1.8	.31	.24	6.0	.42	1.9	.17	4.3	0.011	0.3	14.5	MW	C	Z
0.109	2.77	1501	.44	11.1	.065	1.7	49	8.5	.11	2.8	5.4	24	.30	7.5	0.022	0.6	12.5	MW	C	Z
0.109	2.77	B2-27	.45	11.5	.077	2.0	9.0	1.6	.20	5.0	1.8	7.9	.26	6.5	0.016	0.4	15.0	MW	C	Z
0.109	2.77	S-829	.47	11.9	.071	1.8	32	5.6	.07	1.9	2.4	11	.19	4.8	0.019	0.5	9.00	SST	C	N
0.109	2.77	L-2	.47	11.9	.069	1.8	27	4.8	.15	3.8	4.1	18	.30	7.6	0.020	0.5	14.0	MW	C	GI
0.109	2.77	N-69	.47	11.9	.065	1.7	57	10	.09	2.4	5.4	24	.26	6.7	0.022	0.6	11.0	MW	C	N
0.109	2.77	V-16	.50	12.7	.089	2.3	.81	.14	.31	7.9	.25	1.1	.19	4.8	0.010	0.3	18.0	SST	C	N
0.109	2.77	B2-33	.50	12.7	.085	2.2	4.4	.76	.24	6.0	1.0	4.6	.13	3.2	0.012	0.3	9.50	MW	C	N
0.109	2.77	S-814	.50	12.7	.063	1.6	51	9.0	.08	2.0	4.1	18	.32	8.0	0.023	0.6	12.8	SST	C	N
0.109	2.77	B-54	.50	12.7	.059	1.5	95	17	.08	1.9	7.2	32	.33	8.3	0.025	0.6	12.0	MW	C	N
0.109	2.77	B15-50	.53	13.5	.087	2.2	2.5	.44	.32	8.2	.80	3.5	.13	3.4	0.011	0.3	11.0	MW	C	N
0.109	2.77	N-19	.53	13.5	.075	1.9	15	2.7	.17	4.3	2.6	11	.22	5.6	0.017	0.4	12.0	MW	C	N
0.109	2.77	L-72	.56	14.3	.095	2.4	.17	.03	.42	11	.07	.31	.14	3.6	0.007	0.2	19.0	SST	C	N
0.109	2.77	N-6	.56	14.3	.093	2.4	.48	.08	.44	11	.21	.94	.12	3.0	0.008	0.2	14.0	MW	C	N
0.109	2.77	AA-37	.56	14.3	.089	2.3	.68	.12	.32	8.2	.22	.98	.24	6.1	0.010	0.3	23.0	MW	C	Z
0.109	2.77	A-38	.59	15.1	.085	2.2	3.0	.52	.35	8.8	1.0	4.6	.17	4.3	0.012	0.3	13.0	MW	C	N
0.109	2.77	U-76	.63	15.9	.085	2.2	2.0	.36	.40	10	.81	3.6	.23	5.8	0.012	0.3	18.0	MW	C	N
0.109	2.77	12529	.63	15.9	.077	2.0	11	1.9	.20	5.2	2.2	9.6	.22	5.7	0.016	0.4	13.0	MW	C	N
0.109	2.77	G-82	.63	15.9	.069	1.8	15	2.6	.18	4.7	2.7	12	.44	11.2	0.020	0.5	21.0	SST	C	N
0.109	2.77	DD-32	.63	15.9	.069	1.8	24	4.2	.17	4.3	4.1	18	.30	7.6	0.020	0.5	15.0	MW	CG	N
0.109	2.77	A9-21	.63	15.9	.067	1.7	29	5.1	.16	4.1	4.7	21	.36	9.1	0.021	0.5	16.0	MW	C	N
0.109	2.77	PP-33	.66	16.7	.081	2.1	2.9	.51	.31	7.8	.90	4.0	.35	8.9	0.014	0.4	24.0	MW	C	Z
0.109	2.77	H-76	.69	17.4	.079	2.0	4.0	.70	.33	8.3	1.3	5.8	.36	9.1	0.015	0.4	24.0	MW	CG	N
0.109	2.77	JJ-57	.75	19.1	.087	2.2	.97	.17	.50	13	.48	2.1	.25	6.4	0.011	0.3	22.0	SST	C	N
0.109	2.77	U-83	.75	19.1	.085	2.2	1.7	.30	.49	12	.84	3.7	.26	6.7	0.012	0.3	21.0	MW	C	Z
0.109	2.77	U-55	.81	20.6	.085	2.2	1.9	.33	.35	8.8	.66	2.9	.22	5.5	0.012	0.3	17.0	SST	C	N
0.109	2.77	A10-37	.84	21.4	.083	2.1	2.3	.40	.36	9.2	.83	3.7	.27	6.9	0.013	0.3	20.0	SST	C	N
0.109	2.77	W-54	.88	22.2	.095	2.4	.19	.03	.74	19	.14	.63	.14	3.6	0.007	0.2	19.0	MW	C	GI
0.109	2.77	MM-47	.88	22.2	.089	2.3	.85	.15	.45	11	.38	1.7	.17	4.3	0.010	0.3	17.0	SST	CG	N
0.109	2.77	KK-5	.94	23.8	.059	1.5	34	5.9	.14	3.7	4.9	22	.66	16.8	0.025	0.6	26.5	SST	CG	N
0.109	2.77	B2-18	1.00	25.4	.091	2.3	.55	.10	.51	13	.28	1.3	.16	4.1	0.009	0.2	17.0	SST	C	N
0.109	2.77	M-78	1.09	27.8	.079	2.0	3.8	.67	.31	8.0	1.2	5.3	.35	8.8	0.015	0.4	22.0	SST	C	N
0.109	2.77	DD-45	1.13	28.6	.085	2.2	1.4	.25	.46	12	.66	2.9	.28	7.0	0.012	0.3	22.0	SST	C	N
0.109	2.77	GG-65	1.13	28.6	.077	2.0	5.1	.89	.28	7.2	1.4	6.4	.37	9.3	0.016	0.4	22.0	SST	C	N
0.109	2.77	KK-13	1.13	28.6	.077	2.0	3.1	.54	.47	12	1.4	6.4	.66	16.7	0.016	0.4	40.0	MW	C	Z
0.109	2.77	3550	1.19	30.2	.085	2.2	1.4	.24	.76	19	1.0	4.6	.32	8.2	0.012	0.3	26.0	MW	C	GI
0.109	2.77	B18-150	1.25	31.8	.087	2.2	.77	.14	.90	23	.69	3.1	.35	8.9	0.011	0.3	31.0	MW	C	N
0.109	2.77	2506	1.25	31.8	.083	2.1	1.9	.33	.70	18	1.3	5.8	.36	9.2	0.013	0.3	27.0	MW	C	GI
0.109	2.77	U-70	1.31	33.3	.077	2.0	5.9	1.0	.37	9.4	2.2	9.6	.35	8.9	0.016	0.4	22.0	MW	CG	N
0.109	2.77	LL-80	1.31	33.3	.073	1.9	8.7	1.5	.23	5.9	2.0	9.0	.41	10.5	0.018	0.5	22.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.114	2.90	GG-7	.16	4.0	.090	2.3	8.1	1.4	.08	2.0	.63	2.8	.07	1.8	0.012	0.3	5.00	SST	C	N
0.114	2.90	OO-7	.16	4.0	.070	1.8	192	34	.02	.46	3.5	15	.11	2.8	0.022	0.6	4.00	SST	C	N
0.114	2.90	V-79	.25	6.4	.082	2.1	15	2.6	.07	1.9	1.1	4.8	.18	4.5	0.016	0.4	10.3	MW	C	N
0.114	2.90	10442	.31	7.9	.086	2.2	9.6	1.7	.16	4.1	1.6	6.9	.12	3.1	0.014	0.4	7.75	MW	C	N
0.114	2.90	B12-39	.44	11.1	.074	1.9	30	5.3	.09	2.2	2.6	12	.22	5.6	0.020	0.5	10.0	SST	C	N
0.114	2.90	10909	1.00	25.4	.094	2.4	.91	.16	.63	16	.58	2.6	.17	4.3	0.010	0.3	16.0	MW	C	Z
0.114	2.90	A11-5	1.34	34.1	.068	1.7	12	2.1	.33	8.4	3.9	17	.99	25.1	0.023	0.6	42.0	SST	C	N
0.117	2.97	12747	.27	6.8	.083	2.1	21	3.7	.08	2.0	1.6	7.2	.14	3.5	0.017	0.4	7.00	SST	C	N
0.120	3.05	70109	.19	4.8	.088	2.2	26	4.5	.08	2.0	2.0	8.8	.08	2.1	0.016	0.4	5.25	MW	CG	N
0.120	3.05	70109S	.19	4.8	.088	2.2	22	3.9	.06	1.5	1.3	5.9	.08	2.1	0.016	0.4	5.25	SST	CG	N
0.120	3.05	70131	.19	4.8	.084	2.1	41	7.1	.07	1.7	2.8	12	.10	2.5	0.018	0.5	5.50	MW	CG	N
0.120	3.05	70131S	.19	4.8	.084	2.1	35	6.2	.05	1.3	1.9	8.3	.10	2.5	0.018	0.5	5.50	SST	CG	N
0.120	3.05	70058	.25	6.4	.100	2.5	3.2	.56	.17	4.4	.55	2.4	.05	1.4	0.010	0.3	5.38	MW	CG	N
0.120	3.05	70058S	.25	6.4	.100	2.5	2.8	.49	.13	3.2	.35	1.6	.05	1.4	0.010	0.3	5.38	SST	CG	N
0.120	3.05	70074	.25	6.4	.096	2.4	6.3	1.1	.15	3.8	.94	4.2	.07	1.8	0.012	0.3	5.75	MW	CG	N
0.120	3.05	70074S	.25	6.4	.096	2.4	5.5	.96	.11	2.8	.60	2.7	.07	1.8	0.012	0.3	5.75	SST	CG	N
0.120	3.05	70090	.25	6.4	.092	2.3	11	2.0	.13	3.3	1.5	6.6	.09	2.2	0.014	0.4	6.13	MW	CG	N
0.120	3.05	70090S	.25	6.4	.092	2.3	9.8	1.7	.10	2.5	.94	4.2	.09	2.2	0.014	0.4	6.13	SST	CG	N
0.120	3.05	70110	.25	6.4	.088	2.2	18	3.1	.11	2.9	2.0	8.8	.11	2.7	0.016	0.4	6.75	MW	CG	N
0.120	3.05	70110S	.25	6.4	.088	2.2	15	2.7	.09	2.2	1.3	5.9	.11	2.7	0.016	0.4	6.75	SST	CG	N
0.120	3.05	B3-56	.25	6.4	.088	2.2	15	2.6	.09	2.2	1.3	5.9	.11	2.8	0.016	0.4	6.88	SST	CG	N
0.120	3.05	70132	.25	6.4	.084	2.1	28	5.0	.10	2.5	2.8	12	.13	3.2	0.018	0.5	7.00	MW	CG	N
0.120	3.05	70132S	.25	6.4	.084	2.1	25	4.3	.08	1.9	1.9	8.3	.13	3.2	0.018	0.5	7.00	SST	CG	N
0.120	3.05	70153	.25	6.4	.080	2.0	46	8.1	.08	2.1	3.8	17	.14	3.6	0.020	0.5	7.00	MW	CG	N
0.120	3.05	70153S	.25	6.4	.080	2.0	40	7.0	.06	1.6	2.5	11	.14	3.6	0.020	0.5	7.00	SST	CG	N
0.120	3.05	70171	.25	6.4	.076	1.9	70	12	.07	1.8	5.0	22	.16	4.0	0.022	0.6	7.13	MW	CG	N
0.120	3.05	70171S	.25	6.4	.076	1.9	61	11	.05	1.4	3.3	15	.16	4.0	0.022	0.6	7.13	SST	CG	N
0.120	3.05	70190	.25	6.4	.072	1.8	108	19	.06	1.5	6.4	28	.17	4.3	0.024	0.6	7.00	MW	CG	N
0.120	3.05	70190S	.25	6.4	.072	1.8	94	16	.05	1.1	4.2	19	.17	4.3	0.024	0.6	7.00	SST	CG	N
0.120	3.05	70059	.31	7.9	.100	2.5	2.5	.43	.22	5.7	.55	2.4	.06	1.6	0.010	0.3	6.38	MW	CG	N
0.120	3.05	70059S	.31	7.9	.100	2.5	2.1	.38	.16	4.1	.35	1.6	.06	1.6	0.010	0.3	6.38	SST	CG	N
0.120	3.05	70075	.31	7.9	.096	2.4	5.0	.87	.19	4.8	.94	4.2	.08	2.1	0.012	0.3	6.75	MW	CG	N
0.120	3.05	70075S	.31	7.9	.096	2.4	4.3	.76	.14	3.5	.60	2.7	.08	2.1	0.012	0.3	6.75	SST	CG	N
0.120	3.05	70091	.31	7.9	.092	2.3	8.8	1.5	.17	4.3	1.5	6.6	.10	2.6	0.014	0.4	7.25	MW	CG	N
0.120	3.05	70091S	.31	7.9	.092	2.3	7.7	1.3	.12	3.1	.94	4.2	.10	2.6	0.014	0.4	7.25	SST	CG	N
0.120	3.05	70111	.31	7.9	.088	2.2	14	2.4	.14	3.6	2.0	8.8	.13	3.3	0.016	0.4	8.00	MW	CG	N
0.120	3.05	70111S	.31	7.9	.088	2.2	12	2.1	.11	2.8	1.3	5.9	.13	3.3	0.016	0.4	8.00	SST	CG	N
0.120	3.05	70133	.31	7.9	.084	2.1	22	3.8	.13	3.2	2.8	12	.15	3.9	0.018	0.5	8.50	MW	CG	N
0.120	3.05	70133S	.31	7.9	.084	2.1	19	3.3	.10	2.5	1.9	8.3	.15	3.9	0.018	0.5	8.50	SST	CG	N
0.120	3.05	70154	.31	7.9	.080	2.0	35	6.2	.11	2.7	3.8	17	.17	4.3	0.020	0.5	8.50	MW	CG	N
0.120	3.05	70154S	.31	7.9	.080	2.0	31	5.4	.08	2.1	2.5	11	.17	4.3	0.020	0.5	8.50	SST	CG	N
0.120	3.05	70172	.31	7.9	.076	1.9	54	9.5	.09	2.3	5.0	22	.19	4.8	0.022	0.6	8.63	MW	CG	N
0.120	3.05	70172S	.31	7.9	.076	1.9	47	8.2	.07	1.8	3.3	15	.19	4.8	0.022	0.6	8.63	SST	CG	N
0.120	3.05	70191	.31	7.9	.072	1.8	83	15	.08	1.9	6.4	28	.20	5.2	0.024	0.6	8.50	MW	CG	N
0.120	3.05	70191S	.31	7.9	.072	1.8	72	13	.06	1.5	4.2	19	.20	5.2	0.024	0.6	8.50	SST	CG	N
0.120	3.05	70060	.38	9.7	.100	2.5	2.0	.35	.27	7.0	.55	2.4	.07	1.9	0.010	0.3	7.38	MW	CG	N
0.120	3.05	70060S	.38	9.7	.100	2.5	1.7	.31	.20	5.1	.35	1.6	.07	1.9	0.010	0.3	7.38	SST	CG	N
0.120	3.05	70076	.38	9.7	.096	2.4	4.0	.71	.23	5.9	.94	4.2	.10	2.4	0.012	0.3	7.88	MW	CG	N
0.120	3.05	70076S	.38	9.7	.096	2.4	3.5	.61	.17	4.4	.60	2.7	.10	2.4	0.012	0.3	7.88	SST	CG	N
0.120	3.05	70092	.38	9.7	.092	2.3	7.0	1.2	.21	5.4	1.5	6.6	.12	3.1	0.014	0.4	8.63	MW	CG	N
0.120	3.05	70092S	.38	9.7	.092	2.3	6.1	1.1	.16	3.9	.94	4.2	.12	3.1	0.014	0.4	8.63	SST	CG	N
0.120	3.05	70112	.38	9.7	.088	2.2	11	2.0	.18	4.5	2.0	8.8	.15	3.9	0.016	0.4	9.50	MW	CG	N
0.120	3.05	70112S	.38	9.7	.088	2.2	9.7	1.7	.14	3.5	1.3	5.9	.15	3.9	0.016	0.4	9.50	SST	CG	N
0.120	3.05	70134	.38	9.7	.084	2.1	18	3.2	.15	3.9	2.8	12	.18	4.5	0.018	0.5	9.88	MW	CG	N
0.120	3.05	70134S	.38	9.7	.084	2.1	16	2.7	.12	3.0	1.9	8.3	.18	4.5	0.018	0.5	9.88	SST	CG	N
0.120	3.05	70155	.38	9.7	.080	2.0	28	5.0	.13	3.4	3.8	17	.20	5.2	0.020	0.5	10.1	MW	CG	N
0.120	3.05	70155S	.38	9.7	.080	2.0	25	4.3	.10	2.6	2.5	11	.20	5.2	0.020	0.5	10.1	SST	CG	N
0.120	3.05	70173	.38	9.7	.076	1.9	41	7.3	.12	3.0	5.0	22	.23	5.9	0.022	0.6	10.6	MW	CG	N
0.120	3.05	70173S	.38	9.7	.076	1.9	36	6.3	.09	2.3	3.3	15	.23	5.9	0.022	0.6	10.6	SST	CG	N
0.120	3.05	70192	.38	9.7	.072	1.8	65	11	.10	2.5	6.4	28	.25	6.2	0.024	0.6	10.3	MW	CG	N
0.120	3.05	70192S	.38	9.7	.072	1.8	57	9.9	.07	1.9	4.2	19	.25	6.2	0.024	0.6	10.3	SST	CG	N
0.120	3.05	B3-57	.44	11.1	.092	2.3	5.8	1.0	.26	6.5	1.5	6.6	.14	3.6	0.014	0.4	10.0	MW	CG	N
0.120	3.05	70061	.44	11.2	.100	2.5	1.7	.30	.32	8.2	.55	2.4	.08	2.1	0.010	0.3	8.38	MW	CG	N
0.120	3.05	70061S	.44	11.2	.100	2.5	1.5	.26	.24	6.0	.35	1.6	.08	2.1	0.010	0.3	8.38	SST	CG	N
0.120	3.05	70077	.44	11.2	.096	2.4	3.4	.59	.28	7.1	.94	4.2	.11	2.7	0.012	0.3	9.00	MW	CG	N
0.120	3.05	70077S	.44	11.2	.096	2.4	2.9	.51	.20	5.2	.60	2.7	.11	2.7	0.012	0.3	9.00	SST	CG	N
0.120	3.05	70093	.44	11.2	.092	2.3	6.0	1.0	.25	6.3	1.5	6.6	.14	3.5	0.014	0.4	9.75	MW	CG	N
0.120	3.05	70093S	.44	11.2	.092	2.3	5.2	.91	.18	4.6	.94	4.2	.14	3.5	0.014	0.4	9.75	SST	CG	N
0.120	3.05	70113	.44	11.2	.088	2.2	9.4	1.7	.21	5.3	2.0	8.8	.17	4.4	0.016	0.4	10.9	MW	CG	N
0.120	3.05	70113S	.44	11.2	.088	2.2	8.2	1.4	.16	4.1	1.3	5.9	.17	4.4	0.016	0.4	10.9	SST	CG	N
0.120	3.05	70135	.44	11.2	.084	2.1	15	2.7	.18	4.6	2.8	12	.20	5.2	0.018	0.5	11.3	MW	CG	N
0.120	3.05	70135S	.44	11.2	.084	2.1	13	2.3	.14	3.5	1.9	8.3	.20	5.2	0.018	0.5	11.3	SST	CG	N
0.120	3.05	70156	.44	11.2	.080	2.0	24	4.2	.16	4.0	3.8	17	.23	5.9	0.020	0.5	11.6	MW	CG	N
0.120	3.05	70156S	.44	11.2	.080	2.0	21	3.6	.12	3.1	2.5	11	.23	5.9	0.020	0.5	11.6	SST	CG	N
0.120	3.05	70174	.44	11.2	.076	1.9	36	6.3	.14	3.5	5.0	22	.26	6.6	0.022	0.6	11.9	MW	CG	N
0.120	3.05	70174S	.44	11.2	.076	1.9	32	5.5	.10	2.7	3.3	15	.26	6.6	0.022	0.6	11.9	SST	CG	N
0.120	3.05	70193	.44	11.2	.072	1.8	55	9.7	.12	2.9	6.4	28	.28	7.2	0.024	0.6	11.8	MW	CG	N
0.120	3.05	70193S	.44	11.2	.072	1.8	48	8.4	.09	2.2	4.2	19	.28	7.2	0.024	0.6	11.8	SST	CG	N
0.120	3.05	70062	.50	12.7	.100	2.5	1.5	.26	.37	9.4	.55	2.4	.09	2.4	0.010	0.3	9.25	MW	CG	N
0.120	3.05	70062S	.50	12.7	.100	2.5	1.3	.23	.27	6.9	.35	1.6	.09	2.4	0.010	0.3	9.25	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.120	3.05	70078	.50	12.7	.096	2.4	3.0	.53	.31	8.0	.94	4.2	.12	3.0	0.012	0.3	9.88	MW	CG	N
0.120	3.05	70078S	.50	12.7	.096	2.4	2.6	.46	.23	5.8	.60	2.7	.12	3.0	0.012	0.3	9.88	SST	CG	N
0.120	3.05	70094	.50	12.7	.092	2.3	5.2	.91	.28	7.2	1.5	6.6	.15	3.9	0.014	0.4	10.9	MW	CG	N
0.120	3.05	70094S	.50	12.7	.092	2.3	4.5	.80	.21	5.3	.94	4.2	.15	3.9	0.014	0.4	10.9	SST	CG	N
0.120	3.05	70114	.50	12.7	.088	2.2	8.4	1.5	.24	6.0	2.0	8.8	.19	4.9	0.016	0.4	12.0	MW	CG	N
0.120	3.05	70114S	.50	12.7	.088	2.2	7.3	1.3	.18	4.6	1.3	5.9	.19	4.9	0.016	0.4	12.0	SST	CG	N
0.120	3.05	70136	.50	12.7	.084	2.1	13	2.3	.21	5.4	2.8	12	.23	5.9	0.018	0.5	12.9	MW	CG	N
0.120	3.05	70136S	.50	12.7	.084	2.1	11	2.0	.16	4.1	1.9	8.3	.23	5.9	0.018	0.5	12.9	SST	CG	N
0.120	3.05	70157	.50	12.7	.080	2.0	21	3.7	.18	4.6	3.8	17	.26	6.6	0.020	0.5	13.0	MW	CG	N
0.120	3.05	70157S	.50	12.7	.080	2.0	18	3.2	.14	3.5	2.5	11	.26	6.6	0.020	0.5	13.0	SST	CG	N
0.120	3.05	70175	.50	12.7	.076	1.9	31	5.4	.16	4.1	5.0	22	.30	7.5	0.022	0.6	13.5	MW	CG	N
0.120	3.05	70175S	.50	12.7	.076	1.9	27	4.7	.12	3.1	3.3	15	.30	7.5	0.022	0.6	13.5	SST	CG	N
0.120	3.05	70194	.50	12.7	.072	1.8	48	8.4	.13	3.4	6.4	28	.32	8.1	0.024	0.6	13.3	MW	CG	N
0.120	3.05	70194S	.50	12.7	.072	1.8	42	7.3	.10	2.6	4.2	19	.32	8.1	0.024	0.6	13.3	SST	CG	N
0.120	3.05	70063	.56	14.2	.100	2.5	1.4	.24	.39	10	.55	2.4	.10	2.5	0.010	0.3	9.75	MW	CG	N
0.120	3.05	70063S	.56	14.2	.100	2.5	1.2	.21	.29	7.3	.35	1.6	.10	2.5	0.010	0.3	9.75	SST	CG	N
0.120	3.05	70079	.56	14.2	.096	2.4	2.6	.45	.36	9.2	.94	4.2	.13	3.4	0.012	0.3	11.1	MW	CG	N
0.120	3.05	70079S	.56	14.2	.096	2.4	2.3	.39	.27	6.8	.60	2.7	.13	3.4	0.012	0.3	11.1	SST	CG	N
0.120	3.05	70095	.56	14.2	.092	2.3	4.6	.80	.32	8.2	1.5	6.6	.17	4.3	0.014	0.4	12.1	MW	CG	N
0.120	3.05	70095S	.56	14.2	.092	2.3	4.0	.70	.24	6.0	.94	4.2	.17	4.3	0.014	0.4	12.1	SST	CG	N
0.120	3.05	70115	.56	14.2	.088	2.2	7.4	1.3	.27	6.8	2.0	8.8	.21	5.4	0.016	0.4	13.4	MW	CG	N
0.120	3.05	70115S	.56	14.2	.088	2.2	6.4	1.1	.21	5.2	1.3	5.9	.21	5.4	0.016	0.4	13.4	SST	CG	N
0.120	3.05	70137	.56	14.2	.084	2.1	11	2.0	.24	6.2	2.8	12	.26	6.6	0.018	0.5	14.4	MW	CG	N
0.120	3.05	70137S	.56	14.2	.084	2.1	10	1.7	.19	4.7	1.9	8.3	.26	6.6	0.018	0.5	14.4	SST	CG	N
0.120	3.05	70158	.56	14.2	.080	2.0	18	3.2	.21	5.3	3.8	17	.29	7.4	0.020	0.5	14.6	MW	CG	N
0.120	3.05	70158S	.56	14.2	.080	2.0	16	2.8	.16	4.0	2.5	11	.29	7.4	0.020	0.5	14.6	SST	CG	N
0.120	3.05	70176	.56	14.2	.076	1.9	28	4.9	.18	4.5	5.0	22	.33	8.3	0.022	0.6	14.8	MW	CG	N
0.120	3.05	70176S	.56	14.2	.076	1.9	24	4.3	.14	3.4	3.3	15	.33	8.3	0.022	0.6	14.8	SST	CG	N
0.120	3.05	70195	.56	14.2	.072	1.8	42	7.4	.15	3.8	6.4	28	.35	9.0	0.024	0.6	14.8	MW	CG	N
0.120	3.05	70195S	.56	14.2	.072	1.8	37	6.4	.12	2.9	4.2	19	.35	9.0	0.024	0.6	14.8	SST	CG	N
0.120	3.05	70064	.63	16.0	.100	2.5	1.2	.21	.46	12	.55	2.4	.11	2.8	0.010	0.3	11.0	MW	CG	N
0.120	3.05	70064S	.63	16.0	.100	2.5	1.0	.18	.34	8.5	.35	1.6	.11	2.8	0.010	0.3	11.0	SST	CG	N
0.120	3.05	70080	.63	16.0	.096	2.4	2.4	.42	.39	10	.94	4.2	.14	3.6	0.012	0.3	11.9	MW	CG	N
0.120	3.05	70080S	.63	16.0	.096	2.4	2.1	.36	.29	7.3	.60	2.7	.14	3.6	0.012	0.3	11.9	SST	CG	N
0.120	3.05	70096	.63	16.0	.092	2.3	4.1	.72	.36	9.1	1.5	6.6	.19	4.7	0.014	0.4	13.3	MW	CG	N
0.120	3.05	70096S	.63	16.0	.092	2.3	3.6	.63	.26	6.7	.94	4.2	.19	4.7	0.014	0.4	13.3	SST	CG	N
0.120	3.05	70116	.63	16.0	.088	2.2	6.6	1.2	.30	7.7	2.0	8.8	.24	6.0	0.016	0.4	14.8	MW	CG	N
0.120	3.05	70116S	.63	16.0	.088	2.2	5.7	1.0	.23	5.9	1.3	5.9	.24	6.0	0.016	0.4	14.8	SST	CG	N
0.120	3.05	70138	.63	16.0	.084	2.1	11	1.9	.26	6.6	2.8	12	.27	6.9	0.018	0.5	15.1	MW	CG	N
0.120	3.05	70138S	.63	16.0	.084	2.1	9.4	1.6	.20	5.0	1.9	8.3	.27	6.9	0.018	0.5	15.1	SST	CG	N
0.120	3.05	70159	.63	16.0	.080	2.0	16	2.9	.23	5.9	3.8	17	.32	8.2	0.020	0.5	16.1	MW	CG	N
0.120	3.05	70159S	.63	16.0	.080	2.0	14	2.5	.18	4.5	2.5	11	.32	8.2	0.020	0.5	16.1	SST	CG	N
0.120	3.05	70177	.63	16.0	.076	1.9	25	4.4	.20	5.1	5.0	22	.36	9.1	0.022	0.6	16.4	MW	CG	N
0.120	3.05	70177S	.63	16.0	.076	1.9	22	3.8	.15	3.9	3.3	15	.36	9.1	0.022	0.6	16.4	SST	CG	N
0.120	3.05	70196	.63	16.0	.072	1.8	38	6.6	.17	4.3	6.4	28	.39	10.0	0.024	0.6	16.4	MW	CG	N
0.120	3.05	70196S	.63	16.0	.072	1.8	33	5.7	.13	3.3	4.2	19	.39	10.0	0.024	0.6	16.4	SST	CG	N
0.120	3.05	70065	.69	17.5	.100	2.5	1.1	.19	.50	13	.55	2.4	.12	3.0	0.010	0.3	11.9	MW	CG	N
0.120	3.05	70065S	.69	17.5	.100	2.5	.95	.17	.37	9.4	.35	1.6	.12	3.0	0.010	0.3	11.9	SST	CG	N
0.120	3.05	70081	.69	17.5	.096	2.4	2.1	.37	.45	11	.94	4.2	.16	4.0	0.012	0.3	13.3	MW	CG	N
0.120	3.05	70081S	.69	17.5	.096	2.4	1.8	.32	.33	8.3	.60	2.7	.16	4.0	0.012	0.3	13.3	SST	CG	N
0.120	3.05	70097	.69	17.5	.092	2.3	3.7	.66	.40	10	1.5	6.6	.20	5.1	0.014	0.4	14.4	MW	CG	N
0.120	3.05	70097S	.69	17.5	.092	2.3	3.3	.57	.29	7.4	.94	4.2	.20	5.1	0.014	0.4	14.4	SST	CG	N
0.120	3.05	70117	.69	17.5	.088	2.2	5.9	1.0	.34	8.6	2.0	8.8	.26	6.6	0.016	0.4	16.3	MW	CG	N
0.120	3.05	70117S	.69	17.5	.088	2.2	5.1	.90	.26	6.6	1.3	5.9	.26	6.6	0.016	0.4	16.3	SST	CG	N
0.120	3.05	70139	.69	17.5	.084	2.1	9.4	1.6	.30	7.5	2.8	12	.31	7.8	0.018	0.5	17.1	MW	CG	N
0.120	3.05	70139S	.69	17.5	.084	2.1	8.2	1.4	.23	5.8	1.9	8.3	.31	7.8	0.018	0.5	17.1	SST	CG	N
0.120	3.05	70160	.69	17.5	.080	2.0	15	2.6	.26	6.5	3.8	17	.35	9.0	0.020	0.5	17.6	MW	CG	N
0.120	3.05	70160S	.69	17.5	.080	2.0	13	2.2	.20	5.0	2.5	11	.35	9.0	0.020	0.5	17.6	SST	CG	N
0.120	3.05	70178	.69	17.5	.076	1.9	22	3.8	.23	5.9	5.0	22	.41	10.4	0.022	0.6	18.6	MW	CG	N
0.120	3.05	70178S	.69	17.5	.076	1.9	19	3.3	.18	4.5	3.3	15	.41	10.4	0.022	0.6	18.6	SST	CG	N
0.120	3.05	70197	.69	17.5	.072	1.8	34	5.9	.19	4.8	6.4	28	.43	11.0	0.024	0.6	18.0	MW	CG	N
0.120	3.05	70197S	.69	17.5	.072	1.8	29	5.1	.14	3.7	4.2	19	.43	11.0	0.024	0.6	18.0	SST	CG	N
0.120	3.05	70066	.75	19.1	.100	2.5	1.0	.18	.55	14	.55	2.4	.13	3.3	0.010	0.3	12.8	MW	CG	N
0.120	3.05	70066S	.75	19.1	.100	2.5	.87	.15	.40	10	.35	1.6	.13	3.3	0.010	0.3	12.8	SST	CG	N
0.120	3.05	70082	.75	19.1	.096	2.4	2.0	.35	.47	12	.94	4.2	.17	4.2	0.012	0.3	13.9	MW	CG	N
0.120	3.05	70082S	.75	19.1	.096	2.4	1.7	.30	.35	8.8	.60	2.7	.17	4.2	0.012	0.3	13.9	SST	CG	N
0.120	3.05	70098	.75	19.1	.092	2.3	3.4	.60	.44	11	1.5	6.6	.22	5.6	0.014	0.4	15.6	MW	CG	N
0.120	3.05	70098S	.75	19.1	.092	2.3	3.0	.52	.32	8.1	.94	4.2	.22	5.6	0.014	0.4	15.6	SST	CG	N
0.120	3.05	70118	.75	19.1	.088	2.2	5.2	.90	.39	9.8	2.0	8.8	.29	7.4	0.016	0.4	18.3	MW	CG	N
0.120	3.05	70118S	.75	19.1	.088	2.2	4.5	.78	.29	7.5	1.3	5.9	.29	7.4	0.016	0.4	18.3	SST	CG	N
0.120	3.05	70140	.75	19.1	.084	2.1	8.5	1.5	.33	8.4	2.8	12	.34	8.6	0.018	0.5	18.8	MW	CG	N
0.120	3.05	70140S	.75	19.1	.084	2.1	7.4	1.3	.25	6.4	1.9	8.3	.34	8.6	0.018	0.5	18.8	SST	CG	N
0.120	3.05	70161	.75	19.1	.080	2.0	13	2.3	.28	7.2	3.8	17	.39	9.8	0.020	0.5	19.3	MW	CG	N
0.120	3.05	70161S	.75	19.1	.080	2.0	12	2.0	.22	5.5	2.5	11	.39	9.8	0.020	0.5	19.3	SST	CG	N
0.120	3.05	70179	.75	19.1	.076	1.9	20	3.5	.25	6.3	5.0	22	.44	11.0	0.022	0.6	19.8	MW	CG	N
0.120	3.05	70179S	.75	19.1	.076	1.9	18	3.1	.19	4.8	3.3	15	.44	11.0	0.022	0.6	19.8	SST	CG	N
0.120	3.05	70198	.75	19.1	.072	1.8	31	5.4	.21	5.2	6.4	28	.47	11.9	0.024	0.6	19.5	MW	CG	N
0.120	3.05	70198S	.75	19.1	.072	1.8	27	4.7	.16	4.0	4.2	19	.47	11.9	0.024	0.6	19.5	SST	CG	N
0.120	3.05	70067	.81	20.6	.100	2.5	.90	.16	.61	16	.55	2.4	.14	3.6	0.010	0.3	14.0	MW	CG	N
0.120	3.05	70067S	.81	20.6	.100	2.5	.78	.14	.45	11	.35	1.6	.14	3.6	0.010	0.3	14.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.120	3.05	70083	.81	20.6	.096	2.4	1.8	.32	.52	13	.94	4.2	.18	4.6	0.012	0.3	15.1	MW	CG	N
0.120	3.05	70083S	.81	20.6	.096	2.4	1.6	.27	.38	9.7	.60	2.7	.18	4.6	0.012	0.3	15.1	SST	CG	N
0.120	3.05	70099	.81	20.6	.092	2.3	3.1	.54	.48	12	1.5	6.6	.24	6.0	0.014	0.4	17.0	MW	CG	N
0.120	3.05	70099S	.81	20.6	.092	2.3	2.7	.47	.35	8.9	.94	4.2	.24	6.0	0.014	0.4	17.0	SST	CG	N
0.120	3.05	70120	.81	20.6	.088	2.2	5.0	.88	.40	10	2.0	8.8	.30	7.6	0.016	0.4	18.8	MW	CG	N
0.120	3.05	70120S	.81	20.6	.088	2.2	4.3	.76	.30	7.7	1.3	5.9	.30	7.6	0.016	0.4	18.8	SST	CG	N
0.120	3.05	70142	.81	20.6	.084	2.1	7.9	1.4	.35	9.0	2.8	12	.36	9.1	0.018	0.5	20.0	MW	CG	N
0.120	3.05	70142S	.81	20.6	.084	2.1	6.9	1.2	.27	6.9	1.9	8.3	.36	9.1	0.018	0.5	20.0	SST	CG	N
0.120	3.05	70162	.81	20.6	.080	2.0	12	2.2	.31	7.8	3.8	17	.41	10.5	0.020	0.5	20.6	MW	CG	N
0.120	3.05	70162S	.81	20.6	.080	2.0	11	1.9	.23	6.0	2.5	11	.41	10.5	0.020	0.5	20.6	SST	CG	N
0.120	3.05	70180	.81	20.6	.076	1.9	18	3.2	.27	6.9	5.0	22	.47	12.0	0.022	0.6	21.5	MW	CG	N
0.120	3.05	70180S	.81	20.6	.076	1.9	16	2.8	.21	5.3	3.3	15	.47	12.0	0.022	0.6	21.5	SST	CG	N
0.120	3.05	70199	.81	20.6	.072	1.8	28	5.0	.22	5.7	6.4	28	.50	12.8	0.024	0.6	21.0	MW	CG	N
0.120	3.05	70199S	.81	20.6	.072	1.8	25	4.3	.17	4.4	4.2	19	.50	12.8	0.024	0.6	21.0	SST	CG	N
0.120	3.05	70068	.88	22.4	.100	2.5	.90	.16	.61	16	.55	2.4	.14	3.6	0.010	0.3	14.0	MW	CG	N
0.120	3.05	70068S	.88	22.4	.100	2.5	.78	.14	.45	11	.35	1.6	.14	3.6	0.010	0.3	14.0	SST	CG	N
0.120	3.05	70084	.88	22.4	.096	2.4	1.7	.30	.55	14	.94	4.2	.19	4.9	0.012	0.3	15.9	MW	CG	N
0.120	3.05	70084S	.88	22.4	.096	2.4	1.5	.26	.40	10	.60	2.7	.19	4.9	0.012	0.3	15.9	SST	CG	N
0.120	3.05	70100	.88	22.4	.092	2.3	2.9	.51	.51	13	1.5	6.6	.25	6.4	0.014	0.4	18.0	MW	CG	N
0.120	3.05	70100S	.88	22.4	.092	2.3	2.5	.44	.37	9.5	.94	4.2	.25	6.4	0.014	0.4	18.0	SST	CG	N
0.120	3.05	70122	.88	22.4	.088	2.2	4.6	.80	.43	11	2.0	8.8	.32	8.2	0.016	0.4	20.3	MW	CG	N
0.120	3.05	70122S	.88	22.4	.088	2.2	4.0	.70	.33	8.4	1.3	5.9	.32	8.2	0.016	0.4	20.3	SST	CG	N
0.120	3.05	70144	.88	22.4	.084	2.1	7.3	1.3	.38	9.7	2.8	12	.39	9.8	0.018	0.5	21.5	MW	CG	N
0.120	3.05	70144S	.88	22.4	.084	2.1	6.3	1.1	.29	7.4	1.9	8.3	.39	9.8	0.018	0.5	21.5	SST	CG	N
0.120	3.05	70163	.88	22.4	.080	2.0	11	2.0	.34	8.6	3.8	17	.45	11.4	0.020	0.5	22.5	MW	CG	N
0.120	3.05	70163S	.88	22.4	.080	2.0	9.8	1.7	.26	6.6	2.5	11	.45	11.4	0.020	0.5	22.5	SST	CG	N
0.120	3.05	70182	.88	22.4	.076	1.9	17	3.0	.29	7.4	5.0	22	.50	12.8	0.022	0.6	22.9	MW	CG	N
0.120	3.05	70182S	.88	22.4	.076	1.9	15	2.6	.22	5.6	3.3	15	.50	12.8	0.022	0.6	22.9	SST	CG	N
0.120	3.05	70200	.88	22.4	.072	1.8	26	4.5	.24	6.2	6.4	28	.55	13.9	0.024	0.6	22.8	MW	CG	N
0.120	3.05	70200S	.88	22.4	.072	1.8	23	4.0	.19	4.8	4.2	19	.55	13.9	0.024	0.6	22.8	SST	CG	N
0.120	3.05	70101	.91	23.1	.092	2.3	8.6	1.5	.17	4.4	1.5	6.6	.10	2.6	0.014	0.4	7.38	MW	CG	N
0.120	3.05	70101S	.91	23.1	.092	2.3	7.5	1.3	.13	3.2	.94	4.2	.10	2.6	0.014	0.4	7.38	SST	CG	N
0.120	3.05	70069	.94	23.9	.100	2.5	.80	.14	.69	17	.55	2.4	.16	3.9	0.010	0.3	15.5	MW	CG	N
0.120	3.05	70069S	.94	23.9	.100	2.5	.70	.12	.50	13	.35	1.6	.16	3.9	0.010	0.3	15.5	SST	CG	N
0.120	3.05	70085	.94	23.9	.096	2.4	1.5	.26	.63	16	.94	4.2	.21	5.4	0.012	0.3	17.8	MW	CG	N
0.120	3.05	70085S	.94	23.9	.096	2.4	1.3	.23	.46	12	.60	2.7	.21	5.4	0.012	0.3	17.8	SST	CG	N
0.120	3.05	70102	.94	23.9	.092	2.3	2.7	.47	.55	14	1.5	6.6	.27	6.8	0.014	0.4	19.1	MW	CG	N
0.120	3.05	70102S	.94	23.9	.092	2.3	2.4	.41	.40	10	.94	4.2	.27	6.8	0.014	0.4	19.1	SST	CG	N
0.120	3.05	70124	.94	23.9	.088	2.2	4.3	.75	.46	12	2.0	8.8	.34	8.7	0.016	0.4	21.5	MW	CG	N
0.120	3.05	70124S	.94	23.9	.088	2.2	3.7	.65	.35	9.0	1.3	5.9	.34	8.7	0.016	0.4	21.5	SST	CG	N
0.120	3.05	70146	.94	23.9	.084	2.1	6.8	1.2	.41	10	2.8	12	.41	10.5	0.018	0.5	22.9	MW	CG	N
0.120	3.05	70146S	.94	23.9	.084	2.1	5.9	1.0	.31	8.0	1.9	8.3	.41	10.5	0.018	0.5	22.9	SST	CG	N
0.120	3.05	70164	.94	23.9	.080	2.0	11	1.9	.36	9.1	3.8	17	.48	12.1	0.020	0.5	23.8	MW	CG	N
0.120	3.05	70164S	.94	23.9	.080	2.0	9.2	1.6	.27	7.0	2.5	11	.48	12.1	0.020	0.5	23.8	SST	CG	N
0.120	3.05	70183	.94	23.9	.076	1.9	16	2.8	.31	8.0	5.0	22	.54	13.8	0.022	0.6	24.6	MW	CG	N
0.120	3.05	70183S	.94	23.9	.076	1.9	14	2.4	.24	6.1	3.3	15	.54	13.8	0.022	0.6	24.6	SST	CG	N
0.120	3.05	70201	.94	23.9	.072	1.8	24	4.3	.26	6.6	6.4	28	.58	14.7	0.024	0.6	24.1	MW	CG	N
0.120	3.05	70201S	.94	23.9	.072	1.8	21	3.7	.20	5.1	4.2	19	.58	14.7	0.024	0.6	24.1	SST	CG	N
0.120	3.05	70070	1.00	25.4	.100	2.5	.70	.12	.78	20	.55	2.4	.17	4.4	0.010	0.3	17.4	MW	CG	N
0.120	3.05	70070S	1.00	25.4	.100	2.5	.61	.11	.57	15	.35	1.6	.17	4.4	0.010	0.3	17.4	SST	CG	N
0.120	3.05	70086	1.00	25.4	.096	2.4	1.5	.26	.63	16	.94	4.2	.21	5.4	0.012	0.3	17.8	MW	CG	N
0.120	3.05	70086S	1.00	25.4	.096	2.4	1.3	.23	.46	12	.60	2.7	.21	5.4	0.012	0.3	17.8	SST	CG	N
0.120	3.05	70103	1.00	25.4	.092	2.3	2.5	.44	.59	15	1.5	6.6	.29	7.3	0.014	0.4	20.5	MW	CG	N
0.120	3.05	70103S	1.00	25.4	.092	2.3	2.2	.38	.43	11	.94	4.2	.29	7.3	0.014	0.4	20.5	SST	CG	N
0.120	3.05	70125	1.00	25.4	.088	2.2	4.1	.71	.49	12	2.0	8.8	.36	9.2	0.016	0.4	22.6	MW	CG	N
0.120	3.05	70125S	1.00	25.4	.088	2.2	3.5	.62	.37	9.5	1.3	5.9	.36	9.2	0.016	0.4	22.6	SST	CG	N
0.120	3.05	70147	1.00	25.4	.084	2.1	6.4	1.1	.44	11	2.8	12	.44	11.1	0.018	0.5	24.3	MW	CG	N
0.120	3.05	70147S	1.00	25.4	.084	2.1	5.6	.97	.33	8.5	1.9	8.3	.44	11.1	0.018	0.5	24.3	SST	CG	N
0.120	3.05	70165	1.00	25.4	.080	2.0	9.9	1.7	.38	9.7	3.8	17	.51	12.8	0.020	0.5	25.3	MW	CG	N
0.120	3.05	70165S	1.00	25.4	.080	2.0	8.6	1.5	.29	7.4	2.5	11	.51	12.8	0.020	0.5	25.3	SST	CG	N
0.120	3.05	70184	1.00	25.4	.076	1.9	15	2.6	.34	8.5	5.0	22	.58	14.6	0.022	0.6	26.1	MW	CG	N
0.120	3.05	70184S	1.00	25.4	.076	1.9	13	2.3	.26	6.5	3.3	15	.58	14.6	0.022	0.6	26.1	SST	CG	N
0.120	3.05	70202	1.00	25.4	.072	1.8	23	4.0	.28	7.1	6.4	28	.62	15.7	0.024	0.6	25.8	MW	CG	N
0.120	3.05	70202S	1.00	25.4	.072	1.8	20	3.5	.21	5.4	4.2	19	.62	15.7	0.024	0.6	25.8	SST	CG	N
0.120	3.05	70071	1.13	28.7	.100	2.5	.70	.12	.78	20	.55	2.4	.17	4.4	0.010	0.3	17.4	MW	CG	N
0.120	3.05	70071S	1.13	28.7	.100	2.5	.61	.11	.57	15	.35	1.6	.17	4.4	0.010	0.3	17.4	SST	CG	N
0.120	3.05	70087	1.13	28.7	.096	2.4	1.3	.23	.73	18	.94	4.2	.24	6.2	0.012	0.3	20.3	MW	CG	N
0.120	3.05	70087S	1.13	28.7	.096	2.4	1.1	.20	.53	14	.60	2.7	.24	6.2	0.012	0.3	20.3	SST	CG	N
0.120	3.05	70104	1.13	28.7	.092	2.3	2.2	.39	.67	17	1.5	6.6	.32	8.1	0.014	0.4	22.9	MW	CG	N
0.120	3.05	70104S	1.13	28.7	.092	2.3	1.9	.34	.49	12	.94	4.2	.32	8.1	0.014	0.4	22.9	SST	CG	N
0.120	3.05	70126	1.13	28.7	.088	2.2	3.5	.62	.56	14	2.0	8.8	.41	10.4	0.016	0.4	25.6	MW	CG	N
0.120	3.05	70126S	1.13	28.7	.088	2.2	3.1	.54	.43	11	1.3	5.9	.41	10.4	0.016	0.4	25.6	SST	CG	N
0.120	3.05	70148	1.13	28.7	.084	2.1	5.7	.99	.49	13	2.8	12	.49	12.4	0.018	0.5	27.1	MW	CG	N
0.120	3.05	70148S	1.13	28.7	.084	2.1	4.9	.86	.38	9.6	1.9	8.3	.49	12.4	0.018	0.5	27.1	SST	CG	N
0.120	3.05	70166	1.13	28.7	.080	2.0	8.8	1.5	.43	11	3.8	17	.56	14.2	0.020	0.5	28.0	MW	CG	N
0.120	3.05	70166S	1.13	28.7	.080	2.0	7.7	1.3	.33	8.3	2.5	11	.56	14.2	0.020	0.5	28.0	SST	CG	N
0.120	3.05	70185	1.13	28.7	.076	1.9	13	2.3	.37	9.4	5.0	22	.63	16.1	0.022	0.6	28.8	MW	CG	N
0.120	3.05	70185S	1.13	28.7	.076	1.9	12	2.0	.28	7.2	3.3	15	.63	16.1	0.022	0.6	28.8	SST	CG	N
0.120	3.05	70203	1.13	28.7	.072	1.8	20	3.5	.32	8.1	6.4	28	.69	17.6	0.024	0.6	28.9	MW	CG	N
0.120	3.05	70203S	1.13	28.7	.072	1.8	17	3.1	.24	6.2	4.2	19	.69	17.6	0.024	0.6	28.9	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.120	3.05	70072	1.25	31.8	.100	2.5	.60	.11	.92	23	.55	2.4	.20	5.1	0.010	0.3	20.0	MW	CG	N
0.120	3.05	70072S	1.25	31.8	.100	2.5	.52	.09	.67	17	.35	1.6	.20	5.1	0.010	0.3	20.0	SST	CG	N
0.120	3.05	70088	1.25	31.8	.096	2.4	1.2	.21	.79	20	.94	4.2	.26	6.6	0.012	0.3	21.8	MW	CG	N
0.120	3.05	70088S	1.25	31.8	.096	2.4	1.0	.18	.58	15	.60	2.7	.26	6.6	0.012	0.3	21.8	SST	CG	N
0.120	3.05	70105	1.25	31.8	.092	2.3	2.0	.35	.74	19	1.5	6.6	.35	8.9	0.014	0.4	25.1	MW	CG	N
0.120	3.05	70105S	1.25	31.8	.092	2.3	1.7	.31	.54	14	.94	4.2	.35	8.9	0.014	0.4	25.1	SST	CG	N
0.120	3.05	70127	1.25	31.8	.088	2.2	3.2	.56	.62	16	2.0	8.8	.45	11.4	0.016	0.4	28.1	MW	CG	N
0.120	3.05	70127S	1.25	31.8	.088	2.2	2.8	.49	.47	12	1.3	5.9	.45	11.4	0.016	0.4	28.1	SST	CG	N
0.120	3.05	70149	1.25	31.8	.084	2.1	5.1	.89	.55	14	2.8	12	.54	13.8	0.018	0.5	30.1	MW	CG	N
0.120	3.05	70149S	1.25	31.8	.084	2.1	4.4	.77	.42	11	1.9	8.3	.54	13.8	0.018	0.5	30.1	SST	CG	N
0.120	3.05	70167	1.25	31.8	.080	2.0	7.9	1.4	.48	12	3.8	17	.62	15.8	0.020	0.5	31.1	MW	CG	N
0.120	3.05	70167S	1.25	31.8	.080	2.0	6.9	1.2	.37	9.3	2.5	11	.62	15.8	0.020	0.5	31.1	SST	CG	N
0.120	3.05	70186	1.25	31.8	.076	1.9	12	2.1	.42	11	5.0	22	.72	18.2	0.022	0.6	32.5	MW	CG	N
0.120	3.05	70186S	1.25	31.8	.076	1.9	10	1.8	.32	8.2	3.3	15	.72	18.2	0.022	0.6	32.5	SST	CG	N
0.120	3.05	70204	1.25	31.8	.072	1.8	18	3.1	.35	9.0	6.4	28	.77	19.5	0.024	0.6	32.0	MW	CG	N
0.120	3.05	70204S	1.25	31.8	.072	1.8	16	2.7	.27	6.9	4.2	19	.77	19.5	0.024	0.6	32.0	SST	CG	N
0.120	3.05	70107	1.38	35.1	.092	2.3	1.8	.32	.82	21	1.5	6.6	.39	9.9	0.014	0.4	27.8	MW	CG	N
0.120	3.05	70107S	1.38	35.1	.092	2.3	1.6	.27	.60	15	.94	4.2	.39	9.9	0.014	0.4	27.8	SST	CG	N
0.120	3.05	70129	1.38	35.1	.088	2.2	2.9	.51	.68	17	2.0	8.8	.49	12.5	0.016	0.4	30.9	MW	CG	N
0.120	3.05	70129S	1.38	35.1	.088	2.2	2.5	.44	.52	13	1.3	5.9	.49	12.5	0.016	0.4	30.9	SST	CG	N
0.120	3.05	70151	1.38	35.1	.084	2.1	4.6	.81	.61	15	2.8	12	.59	15.0	0.018	0.5	32.9	MW	CG	N
0.120	3.05	70151S	1.38	35.1	.084	2.1	4.0	.70	.46	12	1.9	8.3	.59	15.0	0.018	0.5	32.9	SST	CG	N
0.120	3.05	70169	1.38	35.1	.080	2.0	7.0	1.2	.54	14	3.8	17	.70	17.7	0.020	0.5	34.9	MW	CG	N
0.120	3.05	70169S	1.38	35.1	.080	2.0	6.1	1.1	.41	11	2.5	11	.70	17.7	0.020	0.5	34.9	SST	CG	N
0.120	3.05	70188	1.38	35.1	.076	1.9	11	1.9	.47	12	5.0	22	.78	19.8	0.022	0.6	35.5	MW	CG	N
0.120	3.05	70188S	1.38	35.1	.076	1.9	9.3	1.6	.36	9.0	3.3	15	.78	19.8	0.022	0.6	35.5	SST	CG	N
0.120	3.05	70073	1.50	38.1	.100	2.5	.50	.09	1.1	28	.55	2.4	.24	6.0	0.010	0.3	23.6	MW	CG	N
0.120	3.05	70073S	1.50	38.1	.100	2.5	.43	.08	.81	20	.35	1.6	.24	6.0	0.010	0.3	23.6	SST	CG	N
0.120	3.05	70089	1.50	38.1	.096	2.4	1.0	.18	.94	24	.94	4.2	.31	7.8	0.012	0.3	25.6	MW	CG	N
0.120	3.05	70089S	1.50	38.1	.096	2.4	.87	.15	.69	17	.60	2.7	.31	7.8	0.012	0.3	25.6	SST	CG	N
0.120	3.05	70108	1.50	38.1	.092	2.3	1.7	.30	.85	22	1.5	6.6	.40	10.2	0.014	0.4	28.8	MW	CG	N
0.120	3.05	70108S	1.50	38.1	.092	2.3	1.5	.26	.63	16	.94	4.2	.40	10.2	0.014	0.4	28.8	SST	CG	N
0.120	3.05	70130	1.50	38.1	.088	2.2	2.7	.48	.72	18	2.0	8.8	.52	13.2	0.016	0.4	32.5	MW	CG	N
0.120	3.05	70130S	1.50	38.1	.088	2.2	2.4	.42	.55	14	1.3	5.9	.52	13.2	0.016	0.4	32.5	SST	CG	N
0.120	3.05	70152	1.50	38.1	.084	2.1	4.2	.73	.67	17	2.8	12	.65	16.6	0.018	0.5	36.3	MW	CG	N
0.120	3.05	70152S	1.50	38.1	.084	2.1	3.6	.63	.51	13	1.9	8.3	.65	16.6	0.018	0.5	36.3	SST	CG	N
0.120	3.05	70170	1.50	38.1	.080	2.0	6.5	1.1	.59	15	3.8	17	.75	19.1	0.020	0.5	37.6	MW	CG	N
0.120	3.05	70170S	1.50	38.1	.080	2.0	5.6	.98	.45	11	2.5	11	.75	19.1	0.020	0.5	37.6	SST	CG	N
0.120	3.05	70189	1.50	38.1	.076	1.9	9.7	1.7	.51	13	5.0	22	.86	21.7	0.022	0.6	38.9	MW	CG	N
0.120	3.05	70189S	1.50	38.1	.076	1.9	8.4	1.5	.39	10	3.3	15	.86	21.7	0.022	0.6	38.9	SST	CG	N
0.120	3.05	70205	1.50	38.1	.072	1.8	15	2.6	.43	11	6.4	28	.92	23.2	0.024	0.6	38.1	MW	CG	N
0.120	3.05	70205S	1.50	38.1	.072	1.8	13	2.3	.33	8.3	4.2	19	.92	23.2	0.024	0.6	38.1	SST	CG	N
0.125	3.18	DD-65	.13	3.2	.105	2.7	3.2	.55	.08	1.9	.24	1.1	.05	1.3	0.010	0.3	5.00	MW	CG	GI
0.125	3.18	10195	.13	3.2	.095	2.4	36	6.4	.04	1.1	1.6	7.0	.07	1.7	0.015	0.4	3.50	MW	C	N
0.125	3.18	LL-57	.16	4.0	.085	2.2	99	17	.04	.93	3.7	16	.10	2.5	0.020	0.5	4.00	MW	C	N
0.125	3.18	DD-57	.19	4.8	.095	2.4	11	1.9	.08	1.9	.81	3.6	.11	2.9	0.015	0.4	6.50	SST	C	N
0.125	3.18	B14-3	.19	4.8	.087	2.2	52	9.2	.06	1.5	3.2	14	.11	2.9	0.019	0.5	5.00	MW	C	N
0.125	3.18	B-83	.19	4.8	.085	2.2	66	12	.06	1.4	3.7	16	.12	3.0	0.020	0.5	5.00	MW	C	N
0.125	3.18	N-4	.22	5.6	.111	2.8	.35	.06	.16	4.0	.05	.24	.06	1.6	0.007	0.2	8.00	MW	C	N
0.125	3.18	S-1576	.22	5.6	.109	2.8	.65	.11	.16	3.9	.10	.45	.06	1.6	0.008	0.2	7.00	SST	C	N
0.125	3.18	B15-7	.22	5.6	.104	2.6	1.9	.34	.12	3.2	.24	1.1	.09	2.4	0.011	0.3	8.00	MW	C	N
0.125	3.18	DD-1	.22	5.6	.097	2.5	6.5	1.1	.10	2.5	.65	2.9	.12	3.0	0.014	0.4	7.50	SST	C	N
0.125	3.18	MM-80	.22	5.6	.097	2.5	10	1.8	.09	2.3	.91	4.0	.09	2.3	0.014	0.4	5.50	SST	C	N
0.125	3.18	B7-3	.22	5.6	.097	2.5	13	2.4	.11	2.7	1.4	6.3	.08	2.1	0.014	0.4	5.00	MW	C	N
0.125	3.18	A10-4	.22	5.6	.075	1.9	112	20	.04	1.1	4.9	22	.18	4.4	0.025	0.6	7.00	MW	CG	N
0.125	3.18	A12-9	.25	6.4	.107	2.7	1.0	.18	.17	4.3	.17	.76	.08	2.1	0.009	0.2	8.00	MW	C	Z
0.125	3.18	BB-49	.25	6.4	.105	2.7	1.2	.21	.14	3.6	.17	.74	.11	2.8	0.010	0.3	10.0	MW	C	N
0.125	3.18	B1-25	.25	6.4	.095	2.4	12	2.1	.13	3.3	1.6	7.0	.10	2.5	0.015	0.4	6.50	MW	CG	GI
0.125	3.18	B1-8	.25	6.4	.093	2.4	16	2.8	.12	3.0	1.9	8.5	.10	2.6	0.016	0.4	6.50	MW	CG	N
0.125	3.18	FF-43	.25	6.4	.093	2.4	12	2.1	.11	2.8	1.3	5.7	.14	3.5	0.016	0.4	7.50	SST	C	N
0.125	3.18	S-834	.25	6.4	.093	2.4	10	1.8	.10	2.6	1.1	4.8	.15	3.7	0.016	0.4	8.13	SST	C	N
0.125	3.18	B5-53	.25	6.4	.091	2.3	22	3.9	.10	2.6	2.3	10	.12	3.1	0.017	0.4	6.25	MW	C	N
0.125	3.18	2628	.25	6.4	.089	2.3	23	4.1	.10	2.6	2.4	11	.15	3.8	0.018	0.5	7.50	MW	C	Z
0.125	3.18	B1-20	.25	6.4	.089	2.3	21	3.6	.09	2.2	1.8	8.0	.13	3.3	0.018	0.5	7.25	SST	CG	N
0.125	3.18	M-14	.25	6.4	.087	2.2	23	4.0	.09	2.3	2.1	9.3	.15	3.9	0.019	0.5	8.00	SST	CG	N
0.125	3.18	B5-3	.25	6.4	.087	2.2	30	5.2	.11	2.7	3.2	14	.14	3.5	0.019	0.5	7.25	MW	CG	N
0.125	3.18	10814	.25	6.4	.085	2.2	39	6.9	.06	1.6	2.4	11	.15	3.8	0.020	0.5	6.50	SST	C	N
0.125	3.18	J-68	.25	6.4	.085	2.2	31	5.5	.10	2.5	3.1	14	.15	3.9	0.020	0.5	7.00	MW	C	Z
0.125	3.18	KK-27	.25	6.4	.079	2.0	76	13	.07	1.8	5.5	24	.16	4.1	0.023	0.6	7.00	MW	CG	N
0.125	3.18	A10-9	.25	6.4	.075	1.9	187	33	.03	.88	6.5	29	.15	3.8	0.025	0.6	5.00	MW	C	BO
0.125	3.18	10775	.28	7.1	.105	2.7	1.5	.27	.21	5.2	.31	1.4	.08	1.9	0.010	0.3	7.50	SST	CG	N
0.125	3.18	A12-38	.28	7.1	.101	2.6	3.3	.57	.18	4.5	.58	2.6	.09	2.3	0.012	0.3	7.50	SST	CG	N
0.125	3.18	B-7	.28	7.1	.097	2.5	10	1.8	.14	3.6	1.4	6.3	.10	2.5	0.014	0.4	6.00	MW	C	N
0.125	3.18	BB-15	.28	7.1	.085	2.2	40	7.0	.09	2.3	3.7	16	.14	3.6	0.020	0.5	7.00	MW	CG	Z
0.125	3.18	B2-6	.30	7.5	.093	2.4	12	2.0	.15	3.8	1.7	7.7	.15	3.8	0.016	0.4	8.25	MW	C	N
0.125	3.18	B-3	.31	7.9	.101	2.6	2.3	.40	.17	4.3	.39	1.7	.14	3.7	0.012	0.3	11.0	MW	C	Z
0.125	3.18	CC-42	.31	7.9	.101	2.6	2.4	.42	.20	5.0	.47	2.1	.11	2.9	0.012	0.3	9.50	SST	CG	N
0.125	3.18	EE-33	.31	7.9	.097	2.5	3.7	.65	.14	3.6	1.1	4.9	.13	3.4	0.014	0.4	8.50	BC	C	N
0.125	3.18	M-37	.31	7.9	.095	2.4	8.4	1.5	.17	4.3	1.4	6.3	.14	3.6	0.015	0.4	8.50	MW	C	Z
0.125	3.18	B2-20	.31	7.9	.095	2.4	9.5	1.7	.11	2.8	1.1	4.7	.11	2.7	0.015	0.4	7.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.125	3.18	B1-14	.31	7.9	.091	2.3	16	2.8	.14	3.6	2.3	10	.14	3.5	0.017	0.4	8.00	MW	CG	GI
0.125	3.18	G-66	.31	7.9	.091	2.3	14	2.5	.15	3.7	2.1	9.2	.17	4.2	0.017	0.4	8.75	MW	C	Z
0.125	3.18	U-79	.31	7.9	.091	2.3	11	1.9	.11	2.7	1.1	5.1	.20	5.2	0.017	0.4	11.0	MW	C	N
0.125	3.18	A13-23	.31	7.9	.089	2.3	16	2.8	.11	2.8	1.8	8.0	.18	4.5	0.018	0.5	8.75	SST	C	N
0.125	3.18	L-91	.31	7.9	.083	2.1	41	7.3	.10	2.6	4.2	19	.19	4.8	0.021	0.5	8.00	MW	C	GI
0.125	3.18	L-1	.31	7.9	.081	2.1	49	8.6	.10	2.5	4.8	21	.20	5.2	0.022	0.6	8.25	MW	C	N
0.125	3.18	TT-3	.31	7.9	.081	2.1	45	7.8	.07	1.8	3.2	14	.18	4.5	0.022	0.6	8.00	SST	CG	N
0.125	3.18	NN-60	.31	7.9	.077	2.0	93	16	.07	1.7	6.2	27	.17	4.3	0.024	0.6	7.00	MW	C	N
0.125	3.18	KK-18	.31	7.9	.075	1.9	81	14	.05	1.4	4.4	19	.23	5.7	0.025	0.6	8.00	SST	C	N
0.125	3.18	3196	.34	8.7	.101	2.6	3.9	.68	.23	5.9	.91	4.0	.10	2.5	0.012	0.3	7.33	MW	C	Z
0.125	3.18	FF-86	.34	8.7	.101	2.6	2.8	.48	.22	5.5	.60	2.7	.13	3.2	0.012	0.3	9.50	MW	C	N
0.125	3.18	V-69	.34	8.7	.095	2.4	5.5	.96	.16	4.1	.89	4.0	.18	4.6	0.015	0.4	12.0	MW	CG	N
0.125	3.18	N-16	.34	8.7	.093	2.4	12	2.1	.16	4.0	1.9	8.5	.14	3.7	0.016	0.4	8.00	MW	C	N
0.125	3.18	B6-5	.34	8.7	.085	2.2	22	3.9	.11	2.8	2.4	11	.20	5.1	0.020	0.5	10.0	SST	CG	N
0.125	3.18	G-18	.34	8.7	.083	2.1	45	7.9	.09	2.4	4.2	19	.18	4.5	0.021	0.5	7.50	MW	C	N
0.125	3.18	A13-21	.34	8.7	.079	2.0	50	8.7	.07	1.8	3.6	16	.22	5.7	0.023	0.6	8.75	SST	C	N
0.125	3.18	B-57	.34	8.7	.073	1.9	113	20	.06	1.6	7.3	32	.23	5.9	0.026	0.7	8.00	MW	C	N
0.125	3.18	L-11	.38	9.5	.099	2.5	2.7	.47	.21	5.4	.57	2.5	.16	4.1	0.013	0.3	11.5	SST	C	N
0.125	3.18	II-94	.38	9.5	.095	2.4	6.8	1.2	.15	3.9	1.1	4.7	.15	3.8	0.015	0.4	10.0	SST	C	N
0.125	3.18	U-9	.38	9.5	.095	2.4	6.8	1.2	.23	5.7	1.5	6.8	.15	3.8	0.015	0.4	10.0	MW	CG	N
0.125	3.18	O-15	.38	9.5	.093	2.4	10	1.8	.18	4.7	1.9	8.5	.16	4.1	0.016	0.4	9.00	MW	C	N
0.125	3.18	A11-11	.38	9.5	.091	2.3	11	1.9	.14	3.6	1.5	6.7	.17	4.3	0.017	0.4	10.0	SST	CG	N
0.125	3.18	O-7	.38	9.5	.091	2.3	13	2.2	.18	4.6	2.3	10	.18	4.5	0.017	0.4	9.50	MW	C	N
0.125	3.18	B1-27	.38	9.5	.089	2.3	13	2.3	.14	3.4	1.8	8.0	.18	4.7	0.018	0.5	10.3	SST	CG	N
0.125	3.18	G-15	.38	9.5	.089	2.3	14	2.4	.16	4.0	2.2	9.7	.22	5.5	0.018	0.5	11.0	MW	C	Z
0.125	3.18	H-98	.38	9.5	.085	2.2	22	3.8	.11	2.9	2.4	11	.22	5.6	0.020	0.5	10.0	SST	C	N
0.125	3.18	Q-93	.38	9.5	.085	2.2	17	2.9	.08	1.9	1.2	5.5	.30	7.6	0.020	0.5	14.0	MW	C	GI
0.125	3.18	UU-14	.38	9.5	.085	2.2	33	5.8	.11	2.8	3.7	16	.18	4.6	0.020	0.5	8.00	MW	C	Z
0.125	3.18	DD-69	.38	9.5	.081	2.1	34	6.0	.13	3.4	4.6	20	.24	6.1	0.022	0.6	11.0	MW	CG	N
0.125	3.18	LL-5	.38	9.5	.081	2.1	38	6.7	.08	2.1	3.2	14	.22	5.6	0.022	0.6	9.00	SST	C	N
0.125	3.18	S-700	.38	9.5	.081	2.1	33	5.9	.10	2.4	3.2	14	.24	6.1	0.022	0.6	10.0	SST	C	N
0.125	3.18	A12-7	.38	9.5	.079	2.0	54	9.5	.10	2.6	5.5	24	.23	5.8	0.023	0.6	9.00	MW	C	N
0.125	3.18	10172	.38	9.5	.077	2.0	56	9.8	.11	2.8	6.2	27	.25	6.2	0.024	0.6	10.3	MW	CG	N
0.125	3.18	G-5	.38	9.5	.075	1.9	102	18	.06	1.6	6.5	29	.21	5.4	0.025	0.6	7.50	MW	C	BO
0.125	3.18	NN-85	.38	9.5	.075	1.9	70	12	.06	1.6	4.4	19	.23	5.7	0.025	0.6	9.00	SST	CG	N
0.125	3.18	N-14	.41	10.3	.095	2.4	7.8	1.4	.20	5.1	1.6	7.0	.15	3.8	0.015	0.4	9.00	MW	C	N
0.125	3.18	M-113	.41	10.3	.091	2.3	11	1.9	.20	5.1	2.1	9.5	.20	5.2	0.017	0.4	11.0	MW	C	N
0.125	3.18	B-60	.41	10.3	.089	2.3	14	2.4	.19	4.8	2.6	12	.22	5.5	0.018	0.5	11.0	MW	C	Z
0.125	3.18	B-82	.41	10.3	.089	2.3	14	2.4	.20	5.0	2.7	12	.20	5.0	0.018	0.5	11.0	MW	CG	GI
0.125	3.18	F-74	.41	10.3	.089	2.3	15	2.7	.17	4.4	2.7	12	.20	5.0	0.018	0.5	10.0	MW	C	Z
0.125	3.18	NN-13	.41	10.3	.081	2.1	33	5.9	.10	2.4	3.2	14	.22	5.6	0.022	0.6	10.0	SST	CG	N
0.125	3.18	GG-51	.44	11.1	.095	2.4	4.2	.74	.20	5.0	.83	3.7	.24	6.1	0.015	0.4	15.0	MW	C	GI
0.125	3.18	F-88	.44	11.1	.089	2.3	13	2.2	.21	5.3	2.6	12	.23	5.8	0.018	0.5	11.8	MW	C	Z
0.125	3.18	V-43	.44	11.1	.087	2.2	15	2.7	.14	3.5	2.1	9.3	.23	5.8	0.019	0.5	11.0	SST	C	N
0.125	3.18	S-846	.44	11.1	.081	2.1	27	4.7	.12	3.0	3.2	14	.29	7.3	0.022	0.6	12.0	SST	C	N
0.125	3.18	B12-9	.44	11.1	.079	2.0	37	6.5	.15	3.7	5.5	24	.28	7.2	0.023	0.6	12.3	MW	CG	BO
0.125	3.18	W-79	.44	11.1	.075	1.9	62	11	.07	1.8	4.4	19	.25	6.4	0.025	0.6	10.0	SST	CG	N
0.125	3.18	10832	.47	11.9	.105	2.7	1.3	.22	.36	9.2	.46	2.0	.11	2.7	0.010	0.3	9.50	MW	C	N
0.125	3.18	2765	.47	11.9	.093	2.4	7.7	1.3	.25	6.3	1.9	8.5	.20	5.1	0.016	0.4	11.5	MW	C	Z
0.125	3.18	A10-21	.47	11.9	.083	2.1	23	4.1	.12	3.1	2.8	12	.24	6.1	0.021	0.5	11.5	SST	CG	N
0.125	3.18	A13-12	.47	11.9	.077	2.0	47	8.3	.13	3.3	6.2	27	.31	7.8	0.024	0.6	11.8	MW	C	N
0.125	3.18	11400	.47	11.9	.075	1.9	64	11	.07	1.7	4.4	19	.24	6.2	0.025	0.6	9.75	SST	CG	N
0.125	3.18	DD-3	.50	12.7	.109	2.8	.19	.03	.34	8.6	.06	.28	.16	4.1	0.008	0.2	19.0	SST	C	N
0.125	3.18	B5-67	.50	12.7	.107	2.7	.83	.15	.41	10	.34	1.5	.09	2.3	0.009	0.2	9.25	MW	C	N
0.125	3.18	10068	.50	12.7	.105	2.7	.50	.09	.28	7.1	.14	.62	.22	5.6	0.010	0.3	21.0	MW	C	Z
0.125	3.18	Q-81	.50	12.7	.105	2.7	.33	.06	.18	4.6	.06	.26	.32	8.1	0.010	0.3	31.0	MW	C	N
0.125	3.18	11123	.50	12.7	.105	2.7	1.1	.19	.39	9.8	.43	1.9	.12	2.9	0.010	0.3	10.5	MW	C	N
0.125	3.18	LL-23	.50	12.7	.105	2.7	1.2	.21	.28	7.1	.34	1.5	.10	2.5	0.010	0.3	9.00	SST	C	N
0.125	3.18	B-407	.50	12.7	.101	2.6	2.2	.39	.35	9.0	.79	3.5	.15	3.7	0.012	0.3	11.3	MW	C	Z
0.125	3.18	B-408	.50	12.7	.099	2.5	3.0	.52	.33	8.5	1.0	4.5	.17	4.2	0.013	0.3	11.8	MW	C	Z
0.125	3.18	U-85	.50	12.7	.097	2.5	3.7	.64	.30	7.7	1.1	5.0	.20	5.0	0.014	0.4	13.0	MW	C	N
0.125	3.18	S-202	.50	12.7	.095	2.4	7.3	1.3	.14	3.7	1.1	4.7	.14	3.6	0.015	0.4	8.50	SST	C	N
0.125	3.18	3117	.50	12.7	.093	2.4	7.8	1.4	.25	6.2	1.9	8.5	.20	5.0	0.016	0.4	11.3	MW	C	GI
0.125	3.18	A14-11	.50	12.7	.093	2.4	6.1	1.1	.21	5.3	1.3	5.7	.20	5.1	0.016	0.4	12.5	SST	CG	N
0.125	3.18	B-409	.50	12.7	.093	2.4	7.1	1.2	.27	6.8	1.9	8.5	.21	5.4	0.016	0.4	12.3	MW	C	Z
0.125	3.18	G-90	.50	12.7	.093	2.4	7.3	1.3	.26	6.7	1.9	8.5	.21	5.3	0.016	0.4	12.0	MW	C	N
0.125	3.18	S-320	.50	12.7	.093	2.4	6.7	1.2	.19	4.8	1.3	5.7	.18	4.7	0.016	0.4	11.5	SST	CG	N
0.125	3.18	F-100	.50	12.7	.093	2.4	6.9	1.2	.28	7.0	1.9	8.5	.20	5.1	0.016	0.4	12.5	MW	CG	N
0.125	3.18	A14-21	.50	12.7	.089	2.3	9.5	1.7	.19	4.8	1.8	8.0	.24	6.2	0.018	0.5	13.5	SST	CG	N
0.125	3.18	B-410	.50	12.7	.089	2.3	11	1.9	.24	6.1	2.6	11	.26	6.6	0.018	0.5	13.5	MW	C	Z
0.125	3.18	G-35	.50	12.7	.089	2.3	14	2.5	.19	4.9	2.7	12	.21	5.4	0.018	0.5	10.8	MW	C	N
0.125	3.18	B-411	.50	12.7	.085	2.2	18	3.2	.20	5.1	3.7	16	.28	7.1	0.020	0.5	13.0	MW	C	Z
0.125	3.18	B-412	.50	12.7	.081	2.1	27	4.8	.18	4.5	4.8	21	.31	8.0	0.022	0.6	13.3	MW	C	Z
0.125	3.18	S-701	.50	12.7	.081	2.1	24	4.2	.13	3.4	3.2	14	.31	8.0	0.022	0.6	13.3	SST	C	N
0.125	3.18	B5-7	.50	12.7	.081	2.1	26	4.5	.19	4.8	4.8	21	.31	7.8	0.022	0.6	14.0	MW	CG	N
0.125	3.18	10904	.53	13.5	.107	2.7	.35	.06	.35	8.8	.12	.53	.19	4.7	0.009	0.2	19.5	MW	C	Z
0.125	3.18	11117	.53	13.5	.105	2.7	1.1	.19	.42	11	.46	2.1	.12	2.9	0.010	0.3	10.5	MW	C	N
0.125	3.18	A10-45	.53	13.5	.095	2.4	4.2	.74	.29	7.4	1.2	5.4	.24	6.1	0.015	0.4	15.0	MW	C	N
0.125	3.18	A13-10	.53	13.5	.089	2.3	9.5	1.7	.26	6.6	2.5	11	.27	6.9	0.018	0.5	15.0	MW	CG	N
0.125	3.18	F-67	.53	13.5	.089	2.3	11	2.0	.24	6.1	2.7	12	.25	6.4	0.018	0.5	13.0	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.125	3.18	A-21	.53	13.5	.085	2.2	18	3.1	.14	3.5	2.4	11	.26	6.6	0.020	0.5	12.0	SST	C	N
0.125	3.18	B10-25	.56	14.3	.097	2.5	3.4	.60	.36	9.0	1.2	5.4	.21	5.2	0.014	0.4	13.8	MW	C	N
0.125	3.18	J-69	.56	14.3	.091	2.3	7.3	1.3	.29	7.4	2.1	9.5	.27	6.9	0.017	0.4	15.0	MW	C	Z
0.125	3.18	L-79	.56	14.3	.083	2.1	15	2.7	.18	4.5	2.7	12	.38	9.7	0.021	0.5	18.3	MW	CG	Z
0.125	3.18	S-1012	.59	15.1	.099	2.5	2.3	.40	.32	8.2	.73	3.2	.19	4.7	0.013	0.3	13.3	SST	C	N
0.125	3.18	S-937	.59	15.1	.089	2.3	7.7	1.4	.23	5.9	1.8	8.0	.30	7.7	0.018	0.5	15.9	SST	C	N
0.125	3.18	G-27	.59	15.1	.063	1.6	133	23	.09	2.2	12	52	.47	11.8	0.031	0.8	14.0	MW	C	N
0.125	3.18	A-1	.63	15.9	.105	2.7	.95	.17	.50	13	.47	2.1	.13	3.3	0.010	0.3	12.0	MW	C	N
0.125	3.18	390	.63	15.9	.103	2.6	1.6	.28	.44	11	.70	3.1	.13	3.4	0.011	0.3	11.0	MW	C	Z
0.125	3.18	A-43	.63	15.9	.103	2.6	1.2	.22	.47	12	.58	2.6	.16	4.1	0.011	0.3	13.5	MW	C	BO
0.125	3.18	N-22	.63	15.9	.103	2.6	1.3	.23	.47	12	.61	2.7	.15	3.9	0.011	0.3	13.0	MW	C	N
0.125	3.18	S-1445	.63	15.9	.099	2.5	1.3	.23	.35	8.8	.45	2.0	.28	7.1	0.013	0.3	21.5	SST	CG	N
0.125	3.18	J-89	.63	15.9	.097	2.5	3.3	.58	.41	10	1.4	6.0	.21	5.4	0.014	0.4	14.3	MW	C	N
0.125	3.18	B14-9	.63	15.9	.097	2.5	3.1	.54	.40	10	1.2	5.5	.22	5.7	0.014	0.4	15.0	MW	C	N
0.125	3.18	EE-61	.63	15.9	.095	2.4	4.2	.74	.38	9.6	1.6	7.0	.24	6.1	0.015	0.4	15.0	MW	C	N
0.125	3.18	S-1543	.63	15.9	.095	2.4	4.4	.77	.24	6.1	1.1	4.7	.21	5.3	0.015	0.4	13.0	SST	C	N
0.125	3.18	A10-20	.63	15.9	.089	2.3	11	2.0	.24	6.0	2.7	12	.25	6.3	0.018	0.5	12.8	MW	C	N
0.125	3.18	F-5	.63	15.9	.089	2.3	8.8	1.5	.31	7.8	2.7	12	.31	7.8	0.018	0.5	16.0	MW	C	Z
0.125	3.18	B1-19	.63	15.9	.079	2.0	25	4.4	.22	5.5	5.5	24	.39	9.9	0.023	0.6	17.0	MW	CG	GI
0.125	3.18	G-2	.63	15.9	.075	1.9	28	4.8	.10	2.5	2.8	12	.53	13.3	0.025	0.6	20.0	SST	C	N
0.125	3.18	2544	.63	15.9	.073	1.9	68	12	.11	2.7	7.3	32	.34	8.6	0.026	0.7	12.0	MW	C	Z
0.125	3.18	903	.63	15.9	.069	1.8	97	17	.09	2.3	8.9	40	.36	9.2	0.028	0.7	12.0	MW	C	Z
0.125	3.18	J-64	.66	16.7	.095	2.4	2.4	.42	.33	8.3	.79	3.5	.33	8.4	0.015	0.4	22.0	SST	CG	N
0.125	3.18	S-11	.66	16.7	.095	2.4	2.4	.41	.30	7.7	.72	3.2	.35	9.0	0.015	0.4	22.5	SST	C	N
0.125	3.18	3546	.66	16.7	.085	2.2	16	2.8	.23	5.8	3.7	16	.31	7.9	0.020	0.5	14.5	MW	C	Z
0.125	3.18	FF-51	.69	17.4	.105	2.7	.35	.06	.39	9.8	.14	.60	.30	7.6	0.010	0.3	29.0	MW	C	N
0.125	3.18	A-80	.69	17.4	.101	2.6	1.4	.25	.41	10	.58	2.6	.19	4.9	0.012	0.3	15.0	SST	C	N
0.125	3.18	A13-22	.69	17.4	.089	2.3	6.8	1.2	.26	6.7	1.8	8.0	.32	8.2	0.018	0.5	18.0	SST	CG	N
0.125	3.18	F-72	.69	17.4	.085	2.2	12	2.2	.29	7.5	3.7	16	.38	9.7	0.020	0.5	18.0	MW	C	Z
0.125	3.18	NN-9	.69	17.4	.079	2.0	22	3.9	.24	6.2	5.5	24	.44	11.1	0.023	0.6	19.0	MW	CG	N
0.125	3.18	J-75	.69	17.4	.075	1.9	26	4.5	.14	3.5	3.5	16	.55	14.0	0.025	0.6	21.0	SST	C	N
0.125	3.18	B4-9	.70	17.9	.095	2.4	4.3	.76	.24	6.2	1.1	4.7	.20	5.0	0.015	0.4	13.0	SST	CG	N
0.125	3.18	B12-7	.72	18.2	.095	2.4	3.7	.65	.43	11	1.6	7.0	.25	6.4	0.015	0.4	16.8	MW	CG	N
0.125	3.18	S-1687	.73	18.6	.095	2.4	4.0	.69	.27	6.7	1.1	4.7	.23	5.7	0.015	0.4	14.0	SST	C	N
0.125	3.18	B4-4	.73	18.6	.089	2.3	7.5	1.3	.36	9.2	2.7	12	.35	8.9	0.018	0.5	18.5	MW	C	N
0.125	3.18	915	.75	19.1	.101	2.6	1.5	.26	.55	14	.81	3.6	.20	5.2	0.012	0.3	16.0	MW	C	Z
0.125	3.18	JJ-27	.75	19.1	.101	2.6	1.6	.28	.56	14	.91	4.0	.19	4.8	0.012	0.3	14.8	MW	C	N
0.125	3.18	A11-15	.75	19.1	.093	2.4	3.9	.68	.32	8.3	1.3	5.7	.30	7.5	0.016	0.4	18.5	SST	CG	N
0.125	3.18	F-3	.75	19.1	.089	2.3	7.0	1.2	.38	9.7	2.7	12	.37	9.4	0.018	0.5	19.5	MW	C	Z
0.125	3.18	A13-50	.75	19.1	.087	2.2	8.9	1.6	.36	9.0	3.2	14	.38	9.5	0.019	0.5	19.8	MW	CG	GI
0.125	3.18	OO-21	.75	19.1	.085	2.2	11	1.9	.33	8.4	3.6	16	.42	10.7	0.020	0.5	20.0	MW	C	N
0.125	3.18	KK-31	.75	19.1	.085	2.2	12	2.0	.31	7.9	3.7	16	.40	10.2	0.020	0.5	19.0	MW	C	N
0.125	3.18	S-702	.75	19.1	.081	2.1	15	2.6	.21	5.4	3.2	14	.46	11.7	0.022	0.6	20.0	SST	C	N
0.125	3.18	B14-18	.75	19.1	.081	2.1	20	3.5	.24	6.1	4.8	21	.44	11.2	0.022	0.6	20.0	MW	CG	N
0.125	3.18	A10-24	.75	19.1	.079	2.0	20	3.5	.18	4.7	3.6	16	.46	11.7	0.023	0.6	19.0	SST	C	N
0.125	3.18	10957	.78	19.8	.101	2.6	1.3	.22	.55	14	.68	3.0	.23	5.9	0.012	0.3	18.5	MW	C	Z
0.125	3.18	TT-9	.78	19.8	.089	2.3	5.6	.98	.32	8.1	1.8	8.0	.41	10.3	0.018	0.5	21.5	SST	C	N
0.125	3.18	B5-54	.78	19.8	.079	2.0	19	3.3	.28	7.0	5.2	23	.51	12.9	0.023	0.6	22.0	MW	CG	GI
0.125	3.18	AA-70	.81	20.6	.109	2.8	.30	.05	.57	14	.17	.77	.11	2.7	0.008	0.2	12.5	SST	C	N
0.125	3.18	1719	.81	20.6	.105	2.7	.84	.15	.63	16	.53	2.4	.14	3.6	0.010	0.3	13.3	MW	C	Z
0.125	3.18	S-881	.81	20.6	.099	2.5	1.3	.23	.52	13	.68	3.0	.29	7.4	0.013	0.3	21.5	SST	C	N
0.125	3.18	B4-3	.81	20.6	.095	2.4	5.0	.87	.32	8.1	1.6	7.0	.21	5.3	0.015	0.4	13.0	MW	C	N
0.125	3.18	S-792	.84	21.4	.101	2.6	1.0	.18	.57	14	.58	2.6	.25	6.4	0.012	0.3	20.0	SST	C	N
0.125	3.18	10943	.84	21.4	.091	2.3	8.3	1.5	.28	7.0	2.3	10	.25	6.3	0.017	0.4	13.5	MW	C	Z
0.125	3.18	KK-41	.84	21.4	.081	2.1	20	3.5	.16	4.1	3.2	14	.36	9.2	0.022	0.6	15.5	SST	C	N
0.125	3.18	OO-69	.88	22.2	.105	2.7	.30	.05	.53	13	.16	.70	.35	8.8	0.010	0.3	33.8	MW	C	N
0.125	3.18	S-1511	.88	22.2	.095	2.4	4.0	.69	.27	6.7	1.1	4.7	.23	5.7	0.015	0.4	14.0	SST	C	N
0.125	3.18	B7-15	.91	23.0	.091	2.3	5.4	.95	.42	11	2.3	10	.35	8.9	0.017	0.4	19.5	MW	C	N
0.125	3.18	KK-82	.91	23.0	.085	2.2	10	1.8	.35	8.9	3.7	16	.44	11.2	0.020	0.5	21.0	MW	C	N
0.125	3.18	Y-85	.91	23.0	.085	2.2	9.7	1.7	.38	9.6	3.7	16	.47	11.9	0.020	0.5	22.5	MW	C	GI
0.125	3.18	LL-89	.94	23.8	.085	2.2	8.6	1.5	.42	11	3.6	16	.52	13.2	0.020	0.5	25.0	MW	C	N
0.125	3.18	MM-66	.94	23.8	.065	1.7	55	9.6	.13	3.3	7.2	32	.71	17.9	0.030	0.8	23.5	SST	CG	N
0.125	3.18	10745	1.00	25.4	.107	2.7	.42	.07	.85	21	.36	1.6	.16	3.9	0.009	0.2	16.3	MW	C	N
0.125	3.18	391	1.00	25.4	.103	2.6	.96	.17	.73	18	.70	3.1	.20	5.0	0.011	0.3	16.8	MW	C	Z
0.125	3.18	354-A	1.00	25.4	.097	2.5	2.2	.39	.64	16	1.4	6.3	.30	7.6	0.014	0.4	20.3	MW	C	Z
0.125	3.18	G-7	1.00	25.4	.097	2.5	1.9	.33	.66	17	1.2	5.5	.34	8.7	0.014	0.4	23.5	MW	C	BO
0.125	3.18	II-59	1.00	25.4	.095	2.4	3.0	.53	.52	13	1.6	7.0	.32	8.0	0.015	0.4	20.0	MW	C	Z
0.125	3.18	M-143	1.00	25.4	.095	2.4	2.1	.37	.57	14	1.2	5.3	.44	11.0	0.015	0.4	28.0	MW	C	Z
0.125	3.18	OO-15	1.00	25.4	.095	2.4	3.4	.60	.46	12	1.6	7.0	.29	7.2	0.015	0.4	18.0	MW	C	N
0.125	3.18	B-5	1.00	25.4	.093	2.4	3.5	.62	.54	14	1.9	8.5	.38	9.6	0.016	0.4	22.5	MW	C	N
0.125	3.18	JJ-76	1.00	25.4	.079	2.0	11	2.0	.26	6.7	3.0	13	.74	18.7	0.023	0.6	31.0	SST	C	N
0.125	3.18	XX-42	1.06	27.0	.093	2.4	3.0	.53	.42	11	1.3	5.7	.38	9.8	0.016	0.4	23.0	SST	C	N
0.125	3.18	3552	1.09	27.8	.097	2.5	2.1	.37	.67	17	1.4	6.3	.31	7.8	0.014	0.4	21.0	MW	C	GI
0.125	3.18	GG-67	1.09	27.8	.085	2.2	6.3	1.1	.39	9.8	2.4	11	.60	15.2	0.020	0.5	30.0	SST	CG	N
0.125	3.18	H-56	1.09	27.8	.083	2.1	8.3	1.5	.40	10	3.3	15	.69	17.6	0.021	0.5	32.0	MW	C	Z
0.125	3.18	2984	1.13	28.6	.099	2.5	.94	.16	.68	17	.64	2.8	.45	11.3	0.013	0.3	33.3	MW	C	Z
0.125	3.18	A11-62	1.13	28.6	.097	2.5	1.2	.22	.68	17	.84	3.7	.45	11.4	0.014	0.4	31.0	SST	C	N
0.125	3.18	2903	1.13	28.6	.085	2.2	9.8	1.7	.37	9.5	3.7	16	.47	11.8	0.020	0.5	22.3	MW	C	Z
0.125	3.18	10474	1.13	28.6	.081	2.1	19	3.3	.26	6.5	4.8	21	.43	10.9	0.022	0.6	18.5	MW	C	Z
0.125	3.18	S-3152	1.19	30.2	.101	2.6	.97	.17	.59	15	.58	2.6	.26	6.6	0.012	0.3	20.5	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.125	3.18	B15-63	1.22	31.0	.099	2.5	1.0	.18	.80	20	.81	3.6	.42	10.6	0.013	0.3	31.0	MW	C	N
0.125	3.18	S-1085	1.25	31.8	.095	2.4	2.4	.43	.43	11	1.1	4.7	.34	8.6	0.015	0.4	21.5	SST	C	N
0.125	3.18	PP-9	1.25	31.8	.065	1.7	100	18	.07	1.8	7.2	32	.45	11.4	0.030	0.8	14.0	SST	C	N
0.125	3.18	AA-7	1.38	34.9	.105	2.7	.47	.08	.72	18	.34	1.5	.21	5.3	0.010	0.3	20.0	SST	C	N
0.125	3.18	354-B	1.38	34.9	.097	2.5	1.6	.28	.90	23	1.4	6.3	.40	10.1	0.014	0.4	27.5	MW	C	Z
0.125	3.18	1827	1.38	34.9	.093	2.4	2.3	.41	.81	21	1.9	8.5	.54	13.8	0.016	0.4	33.0	MW	C	Z
0.125	3.18	KK-90	1.38	34.9	.089	2.3	4.9	.86	.55	14	2.7	12	.50	12.8	0.018	0.5	27.0	MW	C	N
0.125	3.18	MM-82	1.38	34.9	.087	2.2	6.6	1.1	.48	12	3.2	14	.51	13.0	0.019	0.5	26.0	MW	C	Z
0.125	3.18	FF-54	1.38	34.9	.085	2.2	7.9	1.4	.46	12	3.7	16	.56	14.2	0.020	0.5	27.0	MW	C	N
0.125	3.18	NN-94	1.50	38.1	.075	1.9	13	2.3	.33	8.4	4.4	19	1.00	25.4	0.025	0.6	39.0	SST	C	N
0.125	3.18	2982	1.53	38.9	.095	2.4	3.1	.55	.51	13	1.6	7.0	.31	7.8	0.015	0.4	19.5	MW	C	Z
0.125	3.18	354-C	1.75	44.5	.097	2.5	1.2	.22	1.1	29	1.4	6.3	.50	12.6	0.014	0.4	34.5	MW	C	Z
0.125	3.18	BB-34	2.25	57.2	.085	2.2	5.7	.99	.64	16	3.7	16	.76	19.3	0.020	0.5	37.0	MW	C	N
0.125	3.18	Y-65	3.00	76.2	.105	2.7	.21	.04	2.5	64	.52	2.3	.49	12.4	0.010	0.3	48.0	MW	C	N
0.125	3.18	S-1474	4.25	108.0	.105	2.7	.08	.01	3.2	82	.27	1.2	1.02	25.9	0.010	0.3	101.0	SST	C	N
0.140	3.56	10224	.16	4.0	.122	3.1	1.2	.21	.10	2.5	.12	.52	.06	1.5	0.009	0.2	5.50	MW	C	N
0.140	3.56	DD-49	.19	4.8	.116	2.9	4.2	.74	.12	2.9	.49	2.2	.07	1.8	0.012	0.3	5.00	SST	C	N
0.140	3.56	J-84	.20	5.2	.100	2.5	67	12	.05	1.3	3.3	15	.08	2.0	0.020	0.5	4.00	MW	CG	N
0.140	3.56	U-93	.25	6.4	.118	3.0	1.6	.29	.15	3.8	.25	1.1	.10	2.5	0.011	0.3	8.00	MW	C	Z
0.140	3.56	Z-7	.25	6.4	.112	2.8	3.8	.67	.12	3.1	.46	2.1	.13	3.3	0.014	0.4	8.25	SST	C	N
0.140	3.56	II-9	.25	6.4	.096	2.4	102	18	.04	1.1	4.4	19	.11	2.8	0.022	0.6	4.00	MW	C	N
0.140	3.56	JJ-72	.25	6.4	.080	2.0	155	27	.04	1.1	6.6	30	.18	4.6	0.030	0.8	5.00	SST	O	N
0.140	3.56	OO-19	.28	7.1	.120	3.0	1.0	.18	.19	4.7	.19	.83	.10	2.4	0.010	0.3	8.50	MW	C	N
0.140	3.56	L-97	.28	7.1	.116	2.9	2.0	.36	.16	4.1	.33	1.5	.12	3.0	0.012	0.3	9.00	MW	C	N
0.140	3.56	GG-60	.31	7.9	.112	2.8	2.7	.47	.16	4.0	.42	1.9	.15	3.9	0.014	0.4	11.0	SST	CG	N
0.140	3.56	B8-8	.31	7.9	.104	2.6	14	2.4	.15	3.8	2.1	9.2	.16	4.1	0.018	0.5	8.00	MW	C	N
0.140	3.56	AA-6	.31	7.9	.100	2.5	27	4.7	.12	3.2	3.3	15	.14	3.6	0.020	0.5	7.00	MW	CG	Z
0.140	3.56	LL-69	.31	7.9	.090	2.3	49	8.6	.08	2.0	4.0	18	.21	5.4	0.025	0.6	8.50	SST	CG	N
0.140	3.56	A9-27	.34	8.7	.098	2.5	27	4.7	.09	2.4	2.5	11	.18	4.5	0.021	0.5	7.50	SST	C	N
0.140	3.56	CC-91	.34	8.7	.088	2.2	57	10	.08	2.0	4.4	20	.23	5.8	0.026	0.7	8.75	SST	CG	N
0.140	3.56	NN-41	.34	8.7	.088	2.2	66	11	.07	1.7	4.4	20	.21	5.3	0.026	0.7	8.00	SST	CG	N
0.140	3.56	H-77	.34	8.7	.084	2.1	78	14	.07	1.8	5.5	24	.25	6.4	0.028	0.7	9.00	SST	CG	N
0.140	3.56	A-27	.34	8.7	.082	2.1	110	19	.05	1.4	6.0	27	.26	6.6	0.029	0.7	8.00	SST	C	N
0.140	3.56	A12-1	.35	8.9	.112	2.8	4.0	.70	.20	5.2	.82	3.6	.13	3.2	0.014	0.4	8.00	SST	C	N
0.140	3.56	O-80	.36	9.1	.100	2.5	41	7.2	.05	1.4	2.2	9.8	.12	3.0	0.020	0.5	4.88	SST	C	N
0.140	3.56	J-26	.38	9.5	.116	2.9	2.8	.50	.28	7.1	.79	3.5	.10	2.4	0.012	0.3	7.00	MW	C	GI
0.140	3.56	12619	.38	9.5	.116	2.9	2.6	.45	.27	6.9	.71	3.1	.10	2.6	0.012	0.3	7.50	MW	C	N
0.140	3.56	B2-23	.38	9.5	.116	2.9	2.2	.38	.26	6.6	.57	2.5	.11	2.9	0.012	0.3	8.50	MW	C	Z
0.140	3.56	A15-25	.38	9.5	.114	2.9	4.0	.70	.26	6.5	1.0	4.6	.10	2.5	0.013	0.3	7.00	MW	C	GI
0.140	3.56	FF-22	.38	9.5	.114	2.9	4.0	.70	.20	5.1	.80	3.6	.10	2.6	0.013	0.3	7.00	BC	C	N
0.140	3.56	M-129	.38	9.5	.110	2.8	5.7	1.0	.23	5.9	1.3	5.9	.14	3.6	0.015	0.4	8.50	MW	C	N
0.140	3.56	A15-6	.38	9.5	.100	2.5	21	3.6	.11	2.7	2.2	9.8	.18	4.4	0.020	0.5	7.75	SST	C	N
0.140	3.56	AA-42	.38	9.5	.100	2.5	13	2.3	.16	3.9	2.0	8.9	.22	5.6	0.020	0.5	11.0	SST	CG	N
0.140	3.56	GG-38	.38	9.5	.100	2.5	18	3.1	.12	3.1	2.2	9.8	.19	4.8	0.020	0.5	8.50	SST	C	N
0.140	3.56	3762	.38	9.5	.084	2.1	157	28	.05	1.3	8.2	36	.20	5.0	0.028	0.7	6.00	MW	C	Z
0.140	3.56	H-95	.38	9.5	.084	2.1	126	22	.06	1.6	8.2	36	.22	5.7	0.028	0.7	7.00	MW	C	N
0.140	3.56	S-1535	.39	9.9	.078	2.0	162	28.3	.045	1.14	7.3	32.5	.23	5.9	0.031	0.8	7.50	SST	CG	N
0.140	3.56	11375	.41	10.3	.108	2.7	7.0	1.2	.16	4.1	1.1	5.1	.15	3.8	0.016	0.4	8.25	SST	C	N
0.140	3.56	3633	.41	10.3	.104	2.6	14	2.4	.18	4.5	2.4	11	.14	3.7	0.018	0.5	8.00	MW	CG	N
0.140	3.56	J-80	.41	10.3	.102	2.6	14	2.4	.14	3.5	1.9	8.4	.17	4.2	0.019	0.5	8.75	SST	CG	N
0.140	3.56	UU-4	.42	10.7	.100	2.5	17	3.0	.13	3.3	2.2	9.8	.20	5.1	0.020	0.5	9.00	SST	C	N
0.140	3.56	B1-10	.44	11.1	.124	3.1	.26	.05	.34	8.7	.09	.40	.09	2.4	0.008	0.2	10.8	SST	C	N
0.140	3.56	J-99	.44	11.1	.116	2.9	1.1	.19	.25	6.2	.27	1.2	.19	4.9	0.012	0.3	15.0	MW	C	Z
0.140	3.56	3793	.44	11.1	.108	2.7	7.9	1.4	.22	5.5	1.7	7.7	.15	3.8	0.016	0.4	8.25	MW	C	Z
0.140	3.56	V-40	.44	11.1	.106	2.7	6.5	1.1	.22	5.5	1.4	6.2	.22	5.6	0.017	0.4	12.0	MW	C	N
0.140	3.56	B14-56	.44	11.1	.104	2.6	17	2.9	.15	3.7	2.4	11	.14	3.7	0.018	0.5	7.00	MW	C	N
0.140	3.56	J-90	.44	11.1	.102	2.6	13	2.3	.22	5.5	2.8	13	.21	5.3	0.019	0.5	10.0	MW	C	Z
0.140	3.56	V-41	.44	11.1	.102	2.6	11	1.9	.19	4.9	2.0	9.0	.25	6.3	0.019	0.5	12.0	MW	C	N
0.140	3.56	OO-22	.45	11.5	.100	2.5	27	4.7	.12	3.2	3.3	15	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.140	3.56	2674	.47	11.9	.104	2.6	12	2.1	.20	5.2	2.4	11	.18	4.6	0.018	0.5	9.00	MW	C	Z
0.140	3.56	CC-19	.47	11.9	.100	2.5	13	2.3	.21	5.3	2.8	12	.26	6.6	0.020	0.5	12.0	MW	C	N
0.140	3.56	J-55	.50	12.7	.120	3.0	.65	.11	.37	9.4	.24	1.1	.13	3.3	0.010	0.3	12.0	MW	C	Z
0.140	3.56	11255	.50	12.7	.116	2.9	1.1	.18	.32	8.1	.34	1.5	.18	4.6	0.012	0.3	14.0	SST	C	N
0.140	3.56	N-35	.50	12.7	.090	2.3	41	7.2	.14	3.7	5.9	26	.28	7.0	0.025	0.6	11.0	MW	CG	N
0.140	3.56	S-236	.50	12.7	.088	2.2	64	11	.07	1.8	4.4	20	.23	5.9	0.026	0.7	8.00	SST	C	N
0.140	3.56	B18-144	.53	13.5	.124	3.1	.32	.06	.44	11	.14	.63	.09	2.2	0.008	0.2	10.0	MW	C	Z
0.140	3.56	S-191	.56	14.3	.104	2.6	13	2.3	.12	3.1	1.6	7.2	.15	3.9	0.018	0.5	7.50	SST	C	N
0.140	3.56	S-1331	.56	14.3	.100	2.5	17	2.9	.13	3.4	2.2	9.8	.20	5.1	0.020	0.5	9.00	SST	C	N
0.140	3.56	10025	.56	14.3	.094	2.4	28	4.9	.18	4.5	4.9	22	.28	7.0	0.023	0.6	11.0	MW	CL	N
0.140	3.56	XX-38	.58	14.7	.100	2.5	17	2.9	.20	5.0	3.3	15	.22	5.6	0.020	0.5	10.0	MW	C	N
0.140	3.56	B15-46	.59	15.1	.120	3.0	.33	.06	.36	9.2	.12	.53	.23	5.8	0.010	0.3	22.0	MW	C	N
0.140	3.56	2935	.59	15.1	.096	2.4	19	3.3	.23	5.9	4.4	19	.31	7.8	0.022	0.6	13.0	MW	C	Z
0.140	3.56	10994	.63	15.9	.100	2.5	13	2.3	.25	6.3	3.3	15	.26	6.6	0.020	0.5	12.0	MW	C	N
0.140	3.56	Q-95	.63	15.9	.080	2.0	65	11	.15	3.9	9.9	44	.47	11.8	0.030	0.8	15.5	MW	CG	N
0.140	3.56	EE-30	.66	16.7	.116	2.9	1.1	.19	.47	12	.52	2.3	.17	4.4	0.012	0.3	13.5	SST	C	N
0.140	3.56	AA-12	.66	16.7	.110	2.8	2.2	.38	.43	11	.93	4.1	.23	5.7	0.015	0.4	15.0	MW	CG	Z
0.140	3.56	MM-5	.66	16.7	.076	1.9	90	16	.09	2.2	7.9	35	.43	11.0	0.032	0.8	13.5	SST	CG	N
0.140	3.56	10212	.69	17.4	.106	2.7	9.9	1.7	.21	5.3	2.1	9.1	.15	3.7	0.017	0.4	8.50	MW	CG	GI
0.140	3.56	V-77	.69	17.4	.102	2.6	13	2.3	.22	5.5	2.8	13	.21	5.3	0.019	0.5	10.0	MW	C	N
0.140	3.56	JJ-74	.70	17.9	.100	2.5	17	2.9	.20	5.0	3.3	15	.22	5.6	0.020	0.5	10.0	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.140	3.56	Q-83	.72	18.2	.092	2.3	21	3.7	.27	6.7	5.6	25	.42	10.7	0.024	0.6	16.5	MW	C	N
0.140	3.56	10968	.75	19.1	.120	3.0	.50	.09	.59	15	.30	1.3	.16	4.1	0.010	0.3	15.0	MW	C	Z
0.140	3.56	RR-35	.75	19.1	.100	2.5	4.5	.79	.18	4.6	.82	3.6	.57	14.5	0.020	0.5	27.5	SST	C	N
0.140	3.56	JJ-25	.78	19.8	.088	2.2	21	3.8	.21	5.3	4.4	20	.52	13.2	0.026	0.7	20.0	SST	CG	N
0.140	3.56	11464	.81	20.6	.114	2.9	2.2	.39	.30	7.5	.66	2.9	.14	3.6	0.013	0.3	10.0	SST	C	N
0.140	3.56	RR-44	.81	20.6	.100	2.5	6.4	1.1	.34	8.7	2.2	9.8	.42	10.7	0.020	0.5	20.0	SST	C	N
0.140	3.56	FF-53	.88	22.2	.120	3.0	.47	.08	.71	18	.33	1.5	.17	4.3	0.010	0.3	16.0	MW	C	N
0.140	3.56	3195	.88	22.2	.116	2.9	1.0	.18	.67	17	.68	3.0	.20	5.2	0.012	0.3	16.0	MW	C	Z
0.140	3.56	1831	.91	23.0	.116	2.9	1.1	.19	.71	18	.78	3.5	.19	4.9	0.012	0.3	15.0	MW	C	Z
0.140	3.56	3707	.94	23.8	.120	3.0	.33	.06	.71	18	.23	1.0	.23	5.8	0.010	0.3	22.0	MW	C	Z
0.140	3.56	B5-69	.94	23.8	.118	3.0	.34	.06	.59	15	.20	.88	.35	8.9	0.011	0.3	31.0	MW	C	N
0.140	3.56	S-393	.94	23.8	.108	2.7	2.2	.39	.51	13	1.1	5.1	.36	9.1	0.016	0.4	21.5	SST	C	N
0.140	3.56	A10-34	1.00	25.4	.116	2.9	.61	.11	.72	18	.43	1.9	.29	7.2	0.012	0.3	22.8	SST	C	N
0.140	3.56	3773	1.00	25.4	.108	2.7	3.5	.62	.49	12	1.7	7.7	.27	6.9	0.016	0.4	16.0	MW	C	Z
0.140	3.56	11254	1.00	25.4	.102	2.6	4.7	.82	.40	10	1.9	8.4	.44	11.1	0.019	0.5	22.0	SST	C	N
0.140	3.56	NN-55	1.03	26.2	.108	2.7	3.3	.58	.52	13	1.7	7.7	.29	7.3	0.016	0.4	17.0	MW	C	N
0.140	3.56	BB-83	1.06	27.0	.096	2.4	7.1	1.2	.41	10	2.9	13	.62	15.6	0.022	0.6	27.0	SST	C	N
0.140	3.56	LL-19	1.13	28.6	.120	3.0	.26	.05	.85	21	.22	.98	.28	7.1	0.010	0.3	27.0	MW	C	N
0.140	3.56	PP-54	1.13	28.6	.108	2.7	1.8	.31	.63	16	1.1	4.9	.50	12.6	0.016	0.4	30.0	MW	C	Z
0.140	3.56	LL-91	1.25	31.8	.124	3.1	.14	.02	1.1	27	.15	.68	.17	4.3	0.008	0.2	20.0	MW	C	N
0.140	3.56	4223	1.25	31.8	.110	2.8	1.3	.22	.76	19	.96	4.3	.49	12.4	0.015	0.4	31.5	MW	C	Z
0.140	3.56	S-1020	1.31	33.3	.100	2.5	4.0	.70	.55	14	2.2	9.8	.64	16.3	0.020	0.5	31.0	SST	C	N
0.140	3.56	B3-41	1.31	33.3	.080	2.0	30	5.3	.33	8.3	9.9	44	.93	23.6	0.030	0.8	31.0	MW	CG	N
0.140	3.56	AA-68	1.34	34.1	.104	2.6	4.9	.86	.33	8.3	1.6	7.2	.32	8.2	0.018	0.5	17.0	SST	C	N
0.140	3.56	1755	1.38	34.9	.108	2.7	1.6	.28	.84	21	1.4	6.0	.54	13.6	0.016	0.4	32.5	MW	C	Z
0.140	3.56	2638	1.38	34.9	.102	2.6	3.6	.62	.75	19	2.7	12	.62	15.8	0.019	0.5	31.8	MW	C	Z
0.140	3.56	N-108	1.44	36.5	.092	2.3	10	1.8	.55	14	5.6	25	.79	20.1	0.024	0.6	32.0	MW	C	GI
0.140	3.56	A12-34	1.44	36.6	.116	2.9	.43	.07	1.1	27	.45	2.0	.38	9.8	0.012	0.3	31.0	SST	C	N
0.140	3.56	1922	1.50	38.1	.108	2.7	1.7	.30	.98	25	1.7	7.4	.52	13.1	0.016	0.4	31.3	MW	C	Z
0.140	3.56	O-128	1.94	49.2	.090	2.3	7.1	1.2	.56	14	4.0	18	1.20	30.5	0.025	0.6	47.0	SST	C	N
0.148	3.76	70206	.25	6.4	.106	2.7	34	6.0	.11	2.7	3.6	16	.13	3.2	0.021	0.5	6.00	MW	CG	N
0.148	3.76	70206S	.25	6.4	.106	2.7	30	5.2	.08	2.1	2.4	11	.13	3.2	0.021	0.5	6.00	SST	CG	N
0.148	3.76	70225	.25	6.4	.102	2.6	50	8.7	.09	2.4	4.7	21	.14	3.6	0.023	0.6	6.13	MW	CG	N
0.148	3.76	70225S	.25	6.4	.102	2.6	43	7.6	.07	1.8	3.1	14	.14	3.6	0.023	0.6	6.13	SST	CG	N
0.148	3.76	70207	.31	7.9	.106	2.7	27	4.7	.14	3.5	3.6	16	.15	3.8	0.021	0.5	7.13	MW	CG	N
0.148	3.76	70207S	.31	7.9	.106	2.7	23	4.1	.10	2.6	2.4	11	.15	3.8	0.021	0.5	7.13	SST	CG	N
0.148	3.76	70226	.31	7.9	.102	2.6	38	6.7	.12	3.1	4.7	21	.17	4.3	0.023	0.6	7.38	MW	CG	N
0.148	3.76	70226S	.31	7.9	.102	2.6	33	5.8	.09	2.4	3.1	14	.17	4.3	0.023	0.6	7.38	SST	CG	N
0.148	3.76	70208	.38	9.7	.106	2.7	21	3.7	.17	4.4	3.6	16	.18	4.5	0.021	0.5	8.50	MW	CG	N
0.148	3.76	70208S	.38	9.7	.106	2.7	18	3.2	.13	3.3	2.4	11	.18	4.5	0.021	0.5	8.50	SST	CG	N
0.148	3.76	70227	.38	9.7	.102	2.6	31	5.3	.15	3.9	4.7	21	.20	5.1	0.023	0.6	8.75	MW	CG	N
0.148	3.76	70227S	.38	9.7	.102	2.6	27	4.6	.12	3.0	3.1	14	.20	5.1	0.023	0.6	8.75	SST	CG	N
0.148	3.76	70209	.44	11.2	.106	2.7	18	3.1	.20	5.1	3.6	16	.20	5.1	0.021	0.5	9.63	MW	CG	N
0.148	3.76	70209S	.44	11.2	.106	2.7	16	2.7	.15	3.9	2.4	11	.20	5.1	0.021	0.5	9.63	SST	CG	N
0.148	3.76	70228	.44	11.2	.102	2.6	26	4.6	.18	4.6	4.7	21	.23	5.8	0.023	0.6	9.88	MW	CG	N
0.148	3.76	70228S	.44	11.2	.102	2.6	23	4.0	.14	3.5	3.1	14	.23	5.8	0.023	0.6	9.88	SST	CG	N
0.148	3.76	70210	.50	12.7	.106	2.7	15	2.7	.24	6.0	3.6	16	.23	5.8	0.021	0.5	10.9	MW	CG	N
0.148	3.76	70210S	.50	12.7	.106	2.7	13	2.3	.18	4.6	2.4	11	.23	5.8	0.021	0.5	10.9	SST	CG	N
0.148	3.76	70229	.50	12.7	.102	2.6	23	4.0	.21	5.3	4.7	21	.26	6.5	0.023	0.6	11.1	MW	CG	N
0.148	3.76	70229S	.50	12.7	.102	2.6	20	3.4	.16	4.1	3.1	14	.26	6.5	0.023	0.6	11.1	SST	CG	N
0.148	3.76	70211	.56	14.2	.106	2.7	14	2.4	.27	6.7	3.6	16	.25	6.4	0.021	0.5	12.0	MW	CG	N
0.148	3.76	70211S	.56	14.2	.106	2.7	12	2.1	.20	5.1	2.4	11	.25	6.4	0.021	0.5	12.0	SST	CG	N
0.148	3.76	70230	.56	14.2	.102	2.6	20	3.5	.24	6.0	4.7	21	.29	7.2	0.023	0.6	12.4	MW	CG	N
0.148	3.76	70230S	.56	14.2	.102	2.6	17	3.0	.18	4.6	3.1	14	.29	7.2	0.023	0.6	12.4	SST	CG	N
0.148	3.76	70212	.63	16.0	.106	2.7	12	2.1	.29	7.5	3.6	16	.28	7.0	0.021	0.5	13.1	MW	CG	N
0.148	3.76	70212S	.63	16.0	.106	2.7	11	1.9	.23	5.7	2.4	11	.28	7.0	0.021	0.5	13.1	SST	CG	N
0.148	3.76	70231	.63	16.0	.102	2.6	18	3.1	.27	6.7	4.7	21	.31	8.0	0.023	0.6	13.6	MW	CG	N
0.148	3.76	70231S	.63	16.0	.102	2.6	15	2.7	.20	5.2	3.1	14	.31	8.0	0.023	0.6	13.6	SST	CG	N
0.148	3.76	70213	.69	17.5	.106	2.7	11	1.9	.33	8.3	3.6	16	.30	7.7	0.021	0.5	14.4	MW	CG	N
0.148	3.76	70213S	.69	17.5	.106	2.7	9.6	1.7	.25	6.4	2.4	11	.30	7.7	0.021	0.5	14.4	SST	CG	N
0.148	3.76	70232	.69	17.5	.102	2.6	16	2.8	.29	7.5	4.7	21	.34	8.7	0.023	0.6	14.9	MW	CG	N
0.148	3.76	70232S	.69	17.5	.102	2.6	14	2.4	.22	5.7	3.1	14	.34	8.7	0.023	0.6	14.9	SST	CG	N
0.148	3.76	70214	.75	19.1	.106	2.7	10	1.8	.36	9.1	3.6	16	.33	8.3	0.021	0.5	15.5	MW	CG	N
0.148	3.76	70214S	.75	19.1	.106	2.7	8.8	1.5	.27	6.9	2.4	11	.33	8.3	0.021	0.5	15.5	SST	CG	N
0.148	3.76	70233	.75	19.1	.102	2.6	15	2.6	.32	8.2	4.7	21	.37	9.4	0.023	0.6	16.1	MW	CG	N
0.148	3.76	70233S	.75	19.1	.102	2.6	13	2.2	.25	6.3	3.1	14	.37	9.4	0.023	0.6	16.1	SST	CG	N
0.148	3.76	70215	.81	20.6	.106	2.7	9.3	1.6	.39	9.8	3.6	16	.35	8.9	0.021	0.5	16.6	MW	CG	N
0.148	3.76	70215S	.81	20.6	.106	2.7	8.1	1.4	.30	7.5	2.4	11	.35	8.9	0.021	0.5	16.6	SST	CG	N
0.148	3.76	70234	.81	20.6	.102	2.6	13	2.3	.35	9.0	4.7	21	.40	10.2	0.023	0.6	17.5	MW	CG	N
0.148	3.76	70234S	.81	20.6	.102	2.6	12	2.0	.27	6.9	3.1	14	.40	10.2	0.023	0.6	17.5	SST	CG	N
0.148	3.76	70216	.88	22.4	.106	2.7	8.9	1.6	.41	10	3.6	16	.37	9.3	0.021	0.5	17.4	MW	CG	N
0.148	3.76	70216S	.88	22.4	.106	2.7	7.7	1.4	.31	7.9	2.4	11	.37	9.3	0.021	0.5	17.4	SST	CG	N
0.148	3.76	70235	.88	22.4	.102	2.6	13	2.2	.37	9.4	4.7	21	.42	10.7	0.023	0.6	18.3	MW	CG	N
0.148	3.76	70235S	.88	22.4	.102	2.6	11	1.9	.28	7.2	3.1	14	.42	10.7	0.023	0.6	18.3	SST	CG	N
0.148	3.76	70217	.94	23.9	.106	2.7	7.9	1.4	.46	12	3.6	16	.40	10.3	0.021	0.5	19.3	MW	CG	N
0.148	3.76	70217S	.94	23.9	.106	2.7	6.9	1.2	.35	8.9	2.4	11	.40	10.3	0.021	0.5	19.3	SST	CG	N
0.148	3.76	70236	.94	23.9	.102	2.6	11	2.0	.41	10	4.7	21	.46	11.7	0.023	0.6	20.0	MW	CG	N
0.148	3.76	70236S	.94	23.9	.102	2.6	10	1.7	.31	8.0	3.1	14	.46	11.7	0.023	0.6	20.0	SST	CG	N
0.148	3.76	70218	1.00	25.4	.106	2.7	7.4	1.3	.49	12	3.6	16	.43	10.9	0.021	0.5	20.5	MW	CG	N
0.148	3.76	70218S	1.00	25.4	.106	2.7	6.4	1.1	.37	9.5	2.4	11	.43	10.9	0.021	0.5	20.5	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.148	3.76	70237	1.00	25.4	.102	2.6	11	1.9	.44	11	4.7	21	.49	12.4	0.023	0.6	21.3	MW	CG	N
0.148	3.76	70237S	1.00	25.4	.102	2.6	9.3	1.6	.34	8.5	3.1	14	.49	12.4	0.023	0.6	21.3	SST	CG	N
0.148	3.76	70220	1.13	28.7	.106	2.7	6.8	1.2	.53	14	3.6	16	.47	11.8	0.021	0.5	22.1	MW	CG	N
0.148	3.76	70220S	1.13	28.7	.106	2.7	5.9	1.0	.41	10	2.4	11	.47	11.8	0.021	0.5	22.1	SST	CG	N
0.148	3.76	70239	1.13	28.7	.102	2.6	9.8	1.7	.48	12	4.7	21	.53	13.4	0.023	0.6	23.0	MW	CG	N
0.148	3.76	70239S	1.13	28.7	.102	2.6	8.5	1.5	.37	9.3	3.1	14	.53	13.4	0.023	0.6	23.0	SST	CG	N
0.148	3.76	70221	1.25	31.8	.106	2.7	5.9	1.0	.61	15	3.6	16	.53	13.3	0.021	0.5	25.0	MW	CG	N
0.148	3.76	70221S	1.25	31.8	.106	2.7	5.2	.90	.47	12	2.4	11	.53	13.3	0.021	0.5	25.0	SST	CG	N
0.148	3.76	70240	1.25	31.8	.102	2.6	8.5	1.5	.55	14	4.7	21	.60	15.3	0.023	0.6	26.1	MW	CG	N
0.148	3.76	70240S	1.25	31.8	.102	2.6	7.4	1.3	.42	11	3.1	14	.60	15.3	0.023	0.6	26.1	SST	CG	N
0.148	3.76	70223	1.38	35.1	.106	2.7	5.6	.98	.65	16	3.6	16	.55	14.1	0.021	0.5	26.4	MW	CG	N
0.148	3.76	70223S	1.38	35.1	.106	2.7	4.9	.85	.49	13	2.4	11	.55	14.1	0.021	0.5	26.4	SST	CG	N
0.148	3.76	70242	1.38	35.1	.102	2.6	8.0	1.4	.59	15	4.7	21	.64	16.2	0.023	0.6	27.8	MW	CG	N
0.148	3.76	70242S	1.38	35.1	.102	2.6	7.0	1.2	.45	11	3.1	14	.64	16.2	0.023	0.6	27.8	SST	CG	N
0.148	3.76	70224	1.50	38.1	.106	2.7	4.9	.87	.73	19	3.6	16	.62	15.8	0.021	0.5	29.6	MW	CG	N
0.148	3.76	70224S	1.50	38.1	.106	2.7	4.3	.75	.56	14	2.4	11	.62	15.8	0.021	0.5	29.6	SST	CG	N
0.148	3.76	70243	1.50	38.1	.102	2.6	7.1	1.2	.66	17	4.7	21	.71	18.1	0.023	0.6	31.0	MW	CG	N
0.148	3.76	70243S	1.50	38.1	.102	2.6	6.2	1.1	.51	13	3.1	14	.71	18.1	0.023	0.6	31.0	SST	CG	N
0.156	3.96	HH-70	.19	4.8	.116	2.9	46	8.0	.07	1.7	3.0	13	.10	2.5	0.020	0.5	4.00	MW	C	N
0.156	3.96	HH-57	.25	6.4	.132	3.4	2.5	.43	.17	4.4	.43	1.9	.08	2.0	0.012	0.3	5.50	SST	C	N
0.156	3.96	V-18	.25	6.4	.126	3.2	7.5	1.3	.11	2.9	.85	3.8	.09	2.3	0.015	0.4	5.00	SST	C	N
0.156	3.96	904	.25	6.4	.116	2.9	30	5.3	.10	2.5	3.0	13	.12	3.0	0.020	0.5	5.00	MW	C	Z
0.156	3.96	J-86	.25	6.4	.106	2.7	83	15	.06	1.6	5.4	24	.13	3.2	0.025	0.6	5.00	MW	CG	Z
0.156	3.96	KK-7	.28	7.1	.136	3.5	1.3	.23	.20	5.2	.27	1.2	.06	1.5	0.010	0.3	5.00	SST	C	N
0.156	3.96	H-18	.28	7.1	.106	2.7	62	11	.09	2.2	5.4	24	.15	3.8	0.025	0.6	6.00	MW	CG	Z
0.156	3.96	B-46	.28	7.1	.104	2.6	88	15	.05	1.2	4.0	18	.16	4.0	0.026	0.7	5.00	SST	C	N
0.156	3.96	3721	.31	7.9	.142	3.6	.09	.01	.21	5.2	.02	.08	.11	2.7	0.007	0.2	14.3	MW	C	N
0.156	3.96	FF-37	.31	7.9	.126	3.2	3.7	.65	.16	4.1	.60	2.7	.15	3.8	0.015	0.4	9.00	MW	C	Z
0.156	3.96	U-16	.31	7.9	.126	3.2	5.2	.91	.19	4.9	1.0	4.4	.12	3.0	0.015	0.4	7.00	MW	C	Z
0.156	3.96	EE-95	.31	7.9	.124	3.1	8.6	1.5	.18	4.6	1.6	6.9	.11	2.8	0.016	0.4	6.00	MW	C	N
0.156	3.96	S-1038	.31	7.9	.120	3.0	17	2.9	.09	2.2	1.5	6.5	.11	2.7	0.018	0.5	5.00	SST	C	N
0.156	3.96	B8-6	.31	7.9	.118	3.0	12	2.1	.16	4.1	1.9	8.6	.15	3.9	0.019	0.5	8.00	MW	CG	N
0.156	3.96	J-82	.31	7.9	.114	2.9	17	2.9	.12	3.1	2.1	9.2	.19	4.8	0.021	0.5	8.00	SST	C	N
0.156	3.96	Q-11	.31	7.9	.106	2.7	62	11	.09	2.2	5.4	24	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.156	3.96	U-90	.31	7.9	.090	2.3	153	27	.05	1.2	7.3	33	.26	6.7	0.033	0.8	8.00	MW	CG	Z
0.156	3.96	N-5	.34	8.7	.140	3.6	.15	.03	.24	6.0	.04	.16	.11	2.7	0.008	0.2	12.5	SST	C	N
0.156	3.96	S-301	.34	8.7	.140	3.6	.14	.03	.23	5.9	.03	.15	.11	2.8	0.008	0.2	13.0	SST	C	N
0.156	3.96	LL-38	.34	8.7	.118	3.0	13	2.2	.14	3.4	1.7	7.6	.15	3.9	0.019	0.5	7.00	SST	C	N
0.156	3.96	Y-67	.34	8.7	.118	3.0	12	2.1	.17	4.4	2.1	9.3	.17	4.3	0.019	0.5	8.00	MW	C	N
0.156	3.96	2815	.34	8.7	.086	2.2	244	43	.05	1.4	13	59	.25	6.2	0.035	0.9	7.00	MW	CG	Z
0.156	3.96	B4-6	.34	8.7	.114	2.9	21	3.6	.17	4.2	3.4	15	.18	4.5	0.021	0.5	7.50	MW	C	N
0.156	3.96	S-1095	.38	9.5	.126	3.2	2.1	.36	.17	4.2	.34	1.5	.21	5.3	0.015	0.4	13.0	SST	C	N
0.156	3.96	10111	.38	9.5	.124	3.1	7.6	1.3	.20	5.2	1.6	6.9	.12	3.0	0.016	0.4	6.50	MW	C	Z
0.156	3.96	N-28	.38	9.5	.120	3.0	7.2	1.3	.20	5.0	1.4	6.2	.18	4.6	0.018	0.5	10.0	MW	CG	Z
0.156	3.96	O-37	.38	9.5	.116	2.9	18	3.2	.16	4.2	3.0	13	.16	4.1	0.020	0.5	7.00	MW	C	N
0.156	3.96	EE-1	.38	9.5	.116	2.9	9.4	1.6	.15	3.7	1.4	6.0	.23	5.8	0.020	0.5	10.5	SST	C	N
0.156	3.96	BB-73	.38	9.5	.116	2.9	7.1	1.2	.11	2.7	.74	3.3	.27	6.9	0.020	0.5	13.5	SST	CG	N
0.156	3.96	O-104	.38	9.5	.114	2.9	23	4.0	.15	3.9	3.4	15	.17	4.3	0.021	0.5	7.00	MW	C	N
0.156	3.96	B12-34	.38	9.5	.112	2.8	22	3.8	.18	4.7	3.9	18	.19	4.7	0.022	0.6	8.50	MW	CG	GI
0.156	3.96	B3-37	.38	9.5	.110	2.8	31	5.4	.14	3.7	4.5	20	.17	4.4	0.023	0.6	7.50	MW	CG	N
0.156	3.96	H-97	.38	9.5	.106	2.7	45	8.0	.12	3.0	5.4	24	.19	4.8	0.025	0.6	7.50	MW	CG	GI
0.156	3.96	MM-25	.38	9.5	.102	2.6	59	10	.11	2.9	6.7	30	.22	5.5	0.027	0.7	8.00	MW	CG	N
0.156	3.96	G-31	.38	9.5	.100	2.5	94	16	.08	2.0	7.5	33	.21	5.3	0.028	0.7	6.50	MW	C	N
0.156	3.96	W-76	.38	9.5	.096	2.4	84	15	.07	1.8	6.1	27	.27	6.9	0.030	0.8	8.00	SST	C	N
0.156	3.96	B12-29	.38	9.5	.080	2.0	365	64	.03	.84	12	54	.27	6.8	0.038	1.0	7.00	SPR	CG	N
0.156	3.96	B17-135	.41	10.3	.140	3.6	.23	.04	.32	8.1	.07	.32	.09	2.2	0.008	0.2	10.0	MW	C	N
0.156	3.96	M-72	.41	10.3	.138	3.5	.30	.05	.29	7.3	.09	.38	.12	3.0	0.009	0.2	12.0	MW	C	N
0.156	3.96	B15-11	.41	10.3	.122	3.1	6.4	1.1	.24	6.0	1.5	6.7	.17	4.3	0.017	0.4	9.00	MW	C	N
0.156	3.96	B11-50	.41	10.3	.116	2.9	11	2.0	.21	5.2	2.4	10	.20	5.1	0.020	0.5	10.0	MW	CG	N
0.156	3.96	B15-37	.41	10.3	.112	2.8	28	4.9	.14	3.6	3.9	18	.18	4.5	0.022	0.6	7.00	MW	C	N
0.156	3.96	B18-138	.44	11.1	.136	3.5	1.2	.20	.37	9.3	.42	1.9	.07	1.8	0.010	0.3	6.00	MW	C	GI
0.156	3.96	3726	.44	11.1	.124	3.1	4.3	.75	.26	6.7	1.1	5.0	.18	4.5	0.016	0.4	10.0	MW	C	Z
0.156	3.96	2942	.44	11.1	.116	2.9	18	3.2	.16	4.2	3.0	13	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.156	3.96	3729	.47	11.9	.130	3.3	2.2	.38	.30	7.5	.64	2.8	.12	3.1	0.013	0.3	8.50	HD	C	Z
0.156	3.96	2806	.47	11.9	.124	3.1	5.5	.96	.28	7.2	1.6	6.9	.15	3.8	0.016	0.4	8.25	MW	C	Z
0.156	3.96	S-497	.50	12.7	.144	3.7	.06	.01	.43	11	.03	.12	.07	1.7	0.006	0.2	10.0	SST	C	N
0.156	3.96	A10-42	.50	12.7	.138	3.5	.31	.05	.40	10	.12	.55	.10	2.6	0.009	0.2	10.5	SST	C	N
0.156	3.96	B18-128	.50	12.7	.136	3.5	1.3	.22	.22	5.5	.27	1.2	.06	1.6	0.010	0.3	5.25	SST	C	N
0.156	3.96	U-92	.50	12.7	.128	3.3	1.2	.21	.23	5.9	.28	1.3	.27	6.8	0.014	0.4	18.0	MW	C	Z
0.156	3.96	CC-18	.50	12.7	.124	3.1	3.8	.67	.31	7.8	1.2	5.2	.19	4.9	0.016	0.4	11.0	MW	C	N
0.156	3.96	GG-16	.50	12.7	.116	2.9	9.4	1.6	.21	5.4	2.0	8.8	.23	5.8	0.020	0.5	10.5	SST	C	N
0.156	3.96	S-703	.50	12.7	.112	2.8	14	2.5	.18	4.7	2.6	12	.25	6.4	0.022	0.6	10.5	SST	C	N
0.156	3.96	N-33	.50	12.7	.104	2.6	33	5.8	.18	4.6	6.0	27	.29	7.3	0.026	0.7	11.0	MW	CG	Z
0.156	3.96	S-110	.50	12.7	.102	2.6	52	9.0	.09	2.2	4.5	20	.283	7.2	0.028	0.7	9.1	SST	C	N
0.156	3.96	905	.50	12.7	.096	2.4	97	17	.09	2.4	9.1	40	.27	6.9	0.030	0.8	8.00	MW	C	Z
0.156	3.96	11261	.50	12.7	.092	2.3	127	22	.06	1.5	7.3	32	.27	6.9	0.032	0.8	7.50	SST	C	N
0.156	3.96	B8-15	.53	13.5	.112	2.8	13	2.2	.25	6.2	3.1	14	.29	7.3	0.022	0.6	13.0	MW	CG	N
0.156	3.96	N-34	.53	13.5	.108	2.7	24	4.3	.21	5.3	5.1	23	.25	6.4	0.024	0.6	10.5	MW	CG	GI
0.156	3.96	S-3205	.53	13.5	.078	2.0	230	40	.05	1.3	12	54	.39	9.9	0.039	1.0	10.0	SST	CG	N
0.156	3.96	U-88	.56	14.3	.132	3.4	1.2	.22	.43	11	.54	2.4	.13	3.4	0.012	0.3	10.0	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.156	3.96	2916	.56	14.3	.116	2.9	11	1.9	.28	7.2	3.0	13	.23	5.9	0.020	0.5	10.6	MW	C	Z
0.156	3.96	906	.56	14.3	.110	2.8	19	3.3	.24	6.0	4.5	20	.28	7.0	0.023	0.6	11.0	MW	C	Z
0.156	3.96	3923	.56	14.3	.106	2.7	26	4.5	.14	3.6	3.6	16	.26	6.7	0.025	0.6	10.5	SST	CG	N
0.156	3.96	3982	.56	14.3	.106	2.7	25	4.4	.22	5.5	5.4	24	.33	8.3	0.025	0.6	12.0	MW	C	Z
0.156	3.96	10074	.56	14.3	.104	2.6	36	6.3	.17	4.2	6.0	27	.27	6.8	0.026	0.7	10.3	MW	CG	Z
0.156	3.96	A15-42	.56	14.3	.102	2.6	47	8.3	.14	3.6	6.7	30	.26	6.5	0.027	0.7	9.50	MW	CG	GI
0.156	3.96	L-75	.56	14.3	.082	2.1	178	31	.06	1.6	11	50	.44	11.3	0.037	0.9	11.0	SPR	C	N
0.156	3.96	11112	.59	15.1	.128	3.3	2.5	.44	.29	7.4	.74	3.3	.14	3.5	0.014	0.4	8.75	SST	C	N
0.156	3.96	EE-51	.59	15.1	.116	2.9	11	2.0	.26	6.6	3.0	13	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.156	3.96	NN-66	.59	15.1	.110	2.8	14	2.5	.21	5.4	3.0	13	.31	7.9	0.023	0.6	12.5	SST	C	N
0.156	3.96	392	.63	15.9	.134	3.4	1.2	.21	.47	12	.57	2.5	.10	2.4	0.011	0.3	7.75	MW	C	Z
0.156	3.96	11404	.63	15.9	.130	3.3	2.3	.41	.40	10	.93	4.1	.12	3.0	0.013	0.3	8.00	MW	C	Z
0.156	3.96	GG-52	.63	15.9	.126	3.2	1.7	.30	.36	9.0	.61	2.7	.27	6.9	0.015	0.4	17.0	MW	C	N
0.156	3.96	10016	.63	15.9	.116	2.9	15	2.7	.20	5.0	3.0	13	.18	4.6	0.020	0.5	8.00	MW	C	Z
0.156	3.96	GG-45	.63	15.9	.116	2.9	18	3.2	.16	4.2	3.0	13	.16	4.1	0.020	0.5	7.00	MW	C	N
0.156	3.96	S-704	.63	15.9	.112	2.8	11	2.0	.23	5.9	2.6	12	.30	7.7	0.022	0.6	12.8	SST	C	N
0.156	3.96	S-859	.63	15.9	.112	2.8	9.7	1.7	.27	6.8	2.6	12	.34	8.7	0.022	0.6	14.5	SST	C	N
0.156	3.96	S-1101	.63	15.9	.108	2.7	16	2.7	.22	5.5	3.4	15	.32	8.2	0.024	0.6	13.5	SST	CG	N
0.156	3.96	M-121	.66	16.7	.118	3.0	5.2	.91	.33	8.5	1.7	7.7	.32	8.2	0.019	0.5	16.0	MW	C	BO
0.156	3.96	B2-32	.67	17.1	.136	3.5	.39	.07	.52	13	.20	.89	.15	3.8	0.010	0.3	14.0	MW	C	N
0.156	3.96	U-17	.69	17.4	.126	3.2	1.9	.33	.45	12	.85	3.8	.23	5.7	0.015	0.4	14.0	SST	C	N
0.156	3.96	WW-23	.69	17.4	.124	3.1	1.9	.34	.39	9.9	.75	3.3	.30	7.5	0.016	0.4	17.5	SST	C	N
0.156	3.96	LL-82	.69	17.4	.118	3.0	7.9	1.4	.22	5.5	1.7	7.6	.21	5.3	0.019	0.5	10.0	SST	C	N
0.156	3.96	CC-90	.69	17.4	.116	2.9	6.1	1.1	.33	8.3	2.0	8.8	.30	7.6	0.020	0.5	15.0	SST	CG	N
0.156	3.96	S-1179	.69	17.4	.116	2.9	11	1.9	.19	4.8	2.0	8.8	.21	5.3	0.020	0.5	9.50	SST	C	N
0.156	3.96	H-57	.69	17.4	.112	2.8	11	1.9	.36	9.1	3.8	17	.33	8.4	0.022	0.6	15.0	MW	CG	N
0.156	3.96	LL-11	.69	17.4	.096	2.4	40	7.0	.15	3.9	6.1	27	.48	12.2	0.030	0.8	15.0	SST	C	N
0.156	3.96	W-34	.72	18.2	.118	3.0	3.8	.67	.37	9.3	1.4	6.3	.35	8.9	0.019	0.5	18.5	SST	CG	N
0.156	3.96	1837	.75	19.1	.140	3.6	.17	.03	.65	16	.11	.47	.10	2.6	0.008	0.2	13.0	MW	C	N
0.156	3.96	2505	.75	19.1	.136	3.5	.36	.06	.59	15	.21	.93	.16	4.1	0.010	0.3	15.0	MW	C	Z
0.156	3.96	PP-30	.75	19.1	.136	3.5	.31	.05	.57	14	.18	.78	.18	4.6	0.010	0.3	17.0	MW	C	N
0.156	3.96	JJ-84	.75	19.1	.124	3.1	2.5	.43	.48	12	1.2	5.2	.27	6.9	0.016	0.4	16.0	MW	C	GI
0.156	3.96	II-50	.75	19.1	.120	3.0	3.6	.63	.43	11	1.5	6.8	.32	8.2	0.018	0.5	18.0	MW	CG	Z
0.156	3.96	S-705	.75	19.1	.112	2.8	9.2	1.6	.29	7.3	2.6	12	.36	9.1	0.022	0.6	15.3	SST	C	N
0.156	3.96	KK-37	.75	19.1	.110	2.8	17	3.0	.26	6.7	4.5	20	.30	7.6	0.023	0.6	12.0	MW	C	GI
0.156	3.96	V-25	.81	20.6	.116	2.9	4.8	.84	.39	10	1.9	8.4	.42	10.7	0.020	0.5	21.0	MW	CG	Z
0.156	3.96	B7-6	.81	20.6	.116	2.9	5.0	.88	.39	9.8	1.9	8.6	.43	10.8	0.020	0.5	20.3	MW	C	Z
0.156	3.96	10313	.81	20.6	.100	2.5	26	4.6	.28	7.2	7.5	33	.50	12.8	0.028	0.7	18.0	MW	CG	GI
0.156	3.96	B15-67	.84	21.4	.132	3.4	.59	.10	.60	15	.35	1.6	.24	6.1	0.012	0.3	19.0	MW	C	N
0.156	3.96	CC-25	.88	22.2	.132	3.4	.74	.13	.68	17	.50	2.2	.20	5.0	0.012	0.3	15.5	MW	C	Z
0.156	3.96	II-45	.88	22.2	.132	3.4	.21	.04	.34	8.5	.07	.31	.54	13.7	0.012	0.3	44.0	SST	C	N
0.156	3.96	2658	.88	22.2	.130	3.3	.83	.14	.62	16	.51	2.3	.26	6.6	0.013	0.3	19.0	MW	C	GI
0.156	3.96	OO-83	.88	22.2	.126	3.2	1.6	.28	.59	15	.96	4.3	.29	7.2	0.015	0.4	18.0	MW	C	N
0.156	3.96	3777	.88	22.2	.124	3.1	2.2	.39	.58	15	1.3	5.7	.30	7.5	0.016	0.4	17.5	MW	C	Z
0.156	3.96	V-31	.88	22.2	.118	3.0	3.4	.60	.47	12	1.6	7.1	.41	10.4	0.019	0.5	20.5	SST	C	N
0.156	3.96	1619	.88	22.2	.112	2.8	12	2.0	.34	8.6	3.9	18	.33	8.4	0.022	0.6	14.0	MW	C	Z
0.156	3.96	S-706	.88	22.2	.112	2.8	7.7	1.4	.34	8.6	2.6	12	.41	10.5	0.022	0.6	17.8	SST	C	N
0.156	3.96	OO-17	.88	22.2	.096	2.4	45	7.8	.20	5.1	9.1	40	.48	12.2	0.030	0.8	15.0	MW	C	N
0.156	3.96	Y-48	.91	23.0	.106	2.7	21	3.6	.26	6.6	5.4	24	.38	9.5	0.025	0.6	14.0	MW	C	N
0.156	3.96	B15-20	.94	23.8	.102	2.6	27	4.8	.25	6.2	6.7	30	.41	10.3	0.027	0.7	15.0	MW	CG	Z
0.156	3.96	S-1165	.94	23.8	.096	2.4	25	4.4	.24	6.1	6.1	27	.66	16.8	0.030	0.8	22.0	SST	CG	N
0.156	3.96	393	1.00	25.4	.134	3.4	.73	.13	.78	20	.57	2.5	.14	3.5	0.011	0.3	11.5	MW	C	Z
0.156	3.96	356-A	1.00	25.4	.130	3.3	1.2	.22	.74	19	.93	4.1	.19	4.7	0.013	0.3	13.3	MW	C	Z
0.156	3.96	355-A	1.00	25.4	.128	3.3	1.6	.28	.72	18	1.2	5.1	.21	5.3	0.014	0.4	14.0	MW	C	Z
0.156	3.96	S-1025	1.00	25.4	.128	3.3	.99	.17	.72	18	.71	3.2	.28	7.1	0.014	0.4	19.0	SST	C	N
0.156	3.96	PP-7	1.00	25.4	.128	3.3	1.2	.21	.73	19	.88	3.9	.27	6.8	0.014	0.4	18.0	MW	C	N
0.156	3.96	157-A	1.00	25.4	.124	3.1	2.5	.45	.61	16	1.6	6.9	.26	6.7	0.016	0.4	15.5	MW	C	Z
0.156	3.96	TT-27	1.00	25.4	.124	3.1	1.4	.24	.55	14	.76	3.4	.45	11.4	0.016	0.4	27.0	MW	C	N
0.156	3.96	158-A	1.00	25.4	.100	2.5	23	4.0	.32	8.2	7.5	33	.60	15.1	0.028	0.7	20.3	MW	C	Z
0.156	3.96	2938	1.06	27.0	.136	3.5	.26	.04	.85	22	.22	.97	.21	5.3	0.010	0.3	20.0	MW	C	Z
0.156	3.96	A9-36	1.06	27.0	.126	3.2	1.4	.24	.63	16	.85	3.8	.30	7.6	0.015	0.4	19.0	SST	C	N
0.156	3.96	PP-18	1.25	31.8	.116	2.9	3.8	.67	.71	18	2.7	12	.54	13.7	0.020	0.5	26.0	MW	C	N
0.156	3.96	3823	1.25	31.8	.110	2.8	10	1.8	.45	11	4.5	20	.46	11.7	0.023	0.6	19.0	MW	C	GI
0.156	3.96	S-1318	1.25	31.8	.094	2.4	21	3.7	.32	8.0	6.7	30	.93	23.6	0.031	0.8	30.0	SST	CG	N
0.156	3.96	907	1.25	31.8	.086	2.2	68	12	.20	5.0	13	59	.74	18.7	0.035	0.9	20.0	MW	C	Z
0.156	3.96	B9-47	1.25	31.8	.084	2.1	53	9.2	.20	5.0	10	46	1.03	26.1	0.036	0.9	28.5	SPR	CG	Z
0.156	3.96	JJ-48	1.34	34.1	.118	3.0	2.9	.51	.81	21	2.4	11	.53	13.5	0.019	0.5	27.0	MW	C	N
0.156	3.96	356-B	1.38	34.9	.130	3.3	.89	.16	1.0	26	.93	4.1	.24	6.2	0.013	0.3	17.8	MW	C	Z
0.156	3.96	355-B	1.38	34.9	.128	3.3	1.2	.20	1.0	26	1.2	5.1	.28	7.0	0.014	0.4	18.8	MW	C	Z
0.156	3.96	157-B	1.38	34.9	.124	3.1	1.8	.32	.85	22	1.6	6.9	.35	8.8	0.016	0.4	20.8	MW	C	Z
0.156	3.96	N-86	1.38	34.9	.122	3.1	1.6	.29	.86	22	1.4	6.3	.51	13.1	0.017	0.4	29.3	MW	C	Z
0.156	3.96	158-B	1.38	34.9	.100	2.5	16	2.9	.46	12	7.5	33	.81	20.4	0.028	0.7	27.8	MW	C	Z
0.156	3.96	OO-50	1.50	38.1	.116	2.9	4.0	.70	.75	19	3.0	13	.50	12.7	0.020	0.5	25.0	MW	CG	N
0.156	3.96	10612	1.53	38.9	.086	2.2	43	7.6	.22	5.6	9.6	43	1.09	27.6	0.035	0.9	30.0	SPR	C	Z
0.156	3.96	O-153	1.56	39.7	.116	2.9	2.4	.42	.74	19	1.8	7.9	.82	20.8	0.020	0.5	40.0	MW	C	Z
0.156	3.96	S-1235	1.56	39.7	.112	2.8	3.2	.56	.66	17	2.1	9.4	.90	22.9	0.022	0.6	40.0	SST	C	N
0.156	3.96	A10-15	1.63	41.3	.126	3.2	1.0	.18	1.2	31	1.3	5.6	.42	10.7	0.015	0.4	27.0	MW	C	Z
0.156	3.96	EE-66	1.75	44.5	.136	3.5	.12	.02	1.3	34	.16	.72	.41	10.4	0.010	0.3	40.0	MW	C	N
0.156	3.96	356-C	1.75	44.5	.130	3.3	.70	.12	1.3	34	.93	4.1	.30	7.6	0.013	0.3	22.0	MW	C	Z
0.156	3.96	355-C	1.75	44.5	.128	3.3	.90	.16	1.3	33	1.2	5.1	.34	8.7	0.014	0.4	23.5	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.156	3.96	157-C	1.75	44.5	.124	3.1	1.4	.25	1.1	28	1.6	6.9	.43	11.0	0.016	0.4	26.0	MW	C	Z
0.156	3.96	O-114	1.75	44.5	.102	2.6	9.8	1.7	.46	12	4.5	20	.93	23.7	0.027	0.7	33.5	SST	C	N
0.156	3.96	158-C	1.75	44.5	.100	2.5	13	2.2	.59	15	7.5	33	1.02	25.8	0.028	0.7	35.3	MW	C	Z
0.156	3.96	1575	2.88	73.0	.126	3.2	.25	.04	1.3	33	.32	1.4	1.59	40.4	0.015	0.4	105.0	MW	C	Z
0.156	3.96	10851	3.31	84.1	.110	2.8	3.7	.64	.82	21	3.0	13	1.02	26.0	0.023	0.6	43.5	SST	C	N
0.156	3.96	A10-63	3.75	95.3	.110	2.8	3.3	.57	.92	23	3.0	13	1.14	28.9	0.023	0.6	48.5	SST	C	N
0.158	4.01	10242	.75	19.1	.116	2.9	14	2.4	.25	6.4	3.4	15	.23	5.9	0.021	0.5	10.0	MW	C	Z
0.168	4.27	12749	.47	11.9	.120	3.0	21	3.7	.22	5.5	4.6	21	.25	6.4	0.024	0.6	9.50	MW	C	N
0.172	4.37	S-1093	.19	4.8	.152	3.9	1.2	.21	.13	3.4	.16	.70	.06	1.4	0.010	0.3	4.50	SST	C	N
0.172	4.37	L-80	.19	4.8	.140	3.6	8.3	1.4	.09	2.3	.76	3.4	.10	2.4	0.016	0.4	5.00	MW	C	N
0.172	4.37	M-31	.19	4.8	.114	2.9	103	18	.04	1.1	4.4	19	.15	3.7	0.029	0.7	5.00	SST	CG	N
0.172	4.37	BB-45	.22	5.6	.136	3.5	13	2.3	.10	2.5	1.3	5.9	.09	2.2	0.018	0.5	4.75	SST	CG	N
0.172	4.37	KK-23	.25	6.4	.144	3.7	5.6	.98	.17	4.4	.97	4.3	.08	2.0	0.014	0.4	4.50	MW	C	N
0.172	4.37	B5-8	.25	6.4	.140	3.6	9.9	1.7	.14	3.6	1.4	6.3	.07	1.8	0.016	0.4	4.50	MW	CG	N
0.172	4.37	CC-37	.25	6.4	.132	3.4	16	2.8	.11	2.8	1.8	8.1	.13	3.3	0.020	0.5	5.50	SST	C	N
0.172	4.37	B-17	.25	6.4	.116	2.9	64	11	.05	1.4	3.5	15	.20	5.0	0.028	0.7	6.00	SST	C	N
0.172	4.37	J-43	.25	6.4	.116	2.9	118	21	.06	1.5	6.9	30	.15	3.9	0.028	0.7	4.50	MW	C	N
0.172	4.37	AA-77	.25	6.4	.112	2.8	136	24	.06	1.6	8.4	37	.18	4.6	0.030	0.8	5.00	MW	C	Z
0.172	4.37	NN-82	.28	7.1	.156	4.0	.24	.04	.21	5.4	.05	.23	.07	1.7	0.008	0.2	7.50	MW	C	N
0.172	4.37	Y-92	.28	7.1	.136	3.5	12	2.1	.16	4.2	1.9	8.6	.12	3.0	0.018	0.5	5.50	MW	C	N
0.172	4.37	W-1	.28	7.1	.108	2.7	136	24	.05	1.3	6.7	30	.18	4.5	0.032	0.8	5.50	SST	CG	N
0.172	4.37	A9-24	.31	7.9	.148	3.8	3.6	.64	.18	4.7	.67	3.0	.06	1.5	0.012	0.3	4.00	MW	C	N
0.172	4.37	OO-38	.31	7.9	.148	3.8	1.5	.25	.23	5.8	.33	1.5	.08	2.1	0.012	0.3	7.00	MW	CG	N
0.172	4.37	A14-10	.31	7.9	.140	3.6	8.3	1.4	.17	4.4	1.4	6.3	.08	2.0	0.016	0.4	5.00	MW	CG	N
0.172	4.37	S-1202	.31	7.9	.128	3.3	17	3.0	.14	3.5	2.4	10	.18	4.5	0.022	0.6	7.00	SST	C	N
0.172	4.37	A11-22	.31	7.9	.126	3.2	32	5.7	.13	3.2	4.1	18	.13	3.4	0.023	0.6	5.75	MW	CG	GI
0.172	4.37	A15-19	.34	8.7	.140	3.6	6.2	1.1	.23	5.8	1.4	6.3	.11	2.8	0.016	0.4	6.00	MW	C	N
0.172	4.37	B18-127	.34	8.7	.136	3.5	6.9	1.2	.22	5.5	1.5	6.6	.13	3.2	0.018	0.5	6.00	MW	O	N
0.172	4.37	10768	.34	8.7	.122	3.1	51	8.8	.10	2.5	4.9	22	.16	4.1	0.025	0.6	5.50	MW	C	N
0.172	4.37	N-301	.34	8.7	.120	3.0	62	11	.06	1.5	3.7	16	.16	4.0	0.026	0.7	5.00	SST	C	N
0.172	4.37	GG-37	.34	8.7	.102	2.6	122	21	.06	1.6	7.7	34	.28	7.1	0.035	0.9	8.00	SST	CG	N
0.172	4.37	12654	.34	8.7	.142	3.6	4.7	.82	.24	6.1	1.1	5.0	.11	2.7	0.015	0.4	6.00	MW	C	N
0.172	4.37	OO-30	.38	9.5	.148	3.8	1.1	.18	.27	6.8	.28	1.3	.11	2.7	0.012	0.3	8.00	SST	C	N
0.172	4.37	JJ-41	.38	9.5	.138	3.5	6.4	1.1	.24	6.1	1.5	6.9	.14	3.5	0.017	0.4	7.00	MW	C	Z
0.172	4.37	JJ-50	.38	9.5	.132	3.4	15	2.5	.13	3.2	1.8	8.1	.14	3.6	0.020	0.5	6.00	SST	C	N
0.172	4.37	O-71	.38	9.5	.132	3.4	13	2.3	.21	5.3	2.7	12	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.172	4.37	AA-3	.38	9.5	.122	3.1	44	7.7	.11	2.8	4.9	22	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.172	4.37	DD-2	.38	9.5	.108	2.7	96	17	.07	1.8	6.7	30	.22	5.7	0.032	0.8	7.00	SST	CG	N
0.172	4.37	J-95	.41	10.3	.142	3.6	2.4	.41	.24	6.1	.57	2.5	.17	4.2	0.015	0.4	10.0	MW	C	Z
0.172	4.37	NN-18	.41	10.3	.142	3.6	2.5	.44	.26	6.7	.66	2.9	.14	3.6	0.015	0.4	9.50	MW	CG	N
0.172	4.37	NN-63	.41	10.3	.126	3.2	20	3.5	.20	5.1	4.0	18	.21	5.3	0.023	0.6	8.00	MW	C	N
0.172	4.37	B5-21	.41	10.3	.120	3.0	42	7.4	.13	3.3	5.5	25	.21	5.3	0.026	0.7	7.00	MW	C	N
0.172	4.37	B-56	.41	10.3	.116	2.9	66	11	.07	1.8	4.6	20	.20	5.0	0.028	0.7	6.00	SST	C	N
0.172	4.37	EE-85	.41	10.3	.112	2.8	74	13	.11	2.9	8.4	37	.26	6.5	0.030	0.8	7.50	MW	C	N
0.172	4.37	J-3	.41	10.3	.096	2.4	208	36	.05	1.4	11	50	.30	7.7	0.038	1.0	8.00	SPR	CG	Z
0.172	4.37	12642	.42	10.7	.112	2.8	59	10	.09	2.4	5.6	25	.24	6.1	0.030	0.8	8.00	SST	CG	N
0.172	4.37	S-1463	.44	11.1	.160	4.1	.06	.01	.38	9.8	.02	.10	.05	1.4	0.006	0.2	8.00	SST	C	N
0.172	4.37	I-6	.44	11.1	.152	3.9	.16	.03	.20	5.0	.03	.14	.24	6.1	0.010	0.3	23.0	MW	C	BO
0.172	4.37	3795	.44	11.1	.144	3.7	2.0	.35	.31	7.9	.62	2.8	.13	3.2	0.014	0.4	9.00	MW	CG	Z
0.172	4.37	JJ-66	.44	11.1	.136	3.5	3.4	.60	.21	5.4	.73	3.2	.23	5.7	0.018	0.5	12.5	SST	CG	N
0.172	4.37	B5-5	.44	11.1	.136	3.5	7.2	1.3	.28	7.1	2.0	8.9	.16	4.0	0.018	0.5	7.75	MW	C	N
0.172	4.37	NN-23	.44	11.1	.134	3.4	11	2.0	.14	3.5	1.6	7.0	.13	3.4	0.019	0.5	6.00	SST	C	N
0.172	4.37	FF-74	.44	11.1	.132	3.4	9.4	1.6	.24	6.0	2.2	9.9	.20	5.1	0.020	0.5	9.00	MW	C	Z
0.172	4.37	M-1	.44	11.1	.132	3.4	8.2	1.4	.22	5.5	1.8	7.9	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.172	4.37	OO-65	.44	11.1	.132	3.4	14	2.5	.19	4.9	2.7	12	.22	5.6	0.020	0.5	9.00	MW	C	Z
0.172	4.37	U-57	.44	11.1	.132	3.4	11	2.0	.16	4.1	1.8	8.1	.16	4.1	0.020	0.5	7.00	SST	C	N
0.172	4.37	V-47	.44	11.1	.132	3.4	4.8	.85	.14	3.5	.67	3.0	.30	7.6	0.020	0.5	14.0	SST	C	N
0.172	4.37	A14-2	.44	11.1	.122	3.1	26	4.6	.13	3.2	3.3	15	.20	5.1	0.025	0.6	8.00	SST	CG	N
0.172	4.37	AA-45	.44	11.1	.118	3.0	44	7.6	.09	2.4	4.1	18	.22	5.5	0.027	0.7	7.00	SST	C	N
0.172	4.37	TT-7	.44	11.1	.112	2.8	68	12	.12	3.1	8.4	37	.27	6.9	0.030	0.8	8.00	MW	C	Z
0.172	4.37	12528	.45	11.5	.124	3.1	16	2.9	.17	4.2	2.7	12	.29	7.3	0.024	0.6	11.0	MW	C	N
0.172	4.37	A12-19	.45	11.5	.122	3.1	22	3.9	.18	4.5	3.9	17	.28	7.0	0.025	0.6	10.0	MW	C	N
0.172	4.37	LL-45	.47	11.9	.146	3.7	1.0	.18	.32	8.1	.33	1.5	.15	3.8	0.013	0.3	10.5	SST	C	N
0.172	4.37	O-120	.47	11.9	.136	3.5	14	2.4	.15	3.7	2.0	8.9	.11	2.7	0.018	0.5	5.00	MW	C	Z
0.172	4.37	12485	.47	11.9	.122	3.1	20	3.4	.17	4.3	3.3	15	.30	7.6	0.025	0.6	11.0	MW	C	N
0.172	4.37	HH-24	.47	11.9	.112	2.8	51	8.9	.16	4.2	8.4	37	.30	7.6	0.030	0.8	10.0	MW	CG	Z
0.172	4.37	KK-19	.50	12.7	.152	3.9	.30	.05	.37	9.4	.11	.49	.13	3.3	0.010	0.3	12.0	SST	C	N
0.172	4.37	A-9	.50	12.7	.148	3.8	.67	.12	.35	8.9	.23	1.0	.15	3.8	0.012	0.3	11.5	SST	C	N
0.172	4.37	DD-25	.50	12.7	.144	3.7	3.0	.53	.22	5.6	.67	3.0	.10	2.5	0.014	0.4	6.00	SST	C	N
0.172	4.37	PP-83	.50	12.7	.142	3.6	3.1	.55	.37	9.3	1.1	5.1	.14	3.4	0.015	0.4	8.00	MW	C	Z
0.172	4.37	GG-40	.50	12.7	.140	3.6	3.1	.54	.31	7.8	.94	4.2	.16	4.1	0.016	0.4	9.00	SST	C	N
0.172	4.37	KK-25	.50	12.7	.136	3.5	5.9	1.0	.34	8.6	2.0	8.9	.16	4.1	0.018	0.5	9.00	MW	CG	N
0.172	4.37	B4-29	.50	12.7	.134	3.4	10	1.8	.22	5.7	2.4	10	.15	3.9	0.019	0.5	7.00	MW	C	BO
0.172	4.37	10130	.50	12.7	.128	3.3	11	1.9	.26	6.6	2.9	13	.24	6.1	0.022	0.6	11.0	MW	CG	BO
0.172	4.37	H-75	.50	12.7	.122	3.1	31	5.4	.11	2.7	3.3	15	.20	5.1	0.025	0.6	7.00	SST	C	N
0.172	4.37	W-85	.50	12.7	.120	3.0	20	3.5	.19	4.8	3.7	16	.30	7.6	0.026	0.7	11.5	SST	CG	N
0.172	4.37	AA-22	.50	12.7	.112	2.8	54	9.5	.15	3.9	8.4	37	.29	7.2	0.030	0.8	9.50	MW	CG	Z
0.172	4.37	Q-99	.50	12.7	.108	2.7	55	9.6	.12	2.9	6.4	28	.38	9.8	0.032	0.8	12.0	MW	CG	N
0.172	4.37	II-44	.50	12.7	.102	2.6	112	20	.08	2.0	8.9	40	.33	8.4	0.035	0.9	9.50	SPR	CG	N
0.172	4.37	A14-26	.53	13.5	.118	3.0	31	5.5	.20	5.0	6.2	27	.27	6.9	0.027	0.7	10.0	MW	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.172	4.37	A14-24	.53	13.5	.108	2.7	65	11	.16	3.9	10	45	.34	8.5	0.032	0.8	10.5	MW	CG	GI
0.172	4.37	S-332	.56	14.3	.152	3.9	.27	.05	.42	11	.11	.50	.14	3.6	0.010	0.3	13.0	SST	C	N
0.172	4.37	CC-41	.56	14.3	.148	3.8	.37	.07	.32	8.2	.12	.53	.24	6.1	0.012	0.3	19.0	SST	C	N
0.172	4.37	DD-19	.56	14.3	.148	3.8	.97	.17	.44	11	.42	1.9	.13	3.2	0.012	0.3	9.50	MW	C	N
0.172	4.37	B-8	.56	14.3	.132	3.4	4.6	.80	.25	6.4	1.1	5.1	.31	7.9	0.020	0.5	14.5	SST	C	N
0.172	4.37	K-75	.56	14.3	.120	3.0	22	3.9	.24	6.0	5.3	23	.33	8.3	0.026	0.7	11.5	MW	C	N
0.172	4.37	F-17	.56	14.3	.120	3.0	26	4.6	.21	5.3	5.5	25	.29	7.3	0.026	0.7	10.0	MW	C	Z
0.172	4.37	S-142	.56	14.3	.108	2.7	48	8.4	.14	3.6	6.7	30	.38	9.8	0.032	0.8	12.0	SST	CG	N
0.172	4.37	S-900	.59	15.1	.156	4.0	.13	.02	.50	13	.07	.30	.09	2.4	0.008	0.2	10.7	SST	C	N
0.172	4.37	10265	.59	15.1	.152	3.9	.56	.10	.50	13	.28	1.3	.09	2.3	0.010	0.3	8.00	MW	C	N
0.172	4.37	B15-47	.59	15.1	.136	3.5	5.2	.90	.39	9.9	2.0	8.9	.20	5.0	0.018	0.5	10.0	MW	C	N
0.172	4.37	U-96	.59	15.1	.132	3.4	8.2	1.4	.33	8.5	2.7	12	.20	5.1	0.020	0.5	10.0	MW	CG	N
0.172	4.37	FF-39	.59	15.1	.120	3.0	16	2.7	.21	5.3	3.3	15	.38	9.7	0.026	0.7	13.8	SST	C	N
0.172	4.37	S-487	.59	15.1	.114	2.9	30	5.3	.17	4.3	5.1	23	.38	9.6	0.029	0.7	12.0	SST	C	N
0.172	4.37	W-67	.59	15.1	.088	2.2	226	40	.07	1.7	15	65	.46	11.7	0.042	1.1	11.0	SPR	CG	N
0.172	4.37	L-28	.63	15.9	.144	3.7	1.2	.20	.42	11	.48	2.2	.21	5.3	0.014	0.4	14.0	MW	C	N
0.172	4.37	A14-18	.63	15.9	.136	3.5	6.7	1.2	.20	5.1	1.3	5.9	.14	3.4	0.018	0.5	7.50	SST	CG	N
0.172	4.37	S-835	.63	15.9	.136	3.5	2.8	.48	.34	8.6	.93	4.1	.29	7.3	0.018	0.5	15.0	SST	C	N
0.172	4.37	J-44	.63	15.9	.128	3.3	14	2.5	.25	6.4	3.6	16	.22	5.6	0.022	0.6	9.00	MW	C	Z
0.172	4.37	AA-65	.63	15.9	.122	3.1	14	2.4	.23	5.7	3.1	14	.40	10.2	0.025	0.6	15.0	MW	C	Z
0.172	4.37	A15-17	.63	15.9	.120	3.0	23	4.1	.24	6.0	5.5	25	.29	7.3	0.026	0.7	11.0	MW	CG	N
0.172	4.37	2520	.63	15.9	.118	3.0	36	6.3	.17	4.4	6.2	27	.27	6.9	0.027	0.7	9.00	MW	C	Z
0.172	4.37	N-109	.63	15.9	.112	2.8	37	6.5	.15	3.8	5.6	25	.35	8.8	0.030	0.8	11.5	SST	CG	N
0.172	4.37	B5-4	.66	16.7	.130	3.3	8.8	1.5	.36	9.1	3.2	14	.24	6.0	0.021	0.5	11.3	MW	CG	N
0.172	4.37	S-220	.66	16.7	.120	3.0	14	2.5	.24	6.1	3.4	15	.42	10.6	0.026	0.7	15.0	SST	C	N
0.172	4.37	DD-58	.66	16.7	.112	2.8	52	9.0	.11	2.8	5.6	25	.27	6.9	0.030	0.8	9.00	SST	CG	N
0.172	4.37	FF-38	.66	16.7	.112	2.8	34	6.0	.16	4.1	5.6	25	.38	9.5	0.030	0.8	12.5	SST	CG	N
0.172	4.37	S-1227	.69	17.4	.132	3.4	3.4	.59	.29	7.3	.96	4.3	.40	10.2	0.020	0.5	19.0	SST	C	N
0.172	4.37	BB-33	.69	17.4	.132	3.4	3.8	.66	.33	8.3	1.2	5.5	.36	9.1	0.020	0.5	17.0	SST	C	N
0.172	4.37	11364	.69	17.4	.132	3.4	5.3	.92	.34	8.7	1.8	8.1	.28	7.1	0.020	0.5	13.0	SST	C	N
0.172	4.37	FF-17	.69	17.4	.128	3.3	11	1.9	.22	5.6	2.4	11	.24	6.1	0.022	0.6	10.0	SST	C	N
0.172	4.37	L-93	.72	18.2	.128	3.3	8.1	1.4	.38	9.7	3.1	14	.34	8.5	0.022	0.6	14.3	MW	C	Z
0.172	4.37	B7-48	.72	18.2	.122	3.1	17	3.0	.29	7.3	4.9	22	.31	7.8	0.025	0.6	12.3	MW	CG	N
0.172	4.37	B-13	.72	18.2	.120	3.0	16	2.8	.23	5.9	3.7	16	.38	9.6	0.026	0.7	13.5	SST	C	N
0.172	4.37	PP-22	.72	18.2	.098	2.5	108	19	.09	2.3	9.7	43	.44	11.3	0.037	0.9	11.0	SST	C	N
0.172	4.37	PP-26	.75	19.1	.156	4.0	.13	.02	.65	16	.09	.38	.10	2.6	0.008	0.2	12.0	MW	C	N
0.172	4.37	WW-31	.75	19.1	.146	3.7	.89	.16	.58	15	.52	2.3	.17	4.3	0.013	0.3	12.0	SST	C	N
0.172	4.37	S-1069	.75	19.1	.144	3.7	.87	.15	.51	13	.45	2.0	.24	6.0	0.014	0.4	16.0	SST	C	N
0.172	4.37	11457	.75	19.1	.144	3.7	1.6	.27	.43	11	.67	3.0	.15	3.9	0.014	0.4	10.0	SST	C	N
0.172	4.37	O-110	.75	19.1	.142	3.6	2.4	.41	.50	13	1.2	5.2	.15	3.8	0.015	0.4	10.0	MW	CG	N
0.172	4.37	3582	.75	19.1	.140	3.6	2.3	.40	.53	13	1.2	5.3	.22	5.7	0.016	0.4	13.0	MW	C	GI
0.172	4.37	MM-21	.75	19.1	.140	3.6	1.8	.31	.51	13	.90	4.0	.24	6.1	0.016	0.4	14.0	MW	O	Z
0.172	4.37	KK-15	.75	19.1	.132	3.4	6.7	1.2	.27	6.9	1.8	8.1	.23	5.8	0.020	0.5	10.5	SST	C	N
0.172	4.37	A12-26	.75	19.1	.132	3.4	5.5	.96	.45	11	2.5	11	.30	7.6	0.020	0.5	14.0	MW	C	Z
0.172	4.37	B-75	.75	19.1	.130	3.3	8.1	1.4	.39	9.9	3.2	14	.27	6.9	0.021	0.5	12.0	MW	C	Z
0.172	4.37	J-93	.75	19.1	.090	2.3	139	24	.10	2.5	14	61	.62	15.6	0.041	1.0	15.0	SPR	CG	N
0.172	4.37	AA-29	.78	19.8	.152	3.9	.38	.07	.66	17	.25	1.1	.12	3.0	0.010	0.3	11.0	MW	C	Z
0.172	4.37	A15-11	.78	19.8	.140	3.6	3.1	.54	.46	12	1.4	6.3	.18	4.5	0.016	0.4	10.0	MW	C	N
0.172	4.37	B10-38	.81	20.6	.152	3.9	.29	.05	.67	17	.20	.87	.15	3.7	0.010	0.3	13.5	MW	C	N
0.172	4.37	W-36	.84	21.4	.110	2.8	43	7.5	.21	5.4	9.2	41	.43	11.0	0.031	0.8	13.0	MW	C	N
0.172	4.37	G-56	.88	22.2	.142	3.6	1.3	.24	.62	16	.83	3.7	.26	6.5	0.015	0.4	16.0	MW	C	N
0.172	4.37	1829	.88	22.2	.140	3.6	1.8	.31	.60	15	1.1	4.8	.27	6.9	0.016	0.4	16.0	MW	C	Z
0.172	4.37	B-59	.88	22.2	.138	3.5	2.3	.40	.59	15	1.3	6.0	.29	7.3	0.017	0.4	16.0	MW	C	N
0.172	4.37	G-38	.88	22.2	.130	3.3	4.8	.84	.46	12	2.2	9.7	.42	10.7	0.021	0.5	19.0	MW	C	Z
0.172	4.37	10186	.88	22.2	.128	3.3	8.3	1.5	.43	11	3.6	16	.33	8.4	0.022	0.6	14.0	MW	C	Z
0.172	4.37	V-56	.88	22.2	.128	3.3	5.9	1.0	.44	11	2.6	11	.44	11.2	0.022	0.6	19.0	MW	C	N
0.172	4.37	S-1693	.89	22.6	.124	3.1	9.8	1.7	.31	8.0	3.1	14	.36	9.1	0.024	0.6	15.0	SST	CG	N
0.172	4.37	OO-42	.94	23.8	.140	3.6	2.1	.36	.69	17	1.4	6.3	.24	6.1	0.016	0.4	14.0	MW	C	Z
0.172	4.37	Z-79	.94	23.8	.108	2.7	37	6.4	.18	4.7	6.7	30	.51	13.0	0.032	0.8	15.0	SST	C	N
0.172	4.37	J-9	1.00	25.4	.150	3.8	.27	.05	.79	20	.22	.96	.21	5.3	0.011	0.3	18.0	SST	C	N
0.172	4.37	OO-81	1.00	25.4	.148	3.8	.73	.13	.84	21	.61	2.7	.16	4.0	0.012	0.3	12.0	MW	C	BO
0.172	4.37	S-1077	1.00	25.4	.136	3.5	3.6	.63	.37	9.4	1.3	5.9	.23	5.9	0.018	0.5	12.0	SST	C	N
0.172	4.37	S-1346	1.00	25.4	.132	3.4	4.4	.77	.41	11	1.8	8.1	.32	8.1	0.020	0.5	15.0	SST	C	N
0.172	4.37	A12-28	1.00	25.4	.120	3.0	13	2.3	.42	11	5.5	25	.49	12.5	0.026	0.7	18.0	MW	C	N
0.172	4.37	B2-36	1.00	25.4	.118	3.0	24	4.2	.26	6.6	6.2	27	.37	9.3	0.027	0.7	12.5	MW	C	Z
0.172	4.37	10635	1.00	25.4	.102	2.6	59	10	.15	3.8	8.9	40	.60	15.3	0.035	0.9	16.3	SPR	C	N
0.172	4.37	GG-31	1.06	27.0	.108	2.7	27	4.7	.27	6.9	7.2	32	.72	18.3	0.032	0.8	22.5	SPR	CG	N
0.172	4.37	A15-12	1.09	27.8	.106	2.7	39	6.8	.19	4.8	7.3	33	.54	13.8	0.033	0.8	16.5	SST	CG	N
0.172	4.37	JJ-31	1.09	27.8	.102	2.6	37	6.6	.22	5.7	8.3	37	.75	19.1	0.035	0.9	21.5	SST	CG	N
0.172	4.37	B2-2	1.13	28.6	.132	3.4	4.1	.72	.67	17	2.7	12	.38	9.7	0.020	0.5	18.0	MW	CL	N
0.172	4.37	B2-54	1.13	28.6	.122	3.1	9.3	1.6	.36	9.0	3.3	15	.49	12.4	0.025	0.6	18.5	SST	C	N
0.172	4.37	2874	1.13	28.6	.112	2.8	27	4.7	.31	7.8	8.4	37	.54	13.7	0.030	0.8	17.0	MW	C	Z
0.172	4.37	Y-54	1.16	29.4	.136	3.5	2.1	.37	.63	16	1.3	5.9	.36	9.1	0.018	0.5	19.0	SST	C	N
0.172	4.37	S-6	1.16	29.4	.116	2.9	14	2.5	.32	8.1	4.6	20	.60	15.1	0.028	0.7	20.3	SST	C	N
0.172	4.37	B11-47	1.16	29.4	.110	2.8	24	4.1	.39	9.8	9.2	41	.68	17.3	0.031	0.8	22.0	MW	CG	N
0.172	4.37	10970	1.22	31.0	.122	3.1	9.4	1.7	.52	13	4.9	22	.54	13.8	0.025	0.6	20.8	MW	C	N
0.172	4.37	L-25	1.25	31.8	.140	3.6	1.7	.29	.86	22	1.4	6.3	.29	7.3	0.016	0.4	17.0	MW	C	N
0.172	4.37	K-17	1.25	31.8	.128	3.3	8.3	1.5	.43	11	3.6	16	.33	8.4	0.022	0.6	14.0	MW	C	N
0.172	4.37	10764	1.25	31.8	.124	3.1	6.9	1.2	.45	11	3.1	14	.53	13.4	0.024	0.6	21.0	SST	C	N
0.172	4.37	12515	1.25	31.8	.122	3.1	9.3	1.6	.53	13	4.9	22	.55	14.0	0.025	0.6	21.0	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.172	4.37	Q-79	1.38	34.9	.142	3.6	.72	.13	.94	24	.68	3.0	.44	11.0	0.015	0.4	28.0	MW	C	N
0.172	4.37	LL-74	1.50	38.1	.128	3.3	3.1	.54	.77	20	2.4	11	.68	17.3	0.022	0.6	30.0	SST	C	N
0.172	4.37	10261	1.56	39.7	.122	3.1	5.9	1.0	.74	19	4.3	19	.83	21.0	0.025	0.6	32.0	MW	C	Z
0.172	4.37	10859	1.75	44.5	.102	2.6	39	6.9	.21	5.4	8.3	37	.74	18.7	0.035	0.9	21.0	SST	CG	N
0.172	4.37	Y-61	1.94	49.2	.136	3.5	.92	.16	1.2	30	1.1	4.8	.76	19.2	0.018	0.5	41.0	SST	C	N
0.172	4.37	B15-41	2.25	57.2	.156	4.0	.07	.01	2.1	53	.15	.69	.17	4.3	0.008	0.2	20.0	MW	C	N
0.172	4.37	B18-185	2.50	63.5	.122	3.1	5.1	.88	.98	25	4.9	22	.93	23.5	0.025	0.6	37.0	MW	CG	Z
0.172	4.37	Y-64	2.75	69.9	.116	2.9	4.3	.75	.99	25	4.2	19	1.76	44.8	0.028	0.7	62.0	SST	C	N
0.172	4.37	S-3214	2.91	73.8	.134	3.4	1.1	.18	1.5	38	1.6	7.0	.89	22.7	0.019	0.5	46.0	SST	O	N
0.172	4.37	3968	3.00	76.2	.118	3.0	4.3	.75	1.3	34	5.7	26	1.66	42.2	0.027	0.7	60.5	MW	C	N
0.172	4.37	B15-44	3.19	81.0	.146	3.7	.33	.06	2.6	65	.85	3.8	.44	11.2	0.013	0.3	33.0	MW	C	N
0.172	4.37	FF-48	3.25	82.6	.152	3.9	.08	.01	2.8	72	.24	1.1	.43	10.9	0.010	0.3	42.0	MW	C	N
0.175	4.45	B3-49	.47	11.9	.103	2.6	98	17	.09	2.3	8.9	40	.36	9.1	0.036	0.9	10.0	SST	CG	N
0.180	4.57	70244	.25	6.4	.156	4.0	3.6	.63	.18	4.5	.64	2.8	.05	1.1	0.012	0.3	3.75	MW	CG	N
0.180	4.57	70244S	.25	6.4	.156	4.0	3.1	.55	.13	3.3	.41	1.8	.05	1.1	0.012	0.3	3.75	SST	CG	N
0.180	4.57	70259	.25	6.4	.152	3.9	6.0	1.1	.17	4.2	1.0	4.5	.06	1.4	0.014	0.4	4.00	MW	CG	N
0.180	4.57	70259S	.25	6.4	.152	3.9	5.2	.92	.12	3.1	.64	2.9	.06	1.4	0.014	0.4	4.00	SST	CG	N
0.180	4.57	70280	.25	6.4	.148	3.8	9.0	1.6	.15	3.9	1.4	6.0	.07	1.8	0.016	0.4	4.38	MW	CG	N
0.180	4.57	70280S	.25	6.4	.148	3.8	7.6	1.3	.12	3.0	.90	4.0	.07	1.8	0.016	0.4	4.38	SST	CG	N
0.180	4.57	70301	.25	6.4	.144	3.7	14	2.4	.14	3.6	1.9	8.5	.08	2.1	0.018	0.5	4.63	MW	CG	N
0.180	4.57	70301S	.25	6.4	.144	3.7	11	2.0	.11	2.8	1.3	5.7	.08	2.1	0.018	0.5	4.63	SST	CG	N
0.180	4.57	70322	.25	6.4	.140	3.6	21	3.7	.12	3.2	2.6	12	.09	2.3	0.020	0.5	4.63	MW	CG	N
0.180	4.57	70322S	.25	6.4	.140	3.6	18	3.1	.10	2.5	1.7	7.7	.09	2.3	0.020	0.5	4.63	SST	CG	N
0.180	4.57	70343	.25	6.4	.136	3.5	30	5.2	.12	3.0	3.5	15	.11	2.7	0.022	0.6	4.88	MW	CG	N
0.180	4.57	70343S	.25	6.4	.136	3.5	25	4.4	.09	2.3	2.3	10	.11	2.7	0.022	0.6	4.88	SST	CG	N
0.180	4.57	A12-37	.25	6.4	.136	3.5	30	5.2	.08	2.0	2.3	10	.10	2.5	0.022	0.6	4.50	SST	CG	N
0.180	4.57	70363	.25	6.4	.132	3.4	43	7.6	.10	2.6	4.5	20	.12	3.0	0.024	0.6	4.88	MW	CG	N
0.180	4.57	70363S	.25	6.4	.132	3.4	37	6.4	.08	2.1	3.0	13	.12	3.0	0.024	0.6	4.88	SST	CG	N
0.180	4.57	70386	.25	6.4	.128	3.3	59	10	.09	2.3	5.3	24	.13	3.3	0.026	0.7	5.00	MW	CG	N
0.180	4.57	70386S	.25	6.4	.128	3.3	50	8.8	.07	1.8	3.6	16	.13	3.3	0.026	0.7	5.00	SST	CG	N
0.180	4.57	70407	.25	6.4	.122	3.1	95	17	.08	1.9	7.3	32	.15	3.8	0.029	0.7	5.13	MW	CG	N
0.180	4.57	70407S	.25	6.4	.122	3.1	81	14	.06	1.5	4.9	22	.15	3.8	0.029	0.7	5.13	SST	CG	N
0.180	4.57	B4-67	.30	7.5	.152	3.9	2.8	.50	.20	5.0	.55	2.5	.10	2.6	0.014	0.4	6.25	MW	C	N
0.180	4.57	70245	.31	7.9	.156	4.0	3.0	.52	.22	5.5	.64	2.8	.05	1.3	0.012	0.3	4.13	MW	CG	N
0.180	4.57	70245S	.31	7.9	.156	4.0	2.6	.45	.16	4.0	.41	1.8	.05	1.3	0.012	0.3	4.13	SST	CG	N
0.180	4.57	70260	.31	7.9	.152	3.9	4.8	.85	.21	5.3	1.0	4.5	.06	1.6	0.014	0.4	4.50	MW	CG	N
0.180	4.57	70260S	.31	7.9	.152	3.9	4.2	.74	.15	3.9	.64	2.9	.06	1.6	0.014	0.4	4.50	SST	CG	N
0.180	4.57	70281	.31	7.9	.148	3.8	7.5	1.3	.18	4.6	1.4	6.0	.08	2.0	0.016	0.4	4.88	MW	CG	N
0.180	4.57	70281S	.31	7.9	.148	3.8	6.4	1.1	.14	3.6	.90	4.0	.08	2.0	0.016	0.4	4.88	SST	CG	N
0.180	4.57	70302	.31	7.9	.144	3.7	11	2.0	.17	4.4	1.9	8.5	.09	2.3	0.018	0.5	5.13	MW	CG	N
0.180	4.57	70302S	.31	7.9	.144	3.7	9.5	1.7	.13	3.4	1.3	5.7	.09	2.3	0.018	0.5	5.13	SST	CG	N
0.180	4.57	70323	.31	7.9	.140	3.6	16	2.8	.16	4.1	2.6	12	.11	2.8	0.020	0.5	5.50	MW	CG	N
0.180	4.57	70323S	.31	7.9	.140	3.6	14	2.4	.13	3.2	1.7	7.7	.11	2.8	0.020	0.5	5.50	SST	CG	N
0.180	4.57	70344	.31	7.9	.136	3.5	24	4.2	.15	3.7	3.5	15	.12	3.1	0.022	0.6	5.63	MW	CG	N
0.180	4.57	70344S	.31	7.9	.136	3.5	20	3.6	.11	2.9	2.3	10	.12	3.1	0.022	0.6	5.63	SST	CG	N
0.180	4.57	70364	.31	7.9	.132	3.4	33	5.7	.14	3.5	4.5	20	.14	3.6	0.024	0.6	5.88	MW	CG	N
0.180	4.57	70364S	.31	7.9	.132	3.4	28	4.9	.11	2.7	3.0	13	.14	3.6	0.024	0.6	5.88	SST	CG	N
0.180	4.57	70387	.31	7.9	.128	3.3	47	8.2	.11	2.9	5.3	24	.15	3.9	0.026	0.7	5.88	MW	CG	N
0.180	4.57	70387S	.31	7.9	.128	3.3	40	7.0	.09	2.3	3.6	16	.15	3.9	0.026	0.7	5.88	SST	CG	N
0.180	4.57	70408	.31	7.9	.122	3.1	74	13	.10	2.5	7.3	32	.17	4.4	0.029	0.7	6.00	MW	CG	N
0.180	4.57	70408S	.31	7.9	.122	3.1	62	11	.08	2.0	4.9	22	.17	4.4	0.029	0.7	6.00	SST	CG	N
0.180	4.57	70426	.31	7.9	.116	2.9	122	21	.08	2.0	9.7	43	.18	4.7	0.032	0.8	5.75	MW	CG	N
0.180	4.57	70426S	.31	7.9	.116	2.9	104	18	.06	1.6	6.5	29	.18	4.7	0.032	0.8	5.75	SST	CG	N
0.180	4.57	70246	.38	9.7	.156	4.0	2.3	.40	.28	7.1	.64	2.8	.06	1.4	0.012	0.3	4.75	MW	CG	N
0.180	4.57	70246S	.38	9.7	.156	4.0	2.0	.35	.20	5.2	.41	1.8	.06	1.4	0.012	0.3	4.75	SST	CG	N
0.180	4.57	70261	.38	9.7	.152	3.9	3.9	.68	.26	6.6	1.0	4.5	.07	1.8	0.014	0.4	5.13	MW	CG	N
0.180	4.57	70261S	.38	9.7	.152	3.9	3.4	.59	.19	4.9	.64	2.9	.07	1.8	0.014	0.4	5.13	SST	CG	N
0.180	4.57	70282	.38	9.7	.148	3.8	6.0	1.0	.23	5.8	1.4	6.0	.09	2.3	0.016	0.4	5.63	MW	CG	N
0.180	4.57	70282S	.38	9.7	.148	3.8	5.1	.89	.18	4.5	.90	4.0	.09	2.3	0.016	0.4	5.63	SST	CG	N
0.180	4.57	70303	.38	9.7	.144	3.7	9.2	1.6	.21	5.3	1.9	8.5	.11	2.7	0.018	0.5	5.88	MW	CG	N
0.180	4.57	70303S	.38	9.7	.144	3.7	7.8	1.4	.16	4.2	1.3	5.7	.11	2.7	0.018	0.5	5.88	SST	CG	N
0.180	4.57	70324	.38	9.7	.140	3.6	13	2.3	.20	5.1	2.6	12	.13	3.2	0.020	0.5	6.38	MW	CG	N
0.180	4.57	70324S	.38	9.7	.140	3.6	11	1.9	.16	4.0	1.7	7.7	.13	3.2	0.020	0.5	6.38	SST	CG	N
0.180	4.57	70345	.38	9.7	.136	3.5	20	3.5	.17	4.4	3.5	15	.14	3.5	0.022	0.6	6.25	MW	CG	N
0.180	4.57	70345S	.38	9.7	.136	3.5	17	3.0	.14	3.5	2.3	10	.14	3.5	0.022	0.6	6.25	SST	CG	N
0.180	4.57	70365	.38	9.7	.132	3.4	26	4.6	.17	4.3	4.5	20	.17	4.2	0.024	0.6	6.88	MW	CG	N
0.180	4.57	70365S	.38	9.7	.132	3.4	22	3.9	.13	3.4	3.0	13	.17	4.2	0.024	0.6	6.88	SST	CG	N
0.180	4.57	70388	.38	9.7	.128	3.3	37	6.5	.14	3.6	5.3	24	.18	4.5	0.026	0.7	6.88	MW	CG	N
0.180	4.57	70388S	.38	9.7	.128	3.3	32	5.5	.11	2.9	3.6	16	.18	4.5	0.026	0.7	6.88	SST	CG	N
0.180	4.57	70409	.38	9.7	.122	3.1	58	10	.13	3.2	7.3	32	.21	5.2	0.029	0.7	7.13	MW	CG	N
0.180	4.57	70409S	.38	9.7	.122	3.1	50	8.7	.10	2.5	4.9	22	.21	5.2	0.029	0.7	7.13	SST	CG	N
0.180	4.57	70427	.38	9.7	.116	2.9	96	17	.10	2.6	9.7	43	.22	5.6	0.032	0.8	6.88	MW	CG	N
0.180	4.57	70427S	.38	9.7	.116	2.9	82	14	.08	2.0	6.5	29	.22	5.6	0.032	0.8	6.88	SST	CG	N
0.180	4.57	70444	.38	9.7	.110	2.8	137	24	.09	2.2	12	53	.25	6.3	0.035	0.9	7.13	MW	CG	N
0.180	4.57	70444S	.38	9.7	.110	2.8	116	20	.07	1.8	8.0	36	.25	6.3	0.035	0.9	7.13	SST	CG	N
0.180	4.57	70247	.44	11.2	.156	4.0	2.0	.35	.32	8.1	.64	2.8	.06	1.6	0.012	0.3	5.13	MW	CG	N
0.180	4.57	70247S	.44	11.2	.156	4.0	1.7	.31	.23	5.9	.41	1.8	.06	1.6	0.012	0.3	5.13	SST	CG	N
0.180	4.57	70262	.44	11.2	.152	3.9	3.2	.56	.31	8.0	1.0	4.5	.08	2.1	0.014	0.4	5.75	MW	CG	N
0.180	4.57	70262S	.44	11.2	.152	3.9	2.8	.49	.23	5.8	.64	2.9	.08	2.1	0.014	0.4	5.75	SST	CG	N
0.180	4.57	70283	.44	11.2	.148	3.8	5.0	.87	.27	7.0	1.4	6.0	.10	2.6	0.016	0.4	6.38	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.180	4.57	70283S	.44	11.2	.148	3.8	4.2	.74	.21	5.4	.90	4.0	.10	2.6	0.016	0.4	6.38	SST	CG	N
0.180	4.57	70304	.44	11.2	.144	3.7	7.9	1.4	.24	6.2	1.9	8.5	.12	3.0	0.018	0.5	6.50	MW	CG	N
0.180	4.57	70304S	.44	11.2	.144	3.7	6.7	1.2	.19	4.8	1.3	5.7	.12	3.0	0.018	0.5	6.50	SST	CG	N
0.180	4.57	70325	.44	11.2	.140	3.6	11	1.9	.24	6.0	2.6	12	.14	3.6	0.020	0.5	7.13	MW	CG	N
0.180	4.57	70325S	.44	11.2	.140	3.6	9.4	1.6	.19	4.7	1.7	7.7	.14	3.6	0.020	0.5	7.13	SST	CG	N
0.180	4.57	70346	.44	11.2	.136	3.5	17	3.0	.20	5.2	3.5	15	.15	3.9	0.022	0.6	7.00	MW	CG	N
0.180	4.57	70346S	.44	11.2	.136	3.5	14	2.5	.16	4.1	2.3	10	.15	3.9	0.022	0.6	7.00	SST	CG	N
0.180	4.57	70366	.44	11.2	.132	3.4	22	3.8	.20	5.2	4.5	20	.19	4.7	0.024	0.6	7.75	MW	CG	N
0.180	4.57	70366S	.44	11.2	.132	3.4	19	3.3	.16	4.1	3.0	13	.19	4.7	0.024	0.6	7.75	SST	CG	N
0.180	4.57	70389	.44	11.2	.128	3.3	31	5.4	.17	4.3	5.3	24	.20	5.1	0.026	0.7	7.75	MW	CG	N
0.180	4.57	70389S	.44	11.2	.128	3.3	26	4.6	.13	3.4	3.6	16	.20	5.1	0.026	0.7	7.75	SST	CG	N
0.180	4.57	70410	.44	11.2	.122	3.1	48	8.5	.15	3.8	7.3	32	.24	6.0	0.029	0.7	8.13	MW	CG	N
0.180	4.57	70410S	.44	11.2	.122	3.1	41	7.2	.12	3.0	4.9	22	.24	6.0	0.029	0.7	8.13	SST	CG	N
0.180	4.57	70428	.44	11.2	.116	2.9	79	14	.12	3.1	9.7	43	.25	6.4	0.032	0.8	7.88	MW	CG	N
0.180	4.57	70428S	.44	11.2	.116	2.9	67	12	.10	2.5	6.5	29	.25	6.4	0.032	0.8	7.88	SST	CG	N
0.180	4.57	70445	.44	11.2	.110	2.8	115	20	.10	2.6	12	53	.28	7.2	0.035	0.9	8.13	MW	CG	N
0.180	4.57	70445S	.44	11.2	.110	2.8	97	17	.08	2.1	8.0	36	.28	7.2	0.035	0.9	8.13	SST	CG	N
0.180	4.57	70248	.50	12.7	.156	4.0	1.7	.29	.38	9.7	.64	2.8	.07	1.8	0.012	0.3	5.75	MW	CG	N
0.180	4.57	70248S	.50	12.7	.156	4.0	1.5	.26	.28	7.1	.41	1.8	.07	1.8	0.012	0.3	5.75	SST	CG	N
0.180	4.57	70263	.50	12.7	.152	3.9	2.8	.50	.35	9.0	1.0	4.5	.09	2.2	0.014	0.4	6.25	MW	CG	N
0.180	4.57	70263S	.50	12.7	.152	3.9	2.5	.43	.26	6.6	.64	2.9	.09	2.2	0.014	0.4	6.25	SST	CG	N
0.180	4.57	70284	.50	12.7	.148	3.8	4.4	.76	.31	7.9	1.4	6.0	.11	2.8	0.016	0.4	6.88	MW	CG	N
0.180	4.57	70284S	.50	12.7	.148	3.8	3.7	.65	.24	6.2	.90	4.0	.11	2.8	0.016	0.4	6.88	SST	CG	N
0.180	4.57	70305	.50	12.7	.144	3.7	6.9	1.2	.28	7.1	1.9	8.5	.13	3.3	0.018	0.5	7.13	MW	CG	N
0.180	4.57	70305S	.50	12.7	.144	3.7	5.8	1.0	.22	5.6	1.3	5.7	.13	3.3	0.018	0.5	7.13	SST	CG	N
0.180	4.57	70326	.50	12.7	.140	3.6	9.5	1.7	.28	7.0	2.6	12	.16	4.0	0.020	0.5	7.88	MW	CG	N
0.180	4.57	70326S	.50	12.7	.140	3.6	8.1	1.4	.22	5.5	1.7	7.7	.16	4.0	0.020	0.5	7.88	SST	CG	N
0.180	4.57	70347	.50	12.7	.136	3.5	14	2.5	.25	6.2	3.5	15	.18	4.5	0.022	0.6	8.00	MW	CG	N
0.180	4.57	70347S	.50	12.7	.136	3.5	12	2.1	.19	4.9	2.3	10	.18	4.5	0.022	0.6	8.00	SST	CG	N
0.180	4.57	70367	.50	12.7	.132	3.4	19	3.3	.24	6.0	4.5	20	.21	5.3	0.024	0.6	8.63	MW	CG	N
0.180	4.57	70367S	.50	12.7	.132	3.4	16	2.8	.18	4.7	3.0	13	.21	5.3	0.024	0.6	8.63	SST	CG	N
0.180	4.57	70390	.50	12.7	.128	3.3	27	4.7	.20	5.0	5.3	24	.22	5.7	0.026	0.7	8.63	MW	CG	N
0.180	4.57	70390S	.50	12.7	.128	3.3	23	4.0	.16	4.0	3.6	16	.22	5.7	0.026	0.7	8.63	SST	CG	N
0.180	4.57	70411	.50	12.7	.122	3.1	42	7.3	.17	4.4	7.3	32	.26	6.7	0.029	0.7	9.13	MW	CG	N
0.180	4.57	70411S	.50	12.7	.122	3.1	35	6.2	.14	3.5	4.9	22	.26	6.7	0.029	0.7	9.13	SST	CG	N
0.180	4.57	70429	.50	12.7	.116	2.9	65	11	.15	3.8	9.7	43	.29	7.4	0.032	0.8	9.13	MW	CG	N
0.180	4.57	70429S	.50	12.7	.116	2.9	55	9.7	.12	3.0	6.5	29	.29	7.4	0.032	0.8	9.13	SST	CG	N
0.180	4.57	70446	.50	12.7	.110	2.8	99	17	.12	3.1	12	53	.32	8.1	0.035	0.9	9.13	MW	CG	N
0.180	4.57	70446S	.50	12.7	.110	2.8	84	15	.10	2.4	8.0	36	.32	8.1	0.035	0.9	9.13	SST	CG	N
0.180	4.57	B2-34	.55	13.9	.134	3.4	13	2.3	.29	7.5	3.9	18	.22	5.7	0.023	0.6	9.75	MW	CG	N
0.180	4.57	70249	.56	14.2	.156	4.0	1.5	.26	.43	11	.64	2.8	.08	1.9	0.012	0.3	6.25	MW	CG	N
0.180	4.57	70249S	.56	14.2	.156	4.0	1.3	.23	.32	8.0	.41	1.8	.08	1.9	0.012	0.3	6.25	SST	CG	N
0.180	4.57	70264	.56	14.2	.152	3.9	2.5	.43	.41	10	1.0	4.5	.10	2.4	0.014	0.4	6.88	MW	CG	N
0.180	4.57	70264S	.56	14.2	.152	3.9	2.2	.38	.30	7.6	.64	2.9	.10	2.4	0.014	0.4	6.88	SST	CG	N
0.180	4.57	70285	.56	14.2	.148	3.8	3.9	.67	.35	9.0	1.4	6.0	.12	3.0	0.016	0.4	7.50	MW	CG	N
0.180	4.57	70285S	.56	14.2	.148	3.8	3.3	.57	.28	7.0	.90	4.0	.12	3.0	0.016	0.4	7.50	SST	CG	N
0.180	4.57	70306	.56	14.2	.144	3.7	5.9	1.0	.33	8.3	1.9	8.5	.15	3.7	0.018	0.5	8.13	MW	CG	N
0.180	4.57	70306S	.56	14.2	.144	3.7	5.0	.87	.26	6.5	1.3	5.7	.15	3.7	0.018	0.5	8.13	SST	CG	N
0.180	4.57	70327	.56	14.2	.140	3.6	8.4	1.5	.31	7.9	2.6	12	.17	4.4	0.020	0.5	8.63	MW	CG	N
0.180	4.57	70327S	.56	14.2	.140	3.6	7.2	1.3	.24	6.2	1.7	7.7	.17	4.4	0.020	0.5	8.63	SST	CG	N
0.180	4.57	70348	.56	14.2	.136	3.5	12	2.1	.29	7.4	3.5	15	.20	5.1	0.022	0.6	9.13	MW	CG	N
0.180	4.57	70348S	.56	14.2	.136	3.5	10	1.8	.23	5.8	2.3	10	.20	5.1	0.022	0.6	9.13	SST	CG	N
0.180	4.57	70368	.56	14.2	.132	3.4	17	2.9	.27	6.8	4.5	20	.23	5.9	0.024	0.6	9.63	MW	CG	N
0.180	4.57	70368S	.56	14.2	.132	3.4	14	2.5	.21	5.3	3.0	13	.23	5.9	0.024	0.6	9.63	SST	CG	N
0.180	4.57	70391	.56	14.2	.128	3.3	23	4.1	.23	5.8	5.3	24	.25	6.4	0.026	0.7	9.75	MW	CG	N
0.180	4.57	70391S	.56	14.2	.128	3.3	20	3.5	.18	4.6	3.6	16	.25	6.4	0.026	0.7	9.75	SST	CG	N
0.180	4.57	70412	.56	14.2	.122	3.1	37	6.4	.20	5.1	7.3	32	.29	7.5	0.029	0.7	10.1	MW	CG	N
0.180	4.57	70412S	.56	14.2	.122	3.1	31	5.4	.16	4.0	4.9	22	.29	7.5	0.029	0.7	10.1	SST	CG	N
0.180	4.57	70430	.56	14.2	.116	2.9	58	10	.17	4.2	9.7	43	.32	8.1	0.032	0.8	10.0	MW	CG	N
0.180	4.57	70430S	.56	14.2	.116	2.9	50	8.7	.13	3.3	6.5	29	.32	8.1	0.032	0.8	10.0	SST	CG	N
0.180	4.57	70447	.56	14.2	.110	2.8	87	15	.14	3.5	12	53	.35	9.0	0.035	0.9	10.1	MW	CG	N
0.180	4.57	70447S	.56	14.2	.110	2.8	74	13	.11	2.8	8.0	36	.35	9.0	0.035	0.9	10.1	SST	CG	N
0.180	4.57	70250	.63	16.0	.156	4.0	1.4	.24	.46	12	.64	2.8	.08	2.0	0.012	0.3	6.50	MW	CG	N
0.180	4.57	70250S	.63	16.0	.156	4.0	1.2	.21	.33	8.5	.41	1.8	.08	2.0	0.012	0.3	6.50	SST	CG	N
0.180	4.57	70265	.63	16.0	.152	3.9	2.2	.39	.45	11	1.0	4.5	.10	2.6	0.014	0.4	7.38	MW	CG	N
0.180	4.57	70265S	.63	16.0	.152	3.9	2.0	.34	.33	8.4	.64	2.9	.10	2.6	0.014	0.4	7.38	SST	CG	N
0.180	4.57	70286	.63	16.0	.148	3.8	3.5	.60	.39	10	1.4	6.0	.13	3.4	0.016	0.4	8.25	MW	CG	N
0.180	4.57	70286S	.63	16.0	.148	3.8	2.9	.51	.31	7.8	.90	4.0	.13	3.4	0.016	0.4	8.25	SST	CG	N
0.180	4.57	70307	.63	16.0	.144	3.7	5.1	.88	.38	9.7	1.9	8.5	.16	4.1	0.018	0.5	9.00	MW	CG	N
0.180	4.57	70307S	.63	16.0	.144	3.7	4.3	.75	.30	7.6	1.3	5.7	.16	4.1	0.018	0.5	9.00	SST	CG	N
0.180	4.57	70328	.63	16.0	.140	3.6	7.5	1.3	.35	8.9	2.6	12	.19	4.8	0.020	0.5	9.50	MW	CG	N
0.180	4.57	70328S	.63	16.0	.140	3.6	6.4	1.1	.27	7.0	1.7	7.7	.19	4.8	0.020	0.5	9.50	SST	CG	N
0.180	4.57	70349	.63	16.0	.136	3.5	11	1.8	.33	8.4	3.5	15	.22	5.7	0.022	0.6	10.1	MW	CG	N
0.180	4.57	70349S	.63	16.0	.136	3.5	8.9	1.6	.26	6.6	2.3	10	.22	5.7	0.022	0.6	10.1	SST	CG	N
0.180	4.57	70369	.63	16.0	.132	3.4	15	2.6	.30	7.6	4.5	20	.25	6.3	0.024	0.6	10.4	MW	CG	N
0.180	4.57	70369S	.63	16.0	.132	3.4	13	2.2	.23	5.9	3.0	13	.25	6.3	0.024	0.6	10.4	SST	CG	N
0.180	4.57	70392	.63	16.0	.128	3.3	21	3.7	.25	6.4	5.3	24	.28	7.0	0.026	0.7	10.6	MW	CG	N
0.180	4.57	70392S	.63	16.0	.128	3.3	18	3.1	.20	5.1	3.6	16	.28	7.0	0.026	0.7	10.6	SST	CG	N
0.180	4.57	70413	.63	16.0	.122	3.1	32	5.7	.22	5.7	7.3	32	.32	8.2	0.029	0.7	11.1	MW	CG	N
0.180	4.57	70413S	.63	16.0	.122	3.1	28	4.8	.18	4.5	4.9	22	.32	8.2	0.029	0.7	11.1	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.180	4.57	70431	.63	16.0	.116	2.9	51	9.0	.19	4.8	9.7	43	.36	9.0	0.032	0.8	11.1	MW	CG	N
0.180	4.57	70431S	.63	16.0	.116	2.9	43	7.6	.15	3.8	6.5	29	.36	9.0	0.032	0.8	11.1	SST	CG	N
0.180	4.57	70448	.63	16.0	.110	2.8	77	14	.15	3.9	12	53	.39	9.9	0.035	0.9	11.1	MW	CG	N
0.180	4.57	70448S	.63	16.0	.110	2.8	66	11	.12	3.1	8.0	36	.39	9.9	0.035	0.9	11.1	SST	CG	N
0.180	4.57	70251	.69	17.5	.156	4.0	1.2	.21	.53	14	.64	2.8	.09	2.2	0.012	0.3	7.25	MW	CG	N
0.180	4.57	70251S	.69	17.5	.156	4.0	1.0	.18	.39	9.9	.41	1.8	.09	2.2	0.012	0.3	7.25	SST	CG	N
0.180	4.57	70266	.69	17.5	.152	3.9	2.0	.35	.50	13	1.0	4.5	.11	2.8	0.014	0.4	8.00	MW	CG	N
0.180	4.57	70266S	.69	17.5	.152	3.9	1.8	.31	.37	9.3	.64	2.9	.11	2.8	0.014	0.4	8.00	SST	CG	N
0.180	4.57	70287	.69	17.5	.148	3.8	3.1	.53	.45	11	1.4	6.0	.14	3.7	0.016	0.4	9.00	MW	CG	N
0.180	4.57	70287S	.69	17.5	.148	3.8	2.6	.45	.35	8.8	.90	4.0	.14	3.7	0.016	0.4	9.00	SST	CG	N
0.180	4.57	70308	.69	17.5	.144	3.7	4.6	.80	.42	11	1.9	8.5	.18	4.5	0.018	0.5	9.75	MW	CG	N
0.180	4.57	70308S	.69	17.5	.144	3.7	3.9	.68	.33	8.4	1.3	5.7	.18	4.5	0.018	0.5	9.75	SST	CG	N
0.180	4.57	70329	.69	17.5	.140	3.6	6.7	1.2	.39	10	2.6	12	.21	5.3	0.020	0.5	10.5	MW	CG	N
0.180	4.57	70329S	.69	17.5	.140	3.6	5.7	.99	.31	7.8	1.7	7.7	.21	5.3	0.020	0.5	10.5	SST	CG	N
0.180	4.57	70350	.69	17.5	.136	3.5	9.6	1.7	.36	9.2	3.5	15	.24	6.1	0.022	0.6	11.0	MW	CG	N
0.180	4.57	70350S	.69	17.5	.136	3.5	8.1	1.4	.28	7.2	2.3	10	.24	6.1	0.022	0.6	11.0	SST	CG	N
0.180	4.57	70371	.69	17.5	.132	3.4	13	2.3	.34	8.6	4.5	20	.28	7.0	0.024	0.6	11.5	MW	CG	N
0.180	4.57	70371S	.69	17.5	.132	3.4	11	2.0	.26	6.7	3.0	13	.28	7.0	0.024	0.6	11.5	SST	CG	N
0.180	4.57	70393	.69	17.5	.128	3.3	19	3.3	.28	7.1	5.3	24	.30	7.6	0.026	0.7	11.5	MW	CG	N
0.180	4.57	70393S	.69	17.5	.128	3.3	16	2.8	.22	5.6	3.6	16	.30	7.6	0.026	0.7	11.5	SST	CG	N
0.180	4.57	70414	.69	17.5	.122	3.1	29	5.1	.25	6.3	7.3	32	.35	8.9	0.029	0.7	12.1	MW	CG	N
0.180	4.57	70414S	.69	17.5	.122	3.1	25	4.3	.20	5.0	4.9	22	.35	8.9	0.029	0.7	12.1	SST	CG	N
0.180	4.57	70432	.69	17.5	.116	2.9	47	8.3	.20	5.2	9.7	43	.38	9.7	0.032	0.8	11.9	MW	CG	N
0.180	4.57	70432S	.69	17.5	.116	2.9	40	7.0	.16	4.1	6.5	29	.38	9.7	0.032	0.8	11.9	SST	CG	N
0.180	4.57	70449	.69	17.5	.110	2.8	69	12	.17	4.4	12	53	.43	11.0	0.035	0.9	12.4	MW	CG	N
0.180	4.57	70449S	.69	17.5	.110	2.8	58	10	.14	3.5	8.0	36	.43	11.0	0.035	0.9	12.4	SST	CG	N
0.180	4.57	70252	.75	19.1	.156	4.0	1.1	.19	.58	15	.64	2.8	.09	2.4	0.012	0.3	7.75	MW	CG	N
0.180	4.57	70252S	.75	19.1	.156	4.0	.95	.17	.43	11	.41	1.8	.09	2.4	0.012	0.3	7.75	SST	CG	N
0.180	4.57	70267	.75	19.1	.152	3.9	1.9	.33	.54	14	1.0	4.5	.12	3.0	0.014	0.4	8.50	MW	CG	N
0.180	4.57	70267S	.75	19.1	.152	3.9	1.6	.28	.40	10	.64	2.9	.12	3.0	0.014	0.4	8.50	SST	CG	N
0.180	4.57	70288	.75	19.1	.148	3.8	2.7	.46	.51	13	1.4	6.0	.16	4.1	0.016	0.4	10.0	MW	CG	N
0.180	4.57	70288S	.75	19.1	.148	3.8	2.3	.39	.40	10	.90	4.0	.16	4.1	0.016	0.4	10.0	SST	CG	N
0.180	4.57	70309	.75	19.1	.144	3.7	4.1	.71	.47	12	1.9	8.5	.19	4.9	0.018	0.5	10.8	MW	CG	N
0.180	4.57	70309S	.75	19.1	.144	3.7	3.4	.60	.37	9.4	1.3	5.7	.19	4.9	0.018	0.5	10.8	SST	CG	N
0.180	4.57	70330	.75	19.1	.140	3.6	6.2	1.1	.43	11	2.6	12	.22	5.7	0.020	0.5	11.1	MW	CG	N
0.180	4.57	70330S	.75	19.1	.140	3.6	5.2	.92	.33	8.5	1.7	7.7	.22	5.7	0.020	0.5	11.1	SST	CG	N
0.180	4.57	70351	.75	19.1	.136	3.5	8.6	1.5	.40	10	3.5	15	.26	6.6	0.022	0.6	11.9	MW	CG	N
0.180	4.57	70351S	.75	19.1	.136	3.5	7.3	1.3	.31	8.0	2.3	10	.26	6.6	0.022	0.6	11.9	SST	CG	N
0.180	4.57	70372	.75	19.1	.132	3.4	12	2.1	.37	9.4	4.5	20	.30	7.5	0.024	0.6	12.4	MW	CG	N
0.180	4.57	70372S	.75	19.1	.132	3.4	10	1.8	.29	7.3	3.0	13	.30	7.5	0.024	0.6	12.4	SST	CG	N
0.180	4.57	70394	.75	19.1	.128	3.3	17	3.0	.31	7.9	5.3	24	.33	8.3	0.026	0.7	12.6	MW	CG	N
0.180	4.57	70394S	.75	19.1	.128	3.3	14	2.5	.25	6.3	3.6	16	.33	8.3	0.026	0.7	12.6	SST	CG	N
0.180	4.57	B4-33	.75	19.1	.128	3.3	14	2.5	.25	6.4	3.6	16	.34	8.6	0.026	0.7	13.0	SST	CG	N
0.180	4.57	70415	.75	19.1	.122	3.1	26	4.6	.28	7.0	7.3	32	.38	9.7	0.029	0.7	13.1	MW	CG	N
0.180	4.57	70415S	.75	19.1	.122	3.1	22	3.9	.22	5.5	4.9	22	.38	9.7	0.029	0.7	13.1	SST	CG	N
0.180	4.57	70433	.75	19.1	.116	2.9	41	7.2	.23	6.0	9.7	43	.42	10.8	0.032	0.8	13.3	MW	CG	N
0.180	4.57	70433S	.75	19.1	.116	2.9	35	6.1	.19	4.7	6.5	29	.42	10.8	0.032	0.8	13.3	SST	CG	N
0.180	4.57	70450	.75	19.1	.110	2.8	62	11	.19	4.8	12	53	.47	11.9	0.035	0.9	13.4	MW	CG	N
0.180	4.57	70450S	.75	19.1	.110	2.8	53	9.3	.15	3.8	8.0	36	.47	11.9	0.035	0.9	13.4	SST	CG	N
0.180	4.57	70253	.81	20.6	.156	4.0	1.0	.18	.63	16	.64	2.8	.10	2.5	0.012	0.3	8.25	MW	CG	N
0.180	4.57	70253S	.81	20.6	.156	4.0	.88	.15	.46	12	.41	1.8	.10	2.5	0.012	0.3	8.25	SST	CG	N
0.180	4.57	70269	.81	20.6	.152	3.9	1.7	.30	.60	15	1.0	4.5	.13	3.3	0.014	0.4	9.13	MW	CG	N
0.180	4.57	70269S	.81	20.6	.152	3.9	1.5	.26	.44	11	.64	2.9	.13	3.3	0.014	0.4	9.13	SST	CG	N
0.180	4.57	70290	.81	20.6	.148	3.8	2.6	.46	.52	13	1.4	6.0	.16	4.2	0.016	0.4	10.3	MW	CG	N
0.180	4.57	70290S	.81	20.6	.148	3.8	2.2	.39	.41	10	.90	4.0	.16	4.2	0.016	0.4	10.3	SST	CG	N
0.180	4.57	70311	.81	20.6	.144	3.7	3.9	.68	.49	13	1.9	8.5	.20	5.1	0.018	0.5	11.1	MW	CG	N
0.180	4.57	70311S	.81	20.6	.144	3.7	3.3	.58	.39	9.8	1.3	5.7	.20	5.1	0.018	0.5	11.1	SST	CG	N
0.180	4.57	70332	.81	20.6	.140	3.6	5.6	.98	.47	12	2.6	12	.24	6.1	0.020	0.5	12.0	MW	CG	N
0.180	4.57	70332S	.81	20.6	.140	3.6	4.8	.83	.37	9.3	1.7	7.7	.24	6.1	0.020	0.5	12.0	SST	CG	N
0.180	4.57	70352	.81	20.6	.136	3.5	7.6	1.3	.46	12	3.5	15	.29	7.4	0.022	0.6	13.3	MW	CG	N
0.180	4.57	70352S	.81	20.6	.136	3.5	6.5	1.1	.36	9.1	2.3	10	.29	7.4	0.022	0.6	13.3	SST	CG	N
0.180	4.57	70374	.81	20.6	.132	3.4	11	1.9	.41	10	4.5	20	.32	8.2	0.024	0.6	13.4	MW	CG	N
0.180	4.57	70374S	.81	20.6	.132	3.4	9.4	1.6	.32	8.1	3.0	13	.32	8.2	0.024	0.6	13.4	SST	CG	N
0.180	4.57	70395	.81	20.6	.128	3.3	16	2.8	.34	8.5	5.3	24	.35	8.8	0.026	0.7	13.4	MW	CG	N
0.180	4.57	70395S	.81	20.6	.128	3.3	13	2.4	.26	6.7	3.6	16	.35	8.8	0.026	0.7	13.4	SST	CG	N
0.180	4.57	70416	.81	20.6	.122	3.1	24	4.3	.30	7.6	7.3	32	.41	10.4	0.029	0.7	14.1	MW	CG	N
0.180	4.57	70416S	.81	20.6	.122	3.1	21	3.6	.24	6.0	4.9	22	.41	10.4	0.029	0.7	14.1	SST	CG	N
0.180	4.57	70434	.81	20.6	.116	2.9	37	6.5	.26	6.6	9.7	43	.46	11.8	0.032	0.8	14.5	MW	CG	N
0.180	4.57	70434S	.81	20.6	.116	2.9	32	5.5	.20	5.2	6.5	29	.46	11.8	0.032	0.8	14.5	SST	CG	N
0.180	4.57	70451	.81	20.6	.110	2.8	57	10	.21	5.3	12	53	.50	12.8	0.035	0.9	14.4	MW	CG	N
0.180	4.57	70451S	.81	20.6	.110	2.8	49	8.5	.16	4.2	8.0	36	.50	12.8	0.035	0.9	14.4	SST	CG	N
0.180	4.57	B4-36	.81	20.6	.128	3.3	17	3.0	.31	7.9	5.3	24	.33	8.3	0.026	0.7	12.5	MW	CG	N
0.180	4.57	70254	.88	22.4	.156	4.0	1.0	.18	.63	16	.64	2.8	.10	2.5	0.012	0.3	8.25	MW	CG	N
0.180	4.57	70254S	.88	22.4	.156	4.0	.88	.15	.46	12	.41	1.8	.10	2.5	0.012	0.3	8.25	SST	CG	N
0.180	4.57	70270	.88	22.4	.152	3.9	1.6	.27	.65	16	1.0	4.5	.14	3.5	0.014	0.4	9.75	MW	CG	N
0.180	4.57	70270S	.88	22.4	.152	3.9	1.4	.24	.47	12	.64	2.9	.14	3.5	0.014	0.4	9.75	SST	CG	N
0.180	4.57	70291	.88	22.4	.148	3.8	2.4	.41	.58	15	1.4	6.0	.18	4.5	0.016	0.4	11.1	MW	CG	N
0.180	4.57	70291S	.88	22.4	.148	3.8	2.0	.35	.45	11	.90	4.0	.18	4.5	0.016	0.4	11.1	SST	CG	N
0.180	4.57	70312	.88	22.4	.144	3.7	3.7	.64	.53	13	1.9	8.5	.21	5.4	0.018	0.5	11.8	MW	CG	N
0.180	4.57	70312S	.88	22.4	.144	3.7	3.1	.54	.41	10	1.3	5.7	.21	5.4	0.018	0.5	11.8	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.180	4.57	70333	.88	22.4	.140	3.6	5.2	.91	.50	13	2.6	12	.26	6.5	0.020	0.5	12.8	MW	CG	N
0.180	4.57	70333S	.88	22.4	.140	3.6	4.4	.77	.39	10	1.7	7.7	.26	6.5	0.020	0.5	12.8	SST	CG	N
0.180	4.57	70354	.88	22.4	.136	3.5	7.4	1.3	.47	12	3.5	15	.30	7.5	0.022	0.6	13.5	MW	CG	N
0.180	4.57	70354S	.88	22.4	.136	3.5	6.3	1.1	.37	9.3	2.3	10	.30	7.5	0.022	0.6	13.5	SST	CG	N
0.180	4.57	70375	.88	22.4	.132	3.4	10	1.8	.43	11	4.5	20	.34	8.7	0.024	0.6	14.3	MW	CG	N
0.180	4.57	70375S	.88	22.4	.132	3.4	8.7	1.5	.34	8.6	3.0	13	.34	8.7	0.024	0.6	14.3	SST	CG	N
0.180	4.57	70396	.88	22.4	.128	3.3	15	2.6	.36	9.2	5.3	24	.37	9.4	0.026	0.7	14.3	MW	CG	N
0.180	4.57	70396S	.88	22.4	.128	3.3	12	2.2	.28	7.2	3.6	16	.37	9.4	0.026	0.7	14.3	SST	CG	N
0.180	4.57	70417	.88	22.4	.122	3.1	22	3.9	.33	8.3	7.3	32	.44	11.1	0.029	0.7	15.1	MW	CG	N
0.180	4.57	70417S	.88	22.4	.122	3.1	19	3.3	.26	6.5	4.9	22	.44	11.1	0.029	0.7	15.1	SST	CG	N
0.180	4.57	70435	.88	22.4	.116	2.9	34	5.9	.29	7.3	9.7	43	.50	12.8	0.032	0.8	15.8	MW	CG	N
0.180	4.57	70435S	.88	22.4	.116	2.9	29	5.0	.23	5.7	6.5	29	.50	12.8	0.032	0.8	15.8	SST	CG	N
0.180	4.57	70453	.88	22.4	.110	2.8	52	9.2	.23	5.8	12	53	.54	13.8	0.035	0.9	15.5	MW	CG	N
0.180	4.57	70453S	.88	22.4	.110	2.8	45	7.8	.18	4.6	8.0	36	.54	13.8	0.035	0.9	15.5	SST	CG	N
0.180	4.57	70255	.94	23.9	.156	4.0	.90	.16	.71	18	.64	2.8	.11	2.7	0.012	0.3	9.00	MW	CG	N
0.180	4.57	70255S	.94	23.9	.156	4.0	.78	.14	.52	13	.41	1.8	.11	2.7	0.012	0.3	9.00	SST	CG	N
0.180	4.57	70272	.94	23.9	.152	3.9	1.5	.26	.67	17	1.0	4.5	.14	3.6	0.014	0.4	10.0	MW	CG	N
0.180	4.57	70272S	.94	23.9	.152	3.9	1.3	.23	.49	12	.64	2.9	.14	3.6	0.014	0.4	10.0	SST	CG	N
0.180	4.57	70293	.94	23.9	.148	3.8	2.3	.40	.59	15	1.4	6.0	.18	4.6	0.016	0.4	11.3	MW	CG	N
0.180	4.57	70293S	.94	23.9	.148	3.8	2.0	.34	.46	12	.90	4.0	.18	4.6	0.016	0.4	11.3	SST	CG	N
0.180	4.57	70314	.94	23.9	.144	3.7	3.4	.60	.57	14	1.9	8.5	.23	5.7	0.018	0.5	12.5	MW	CG	N
0.180	4.57	70314S	.94	23.9	.144	3.7	2.9	.51	.44	11	1.3	5.7	.23	5.7	0.018	0.5	12.5	SST	CG	N
0.180	4.57	70335	.94	23.9	.140	3.6	4.9	.86	.53	14	2.6	12	.27	6.9	0.020	0.5	13.5	MW	CG	N
0.180	4.57	70335S	.94	23.9	.140	3.6	4.2	.73	.42	11	1.7	7.7	.27	6.9	0.020	0.5	13.5	SST	CG	N
0.180	4.57	70355	.94	23.9	.136	3.5	6.8	1.2	.51	13	3.5	15	.32	8.1	0.022	0.6	14.5	MW	CG	N
0.180	4.57	70355S	.94	23.9	.136	3.5	5.8	1.0	.40	10	2.3	10	.32	8.1	0.022	0.6	14.5	SST	CG	N
0.180	4.57	70377	.94	23.9	.132	3.4	9.5	1.7	.47	12	4.5	20	.37	9.3	0.024	0.6	15.3	MW	CG	N
0.180	4.57	70377S	.94	23.9	.132	3.4	8.1	1.4	.37	9.3	3.0	13	.37	9.3	0.024	0.6	15.3	SST	CG	N
0.180	4.57	70398	.94	23.9	.128	3.3	13	2.3	.41	10	5.3	24	.41	10.5	0.026	0.7	15.9	MW	CG	N
0.180	4.57	70398S	.94	23.9	.128	3.3	11	1.9	.32	8.2	3.6	16	.41	10.5	0.026	0.7	15.9	SST	CG	N
0.180	4.57	70418	.94	23.9	.122	3.1	21	3.6	.35	8.9	7.3	32	.47	12.0	0.029	0.7	16.3	MW	CG	N
0.180	4.57	70418S	.94	23.9	.122	3.1	18	3.1	.28	7.0	4.9	22	.47	12.0	0.029	0.7	16.3	SST	CG	N
0.180	4.57	70436	.94	23.9	.116	2.9	32	5.5	.31	7.8	9.7	43	.54	13.6	0.032	0.8	16.8	MW	CG	N
0.180	4.57	70436S	.94	23.9	.116	2.9	27	4.7	.24	6.1	6.5	29	.54	13.6	0.032	0.8	16.8	SST	CG	N
0.180	4.57	70452	.94	23.9	.110	2.8	49	8.5	.24	6.2	12	53	.58	14.7	0.035	0.9	16.5	MW	CG	N
0.180	4.57	70452S	.94	23.9	.110	2.8	41	7.3	.19	4.9	8.0	36	.58	14.7	0.035	0.9	16.5	SST	CG	N
0.180	4.57	70256	1.00	25.4	.156	4.0	.80	.14	.80	20	.64	2.8	.12	3.0	0.012	0.3	9.88	MW	CG	N
0.180	4.57	70256S	1.00	25.4	.156	4.0	.69	.12	.59	15	.41	1.8	.12	3.0	0.012	0.3	9.88	SST	CG	N
0.180	4.57	70273	1.00	25.4	.152	3.9	1.4	.24	.74	19	1.0	4.5	.15	3.9	0.014	0.4	10.9	MW	CG	N
0.180	4.57	70273S	1.00	25.4	.152	3.9	1.2	.20	.56	14	.64	2.9	.15	3.9	0.014	0.4	10.9	SST	CG	N
0.180	4.57	70294	1.00	25.4	.148	3.8	2.1	.36	.66	17	1.4	6.0	.20	5.0	0.016	0.4	12.4	MW	CG	N
0.180	4.57	70294S	1.00	25.4	.148	3.8	1.7	.31	.52	13	.90	4.0	.20	5.0	0.016	0.4	12.4	SST	CG	N
0.180	4.57	70315	1.00	25.4	.144	3.7	3.2	.55	.61	15	1.9	8.5	.24	6.1	0.018	0.5	13.3	MW	CG	N
0.180	4.57	70315S	1.00	25.4	.144	3.7	2.7	.47	.48	12	1.3	5.7	.24	6.1	0.018	0.5	13.3	SST	CG	N
0.180	4.57	70336	1.00	25.4	.140	3.6	4.6	.80	.58	15	2.6	12	.29	7.3	0.020	0.5	14.4	MW	CG	N
0.180	4.57	70336S	1.00	25.4	.140	3.6	3.9	.68	.45	11	1.7	7.7	.29	7.3	0.020	0.5	14.4	SST	CG	N
0.180	4.57	70356	1.00	25.4	.136	3.5	6.4	1.1	.54	14	3.5	15	.34	8.6	0.022	0.6	15.4	MW	CG	N
0.180	4.57	70356S	1.00	25.4	.136	3.5	5.4	.95	.42	11	2.3	10	.34	8.6	0.022	0.6	15.4	SST	CG	N
0.180	4.57	70378	1.00	25.4	.132	3.4	9.0	1.6	.50	13	4.5	20	.38	9.8	0.024	0.6	16.0	MW	CG	N
0.180	4.57	70378S	1.00	25.4	.132	3.4	7.7	1.3	.39	9.9	3.0	13	.38	9.8	0.024	0.6	16.0	SST	CG	N
0.180	4.57	70399	1.00	25.4	.128	3.3	12	2.1	.43	11	5.3	24	.44	11.1	0.026	0.7	16.8	MW	CG	N
0.180	4.57	70399S	1.00	25.4	.128	3.3	10	1.8	.34	8.7	3.6	16	.44	11.1	0.026	0.7	16.8	SST	CG	N
0.180	4.57	70419	1.00	25.4	.122	3.1	19	3.4	.38	9.6	7.3	32	.50	12.8	0.029	0.7	17.4	MW	CG	N
0.180	4.57	70419S	1.00	25.4	.122	3.1	16	2.9	.30	7.6	4.9	22	.50	12.8	0.029	0.7	17.4	SST	CG	N
0.180	4.57	70437	1.00	25.4	.116	2.9	29	5.1	.33	8.4	9.7	43	.57	14.5	0.032	0.8	17.9	MW	CG	N
0.180	4.57	70437S	1.00	25.4	.116	2.9	25	4.3	.26	6.6	6.5	29	.57	14.5	0.032	0.8	17.9	SST	CG	N
0.180	4.57	70454	1.00	25.4	.110	2.8	46	8.0	.26	6.6	12	53	.61	15.6	0.035	0.9	17.5	MW	CG	N
0.180	4.57	70454S	1.00	25.4	.110	2.8	39	6.8	.21	5.2	8.0	36	.61	15.6	0.035	0.9	17.5	SST	CG	N
0.180	4.57	70275	1.13	28.7	.152	3.9	1.2	.21	.84	21	1.0	4.5	.17	4.3	0.014	0.4	12.0	MW	CG	N
0.180	4.57	70275S	1.13	28.7	.152	3.9	1.0	.18	.63	16	.64	2.9	.17	4.3	0.014	0.4	12.0	SST	CG	N
0.180	4.57	70296	1.13	28.7	.148	3.8	1.9	.33	.71	18	1.4	6.0	.21	5.4	0.016	0.4	13.3	MW	CG	N
0.180	4.57	70296S	1.13	28.7	.148	3.8	1.6	.28	.56	14	.90	4.0	.21	5.4	0.016	0.4	13.3	SST	CG	N
0.180	4.57	70317	1.13	28.7	.144	3.7	2.8	.49	.69	17	1.9	8.5	.26	6.7	0.018	0.5	14.6	MW	CG	N
0.180	4.57	70317S	1.13	28.7	.144	3.7	2.4	.42	.54	14	1.3	5.7	.26	6.7	0.018	0.5	14.6	SST	CG	N
0.180	4.57	70338	1.13	28.7	.140	3.6	4.0	.70	.65	17	2.6	12	.32	8.1	0.020	0.5	16.0	MW	CG	N
0.180	4.57	70338S	1.13	28.7	.140	3.6	3.4	.60	.51	13	1.7	7.7	.32	8.1	0.020	0.5	16.0	SST	CG	N
0.180	4.57	70357	1.13	28.7	.136	3.5	5.7	.99	.61	16	3.5	15	.38	9.6	0.022	0.6	17.1	MW	CG	N
0.180	4.57	70357S	1.13	28.7	.136	3.5	4.8	.84	.48	12	2.3	10	.38	9.6	0.022	0.6	17.1	SST	CG	N
0.180	4.57	70379	1.13	28.7	.132	3.4	7.9	1.4	.57	14	4.5	20	.43	11.0	0.024	0.6	18.0	MW	CG	N
0.180	4.57	70379S	1.13	28.7	.132	3.4	6.7	1.2	.44	11	3.0	13	.43	11.0	0.024	0.6	18.0	SST	CG	N
0.180	4.57	70400	1.13	28.7	.128	3.3	11	1.9	.49	12	5.3	24	.48	12.3	0.026	0.7	18.6	MW	CG	N
0.180	4.57	70400S	1.13	28.7	.128	3.3	9.2	1.6	.39	9.8	3.6	16	.48	12.3	0.026	0.7	18.6	SST	CG	N
0.180	4.57	70420	1.13	28.7	.122	3.1	17	3.0	.42	11	7.3	32	.56	14.2	0.029	0.7	19.3	MW	CG	N
0.180	4.57	70420S	1.13	28.7	.122	3.1	15	2.6	.33	8.5	4.9	22	.56	14.2	0.029	0.7	19.3	SST	CG	N
0.180	4.57	70438	1.13	28.7	.116	2.9	26	4.5	.37	9.5	9.7	43	.64	16.3	0.032	0.8	20.0	MW	CG	N
0.180	4.57	70438S	1.13	28.7	.116	2.9	22	3.8	.30	7.5	6.5	29	.64	16.3	0.032	0.8	20.0	SST	CG	N
0.180	4.57	70455	1.13	28.7	.110	2.8	40	7.1	.29	7.5	12	53	.68	17.3	0.035	0.9	19.5	MW	CG	N
0.180	4.57	70455S	1.13	28.7	.110	2.8	34	6.0	.23	5.9	8.0	36	.68	17.3	0.035	0.9	19.5	SST	CG	N
0.180	4.57	70257	1.25	31.8	.156	4.0	.70	.12	.91	23	.64	2.8	.13	3.4	0.012	0.3	11.0	MW	CG	N
0.180	4.57	70257S	1.25	31.8	.156	4.0	.61	.11	.67	17	.41	1.8	.13	3.4	0.012	0.3	11.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.180	4.57	70276	1.25	31.8	.152	3.9	1.1	.19	.92	23	1.0	4.5	.18	4.6	0.014	0.4	13.0	MW	CG	N
0.180	4.57	70276S	1.25	31.8	.152	3.9	.94	.16	.69	17	.64	2.9	.18	4.6	0.014	0.4	13.0	SST	CG	N
0.180	4.57	70297	1.25	31.8	.148	3.8	1.6	.28	.85	22	1.4	6.0	.25	6.2	0.016	0.4	15.4	MW	CG	N
0.180	4.57	70297S	1.25	31.8	.148	3.8	1.4	.24	.66	17	.90	4.0	.25	6.2	0.016	0.4	15.4	SST	CG	N
0.180	4.57	70318	1.25	31.8	.144	3.7	2.6	.45	.75	19	1.9	8.5	.29	7.3	0.018	0.5	15.9	MW	CG	N
0.180	4.57	70318S	1.25	31.8	.144	3.7	2.2	.38	.59	15	1.3	5.7	.29	7.3	0.018	0.5	15.9	SST	CG	N
0.180	4.57	70339	1.25	31.8	.140	3.6	3.6	.63	.73	18	2.6	12	.35	9.0	0.020	0.5	17.6	MW	CG	N
0.180	4.57	70339S	1.25	31.8	.140	3.6	3.1	.54	.57	14	1.7	7.7	.35	9.0	0.020	0.5	17.6	SST	CG	N
0.180	4.57	70358	1.25	31.8	.136	3.5	5.1	.89	.68	17	3.5	15	.41	10.5	0.022	0.6	18.8	MW	CG	N
0.180	4.57	70358S	1.25	31.8	.136	3.5	4.3	.76	.53	13	2.3	10	.41	10.5	0.022	0.6	18.8	SST	CG	N
0.180	4.57	70380	1.25	31.8	.132	3.4	7.1	1.2	.63	16	4.5	20	.48	12.1	0.024	0.6	19.9	MW	CG	N
0.180	4.57	70380S	1.25	31.8	.132	3.4	6.0	1.0	.50	13	3.0	13	.48	12.1	0.024	0.6	19.9	SST	CG	N
0.180	4.57	70401	1.25	31.8	.128	3.3	9.7	1.7	.55	14	5.3	24	.53	13.5	0.026	0.7	20.5	MW	CG	N
0.180	4.57	70401S	1.25	31.8	.128	3.3	8.2	1.4	.43	11	3.6	16	.53	13.5	0.026	0.7	20.5	SST	CG	N
0.180	4.57	70421	1.25	31.8	.122	3.1	15	2.7	.48	12	7.3	32	.62	15.7	0.029	0.7	21.4	MW	CG	N
0.180	4.57	70421S	1.25	31.8	.122	3.1	13	2.3	.38	9.6	4.9	22	.62	15.7	0.029	0.7	21.4	SST	CG	N
0.180	4.57	70439	1.25	31.8	.116	2.9	23	4.1	.42	11	9.7	43	.71	18.0	0.032	0.8	22.1	MW	CG	N
0.180	4.57	70439S	1.25	31.8	.116	2.9	20	3.4	.33	8.4	6.5	29	.71	18.0	0.032	0.8	22.1	SST	CG	N
0.180	4.57	70456	1.25	31.8	.110	2.8	36	6.3	.33	8.4	12	53	.76	19.2	0.035	0.9	21.6	MW	CG	N
0.180	4.57	70456S	1.25	31.8	.110	2.8	31	5.4	.26	6.7	8.0	36	.76	19.2	0.035	0.9	21.6	SST	CG	N
0.180	4.57	70277	1.38	35.1	.152	3.9	.98	.17	1.0	26	1.0	4.5	.20	5.1	0.014	0.4	14.4	MW	CG	N
0.180	4.57	70277S	1.38	35.1	.152	3.9	.83	.15	.78	20	.64	2.9	.20	5.1	0.014	0.4	14.4	SST	CG	N
0.180	4.57	70298	1.38	35.1	.148	3.8	1.5	.25	.94	24	1.4	6.0	.27	6.8	0.016	0.4	16.8	MW	CG	N
0.180	4.57	70298S	1.38	35.1	.148	3.8	1.2	.22	.73	19	.90	4.0	.27	6.8	0.016	0.4	16.8	SST	CG	N
0.180	4.57	70319	1.38	35.1	.144	3.7	2.3	.40	.84	21	1.9	8.5	.32	8.1	0.018	0.5	17.6	MW	CG	N
0.180	4.57	70319S	1.38	35.1	.144	3.7	1.9	.34	.66	17	1.3	5.7	.32	8.1	0.018	0.5	17.6	SST	CG	N
0.180	4.57	70340	1.38	35.1	.140	3.6	3.3	.57	.81	20	2.6	12	.39	9.8	0.020	0.5	19.3	MW	CG	N
0.180	4.57	70340S	1.38	35.1	.140	3.6	2.8	.48	.63	16	1.7	7.7	.39	9.8	0.020	0.5	19.3	SST	CG	N
0.180	4.57	70360	1.38	35.1	.136	3.5	4.6	.81	.75	19	3.5	15	.45	11.5	0.022	0.6	20.5	MW	CG	N
0.180	4.57	70360S	1.38	35.1	.136	3.5	3.9	.68	.59	15	2.3	10	.45	11.5	0.022	0.6	20.5	SST	CG	N
0.180	4.57	70382	1.38	35.1	.132	3.4	6.4	1.1	.70	18	4.5	20	.52	13.2	0.024	0.6	21.6	MW	CG	N
0.180	4.57	70382S	1.38	35.1	.132	3.4	5.4	.95	.55	14	3.0	13	.52	13.2	0.024	0.6	21.6	SST	CG	N
0.180	4.57	70403	1.38	35.1	.128	3.3	8.7	1.5	.61	16	5.3	24	.59	14.9	0.026	0.7	22.6	MW	CG	N
0.180	4.57	70403S	1.38	35.1	.128	3.3	7.4	1.3	.48	12	3.6	16	.59	14.9	0.026	0.7	22.6	SST	CG	N
0.180	4.57	70422	1.38	35.1	.122	3.1	14	2.4	.53	13	7.3	32	.68	17.3	0.029	0.7	23.5	MW	CG	N
0.180	4.57	70422S	1.38	35.1	.122	3.1	12	2.0	.42	11	4.9	22	.68	17.3	0.029	0.7	23.5	SST	CG	N
0.180	4.57	70440	1.38	35.1	.116	2.9	21	3.6	.46	12	9.7	43	.78	19.8	0.032	0.8	24.4	MW	CG	N
0.180	4.57	70440S	1.38	35.1	.116	2.9	18	3.1	.37	9.3	6.5	29	.78	19.8	0.032	0.8	24.4	SST	CG	N
0.180	4.57	70258	1.50	38.1	.156	4.0	.60	.10	1.1	27	.64	2.8	.15	3.8	0.012	0.3	12.5	MW	CG	N
0.180	4.57	70258S	1.50	38.1	.156	4.0	.52	.09	.78	20	.41	1.8	.15	3.8	0.012	0.3	12.5	SST	CG	N
0.180	4.57	70278	1.50	38.1	.152	3.9	.89	.15	1.1	29	1.0	4.5	.22	5.6	0.014	0.4	15.6	MW	CG	N
0.180	4.57	70278S	1.50	38.1	.152	3.9	.75	.13	.85	22	.64	2.9	.22	5.6	0.014	0.4	15.6	SST	CG	N
0.180	4.57	70299	1.50	38.1	.148	3.8	1.3	.23	1.0	27	1.4	6.0	.29	7.5	0.016	0.4	18.4	MW	CG	N
0.180	4.57	70299S	1.50	38.1	.148	3.8	1.1	.19	.82	21	.90	4.0	.29	7.5	0.016	0.4	18.4	SST	CG	N
0.180	4.57	70320	1.50	38.1	.144	3.7	2.1	.36	.94	24	1.9	8.5	.35	8.9	0.018	0.5	19.4	MW	CG	N
0.180	4.57	70320S	1.50	38.1	.144	3.7	1.7	.31	.73	19	1.3	5.7	.35	8.9	0.018	0.5	19.4	SST	CG	N
0.180	4.57	70341	1.50	38.1	.140	3.6	3.0	.52	.89	23	2.6	12	.42	10.7	0.020	0.5	21.0	MW	CG	N
0.180	4.57	70341S	1.50	38.1	.140	3.6	2.5	.44	.69	18	1.7	7.7	.42	10.7	0.020	0.5	21.0	SST	CG	N
0.180	4.57	70361	1.50	38.1	.136	3.5	4.2	.74	.82	21	3.5	15	.49	12.5	0.022	0.6	22.4	MW	CG	N
0.180	4.57	70361S	1.50	38.1	.136	3.5	3.6	.63	.64	16	2.3	10	.49	12.5	0.022	0.6	22.4	SST	CG	N
0.180	4.57	70383	1.50	38.1	.132	3.4	5.8	1.0	.77	19	4.5	20	.57	14.4	0.024	0.6	23.6	MW	CG	N
0.180	4.57	70383S	1.50	38.1	.132	3.4	5.0	.87	.60	15	3.0	13	.57	14.4	0.024	0.6	23.6	SST	CG	N
0.180	4.57	70404	1.50	38.1	.128	3.3	8.0	1.4	.66	17	5.3	24	.64	16.2	0.026	0.7	24.5	MW	CG	N
0.180	4.57	70404S	1.50	38.1	.128	3.3	6.8	1.2	.52	13	3.6	16	.64	16.2	0.026	0.7	24.5	SST	CG	N
0.180	4.57	70423	1.50	38.1	.122	3.1	13	2.2	.58	15	7.3	32	.74	18.8	0.029	0.7	25.5	MW	CG	N
0.180	4.57	70423S	1.50	38.1	.122	3.1	11	1.9	.46	12	4.9	22	.74	18.8	0.029	0.7	25.5	SST	CG	N
0.180	4.57	70441	1.50	38.1	.116	2.9	19	3.4	.50	13	9.7	43	.84	21.3	0.032	0.8	26.3	MW	CG	N
0.180	4.57	70441S	1.50	38.1	.116	2.9	16	2.9	.40	10	6.5	29	.84	21.3	0.032	0.8	26.3	SST	CG	N
0.180	4.57	70457	1.50	38.1	.110	2.8	30	5.2	.40	10	12	53	.91	23.0	0.035	0.9	25.9	MW	CG	N
0.180	4.57	70457S	1.50	38.1	.110	2.8	25	4.4	.32	8.1	8.0	36	.91	23.0	0.035	0.9	25.9	SST	CG	N
0.180	4.57	70300	1.75	44.5	.148	3.8	1.1	.19	1.2	32	1.4	6.0	.35	8.8	0.016	0.4	21.6	MW	CG	N
0.180	4.57	70300S	1.75	44.5	.148	3.8	.93	.16	.97	25	.90	4.0	.35	8.8	0.016	0.4	21.6	SST	CG	N
0.180	4.57	70321	1.75	44.5	.144	3.7	1.7	.31	1.1	28	1.9	8.5	.40	10.2	0.018	0.5	22.4	MW	CG	N
0.180	4.57	70321S	1.75	44.5	.144	3.7	1.5	.26	.86	22	1.3	5.7	.40	10.2	0.018	0.5	22.4	SST	CG	N
0.180	4.57	70342	1.75	44.5	.140	3.6	2.5	.44	1.0	26	2.6	12	.49	12.3	0.020	0.5	24.3	MW	CG	N
0.180	4.57	70342S	1.75	44.5	.140	3.6	2.1	.38	.81	21	1.7	7.7	.49	12.3	0.020	0.5	24.3	SST	CG	N
0.180	4.57	70362	1.75	44.5	.136	3.5	3.6	.64	.95	24	3.5	15	.56	14.2	0.022	0.6	25.5	MW	CG	N
0.180	4.57	70362S	1.75	44.5	.136	3.5	3.1	.54	.75	19	2.3	10	.56	14.2	0.022	0.6	25.5	SST	CG	N
0.180	4.57	70384	1.75	44.5	.132	3.4	5.0	.88	.89	23	4.5	20	.65	16.5	0.024	0.6	27.1	MW	CG	N
0.180	4.57	70384S	1.75	44.5	.132	3.4	4.3	.74	.70	18	3.0	13	.65	16.5	0.024	0.6	27.1	SST	CG	N
0.180	4.57	70405	1.75	44.5	.128	3.3	6.9	1.2	.78	20	5.3	24	.73	18.7	0.026	0.7	28.3	MW	CG	N
0.180	4.57	70405S	1.75	44.5	.128	3.3	5.8	1.0	.61	16	3.6	16	.73	18.7	0.026	0.7	28.3	SST	CG	N
0.180	4.57	70424	1.75	44.5	.122	3.1	11	1.9	.68	17	7.3	32	.86	21.8	0.029	0.7	29.6	MW	CG	N
0.180	4.57	70424S	1.75	44.5	.122	3.1	9.1	1.6	.54	14	4.9	22	.86	21.8	0.029	0.7	29.6	SST	CG	N
0.180	4.57	70442	1.75	44.5	.116	2.9	16	2.9	.59	15	9.7	43	.98	24.8	0.032	0.8	30.5	MW	CG	N
0.180	4.57	70442S	1.75	44.5	.116	2.9	14	2.4	.47	12	6.5	29	.98	24.8	0.032	0.8	30.5	SST	CG	N
0.180	4.57	70458	1.75	44.5	.110	2.8	25	4.4	.47	12	12	53	1.05	26.7	0.035	0.9	30.0	MW	CG	N
0.180	4.57	70458S	1.75	44.5	.110	2.8	22	3.8	.37	9.5	8.0	36	1.05	26.7	0.035	0.9	30.0	SST	CG	N
0.180	4.57	70385	2.00	50.8	.132	3.4	4.4	.76	1.0	26	4.5	20	.74	18.8	0.024	0.6	30.9	MW	CG	N
0.180	4.57	70385S	2.00	50.8	.132	3.4	3.7	.65	.80	20	3.0	13	.74	18.8	0.024	0.6	30.9	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.180	4.57	70406	2.00	50.8	.128	3.3	6.0	1.0	.89	23	5.3	24	.84	21.3	0.026	0.7	32.3	MW	CG	N
0.180	4.57	70406S	2.00	50.8	.128	3.3	5.1	.89	.70	18	3.6	16	.84	21.3	0.026	0.7	32.3	SST	CG	N
0.180	4.57	70425	2.00	50.8	.122	3.1	9.4	1.6	.78	20	7.3	32	.98	24.8	0.029	0.7	33.6	MW	CG	N
0.180	4.57	70425S	2.00	50.8	.122	3.1	7.9	1.4	.61	16	4.9	22	.98	24.8	0.029	0.7	33.6	SST	CG	N
0.180	4.57	70443	2.00	50.8	.116	2.9	14	2.5	.69	17	9.7	43	1.12	28.4	0.032	0.8	35.0	MW	CG	N
0.180	4.57	70443S	2.00	50.8	.116	2.9	12	2.1	.54	14	6.5	29	1.12	28.4	0.032	0.8	35.0	SST	CG	N
0.180	4.57	70459	2.00	50.8	.110	2.8	22	3.9	.54	14	12	53	1.19	30.3	0.035	0.9	34.1	MW	CG	N
0.180	4.57	70459S	2.00	50.8	.110	2.8	19	3.3	.43	11	8.0	36	1.19	30.3	0.035	0.9	34.1	SST	CG	N
0.184	4.67	12764	.25	6.4	.164	4.2	.78	.14	.19	4.7	.14	.64	.07	1.7	0.010	0.3	5.50	MW	C	N
0.184	4.67	B4-24	.86	21.8	.138	3.5	7.4	1.3	.51	13	3.8	17	.35	8.8	0.023	0.6	15.0	MW	CG	BO
0.188	4.78	OO-60	.19	4.8	.160	4.1	11	1.9	.09	2.3	.97	4.3	.06	1.4	0.014	0.4	3.00	MW	C	N
0.188	4.78	AA-33	.19	4.8	.156	4.0	8.4	1.5	.10	2.6	.87	3.9	.08	2.0	0.016	0.4	4.00	SST	C	N
0.188	4.78	CC-5	.19	4.8	.140	3.6	110	19	.04	.99	4.3	19	.10	2.4	0.024	0.6	3.00	MW	C	N
0.188	4.78	V-75	.19	4.8	.140	3.6	64	11	.04	1.1	2.9	13	.11	2.7	0.024	0.6	3.50	SST	C	N
0.188	4.78	U-15	.19	4.8	.130	3.3	258	45	.03	.69	7.0	31	.12	2.9	0.029	0.7	3.00	MW	C	Z
0.188	4.78	PP-69	.22	5.6	.148	3.8	15	2.6	.10	2.5	1.4	6.4	.12	3.0	0.020	0.5	5.00	SST	C	N
0.188	4.78	B1-22	.23	5.9	.138	3.5	38	6.6	.08	2.1	3.1	14	.15	3.8	0.025	0.6	5.00	SST	C	N
0.188	4.78	FF-62	.25	6.4	.158	4.0	7.2	1.3	.15	3.8	1.1	4.8	.08	1.9	0.015	0.4	4.00	MW	C	N
0.188	4.78	S-1460	.25	6.4	.158	4.0	4.5	.79	.16	4.0	.72	3.2	.09	2.2	0.015	0.4	4.75	SST	C	N
0.188	4.78	B9-31	.25	6.4	.150	3.8	16	2.7	.14	3.5	2.2	9.6	.09	2.2	0.019	0.5	4.50	MW	CG	Z
0.188	4.78	LL-15	.25	6.4	.148	3.8	22	3.8	.08	2.0	1.7	7.4	.10	2.5	0.020	0.5	4.00	SST	C	N
0.188	4.78	II-2	.25	6.4	.144	3.7	26	4.6	.08	2.2	2.2	9.8	.12	3.1	0.022	0.6	4.50	SST	C	N
0.188	4.78	A10-6	.25	6.4	.142	3.6	30	5.3	.12	3.2	3.8	17	.12	2.9	0.023	0.6	5.00	MW	CG	GI
0.188	4.78	S-1280	.25	6.4	.138	3.5	33	5.7	.09	2.4	3.1	14	.14	3.5	0.025	0.6	5.50	SST	CG	N
0.188	4.78	EE-3	.25	6.4	.136	3.5	52	9.2	.09	2.4	4.9	22	.16	4.0	0.026	0.7	5.00	MW	C	N
0.188	4.78	O-13	.25	6.4	.136	3.5	63	11	.08	2.1	5.1	23	.14	3.6	0.026	0.7	4.50	MW	C	N
0.188	4.78	V-83	.25	6.4	.136	3.5	155	27	.03	.84	5.1	23	.10	2.6	0.026	0.7	3.00	MW	C	N
0.188	4.78	A-44	.25	6.4	.132	3.4	64	11	.07	1.7	4.2	19	.14	3.6	0.028	0.7	5.00	SST	CG	N
0.188	4.78	AA-2	.25	6.4	.104	2.6	639	112	.02	.55	14	61	.19	4.7	0.042	1.1	4.25	SPR	CG	N
0.188	4.78	G-60	.28	7.1	.154	3.9	5.3	.93	.16	4.1	.86	3.8	.12	3.0	0.017	0.4	6.00	SST	C	N
0.188	4.78	O-119	.28	7.1	.154	3.9	8.1	1.4	.18	4.6	1.5	6.5	.10	2.6	0.017	0.4	5.00	MW	C	N
0.188	4.78	EE-11	.28	7.1	.142	3.6	13	2.3	.10	2.5	1.3	5.7	.18	4.7	0.023	0.6	8.00	SST	CG	N
0.188	4.78	F-18	.28	7.1	.138	3.5	38	6.6	.12	3.0	4.5	20	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.188	4.78	908	.31	7.9	.170	4.3	.37	.07	.24	6.2	.09	.40	.07	1.7	0.009	0.2	6.50	MW	C	Z
0.188	4.78	FF-7	.31	7.9	.170	4.3	.35	.06	.24	6.2	.09	.38	.07	1.8	0.009	0.2	6.75	MW	C	N
0.188	4.78	A9-2	.31	7.9	.164	4.2	1.2	.20	.23	5.7	.26	1.2	.09	2.2	0.012	0.3	6.25	SST	C	N
0.188	4.78	10063	.31	7.9	.158	4.0	2.9	.50	.19	4.9	.55	2.4	.12	3.0	0.015	0.4	7.00	MW	C	GI
0.188	4.78	V-14	.31	7.9	.158	4.0	1.6	.27	.15	3.7	.23	1.0	.17	4.2	0.015	0.4	10.0	SST	C	N
0.188	4.78	G-70	.31	7.9	.158	4.0	3.5	.62	.21	5.3	.73	3.2	.11	2.7	0.015	0.4	6.00	MW	C	N
0.188	4.78	F-76	.31	7.9	.156	4.0	5.5	.96	.16	4.0	.87	3.9	.08	2.0	0.016	0.4	5.00	SST	CG	N
0.188	4.78	DD-70	.31	7.9	.152	3.9	8.4	1.5	.15	3.7	1.2	5.5	.11	2.9	0.018	0.5	5.25	SST	C	N
0.188	4.78	S-1007	.31	7.9	.152	3.9	11	1.9	.11	2.9	1.2	5.5	.10	2.5	0.018	0.5	4.50	SST	C	N
0.188	4.78	M-119	.31	7.9	.150	3.8	17	3.0	.08	2.1	1.4	6.4	.10	2.4	0.019	0.5	4.00	SST	C	N
0.188	4.78	2983	.31	7.9	.148	3.8	20	3.5	.13	3.2	2.5	11	.11	2.8	0.020	0.5	4.50	MW	C	Z
0.188	4.78	II-49	.31	7.9	.148	3.8	9.9	1.7	.17	4.4	1.7	7.6	.14	3.6	0.020	0.5	7.00	MW	CG	Z
0.188	4.78	DD-12	.31	7.9	.144	3.7	22	3.8	.10	2.6	2.2	9.8	.13	3.4	0.022	0.6	5.00	SST	C	N
0.188	4.78	J-96	.31	7.9	.144	3.7	18	3.2	.18	4.6	3.3	15	.13	3.4	0.022	0.6	6.00	MW	CG	GI
0.188	4.78	2522	.31	7.9	.128	3.3	118	21	.07	1.7	7.7	34	.17	4.2	0.030	0.8	4.50	MW	C	Z
0.188	4.78	A15-7	.31	7.9	.122	3.1	117	20	.06	1.6	7.3	33	.20	5.0	0.033	0.8	6.00	SPR	CG	N
0.188	4.78	A9-22	.34	8.7	.166	4.2	.86	.15	.27	6.8	.23	1.0	.08	2.0	0.011	0.3	6.00	SST	C	N
0.188	4.78	S-853	.34	8.7	.156	4.0	3.6	.64	.22	5.7	.81	3.6	.12	3.0	0.016	0.4	6.50	SST	C	N
0.188	4.78	S-1003	.34	8.7	.152	3.9	6.4	1.1	.19	4.9	1.2	5.5	.13	3.3	0.018	0.5	6.25	SST	C	N
0.188	4.78	F-66	.34	8.7	.136	3.5	39	6.8	.13	3.4	5.1	23	.18	4.6	0.026	0.7	6.00	MW	C	Z
0.188	4.78	F-16	.34	8.7	.122	3.1	114	20	.06	1.6	7.3	33	.23	5.9	0.033	0.8	6.00	HD	C	Z
0.188	4.78	II-86	.38	9.5	.172	4.4	.14	.02	.30	7.6	.04	.18	.08	1.9	0.008	0.2	8.50	SST	C	N
0.188	4.78	WW-13	.38	9.5	.168	4.3	.75	.13	.30	7.7	.23	1.0	.06	1.5	0.010	0.3	5.00	SST	C	N
0.188	4.78	PP-98	.38	9.5	.164	4.2	1.1	.19	.28	7.1	.31	1.4	.10	2.4	0.012	0.3	7.00	MW	C	N
0.188	4.78	II-14	.38	9.5	.156	4.0	4.7	.82	.26	6.7	1.2	5.5	.11	2.8	0.016	0.4	6.00	MW	C	N
0.188	4.78	B12-17	.38	9.5	.152	3.9	8.2	1.4	.23	5.7	1.8	8.2	.10	2.6	0.018	0.5	5.75	MW	CG	N
0.188	4.78	J-39	.38	9.5	.150	3.8	8.8	1.5	.25	6.3	2.2	9.6	.12	3.1	0.019	0.5	6.50	MW	CG	N
0.188	4.78	Y-78	.38	9.5	.146	3.7	20	3.5	.15	3.7	2.9	13	.13	3.2	0.021	0.5	5.00	MW	C	N
0.188	4.78	3425	.38	9.5	.144	3.7	25	4.4	.13	3.4	3.3	15	.13	3.4	0.022	0.6	5.00	MW	C	Z
0.188	4.78	JJ-62	.38	9.5	.144	3.7	19	3.3	.12	3.0	2.2	9.8	.12	3.1	0.022	0.6	5.50	SST	CG	N
0.188	4.78	B5-6	.38	9.5	.142	3.6	19	3.3	.20	5.1	3.8	17	.16	3.9	0.023	0.6	6.75	MW	CG	N
0.188	4.78	10748	.38	9.5	.140	3.6	23	4.0	.19	4.8	4.3	19	.19	4.7	0.024	0.6	6.75	MW	C	N
0.188	4.78	F-87	.38	9.5	.136	3.5	33	5.7	.16	4.0	5.1	23	.20	5.1	0.026	0.7	6.75	MW	C	Z
0.188	4.78	B1-11	.38	9.5	.134	3.4	33	5.8	.12	2.9	3.8	17	.19	4.8	0.027	0.7	7.00	SST	CG	N
0.188	4.78	AA-25	.38	9.5	.132	3.4	29	5.1	.11	2.8	3.2	14	.27	6.8	0.028	0.7	8.50	SST	C	N
0.188	4.78	VV-5	.38	9.5	.132	3.4	42	7.4	.10	2.5	4.2	19	.21	5.3	0.028	0.7	6.50	SST	C	N
0.188	4.78	919	.38	9.5	.124	3.1	101	18	.09	2.3	9.3	41	.22	5.7	0.032	0.8	6.00	MW	C	Z
0.188	4.78	O-28	.38	9.5	.124	3.1	132	23	.05	1.3	6.7	30	.19	4.9	0.032	0.8	5.00	SPR	C	Z
0.188	4.78	A13-15	.38	9.5	.122	3.1	83	14	.08	2.1	6.8	30	.23	5.9	0.033	0.8	7.00	SST	CG	N
0.188	4.78	S-838	.38	9.5	.118	3.0	121	21	.06	1.6	7.7	34	.26	6.7	0.035	0.9	6.50	SST	C	N
0.188	4.78	B5-66	.41	10.3	.164	4.2	1.1	.19	.31	7.9	.34	1.5	.10	2.4	0.012	0.3	7.00	MW	C	N
0.188	4.78	OO-18	.41	10.3	.160	4.1	3.6	.62	.27	6.9	.97	4.3	.08	2.1	0.014	0.4	5.00	MW	C	N
0.188	4.78	11362	.41	10.3	.160	4.1	1.5	.27	.28	7.1	.43	1.9	.13	3.2	0.014	0.4	8.00	SST	C	N
0.188	4.78	EE-8	.41	10.3	.152	3.9	4.2	.73	.25	6.4	1.1	4.7	.15	3.9	0.018	0.5	8.50	SST	CG	N
0.188	4.78	S-19	.41	10.3	.152	3.9	6.4	1.1	.19	4.9	1.2	5.5	.13	3.3	0.018	0.5	6.25	SST	C	N
0.188	4.78	L-68	.41	10.3	.148	3.8	6.9	1.2	.21	5.2	1.4	6.3	.20	5.1	0.020	0.5	9.00	MW	C	N
0.188	4.78	F-93	.41	10.3	.144	3.7	11	1.9	.19	4.7	2.0	8.9	.22	5.6	0.022	0.6	9.00	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.188	4.78	J-33	.41	10.3	.144	3.7	10	1.8	.20	5.0	2.0	8.8	.21	5.3	0.022	0.6	8.50	SST	C	N
0.188	4.78	L-49	.41	10.3	.142	3.6	21	3.8	.18	4.5	3.8	17	.17	4.2	0.023	0.6	6.25	MW	C	N
0.188	4.78	J-20	.41	10.3	.138	3.5	44	7.7	.10	2.6	4.6	20	.15	3.8	0.025	0.6	5.00	MW	C	Z
0.188	4.78	Z-86	.41	10.3	.136	3.5	27	4.8	.12	3.2	3.4	15	.18	4.6	0.026	0.7	7.00	SST	CG	N
0.188	4.78	GG-14	.41	10.3	.134	3.4	57	10	.10	2.5	5.7	25	.14	3.6	0.027	0.7	5.25	MW	CG	N
0.188	4.78	J-83	.41	10.3	.134	3.4	31	5.4	.18	4.7	5.7	25	.22	5.5	0.027	0.7	8.00	MW	CG	N
0.188	4.78	F-4	.41	10.3	.134	3.4	37	6.4	.16	4.0	5.7	25	.22	5.5	0.027	0.7	7.00	MW	C	Z
0.188	4.78	JJ-29	.41	10.3	.132	3.4	34	5.9	.13	3.2	4.2	19	.22	5.5	0.028	0.7	7.75	SST	CG	N
0.188	4.78	11108	.41	10.3	.126	3.2	47	8.2	.12	3.1	5.7	25	.26	6.7	0.031	0.8	8.50	SST	CG	N
0.188	4.78	F-68	.41	10.3	.124	3.1	81	14	.08	2.1	6.7	30	.26	6.5	0.032	0.8	7.00	SPR	C	Z
0.188	4.78	3449	.41	10.3	.112	2.8	139	24	.07	1.9	10	46	.32	8.2	0.038	1.0	8.50	SPR	CG	GI
0.188	4.78	S-1427	.44	11.1	.166	4.2	.84	.15	.36	9.1	.30	1.3	.08	2.0	0.011	0.3	6.00	SST	C	N
0.188	4.78	10679	.44	11.1	.164	4.2	.81	.14	.33	8.4	.27	1.2	.11	2.7	0.012	0.3	8.03	SST	C	N
0.188	4.78	10590	.44	11.1	.162	4.1	1.5	.27	.33	8.5	.51	2.3	.10	2.6	0.013	0.3	7.00	MW	C	N
0.188	4.78	M-8	.44	11.1	.152	3.9	6.1	1.1	.29	7.5	1.8	8.0	.14	3.7	0.018	0.5	7.00	MW	C	N
0.188	4.78	W-60A	.44	11.1	.152	3.9	4.9	.87	.25	6.3	1.2	5.5	.15	3.9	0.018	0.5	7.50	SST	C	N
0.188	4.78	4329	.44	11.1	.140	3.6	13	2.2	.16	4.0	2.0	8.7	.28	7.2	0.024	0.6	10.8	MW	C	N
0.188	4.78	A9-9	.44	11.1	.138	3.5	19	3.3	.16	4.1	3.1	14	.21	5.2	0.025	0.6	8.25	SST	CG	N
0.188	4.78	F-98	.44	11.1	.138	3.5	22	3.9	.21	5.3	4.6	20	.23	5.7	0.025	0.6	8.00	MW	C	Z
0.188	4.78	S-1432	.44	11.1	.130	3.3	50	8.7	.09	2.4	4.7	21	.22	5.5	0.029	0.7	6.50	SST	C	N
0.188	4.78	FF-2	.44	11.1	.128	3.3	42	7.4	.17	4.3	7.1	32	.27	6.9	0.030	0.8	9.00	MW	CG	Z
0.188	4.78	F-71	.44	11.1	.124	3.1	62	11	.11	2.7	6.7	30	.30	7.7	0.032	0.8	8.50	SPR	C	Z
0.188	4.78	Z-12	.44	11.1	.124	3.1	64	11	.10	2.5	6.2	28	.27	6.9	0.032	0.8	7.50	SST	C	N
0.188	4.78	S-1512	.47	11.9	.164	4.2	1.1	.20	.34	8.7	.39	1.7	.09	2.2	0.012	0.3	6.25	SST	C	N
0.188	4.78	2553	.47	11.9	.148	3.8	11	1.9	.23	5.9	2.5	11	.15	3.8	0.020	0.5	6.50	MW	C	Z
0.188	4.78	MM-26	.47	11.9	.148	3.8	9.7	1.7	.26	6.6	2.5	11	.16	4.1	0.020	0.5	7.00	MW	C	N
0.188	4.78	Y-77	.47	11.9	.140	3.6	22	3.9	.19	4.9	4.3	19	.19	4.9	0.024	0.6	7.00	MW	C	Z
0.188	4.78	J-78	.47	11.9	.138	3.5	26	4.6	.17	4.4	4.6	20	.20	5.1	0.025	0.6	7.00	MW	C	Z
0.188	4.78	Q-22	.47	11.9	.136	3.5	26	4.6	.19	4.9	5.1	23	.23	5.9	0.026	0.7	8.00	MW	C	Z
0.188	4.78	GG-3	.47	11.9	.130	3.3	51	8.9	.09	2.3	4.7	21	.19	4.8	0.029	0.7	6.50	SST	CG	N
0.188	4.78	FF-59	.47	11.9	.126	3.2	55	9.7	.10	2.6	5.7	25	.26	6.7	0.031	0.8	7.50	SST	C	N
0.188	4.78	II-63	.47	11.9	.118	3.0	102	18	.08	2.1	8.3	37	.28	7.1	0.035	0.9	8.00	SPR	CG	N
0.188	4.78	M-125	.47	11.9	.112	2.8	178	31	.06	1.5	10	46	.30	7.7	0.038	1.0	7.00	SPR	C	N
0.188	4.78	A14-5	.50	12.7	.168	4.3	.26	.04	.38	9.7	.10	.43	.12	3.0	0.010	0.3	11.0	SST	C	N
0.188	4.78	11355	.50	12.7	.164	4.2	1.3	.23	.30	7.7	.39	1.7	.08	2.1	0.012	0.3	5.75	SST	C	N
0.188	4.78	GG-18	.50	12.7	.160	4.1	.93	.16	.32	8.1	.29	1.3	.18	4.6	0.014	0.4	12.0	SST	C	N
0.188	4.78	B5-11	.50	12.7	.158	4.0	2.8	.49	.38	9.7	1.1	4.8	.12	3.0	0.015	0.4	7.00	MW	C	N
0.188	4.78	3727	.50	12.7	.154	3.9	2.3	.41	.27	6.9	.63	2.8	.23	5.8	0.017	0.4	12.5	MW	C	Z
0.188	4.78	CC-61	.50	12.7	.148	3.8	8.2	1.4	.31	7.8	2.5	11	.18	4.6	0.020	0.5	8.00	MW	C	Z
0.188	4.78	K-13	.50	12.7	.148	3.8	6.2	1.1	.28	7.1	1.7	7.7	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.188	4.78	B4-18	.50	12.7	.148	3.8	8.1	1.4	.31	7.9	2.5	11	.18	4.6	0.020	0.5	8.00	MW	C	N
0.188	4.78	NN-29	.50	12.7	.146	3.7	9.0	1.6	.21	5.4	1.9	8.6	.19	4.8	0.021	0.5	8.00	SST	C	N
0.188	4.78	3530	.50	12.7	.144	3.7	8.3	1.5	.26	6.6	2.1	9.6	.24	6.1	0.022	0.6	11.0	MW	CG	Z
0.188	4.78	A13-1	.50	12.7	.144	3.7	12	2.1	.28	7.0	3.3	15	.18	4.6	0.022	0.6	8.25	MW	CG	GI
0.188	4.78	920	.50	12.7	.142	3.6	11	2.0	.25	6.3	2.8	13	.25	6.4	0.023	0.6	10.0	MW	C	Z
0.188	4.78	FF-27	.50	12.7	.140	3.6	28	4.8	.10	2.6	2.9	13	.17	4.3	0.024	0.6	6.00	SST	C	N
0.188	4.78	O-108	.50	12.7	.140	3.6	22	3.9	.19	4.9	4.3	19	.19	4.9	0.024	0.6	7.00	MW	C	BO
0.188	4.78	VV-69	.50	12.7	.140	3.6	16	2.8	.18	4.5	2.9	13	.22	5.5	0.024	0.6	8.00	SST	C	N
0.188	4.78	3986	.50	12.7	.138	3.5	26	4.6	.17	4.4	4.6	20	.20	5.1	0.025	0.6	7.00	MW	C	Z
0.188	4.78	LL-42	.50	12.7	.138	3.5	20	3.6	.22	5.7	4.6	20	.24	6.0	0.025	0.6	8.50	MW	C	N
0.188	4.78	B7-18	.50	12.7	.138	3.4	19	3.4	.24	6.0	4.6	20	.22	5.6	0.025	0.6	8.75	MW	CG	N
0.188	4.78	W-69	.50	12.7	.134	3.4	18.04	3.1	.16	4.1	2.9	12.8	.297	7.4	0.027	0.69	11.0	SST	CG	N
0.188	4.78	528	.50	12.7	.132	3.4	34	5.9	.19	4.8	6.3	28	.27	6.8	0.028	0.7	8.50	MW	C	Z
0.188	4.78	DD-9	.50	12.7	.128	3.3	37	6.5	.14	3.5	5.2	23	.30	7.6	0.030	0.8	9.00	SST	C	N
0.188	4.78	EE-29	.50	12.7	.128	3.3	30	5.3	.14	3.6	4.2	19	.36	9.1	0.030	0.8	12.0	MW	CG	N
0.188	4.78	NN-3	.50	12.7	.128	3.3	42	7.4	.18	4.7	7.7	34	.30	7.6	0.030	0.8	9.00	MW	C	N
0.188	4.78	B6-15	.50	12.7	.126	3.2	47	8.3	.18	4.6	8.5	38	.29	7.3	0.031	0.8	9.25	MW	CG	N
0.188	4.78	PP-82	.50	12.7	.124	3.1	44	7.7	.14	3.6	6.2	28	.35	8.9	0.032	0.8	10.0	SST	C	N
0.188	4.78	S-709	.50	12.7	.124	3.1	50	8.8	.12	3.1	6.2	28	.32	8.1	0.032	0.8	9.00	SST	C	N
0.188	4.78	F-22	.50	12.7	.122	3.1	62	11	.12	3.0	7.3	33	.35	8.8	0.033	0.8	9.50	SPR	C	Z
0.188	4.78	B15-18	.53	13.5	.144	3.7	29	5.2	.11	2.9	3.3	15	.10	2.5	0.022	0.6	4.50	MW	CG	GI
0.188	4.78	F-89	.53	13.5	.136	3.5	23	4.0	.22	5.7	5.1	23	.25	6.4	0.026	0.7	8.75	MW	C	Z
0.188	4.78	2637	.53	13.5	.132	3.4	27	4.8	.22	5.7	6.1	27	.31	7.8	0.028	0.7	10.0	MW	C	Z
0.188	4.78	NN-74	.53	13.5	.132	3.4	21	3.7	.20	5.1	4.2	19	.31	7.8	0.028	0.7	11.0	SST	CG	N
0.188	4.78	FF-29	.56	14.3	.164	4.2	.93	.16	.45	12	.42	1.9	.11	2.7	0.012	0.3	8.00	MW	C	Z
0.188	4.78	J-21	.56	14.3	.158	4.0	1.2	.21	.34	8.6	.40	1.8	.23	5.7	0.015	0.4	14.0	MW	C	Z
0.188	4.78	KK-14	.56	14.3	.158	4.0	.65	.11	.23	5.9	.15	.68	.33	8.4	0.015	0.4	21.0	SST	C	N
0.188	4.78	VV-11	.56	14.3	.158	4.0	2.4	.42	.43	11	1.0	4.5	.14	3.4	0.015	0.4	8.00	MW	C	N
0.188	4.78	H-8	.56	14.3	.154	3.9	2.0	.36	.32	8.2	.66	2.9	.24	6.0	0.017	0.4	14.0	MW	CG	Z
0.188	4.78	Q-17	.56	14.3	.150	3.8	4.4	.77	.35	9.0	1.5	6.9	.21	5.3	0.019	0.5	11.0	MW	C	N
0.188	4.78	3835	.56	14.3	.148	3.8	8.2	1.4	.31	7.8	2.5	11	.18	4.6	0.020	0.5	8.00	MW	C	Z
0.188	4.78	EE-6	.56	14.3	.148	3.8	11	1.9	.16	3.9	1.7	7.4	.12	3.0	0.020	0.5	6.00	SST	CG	N
0.188	4.78	S-1328	.56	14.3	.144	3.7	14	2.5	.15	3.9	2.2	9.8	.14	3.6	0.022	0.6	6.50	SST	C	N
0.188	4.78	S-831	.56	14.3	.144	3.7	7.3	1.3	.30	7.6	2.2	9.8	.24	6.1	0.022	0.6	10.9	SST	CG	N
0.188	4.78	L-18	.56	14.3	.142	3.6	11	2.0	.31	7.8	3.5	16	.25	6.4	0.023	0.6	10.0	MW	C	Z
0.188	4.78	2562	.56	14.3	.140	3.6	11	1.9	.27	7.0	3.0	13	.29	7.3	0.024	0.6	12.0	MW	CG	Z
0.188	4.78	S-1269	.56	14.3	.140	3.6	15	2.6	.19	4.9	2.9	13	.23	5.8	0.024	0.6	8.50	SST	C	N
0.188	4.78	N-93	.56	14.3	.138	3.5	13	2.2	.24	6.1	3.1	14	.28	7.0	0.025	0.6	11.0	SST	CG	N
0.188	4.78	S-1116	.56	14.3	.138	3.5	15	2.7	.20	5.1	3.1	14	.26	6.7	0.025	0.6	9.50	SST	C	N
0.188	4.78	CC-17	.56	14.3	.134	3.4	23	4.1	.24	6.2	5.7	25	.30	7.5	0.027	0.7	10.0	MW	C	Z
0.188	4.78	PP-37	.56	14.3	.134	3.4	31	5.4	.18	4.7	5.7	25	.24	6.2	0.027	0.7	8.00	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.188	4.78	II-3	.56	14.3	.130	3.3	52	9.0	.14	3.5	7.0	31	.23	5.9	0.029	0.7	7.00	MW	C	Z
0.188	4.78	Z-91	.56	14.3	.128	3.3	50	8.8	.15	3.9	7.7	34	.27	6.9	0.030	0.8	8.00	MW	C	Z
0.188	4.78	N-25	.56	14.3	.118	3.0	91	16	.09	2.2	7.7	34	.28	7.1	0.035	0.9	8.00	SST	CG	N
0.188	4.78	JJ-18	.59	15.1	.160	4.1	1.1	.19	.41	10	.44	1.9	.18	4.6	0.014	0.4	12.0	MW	C	N
0.188	4.78	U-100	.59	15.1	.160	4.1	1.7	.31	.48	12	.84	3.7	.11	2.8	0.014	0.4	8.00	MW	CG	N
0.188	4.78	O-36	.59	15.1	.152	3.9	6.1	1.1	.30	7.6	1.8	8.2	.14	3.7	0.018	0.5	7.00	MW	C	N
0.188	4.78	A9-15	.59	15.1	.148	3.8	3.1	.55	.27	6.9	.85	3.8	.32	8.1	0.020	0.5	16.0	SST	CG	N
0.188	4.78	Z-46	.59	15.1	.148	3.8	4.8	.84	.35	8.9	1.7	7.4	.22	5.6	0.020	0.5	11.0	SST	CG	N
0.188	4.78	B14-43	.59	15.1	.146	3.7	6.0	1.1	.34	8.7	2.0	9.1	.25	6.4	0.021	0.5	12.0	MW	CG	N
0.188	4.78	B14-48	.59	15.1	.132	3.4	22	3.8	.26	6.5	5.5	25	.34	8.5	0.028	0.7	12.0	MW	CG	N
0.188	4.78	V-50	.59	15.1	.130	3.3	18	3.2	.17	4.4	3.2	14	.42	10.7	0.029	0.7	14.5	SST	CG	N
0.188	4.78	B1-9	.59	15.1	.122	3.1	44	7.6	.16	4.0	6.8	30	.38	9.6	0.033	0.8	11.5	SST	CG	N
0.188	4.78	F-73	.59	15.1	.122	3.1	54	9.4	.14	3.5	7.3	33	.38	9.6	0.033	0.8	10.5	HD	C	N
0.188	4.78	B15-6	.59	15.1	.114	2.9	87	15	.11	2.8	9.7	43	.41	10.3	0.037	0.9	11.0	SPR	CG	N
0.188	4.78	B4-5	.59	15.1	.138	3.5	16	2.8	.29	7.4	4.6	20	.28	7.1	0.025	0.6	10.3	MW	C	N
0.188	4.78	10896	.63	15.9	.170	4.3	.16	.03	.52	13	.08	.37	.11	2.7	0.009	0.2	11.0	SST	C	N
0.188	4.78	RR-13	.63	15.9	.164	4.2	.54	.09	.48	12	.26	1.1	.14	3.7	0.012	0.3	11.0	SST	C	N
0.188	4.78	N-314	.63	15.9	.158	4.0	1.8	.31	.47	12	.83	3.7	.15	3.9	0.015	0.4	10.1	MW	CG	N
0.188	4.78	OO-11	.63	15.9	.156	4.0	.86	.15	.27	6.9	.24	1.0	.35	8.9	0.016	0.4	21.0	SST	C	N
0.188	4.78	B9-63	.63	15.9	.150	3.8	6.5	1.1	.33	8.5	2.2	9.6	.15	3.9	0.019	0.5	8.00	MW	CG	N
0.188	4.78	PP-19	.63	15.9	.144	3.7	6.2	1.1	.30	7.5	1.8	8.2	.33	8.4	0.022	0.6	14.0	MW	C	N
0.188	4.78	S-707	.63	15.9	.144	3.7	8.1	1.4	.27	6.9	2.2	9.8	.24	6.1	0.022	0.6	10.0	SST	C	N
0.188	4.78	921	.63	15.9	.142	3.6	13	2.2	.30	7.7	3.8	17	.24	6.0	0.023	0.6	9.25	MW	C	Z
0.188	4.78	A-83	.63	15.9	.138	3.5	11	2.0	.27	6.8	3.1	14	.33	8.3	0.025	0.6	12.0	SST	C	N
0.188	4.78	F-19	.63	15.9	.138	3.5	12	2.1	.28	7.0	3.3	15	.35	8.9	0.025	0.6	13.0	MW	C	Z
0.188	4.78	Q-71	.63	15.9	.136	3.5	14	2.5	.26	6.6	3.7	17	.36	9.2	0.026	0.7	13.0	MW	C	N
0.188	4.78	AA-67	.63	15.9	.128	3.3	33	5.7	.24	6.0	7.7	34	.36	9.1	0.030	0.8	11.0	MW	C	Z
0.188	4.78	NN-84	.63	15.9	.124	3.1	54	9.5	.12	3.2	6.7	30	.30	7.7	0.032	0.8	9.50	SPR	CG	N
0.188	4.78	S-710	.63	15.9	.124	3.1	38	6.7	.16	4.2	6.2	28	.39	10.0	0.032	0.8	11.3	SST	C	N
0.188	4.78	10604	.63	15.9	.122	3.1	51	8.9	.14	3.7	7.3	33	.40	10.1	0.033	0.8	11.0	SPR	C	Z
0.188	4.78	A9-18	.66	16.7	.168	4.3	.24	.04	.53	13	.13	.57	.13	3.2	0.010	0.3	11.5	SST	C	N
0.188	4.78	PP-35	.66	16.7	.152	3.9	3.4	.60	.36	9.2	1.2	5.5	.20	5.0	0.018	0.5	10.0	SST	C	N
0.188	4.78	H-15	.66	16.7	.148	3.8	8.1	1.4	.31	7.9	2.5	11	.18	4.6	0.020	0.5	8.00	MW	C	N
0.188	4.78	G-9	.66	16.7	.140	3.6	13	2.3	.33	8.4	4.3	19	.25	6.4	0.024	0.6	10.5	MW	CG	N
0.188	4.78	F-69	.66	16.7	.136	3.5	18	3.1	.29	7.3	5.1	23	.31	7.8	0.026	0.7	10.8	MW	C	Z
0.188	4.78	Q-18	.69	17.4	.160	4.1	.53	.09	.39	10	.21	.92	.29	7.5	0.014	0.4	20.0	SST	C	N
0.188	4.78	YY-45	.69	17.4	.158	4.0	1.6	.28	.51	13	.81	3.6	.18	4.6	0.015	0.4	11.0	MW	C	N
0.188	4.78	B5-23	.69	17.4	.154	3.9	2.6	.46	.40	10	1.0	4.6	.17	4.3	0.017	0.4	10.0	SST	CG	N
0.188	4.78	A9-47	.69	17.4	.152	3.9	3.9	.68	.47	12	1.8	8.2	.20	5.0	0.018	0.5	10.0	MW	C	BO
0.188	4.78	O-149	.69	17.4	.150	3.8	4.9	.85	.45	11	2.2	9.6	.19	4.8	0.019	0.5	10.0	MW	CG	N
0.188	4.78	I-68	.69	17.4	.148	3.8	3.8	.67	.39	10	1.5	6.6	.30	7.5	0.020	0.5	14.8	MW	CG	N
0.188	4.78	II-30	.69	17.4	.148	3.8	4.9	.85	.43	11	2.1	9.2	.26	6.6	0.020	0.5	12.0	MW	C	N
0.188	4.78	G-76	.69	17.4	.142	3.6	10	1.7	.38	9.7	3.8	17	.25	6.4	0.023	0.6	11.0	MW	CG	N
0.188	4.78	PP-15	.69	17.4	.138	3.5	22	3.9	.21	5.3	4.6	20	.23	5.7	0.025	0.6	8.00	MW	C	BO
0.188	4.78	A14-13	.69	17.4	.132	3.4	23	3.9	.28	7.1	6.3	28	.33	8.4	0.028	0.7	11.8	MW	CG	GI
0.188	4.78	B9-36	.69	17.4	.130	3.3	27	4.7	.26	6.6	7.0	31	.33	8.3	0.029	0.7	11.3	MW	CG	N
0.188	4.78	2610	.69	17.4	.124	3.1	45	7.9	.21	5.3	9.3	41	.38	9.8	0.032	0.8	11.0	MW	C	Z
0.188	4.78	A-30	.69	17.4	.122	3.1	52	9.1	.20	5.0	10	45	.40	10.1	0.033	0.8	11.0	MW	C	N
0.188	4.78	F-90	.69	17.4	.122	3.1	48	8.4	.15	3.9	7.3	33	.41	10.5	0.033	0.8	11.5	HD	C	Z
0.188	4.78	QQ-7	.69	17.4	.108	2.7	105	18	.11	2.9	12	54	.52	13.2	0.040	1.0	13.0	SPR	CG	Z
0.188	4.78	2809	.72	18.2	.158	4.0	1.8	.31	.55	14	.99	4.4	.17	4.2	0.015	0.4	10.0	MW	C	Z
0.188	4.78	S-1115	.72	18.2	.158	4.0	1.8	.31	.40	10	.72	3.2	.15	3.8	0.015	0.4	9.00	SST	C	N
0.188	4.78	2584	.72	18.2	.156	4.0	1.7	.30	.49	13	.85	3.8	.22	5.7	0.016	0.4	13.0	MW	C	GI
0.188	4.78	10890	.72	18.2	.148	3.8	4.9	.85	.46	12	2.2	9.9	.26	6.6	0.020	0.5	12.0	MW	C	N
0.188	4.78	F-83	.72	18.2	.136	3.5	15	2.7	.33	8.4	5.1	23	.34	8.6	0.026	0.7	12.0	MW	C	Z
0.188	4.78	S-1333	.75	19.1	.166	4.2	.48	.08	.63	16	.30	1.3	.11	2.8	0.011	0.3	9.00	SST	C	N
0.188	4.78	KK-96	.75	19.1	.160	4.1	.93	.16	.57	14	.53	2.3	.18	4.6	0.014	0.4	12.0	SST	C	N
0.188	4.78	U-25	.75	19.1	.158	4.0	.73	.13	.45	11	.33	1.5	.30	7.6	0.015	0.4	19.0	SST	C	N
0.188	4.78	V-72	.75	19.1	.156	4.0	2.1	.36	.56	14	1.1	5.1	.19	4.9	0.016	0.4	11.0	MW	C	N
0.188	4.78	3927	.75	19.1	.154	3.9	2.7	.48	.55	14	1.5	6.6	.20	5.2	0.017	0.4	11.0	MW	C	Z
0.188	4.78	10184	.75	19.1	.152	3.9	3.6	.63	.51	13	1.8	8.2	.21	5.3	0.018	0.5	10.5	MW	C	Z
0.188	4.78	OO-57	.75	19.1	.152	3.9	2.5	.43	.50	13	1.2	5.5	.25	6.4	0.018	0.5	13.0	SST	C	N
0.188	4.78	A15-23	.75	19.1	.144	3.7	7.5	1.3	.44	11	3.3	15	.26	6.7	0.022	0.6	12.0	MW	CG	N
0.188	4.78	B7-14	.75	19.1	.144	3.7	7.7	1.4	.43	11	3.3	15	.25	6.4	0.022	0.6	11.5	MW	CG	Z
0.188	4.78	S-708	.75	19.1	.144	3.7	6.5	1.1	.34	8.6	2.2	9.8	.29	7.3	0.022	0.6	12.0	SST	C	N
0.188	4.78	A15-18	.75	19.1	.138	3.5	12	2.1	.38	9.6	4.6	20	.33	8.3	0.025	0.6	13.0	MW	CG	N
0.188	4.78	HH-42	.75	19.1	.128	3.3	23	4.0	.30	7.6	6.8	30	.45	11.4	0.030	0.8	15.0	MW	CG	N
0.188	4.78	NN-89	.75	19.1	.128	3.3	20	3.5	.26	6.7	5.2	23	.47	11.8	0.030	0.8	15.5	SST	CG	N
0.188	4.78	NN-42	.75	19.1	.126	3.2	25	4.4	.22	5.7	5.7	25	.43	11.0	0.031	0.8	14.0	SST	CG	N
0.188	4.78	F-85	.75	19.1	.124	3.1	34	5.9	.20	5.0	6.7	30	.48	12.2	0.032	0.8	14.0	SPR	C	Z
0.188	4.78	S-711	.75	19.1	.124	3.1	31	5.4	.20	5.2	6.2	28	.46	11.8	0.032	0.8	13.5	SST	C	N
0.188	4.78	U-77	.75	19.1	.118	3.0	59	10	.14	3.6	8.3	37	.44	11.1	0.035	0.9	12.5	SPR	CG	N
0.188	4.78	A9-60	.78	19.8	.168	4.3	.30	.05	.66	17	.20	.88	.12	3.0	0.010	0.3	10.7	MW	C	N
0.188	4.78	S-816	.78	19.8	.164	4.2	.69	.12	.56	14	.39	1.7	.12	3.0	0.012	0.3	9.00	SST	C	N
0.188	4.78	S-3	.78	19.8	.158	4.0	.94	.16	.53	14	.50	2.2	.25	6.3	0.015	0.4	15.5	SST	C	N
0.188	4.78	A15-16	.78	19.8	.156	4.0	1.2	.22	.53	14	.66	2.9	.25	6.3	0.016	0.4	15.5	SST	CG	N
0.188	4.78	F-70	.78	19.8	.136	3.5	14	2.5	.36	9.2	5.1	23	.36	9.2	0.026	0.7	13.0	MW	C	Z
0.188	4.78	EE-16	.78	19.8	.132	3.4	22	3.8	.29	7.3	6.3	28	.36	9.2	0.028	0.7	12.0	MW	C	Z
0.188	4.78	S-1502	.78	19.8	.126	3.2	24	4.2	.24	6.1	5.7	25	.46	11.6	0.031	0.8	14.8	SST	CG	N
0.188	4.78	S-1081	.81	20.6	.152	3.9	1.7	.30	.47	12	.80	3.6	.34	8.7	0.018	0.5	18.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.188	4.78	UU-5	.81	20.6	.152	3.9	3.4	.60	.36	9.2	1.2	5.5	.20	5.0	0.018	0.5	10.0	SST	C	N
0.188	4.78	II-26	.81	20.6	.142	3.6	8.5	1.5	.45	11	3.8	17	.32	8.0	0.023	0.6	12.8	MW	C	N
0.188	4.78	M-40	.81	20.6	.138	3.5	24	4.1	.19	4.9	4.6	20	.19	4.8	0.025	0.6	7.50	MW	CG	Z
0.188	4.78	A14-16	.81	20.6	.136	3.5	10	1.8	.34	8.7	3.6	16	.47	11.9	0.026	0.7	17.0	MW	C	Z
0.188	4.78	2970	.81	20.6	.134	3.4	16	2.7	.37	9.3	5.7	25	.41	10.3	0.027	0.7	14.0	MW	C	GI
0.188	4.78	KK-99	.81	20.6	.098	2.5	179	31	.09	2.4	17	74	.61	15.4	0.045	1.1	13.5	SPR	CG	Z
0.188	4.78	A10-57	.84	21.4	.160	4.1	.86	.15	.71	18	.61	2.7	.14	3.5	0.014	0.4	8.75	PB	C	N
0.188	4.78	B5-70	.84	21.4	.156	4.0	2.2	.38	.60	15	1.3	5.8	.18	4.7	0.016	0.4	10.5	MW	C	N
0.188	4.78	KK-12	.84	21.4	.152	3.9	1.7	.30	.50	13	.85	3.8	.34	8.7	0.018	0.5	18.0	SST	C	N
0.188	4.78	3026	.84	21.4	.138	3.5	12	2.1	.39	9.9	4.6	20	.36	9.0	0.025	0.6	13.3	MW	C	Z
0.188	4.78	F-80	.84	21.4	.136	3.5	13	2.3	.40	10	5.1	23	.39	9.9	0.026	0.7	14.0	MW	C	Z
0.188	4.78	F-75	.84	21.4	.122	3.1	35	6.2	.21	5.3	7.3	33	.53	13.4	0.033	0.8	15.0	HD	C	Z
0.188	4.78	GG-49	.88	22.2	.160	4.1	.32	.06	.43	11	.14	.61	.45	11.4	0.014	0.4	31.0	SST	C	N
0.188	4.78	922	.88	22.2	.156	4.0	1.3	.24	.60	15	.81	3.6	.27	6.9	0.016	0.4	16.0	MW	C	Z
0.188	4.78	B14-61	.88	22.2	.152	3.9	3.1	.53	.60	15	1.8	8.2	.21	5.4	0.018	0.5	10.8	MW	C	Z
0.188	4.78	S-1161	.88	22.2	.144	3.7	6.5	1.1	.34	8.6	2.2	9.8	.29	7.3	0.022	0.6	12.0	SST	C	N
0.188	4.78	S-1340	.88	22.2	.142	3.6	9.9	1.7	.25	6.5	2.5	11	.25	6.4	0.023	0.6	10.0	SST	C	N
0.188	4.78	B1-18	.88	22.2	.136	3.5	12	2.2	.41	11	5.1	23	.38	9.7	0.026	0.7	14.8	MW	CG	N
0.188	4.78	L-87	.88	22.2	.126	3.2	31	5.5	.27	6.9	8.5	38	.43	11.0	0.031	0.8	13.0	MW	C	N
0.188	4.78	S-712	.88	22.2	.124	3.1	26	4.5	.24	6.2	6.2	28	.54	13.6	0.032	0.8	15.8	SST	C	N
0.188	4.78	B12-27	.88	22.2	.124	3.1	27	4.8	.24	6.2	6.7	30	.53	13.4	0.032	0.8	16.5	SPR	CG	Z
0.188	4.78	O-85	.88	22.2	.110	2.8	67	12	.17	4.3	11	50	.70	17.8	0.039	1.0	17.0	SPR	C	N
0.188	4.78	J-91	.88	22.2	.108	2.7	77	14	.16	3.9	12	53	.72	18.3	0.040	1.0	17.0	SPR	C	N
0.188	4.78	B14-23	.91	23.0	.154	3.9	3.0	.53	.52	13	1.6	6.9	.17	4.3	0.017	0.4	10.0	MW	CG	N
0.188	4.78	F-51	.91	23.0	.138	3.5	8.3	1.4	.43	11	3.6	16	.48	12.1	0.025	0.6	18.0	MW	C	Z
0.188	4.78	V-86	.91	23.0	.138	3.5	11	1.9	.43	11	4.6	20	.38	9.7	0.025	0.6	14.3	MW	C	N
0.188	4.78	J-58	.91	23.0	.136	3.5	12	2.1	.42	11	5.1	23	.41	10.5	0.026	0.7	14.9	MW	C	Z
0.188	4.78	F-77	.91	23.0	.124	3.1	29	5.1	.23	5.9	6.7	30	.54	13.8	0.032	0.8	16.0	SPR	C	Z
0.188	4.78	FF-65	.94	23.8	.152	3.9	1.5	.26	.56	14	.85	3.8	.38	9.6	0.018	0.5	20.0	SST	C	N
0.188	4.78	S-1334	.94	23.8	.142	3.6	5.7	.99	.44	11	2.5	11	.39	9.9	0.023	0.6	16.0	SST	C	N
0.188	4.78	V-27	.94	23.8	.142	3.6	6.1	1.1	.52	13	3.2	14	.41	10.5	0.023	0.6	17.0	MW	C	N
0.188	4.78	F-95	.94	23.8	.124	3.1	25	4.4	.26	6.7	6.7	30	.61	15.4	0.032	0.8	18.0	SPR	C	Z
0.188	4.78	H-67	.97	24.6	.144	3.7	4.1	.73	.53	14	2.2	9.8	.39	9.9	0.022	0.6	17.8	SST	CG	N
0.188	4.78	Q-55	1.00	25.4	.166	4.2	.17	.03	.77	20	.13	.59	.23	5.8	0.011	0.3	21.0	SST	C	N
0.188	4.78	152-A	1.00	25.4	.162	4.1	.99	.17	.79	20	.78	3.5	.14	3.6	0.013	0.3	9.75	MW	C	Z
0.188	4.78	153-A	1.00	25.4	.160	4.1	1.2	.22	.78	20	.97	4.3	.16	4.1	0.014	0.4	10.5	MW	C	Z
0.188	4.78	Q-69	1.00	25.4	.160	4.1	.43	.07	.63	16	.27	1.2	.37	9.4	0.014	0.4	26.5	MW	CG	N
0.188	4.78	353-A	1.00	25.4	.156	4.0	2.0	.35	.66	17	1.3	5.8	.20	5.1	0.016	0.4	11.5	MW	C	Z
0.188	4.78	N-37	1.00	25.4	.156	4.0	2.3	.41	.56	14	1.3	5.8	.18	4.5	0.016	0.4	10.0	MW	C	Z
0.188	4.78	352-A	1.00	25.4	.152	3.9	3.0	.52	.62	16	1.8	8.2	.24	6.2	0.018	0.5	12.5	MW	C	Z
0.188	4.78	B15-2	1.00	25.4	.152	3.9	2.0	.35	.61	15	1.2	5.5	.28	7.1	0.018	0.5	15.5	SST	CG	N
0.188	4.78	154-A	1.00	25.4	.148	3.8	4.2	.74	.60	15	2.5	11	.29	7.4	0.020	0.5	13.5	MW	C	Z
0.188	4.78	FF-57	1.00	25.4	.148	3.8	2.7	.47	.62	16	1.7	7.4	.36	9.1	0.020	0.5	18.0	SST	CG	N
0.188	4.78	V-9	1.00	25.4	.148	3.8	2.7	.47	.62	16	1.7	7.4	.38	9.7	0.020	0.5	18.0	SST	C	N
0.188	4.78	10171	1.00	25.4	.146	3.7	3.5	.61	.58	15	2.0	8.9	.43	10.8	0.021	0.5	19.3	MW	C	Z
0.188	4.78	2597	1.00	25.4	.146	3.7	4.2	.74	.63	16	2.7	12	.37	9.3	0.021	0.5	16.5	MW	C	Z
0.188	4.78	K-85	1.00	25.4	.144	3.7	6.8	1.2	.49	12	3.3	15	.31	7.8	0.022	0.6	13.0	MW	C	Z
0.188	4.78	155-A	1.00	25.4	.142	3.6	7.0	1.2	.54	14	3.8	17	.36	9.2	0.023	0.6	14.8	MW	C	Z
0.188	4.78	3692	1.00	25.4	.140	3.6	6.5	1.1	.52	13	3.4	15	.48	12.2	0.024	0.6	19.0	MW	C	Z
0.188	4.78	L-88	1.00	25.4	.138	3.5	9.4	1.7	.48	12	4.6	20	.40	10.2	0.025	0.6	16.0	MW	CG	N
0.188	4.78	LL-55	1.00	25.4	.138	3.5	10	1.8	.45	11	4.6	20	.38	9.5	0.025	0.6	15.0	MW	CG	Z
0.188	4.78	B15-52	1.00	25.4	.138	3.5	9.3	1.6	.49	12	4.6	20	.40	10.2	0.025	0.6	16.0	MW	CG	N
0.188	4.78	156-A	1.00	25.4	.132	3.4	15	2.7	.42	11	6.3	28	.48	12.3	0.028	0.7	16.3	MW	C	Z
0.188	4.78	S-713	1.00	25.4	.124	3.1	22	3.9	.28	7.2	6.2	28	.61	15.4	0.032	0.8	18.0	SST	C	N
0.188	4.78	B10-20	1.00	25.4	.124	3.1	26	4.5	.26	6.6	6.7	30	.59	15.0	0.032	0.8	17.5	SPR	C/G	N
0.188	4.78	1509	1.03	26.2	.144	3.7	8.2	1.4	.41	10	3.3	15	.26	6.7	0.022	0.6	11.0	MW	C	Z
0.188	4.78	G-72	1.03	26.2	.144	3.7	4.6	.81	.61	16	2.8	13	.42	10.6	0.022	0.6	18.0	MW	C	Z
0.188	4.78	A-88	1.06	27.0	.158	4.0	.73	.13	.76	19	.56	2.5	.30	7.6	0.015	0.4	19.0	SST	C	N
0.188	4.78	YY-10	1.06	27.0	.154	3.9	1.8	.32	.78	20	1.4	6.3	.28	7.1	0.017	0.4	15.5	MW	C	Z
0.188	4.78	W-23	1.06	27.0	.138	3.5	6.0	1.1	.50	13	3.1	14	.55	14.0	0.025	0.6	21.0	SST	C	N
0.188	4.78	LL-51	1.09	27.8	.152	3.9	2.2	.38	.56	14	1.2	5.5	.28	7.1	0.018	0.5	14.5	SST	C	N
0.188	4.78	M-68	1.09	27.8	.142	3.6	5.3	.93	.48	12	2.5	11	.39	9.9	0.023	0.6	17.0	SST	CG	N
0.188	4.78	10801	1.13	28.6	.154	3.9	2.1	.36	.50	13	1.0	4.6	.23	5.7	0.017	0.4	12.3	SST	C	N
0.188	4.78	3241	1.13	28.6	.120	3.0	36	6.3	.31	7.9	11	49	.61	15.5	0.034	0.9	17.0	MW	C	Z
0.188	4.78	B9-44	1.19	30.2	.138	3.5	12	2.2	.37	9.4	4.6	20	.31	7.9	0.025	0.6	12.5	MW	CG	Z
0.188	4.78	B14-24	1.22	31.0	.156	4.0	1.4	.25	.91	23	1.3	5.8	.26	6.5	0.016	0.4	15.0	MW	C	N
0.188	4.78	M-3	1.22	31.0	.128	3.3	16	2.8	.49	12	7.7	34	.63	16.0	0.030	0.8	21.0	MW	CG	N
0.188	4.78	10005	1.25	31.8	.142	3.6	5.1	.89	.75	19	3.8	17	.48	12.3	0.023	0.6	20.0	MW	C	Z
0.188	4.78	GG-17	1.28	32.5	.148	3.8	2.5	.43	.68	17	1.7	7.4	.39	9.9	0.020	0.5	19.5	SST	CG	N
0.188	4.78	AA-91	1.28	32.5	.136	3.5	4.4	.76	.37	9.4	1.6	7.2	.91	23.1	0.026	0.7	34.0	SST	C	N
0.188	4.78	B-50	1.31	33.3	.162	4.1	.80	.14	.62	16	.49	2.2	.15	3.8	0.013	0.3	10.5	SST	C	N
0.188	4.78	A11-9	1.34	34.1	.134	3.4	6.5	1.1	.63	16	4.1	18	.50	12.7	0.027	0.7	17.5	PB	C	N
0.188	4.78	152-B	1.38	34.9	.162	4.1	.71	.12	1.1	28	.78	3.5	.18	4.5	0.013	0.3	12.8	MW	C	Z
0.188	4.78	153-B	1.38	34.9	.160	4.1	.91	.16	1.1	27	.97	4.3	.21	5.2	0.014	0.4	13.8	MW	C	Z
0.188	4.78	10225	1.38	34.9	.158	4.0	1.3	.23	.80	20	1.1	4.8	.20	5.2	0.015	0.4	12.5	MW	C	Z
0.188	4.78	353-B	1.38	34.9	.156	4.0	1.4	.25	.92	23	1.3	5.8	.26	6.6	0.016	0.4	15.3	MW	C	Z
0.188	4.78	10678	1.38	34.9	.154	3.9	1.6	.28	.97	25	1.6	6.9	.31	7.8	0.017	0.4	17.0	MW	C	Z
0.188	4.78	352-B	1.38	34.9	.152	3.9	2.1	.37	.87	22	1.8	8.2	.32	8.1	0.018	0.5	16.8	MW	C	Z
0.188	4.78	3588	1.38	34.9	.152	3.9	1.7	.30	1.0	25	1.7	7.7	.38	9.6	0.018	0.5	20.0	MW	C	Z
0.188	4.78	UU-64	1.38	34.9	.152	3.9	1.9	.33	.65	17	1.2	5.5	.32	8.0	0.018	0.5	16.5	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.188	4.78	154-B	1.38	34.9	.148	3.8	3.0	.53	.83	21	2.5	11	.38	9.7	0.020	0.5	18.0	MW	C	Z
0.188	4.78	GG-28	1.38	34.9	.148	3.8	2.7	.47	.93	24	2.5	11	.40	10.2	0.020	0.5	20.0	MW	CG	N
0.188	4.78	B9-70	1.38	34.9	.148	3.8	2.9	.50	.88	22	2.5	11	.38	9.7	0.020	0.5	19.0	MW	CG	Z
0.188	4.78	Q-19	1.38	34.9	.144	3.7	4.1	.72	.81	21	3.3	15	.46	11.7	0.022	0.6	20.0	MW	C	Z
0.188	4.78	155-B	1.38	34.9	.142	3.6	5.0	.87	.76	19	3.8	17	.48	12.3	0.023	0.6	20.0	MW	C	Z
0.188	4.78	S-1157	1.38	34.9	.138	3.5	6.4	1.1	.48	12	3.1	14	.53	13.3	0.025	0.6	20.0	SST	C	N
0.188	4.78	156-B	1.38	34.9	.132	3.4	11	1.9	.59	15	6.3	28	.65	16.5	0.028	0.7	22.3	MW	C	Z
0.188	4.78	12024	1.41	35.7	.150	3.8	2.3	.40	.63	16	1.4	6.4	.34	8.7	0.019	0.5	17.0	SST	C	N
0.188	4.78	S-1105	1.44	36.5	.152	3.9	.94	.16	.86	22	.81	3.6	.58	14.6	0.018	0.5	31.0	SST	C	N
0.188	4.78	J-74	1.44	36.5	.138	3.5	5.6	.98	.54	14	3.1	14	.56	14.3	0.025	0.6	22.5	SST	CG	N
0.188	4.78	A10-61	1.44	36.5	.136	3.5	5.2	.91	.66	17	3.4	15	.78	19.8	0.026	0.7	29.0	SST	C	N
0.188	4.78	S-1317	1.44	36.5	.134	3.4	7.5	1.3	.51	13	3.8	17	.63	16.1	0.027	0.7	23.5	SST	CG	N
0.188	4.78	S-1071	1.44	36.5	.132	3.4	8.0	1.4	.53	14	4.2	19	.76	19.2	0.028	0.7	26.0	SST	C	N
0.188	4.78	923	1.50	38.1	.148	3.8	2.1	.38	.98	25	2.1	9.4	.52	13.2	0.020	0.5	25.0	MW	C	Z
0.188	4.78	B2-17	1.50	38.1	.148	3.8	1.8	.31	.90	23	1.6	7.2	.60	15.2	0.020	0.5	29.0	MW	C	N
0.188	4.78	11194	1.50	38.1	.138	3.5	5.6	.98	.54	14	3.1	14	.56	14.3	0.025	0.6	22.5	SST	CG	N
0.188	4.78	11264	1.50	38.1	.124	3.1	19	3.4	.49	12	9.3	41	.76	19.3	0.032	0.8	22.8	MW	C	N
0.188	4.78	11206	1.56	39.7	.138	3.5	5.8	1.0	.53	13	3.1	14	.55	14.0	0.025	0.6	22.0	SST	CG	N
0.188	4.78	Z-3	1.63	41.3	.168	4.3	.15	.03	1.4	36	.21	.95	.20	5.1	0.010	0.3	19.0	MW	C	N
0.188	4.78	11240	1.63	41.3	.128	3.3	11	1.9	.71	18	7.7	34	.90	22.9	0.030	0.8	29.0	MW	C	Z
0.188	4.78	N-122	1.69	42.8	.148	3.8	2.5	.43	1.0	26	2.5	11	.46	11.7	0.020	0.5	22.0	MW	C	N
0.188	4.78	EE-47	1.69	42.8	.128	3.3	25	4.3	.31	8.0	7.7	34	.45	11.4	0.030	0.8	14.0	MW	C	N
0.188	4.78	152-C	1.75	44.5	.162	4.1	.56	.10	1.4	35	.78	3.5	.22	5.5	0.013	0.3	15.8	MW	C	Z
0.188	4.78	153-C	1.75	44.5	.160	4.1	.69	.12	1.4	36	.97	4.3	.26	6.5	0.014	0.4	17.3	MW	C	Z
0.188	4.78	353-C	1.75	44.5	.156	4.0	1.1	.19	1.2	30	1.3	5.8	.32	8.1	0.016	0.4	19.0	MW	C	Z
0.188	4.78	352-C	1.75	44.5	.152	3.9	1.7	.29	1.1	28	1.8	8.2	.39	9.9	0.018	0.5	20.8	MW	C	Z
0.188	4.78	154-C	1.75	44.5	.148	3.8	2.3	.41	1.1	27	2.5	11	.48	12.1	0.020	0.5	22.8	MW	C	Z
0.188	4.78	2503	1.75	44.5	.148	3.8	3.5	.61	.73	18	2.5	11	.34	8.6	0.020	0.5	16.0	MW	C	Z
0.188	4.78	NN-34	1.75	44.5	.148	3.8	2.1	.37	1.2	30	2.5	11	.52	13.2	0.020	0.5	25.0	MW	C	Z
0.188	4.78	PP-84	1.75	44.5	.146	3.7	2.4	.42	1.2	29	2.8	12	.60	15.2	0.021	0.5	27.5	MW	C	N
0.188	4.78	155-C	1.75	44.5	.142	3.6	3.9	.68	.97	25	3.8	17	.60	15.2	0.023	0.6	25.0	MW	C	Z
0.188	4.78	11407	1.75	44.5	.136	3.5	6.4	1.1	.79	20	5.1	23	.70	17.8	0.026	0.7	26.0	MW	C	Z
0.188	4.78	156-C	1.75	44.5	.132	3.4	8.3	1.5	.76	19	6.3	28	.81	20.6	0.028	0.7	28.0	MW	C	Z
0.188	4.78	A15-48	1.75	44.5	.122	3.1	25	4.4	.27	6.9	6.8	30	.61	15.5	0.033	0.8	18.5	SST	CG	N
0.188	4.78	10003	1.88	47.6	.142	3.6	4.4	.77	.86	22	3.8	17	.52	13.3	0.023	0.6	22.8	MW	CG	Z
0.188	4.78	2631	1.88	47.6	.130	3.3	8.3	1.5	.84	21	7.0	31	.96	24.3	0.029	0.7	33.0	MW	CG	Z
0.188	4.78	Y-86	1.88	47.6	.122	3.1	18	3.2	.40	10	7.3	33	.94	23.9	0.033	0.8	27.5	SPR	C	N
0.188	4.78	S-1351	1.88	47.6	.118	3.0	24	4.3	.32	8.1	7.7	34	.84	21.3	0.035	0.9	24.0	SST	CG	N
0.188	4.78	N-50	1.94	49.2	.138	3.5	4.7	.83	.97	25	4.6	20	.78	19.7	0.025	0.6	30.0	MW	C	Z
0.188	4.78	EE-14	2.00	50.8	.168	4.3	.08	.01	1.7	43	.13	.56	.32	8.1	0.010	0.3	32.0	SST	CG	N
0.188	4.78	B14-42	2.25	57.2	.160	4.1	.50	.09	1.9	49	.96	4.2	.34	8.5	0.014	0.4	23.0	MW	C	Z
0.188	4.78	JJ-87	2.25	57.2	.130	3.3	6.0	1.0	.92	23	5.5	24	1.33	33.9	0.029	0.7	45.0	MW	C	BO
0.188	4.78	3575	2.50	63.5	.130	3.3	5.5	.96	1.1	27	5.8	26	1.45	36.8	0.029	0.7	49.0	MW	C	Z
0.188	4.78	N-27	2.53	64.3	.150	3.8	1.3	.23	1.7	42	2.2	9.6	.61	15.4	0.019	0.5	32.0	MW	CG	N
0.188	4.78	S-1237	2.75	69.9	.128	3.3	5.8	1.0	.89	23	5.2	23	1.44	36.6	0.030	0.8	47.0	SST	C	N
0.188	4.78	TT-44	2.75	69.9	.128	3.3	6.8	1.2	1.1	29	7.7	34	1.41	35.8	0.030	0.8	46.0	MW	C	N
0.188	4.78	B15-43	3.00	76.2	.136	3.5	2.7	.47	1.4	36	3.8	17	1.59	40.3	0.026	0.7	60.0	MW	C	N
0.188	4.78	VV-54	3.13	79.4	.140	3.6	2.2	.39	1.3	33	2.9	13	1.10	28.0	0.024	0.6	45.0	SST	C	N
0.188	4.78	O-72	4.00	101.6	.148	3.8	1.1	.19	1.6	40	1.7	7.4	.86	21.8	0.020	0.5	42.0	SST	C	N
0.195	4.95	B4-62	.47	11.9	.171	4.3	1.1	.19	.36	9.0	.38	1.7	.07	1.8	0.012	0.3	6.00	SST	CG	N
0.203	5.16	N-75	.13	3.2	.163	4.1	33	5.8	.05	1.1	1.5	6.7	.08	2.0	0.020	0.5	3.00	SST	C	N
0.203	5.16	G-74	.19	4.8	.175	4.4	2.2	.38	.10	2.6	.22	.98	.09	2.2	0.014	0.4	5.25	SST	C	N
0.203	5.16	Z-66	.25	6.4	.187	4.7	.09	.02	.16	4.0	.01	.07	.09	2.3	0.008	0.2	10.5	MW	C	N
0.203	5.16	3706	.25	6.4	.123	3.1	283	50	.04	1.0	11	50	.20	5.1	0.040	1.0	5.00	SPR	CG	Z
0.203	5.16	DD-4	.28	7.1	.169	4.3	1.8	.32	.08	2.0	.14	.63	.20	5.2	0.017	0.4	11.0	SST	C	N
0.203	5.16	V-13	.28	7.1	.143	3.6	65	11	.07	1.9	4.8	22	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.203	5.16	W-29	.28	7.1	.123	3.1	246	43	.04	1.1	11	47	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.203	5.16	10918	.31	7.9	.173	4.4	2.2	.38	.19	4.9	.42	1.9	.12	3.0	0.015	0.4	7.00	MW	C	GI
0.203	5.16	O-109	.31	7.9	.167	4.2	7.9	1.4	.20	5.2	1.6	7.2	.11	2.7	0.018	0.5	5.00	MW	C	Z
0.203	5.16	S-1255	.31	7.9	.167	4.2	14	2.4	.08	2.1	1.1	5.1	.08	2.1	0.018	0.5	3.50	SST	C	N
0.203	5.16	2521	.31	7.9	.143	3.6	100	18	.07	1.8	7.2	32	.16	4.0	0.030	0.8	4.25	MW	C	Z
0.203	5.16	DD-54	.31	7.9	.131	3.3	158	28	.05	1.4	8.4	37	.20	5.0	0.036	0.9	4.50	SPR	C	Z
0.203	5.16	GG-44	.34	8.7	.167	4.2	2.3	.41	.13	3.2	.30	1.3	.22	5.5	0.018	0.5	11.0	SST	C	N
0.203	5.16	CC-49	.38	9.5	.163	4.1	7.7	1.3	.20	5.1	1.6	6.9	.15	3.7	0.020	0.5	6.25	SST	C	N
0.203	5.16	W-21	.38	9.5	.163	4.1	5.4	.95	.22	5.5	1.2	5.2	.16	4.1	0.020	0.5	8.00	SST	CG	N
0.203	5.16	MM-50	.38	9.5	.159	4.0	11	2.0	.20	5.1	2.3	10	.18	4.5	0.022	0.6	7.00	MW	C	GI
0.203	5.16	NN-37	.38	9.5	.153	3.9	16	2.8	.16	4.1	2.6	11	.21	5.4	0.025	0.6	7.50	SST	C	N
0.203	5.16	PP-66	.38	9.5	.153	3.9	14	2.5	.15	3.8	2.1	9.5	.23	5.7	0.025	0.6	9.00	MW	CG	BO
0.203	5.16	AA-19	.41	10.3	.143	3.6	23	4.1	.06	1.5	1.4	6.4	.35	8.8	0.030	0.8	10.5	SST	C	N
0.203	5.16	B-93	.44	11.1	.163	4.1	8.3	1.5	.28	7.1	2.3	10	.15	3.8	0.020	0.5	6.50	MW	C	N
0.203	5.16	M-36	.44	11.1	.153	3.9	12	2.2	.19	4.8	2.3	10	.25	6.4	0.025	0.6	10.0	MW	CG	N
0.203	5.16	Z-70	.44	11.1	.143	3.6	44	7.8	.11	2.8	4.8	22	.20	5.0	0.030	0.8	6.50	SST	CG	N
0.203	5.16	10900	.47	11.9	.179	4.5	.95	.17	.38	9.7	.36	1.6	.08	2.1	0.012	0.3	6.00	SST	C	N
0.203	5.16	O-88	.47	11.9	.175	4.4	1.0	.18	.32	8.0	.33	1.5	.15	3.9	0.014	0.4	9.88	MW	C	Z
0.203	5.16	DD-62	.47	11.9	.163	4.1	6.5	1.1	.24	6.1	1.6	6.9	.16	4.1	0.020	0.5	7.00	SST	C	N
0.203	5.16	10839	.47	11.9	.159	4.0	6.9	1.2	.24	6.2	1.7	7.4	.23	5.7	0.022	0.6	10.3	MW	CG	GI
0.203	5.16	GG-61	.47	11.9	.151	3.8	13	2.3	.18	4.6	2.3	10	.29	7.3	0.026	0.7	10.0	SST	C	N
0.203	5.16	GG-59	.47	11.9	.143	3.6	32	5.6	.17	4.3	5.4	24	.30	7.6	0.030	0.8	9.00	MW	C	N
0.203	5.16	S-1578	.47	11.9	.137	3.5	62	11	.10	2.6	6.4	28	.23	5.9	0.033	0.8	7.00	SST	CG	N
0.203	5.16	A12-25	.50	12.7	.181	4.6	.60	.10	.41	10	.25	1.1	.09	2.2	0.011	0.3	7.00	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.203	5.16	B18-190	.50	12.7	.181	4.6	.66	.12	.42	11	.28	1.2	.08	2.0	0.011	0.3	6.00	SST	C	N
0.203	5.16	S-1552	.50	12.7	.179	4.5	.99	.17	.36	9.3	.36	1.6	.08	2.1	0.012	0.3	5.75	SST	C	N
0.203	5.16	S-1083	.50	12.7	.175	4.4	.68	.12	.31	7.9	.21	.94	.19	4.8	0.014	0.4	12.5	SST	C	N
0.203	5.16	B12-54	.50	12.7	.175	4.4	.74	.13	.32	8.1	.24	1.1	.18	4.6	0.014	0.4	13.0	MW	CG	N
0.203	5.16	HH-34	.50	12.7	.173	4.4	1.1	.19	.31	7.7	.33	1.5	.20	5.0	0.015	0.4	12.0	MW	C	N
0.203	5.16	H-80	.50	12.7	.165	4.2	4.4	.76	.31	7.8	1.3	5.9	.15	3.9	0.019	0.5	8.00	SST	CG	N
0.203	5.16	B14-4	.50	12.7	.165	4.2	4.0	.70	.30	7.6	1.2	5.4	.20	5.1	0.019	0.5	9.50	MW	C	N
0.203	5.16	G-61	.50	12.7	.163	4.1	5.4	.95	.29	7.3	1.6	6.9	.18	4.6	0.020	0.5	8.00	SST	C	N
0.203	5.16	S-1380	.50	12.7	.159	4.0	9.9	1.7	.21	5.3	2.1	9.2	.18	4.5	0.022	0.6	7.00	SST	C	N
0.203	5.16	B8-21	.50	12.7	.157	4.0	8.6	1.5	.27	6.9	2.3	10	.23	5.8	0.023	0.6	10.0	MW	CG	N
0.203	5.16	NN-93	.50	12.7	.155	3.9	12	2.1	.26	6.6	3.1	14	.24	6.1	0.024	0.6	9.00	MW	C	N
0.203	5.16	O-81	.50	12.7	.155	3.9	18	3.1	.23	5.8	4.0	18	.16	4.1	0.024	0.6	6.75	MW	CG	N
0.203	5.16	N-110	.50	12.7	.153	3.9	18	3.2	.23	6.0	4.2	19	.19	4.8	0.025	0.6	7.50	MW	C	Z
0.203	5.16	G-26	.50	12.7	.143	3.6	28	4.9	.17	4.3	4.8	21	.33	8.4	0.030	0.8	10.0	MW	C	N
0.203	5.16	B15-30	.50	12.7	.139	3.5	38	6.7	.15	3.9	5.8	26	.29	7.3	0.032	0.8	9.00	SST	CG	N
0.203	5.16	Q-7	.50	12.7	.123	3.1	121	21	.09	2.4	11	50	.36	9.1	0.040	1.0	9.00	SPR	CG	Z
0.203	5.16	2501	.53	13.5	.143	3.6	32	5.6	.22	5.7	7.2	32	.30	7.6	0.030	0.8	9.00	MW	C	Z
0.203	5.16	LL-43	.56	14.3	.171	4.3	2.4	.42	.42	11	1.0	4.5	.14	3.7	0.016	0.4	8.00	MW	C	N
0.203	5.16	LL-56	.56	14.3	.171	4.3	2.1	.37	.39	9.8	.80	3.6	.14	3.7	0.016	0.4	8.00	SST	C	N
0.203	5.16	3997	.56	14.3	.161	4.1	7.1	1.2	.36	9.2	2.6	12	.20	5.1	0.021	0.5	8.50	MW	C	Z
0.203	5.16	W-78	.56	14.3	.139	3.5	35	6.0	.17	4.3	5.8	26	.31	7.9	0.032	0.8	9.75	SST	CG	N
0.203	5.16	EE-42	.56	14.3	.137	3.5	43	7.6	.16	4.0	6.8	30	.33	8.4	0.033	0.8	10.0	SPR	CG	N
0.203	5.16	GG-32	.56	14.3	.123	3.1	84	15	.12	3.1	10	45	.44	11.2	0.040	1.0	11.0	SST	CG	N
0.203	5.16	11428	.56	14.3	.101	2.6	427	75	.05	1.2	19	87	.40	10.0	0.051	1.3	7.75	SST	CG	N
0.203	5.16	Q-23	.59	15.1	.167	4.2	2.2	.38	.36	9.1	.78	3.5	.23	5.9	0.018	0.5	13.0	MW	CG	N
0.203	5.16	OO-82	.63	15.9	.179	4.5	.48	.08	.48	12	.23	1.0	.14	3.7	0.012	0.3	11.0	MW	C	Z
0.203	5.16	A13-53	.63	15.9	.173	4.4	1.9	.32	.36	9.1	.66	3.0	.12	3.1	0.015	0.4	7.25	SST	C	N
0.203	5.16	2748	.63	15.9	.155	3.9	18	3.2	.22	5.5	4.0	18	.18	4.6	0.024	0.6	6.50	MW	C	Z
0.203	5.16	3782	.63	15.9	.155	3.9	8.3	1.5	.31	8.0	2.6	12	.31	7.9	0.024	0.6	12.0	MW	C	Z
0.203	5.16	B4-10	.63	15.9	.153	3.9	9.1	1.6	.31	7.9	2.8	13	.29	7.3	0.025	0.6	11.5	SST	CG	N
0.203	5.16	A10-23	.63	15.9	.147	3.7	15	2.7	.26	6.5	4.0	18	.32	8.2	0.028	0.7	11.5	SST	CG	N
0.203	5.16	JJ-71	.63	15.9	.123	3.1	142	25	.08	2.0	11	50	.32	8.1	0.040	1.0	8.00	SPR	CG	N
0.203	5.16	MM-3	.69	17.4	.179	4.5	.62	.11	.58	15	.36	1.6	.11	2.7	0.012	0.3	8.00	SST	C	N
0.203	5.16	CC-38	.69	17.4	.173	4.4	.95	.17	.49	12	.47	2.1	.20	5.0	0.015	0.4	12.0	SST	C	N
0.203	5.16	RR-38	.69	17.4	.171	4.3	1.2	.21	.45	11	.54	2.4	.24	6.1	0.016	0.4	14.0	MW	C	Z
0.203	5.16	BB-84	.69	17.4	.149	3.8	18	3.1	.30	7.7	5.3	24	.30	7.5	0.027	0.7	10.0	MW	C	N
0.203	5.16	S-1120	.69	17.4	.147	3.7	17	3.0	.23	6.0	4.0	18	.32	8.2	0.028	0.7	10.5	SST	C	N
0.203	5.16	B10-12	.69	17.4	.131	3.3	175	31	.05	1.2	8.4	37	.18	4.6	0.036	0.9	5.00	SPR	CG	N
0.203	5.16	AA-23	.69	17.4	.123	3.1	85	15	.13	3.4	11	50	.48	12.2	0.040	1.0	12.0	SPR	CG	N
0.203	5.16	O-19	.72	18.2	.153	3.9	11	1.9	.38	9.8	4.2	19	.28	7.0	0.025	0.6	11.0	MW	CG	N
0.203	5.16	AA-1	.72	18.2	.143	3.6	22	3.9	.32	8.2	7.2	32	.36	9.1	0.030	0.8	12.0	MW	CG	N
0.203	5.16	A11-7	.72	18.2	.121	3.1	94	16	.12	3.1	11	51	.45	11.5	0.041	1.0	11.0	SST	CG	N
0.203	5.16	B-95	.75	19.1	.179	4.5	.71	.12	.64	16	.46	2.0	.11	2.7	0.012	0.3	8.00	MW	C	N
0.203	5.16	4291	.75	19.1	.173	4.4	.91	.16	.53	13	.48	2.1	.23	5.7	0.015	0.4	14.0	MW	C	Z
0.203	5.16	4171	.75	19.1	.165	4.2	5.5	.96	.37	9.3	2.0	8.9	.16	4.1	0.019	0.5	7.50	MW	C	Z
0.203	5.16	NN-45	.75	19.1	.163	4.1	1.8	.32	.33	8.4	.61	2.7	.42	10.7	0.020	0.5	20.0	SST	C	N
0.203	5.16	3290	.75	19.1	.159	4.0	7.6	1.3	.41	10	3.1	14	.23	5.9	0.022	0.6	9.50	MW	C	Z
0.203	5.16	Z-83	.75	19.1	.159	4.0	4.4	.76	.42	11	1.8	8.2	.33	8.4	0.022	0.6	15.0	MW	CG	Z
0.203	5.16	B10-17	.75	19.1	.153	3.9	18	3.2	.23	6.0	4.2	19	.19	4.8	0.025	0.6	7.50	MW	CG	N
0.203	5.16	HH-10	.75	19.1	.151	3.8	11	2.0	.28	7.1	3.2	14	.31	7.9	0.026	0.7	11.0	SST	C	N
0.203	5.16	FF-34	.75	19.1	.143	3.6	21	3.7	.23	5.9	4.8	22	.38	9.5	0.030	0.8	11.5	SST	C	N
0.203	5.16	BB-24	.75	19.1	.123	3.1	57	10	.15	3.8	8.5	38	.60	15.2	0.040	1.0	15.0	SST	CG	N
0.203	5.16	3235	.78	19.8	.149	3.8	12	2.0	.38	9.6	4.4	20	.41	10.3	0.027	0.7	14.0	MW	C	Z
0.203	5.16	J-79	.78	19.8	.127	3.2	58	10	.16	4.0	9.2	41	.46	11.6	0.038	1.0	12.0	SST	CG	N
0.203	5.16	II-42	.81	20.6	.163	4.1	4.7	.82	.50	13	2.3	10	.22	5.6	0.020	0.5	10.0	MW	C	GI
0.203	5.16	K-98	.81	20.6	.163	4.1	2.7	.47	.47	12	1.3	5.6	.34	8.6	0.020	0.5	16.0	MW	C	Z
0.203	5.16	FF-49	.81	20.6	.143	3.6	15	2.7	.32	8.0	4.8	22	.45	11.4	0.030	0.8	15.0	SST	CG	N
0.203	5.16	B12-51	.84	21.4	.163	4.1	1.7	.30	.36	9.2	.62	2.8	.48	12.2	0.020	0.5	24.0	MW	CG	N
0.203	5.16	B4-16	.84	21.4	.147	3.7	11	2.0	.35	8.8	4.0	18	.41	10.3	0.028	0.7	14.5	SST	CG	N
0.203	5.16	L-94	.88	22.2	.173	4.4	.52	.09	.52	13	.27	1.2	.36	9.1	0.015	0.4	23.0	MW	C	Z
0.203	5.16	HH-95	.88	22.2	.143	3.6	16	2.9	.30	7.5	4.8	22	.45	11.4	0.030	0.8	14.0	SST	C	N
0.203	5.16	AA-38	.88	22.2	.133	3.4	40	6.9	.20	5.0	7.7	34	.47	12.0	0.035	0.9	13.5	SPR	CG	Z
0.203	5.16	J-31	.94	23.8	.159	4.0	5.2	.90	.60	15	3.1	14	.31	7.8	0.022	0.6	13.0	MW	C	N
0.203	5.16	A-14	.97	24.6	.183	4.6	.09	.02	.74	19	.07	.29	.23	5.8	0.010	0.3	22.0	SST	C	N
0.203	5.16	12535	.97	24.6	.147	3.7	16	2.9	.36	9.1	5.9	26	.36	9.2	0.028	0.7	12.0	MW	C	N
0.203	5.16	2561	1.00	25.4	.167	4.2	2.5	.44	.68	17	1.7	7.6	.23	5.7	0.018	0.5	11.5	MW	C	Z
0.203	5.16	3249	1.00	25.4	.151	3.8	8.8	1.5	.54	14	4.8	21	.43	10.9	0.026	0.7	15.5	MW	C	Z
0.203	5.16	B-1	1.00	25.4	.145	3.7	10	1.8	.42	11	4.4	19	.52	13.3	0.029	0.7	18.0	SST	CG	N
0.203	5.16	S-1500	1.00	25.4	.145	3.7	23	4.1	.19	4.8	4.4	19	.31	7.8	0.029	0.7	11.0	SST	CG	N
0.203	5.16	B2-35	1.00	25.4	.141	3.6	17	3.0	.44	11	7.7	34	.56	14.2	0.031	0.8	17.0	MW	C	N
0.203	5.16	12692	1.00	25.4	.139	3.5	24	4.2	.24	6.2	5.8	26	.45	11.4	0.032	0.8	13.0	SST	C	N
0.203	5.16	11459	1.06	27.0	.177	4.5	.71	.12	.65	16	.46	2.0	.14	3.5	0.013	0.3	9.50	SST	C	N
0.203	5.16	HH-8	1.06	27.0	.153	3.9	5.8	1.0	.49	13	2.8	13	.45	11.4	0.025	0.6	17.0	SST	C	N
0.203	5.16	I-81	1.06	27.0	.153	3.9	6.2	1.1	.46	12	2.8	13	.40	10.2	0.025	0.6	16.0	SST	CG	N
0.203	5.16	A15-63	1.06	27.0	.151	3.8	9.9	1.7	.48	12	4.8	21	.36	9.2	0.026	0.7	14.0	MW	CG	N
0.203	5.16	2811	1.06	27.0	.147	3.7	8.2	1.4	.45	11	3.7	16	.62	15.6	0.028	0.7	22.0	MW	CG	Z
0.203	5.16	S-839	1.06	27.0	.143	3.6	9.9	1.7	.40	10	3.9	18	.66	16.9	0.030	0.8	22.1	SST	CG	N
0.203	5.16	A13-60	1.06	27.0	.139	3.5	13	2.3	.36	9.1	4.8	21	.70	17.9	0.032	0.8	22.0	SST	CG	N
0.203	5.16	Z-35	1.13	28.6	.145	3.7	8.4	1.5	.46	12	3.8	17	.67	16.9	0.029	0.7	22.0	SST	C	N
0.203	5.16	B10-43	1.13	28.6	.141	3.6	27	4.7	.30	7.5	7.9	35	.36	9.3	0.031	0.8	11.8	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.203	5.16	PP-23	1.16	29.4	.133	3.4	29	5.1	.26	6.7	7.7	34	.65	16.4	0.035	0.9	17.5	SPR	C	N
0.203	5.16	12285	1.19	30.2	.123	3.1	61	11	.19	4.7	11	50	.68	17.3	0.040	1.0	16.0	SPR	C	N
0.203	5.16	VV-23	1.22	31.0	.143	3.6	14	2.5	.51	13	7.2	32	.57	14.5	0.030	0.8	18.0	MW	C	N
0.203	5.16	BB-26	1.22	31.0	.143	3.6	10	1.7	.48	12	4.8	22	.66	16.8	0.030	0.8	22.0	SST	CG	N
0.203	5.16	B2-25	1.25	31.8	.157	4.0	5.5	.97	.64	16	3.5	16	.36	9.1	0.023	0.6	14.5	MW	C	Z
0.203	5.16	W-74	1.25	31.8	.143	3.6	9.8	1.7	.49	13	4.8	22	.69	17.5	0.030	0.8	22.0	SST	C	N
0.203	5.16	Q-90	1.31	33.3	.171	4.3	.82	.14	1.0	25	.82	3.7	.31	7.9	0.016	0.4	19.5	MW	CG	N
0.203	5.16	S-481	1.31	33.3	.165	4.2	1.4	.25	.92	23	1.3	5.8	.39	9.9	0.019	0.5	20.5	SST	CG	N
0.203	5.16	3201	1.34	34.1	.163	4.1	2.7	.47	.87	22	2.3	10	.34	8.6	0.020	0.5	16.0	MW	C	Z
0.203	5.16	10754	1.41	35.7	.141	3.6	9.3	1.6	.54	14	5.0	22	.87	22.0	0.031	0.8	27.0	SST	C	N
0.203	5.16	V-5	1.50	38.1	.153	3.9	5.0	.87	.85	22	4.2	19	.58	14.6	0.025	0.6	22.0	MW	C	Z
0.203	5.16	10026	1.50	38.1	.151	3.8	7.4	1.3	.64	16	4.8	21	.49	12.5	0.026	0.7	18.0	MW	C	Z
0.203	5.16	3012	1.56	39.7	.155	3.9	4.6	.81	.87	22	4.0	18	.50	12.8	0.024	0.6	20.0	MW	C	Z
0.203	5.16	2884	1.75	44.5	.159	4.0	2.5	.44	1.2	30	3.0	13	.56	14.2	0.022	0.6	24.5	MW	C	GI
0.203	5.16	10891	1.78	45.2	.153	3.9	3.0	.53	.91	23	2.7	12	.88	22.2	0.025	0.6	35.0	MW	CG	GI
0.203	5.16	12018	2.25	57.2	.101	2.6	107	19	.19	4.9	21	92	1.43	36.3	0.051	1.3	28.0	SPR	CG	Z
0.203	5.16	S-3140	4.00	101.6	.143	3.6	3.3	.57	1.5	38	4.8	22	1.89	48.0	0.030	0.8	62.0	SST	C	N
0.210	5.33	70460	.25	6.4	.174	4.4	11	1.9	.15	3.8	1.7	7.4	.07	1.8	0.018	0.5	4.00	MW	CG	N
0.210	5.33	70460S	.25	6.4	.174	4.4	9.4	1.6	.12	3.0	1.1	4.9	.07	1.8	0.018	0.5	4.00	SST	CG	N
0.210	5.33	70476	.25	6.4	.166	4.2	22	3.8	.14	3.5	3.0	13	.10	2.4	0.022	0.6	4.38	MW	CG	N
0.210	5.33	70476S	.25	6.4	.166	4.2	18	3.2	.11	2.7	2.0	8.9	.10	2.4	0.022	0.6	4.38	SST	CG	N
0.210	5.33	70498	.25	6.4	.158	4.0	41	7.2	.11	2.8	4.6	21	.12	3.0	0.026	0.7	4.50	MW	CG	N
0.210	5.33	70498S	.25	6.4	.158	4.0	35	6.1	.09	2.2	3.1	14	.12	3.0	0.026	0.7	4.50	SST	CG	N
0.210	5.33	70461	.31	7.9	.174	4.4	8.6	1.5	.19	4.9	1.7	7.4	.08	2.1	0.018	0.5	4.50	MW	CG	N
0.210	5.33	70461S	.31	7.9	.174	4.4	7.3	1.3	.15	3.8	1.1	4.9	.08	2.1	0.018	0.5	4.50	SST	CG	N
0.210	5.33	70477	.31	7.9	.166	4.2	17	2.9	.18	4.5	3.0	13	.11	2.8	0.022	0.6	5.00	MW	CG	N
0.210	5.33	70477S	.31	7.9	.166	4.2	14	2.5	.14	3.6	2.0	8.9	.11	2.8	0.022	0.6	5.00	SST	CG	N
0.210	5.33	70499	.31	7.9	.158	4.0	32	5.5	.15	3.7	4.6	21	.14	3.5	0.026	0.7	5.38	MW	CG	N
0.210	5.33	70499S	.31	7.9	.158	4.0	27	4.7	.12	2.9	3.1	14	.14	3.5	0.026	0.7	5.38	SST	CG	N
0.210	5.33	70462	.38	9.7	.174	4.4	6.8	1.2	.24	6.2	1.7	7.4	.09	2.3	0.018	0.5	5.13	MW	CG	N
0.210	5.33	70462S	.38	9.7	.174	4.4	5.8	1.0	.19	4.8	1.1	4.9	.09	2.3	0.018	0.5	5.13	SST	CG	N
0.210	5.33	70478	.38	9.7	.166	4.2	13	2.3	.22	5.7	3.0	13	.13	3.2	0.022	0.6	5.75	MW	CG	N
0.210	5.33	70478S	.38	9.7	.166	4.2	11	2.0	.18	4.5	2.0	8.9	.13	3.2	0.022	0.6	5.75	SST	CG	N
0.210	5.33	70500	.38	9.7	.158	4.0	25	4.4	.18	4.7	4.6	21	.16	4.1	0.026	0.7	6.25	MW	CG	N
0.210	5.33	70500S	.38	9.7	.158	4.0	21	3.7	.15	3.7	3.1	14	.16	4.1	0.026	0.7	6.25	SST	CG	N
0.210	5.33	70463	.44	11.2	.174	4.4	5.8	1.0	.29	7.3	1.7	7.4	.10	2.6	0.018	0.5	5.63	MW	CG	N
0.210	5.33	70463S	.44	11.2	.174	4.4	4.9	.86	.22	5.7	1.1	4.9	.10	2.6	0.018	0.5	5.63	SST	CG	N
0.210	5.33	70479	.44	11.2	.166	4.2	11	2.0	.26	6.7	3.0	13	.14	3.6	0.022	0.6	6.50	MW	CG	N
0.210	5.33	70479S	.44	11.2	.166	4.2	9.7	1.7	.21	5.2	2.0	8.9	.14	3.6	0.022	0.6	6.50	SST	CG	N
0.210	5.33	70501	.44	11.2	.158	4.0	21	3.7	.22	5.5	4.6	21	.18	4.6	0.026	0.7	7.00	MW	CG	N
0.210	5.33	70501S	.44	11.2	.158	4.0	18	3.1	.17	4.4	3.1	14	.18	4.6	0.026	0.7	7.00	SST	CG	N
0.210	5.33	70464	.50	12.7	.174	4.4	5.1	.89	.33	8.3	1.7	7.4	.11	2.8	0.018	0.5	6.13	MW	CG	N
0.210	5.33	70464S	.50	12.7	.174	4.4	4.3	.76	.25	6.5	1.1	4.9	.11	2.8	0.018	0.5	6.13	SST	CG	N
0.210	5.33	70480	.50	12.7	.166	4.2	9.9	1.7	.30	7.7	3.0	13	.16	4.0	0.022	0.6	7.13	MW	CG	N
0.210	5.33	70480S	.50	12.7	.166	4.2	8.4	1.5	.24	6.0	2.0	8.9	.16	4.0	0.022	0.6	7.13	SST	CG	N
0.210	5.33	70502	.50	12.7	.158	4.0	18	3.2	.25	6.4	4.6	21	.20	5.1	0.026	0.7	7.75	MW	CG	N
0.210	5.33	70502S	.50	12.7	.158	4.0	16	2.7	.20	5.1	3.1	14	.20	5.1	0.026	0.7	7.75	SST	CG	N
0.210	5.33	70465	.56	14.2	.174	4.4	4.5	.79	.37	9.4	1.7	7.4	.12	3.1	0.018	0.5	6.75	MW	CG	N
0.210	5.33	70465S	.56	14.2	.174	4.4	3.8	.67	.29	7.3	1.1	4.9	.12	3.1	0.018	0.5	6.75	SST	CG	N
0.210	5.33	70481	.56	14.2	.166	4.2	8.7	1.5	.35	8.8	3.0	13	.17	4.4	0.022	0.6	7.88	MW	CG	N
0.210	5.33	70481S	.56	14.2	.166	4.2	7.4	1.3	.27	6.9	2.0	8.9	.17	4.4	0.022	0.6	7.88	SST	CG	N
0.210	5.33	70503	.56	14.2	.158	4.0	16	2.8	.29	7.3	4.6	21	.22	5.6	0.026	0.7	8.50	MW	CG	N
0.210	5.33	70503S	.56	14.2	.158	4.0	14	2.4	.23	5.7	3.1	14	.22	5.6	0.026	0.7	8.50	SST	CG	N
0.210	5.33	70466	.63	16.0	.174	4.4	4.0	.70	.41	11	1.7	7.4	.13	3.4	0.018	0.5	7.38	MW	CG	N
0.210	5.33	70466S	.63	16.0	.174	4.4	3.4	.60	.32	8.2	1.1	4.9	.13	3.4	0.018	0.5	7.38	SST	CG	N
0.210	5.33	70482	.63	16.0	.166	4.2	7.8	1.4	.39	9.8	3.0	13	.19	4.7	0.022	0.6	8.50	MW	CG	N
0.210	5.33	70482S	.63	16.0	.166	4.2	6.6	1.2	.30	7.7	2.0	8.9	.19	4.7	0.022	0.6	8.50	SST	CG	N
0.210	5.33	70504	.63	16.0	.158	4.0	14	2.5	.33	8.3	4.6	21	.24	6.2	0.026	0.7	9.38	MW	CG	N
0.210	5.33	70504S	.63	16.0	.158	4.0	12	2.1	.26	6.5	3.1	14	.24	6.2	0.026	0.7	9.38	SST	CG	N
0.210	5.33	12549	.67	17.1	.170	4.3	5.6	.98	.41	10	2.3	10	.18	4.6	0.020	0.5	8.00	MW	C	Z
0.210	5.33	70467	.69	17.5	.174	4.4	3.6	.63	.46	12	1.7	7.4	.14	3.6	0.018	0.5	7.88	MW	CG	N
0.210	5.33	70467S	.69	17.5	.174	4.4	3.1	.54	.36	9.2	1.1	4.9	.14	3.6	0.018	0.5	7.88	SST	CG	N
0.210	5.33	70483	.69	17.5	.166	4.2	6.9	1.2	.43	11	3.0	13	.21	5.2	0.022	0.6	9.38	MW	CG	N
0.210	5.33	70483S	.69	17.5	.166	4.2	5.9	1.0	.34	8.6	2.0	8.9	.21	5.2	0.022	0.6	9.38	SST	CG	N
0.210	5.33	70505	.69	17.5	.158	4.0	13	2.3	.36	9.1	4.6	21	.27	6.8	0.026	0.7	10.3	MW	CG	N
0.210	5.33	70505S	.69	17.5	.158	4.0	11	1.9	.28	7.2	3.1	14	.27	6.8	0.026	0.7	10.3	SST	CG	N
0.210	5.33	70468	.75	19.1	.174	4.4	3.3	.58	.50	13	1.7	7.4	.15	3.9	0.018	0.5	8.50	MW	CG	N
0.210	5.33	70468S	.75	19.1	.174	4.4	2.8	.49	.39	10	1.1	4.9	.15	3.9	0.018	0.5	8.50	SST	CG	N
0.210	5.33	70484	.75	19.1	.166	4.2	6.3	1.1	.48	12	3.0	13	.22	5.6	0.022	0.6	10.0	MW	CG	N
0.210	5.33	70484S	.75	19.1	.166	4.2	5.4	.94	.37	9.5	2.0	8.9	.22	5.6	0.022	0.6	10.0	SST	CG	N
0.210	5.33	70506	.75	19.1	.158	4.0	12	2.1	.39	10	4.6	21	.29	7.3	0.026	0.7	11.0	MW	CG	N
0.210	5.33	70506S	.75	19.1	.158	4.0	10	1.7	.31	7.9	3.1	14	.29	7.3	0.026	0.7	11.0	SST	CG	N
0.210	5.33	70469	.81	20.6	.174	4.4	3.0	.53	.55	14	1.7	7.4	.16	4.2	0.018	0.5	9.13	MW	CG	N
0.210	5.33	70469S	.81	20.6	.174	4.4	2.6	.45	.43	11	1.1	4.9	.16	4.2	0.018	0.5	9.13	SST	CG	N
0.210	5.33	70485	.81	20.6	.166	4.2	5.8	1.0	.51	13	3.0	13	.24	6.0	0.022	0.6	10.8	MW	CG	N
0.210	5.33	70485S	.81	20.6	.166	4.2	5.0	.87	.40	10	2.0	8.9	.24	6.0	0.022	0.6	10.8	SST	CG	N
0.210	5.33	70507	.81	20.6	.158	4.0	11	1.9	.43	11	4.6	21	.31	7.8	0.026	0.7	11.8	MW	CG	N
0.210	5.33	70507S	.81	20.6	.158	4.0	9.1	1.6	.34	8.6	3.1	14	.31	7.8	0.026	0.7	11.8	SST	CG	N
0.210	5.33	70470	.88	22.4	.174	4.4	2.8	.49	.59	15	1.7	7.4	.17	4.4	0.018	0.5	9.63	MW	CG	N
0.210	5.33	70470S	.88	22.4	.174	4.4	2.4	.42	.46	12	1.1	4.9	.17	4.4	0.018	0.5	9.63	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.210	5.33	70486	.88	22.4	.166	4.2	5.8	1.0	.52	13	3.0	13	.24	6.0	0.022	0.6	10.8	MW	CG	N
0.210	5.33	70486S	.88	22.4	.166	4.2	4.9	.86	.40	10	2.0	8.9	.24	6.0	0.022	0.6	10.8	SST	CG	N
0.210	5.33	70508	.88	22.4	.158	4.0	11	1.8	.44	11	4.6	21	.31	7.9	0.026	0.7	12.0	MW	CG	N
0.210	5.33	70508S	.88	22.4	.158	4.0	8.9	1.6	.35	8.8	3.1	14	.31	7.9	0.026	0.7	12.0	SST	CG	N
0.210	5.33	70488	.94	23.9	.166	4.2	5.3	.93	.57	14	3.0	13	.26	6.5	0.022	0.6	11.6	MW	CG	N
0.210	5.33	70488S	.94	23.9	.166	4.2	4.5	.79	.44	11	2.0	8.9	.26	6.5	0.022	0.6	11.6	SST	CG	N
0.210	5.33	70510	.94	23.9	.158	4.0	9.7	1.7	.48	12	4.6	21	.33	8.5	0.026	0.7	12.9	MW	CG	N
0.210	5.33	70510S	.94	23.9	.158	4.0	8.2	1.4	.37	9.5	3.1	14	.33	8.5	0.026	0.7	12.9	SST	CG	N
0.210	5.33	70471	1.00	25.4	.174	4.4	2.4	.42	.69	18	1.7	7.4	.20	5.0	0.018	0.5	10.9	MW	CG	N
0.210	5.33	70471S	1.00	25.4	.174	4.4	2.0	.36	.54	14	1.1	4.9	.20	5.0	0.018	0.5	10.9	SST	CG	N
0.210	5.33	70489	1.00	25.4	.166	4.2	4.7	.81	.64	16	3.0	13	.28	7.2	0.022	0.6	12.9	MW	CG	N
0.210	5.33	70489S	1.00	25.4	.166	4.2	4.0	.69	.50	13	2.0	8.9	.28	7.2	0.022	0.6	12.9	SST	CG	N
0.210	5.33	70511	1.00	25.4	.158	4.0	8.6	1.5	.54	14	4.6	21	.37	9.4	0.026	0.7	14.3	MW	CG	N
0.210	5.33	70511S	1.00	25.4	.158	4.0	7.3	1.3	.42	11	3.1	14	.37	9.4	0.026	0.7	14.3	SST	CG	N
0.210	5.33	70491	1.13	28.7	.166	4.2	4.4	.77	.68	17	3.0	13	.30	7.5	0.022	0.6	13.5	MW	CG	N
0.210	5.33	70491S	1.13	28.7	.166	4.2	3.7	.65	.53	14	2.0	8.9	.30	7.5	0.022	0.6	13.5	SST	CG	N
0.210	5.33	70513	1.13	28.7	.158	4.0	8.0	1.4	.58	15	4.6	21	.39	10.0	0.026	0.7	15.1	MW	CG	N
0.210	5.33	70513S	1.13	28.7	.158	4.0	6.8	1.2	.45	12	3.1	14	.39	10.0	0.026	0.7	15.1	SST	CG	N
0.210	5.33	70472	1.25	31.8	.174	4.4	1.9	.33	.87	22	1.7	7.4	.24	6.1	0.018	0.5	13.3	MW	CG	N
0.210	5.33	70472S	1.25	31.8	.174	4.4	1.6	.28	.68	17	1.1	4.9	.24	6.1	0.018	0.5	13.3	SST	CG	N
0.210	5.33	70492	1.25	31.8	.166	4.2	3.7	.65	.81	21	3.0	13	.35	8.8	0.022	0.6	15.8	MW	CG	N
0.210	5.33	70492S	1.25	31.8	.166	4.2	3.1	.55	.63	16	2.0	8.9	.35	8.8	0.022	0.6	15.8	SST	CG	N
0.210	5.33	70514	1.25	31.8	.158	4.0	6.8	1.2	.68	17	4.6	21	.46	11.6	0.026	0.7	17.5	MW	CG	N
0.210	5.33	70514S	1.25	31.8	.158	4.0	5.8	1.0	.53	14	3.1	14	.46	11.6	0.026	0.7	17.5	SST	CG	N
0.210	5.33	70494	1.38	35.1	.166	4.2	3.6	.63	.83	21	3.0	13	.35	9.0	0.022	0.6	16.1	MW	CG	N
0.210	5.33	70494S	1.38	35.1	.166	4.2	3.1	.54	.65	17	2.0	8.9	.35	9.0	0.022	0.6	16.1	SST	CG	N
0.210	5.33	70516	1.38	35.1	.158	4.0	6.5	1.1	.71	18	4.6	21	.47	12.1	0.026	0.7	18.3	MW	CG	N
0.210	5.33	70516S	1.38	35.1	.158	4.0	5.5	.97	.56	14	3.1	14	.47	12.1	0.026	0.7	18.3	SST	CG	N
0.210	5.33	70473	1.50	38.1	.174	4.4	1.6	.28	1.0	26	1.7	7.4	.28	7.0	0.018	0.5	15.4	MW	CG	N
0.210	5.33	70473S	1.50	38.1	.174	4.4	1.4	.24	.81	21	1.1	4.9	.28	7.0	0.018	0.5	15.4	SST	CG	N
0.210	5.33	70495	1.50	38.1	.166	4.2	3.0	.53	.99	25	3.0	13	.41	10.5	0.022	0.6	18.8	MW	CG	N
0.210	5.33	70495S	1.50	38.1	.166	4.2	2.6	.45	.78	20	2.0	8.9	.41	10.5	0.022	0.6	18.8	SST	CG	N
0.210	5.33	70517	1.50	38.1	.158	4.0	5.6	.99	.82	21	4.6	21	.54	13.7	0.026	0.7	20.8	MW	CG	N
0.210	5.33	70517S	1.50	38.1	.158	4.0	4.8	.84	.65	16	3.1	14	.54	13.7	0.026	0.7	20.8	SST	CG	N
0.210	5.33	70474	1.75	44.5	.174	4.4	1.4	.25	1.2	30	1.7	7.4	.31	7.9	0.018	0.5	17.3	MW	CG	N
0.210	5.33	70474S	1.75	44.5	.174	4.4	1.2	.21	.93	24	1.1	4.9	.31	7.9	0.018	0.5	17.3	SST	CG	N
0.210	5.33	70496	1.75	44.5	.166	4.2	2.9	.51	1.0	26	3.0	13	.43	10.9	0.022	0.6	19.5	MW	CG	N
0.210	5.33	70496S	1.75	44.5	.166	4.2	2.5	.43	.81	21	2.0	8.9	.43	10.9	0.022	0.6	19.5	SST	CG	N
0.210	5.33	70518	1.75	44.5	.158	4.0	5.1	.89	.91	23	4.6	21	.59	14.9	0.026	0.7	22.6	MW	CG	N
0.210	5.33	70518S	1.75	44.5	.158	4.0	4.3	.76	.71	18	3.1	14	.59	14.9	0.026	0.7	22.6	SST	CG	N
0.210	5.33	70475	2.00	50.8	.174	4.4	1.2	.21	1.4	35	1.7	7.4	.36	9.0	0.018	0.5	19.8	MW	CG	N
0.210	5.33	70475S	2.00	50.8	.174	4.4	1.0	.18	1.1	27	1.1	4.9	.36	9.0	0.018	0.5	19.8	SST	CG	N
0.210	5.33	70497	2.00	50.8	.166	4.2	2.5	.44	1.2	30	3.0	13	.49	12.4	0.022	0.6	22.3	MW	CG	N
0.210	5.33	70497S	2.00	50.8	.166	4.2	2.1	.37	.94	24	2.0	8.9	.49	12.4	0.022	0.6	22.3	SST	CG	N
0.210	5.33	70519	2.00	50.8	.158	4.0	4.5	.79	1.0	26	4.6	21	.66	16.8	0.026	0.7	25.4	MW	CG	N
0.210	5.33	70519S	2.00	50.8	.158	4.0	3.8	.67	.81	21	3.1	14	.66	16.8	0.026	0.7	25.4	SST	CG	N
0.219	5.56	S-863	.22	5.6	.179	4.5	13	2.3	.11	2.8	1.4	6.4	.10	2.5	0.020	0.5	4.00	SST	C	N
0.219	5.56	MM-39	.25	6.4	.179	4.5	15	2.6	.15	3.8	2.2	9.7	.10	2.5	0.020	0.5	4.00	MW	C	Z
0.219	5.56	II-38	.25	6.4	.173	4.4	15	2.7	.11	2.8	1.7	7.7	.14	3.5	0.023	0.6	5.00	SST	C	N
0.219	5.56	G-21	.31	7.9	.197	5.0	.26	.05	.18	4.6	.05	.21	.13	3.4	0.011	0.3	11.0	MW	C	BO
0.219	5.56	S-1531	.31	7.9	.195	5.0	1.2	.21	.25	6.2	.29	1.3	.07	1.7	0.012	0.3	4.50	SST	C	N
0.219	5.56	S-1547	.31	7.9	.193	4.9	1.6	.29	.24	6.1	.39	1.7	.07	1.8	0.013	0.3	4.50	SST	C	N
0.219	5.56	A-15	.31	7.9	.179	4.5	5.1	.89	.15	3.9	.77	3.4	.16	4.1	0.020	0.5	7.00	SST	C	N
0.219	5.56	B9-29	.31	7.9	.177	4.5	14	2.5	.17	4.4	2.5	11	.09	2.4	0.021	0.5	4.50	MW	CG	N
0.219	5.56	I-67	.31	7.9	.169	4.3	19	3.4	.14	3.5	2.6	12	.18	4.4	0.025	0.6	6.00	MW	C	GI
0.219	5.56	A10-18	.31	7.9	.167	4.2	27	4.7	.11	2.8	3.0	13	.13	3.3	0.026	0.7	5.00	SST	CG	N
0.219	5.56	S-1553	.33	8.3	.195	5.0	1.2	.20	.26	6.7	.31	1.4	.07	1.7	0.012	0.3	4.50	SST	C	N
0.219	5.56	B14-38	.34	8.7	.179	4.5	5.8	1.0	.18	4.6	1.1	4.8	.16	4.1	0.020	0.5	7.00	MW	C	N
0.219	5.56	10355	.38	9.5	.185	4.7	4.9	.85	.27	6.9	1.3	5.9	.10	2.6	0.017	0.4	5.00	MW	C	N
0.219	5.56	S-1342	.38	9.5	.177	4.5	16	2.7	.11	2.7	1.7	7.4	.11	2.7	0.021	0.5	4.00	SST	C	N
0.219	5.56	Q-6	.38	9.5	.175	4.4	8.8	1.5	.20	5.1	1.8	7.8	.18	4.5	0.022	0.6	7.00	MW	C	Z
0.219	5.56	EE-12	.38	9.5	.159	4.0	25	4.4	.14	3.4	3.4	15	.24	6.1	0.030	0.8	8.00	SST	CG	N
0.219	5.56	BB-7	.38	9.5	.145	3.7	97	17	.08	2.1	8.0	35	.22	5.6	0.037	0.9	6.00	SST	CG	N
0.219	5.56	HH-39	.38	9.5	.139	3.5	143	25	.07	1.9	11	47	.26	6.6	0.040	1.0	6.50	SPR	CG	GI
0.219	5.56	LL-41	.41	10.3	.199	5.1	.20	.03	.30	7.5	.06	.26	.11	2.8	0.010	0.3	10.0	MW	C	Z
0.219	5.56	10690	.41	10.3	.181	4.6	6.9	1.2	.18	4.6	1.2	5.5	.11	2.9	0.019	0.5	5.00	SST	C	N
0.219	5.56	B14-17	.41	10.3	.179	4.5	9.7	1.7	.22	5.7	2.2	9.7	.10	2.5	0.020	0.5	5.00	MW	CG	N
0.219	5.56	3883	.41	10.3	.165	4.2	27	4.7	.18	4.7	5.0	22	.16	4.1	0.027	0.7	6.00	MW	CG	GI
0.219	5.56	M-34	.41	10.3	.161	4.1	66	12	.06	1.6	4.1	18	.15	3.7	0.029	0.7	4.00	SST	C	N
0.219	5.56	G-12	.41	10.3	.157	4.0	50	8.7	.15	3.8	7.4	33	.19	4.7	0.031	0.8	6.00	MW	CG	Z
0.219	5.56	QQ-14	.41	10.3	.143	3.6	126	22	.07	1.8	9.2	41	.27	6.8	0.038	1.0	6.00	SPR	C	Z
0.219	5.56	J-73	.41	10.3	.137	3.5	114	20	.09	2.4	11	47	.31	7.8	0.041	1.0	7.50	SST	CG	N
0.219	5.56	12754	.42	10.7	.171	4.3	9.2	1.6	.18	4.6	1.7	7.4	.24	6.1	0.024	0.6	9.00	MW	C	N
0.219	5.56	PP-90	.44	11.1	.199	5.1	.39	.07	.37	9.3	.14	.64	.07	1.8	0.010	0.3	6.00	MW	C	N
0.219	5.56	A13-54	.44	11.1	.191	4.9	1.1	.19	.31	7.9	.33	1.5	.13	3.2	0.014	0.4	8.00	MW	C	N
0.219	5.56	U-98	.44	11.1	.183	4.6	2.4	.41	.28	7.0	.65	2.9	.16	4.1	0.018	0.5	9.00	SST	CG	N
0.219	5.56	2626	.44	11.1	.181	4.6	7.8	1.4	.24	6.1	1.9	8.3	.11	2.9	0.019	0.5	5.00	MW	C	Z
0.219	5.56	B9-33	.44	11.1	.181	4.6	3.9	.68	.27	6.8	1.0	4.6	.17	4.3	0.019	0.5	8.00	MW	C	N
0.219	5.56	B-16	.44	11.1	.175	4.4	7.0	1.2	.27	6.9	1.9	8.5	.17	4.2	0.022	0.6	7.50	SST	CG	N
0.219	5.56	3992	.44	11.1	.169	4.3	9.6	1.7	.16	4.1	1.6	7.0	.28	7.0	0.025	0.6	10.0	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.219	5.56	H-71	.44	11.1	.141	3.6	107	19	.09	2.3	9.9	44	.29	7.3	0.039	1.0	7.33	SPR	CG	N
0.219	5.56	HH-46	.44	11.1	.139	3.5	112	20	.09	2.3	9.9	44	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.219	5.56	L-29	.44	11.1	.139	3.5	214	37	.05	1.3	11	47	.20	5.1	0.040	1.0	5.00	SPR	CG	Z
0.219	5.56	XX-21	.47	11.9	.145	3.7	78	14	.10	2.6	8.0	35	.30	7.5	0.037	0.9	7.00	SST	C	N
0.219	5.56	B15-4	.47	11.9	.145	3.7	72	13	.12	3.0	8.5	38	.31	7.8	0.037	0.9	8.25	SPR	CG	N
0.219	5.56	2703	.47	11.9	.143	3.6	126	22	.10	2.6	13	57	.27	6.8	0.038	1.0	6.00	MW	C	Z
0.219	5.56	A11-20	.47	11.9	.133	3.4	200	35	.06	1.6	12	54	.30	7.6	0.043	1.1	6.00	SST	C	N
0.219	5.56	EE-86	.50	12.7	.191	4.9	.46	.08	.29	7.4	.13	.60	.21	5.3	0.014	0.4	14.0	SST	C	N
0.219	5.56	B-66	.50	12.7	.187	4.7	1.7	.30	.35	8.8	.60	2.7	.15	3.9	0.016	0.4	8.50	MW	C	N
0.219	5.56	10314	.50	12.7	.179	4.5	7.3	1.3	.30	7.6	2.2	9.7	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.219	5.56	3161	.50	12.7	.179	4.5	5.1	.89	.33	8.3	1.6	7.3	.18	4.4	0.020	0.5	7.75	MW	C	Z
0.219	5.56	H-20	.50	12.7	.179	4.5	4.2	.73	.32	8.1	1.3	5.9	.18	4.6	0.020	0.5	9.00	MW	CG	Z
0.219	5.56	10353	.50	12.7	.177	4.5	4.6	.81	.27	7.0	1.3	5.7	.23	5.7	0.021	0.5	9.75	MW	C	BO
0.219	5.56	EE-24	.50	12.7	.175	4.4	7.7	1.3	.25	6.4	1.9	8.5	.15	3.9	0.022	0.6	7.00	SST	CG	N
0.219	5.56	KK-83	.50	12.7	.175	4.4	4.8	.84	.26	6.6	1.2	5.5	.24	6.1	0.022	0.6	10.0	SST	C	N
0.219	5.56	H-78	.50	12.7	.169	4.3	11	2.0	.24	6.0	2.7	12	.20	5.1	0.025	0.6	8.00	SST	C	N
0.219	5.56	Q-4	.50	12.7	.169	4.3	13	2.2	.28	7.0	3.5	16	.23	5.7	0.025	0.6	8.00	MW	C	N
0.219	5.56	S-858	.50	12.7	.165	4.2	15	2.7	.22	5.5	3.3	15	.25	6.3	0.027	0.7	8.25	SST	C	N
0.219	5.56	10828	.50	12.7	.161	4.1	30	5.2	.21	5.2	6.1	27	.23	5.9	0.029	0.7	7.00	MW	C	N
0.219	5.56	3837	.50	12.7	.139	3.5	214	37	.05	1.3	11	47	.24	6.1	0.040	1.0	5.00	SPR	C	Z
0.219	5.56	Z-82	.50	12.7	.139	3.5	128	22	.08	2.1	11	47	.28	7.1	0.040	1.0	7.00	SPR	CG	Z
0.219	5.56	LL-31	.50	12.7	.119	3.0	266	47	.05	1.3	13	59	.45	11.4	0.050	1.3	9.00	SPR	CG	N
0.219	5.56	B17-123	.53	13.5	.203	5.2	.10	.02	.46	12	.04	.20	.08	1.9	0.008	0.2	8.50	MW	C	N
0.219	5.56	10583	.53	13.5	.193	4.9	1.0	.18	.43	11	.45	2.0	.10	2.5	0.013	0.3	6.50	MW	C	N
0.219	5.56	RR-5	.53	13.5	.163	4.1	18	3.2	.20	5.1	3.7	16	.25	6.4	0.028	0.7	8.00	SST	C	N
0.219	5.56	B7-11	.53	13.5	.163	4.1	20	3.4	.28	7.2	5.5	25	.24	6.0	0.028	0.7	8.50	MW	CG	Z
0.219	5.56	BB-11	.53	13.5	.159	4.0	17	3.0	.20	5.1	3.4	15	.33	8.4	0.030	0.8	11.0	SST	CG	N
0.219	5.56	BB-95	.53	13.5	.155	3.9	22	3.9	.18	4.5	4.0	18	.35	8.9	0.032	0.8	11.0	SST	CG	N
0.219	5.56	B-81	.53	13.5	.155	3.9	41	7.2	.13	3.4	5.4	24	.22	5.7	0.032	0.8	7.00	SST	CG	N
0.219	5.56	MM-7	.53	13.5	.139	3.5	80	14	.13	3.3	11	47	.40	10.2	0.040	1.0	10.0	SPR	CG	N
0.219	5.56	B9-25	.56	14.3	.199	5.1	.16	.03	.43	11	.07	.31	.13	3.2	0.010	0.3	11.8	MW	C	N
0.219	5.56	A9-12	.56	14.3	.197	5.0	.17	.03	.40	10	.07	.31	.17	4.2	0.011	0.3	14.0	SST	C	N
0.219	5.56	EE-99	.56	14.3	.179	4.5	4.2	.73	.36	9.2	1.5	6.7	.20	5.1	0.020	0.5	9.00	MW	C	N
0.219	5.56	S-192	.56	14.3	.161	4.1	26	4.5	.16	4.0	4.1	18	.23	5.9	0.029	0.7	7.00	SST	C	N
0.219	5.56	S-1208	.56	14.3	.149	3.8	38	6.7	.18	4.5	6.8	30	.35	8.9	0.035	0.9	10.0	SST	CG	N
0.219	5.56	A10-14	.56	14.3	.147	3.7	66	11	.12	3.0	7.9	35	.32	8.2	0.036	0.9	8.00	SPR	C	N
0.219	5.56	11419	.56	14.3	.141	3.6	67	12	.14	3.5	9.3	41	.37	9.4	0.039	1.0	9.50	SST	CG	N
0.219	5.56	NN-70	.59	15.1	.179	4.5	4.9	.85	.41	10	2.0	8.9	.18	4.6	0.020	0.5	8.00	MW	C	N
0.219	5.56	Q-80	.59	15.1	.169	4.3	11	1.9	.36	9.2	4.0	18	.23	5.7	0.025	0.6	9.00	MW	CG	N
0.219	5.56	OO-27	.59	15.1	.159	4.0	19	3.3	.24	6.0	4.5	20	.33	8.4	0.030	0.8	10.0	SST	C	N
0.219	5.56	A9-34	.59	15.1	.147	3.7	56	9.9	.14	3.5	7.9	35	.32	8.2	0.036	0.9	9.00	SPR	CG	N
0.219	5.56	H-5	.63	15.9	.189	4.8	.66	.12	.40	10	.26	1.2	.23	5.7	0.015	0.4	15.0	MW	CG	N
0.219	5.56	M-21	.63	15.9	.179	4.5	4.2	.73	.43	11	1.8	7.9	.20	5.1	0.020	0.5	9.00	MW	C	Z
0.219	5.56	Q-70	.63	15.9	.175	4.4	4.8	.84	.38	9.7	1.8	8.2	.24	6.1	0.022	0.6	10.0	SST	C	N
0.219	5.56	S-714	.63	15.9	.175	4.4	6.1	1.1	.31	7.9	1.9	8.5	.20	5.2	0.022	0.6	8.25	SST	C	N
0.219	5.56	2667	.63	15.9	.171	4.3	8.3	1.5	.37	9.3	3.0	14	.26	6.6	0.024	0.6	9.75	MW	C	Z
0.219	5.56	B14-1	.63	15.9	.171	4.3	13	2.3	.29	7.4	3.7	17	.19	4.9	0.024	0.6	7.00	MW	C	N
0.219	5.56	3790	.63	15.9	.169	4.3	7.7	1.3	.30	7.6	2.3	10	.33	8.3	0.025	0.6	12.0	MW	C	Z
0.219	5.56	I-69	.63	15.9	.169	4.3	9.6	1.7	.38	9.5	3.6	16	.25	6.4	0.025	0.6	10.0	MW	CG	Z
0.219	5.56	EE-20	.63	15.9	.159	4.0	15	2.7	.27	6.7	4.1	18	.36	9.1	0.030	0.8	12.0	SST	CG	N
0.219	5.56	MM-19	.63	15.9	.159	4.0	22	3.8	.31	7.9	6.7	30	.30	7.6	0.030	0.8	10.0	MW	CG	Z
0.219	5.56	S-5	.63	15.9	.155	3.9	21	3.7	.23	5.7	4.7	21	.40	10.2	0.032	0.8	11.5	SST	C	N
0.219	5.56	GG-68	.63	15.9	.149	3.8	38	6.6	.18	4.6	6.8	30	.35	8.9	0.035	0.9	10.0	SST	CG	N
0.219	5.56	EE-35	.63	15.9	.119	3.0	310	54	.06	1.5	19	82	.40	10.2	0.050	1.3	8.00	SPR	CG	N
0.219	5.56	AA-89	.66	16.7	.195	5.0	.27	.05	.49	12	.13	.59	.17	4.3	0.012	0.3	13.0	SST	C	N
0.219	5.56	MM-33	.66	16.7	.179	4.5	4.9	.85	.45	11	2.2	9.7	.16	4.1	0.020	0.5	8.00	MW	CG	N
0.219	5.56	B5-68	.66	16.7	.169	4.3	14	2.4	.19	4.9	2.7	12	.20	5.1	0.025	0.6	7.00	SST	C	N
0.219	5.56	2912	.66	16.7	.167	4.2	12	2.0	.38	9.7	4.4	20	.26	6.5	0.026	0.7	9.88	MW	CG	Z
0.219	5.56	2882	.66	16.7	.159	4.0	27	4.6	.25	6.5	6.7	30	.29	7.2	0.030	0.8	8.50	MW	C	N
0.219	5.56	S-946	.66	16.7	.157	4.0	27	4.7	.19	4.7	5.0	22	.29	7.5	0.031	0.8	8.50	SST	C	N
0.219	5.56	A-93	.66	16.7	.149	3.8	33	5.8	.22	5.5	7.2	32	.44	11.1	0.035	0.9	12.5	SPR	CG	N
0.219	5.56	NN-69	.69	17.4	.193	4.9	.37	.07	.51	13	.19	.83	.18	4.6	0.013	0.3	13.0	SST	C	N
0.219	5.56	I-78	.69	17.4	.191	4.9	.24	.04	.32	8.2	.08	.35	.36	9.2	0.014	0.4	25.0	SST	C	N
0.219	5.56	BB-46	.69	17.4	.189	4.8	1.2	.21	.54	14	.66	2.9	.15	3.8	0.015	0.4	9.00	MW	C	GI
0.219	5.56	EE-46	.69	17.4	.187	4.7	1.1	.19	.50	13	.54	2.4	.19	4.9	0.016	0.4	11.0	SST	C	N
0.219	5.56	LL-86	.69	17.4	.183	4.6	1.3	.24	.42	11	.56	2.5	.27	6.9	0.018	0.5	14.0	SST	C	N
0.219	5.56	B8-13	.69	17.4	.147	3.7	36	6.3	.22	5.6	7.8	35	.47	11.9	0.036	0.9	13.0	SPR	CG	N
0.219	5.56	J-18	.69	17.4	.139	3.5	71	12	.15	3.8	11	47	.44	11.2	0.040	1.0	11.0	SPR	CG	GI
0.219	5.56	NN-31	.69	17.4	.125	3.2	230	40	.07	1.9	17	74	.42	10.7	0.047	1.2	8.00	SPR	C	N
0.219	5.56	11363	.69	17.4	.125	3.2	153	27	.10	2.6	16	70	.47	11.9	0.047	1.2	10.0	SST	CG	N
0.219	5.56	B8-12	.75	19.1	.195	5.0	.15	.03	.44	11	.06	.28	.31	7.9	0.012	0.3	25.0	MW	C	N
0.219	5.56	XX-59	.75	19.1	.189	4.8	.71	.13	.53	13	.38	1.7	.23	5.7	0.015	0.4	14.0	MW	C	Z
0.219	5.56	LL-30	.75	19.1	.185	4.7	.75	.13	.41	10	.31	1.4	.34	8.6	0.017	0.4	19.0	SST	C	N
0.219	5.56	G-37	.75	19.1	.179	4.5	4.9	.85	.45	11	2.2	9.7	.18	4.6	0.020	0.5	8.00	MW	C	N
0.219	5.56	1900	.75	19.1	.175	4.4	5.5	.96	.51	13	2.8	12	.24	6.1	0.022	0.6	10.0	MW	C	Z
0.219	5.56	S-715	.75	19.1	.175	4.4	5.1	.89	.38	9.5	1.9	8.5	.23	5.9	0.022	0.6	9.50	SST	C	N
0.219	5.56	3544	.75	19.1	.173	4.4	6.7	1.2	.49	12	3.3	15	.23	5.8	0.023	0.6	10.0	MW	CG	Z
0.219	5.56	3709	.75	19.1	.169	4.3	9.0	1.6	.44	11	4.0	18	.29	7.3	0.025	0.6	10.5	MW	C	Z
0.219	5.56	II-81	.75	19.1	.169	4.3	5.6	.98	.38	9.5	2.1	9.3	.38	9.5	0.025	0.6	14.0	SST	C	N
0.219	5.56	V-10	.75	19.1	.167	4.2	7.9	1.4	.37	9.5	3.0	13	.34	8.6	0.026	0.7	12.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.219	5.56	HH-43	.75	19.1	.159	4.0	19	3.4	.35	8.9	6.7	30	.33	8.4	0.030	0.8	11.0	MW	CG	N
0.219	5.56	TT-39	.75	19.1	.159	4.0	18	3.1	.26	6.5	4.5	20	.35	8.8	0.030	0.8	10.5	SST	C	N
0.219	5.56	11303	.75	19.1	.149	3.8	35	6.1	.19	4.9	6.8	30	.41	10.4	0.035	0.9	10.8	SST	C	N
0.219	5.56	A9-5	.78	19.8	.155	3.9	23	4.0	.35	9.0	8.1	36	.38	9.8	0.032	0.8	12.0	MW	CG	N
0.219	5.56	S-874	.78	19.8	.143	3.6	49	8.6	.18	4.5	8.6	38	.42	10.6	0.038	1.0	11.0	SST	CG	N
0.219	5.56	HH-16	.78	19.8	.099	2.5	514	90	.06	1.4	28	127	.60	15.2	0.060	1.5	10.0	SST	CG	N
0.219	5.56	V-61	.81	20.6	.179	4.5	2.8	.49	.51	13	1.4	6.4	.24	6.1	0.020	0.5	11.0	SST	C	N
0.219	5.56	MM-81	.81	20.6	.155	3.9	16	2.9	.30	7.6	4.9	22	.51	13.0	0.032	0.8	16.0	HD	CG	Z
0.219	5.56	Z-85	.81	20.6	.151	3.8	23	4.1	.30	7.6	7.0	31	.51	13.0	0.034	0.9	15.0	SPR	CG	N
0.219	5.56	1503	.81	20.6	.149	3.8	51	9.0	.20	5.0	10	45	.34	8.7	0.035	0.9	8.75	MW	C	Z
0.219	5.56	S-1555	.81	20.6	.143	3.6	49	8.6	.18	4.5	8.6	38	.46	11.6	0.038	1.0	11.0	SST	C	N
0.219	5.56	VV-38	.81	20.6	.129	3.3	118	21	.13	3.2	15	66	.56	14.3	0.045	1.1	11.5	SPR	C	Z
0.219	5.56	H-48	.84	21.4	.165	4.2	15	2.7	.32	8.2	5.0	22	.24	6.2	0.027	0.7	9.00	MW	CG	Z
0.219	5.56	II-58	.84	21.4	.153	3.9	20	3.6	.31	8.0	6.4	28	.50	12.6	0.033	0.8	15.0	SPR	CG	Z
0.219	5.56	10733	.88	22.2	.193	4.9	.64	.11	.67	17	.43	1.9	.12	3.1	0.013	0.3	8.50	SST	C	N
0.219	5.56	B-15	.88	22.2	.185	4.7	.79	.14	.55	14	.44	1.9	.32	8.2	0.017	0.4	18.0	SST	C	N
0.219	5.56	DD-38	.88	22.2	.179	4.5	2.6	.45	.56	14	1.4	6.4	.26	6.6	0.020	0.5	12.0	SST	C	N
0.219	5.56	S-716	.88	22.2	.175	4.4	4.3	.75	.45	11	1.9	8.5	.26	6.7	0.022	0.6	11.0	SST	C	N
0.219	5.56	S-1169	.88	22.2	.171	4.3	8.6	1.5	.29	7.3	2.5	11	.23	5.8	0.024	0.6	8.50	SST	C	N
0.219	5.56	S-1079	.88	22.2	.169	4.3	5.6	.98	.48	12	2.7	12	.35	8.9	0.025	0.6	14.0	SST	CG	N
0.219	5.56	2771	.88	22.2	.167	4.2	18	3.2	.24	6.2	4.4	20	.21	5.3	0.026	0.7	7.00	MW	C	Z
0.219	5.56	2900	.88	22.2	.163	4.1	9.8	1.7	.46	12	4.4	20	.42	10.7	0.028	0.7	15.0	MW	CG	Z
0.219	5.56	V-59	.88	22.2	.161	4.1	11	1.9	.38	9.7	4.1	18	.41	10.3	0.029	0.7	14.0	SST	CG	N
0.219	5.56	2529	.88	22.2	.139	3.5	58	10	.25	6.4	15	65	.56	14.2	0.040	1.0	13.0	MW	C	Z
0.219	5.56	HH-52	.88	22.2	.139	3.5	53	9.4	.20	5.0	11	47	.56	14.2	0.040	1.0	14.0	SPR	CG	Z
0.219	5.56	2801	.91	23.0	.181	4.6	2.0	.36	.63	16	1.3	5.7	.28	7.0	0.019	0.5	13.5	MW	C	Z
0.219	5.56	Z-27	.91	23.0	.173	4.4	7.3	1.3	.30	7.6	2.2	9.7	.22	5.5	0.023	0.6	8.50	SST	C	N
0.219	5.56	AA-15	.94	23.8	.191	4.9	.44	.08	.72	18	.31	1.4	.22	5.6	0.014	0.4	14.8	SST	C	N
0.219	5.56	W-42	.94	23.8	.167	4.2	5.0	.87	.47	12	2.3	10	.47	11.9	0.026	0.7	18.0	SST	CG	N
0.219	5.56	G-58	.94	23.8	.157	4.0	14	2.4	.43	11	5.9	26	.51	13.0	0.031	0.8	16.5	MW	CG	N
0.219	5.56	J-70	.94	23.8	.157	4.0	13	2.3	.41	10	5.5	24	.53	13.4	0.031	0.8	17.0	MW	CG	GI
0.219	5.56	A9-52	.97	24.6	.173	4.4	4.4	.78	.49	12	2.2	9.7	.29	7.4	0.023	0.6	12.7	SST	CG	N
0.219	5.56	2627	.97	24.6	.161	4.1	11	1.9	.52	13	5.7	25	.45	11.4	0.029	0.7	15.5	MW	CG	Z
0.219	5.56	159-A	1.00	25.4	.187	4.7	1.6	.28	.70	18	1.1	5.0	.16	4.1	0.016	0.4	9.00	MW	C	Z
0.219	5.56	160-A	1.00	25.4	.183	4.6	2.4	.42	.66	17	1.6	7.1	.19	4.9	0.018	0.5	9.75	MW	C	Z
0.219	5.56	4299	1.00	25.4	.183	4.6	2.0	.34	.78	20	1.5	6.7	.23	5.7	0.018	0.5	11.5	MW	C	Z
0.219	5.56	O-101	1.00	25.4	.183	4.6	1.9	.33	.77	19	1.4	6.3	.23	5.9	0.018	0.5	12.0	MW	C	N
0.219	5.56	A-65	1.00	25.4	.181	4.6	.58	.10	.28	7.1	.16	.72	.72	18.3	0.019	0.5	37.0	SST	C	N
0.219	5.56	351-A	1.00	25.4	.179	4.5	3.3	.58	.65	17	2.2	9.7	.24	6.0	0.020	0.5	10.8	MW	C	Z
0.219	5.56	12453	1.00	25.4	.175	4.4	3.7	.66	.68	17	2.5	11	.32	8.2	0.022	0.6	13.8	MW	C	Z
0.219	5.56	161-A	1.00	25.4	.173	4.4	5.5	.96	.60	15	3.3	15	.29	7.4	0.023	0.6	11.8	MW	C	Z
0.219	5.56	K-39	1.00	25.4	.171	4.3	5.1	.89	.49	12	2.5	11	.34	8.5	0.024	0.6	13.0	SST	C	N
0.219	5.56	RR-39	1.00	25.4	.169	4.3	7.7	1.3	.51	13	4.0	18	.33	8.3	0.025	0.6	12.0	MW	C	Z
0.219	5.56	2675	1.00	25.4	.167	4.2	6.3	1.1	.55	14	3.4	15	.46	11.6	0.026	0.7	16.5	MW	C	Z
0.219	5.56	O-46	1.00	25.4	.165	4.2	8.6	1.5	.57	15	5.0	22	.42	10.6	0.027	0.7	14.5	MW	C	Z
0.219	5.56	162-A	1.00	25.4	.163	4.1	11	2.0	.49	12	5.5	25	.40	10.1	0.028	0.7	13.3	MW	C	Z
0.219	5.56	A10-32	1.00	25.4	.149	3.8	27	4.7	.27	6.9	7.2	32	.53	13.3	0.035	0.9	15.0	SPR	CG	N
0.219	5.56	Z-89	1.06	27.0	.183	4.6	.48	.08	.40	10	.19	.84	.67	16.9	0.018	0.5	36.0	SST	C	N
0.219	5.56	J-2	1.06	27.0	.165	4.2	9.8	1.7	.51	13	5.0	22	.35	8.9	0.027	0.7	13.0	MW	CG	GI
0.219	5.56	KK-94	1.06	27.0	.151	3.8	22	3.8	.32	8.2	7.0	31	.58	14.7	0.034	0.9	16.0	SPR	C	N
0.219	5.56	B15-13	1.09	27.8	.141	3.6	36	6.2	.28	7.0	9.9	44	.70	17.8	0.039	1.0	18.0	SPR	CG	N
0.219	5.56	S-1054	1.13	28.6	.163	4.1	10	1.8	.37	9.4	3.7	16	.39	10.0	0.028	0.7	13.0	SST	C	N
0.219	5.56	FF-19	1.13	28.6	.159	4.0	9.6	1.7	.47	12	4.5	20	.54	13.7	0.030	0.8	18.0	SST	CG	N
0.219	5.56	Z-40	1.16	29.4	.159	4.0	17	3.0	.39	9.9	6.7	30	.36	9.1	0.030	0.8	12.0	MW	CG	N
0.219	5.56	2618	1.16	29.4	.147	3.7	26	4.6	.41	11	11	48	.65	16.5	0.036	0.9	17.0	MW	C	Z
0.219	5.56	10574	1.19	30.2	.171	4.3	4.0	.70	.76	19	3.0	14	.43	11.0	0.024	0.6	18.0	MW	CG	N
0.219	5.56	10065	1.25	31.8	.183	4.6	1.7	.30	.94	24	1.6	7.1	.25	6.4	0.018	0.5	13.0	MW	C	Z
0.219	5.56	11399	1.25	31.8	.179	4.5	2.5	.44	.86	22	2.2	9.7	.29	7.4	0.020	0.5	13.5	MW	C	Z
0.219	5.56	2861	1.25	31.8	.171	4.3	3.1	.54	.67	17	2.1	9.2	.58	14.6	0.024	0.6	23.0	MW	C	GI
0.219	5.56	S-145	1.25	31.8	.171	4.3	3.6	.63	.69	17	2.5	11	.44	11.3	0.024	0.6	17.5	SST	C	N
0.219	5.56	3779	1.25	31.8	.163	4.1	10	1.8	.54	14	5.5	25	.43	11.0	0.028	0.7	14.5	MW	C	Z
0.219	5.56	U-20	1.25	31.8	.141	3.6	38	6.7	.26	6.6	9.9	44	.70	17.8	0.039	1.0	17.0	SPR	C	N
0.219	5.56	A10-48	1.28	32.5	.181	4.6	1.0	.18	.84	21	.86	3.8	.44	11.3	0.019	0.5	22.3	SST	C	N
0.219	5.56	FF-91	1.31	33.3	.175	4.4	3.2	.56	.60	15	1.9	8.5	.33	8.4	0.022	0.6	14.0	SST	C	N
0.219	5.56	O-84	1.31	33.3	.163	4.1	9.9	1.7	.55	14	5.5	25	.44	11.2	0.028	0.7	14.8	MW	C	Z
0.219	5.56	S-891	1.38	34.9	.191	4.9	.43	.08	1.2	29	.49	2.2	.22	5.7	0.014	0.4	15.0	SST	C	N
0.219	5.56	159-B	1.38	34.9	.187	4.7	1.2	.20	.97	25	1.1	5.0	.20	5.2	0.016	0.4	11.8	MW	C	Z
0.219	5.56	160-B	1.38	34.9	.183	4.6	1.7	.30	.92	23	1.6	7.1	.25	6.3	0.018	0.5	12.8	MW	C	Z
0.219	5.56	1699	1.38	34.9	.179	4.5	1.5	.27	.94	24	1.4	6.4	.44	11.2	0.020	0.5	21.0	MW	C	Z
0.219	5.56	351-B	1.38	34.9	.179	4.5	2.4	.42	.91	23	2.2	9.7	.31	7.7	0.020	0.5	14.3	MW	C	Z
0.219	5.56	161-B	1.38	34.9	.173	4.4	3.9	.68	.85	21	3.3	15	.39	9.8	0.023	0.6	15.8	MW	C	Z
0.219	5.56	3865	1.38	34.9	.173	4.4	3.1	.54	.91	23	2.8	13	.47	11.8	0.023	0.6	19.3	MW	C	Z
0.219	5.56	M-147	1.38	34.9	.173	4.4	4.9	.86	.45	11	2.2	9.7	.29	7.3	0.023	0.6	11.5	SST	C	N
0.219	5.56	162-B	1.38	34.9	.163	4.1	8.1	1.4	.68	17	5.5	25	.53	13.3	0.028	0.7	17.8	MW	C	Z
0.219	5.56	G-89	1.41	35.7	.161	4.1	6.8	1.2	.60	15	4.1	18	.64	16.2	0.029	0.7	21.0	SST	C	N
0.219	5.56	10898	1.50	38.1	.195	5.0	.29	.05	1.3	34	.38	1.7	.18	4.5	0.012	0.3	13.8	MW	C	N
0.219	5.56	11463	1.50	38.1	.183	4.6	1.7	.30	.94	24	1.6	7.1	.25	6.4	0.018	0.5	13.0	MW	C	Z
0.219	5.56	S-260	1.50	38.1	.171	4.3	3.5	.61	.71	18	2.5	11	.46	11.6	0.024	0.6	18.0	SST	C	N
0.219	5.56	2515	1.50	38.1	.169	4.3	4.8	.84	.82	21	4.0	18	.48	12.1	0.025	0.6	18.0	MW	C	Z
0.219	5.56	I-25	1.50	38.1	.169	4.3	3.8	.67	.93	23	3.6	16	.58	14.6	0.025	0.6	22.0	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.219	5.56	AA-97	1.50	38.1	.159	4.0	8.6	1.5	.78	20	6.7	30	.69	17.5	0.030	0.8	22.0	MW	C	Z
0.219	5.56	KK-50	1.53	38.9	.199	5.1	.07	.01	1.3	33	.09	.38	.24	6.1	0.010	0.3	23.0	SST	C	N
0.219	5.56	S-159	1.56	39.7	.175	4.4	2.4	.42	.80	20	1.9	8.5	.42	10.6	0.022	0.6	18.0	SST	C	N
0.219	5.56	GG-63	1.63	41.3	.179	4.5	1.9	.34	1.1	28	2.2	9.7	.36	9.1	0.020	0.5	17.0	MW	C	Z
0.219	5.56	10664	1.72	43.6	.183	4.6	1.0	.18	1.3	34	1.4	6.2	.38	9.6	0.018	0.5	20.0	MW	C	BO
0.219	5.56	10288	1.75	44.5	.189	4.8	.57	.10	1.5	38	.85	3.8	.27	6.9	0.015	0.4	17.0	MW	C	GI
0.219	5.56	159-C	1.75	44.5	.187	4.7	.90	.16	1.2	32	1.1	5.0	.25	6.3	0.016	0.4	14.5	MW	C	Z
0.219	5.56	160-C	1.75	44.5	.183	4.6	1.3	.23	1.2	31	1.6	7.1	.31	7.8	0.018	0.5	16.0	MW	C	Z
0.219	5.56	351-C	1.75	44.5	.179	4.5	1.9	.32	1.2	30	2.2	9.7	.38	9.5	0.020	0.5	17.8	MW	C	Z
0.219	5.56	161-C	1.75	44.5	.173	4.4	3.0	.53	1.1	28	3.3	15	.48	12.1	0.023	0.6	19.8	MW	C	Z
0.219	5.56	162-C	1.75	44.5	.163	4.1	6.2	1.1	.89	23	5.5	25	.66	16.7	0.028	0.7	22.5	MW	C	Z
0.219	5.56	MM-2	1.88	47.6	.171	4.3	4.6	.80	.81	21	3.7	17	.38	9.8	0.024	0.6	16.0	MW	C	Z
0.219	5.56	FF-46	1.94	49.2	.159	4.0	4.7	.82	.87	22	4.1	18	1.07	27.1	0.030	0.8	34.5	SST	C	N
0.219	5.56	10267	2.19	55.6	.163	4.1	3.4	.59	1.1	27	3.6	16	1.13	28.8	0.028	0.7	39.5	MW	C	GI
0.219	5.56	10436	2.28	57.9	.143	3.6	16	2.8	.58	15	9.2	41	1.33	33.8	0.038	1.0	34.0	SPR	C	GI
0.219	5.56	10640	2.44	61.9	.133	3.4	38	6.6	.35	8.8	13	58	1.16	29.5	0.043	1.1	26.0	SPR	C	Z
0.219	5.56	G-30	5.00	127.0	.181	4.6	.33	.06	3.6	91	1.2	5.2	1.43	36.2	0.019	0.5	74.0	MW	C	GI
0.234	5.94	CC-15	.16	4.0	.198	5.0	5.4	.95	.05	1.3	.29	1.3	.10	2.6	0.018	0.5	4.75	MW	C	N
0.234	5.94	G-8	.16	4.0	.190	4.8	21	3.7	.06	1.4	1.2	5.3	.10	2.5	0.022	0.6	3.50	SST	C	N
0.234	5.94	Z-14	.16	4.0	.164	4.2	238	42	.03	.68	6.4	28	.11	2.7	0.035	0.9	3.00	SST	CG	N
0.234	5.94	VV-8	.25	6.4	.194	4.9	10	1.8	.13	3.4	1.4	6.0	.10	2.5	0.020	0.5	4.00	SST	C	N
0.234	5.94	S-1530	.28	7.1	.190	4.8	31	5.4	.06	1.5	1.8	8.0	.09	2.2	0.022	0.6	3.00	SST	C	N
0.234	5.94	AA-26	.28	7.1	.188	4.8	19	3.3	.11	2.8	2.1	9.1	.09	2.3	0.023	0.6	4.00	SST	CG	N
0.234	5.94	10572	.31	7.9	.210	5.3	1.1	.19	.25	6.2	.27	1.2	.07	1.7	0.012	0.3	4.50	MW	C	N
0.234	5.94	O-41	.31	7.9	.194	4.9	6.7	1.2	.18	4.6	1.2	5.4	.13	3.3	0.020	0.5	5.50	MW	C	N
0.234	5.94	H-3	.31	7.9	.178	4.5	34	5.9	.15	3.9	5.2	23	.14	3.6	0.028	0.7	5.00	MW	CG	N
0.234	5.94	HH-30	.31	7.9	.176	4.5	39	6.9	.15	3.7	5.7	26	.15	3.7	0.029	0.7	5.00	MW	CG	Z
0.234	5.94	FF-10	.31	7.9	.170	4.3	91	16	.06	1.5	5.5	25	.16	4.1	0.032	0.8	4.00	SPR	C	N
0.234	5.94	VV-64	.31	7.9	.170	4.3	37	6.4	.06	1.4	2.0	9.1	.26	6.5	0.032	0.8	7.00	HD	C	Z
0.234	5.94	I-75	.31	7.9	.138	3.5	339	59	.05	1.2	16	72	.26	6.7	0.048	1.2	5.50	SPR	CG	N
0.234	5.94	O-107	.34	8.7	.186	4.7	18	3.2	.13	3.2	2.3	10	.13	3.4	0.024	0.6	4.50	SST	C	N
0.234	5.94	10616	.34	8.7	.174	4.4	35	6.1	.12	3.1	4.3	19	.17	4.2	0.030	0.8	5.50	SST	CG	N
0.234	5.94	G-4	.38	9.5	.208	5.3	.35	.06	.21	5.4	.07	.33	.16	4.1	0.013	0.3	11.5	SST	C	N
0.234	5.94	11450	.38	9.5	.208	5.3	1.0	.18	.30	7.5	.31	1.4	.08	2.0	0.013	0.3	5.00	MW	C	N
0.234	5.94	II-21	.38	9.5	.202	5.1	3.6	.64	.29	7.3	1.0	4.6	.09	2.2	0.016	0.4	4.50	MW	C	Z
0.234	5.94	A-68	.38	9.5	.194	4.9	4.1	.71	.24	6.0	.96	4.3	.14	3.6	0.020	0.5	7.00	SST	CG	N
0.234	5.94	B18-142	.38	9.5	.194	4.9	2.0	.34	.10	2.4	.19	.83	.28	7.1	0.020	0.5	14.0	MW	CG	GI
0.234	5.94	A13-19	.38	9.5	.188	4.8	13	2.2	.16	4.1	2.1	9.1	.12	2.9	0.023	0.6	5.00	SST	CG	N
0.234	5.94	A14-17	.38	9.5	.188	4.8	16	2.7	.20	5.0	3.1	14	.11	2.8	0.023	0.6	4.75	MW	CG	GI
0.234	5.94	S-1118	.38	9.5	.162	4.1	68	12	.10	2.6	6.9	31	.25	6.4	0.036	0.9	6.00	SST	C	N
0.234	5.94	B5-20	.38	9.5	.156	4.0	138	24	.07	1.7	9.3	42	.20	5.2	0.039	1.0	5.25	SPR	CG	N
0.234	5.94	B15-69	.38	9.5	.152	3.9	141	25	.08	1.9	11	48	.25	6.2	0.041	1.0	6.00	SPR	CG	Z
0.234	5.94	YY-48	.38	9.5	.148	3.8	175	31	.07	1.7	12	51	.24	6.0	0.043	1.1	5.50	SST	CG	N
0.234	5.94	M-132	.41	10.3	.190	4.8	10	1.8	.18	4.5	1.8	8.0	.13	3.4	0.022	0.6	5.00	SST	C	N
0.234	5.94	RR-61	.41	10.3	.188	4.8	11	1.9	.25	6.2	2.6	12	.16	4.1	0.023	0.6	6.00	MW	C	Z
0.234	5.94	II-93	.41	10.3	.178	4.5	15	2.6	.15	3.9	2.3	10	.25	6.4	0.028	0.7	8.00	SST	C	N
0.234	5.94	2708	.41	10.3	.170	4.3	37	6.4	.15	3.8	5.5	24	.26	6.5	0.032	0.8	7.00	MW	C	Z
0.234	5.94	GG-21	.41	10.3	.154	3.9	89	16	.11	2.7	9.4	42	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.234	5.94	B3-64	.42	10.7	.170	4.3	37	6.4	.17	4.2	6.1	27	.26	6.5	0.032	0.8	7.00	MW	C	GI
0.234	5.94	A12-36	.42	10.7	.164	4.2	48	8.3	.13	3.4	6.4	28	.28	7.1	0.035	0.9	7.00	SST	C	N
0.234	5.94	S-813	.44	11.1	.202	5.1	1.3	.23	.29	7.5	.39	1.7	.14	3.7	0.016	0.4	8.00	SST	C	N
0.234	5.94	3564	.44	11.1	.186	4.7	13	2.3	.27	6.9	3.5	15	.17	4.3	0.024	0.6	6.00	MW	C	Z
0.234	5.94	VV-57	.44	11.1	.184	4.7	15	2.7	.24	6.1	3.7	17	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.234	5.94	B1-3	.44	11.1	.182	4.6	18	3.2	.15	3.8	2.8	12	.14	3.6	0.026	0.7	5.50	SST	CG	N
0.234	5.94	NN-64	.44	11.1	.176	4.5	18	3.2	.19	4.9	3.5	15	.25	6.3	0.029	0.7	8.50	MW	CG	N
0.234	5.94	B14-44	.44	11.1	.174	4.4	23	4.0	.17	4.3	3.8	17	.27	6.9	0.030	0.8	8.00	MW	C	N
0.234	5.94	U-41	.44	11.1	.174	4.4	61	11	.07	1.8	4.3	19	.15	3.8	0.030	0.8	4.00	SST	C	N
0.234	5.94	B9-35	.44	11.1	.156	4.0	128	22	.07	1.9	9.3	42	.21	5.4	0.039	1.0	5.50	SPR	CG	N
0.234	5.94	B7-21	.44	11.1	.154	3.9	144	25	.07	1.8	10	45	.22	5.6	0.040	1.0	5.50	SPR	CG	N
0.234	5.94	Z-97	.44	11.1	.154	3.9	92	16	.10	2.6	9.4	42	.27	6.9	0.040	1.0	6.75	SST	CG	N
0.234	5.94	3891	.44	11.1	.144	3.7	175	31	.08	2.0	14	62	.32	8.0	0.045	1.1	7.00	SPR	CG	Z
0.234	5.94	CC-45	.44	11.1	.134	3.4	251	44	.05	1.3	13	56	.39	9.8	0.050	1.3	7.75	SPR	CG	N
0.234	5.94	3991	.44	11.1	.132	3.4	577	101	.03	.82	19	83	.29	7.4	0.051	1.3	4.75	SPR	C	Z
0.234	5.94	B2-1	.45	11.5	.172	4.4	45	7.9	.15	3.9	7.0	31	.20	5.1	0.031	0.8	5.50	MW	CL	N
0.234	5.94	12763	.45	11.5	.170	4.3	46	8.0	.17	4.3	7.7	34	.22	5.7	0.032	0.8	6.00	MW	C	N
0.234	5.94	B12-13	.47	11.9	.190	4.8	9.4	1.7	.29	7.3	2.7	12	.13	3.2	0.022	0.6	5.75	MW	CG	Z
0.234	5.94	12585	.47	11.9	.172	4.4	40	6.9	.18	4.5	7.0	31	.22	5.5	0.031	0.8	6.00	MW	C	N
0.234	5.94	12491	.47	11.9	.170	4.3	49	8.5	.11	2.9	5.5	25	.22	5.5	0.032	0.8	5.75	SPR	C	N
0.234	5.94	A12-29	.47	11.9	.210	5.3	.45	.08	.36	9.2	.16	.73	.11	2.7	0.012	0.3	8.00	MW	C	Z
0.234	5.94	A12-24	.47	11.9	.174	4.4	37	6.4	.17	4.4	6.3	28	.20	5.2	0.030	0.8	5.75	MW	C	N
0.234	5.94	B4-2	.50	12.7	.220	5.6	.03	.01	.41	10	.01	.05	.09	2.3	0.007	0.2	12.0	MW	C	N
0.234	5.94	NN-10	.50	12.7	.194	4.9	7.8	1.4	.26	6.6	2.0	9.1	.10	2.5	0.020	0.5	5.00	MW	CG	N
0.234	5.94	WW-48	.50	12.7	.192	4.9	6.3	1.1	.25	6.3	1.6	7.0	.15	3.7	0.021	0.5	6.00	SST	C	N
0.234	5.94	A13-18	.50	12.7	.190	4.8	7.8	1.4	.23	5.8	1.8	8.0	.13	3.4	0.022	0.6	6.00	SST	CG	N
0.234	5.94	PP-74	.50	12.7	.190	4.8	8.8	1.5	.31	7.8	2.7	12	.13	3.4	0.022	0.6	6.00	MW	C	N
0.234	5.94	Z-93	.50	12.7	.184	4.7	8.8	1.5	.28	7.0	2.4	11	.23	5.7	0.025	0.6	9.00	MW	CG	GI
0.234	5.94	JJ-3	.50	12.7	.182	4.6	7.9	1.4	.24	6.1	1.9	8.5	.26	6.6	0.026	0.7	10.0	SST	CG	N
0.234	5.94	JJ-94	.50	12.7	.182	4.6	8.1	1.4	.21	5.4	1.7	7.7	.29	7.3	0.026	0.7	10.0	SST	C	N
0.234	5.94	MM-73	.50	12.7	.182	4.6	12	2.0	.24	6.2	2.8	12	.20	5.0	0.026	0.7	7.50	SST	C	N
0.234	5.94	A13-28	.50	12.7	.180	4.6	19	3.3	.16	4.2	3.1	14	.16	4.1	0.027	0.7	6.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.234	5.94	B17-127	.50	12.7	.178	4.5	19	3.3	.27	6.9	5.2	23	.21	5.2	0.028	0.7	7.33	MW	CG	Z
0.234	5.94	K-9	.50	12.7	.176	4.5	20	3.4	.27	6.8	5.3	23	.23	5.9	0.029	0.7	8.00	MW	CG	N
0.234	5.94	JJ-58	.50	12.7	.174	4.4	22	3.8	.20	5.0	4.3	19	.26	6.5	0.030	0.8	7.50	SST	C	N
0.234	5.94	S-1692	.50	12.7	.170	4.3	32	5.6	.16	4.1	5.1	23	.26	6.5	0.032	0.8	7.00	SST	C	N
0.234	5.94	II-18	.50	12.7	.170	4.3	32	5.6	.22	5.6	7.0	31	.28	7.1	0.032	0.8	7.75	MW	C	N
0.234	5.94	S-3003	.50	12.7	.168	4.3	46	8.0	.12	3.1	5.6	25	.23	5.9	0.033	0.8	6.00	SST	C	N
0.234	5.94	A12-42	.50	12.7	.156	4.0	80	14	.11	2.8	8.7	39	.27	6.9	0.039	1.0	7.00	SST	CG	N
0.234	5.94	B-28	.50	12.7	.152	3.9	141	25	.08	1.9	11	48	.25	6.2	0.041	1.0	6.00	SPR	CG	GI
0.234	5.94	3518	.50	12.7	.150	3.8	253	44	.05	1.2	12	51	.19	4.8	0.042	1.1	4.50	SPR	CG	N
0.234	5.94	A13-13	.50	12.7	.150	3.8	112	20	.10	2.4	11	48	.29	7.5	0.042	1.1	7.00	SST	CG	N
0.234	5.94	Y-98	.50	12.7	.144	3.7	175	31	.08	2.0	14	62	.32	8.0	0.045	1.1	7.00	SPR	CG	Z
0.234	5.94	1505	.50	12.7	.140	3.6	268	47	.06	1.5	16	71	.28	7.2	0.047	1.2	6.00	HD	CG	Z
0.234	5.94	DD-39	.50	12.7	.134	3.4	481	84	.04	.93	18	78	.25	6.4	0.050	1.3	5.00	SPR	CG	Z
0.234	5.94	2963	.53	13.5	.212	5.4	.63	.11	.47	12	.29	1.3	.07	1.7	0.011	0.3	5.00	MW	C	GI
0.234	5.94	FF-71	.53	13.5	.206	5.2	.77	.13	.41	10	.31	1.4	.13	3.2	0.014	0.4	8.00	SST	C	N
0.234	5.94	A10-8	.53	13.5	.196	5.0	3.4	.60	.37	9.4	1.3	5.6	.16	4.1	0.019	0.5	7.50	MW	C	N
0.234	5.94	S-1461	.53	13.5	.192	4.9	2.6	.46	.29	7.4	.77	3.4	.24	6.1	0.021	0.5	11.5	SST	CG	N
0.234	5.94	11216	.53	13.5	.190	4.8	7.8	1.4	.23	5.8	1.8	8.0	.13	3.4	0.022	0.6	6.00	SST	CG	N
0.234	5.94	3529	.53	13.5	.164	4.2	68	12	.14	3.5	9.5	42	.21	5.3	0.035	0.9	6.00	MW	CG	Z
0.234	5.94	M-102	.53	13.5	.160	4.1	45	7.8	.17	4.3	7.5	33	.33	8.5	0.037	0.9	9.00	SST	CG	N
0.234	5.94	CC-65	.53	13.5	.154	3.9	64	11	.15	3.7	9.4	42	.36	9.1	0.040	1.0	9.00	SST	CG	N
0.234	5.94	HH-47	.56	14.3	.202	5.1	.61	.11	.31	7.8	.19	.83	.26	6.5	0.016	0.4	15.0	SST	C	N
0.234	5.94	10930	.56	14.3	.198	5.0	2.2	.39	.40	10	.89	3.9	.16	4.1	0.018	0.5	8.00	SST	C	N
0.234	5.94	LL-98	.56	14.3	.192	4.9	8.4	1.5	.19	4.8	1.6	7.0	.13	3.2	0.021	0.5	5.00	SST	C	N
0.234	5.94	A-85	.56	14.3	.188	4.8	7.1	1.2	.38	9.6	2.7	12	.18	4.7	0.023	0.6	8.00	MW	C	Z
0.234	5.94	B1-13	.56	14.3	.182	4.6	14	2.4	.21	5.2	2.8	12	.18	4.5	0.026	0.7	6.75	SST	CG	N
0.234	5.94	II-13	.56	14.3	.180	4.6	18	3.2	.26	6.5	4.7	21	.21	5.3	0.027	0.7	6.75	MW	C	N
0.234	5.94	A10-12	.56	14.3	.178	4.5	14	2.4	.32	8.2	4.5	20	.24	6.0	0.028	0.7	8.50	MW	CG	N
0.234	5.94	W-63	.56	14.3	.170	4.3	27	4.6	.19	4.9	5.1	23	.26	6.5	0.032	0.8	8.00	SST	CG	N
0.234	5.94	3216	.56	14.3	.166	4.2	40	7.0	.16	4.2	6.6	29	.27	6.9	0.034	0.9	8.00	SPR	CG	GI
0.234	5.94	S-832	.56	14.3	.166	4.2	35	6.1	.18	4.5	6.1	27	.27	6.9	0.034	0.9	8.00	SST	CG	N
0.234	5.94	S-929	.56	14.3	.164	4.2	60	10	.11	2.7	6.4	28	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.234	5.94	12031	.59	15.1	.208	5.3	.76	.13	.49	12	.37	1.7	.10	2.6	0.013	0.3	7.00	MW	C	N
0.234	5.94	JJ-67	.59	15.1	.190	4.8	7.4	1.3	.36	9.2	2.7	12	.17	4.3	0.022	0.6	6.75	MW	C	N
0.234	5.94	M-81	.59	15.1	.170	4.3	41	7.1	.14	3.4	5.5	25	.24	6.1	0.032	0.8	6.50	SPR	C	N
0.234	5.94	Z-19	.59	15.1	.156	4.0	52	9.1	.17	4.3	8.7	39	.37	9.4	0.039	1.0	9.50	SST	CG	N
0.234	5.94	W-96	.59	15.1	.126	3.2	304	53	.07	1.7	21	91	.43	11.0	0.054	1.4	8.00	SST	CG	N
0.234	5.94	B2-26	.59	15.1	.144	3.7	159	28	.09	2.2	14	62	.34	8.6	0.045	1.1	7.50	SPR	CG	N
0.234	5.94	CC-14	.63	15.9	.214	5.4	.11	.02	.50	13	.06	.24	.13	3.3	0.010	0.3	12.0	SST	C	N
0.234	5.94	II-95	.63	15.9	.194	4.9	2.1	.38	.38	9.5	.81	3.6	.25	6.4	0.020	0.5	11.5	SST	C	N
0.234	5.94	PP-2	.63	15.9	.194	4.9	3.0	.52	.45	11	1.3	5.9	.18	4.6	0.020	0.5	9.00	SST	CG	N
0.234	5.94	A9-14	.63	15.9	.190	4.8	6.3	1.1	.29	7.3	1.8	8.0	.15	3.9	0.022	0.6	7.00	SST	CG	N
0.234	5.94	YY-20	.63	15.9	.190	4.8	3.7	.65	.35	8.9	1.3	5.8	.28	7.0	0.022	0.6	11.5	MW	C	N
0.234	5.94	FF-1	.63	15.9	.180	4.6	13	2.3	.35	8.9	4.7	21	.26	6.5	0.027	0.7	8.50	MW	C	N
0.234	5.94	VV-62	.63	15.9	.174	4.4	20	3.4	.32	8.2	6.3	28	.27	6.9	0.030	0.8	9.00	MW	CG	Z
0.234	5.94	B7-24	.63	15.9	.174	4.4	18	3.2	.34	8.6	6.2	28	.29	7.2	0.030	0.8	9.50	MW	CG	N
0.234	5.94	J-85	.63	15.9	.166	4.2	30	5.3	.22	5.6	6.6	29	.34	8.6	0.034	0.9	10.0	SPR	CG	N
0.234	5.94	11315	.63	15.9	.166	4.2	23	4.0	.21	5.3	4.8	21	.42	10.6	0.034	0.9	11.3	SST	C	N
0.234	5.94	B-12	.63	15.9	.158	4.0	43	7.6	.19	4.8	8.1	36	.38	9.7	0.038	1.0	10.0	SST	CG	N
0.234	5.94	GG-4	.63	15.9	.154	3.9	63	11	.16	4.0	10	45	.40	10.2	0.040	1.0	10.0	SPR	CG	N
0.234	5.94	11260	.63	15.9	.150	3.8	126	22	.09	2.3	12	51	.34	8.5	0.042	1.1	7.00	SPR	C	Z
0.234	5.94	DD-10	.66	16.7	.194	4.9	2.9	.51	.44	11	1.3	5.7	.22	5.6	0.020	0.5	10.0	MW	C	N
0.234	5.94	W-77	.66	16.7	.182	4.6	9.2	1.6	.30	7.7	2.8	12	.26	6.6	0.026	0.7	9.00	SST	C	N
0.234	5.94	I-92	.66	16.7	.174	4.4	20	3.4	.32	8.2	6.3	28	.27	6.9	0.030	0.8	9.00	MW	CG	N
0.234	5.94	B5-27	.66	16.7	.168	4.3	30	5.3	.20	5.1	6.0	27	.30	7.5	0.033	0.8	9.00	SPR	CG	N
0.234	5.94	M-32	.66	16.7	.168	4.3	21	3.6	.27	6.9	5.6	25	.36	9.2	0.033	0.8	11.0	SST	CG	N
0.234	5.94	VV-2	.69	17.4	.194	4.9	1.7	.30	.39	9.8	.66	2.9	.30	7.6	0.020	0.5	14.0	SST	C	N
0.234	5.94	YY-63	.69	17.4	.188	4.8	4.3	.75	.39	9.9	1.7	7.4	.30	7.6	0.023	0.6	12.0	MW	C	Z
0.234	5.94	II-87	.69	17.4	.186	4.7	4.3	.75	.36	9.2	1.5	6.9	.32	8.2	0.024	0.6	12.5	SST	C	N
0.234	5.94	B-65	.69	17.4	.182	4.6	11	1.9	.26	6.7	2.8	12	.23	5.9	0.026	0.7	8.00	SST	C	N
0.234	5.94	A14-14	.69	17.4	.180	4.6	14	2.5	.32	8.3	4.7	21	.22	5.5	0.027	0.7	8.00	MW	CG	GI
0.234	5.94	S-3134	.69	17.4	.174	4.4	18	3.2	.23	5.9	4.3	19	.26	6.5	0.030	0.8	8.50	SST	CG	N
0.234	5.94	B2-24	.69	17.4	.158	4.0	50	8.7	.24	6.1	12	53	.42	10.6	0.038	1.0	10.0	MW	C	N
0.234	5.94	3632	.69	17.4	.154	3.9	63	11	.16	4.0	10	45	.44	11.2	0.040	1.0	10.0	SPR	C	Z
0.234	5.94	A14-53	.69	17.4	.150	3.8	77	14	.14	3.6	11	48	.39	9.9	0.042	1.1	9.25	SST	CG	N
0.234	5.94	Y-93	.69	17.4	.146	3.7	112	20	.12	3.0	13	59	.40	10.1	0.044	1.1	9.00	SPR	CG	Z
0.234	5.94	DD-75	.69	17.4	.134	3.4	288	51	.08	2.2	24	109	.35	8.9	0.050	1.3	7.00	MW	CG	N
0.234	5.94	10011	.69	17.5	.200	5.1	1.7	.29	.52	13	.87	3.9	.17	4.3	0.017	0.4	9.00	MW	C	Z
0.234	5.94	11163	.72	18.2	.214	5.4	.20	.03	.62	16	.12	.55	.10	2.4	0.010	0.3	8.50	MW	C	Z
0.234	5.94	B11-31	.72	18.2	.182	4.6	13	2.2	.33	8.4	4.2	19	.23	5.8	0.026	0.7	7.75	MW	C	Z
0.234	5.94	HH-15	.72	18.2	.174	4.4	14	2.4	.36	9.1	4.9	22	.36	9.1	0.030	0.8	12.0	MW	CG	BO
0.234	5.94	NN-90	.72	18.2	.168	4.3	20	3.5	.30	7.7	6.0	27	.41	10.5	0.033	0.8	12.5	SPR	CG	N
0.234	5.94	RR-22	.72	18.2	.168	4.3	21	3.6	.27	6.9	5.6	25	.40	10.1	0.033	0.8	11.0	SST	C	N
0.234	5.94	HH-90	.75	19.1	.204	5.2	.46	.08	.48	12	.22	.99	.27	6.9	0.015	0.4	17.0	MW	C	N
0.234	5.94	S-936	.75	19.1	.202	5.1	.99	.17	.57	15	.57	2.5	.18	4.5	0.016	0.4	10.0	SST	C	N
0.234	5.94	A-57	.75	19.1	.198	5.0	1.9	.33	.55	14	1.0	4.6	.20	5.0	0.018	0.5	10.0	MW	C	Z
0.234	5.94	0-40	.75	19.1	.192	4.9	2.5	.44	.44	11	1.1	4.9	.31	7.8	0.021	0.5	13.6	MW	C	Z
0.234	5.94	A14-19	.75	19.1	.190	4.8	4.9	.87	.36	9.2	1.8	8.0	.18	4.7	0.022	0.6	8.33	SST	CG	N
0.234	5.94	L-98	.75	19.1	.190	4.8	3.5	.62	.46	12	1.6	7.3	.29	7.3	0.022	0.6	12.0	MW	C	BO
0.234	5.94	A13-5	.75	19.1	.188	4.8	6.3	1.1	.32	8.2	2.1	9.1	.18	4.7	0.023	0.6	8.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.234	5.94	W-33	.75	19.1	.186	4.7	5.0	.87	.46	12	2.3	10	.29	7.3	0.024	0.6	11.0	SST	C	N
0.234	5.94	10158	.75	19.1	.184	4.7	6.2	1.1	.43	11	2.6	12	.33	8.3	0.025	0.6	12.0	MW	C	Z
0.234	5.94	A11-38	.75	19.1	.180	4.6	11	1.9	.29	7.3	3.1	14	.24	6.2	0.027	0.7	9.00	SST	CG	N
0.234	5.94	EE-25	.75	19.1	.176	4.5	11	2.0	.34	8.6	3.8	17	.32	8.1	0.029	0.7	11.0	SST	CG	N
0.234	5.94	O-112	.75	19.1	.172	4.4	20	3.5	.35	8.9	7.0	31	.34	8.7	0.031	0.8	10.0	MW	C	GI
0.234	5.94	B5-15	.75	19.1	.156	4.0	53	9.2	.18	4.5	9.3	42	.41	10.4	0.039	1.0	10.5	SPR	CG	N
0.234	5.94	2533	.78	19.8	.174	4.4	15	2.7	.42	11	6.3	28	.36	9.1	0.030	0.8	11.0	MW	C	Z
0.234	5.94	3549	.81	20.6	.192	4.9	2.4	.42	.50	13	1.2	5.3	.32	8.0	0.021	0.5	14.0	MW	C	Z
0.234	5.94	3661	.81	20.6	.190	4.8	3.5	.62	.53	13	1.9	8.3	.29	7.3	0.022	0.6	12.0	MW	C	Z
0.234	5.94	OO-85	.81	20.6	.190	4.8	2.8	.50	.47	12	1.3	5.9	.34	8.7	0.022	0.6	14.5	MW	C	BO
0.234	5.94	S-1339	.81	20.6	.190	4.8	3.4	.60	.53	13	1.8	8.0	.24	6.1	0.022	0.6	11.0	SST	CG	N
0.234	5.94	B5-44	.81	20.6	.190	4.8	5.4	.95	.50	13	2.7	12	.19	4.7	0.022	0.6	8.50	MW	CG	Z
0.234	5.94	V-44	.81	20.6	.186	4.7	4.1	.72	.46	12	1.9	8.5	.35	8.8	0.024	0.6	14.5	MW	CG	N
0.234	5.94	OO-74	.81	20.6	.178	4.5	13	2.2	.41	10	5.2	23	.31	7.8	0.028	0.7	10.0	MW	C	N
0.234	5.94	S-1177	.81	20.6	.174	4.4	11	2.0	.37	9.5	4.3	19	.41	10.3	0.030	0.8	12.5	SST	C	N
0.234	5.94	L-67	.81	20.6	.164	4.2	25	4.4	.27	7.0	6.8	30	.46	11.6	0.035	0.9	13.0	SPR	CG	Z
0.234	5.94	A9-7	.81	20.6	.162	4.1	36	6.3	.21	5.2	7.4	33	.38	9.8	0.036	0.9	10.7	SPR	CG	N
0.234	5.94	3000	.81	20.6	.154	3.9	59	10	.17	4.3	10	45	.42	10.7	0.040	1.0	10.5	SPR	CG	Z
0.234	5.94	B5-19	.81	20.6	.152	3.9	59	10	.18	4.6	11	48	.47	12.0	0.041	1.0	11.5	SPR	CG	N
0.234	5.94	LL-27	.84	21.4	.204	5.2	.80	.14	.69	17	.55	2.4	.16	4.0	0.015	0.4	9.50	SST	C	N
0.234	5.94	H-72	.84	21.4	.182	4.6	15	2.7	.27	6.9	4.2	19	.20	5.1	0.026	0.7	6.75	MW	C	N
0.234	5.94	JJ-79	.84	21.4	.164	4.2	20	3.5	.32	8.0	6.4	28	.48	12.2	0.035	0.9	13.8	SST	CG	N
0.234	5.94	GG-26	.84	21.4	.154	3.9	34	6.0	.24	6.2	8.4	37	.60	15.2	0.040	1.0	15.0	SST	CG	N
0.234	5.94	JJ-36	.84	21.4	.150	3.8	66	12	.16	4.2	11	48	.48	12.3	0.042	1.1	10.5	SST	C	N
0.234	5.94	4200	.88	22.2	.194	4.9	2.0	.36	.59	15	1.2	5.3	.29	7.4	0.020	0.5	13.5	MW	C	Z
0.234	5.94	B14-57	.88	22.2	.192	4.9	3.4	.60	.65	17	2.2	9.9	.22	5.6	0.021	0.5	10.5	MW	CG	Z
0.234	5.94	W-16	.88	22.2	.184	4.7	5.9	1.0	.42	11	2.5	11	.30	7.6	0.025	0.6	11.0	SST	C	N
0.234	5.94	G-47	.88	22.2	.180	4.6	13	2.3	.35	8.9	4.7	21	.26	6.5	0.027	0.7	8.50	MW	C	N
0.234	5.94	Q-21	.88	22.2	.170	4.3	18	3.2	.30	7.7	5.5	25	.38	9.8	0.032	0.8	12.0	SPR	CG	N
0.234	5.94	DD-17	.88	22.2	.170	4.3	12	2.1	.36	9.2	4.4	20	.51	13.0	0.032	0.8	15.0	SST	C	N
0.234	5.94	DD-52	.88	22.2	.154	3.9	63	11	.22	5.6	14	62	.40	10.2	0.040	1.0	10.0	MW	CG	N
0.234	5.94	LL-71	.88	22.2	.154	3.9	92	16	.11	2.8	10	45	.34	8.6	0.040	1.0	7.50	SPR	C	N
0.234	5.94	B5-62	.91	23.0	.210	5.3	.34	.06	.77	20	.26	1.2	.13	3.4	0.012	0.3	10.0	MW	C	N
0.234	5.94	FF-83	.91	23.0	.190	4.8	3.8	.67	.47	12	1.8	8.0	.24	6.1	0.022	0.6	10.0	SST	C	N
0.234	5.94	B10-1	.91	23.0	.166	4.2	25	4.3	.27	6.8	6.6	29	.40	10.1	0.034	0.9	11.8	SPR	CG	Z
0.234	5.94	GG-30	.94	23.8	.198	5.0	1.0	.17	.61	16	.61	2.7	.32	8.2	0.018	0.5	17.0	MW	C	N
0.234	5.94	S-3155	.94	23.8	.194	4.9	1.1	.20	.52	13	.59	2.6	.42	10.7	0.020	0.5	20.0	SST	C	N
0.234	5.94	HH-20	.97	24.6	.170	4.3	14	2.4	.38	9.6	5.1	23	.45	11.4	0.032	0.8	14.0	SST	CG	N
0.234	5.94	II-82	.97	24.6	.166	4.2	16	2.8	.38	9.7	6.1	27	.51	13.0	0.034	0.9	15.0	SST	CG	N
0.234	5.94	O-100	.97	24.6	.160	4.1	35	6.2	.23	5.8	8.0	36	.44	11.3	0.037	0.9	12.0	SPR	CG	Z
0.234	5.94	H-6	.97	24.6	.152	3.9	56	9.8	.18	4.6	10	45	.45	11.5	0.041	1.0	11.0	SST	CG	N
0.234	5.94	3562	1.00	25.4	.202	5.1	.83	.14	.78	20	.64	2.9	.22	5.7	0.016	0.4	13.0	MW	C	GI
0.234	5.94	W-90	1.00	25.4	.202	5.1	.88	.15	.80	20	.70	3.1	.19	4.9	0.016	0.4	11.0	SST	C	N
0.234	5.94	GG-87	1.00	25.4	.194	4.9	1.5	.26	.66	17	.96	4.3	.34	8.6	0.020	0.5	16.0	SST	C	N
0.234	5.94	1565	1.00	25.4	.192	4.9	3.2	.56	.73	19	2.4	10	.25	6.4	0.021	0.5	11.0	MW	C	Z
0.234	5.94	2699	1.00	25.4	.188	4.8	3.9	.68	.68	17	2.6	12	.32	8.2	0.023	0.6	13.0	MW	C	Z
0.234	5.94	2939	1.00	25.4	.186	4.7	4.7	.82	.66	17	3.1	14	.34	8.5	0.024	0.6	13.0	MW	C	Z
0.234	5.94	K-88	1.00	25.4	.182	4.6	5.8	1.0	.48	12	2.8	12	.36	9.2	0.026	0.7	13.0	SST	C	N
0.234	5.94	N-131	1.00	25.4	.176	4.5	7.1	1.2	.52	13	3.7	16	.48	12.2	0.029	0.7	16.5	SST	CG	N
0.234	5.94	HH-1	1.00	25.4	.174	4.4	8.6	1.5	.46	12	3.9	18	.54	13.7	0.030	0.8	18.0	MW	CG	GI
0.234	5.94	10438	1.00	25.4	.168	4.3	17	3.1	.34	8.8	6.0	27	.50	12.6	0.033	0.8	14.0	SPR	C	N
0.234	5.94	M-99	1.00	25.4	.164	4.2	23	4.0	.30	7.6	6.8	30	.49	12.4	0.035	0.9	14.0	SPR	CG	BO
0.234	5.94	S-3126	1.00	25.4	.164	4.2	17	3.0	.37	9.4	6.4	28	.55	14.0	0.035	0.9	15.8	SST	CG	N
0.234	5.94	3783	1.00	25.4	.162	4.1	26	4.5	.29	7.3	7.4	33	.54	13.7	0.036	0.9	14.0	SPR	C	Z
0.234	5.94	HH-69	1.00	25.4	.158	4.0	29	5.1	.28	7.1	8.1	36	.53	13.5	0.038	1.0	14.0	SST	CG	N
0.234	5.94	BB-82	1.00	25.4	.154	3.9	37	6.5	.25	6.4	9.4	42	.56	14.2	0.040	1.0	14.0	SST	CG	N
0.234	5.94	I-10	1.03	26.2	.204	5.2	.56	.10	.82	21	.46	2.0	.21	5.3	0.015	0.4	13.0	SST	C	N
0.234	5.94	3526	1.03	26.2	.190	4.8	3.5	.62	.75	19	2.6	12	.29	7.3	0.022	0.6	12.0	MW	C	Z
0.234	5.94	1926	1.06	27.0	.194	4.9	2.6	.46	.78	20	2.0	9.1	.24	6.1	0.020	0.5	11.0	MW	C	Z
0.234	5.94	EE-7	1.06	27.0	.158	4.0	33	5.8	.25	6.3	8.1	36	.48	12.1	0.038	1.0	12.5	SST	CG	N
0.234	5.94	3551	1.09	27.8	.180	4.6	5.7	1.0	.64	16	3.6	16	.46	11.7	0.027	0.7	17.0	MW	CG	Z
0.234	5.94	10198	1.13	28.6	.208	5.3	.27	.05	.90	23	.25	1.1	.22	5.6	0.013	0.3	16.0	MW	C	N
0.234	5.94	B-90	1.13	28.6	.182	4.6	6.6	1.2	.63	16	4.2	19	.36	9.2	0.026	0.7	13.0	MW	C	N
0.234	5.94	A-34	1.13	28.6	.160	4.1	25	4.4	.32	8.1	8.0	36	.63	16.0	0.037	0.9	16.0	SPR	C	GI
0.234	5.94	3848	1.13	28.6	.150	3.8	53	9.2	.22	5.6	12	51	.63	16.0	0.042	1.1	14.0	SPR	C	Z
0.234	5.94	L-22	1.19	30.2	.184	4.7	4.0	.71	.62	16	2.5	11	.39	9.8	0.025	0.6	15.5	SST	CG	N
0.234	5.94	G-69	1.19	30.2	.178	4.5	6.7	1.2	.68	17	4.6	21	.50	12.8	0.028	0.7	17.0	MW	C	GI
0.234	5.94	K-10	1.19	30.2	.176	4.5	6.6	1.2	.58	15	3.8	17	.54	13.6	0.029	0.7	17.5	SST	C	N
0.234	5.94	S-796	1.19	30.2	.174	4.4	7.0	1.2	.61	15	4.3	19	.57	14.5	0.030	0.8	19.0	SST	CG	N
0.234	5.94	U-33	1.19	30.2	.174	4.4	7.6	1.3	.59	15	4.5	20	.60	15.2	0.030	0.8	20.0	MW	CG	GI
0.234	5.94	W-58	1.19	30.2	.154	3.9	34	5.9	.28	7.1	9.4	42	.60	15.2	0.040	1.0	15.0	SST	CG	N
0.234	5.94	OO-61	1.22	31.0	.174	4.4	7.6	1.3	.59	15	4.5	20	.63	16.0	0.030	0.8	20.0	MW	C	Z
0.234	5.94	B3-65	1.23	31.3	.174	4.4	9.1	1.6	.69	18	6.3	28	.51	13.0	0.030	0.8	17.0	MW	CG	N
0.234	5.94	A11-27	1.25	31.8	.210	5.3	.15	.03	1.0	25	.15	.67	.25	6.4	0.012	0.3	20.0	MW	C	BO
0.234	5.94	S-3123	1.25	31.8	.188	4.8	4.7	.82	.44	11	2.1	9.1	.25	6.4	0.023	0.6	10.0	SST	C	N
0.234	5.94	S-213	1.25	31.8	.186	4.7	2.9	.51	.80	20	2.3	10	.44	11.3	0.024	0.6	17.5	SST	C	N
0.234	5.94	B1-41	1.25	31.8	.182	4.6	4.8	.84	.58	15	2.8	12	.43	10.9	0.026	0.7	15.5	SST	C	N
0.234	5.94	S-212	1.25	31.8	.182	4.6	5.3	.93	.53	13	2.8	12	.39	9.9	0.026	0.7	14.0	SST	C	N
0.234	5.94	CC-81	1.25	31.8	.164	4.2	15	2.6	.43	11	6.4	28	.67	16.9	0.035	0.9	18.0	SST	C	N
0.234	5.94	Q-91	1.25	31.8	.148	3.8	50	8.8	.24	6.2	12	55	.69	17.5	0.043	1.1	16.0	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.234	5.94	S-88	1.28	32.5	.186	4.7	4.1	.71	.57	15	2.3	10	.34	8.5	0.024	0.6	13.0	SST	C	N
0.234	5.94	B9-41	1.31	33.3	.192	4.9	3.0	.53	.78	20	2.4	10	.24	6.1	0.021	0.5	11.5	MW	CG	Z
0.234	5.94	W-6	1.31	33.3	.176	4.5	5.4	.95	.67	17	3.6	16	.64	16.2	0.029	0.7	21.0	SST	C	N
0.234	5.94	B3-43	1.33	33.7	.180	4.6	5.1	.89	.79	20	4.0	18	.54	13.7	0.027	0.7	19.0	MW	C	BO
0.234	5.94	DD-46	1.44	36.5	.194	4.9	1.2	.20	1.0	26	1.2	5.2	.42	10.7	0.020	0.5	20.0	SST	C	N
0.234	5.94	S-1540	1.50	38.1	.206	5.2	.50	.09	.99	25	.50	2.2	.17	4.3	0.014	0.4	11.0	SST	C	N
0.234	5.94	QQ-47	1.50	38.1	.192	4.9	1.3	.23	1.0	26	1.4	6.1	.46	11.7	0.021	0.5	21.0	SST	C	N
0.234	5.94	S-224	1.50	38.1	.186	4.7	2.8	.50	.82	21	2.3	10	.45	11.4	0.024	0.6	17.8	SST	C	N
0.234	5.94	B5-26	1.50	38.1	.160	4.1	20	3.5	.40	10	8.0	36	.73	18.6	0.037	0.9	19.8	SPR	CG	N
0.234	5.94	CC-3	1.50	38.1	.154	3.9	30	5.2	.34	8.6	10	45	.80	20.3	0.040	1.0	19.0	SPR	C	N
0.234	5.94	L-51	1.69	42.8	.206	5.2	.13	.02	1.1	27	.14	.60	.62	15.6	0.014	0.4	43.0	MW	C	N
0.234	5.94	DD-95	1.81	46.0	.188	4.8	2.1	.36	.99	25	2.1	9.1	.48	12.3	0.023	0.6	20.0	SST	C	N
0.234	5.94	TT-68	1.88	47.6	.194	4.9	.97	.17	1.4	35	1.4	6.0	.48	12.2	0.020	0.5	23.0	SST	C	N
0.234	5.94	2804	2.00	50.8	.164	4.2	11	2.0	.83	21	9.5	42	.91	23.1	0.035	0.9	26.0	MW	CG	Z
0.234	5.94	3976	2.22	56.4	.132	3.4	68	12	.28	7.0	19	83	1.35	34.3	0.051	1.3	25.5	SPR	C	Z
0.234	5.94	O-51	2.25	57.2	.204	5.2	.29	.05	1.8	47	.53	2.4	.41	10.3	0.015	0.4	26.0	MW	C	N
0.234	5.94	10431	2.25	57.2	.172	4.4	7.2	1.3	.97	25	7.0	31	.78	19.7	0.031	0.8	24.0	MW	C	GI
0.234	5.94	3680	2.44	61.9	.182	4.6	4.6	.81	.90	23	4.2	19	.49	12.4	0.026	0.7	17.8	MW	C	Z
0.234	5.94	B4-21	2.50	63.5	.174	4.4	5.0	.88	1.3	32	6.3	28	.91	23.1	0.030	0.8	29.3	MW	C	N
0.234	5.94	2653	2.53	64.3	.164	4.2	14	2.5	.49	12	6.8	30	.75	19.1	0.035	0.9	21.5	SPR	CG	Z
0.234	5.94	B12-68	2.56	65.1	.184	4.7	2.4	.41	1.6	40	3.7	17	.73	18.4	0.025	0.6	28.0	MW	C	Z
0.234	5.94	O-42	2.75	69.9	.150	3.8	15	2.7	.71	18	11	48	1.60	40.5	0.042	1.1	38.0	SST	CG	N
0.234	5.94	11306	3.25	82.6	.184	4.7	1.1	.19	2.0	50	2.2	9.7	1.30	33.0	0.025	0.6	51.0	SST	C	N
0.234	5.94	B2-68	3.33	84.5	.158	4.0	8.9	1.6	.97	25	8.7	39	1.81	45.8	0.038	1.0	46.5	SPR	CL	N
0.234	5.94	3636	4.50	114.3	.162	4.1	6.1	1.1	1.7	43	10	46	1.94	49.4	0.036	0.9	53.0	MW	C	Z
0.234	5.94	12738	7.25	184.2	.156	4.0	9.3	1.6	1.0	25	9.3	42	1.99	50.5	0.039	1.0	50.0	SPR	C	N
0.240	6.10	70520	.25	6.4	.208	5.3	6.2	1.1	.17	4.2	1.0	4.6	.05	1.4	0.016	0.4	3.38	MW	CG	N
0.240	6.10	70520S	.25	6.4	.208	5.3	5.3	.92	.13	3.3	.68	3.0	.05	1.4	0.016	0.4	3.38	SST	CG	N
0.240	6.10	70536	.25	6.4	.204	5.2	9.5	1.7	.15	3.9	1.5	6.5	.06	1.6	0.018	0.5	3.50	MW	CG	N
0.240	6.10	70536S	.25	6.4	.204	5.2	8.0	1.4	.12	3.1	.97	4.3	.06	1.6	0.018	0.5	3.50	SST	CG	N
0.240	6.10	70553	.25	6.4	.200	5.1	13	2.2	.16	4.0	2.0	8.9	.08	1.9	0.020	0.5	3.75	MW	CG	N
0.240	6.10	70553S	.25	6.4	.200	5.1	11	1.9	.12	3.2	1.3	5.9	.08	1.9	0.020	0.5	3.75	SST	CG	N
0.240	6.10	70577	.25	6.4	.196	5.0	19	3.3	.14	3.6	2.6	12	.08	2.1	0.022	0.6	3.75	MW	CG	N
0.240	6.10	70577S	.25	6.4	.196	5.0	16	2.8	.11	2.8	1.8	7.8	.08	2.1	0.022	0.6	3.75	SST	CG	N
0.240	6.10	70521	.31	7.9	.208	5.3	4.8	.84	.21	5.4	1.0	4.6	.06	1.5	0.016	0.4	3.75	MW	CG	N
0.240	6.10	70521S	.31	7.9	.208	5.3	4.1	.71	.17	4.3	.68	3.0	.06	1.5	0.016	0.4	3.75	SST	CG	N
0.240	6.10	70537	.31	7.9	.204	5.2	7.4	1.3	.20	5.0	1.5	6.5	.07	1.8	0.018	0.5	3.88	MW	CG	N
0.240	6.10	70537S	.31	7.9	.204	5.2	6.2	1.1	.16	3.9	.97	4.3	.07	1.8	0.018	0.5	3.88	SST	CG	N
0.240	6.10	70554	.31	7.9	.200	5.1	9.8	1.7	.20	5.2	2.0	8.9	.09	2.2	0.020	0.5	4.25	MW	CG	N
0.240	6.10	70554S	.31	7.9	.200	5.1	8.3	1.5	.16	4.0	1.3	5.9	.09	2.2	0.020	0.5	4.25	SST	CG	N
0.240	6.10	70578	.31	7.9	.196	5.0	15	2.6	.18	4.6	2.6	12	.09	2.4	0.022	0.6	4.25	MW	CG	N
0.240	6.10	70578S	.31	7.9	.196	5.0	12	2.2	.14	3.6	1.8	7.8	.09	2.4	0.022	0.6	4.25	SST	CG	N
0.240	6.10	70620	.31	7.9	.188	4.8	28	4.9	.14	3.7	4.1	18	.11	2.9	0.026	0.7	4.38	MW	CG	N
0.240	6.10	70620S	.31	7.9	.188	4.8	24	4.2	.11	2.9	2.7	12	.11	2.9	0.026	0.7	4.38	SST	CG	N
0.240	6.10	70642	.31	7.9	.182	4.6	40	7.0	.14	3.6	5.6	25	.14	3.5	0.029	0.7	4.75	MW	CG	N
0.240	6.10	70642S	.31	7.9	.182	4.6	34	6.0	.11	2.8	3.8	17	.14	3.5	0.029	0.7	4.75	SST	CG	N
0.240	6.10	70660	.31	7.9	.176	4.5	63	11	.12	3.0	7.5	33	.15	3.8	0.032	0.8	4.63	MW	CG	N
0.240	6.10	70660S	.31	7.9	.176	4.5	53	9.4	.09	2.4	5.0	22	.15	3.8	0.032	0.8	4.63	SST	CG	N
0.240	6.10	70679	.31	7.9	.170	4.3	88	15	.10	2.7	9.2	41	.17	4.3	0.035	0.9	4.88	MW	CG	N
0.240	6.10	70679S	.31	7.9	.170	4.3	75	13	.08	2.1	6.3	28	.17	4.3	0.035	0.9	4.88	SST	CG	N
0.240	6.10	70700	.31	7.9	.164	4.2	127	22	.09	2.3	12	52	.19	4.7	0.038	1.0	4.88	MW	CG	N
0.240	6.10	70700S	.31	7.9	.164	4.2	108	19	.07	1.9	7.9	35	.19	4.7	0.038	1.0	4.88	SST	CG	N
0.240	6.10	70720	.31	7.9	.160	4.1	155	27	.09	2.2	14	60	.20	5.1	0.040	1.0	5.00	MW	CG	N
0.240	6.10	70720S	.31	7.9	.160	4.1	132	23	.07	1.8	9.2	41	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.240	6.10	12732	.38	9.5	.204	5.2	8.7	1.5	.11	2.8	.97	4.3	.06	1.5	0.018	0.5	3.38	SST	CG	N
0.240	6.10	70522	.38	9.7	.208	5.3	3.9	.68	.26	6.7	1.0	4.6	.07	1.7	0.016	0.4	4.13	MW	CG	N
0.240	6.10	70522S	.38	9.7	.208	5.3	3.3	.58	.21	5.2	.68	3.0	.07	1.7	0.016	0.4	4.13	SST	CG	N
0.240	6.10	70538	.38	9.7	.204	5.2	5.9	1.0	.25	6.3	1.5	6.5	.08	2.0	0.018	0.5	4.38	MW	CG	N
0.240	6.10	70538S	.38	9.7	.204	5.2	5.0	.88	.19	4.9	.97	4.3	.08	2.0	0.018	0.5	4.38	SST	CG	N
0.240	6.10	70555	.38	9.7	.200	5.1	7.7	1.4	.26	6.6	2.0	8.9	.10	2.4	0.020	0.5	4.75	MW	CG	N
0.240	6.10	70555S	.38	9.7	.200	5.1	6.6	1.1	.20	5.1	1.3	5.9	.10	2.4	0.020	0.5	4.75	SST	CG	N
0.240	6.10	70579	.38	9.7	.196	5.0	12	2.1	.22	5.5	2.6	12	.10	2.6	0.022	0.6	4.63	MW	CG	N
0.240	6.10	70579S	.38	9.7	.196	5.0	10	1.8	.17	4.3	1.8	7.8	.10	2.6	0.022	0.6	4.63	SST	CG	N
0.240	6.10	70600	.38	9.7	.192	4.9	17	2.9	.21	5.2	3.4	15	.12	3.0	0.024	0.6	4.88	MW	CG	N
0.240	6.10	70600S	.38	9.7	.192	4.9	14	2.5	.16	4.1	2.3	10	.12	3.0	0.024	0.6	4.88	SST	CG	N
0.240	6.10	70621	.38	9.7	.188	4.8	24	4.1	.17	4.4	4.1	18	.13	3.2	0.026	0.7	4.88	MW	CG	N
0.240	6.10	70621S	.38	9.7	.188	4.8	20	3.5	.14	3.4	2.7	12	.13	3.2	0.026	0.7	4.88	SST	CG	N
0.240	6.10	70643	.38	9.7	.182	4.6	33	5.7	.17	4.4	5.6	25	.15	3.9	0.029	0.7	5.25	MW	CG	N
0.240	6.10	70643S	.38	9.7	.182	4.6	28	4.9	.14	3.4	3.8	17	.15	3.9	0.029	0.7	5.25	SST	CG	N
0.240	6.10	70661	.38	9.7	.176	4.5	52	9.1	.14	3.7	7.5	33	.17	4.3	0.032	0.8	5.25	MW	CG	N
0.240	6.10	70661S	.38	9.7	.176	4.5	44	7.7	.11	2.9	5.0	22	.17	4.3	0.032	0.8	5.25	SST	CG	N
0.240	6.10	70680	.38	9.7	.170	4.3	70	12	.13	3.3	9.2	41	.19	4.9	0.035	0.9	5.50	MW	CG	N
0.240	6.10	70680S	.38	9.7	.170	4.3	60	10	.10	2.7	6.3	28	.19	4.9	0.035	0.9	5.50	SST	CG	N
0.240	6.10	70701	.38	9.7	.164	4.2	101	18	.12	2.9	12	52	.21	5.4	0.038	1.0	5.63	MW	CG	N
0.240	6.10	70701S	.38	9.7	.164	4.2	86	15	.09	2.3	7.9	35	.21	5.4	0.038	1.0	5.63	SST	CG	N
0.240	6.10	70721	.38	9.7	.160	4.1	121	21	.11	2.9	14	60	.23	5.8	0.040	1.0	5.75	MW	CG	N
0.240	6.10	70721S	.38	9.7	.160	4.1	103	18	.09	2.3	9.2	41	.23	5.8	0.040	1.0	5.75	SST	CG	N
0.240	6.10	70742	.38	9.7	.156	4.0	151	26	.10	2.6	16	70	.25	6.3	0.042	1.1	5.88	MW	CG	N
0.240	6.10	70742S	.38	9.7	.156	4.0	128	22	.08	2.1	11	47	.25	6.3	0.042	1.1	5.88	SST	CG	N
0.240	6.10	70761	.38	9.7	.150	3.8	215	38	.09	2.2	19	85	.26	6.6	0.045	1.1	5.75	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.240	6.10	70761S	.38	9.7	.150	3.8	183	32	.07	1.8	13	57	.26	6.6	0.045	1.1	5.75	SST	CG	N
0.240	6.10	70523	.44	11.2	.208	5.3	3.3	.58	.31	7.9	1.0	4.6	.07	1.8	0.016	0.4	4.50	MW	CG	N
0.240	6.10	70523S	.44	11.2	.208	5.3	2.8	.49	.24	6.2	.68	3.0	.07	1.8	0.016	0.4	4.50	SST	CG	N
0.240	6.10	70539	.44	11.2	.204	5.2	5.0	.88	.29	7.4	1.5	6.5	.09	2.2	0.018	0.5	4.75	MW	CG	N
0.240	6.10	70539S	.44	11.2	.204	5.2	4.3	.74	.23	5.8	.97	4.3	.09	2.2	0.018	0.5	4.75	SST	CG	N
0.240	6.10	70556	.44	11.2	.200	5.1	6.5	1.1	.31	7.8	2.0	8.9	.11	2.7	0.020	0.5	5.38	MW	CG	N
0.240	6.10	70556S	.44	11.2	.200	5.1	5.5	.97	.24	6.1	1.3	5.9	.11	2.7	0.020	0.5	5.38	SST	CG	N
0.240	6.10	70580	.44	11.2	.196	5.0	9.9	1.7	.27	6.8	2.6	12	.12	2.9	0.022	0.6	5.25	MW	CG	N
0.240	6.10	70580S	.44	11.2	.196	5.0	8.4	1.5	.21	5.3	1.8	7.8	.12	2.9	0.022	0.6	5.25	SST	CG	N
0.240	6.10	70601	.44	11.2	.192	4.9	14	2.5	.24	6.2	3.4	15	.13	3.3	0.024	0.6	5.38	MW	CG	N
0.240	6.10	70601S	.44	11.2	.192	4.9	12	2.1	.19	4.8	2.3	10	.13	3.3	0.024	0.6	5.38	SST	CG	N
0.240	6.10	70622	.44	11.2	.188	4.8	20	3.5	.20	5.2	4.1	18	.14	3.5	0.026	0.7	5.38	MW	CG	N
0.240	6.10	70622S	.44	11.2	.188	4.8	17	3.0	.16	4.1	2.7	12	.14	3.5	0.026	0.7	5.38	SST	CG	N
0.240	6.10	70644	.44	11.2	.182	4.6	27	4.8	.21	5.2	5.6	25	.17	4.4	0.029	0.7	6.00	MW	CG	N
0.240	6.10	70644S	.44	11.2	.182	4.6	23	4.1	.16	4.1	3.8	17	.17	4.4	0.029	0.7	6.00	SST	CG	N
0.240	6.10	70662	.44	11.2	.176	4.5	43	7.5	.17	4.4	7.5	33	.19	4.8	0.032	0.8	5.88	MW	CG	N
0.240	6.10	70662S	.44	11.2	.176	4.5	37	6.4	.14	3.5	5.0	22	.19	4.8	0.032	0.8	5.88	SST	CG	N
0.240	6.10	70681	.44	11.2	.170	4.3	59	10	.16	4.0	9.2	41	.22	5.6	0.035	0.9	6.25	MW	CG	N
0.240	6.10	70681S	.44	11.2	.170	4.3	50	8.7	.13	3.2	6.3	28	.22	5.6	0.035	0.9	6.25	SST	CG	N
0.240	6.10	70702	.44	11.2	.164	4.2	84	15	.14	3.5	12	52	.24	6.2	0.038	1.0	6.38	MW	CG	N
0.240	6.10	70702S	.44	11.2	.164	4.2	72	13	.11	2.8	7.9	35	.24	6.2	0.038	1.0	6.38	SST	CG	N
0.240	6.10	70722	.44	11.2	.160	4.1	100	17	.14	3.5	14	60	.27	6.7	0.040	1.0	6.63	MW	CG	N
0.240	6.10	70722S	.44	11.2	.160	4.1	85	15	.11	2.8	9.2	41	.27	6.7	0.040	1.0	6.63	SST	CG	N
0.240	6.10	70743	.44	11.2	.156	4.0	123	22	.13	3.2	16	70	.28	7.1	0.042	1.1	6.63	MW	CG	N
0.240	6.10	70743S	.44	11.2	.156	4.0	105	18	.10	2.6	11	47	.28	7.1	0.042	1.1	6.63	SST	CG	N
0.240	6.10	70762	.44	11.2	.150	3.8	176	31	.11	2.8	19	85	.29	7.4	0.045	1.1	6.50	MW	CG	N
0.240	6.10	70762S	.44	11.2	.150	3.8	149	26	.09	2.2	13	57	.29	7.4	0.045	1.1	6.50	SST	CG	N
0.240	6.10	70524	.50	12.7	.208	5.3	2.9	.51	.36	9.0	1.0	4.6	.08	2.0	0.016	0.4	4.88	MW	CG	N
0.240	6.10	70524S	.50	12.7	.208	5.3	2.5	.43	.28	7.1	.68	3.0	.08	2.0	0.016	0.4	4.88	SST	CG	N
0.240	6.10	70540	.50	12.7	.204	5.2	4.4	.76	.34	8.5	1.5	6.5	.09	2.3	0.018	0.5	5.13	MW	CG	N
0.240	6.10	70540S	.50	12.7	.204	5.2	3.7	.65	.26	6.7	.97	4.3	.09	2.3	0.018	0.5	5.13	SST	CG	N
0.240	6.10	70557	.50	12.7	.200	5.1	5.7	.99	.35	9.0	2.0	8.9	.12	3.0	0.020	0.5	5.88	MW	CG	N
0.240	6.10	70557S	.50	12.7	.200	5.1	4.8	.84	.28	7.0	1.3	5.9	.12	3.0	0.020	0.5	5.88	SST	CG	N
0.240	6.10	70581	.50	12.7	.196	5.0	8.8	1.5	.30	7.7	2.6	12	.13	3.2	0.022	0.6	5.75	MW	CG	N
0.240	6.10	70581S	.50	12.7	.196	5.0	7.4	1.3	.24	6.0	1.8	7.8	.13	3.2	0.022	0.6	5.75	SST	CG	N
0.240	6.10	70602	.50	12.7	.192	4.9	12	2.1	.28	7.2	3.4	15	.14	3.6	0.024	0.6	5.88	MW	CG	N
0.240	6.10	70602S	.50	12.7	.192	4.9	10	1.8	.22	5.6	2.3	10	.14	3.6	0.024	0.6	5.88	SST	CG	N
0.240	6.10	70623	.50	12.7	.188	4.8	17	3.0	.24	6.0	4.1	18	.15	3.9	0.026	0.7	5.88	MW	CG	N
0.240	6.10	70623S	.50	12.7	.188	4.8	15	2.6	.19	4.7	2.7	12	.15	3.9	0.026	0.7	5.88	SST	CG	N
0.240	6.10	70645	.50	12.7	.182	4.6	24	4.1	.24	6.1	5.6	25	.19	4.9	0.029	0.7	6.63	MW	CG	N
0.240	6.10	70645S	.50	12.7	.182	4.6	20	3.5	.19	4.8	3.8	17	.19	4.9	0.029	0.7	6.63	SST	CG	N
0.240	6.10	12730	.50	12.7	.176	4.5	31	5.4	.16	4.2	5.0	22	.22	5.5	0.032	0.8	6.75	SST	CG	N
0.240	6.10	70663	.50	12.7	.176	4.5	36	6.4	.21	5.2	7.5	33	.21	5.4	0.032	0.8	6.63	MW	CG	N
0.240	6.10	70663S	.50	12.7	.176	4.5	31	5.4	.16	4.1	5.0	22	.21	5.4	0.032	0.8	6.63	SST	CG	N
0.240	6.10	70682	.50	12.7	.170	4.3	50	8.8	.18	4.7	9.2	41	.25	6.2	0.035	0.9	7.00	MW	CG	N
0.240	6.10	70682S	.50	12.7	.170	4.3	43	7.5	.15	3.7	6.3	28	.25	6.2	0.035	0.9	7.00	SST	CG	N
0.240	6.10	70703	.50	12.7	.164	4.2	72	13	.16	4.1	12	52	.27	6.8	0.038	1.0	7.00	MW	CG	N
0.240	6.10	70703S	.50	12.7	.164	4.2	61	11	.13	3.3	7.9	35	.27	6.8	0.038	1.0	7.00	SST	CG	N
0.240	6.10	70723	.50	12.7	.160	4.1	85	15	.16	4.1	14	60	.30	7.5	0.040	1.0	7.38	MW	CG	N
0.240	6.10	70723S	.50	12.7	.160	4.1	72	13	.13	3.2	9.2	41	.30	7.5	0.040	1.0	7.38	SST	CG	N
0.240	6.10	70744	.50	12.7	.156	4.0	106	19	.15	3.7	16	70	.31	7.9	0.042	1.1	7.38	MW	CG	N
0.240	6.10	70744S	.50	12.7	.156	4.0	90	16	.12	3.0	11	47	.31	7.9	0.042	1.1	7.38	SST	CG	N
0.240	6.10	70763	.50	12.7	.150	3.8	149	26	.13	3.2	19	85	.33	8.4	0.045	1.1	7.38	MW	CG	N
0.240	6.10	70763S	.50	12.7	.150	3.8	127	22	.10	2.6	13	57	.33	8.4	0.045	1.1	7.38	SST	CG	N
0.240	6.10	70525	.56	14.2	.208	5.3	2.5	.44	.41	10	1.0	4.6	.09	2.2	0.016	0.4	5.38	MW	CG	N
0.240	6.10	70525S	.56	14.2	.208	5.3	2.1	.37	.32	8.2	.68	3.0	.09	2.2	0.016	0.4	5.38	SST	CG	N
0.240	6.10	70541	.56	14.2	.204	5.2	3.9	.67	.38	9.6	1.5	6.5	.10	2.6	0.018	0.5	5.63	MW	CG	N
0.240	6.10	70541S	.56	14.2	.204	5.2	3.3	.57	.30	7.5	.97	4.3	.10	2.6	0.018	0.5	5.63	SST	CG	N
0.240	6.10	70558	.56	14.2	.200	5.1	5.1	.88	.39	10	2.0	8.9	.13	3.2	0.020	0.5	6.25	MW	CG	N
0.240	6.10	70558S	.56	14.2	.200	5.1	4.3	.75	.31	7.8	1.3	5.9	.13	3.2	0.020	0.5	6.25	SST	CG	N
0.240	6.10	70582	.56	14.2	.196	5.0	7.8	1.4	.34	8.7	2.6	12	.14	3.5	0.022	0.6	6.25	MW	CG	N
0.240	6.10	70582S	.56	14.2	.196	5.0	6.6	1.2	.27	6.8	1.8	7.8	.14	3.5	0.022	0.6	6.25	SST	CG	N
0.240	6.10	70603	.56	14.2	.192	4.9	11	1.9	.32	8.1	3.4	15	.15	3.9	0.024	0.6	6.38	MW	CG	N
0.240	6.10	70603S	.56	14.2	.192	4.9	9.1	1.6	.25	6.3	2.3	10	.15	3.9	0.024	0.6	6.38	SST	CG	N
0.240	6.10	70624	.56	14.2	.188	4.8	14	2.5	.28	7.2	4.1	18	.17	4.4	0.026	0.7	6.63	MW	CG	N
0.240	6.10	70624S	.56	14.2	.188	4.8	12	2.1	.22	5.7	2.7	12	.17	4.4	0.026	0.7	6.63	SST	CG	N
0.240	6.10	70646	.56	14.2	.182	4.6	21	3.6	.27	6.9	5.6	25	.21	5.3	0.029	0.7	7.25	MW	CG	N
0.240	6.10	70646S	.56	14.2	.182	4.6	18	3.1	.21	5.5	3.8	17	.21	5.3	0.029	0.7	7.25	SST	CG	N
0.240	6.10	70664	.56	14.2	.176	4.5	32	5.6	.23	6.0	7.5	33	.23	5.9	0.032	0.8	7.25	MW	CG	N
0.240	6.10	70664S	.56	14.2	.176	4.5	27	4.8	.18	4.7	5.0	22	.23	5.9	0.032	0.8	7.25	SST	CG	N
0.240	6.10	70683	.56	14.2	.170	4.3	44	7.7	.21	5.4	9.2	41	.27	6.9	0.035	0.9	7.75	MW	CG	N
0.240	6.10	70683S	.56	14.2	.170	4.3	37	6.5	.17	4.3	6.3	28	.27	6.9	0.035	0.9	7.75	SST	CG	N
0.240	6.10	70704	.56	14.2	.164	4.2	63	11	.19	4.7	12	52	.29	7.5	0.038	1.0	7.75	MW	CG	N
0.240	6.10	70704S	.56	14.2	.164	4.2	54	9.4	.15	3.8	7.9	35	.29	7.5	0.038	1.0	7.75	SST	CG	N
0.240	6.10	70724	.56	14.2	.160	4.1	74	13	.18	4.6	14	60	.33	8.4	0.040	1.0	8.25	MW	CG	N
0.240	6.10	70724S	.56	14.2	.160	4.1	63	11	.15	3.7	9.2	41	.33	8.4	0.040	1.0	8.25	SST	CG	N
0.240	6.10	70745	.56	14.2	.156	4.0	94	16	.17	4.2	16	70	.34	8.7	0.042	1.1	8.13	MW	CG	N
0.240	6.10	70745S	.56	14.2	.156	4.0	80	14	.13	3.4	11	47	.34	8.7	0.042	1.1	8.13	SST	CG	N
0.240	6.10	70764	.56	14.2	.150	3.8	130	23	.15	3.7	19	85	.37	9.3	0.045	1.1	8.13	MW	CG	N
0.240	6.10	70764S	.56	14.2	.150	3.8	111	19	.12	3.0	13	57	.37	9.3	0.045	1.1	8.13	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.240	6.10	B3-61	.59	15.1	.150	3.8	159	28	.12	3.0	19	85	.32	8.0	0.045	1.1	7.00	MW	CG	N
0.240	6.10	70526	.63	16.0	.208	5.3	2.3	.40	.45	11	1.0	4.6	.09	2.3	0.016	0.4	5.63	MW	CG	N
0.240	6.10	70526S	.63	16.0	.208	5.3	2.0	.34	.35	8.9	.68	3.0	.09	2.3	0.016	0.4	5.63	SST	CG	N
0.240	6.10	70542	.63	16.0	.204	5.2	3.5	.60	.42	11	1.5	6.5	.11	2.7	0.018	0.5	6.00	MW	CG	N
0.240	6.10	70542S	.63	16.0	.204	5.2	2.9	.51	.33	8.4	.97	4.3	.11	2.7	0.018	0.5	6.00	SST	CG	N
0.240	6.10	70560	.63	16.0	.200	5.1	5.1	.89	.39	9.9	2.0	8.9	.13	3.2	0.020	0.5	6.25	MW	CG	N
0.240	6.10	70560S	.63	16.0	.200	5.1	4.3	.76	.31	7.8	1.3	5.9	.13	3.2	0.020	0.5	6.25	SST	CG	N
0.240	6.10	70561	.63	16.0	.200	5.1	3.3	.58	.46	12	1.5	6.8	.17	4.3	0.020	0.5	8.50	MW	CG	N
0.240	6.10	70561S	.63	16.0	.200	5.1	2.8	.49	.46	12	1.3	5.7	.17	4.3	0.020	0.5	8.50	SST	CG	N
0.240	6.10	70583	.63	16.0	.196	5.0	6.9	1.2	.38	9.7	2.6	12	.15	3.8	0.022	0.6	6.75	MW	CG	N
0.240	6.10	70583S	.63	16.0	.196	5.0	5.9	1.0	.30	7.6	1.8	7.8	.15	3.8	0.022	0.6	6.75	SST	CG	N
0.240	6.10	70604	.63	16.0	.192	4.9	9.6	1.7	.36	9.1	3.4	15	.17	4.3	0.024	0.6	7.00	MW	CG	N
0.240	6.10	70604S	.63	16.0	.192	4.9	8.1	1.4	.28	7.1	2.3	10	.17	4.3	0.024	0.6	7.00	SST	CG	N
0.240	6.10	70625	.63	16.0	.188	4.8	13	2.2	.32	8.2	4.1	18	.19	4.9	0.026	0.7	7.38	MW	CG	N
0.240	6.10	70625S	.63	16.0	.188	4.8	11	1.9	.25	6.5	2.7	12	.19	4.9	0.026	0.7	7.38	SST	CG	N
0.240	6.10	70647	.63	16.0	.182	4.6	18	3.2	.30	7.7	5.6	25	.23	5.8	0.029	0.7	7.88	MW	CG	N
0.240	6.10	70647S	.63	16.0	.182	4.6	16	2.7	.24	6.1	3.8	17	.23	5.8	0.029	0.7	7.88	SST	CG	N
0.240	6.10	70665	.63	16.0	.176	4.5	28	4.9	.27	6.8	7.5	33	.26	6.5	0.032	0.8	8.00	MW	CG	N
0.240	6.10	70665S	.63	16.0	.176	4.5	24	4.2	.21	5.3	5.0	22	.26	6.5	0.032	0.8	8.00	SST	CG	N
0.240	6.10	70684	.63	16.0	.170	4.3	39	6.8	.24	6.0	9.2	41	.29	7.4	0.035	0.9	8.38	MW	CG	N
0.240	6.10	70684S	.63	16.0	.170	4.3	33	5.8	.19	4.8	6.3	28	.29	7.4	0.035	0.9	8.38	SST	CG	N
0.240	6.10	70705	.63	16.0	.164	4.2	57	9.9	.21	5.3	12	52	.32	8.1	0.038	1.0	8.38	MW	CG	N
0.240	6.10	70705S	.63	16.0	.164	4.2	48	8.4	.16	4.2	7.9	35	.32	8.1	0.038	1.0	8.38	SST	CG	N
0.240	6.10	70725	.63	16.0	.160	4.1	67	12	.20	5.2	14	60	.36	9.0	0.040	1.0	8.88	MW	CG	N
0.240	6.10	70725S	.63	16.0	.160	4.1	57	9.9	.16	4.1	9.2	41	.36	9.0	0.040	1.0	8.88	SST	CG	N
0.240	6.10	70746	.63	16.0	.156	4.0	85	15	.18	4.7	16	70	.37	9.3	0.042	1.1	8.75	MW	CG	N
0.240	6.10	70746S	.63	16.0	.156	4.0	72	13	.15	3.7	11	47	.37	9.3	0.042	1.1	8.75	SST	CG	N
0.240	6.10	70765	.63	16.0	.150	3.8	115	20	.17	4.2	19	85	.40	10.1	0.045	1.1	8.88	MW	CG	N
0.240	6.10	70765S	.63	16.0	.150	3.8	98	17	.13	3.3	13	57	.40	10.1	0.045	1.1	8.88	SST	CG	N
0.240	6.10	70527	.69	17.5	.208	5.3	2.0	.35	.51	13	1.0	4.6	.10	2.5	0.016	0.4	6.25	MW	CG	N
0.240	6.10	70527S	.69	17.5	.208	5.3	1.7	.30	.40	10	.68	3.0	.10	2.5	0.016	0.4	6.25	SST	CG	N
0.240	6.10	70543	.69	17.5	.204	5.2	3.1	.54	.47	12	1.5	6.5	.12	3.0	0.018	0.5	6.50	MW	CG	N
0.240	6.10	70543S	.69	17.5	.204	5.2	2.6	.46	.37	9.4	.97	4.3	.12	3.0	0.018	0.5	6.50	SST	CG	N
0.240	6.10	70562	.69	17.5	.200	5.1	4.1	.71	.49	13	2.0	8.9	.15	3.7	0.020	0.5	7.38	MW	CG	N
0.240	6.10	70562S	.69	17.5	.200	5.1	3.4	.60	.39	9.8	1.3	5.9	.15	3.7	0.020	0.5	7.38	SST	CG	N
0.240	6.10	70584	.69	17.5	.196	5.0	6.1	1.1	.43	11	2.6	12	.16	4.1	0.022	0.6	7.38	MW	CG	N
0.240	6.10	70584S	.69	17.5	.196	5.0	5.2	.91	.34	8.6	1.8	7.8	.16	4.1	0.022	0.6	7.38	SST	CG	N
0.240	6.10	70605	.69	17.5	.192	4.9	8.7	1.5	.39	10	3.4	15	.18	4.6	0.024	0.6	7.50	MW	CG	N
0.240	6.10	70605S	.69	17.5	.192	4.9	7.4	1.3	.31	7.8	2.3	10	.18	4.6	0.024	0.6	7.50	SST	CG	N
0.240	6.10	70626	.69	17.5	.188	4.8	11	1.9	.37	9.4	4.1	18	.21	5.4	0.026	0.7	8.13	MW	CG	N
0.240	6.10	70626S	.69	17.5	.188	4.8	9.4	1.6	.29	7.4	2.7	12	.21	5.4	0.026	0.7	8.13	SST	CG	N
0.240	6.10	70648	.69	17.5	.182	4.6	17	2.9	.34	8.6	5.6	25	.25	6.3	0.029	0.7	8.50	MW	CG	N
0.240	6.10	70648S	.69	17.5	.182	4.6	14	2.5	.27	6.8	3.8	17	.25	6.3	0.029	0.7	8.50	SST	CG	N
0.240	6.10	70666	.69	17.5	.176	4.5	25	4.4	.30	7.6	7.5	33	.28	7.1	0.032	0.8	8.75	MW	CG	N
0.240	6.10	70666S	.69	17.5	.176	4.5	21	3.7	.24	6.0	5.0	22	.28	7.1	0.032	0.8	8.75	SST	CG	N
0.240	6.10	70685	.69	17.5	.170	4.3	35	6.1	.27	6.7	9.2	41	.32	8.2	0.035	0.9	9.25	MW	CG	N
0.240	6.10	70685S	.69	17.5	.170	4.3	30	5.2	.21	5.4	6.3	28	.32	8.2	0.035	0.9	9.25	SST	CG	N
0.240	6.10	70706	.69	17.5	.164	4.2	51	8.9	.23	5.9	12	52	.35	8.8	0.038	1.0	9.13	MW	CG	N
0.240	6.10	70706S	.69	17.5	.164	4.2	43	7.6	.18	4.7	7.9	35	.35	8.8	0.038	1.0	9.13	SST	CG	N
0.240	6.10	70726	.69	17.5	.160	4.1	59	10	.23	5.8	14	60	.39	9.9	0.040	1.0	9.75	MW	CG	N
0.240	6.10	70726S	.69	17.5	.160	4.1	50	8.8	.18	4.6	9.2	41	.39	9.9	0.040	1.0	9.75	SST	CG	N
0.240	6.10	70747	.69	17.5	.156	4.0	75	13	.21	5.3	16	70	.40	10.3	0.042	1.1	9.63	MW	CG	N
0.240	6.10	70747S	.69	17.5	.156	4.0	64	11	.17	4.2	11	47	.40	10.3	0.042	1.1	9.63	SST	CG	N
0.240	6.10	70766	.69	17.5	.150	3.8	102	18	.19	4.7	19	85	.44	11.1	0.045	1.1	9.75	MW	CG	N
0.240	6.10	70766S	.69	17.5	.150	3.8	87	15	.15	3.8	13	57	.44	11.1	0.045	1.1	9.75	SST	CG	N
0.240	6.10	70528	.75	19.1	.208	5.3	1.9	.33	.54	14	1.0	4.6	.10	2.6	0.016	0.4	6.38	MW	CG	N
0.240	6.10	70528S	.75	19.1	.208	5.3	1.6	.28	.42	11	.68	3.0	.10	2.6	0.016	0.4	6.38	SST	CG	N
0.240	6.10	70544	.75	19.1	.204	5.2	2.8	.49	.52	13	1.5	6.5	.12	3.1	0.018	0.5	6.88	MW	CG	N
0.240	6.10	70544S	.75	19.1	.204	5.2	2.4	.42	.41	10	.97	4.3	.12	3.1	0.018	0.5	6.88	SST	CG	N
0.240	6.10	70563	.75	19.1	.200	5.1	3.7	.65	.54	14	2.0	8.9	.16	4.0	0.020	0.5	7.88	MW	CG	N
0.240	6.10	70563S	.75	19.1	.200	5.1	3.1	.55	.42	11	1.3	5.9	.16	4.0	0.020	0.5	7.88	SST	CG	N
0.240	6.10	70585	.75	19.1	.196	5.0	5.6	.97	.48	12	2.6	12	.17	4.4	0.022	0.6	7.88	MW	CG	N
0.240	6.10	70585S	.75	19.1	.196	5.0	4.7	.83	.37	9.5	1.8	7.8	.17	4.4	0.022	0.6	7.88	SST	CG	N
0.240	6.10	B4-35	.75	19.1	.196	5.0	4.7	.82	.37	9.5	1.8	7.8	.18	4.5	0.022	0.6	8.00	SST	CG	N
0.240	6.10	70606	.75	19.1	.192	4.9	7.8	1.4	.44	11	3.4	15	.20	5.0	0.024	0.6	8.13	MW	CG	N
0.240	6.10	70606S	.75	19.1	.192	4.9	6.6	1.2	.34	8.7	2.3	10	.20	5.0	0.024	0.6	8.13	SST	CG	N
0.240	6.10	70627	.75	19.1	.188	4.8	10	1.8	.41	10	4.1	18	.23	5.8	0.026	0.7	8.75	MW	CG	N
0.240	6.10	70627S	.75	19.1	.188	4.8	8.5	1.5	.32	8.2	2.7	12	.23	5.8	0.026	0.7	8.75	SST	CG	N
0.240	6.10	70649	.75	19.1	.182	4.6	15	2.7	.37	9.3	5.6	25	.26	6.7	0.029	0.7	9.13	MW	CG	N
0.240	6.10	70649S	.75	19.1	.182	4.6	13	2.3	.29	7.3	3.8	17	.26	6.7	0.029	0.7	9.13	SST	CG	N
0.240	6.10	70667	.75	19.1	.176	4.5	22	3.8	.34	8.7	7.5	33	.31	7.8	0.032	0.8	9.63	MW	CG	N
0.240	6.10	70667S	.75	19.1	.176	4.5	19	3.3	.27	6.8	5.0	22	.31	7.8	0.032	0.8	9.63	SST	CG	N
0.240	6.10	70686	.75	19.1	.170	4.3	31	5.5	.29	7.5	9.2	41	.35	8.9	0.035	0.9	10.0	MW	CG	N
0.240	6.10	70686S	.75	19.1	.170	4.3	27	4.7	.23	6.0	6.3	28	.35	8.9	0.035	0.9	10.0	SST	CG	N
0.240	6.10	70707	.75	19.1	.164	4.2	46	8.1	.25	6.5	12	52	.38	9.5	0.038	1.0	9.88	MW	CG	N
0.240	6.10	70707S	.75	19.1	.164	4.2	39	6.9	.20	5.1	7.9	35	.38	9.5	0.038	1.0	9.88	SST	CG	N
0.240	6.10	70727	.75	19.1	.160	4.1	55	9.7	.25	6.2	14	60	.42	10.5	0.040	1.0	10.4	MW	CG	N
0.240	6.10	70727S	.75	19.1	.160	4.1	47	8.2	.20	5.0	9.2	41	.42	10.5	0.040	1.0	10.4	SST	CG	N
0.240	6.10	70748	.75	19.1	.156	4.0	65	11	.24	6.2	16	70	.46	11.6	0.042	1.1	10.9	MW	CG	N
0.240	6.10	70748S	.75	19.1	.156	4.0	55	9.6	.19	4.9	11	47	.46	11.6	0.042	1.1	10.9	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.240	6.10	70767	.75	19.1	.150	3.8	93	16	.21	5.2	19	85	.48	12.1	0.045	1.1	10.6	MW	CG	N
0.240	6.10	70767S	.75	19.1	.150	3.8	79	14	.16	4.1	13	57	.48	12.1	0.045	1.1	10.6	SST	CG	N
0.240	6.10	70529	.81	20.6	.208	5.3	1.7	.30	.61	15	1.0	4.6	.11	2.8	0.016	0.4	6.88	MW	CG	N
0.240	6.10	70529S	.81	20.6	.208	5.3	1.4	.25	.47	12	.68	3.0	.11	2.8	0.016	0.4	6.88	SST	CG	N
0.240	6.10	70545	.81	20.6	.204	5.2	2.6	.46	.56	14	1.5	6.5	.13	3.3	0.018	0.5	7.25	MW	CG	N
0.240	6.10	70545S	.81	20.6	.204	5.2	2.2	.39	.44	11	.97	4.3	.13	3.3	0.018	0.5	7.25	SST	CG	N
0.240	6.10	70564	.81	20.6	.200	5.1	3.4	.59	.60	15	2.0	8.9	.17	4.3	0.020	0.5	8.50	MW	CG	N
0.240	6.10	70564S	.81	20.6	.200	5.1	2.8	.50	.47	12	1.3	5.9	.17	4.3	0.020	0.5	8.50	SST	CG	N
0.240	6.10	70586	.81	20.6	.196	5.0	5.1	.89	.52	13	2.6	12	.18	4.7	0.022	0.6	8.38	MW	CG	N
0.240	6.10	70586S	.81	20.6	.196	5.0	4.3	.76	.41	10	1.8	7.8	.18	4.7	0.022	0.6	8.38	SST	CG	N
0.240	6.10	70607	.81	20.6	.192	4.9	7.2	1.3	.48	12	3.4	15	.21	5.3	0.024	0.6	8.63	MW	CG	N
0.240	6.10	70607S	.81	20.6	.192	4.9	6.1	1.1	.37	9.5	2.3	10	.21	5.3	0.024	0.6	8.63	SST	CG	N
0.240	6.10	70628	.81	20.6	.188	4.8	9.2	1.6	.45	11	4.1	18	.24	6.2	0.026	0.7	9.38	MW	CG	N
0.240	6.10	70628S	.81	20.6	.188	4.8	7.8	1.4	.35	8.9	2.7	12	.24	6.2	0.026	0.7	9.38	SST	CG	N
0.240	6.10	70650	.81	20.6	.182	4.6	14	2.4	.41	10	5.6	25	.29	7.3	0.029	0.7	9.88	MW	CG	N
0.240	6.10	70650S	.81	20.6	.182	4.6	12	2.1	.32	8.1	3.8	17	.29	7.3	0.029	0.7	9.88	SST	CG	N
0.240	6.10	70668	.81	20.6	.176	4.5	20	3.5	.37	9.5	7.5	33	.33	8.4	0.032	0.8	10.4	MW	CG	N
0.240	6.10	70668S	.81	20.6	.176	4.5	17	3.0	.29	7.5	5.0	22	.33	8.4	0.032	0.8	10.4	SST	CG	N
0.240	6.10	70687	.81	20.6	.170	4.3	29	5.0	.32	8.2	9.2	41	.38	9.6	0.035	0.9	10.8	MW	CG	N
0.240	6.10	70687S	.81	20.6	.170	4.3	24	4.3	.26	6.5	6.3	28	.38	9.6	0.035	0.9	10.8	SST	CG	N
0.240	6.10	70708	.81	20.6	.164	4.2	42	7.4	.28	7.1	12	52	.40	10.3	0.038	1.0	10.6	MW	CG	N
0.240	6.10	70708S	.81	20.6	.164	4.2	36	6.3	.22	5.6	7.9	35	.40	10.3	0.038	1.0	10.6	SST	CG	N
0.240	6.10	70728	.81	20.6	.160	4.1	49	8.5	.28	7.1	14	60	.46	11.6	0.040	1.0	11.4	MW	CG	N
0.240	6.10	70728S	.81	20.6	.160	4.1	41	7.3	.22	5.6	9.2	41	.46	11.6	0.040	1.0	11.4	SST	CG	N
0.240	6.10	70749	.81	20.6	.156	4.0	60	11	.26	6.6	16	70	.49	12.4	0.042	1.1	11.6	MW	CG	N
0.240	6.10	70749S	.81	20.6	.156	4.0	51	8.9	.21	5.3	11	47	.49	12.4	0.042	1.1	11.6	SST	CG	N
0.240	6.10	70768	.81	20.6	.150	3.8	85	15	.22	5.7	19	85	.51	13.0	0.045	1.1	11.4	MW	CG	N
0.240	6.10	70768S	.81	20.6	.150	3.8	72	13	.18	4.5	13	57	.51	13.0	0.045	1.1	11.4	SST	CG	N
0.240	6.10	70530	.88	22.4	.208	5.3	1.6	.28	.64	16	1.0	4.6	.12	2.9	0.016	0.4	7.25	MW	CG	N
0.240	6.10	70530S	.88	22.4	.208	5.3	1.4	.24	.50	13	.68	3.0	.12	2.9	0.016	0.4	7.25	SST	CG	N
0.240	6.10	70546	.88	22.4	.204	5.2	2.4	.42	.61	15	1.5	6.5	.14	3.5	0.018	0.5	7.75	MW	CG	N
0.240	6.10	70546S	.88	22.4	.204	5.2	2.0	.36	.48	12	.97	4.3	.14	3.5	0.018	0.5	7.75	SST	CG	N
0.240	6.10	70565	.88	22.4	.200	5.1	3.1	.54	.64	16	2.0	8.9	.18	4.6	0.020	0.5	9.00	MW	CG	N
0.240	6.10	70565S	.88	22.4	.200	5.1	2.6	.46	.50	13	1.3	5.9	.18	4.6	0.020	0.5	9.00	SST	CG	N
0.240	6.10	70588	.88	22.4	.196	5.0	4.7	.82	.56	14	2.6	12	.20	5.0	0.022	0.6	8.88	MW	CG	N
0.240	6.10	70588S	.88	22.4	.196	5.0	4.0	.70	.44	11	1.8	7.8	.20	5.0	0.022	0.6	8.88	SST	CG	N
0.240	6.10	70608	.88	22.4	.192	4.9	6.5	1.1	.53	13	3.4	15	.22	5.6	0.024	0.6	9.25	MW	CG	N
0.240	6.10	70608S	.88	22.4	.192	4.9	5.5	.97	.41	10	2.3	10	.22	5.6	0.024	0.6	9.25	SST	CG	N
0.240	6.10	70629	.88	22.4	.188	4.8	8.2	1.4	.50	13	4.1	18	.26	6.7	0.026	0.7	10.1	MW	CG	N
0.240	6.10	70629S	.88	22.4	.188	4.8	7.0	1.2	.39	9.9	2.7	12	.26	6.7	0.026	0.7	10.1	SST	CG	N
0.240	6.10	70651	.88	22.4	.182	4.6	13	2.2	.44	11	5.6	25	.30	7.7	0.029	0.7	10.5	MW	CG	N
0.240	6.10	70651S	.88	22.4	.182	4.6	11	1.9	.35	8.8	3.8	17	.30	7.7	0.029	0.7	10.5	SST	CG	N
0.240	6.10	70669	.88	22.4	.176	4.5	19	3.3	.40	10	7.5	33	.35	8.9	0.032	0.8	11.0	MW	CG	N
0.240	6.10	70669S	.88	22.4	.176	4.5	16	2.8	.32	8.0	5.0	22	.35	8.9	0.032	0.8	11.0	SST	CG	N
0.240	6.10	70688	.88	22.4	.170	4.3	26	4.6	.35	8.9	9.2	41	.40	10.2	0.035	0.9	11.5	MW	CG	N
0.240	6.10	70688S	.88	22.4	.170	4.3	22	3.9	.28	7.1	6.3	28	.40	10.2	0.035	0.9	11.5	SST	CG	N
0.240	6.10	70709	.88	22.4	.164	4.2	38	6.7	.31	7.8	12	52	.44	11.2	0.038	1.0	11.6	MW	CG	N
0.240	6.10	70709S	.88	22.4	.164	4.2	32	5.7	.25	6.2	7.9	35	.44	11.2	0.038	1.0	11.6	SST	CG	N
0.240	6.10	70729	.88	22.4	.160	4.1	45	8.0	.30	7.6	14	60	.49	12.3	0.040	1.0	12.1	MW	CG	N
0.240	6.10	70729S	.88	22.4	.160	4.1	39	6.8	.24	6.1	9.2	41	.49	12.3	0.040	1.0	12.1	SST	CG	N
0.240	6.10	70750	.88	22.4	.156	4.0	56	9.8	.28	7.1	16	70	.51	13.1	0.042	1.1	12.3	MW	CG	N
0.240	6.10	70750S	.88	22.4	.156	4.0	48	8.3	.22	5.6	11	47	.51	13.1	0.042	1.1	12.3	SST	CG	N
0.240	6.10	70769	.88	22.4	.150	3.8	78	14	.24	6.2	19	85	.55	14.0	0.045	1.1	12.3	MW	CG	N
0.240	6.10	70769S	.88	22.4	.150	3.8	66	12	.19	4.9	13	57	.55	14.0	0.045	1.1	12.3	SST	CG	N
0.240	6.10	70547	.94	23.9	.204	5.2	2.2	.39	.66	17	1.5	6.5	.15	3.8	0.018	0.5	8.25	MW	CG	N
0.240	6.10	70547S	.94	23.9	.204	5.2	1.9	.33	.52	13	.97	4.3	.15	3.8	0.018	0.5	8.25	SST	CG	N
0.240	6.10	70567	.94	23.9	.200	5.1	3.2	.56	.62	16	2.0	8.9	.18	4.4	0.020	0.5	8.75	MW	CG	N
0.240	6.10	70567S	.94	23.9	.200	5.1	2.7	.48	.49	12	1.3	5.9	.18	4.4	0.020	0.5	8.75	SST	CG	N
0.240	6.10	70590	.94	23.9	.196	5.0	4.4	.77	.60	15	2.6	12	.21	5.2	0.022	0.6	9.38	MW	CG	N
0.240	6.10	70590S	.94	23.9	.196	5.0	3.7	.65	.47	12	1.8	7.8	.21	5.2	0.022	0.6	9.38	SST	CG	N
0.240	6.10	70610	.94	23.9	.192	4.9	5.9	1.0	.58	15	3.4	15	.24	6.1	0.024	0.6	10.0	MW	CG	N
0.240	6.10	70610S	.94	23.9	.192	4.9	5.0	.88	.45	12	2.3	10	.24	6.1	0.024	0.6	10.0	SST	CG	N
0.240	6.10	70631	.94	23.9	.188	4.8	7.8	1.4	.52	13	4.1	18	.28	7.0	0.026	0.7	10.6	MW	CG	N
0.240	6.10	70631S	.94	23.9	.188	4.8	6.6	1.2	.41	10	2.7	12	.28	7.0	0.026	0.7	10.6	SST	CG	N
0.240	6.10	70652	.94	23.9	.182	4.6	12	2.0	.48	12	5.6	25	.33	8.3	0.029	0.7	11.3	MW	CG	N
0.240	6.10	70652S	.94	23.9	.182	4.6	9.9	1.7	.38	9.6	3.8	17	.33	8.3	0.029	0.7	11.3	SST	CG	N
0.240	6.10	70670	.94	23.9	.176	4.5	17	3.0	.43	11	7.5	33	.37	9.4	0.032	0.8	11.6	MW	CG	N
0.240	6.10	70670S	.94	23.9	.176	4.5	15	2.6	.34	8.7	5.0	22	.37	9.4	0.032	0.8	11.6	SST	CG	N
0.240	6.10	70689	.94	23.9	.170	4.3	24	4.2	.38	9.7	9.2	41	.43	11.0	0.035	0.9	12.4	MW	CG	N
0.240	6.10	70689S	.94	23.9	.170	4.3	21	3.6	.30	7.7	6.3	28	.43	11.0	0.035	0.9	12.4	SST	CG	N
0.240	6.10	70710	.94	23.9	.164	4.2	35	6.1	.34	8.6	12	52	.48	12.1	0.038	1.0	12.5	MW	CG	N
0.240	6.10	70710S	.94	23.9	.164	4.2	30	5.2	.27	6.8	7.9	35	.48	12.1	0.038	1.0	12.5	SST	CG	N
0.240	6.10	70730	.94	23.9	.160	4.1	42	7.3	.32	8.2	14	60	.52	13.2	0.040	1.0	13.0	MW	CG	N
0.240	6.10	70730S	.94	23.9	.160	4.1	36	6.2	.26	6.6	9.2	41	.52	13.2	0.040	1.0	13.0	SST	CG	N
0.240	6.10	70751	.94	23.9	.156	4.0	51	8.9	.31	7.8	16	70	.56	14.1	0.042	1.1	13.3	MW	CG	N
0.240	6.10	70751S	.94	23.9	.156	4.0	43	7.6	.24	6.2	11	47	.56	14.1	0.042	1.1	13.3	SST	CG	N
0.240	6.10	70770	.94	23.9	.150	3.8	72	13	.26	6.7	19	85	.59	14.9	0.045	1.1	13.0	MW	CG	N
0.240	6.10	70770S	.94	23.9	.150	3.8	62	11	.21	5.3	13	57	.59	14.9	0.045	1.1	13.0	SST	CG	N
0.240	6.10	70531	1.00	25.4	.208	5.3	1.4	.25	.74	19	1.0	4.6	.13	3.3	0.016	0.4	8.00	MW	CG	N
0.240	6.10	70531S	1.00	25.4	.208	5.3	1.2	.21	.58	15	.68	3.0	.13	3.3	0.016	0.4	8.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.240	6.10	70548	1.00	25.4	.204	5.2	2.1	.37	.70	18	1.5	6.5	.16	3.9	0.018	0.5	8.63	MW	CG	N
0.240	6.10	70548S	1.00	25.4	.204	5.2	1.8	.31	.54	14	.97	4.3	.16	3.9	0.018	0.5	8.63	SST	CG	N
0.240	6.10	70568	1.00	25.4	.200	5.1	2.8	.48	.73	18	2.0	8.9	.20	5.0	0.020	0.5	9.88	MW	CG	N
0.240	6.10	70568S	1.00	25.4	.200	5.1	2.3	.41	.57	14	1.3	5.9	.20	5.0	0.020	0.5	9.88	SST	CG	N
0.240	6.10	70591	1.00	25.4	.196	5.0	4.2	.74	.63	16	2.6	12	.21	5.4	0.022	0.6	9.75	MW	CG	N
0.240	6.10	70591S	1.00	25.4	.196	5.0	3.6	.63	.49	12	1.8	7.8	.21	5.4	0.022	0.6	9.75	SST	CG	N
0.240	6.10	70611	1.00	25.4	.192	4.9	5.8	1.0	.59	15	3.4	15	.25	6.2	0.024	0.6	10.3	MW	CG	N
0.240	6.10	70611S	1.00	25.4	.192	4.9	4.9	.86	.46	12	2.3	10	.25	6.2	0.024	0.6	10.3	SST	CG	N
0.240	6.10	70632	1.00	25.4	.188	4.8	7.4	1.3	.55	14	4.1	18	.29	7.3	0.026	0.7	11.0	MW	CG	N
0.240	6.10	70632S	1.00	25.4	.188	4.8	6.3	1.1	.43	11	2.7	12	.29	7.3	0.026	0.7	11.0	SST	CG	N
0.240	6.10	70653	1.00	25.4	.182	4.6	11	2.0	.50	13	5.6	25	.34	8.7	0.029	0.7	11.8	MW	CG	N
0.240	6.10	70653S	1.00	25.4	.182	4.6	9.5	1.7	.40	10	3.8	17	.34	8.7	0.029	0.7	11.8	SST	CG	N
0.240	6.10	70671	1.00	25.4	.176	4.5	16	2.8	.47	12	7.5	33	.40	10.2	0.032	0.8	12.5	MW	CG	N
0.240	6.10	70671S	1.00	25.4	.176	4.5	14	2.4	.37	9.4	5.0	22	.40	10.2	0.032	0.8	12.5	SST	CG	N
0.240	6.10	70690	1.00	25.4	.170	4.3	23	4.0	.41	10	9.2	41	.46	11.6	0.035	0.9	13.0	MW	CG	N
0.240	6.10	70690S	1.00	25.4	.170	4.3	19	3.4	.32	8.2	6.3	28	.46	11.6	0.035	0.9	13.0	SST	CG	N
0.240	6.10	70711	1.00	25.4	.164	4.2	33	5.7	.36	9.1	12	52	.50	12.7	0.038	1.0	13.1	MW	CG	N
0.240	6.10	70711S	1.00	25.4	.164	4.2	28	4.9	.29	7.3	7.9	35	.50	12.7	0.038	1.0	13.1	SST	CG	N
0.240	6.10	70731	1.00	25.4	.160	4.1	39	6.9	.35	8.8	14	60	.55	14.0	0.040	1.0	13.8	MW	CG	N
0.240	6.10	70731S	1.00	25.4	.160	4.1	33	5.8	.28	7.0	9.2	41	.55	14.0	0.040	1.0	13.8	SST	CG	N
0.240	6.10	70752	1.00	25.4	.156	4.0	48	8.4	.33	8.3	16	70	.59	14.9	0.042	1.1	14.0	MW	CG	N
0.240	6.10	70752S	1.00	25.4	.156	4.0	41	7.1	.26	6.6	11	47	.59	14.9	0.042	1.1	14.0	SST	CG	N
0.240	6.10	70771	1.00	25.4	.150	3.8	67	12	.28	7.2	19	85	.62	15.7	0.045	1.1	13.8	MW	CG	N
0.240	6.10	70771S	1.00	25.4	.150	3.8	57	10	.22	5.7	13	57	.62	15.7	0.045	1.1	13.8	SST	CG	N
0.240	6.10	70570	1.13	28.7	.200	5.1	2.7	.47	.74	19	2.0	8.9	.20	5.1	0.020	0.5	10.0	MW	CG	N
0.240	6.10	70570S	1.13	28.7	.200	5.1	2.3	.40	.58	15	1.3	5.9	.20	5.1	0.020	0.5	10.0	SST	CG	N
0.240	6.10	70593	1.13	28.7	.196	5.0	3.6	.63	.73	19	2.6	12	.24	6.1	0.022	0.6	11.0	MW	CG	N
0.240	6.10	70593S	1.13	28.7	.196	5.0	3.1	.54	.57	15	1.8	7.8	.24	6.1	0.022	0.6	11.0	SST	CG	N
0.240	6.10	70613	1.13	28.7	.192	4.9	4.9	.86	.70	18	3.4	15	.28	7.1	0.024	0.6	11.6	MW	CG	N
0.240	6.10	70613S	1.13	28.7	.192	4.9	4.2	.73	.55	14	2.3	10	.28	7.1	0.024	0.6	11.6	SST	CG	N
0.240	6.10	70634	1.13	28.7	.188	4.8	6.4	1.1	.64	16	4.1	18	.33	8.3	0.026	0.7	12.5	MW	CG	N
0.240	6.10	70634S	1.13	28.7	.188	4.8	5.4	.95	.50	13	2.7	12	.33	8.3	0.026	0.7	12.5	SST	CG	N
0.240	6.10	70654	1.13	28.7	.182	4.6	9.7	1.7	.58	15	5.6	25	.38	9.7	0.029	0.7	13.1	MW	CG	N
0.240	6.10	70654S	1.13	28.7	.182	4.6	8.2	1.4	.46	12	3.8	17	.38	9.7	0.029	0.7	13.1	SST	CG	N
0.240	6.10	70673	1.13	28.7	.176	4.5	14	2.5	.53	14	7.5	33	.45	11.4	0.032	0.8	14.0	MW	CG	N
0.240	6.10	70673S	1.13	28.7	.176	4.5	12	2.1	.42	11	5.0	22	.45	11.4	0.032	0.8	14.0	SST	CG	N
0.240	6.10	70692	1.13	28.7	.170	4.3	20	3.4	.47	12	9.2	41	.52	13.1	0.035	0.9	14.8	MW	CG	N
0.240	6.10	70692S	1.13	28.7	.170	4.3	17	2.9	.38	9.5	6.3	28	.52	13.1	0.035	0.9	14.8	SST	CG	N
0.240	6.10	70712	1.13	28.7	.164	4.2	29	5.1	.41	10	12	52	.56	14.1	0.038	1.0	14.6	MW	CG	N
0.240	6.10	70712S	1.13	28.7	.164	4.2	25	4.3	.32	8.2	7.9	35	.56	14.1	0.038	1.0	14.6	SST	CG	N
0.240	6.10	70732	1.13	28.7	.160	4.1	35	6.1	.39	9.9	14	60	.61	15.5	0.040	1.0	15.3	MW	CG	N
0.240	6.10	70732S	1.13	28.7	.160	4.1	30	5.2	.31	7.9	9.2	41	.61	15.5	0.040	1.0	15.3	SST	CG	N
0.240	6.10	70753	1.13	28.7	.156	4.0	42	7.4	.37	9.4	16	70	.66	16.7	0.042	1.1	15.6	MW	CG	N
0.240	6.10	70753S	1.13	28.7	.156	4.0	36	6.3	.29	7.5	11	47	.66	16.7	0.042	1.1	15.6	SST	CG	N
0.240	6.10	70772	1.13	28.7	.150	3.8	59	10	.32	8.2	19	85	.69	17.6	0.045	1.1	15.4	MW	CG	N
0.240	6.10	70772S	1.13	28.7	.150	3.8	50	8.8	.26	6.5	13	57	.69	17.6	0.045	1.1	15.4	SST	CG	N
0.240	6.10	70532	1.25	31.8	.208	5.3	1.1	.19	.94	24	1.0	4.6	.15	3.9	0.016	0.4	9.63	MW	CG	N
0.240	6.10	70532S	1.25	31.8	.208	5.3	.94	.16	.73	19	.68	3.0	.15	3.9	0.016	0.4	9.63	SST	CG	N
0.240	6.10	70549	1.25	31.8	.204	5.2	1.7	.30	.86	22	1.5	6.5	.18	4.6	0.018	0.5	10.1	MW	CG	N
0.240	6.10	70549S	1.25	31.8	.204	5.2	1.4	.25	.67	17	.97	4.3	.18	4.6	0.018	0.5	10.1	SST	CG	N
0.240	6.10	70571	1.25	31.8	.200	5.1	2.2	.38	.93	24	2.0	8.9	.24	6.1	0.020	0.5	12.0	MW	CG	N
0.240	6.10	70571S	1.25	31.8	.200	5.1	1.8	.32	.73	18	1.3	5.9	.24	6.1	0.020	0.5	12.0	SST	CG	N
0.240	6.10	70594	1.25	31.8	.196	5.0	3.3	.58	.80	20	2.6	12	.26	6.6	0.022	0.6	11.9	MW	CG	N
0.240	6.10	70594S	1.25	31.8	.196	5.0	2.8	.49	.63	16	1.8	7.8	.26	6.6	0.022	0.6	11.9	SST	CG	N
0.240	6.10	70614	1.25	31.8	.192	4.9	4.6	.80	.75	19	3.4	15	.30	7.5	0.024	0.6	12.4	MW	CG	N
0.240	6.10	70614S	1.25	31.8	.192	4.9	3.9	.68	.59	15	2.3	10	.30	7.5	0.024	0.6	12.4	SST	CG	N
0.240	6.10	70635	1.25	31.8	.188	4.8	5.9	1.0	.69	18	4.1	18	.35	8.8	0.026	0.7	13.4	MW	CG	N
0.240	6.10	70635S	1.25	31.8	.188	4.8	5.0	.88	.54	14	2.7	12	.35	8.8	0.026	0.7	13.4	SST	CG	N
0.240	6.10	70655	1.25	31.8	.182	4.6	8.8	1.5	.64	16	5.6	25	.42	10.6	0.029	0.7	14.4	MW	CG	N
0.240	6.10	70655S	1.25	31.8	.182	4.6	7.5	1.3	.50	13	3.8	17	.42	10.6	0.029	0.7	14.4	SST	CG	N
0.240	6.10	70674	1.25	31.8	.176	4.5	13	2.3	.58	15	7.5	33	.48	12.1	0.032	0.8	14.9	MW	CG	N
0.240	6.10	70674S	1.25	31.8	.176	4.5	11	1.9	.45	12	5.0	22	.48	12.1	0.032	0.8	14.9	SST	CG	N
0.240	6.10	70693	1.25	31.8	.170	4.3	18	3.1	.52	13	9.2	41	.56	14.2	0.035	0.9	16.0	MW	CG	N
0.240	6.10	70693S	1.25	31.8	.170	4.3	15	2.7	.41	10	6.3	28	.56	14.2	0.035	0.9	16.0	SST	CG	N
0.240	6.10	70713	1.25	31.8	.164	4.2	26	4.5	.45	11	12	52	.61	15.4	0.038	1.0	16.0	MW	CG	N
0.240	6.10	70713S	1.25	31.8	.164	4.2	22	3.9	.36	9.2	7.9	35	.61	15.4	0.038	1.0	16.0	SST	CG	N
0.240	6.10	70733	1.25	31.8	.160	4.1	31	5.4	.44	11	14	60	.68	17.1	0.040	1.0	16.9	MW	CG	N
0.240	6.10	70733S	1.25	31.8	.160	4.1	26	4.6	.35	8.9	9.2	41	.68	17.1	0.040	1.0	16.9	SST	CG	N
0.240	6.10	70754	1.25	31.8	.156	4.0	38	6.6	.41	11	16	70	.72	18.4	0.042	1.1	17.3	MW	CG	N
0.240	6.10	70754S	1.25	31.8	.156	4.0	32	5.6	.33	8.4	11	47	.72	18.4	0.042	1.1	17.3	SST	CG	N
0.240	6.10	70773	1.25	31.8	.150	3.8	53	9.3	.36	9.1	19	85	.77	19.4	0.045	1.1	17.0	MW	CG	N
0.240	6.10	70773S	1.25	31.8	.150	3.8	45	7.9	.29	7.3	13	57	.77	19.4	0.045	1.1	17.0	SST	CG	N
0.240	6.10	70573	1.38	35.1	.200	5.1	2.2	.39	.91	23	2.0	8.9	.24	6.0	0.020	0.5	11.9	MW	CG	N
0.240	6.10	70573S	1.38	35.1	.200	5.1	1.9	.33	.71	18	1.3	5.9	.24	6.0	0.020	0.5	11.9	SST	CG	N
0.240	6.10	70596	1.38	35.1	.196	5.0	2.9	.51	.91	23	2.6	12	.29	7.4	0.022	0.6	13.3	MW	CG	N
0.240	6.10	70596S	1.38	35.1	.196	5.0	2.5	.43	.71	18	1.8	7.8	.29	7.4	0.022	0.6	13.3	SST	CG	N
0.240	6.10	70616	1.38	35.1	.192	4.9	3.9	.68	.88	22	3.4	15	.34	8.6	0.024	0.6	14.1	MW	CG	N
0.240	6.10	70616S	1.38	35.1	.192	4.9	3.3	.58	.69	17	2.3	10	.34	8.6	0.024	0.6	14.1	SST	CG	N
0.240	6.10	70637	1.38	35.1	.188	4.8	5.2	.91	.78	20	4.1	18	.39	9.8	0.026	0.7	14.9	MW	CG	N
0.240	6.10	70637S	1.38	35.1	.188	4.8	4.4	.77	.62	16	2.7	12	.39	9.8	0.026	0.7	14.9	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.240	6.10	70656	1.38	35.1	.182	4.6	7.8	1.4	.72	18	5.6	25	.46	11.7	0.029	0.7	15.9	MW	CG	N
0.240	6.10	70656S	1.38	35.1	.182	4.6	6.6	1.2	.57	14	3.8	17	.46	11.7	0.029	0.7	15.9	SST	CG	N
0.240	6.10	70675	1.38	35.1	.176	4.5	12	2.0	.65	16	7.5	33	.53	13.4	0.032	0.8	16.5	MW	CG	N
0.240	6.10	70675S	1.38	35.1	.176	4.5	9.9	1.7	.51	13	5.0	22	.53	13.4	0.032	0.8	16.5	SST	CG	N
0.240	6.10	70694	1.38	35.1	.170	4.3	16	2.8	.58	15	9.2	41	.62	15.8	0.035	0.9	17.8	MW	CG	N
0.240	6.10	70694S	1.38	35.1	.170	4.3	14	2.4	.46	12	6.3	28	.62	15.8	0.035	0.9	17.8	SST	CG	N
0.240	6.10	70714	1.38	35.1	.164	4.2	23	4.1	.51	13	12	52	.67	17.0	0.038	1.0	17.6	MW	CG	N
0.240	6.10	70714S	1.38	35.1	.164	4.2	20	3.5	.40	10	7.9	35	.67	17.0	0.038	1.0	17.6	SST	CG	N
0.240	6.10	70734	1.38	35.1	.160	4.1	28	4.8	.49	13	14	60	.75	19.1	0.040	1.0	18.8	MW	CG	N
0.240	6.10	70734S	1.38	35.1	.160	4.1	23	4.1	.39	10	9.2	41	.75	19.1	0.040	1.0	18.8	SST	CG	N
0.240	6.10	70755	1.38	35.1	.156	4.0	34	6.0	.46	12	16	70	.80	20.3	0.042	1.1	19.0	MW	CG	N
0.240	6.10	70755S	1.38	35.1	.156	4.0	29	5.1	.37	9.3	11	47	.80	20.3	0.042	1.1	19.0	SST	CG	N
0.240	6.10	70533	1.50	38.1	.208	5.3	.90	.16	1.1	29	1.0	4.6	.18	4.6	0.016	0.4	11.4	MW	CG	N
0.240	6.10	70533S	1.50	38.1	.208	5.3	.77	.13	.89	23	.68	3.0	.18	4.6	0.016	0.4	11.4	SST	CG	N
0.240	6.10	70550	1.50	38.1	.204	5.2	1.4	.25	1.0	26	1.5	6.5	.21	5.4	0.018	0.5	11.9	MW	CG	N
0.240	6.10	70550S	1.50	38.1	.204	5.2	1.2	.21	.82	21	.97	4.3	.21	5.4	0.018	0.5	11.9	SST	CG	N
0.240	6.10	70574	1.50	38.1	.200	5.1	1.8	.31	1.1	28	2.0	8.9	.28	7.2	0.020	0.5	14.1	MW	CG	N
0.240	6.10	70574S	1.50	38.1	.200	5.1	1.5	.27	.87	22	1.3	5.9	.28	7.2	0.020	0.5	14.1	SST	CG	N
0.240	6.10	70597	1.50	38.1	.196	5.0	2.8	.49	.94	24	2.6	12	.30	7.6	0.022	0.6	13.6	MW	CG	N
0.240	6.10	70597S	1.50	38.1	.196	5.0	2.4	.42	.74	19	1.8	7.8	.30	7.6	0.022	0.6	13.6	SST	CG	N
0.240	6.10	70617	1.50	38.1	.192	4.9	3.7	.65	.92	23	3.4	15	.35	9.0	0.024	0.6	14.8	MW	CG	N
0.240	6.10	70617S	1.50	38.1	.192	4.9	3.2	.55	.72	18	2.3	10	.35	9.0	0.024	0.6	14.8	SST	CG	N
0.240	6.10	70638	1.50	38.1	.188	4.8	4.9	.86	.83	21	4.1	18	.41	10.3	0.026	0.7	15.6	MW	CG	N
0.240	6.10	70638S	1.50	38.1	.188	4.8	4.2	.73	.66	17	2.7	12	.41	10.3	0.026	0.7	15.6	SST	CG	N
0.240	6.10	70657	1.50	38.1	.182	4.6	7.3	1.3	.77	20	5.6	25	.49	12.4	0.029	0.7	16.9	MW	CG	N
0.240	6.10	70657S	1.50	38.1	.182	4.6	6.2	1.1	.61	15	3.8	17	.49	12.4	0.029	0.7	16.9	SST	CG	N
0.240	6.10	70676	1.50	38.1	.176	4.5	11	1.9	.70	18	7.5	33	.57	14.4	0.032	0.8	17.8	MW	CG	N
0.240	6.10	70676S	1.50	38.1	.176	4.5	9.1	1.6	.55	14	5.0	22	.57	14.4	0.032	0.8	17.8	SST	CG	N
0.240	6.10	70695	1.50	38.1	.170	4.3	15	2.6	.63	16	9.2	41	.67	16.9	0.035	0.9	19.0	MW	CG	N
0.240	6.10	70695S	1.50	38.1	.170	4.3	12	2.2	.50	13	6.3	28	.67	16.9	0.035	0.9	19.0	SST	CG	N
0.240	6.10	70715	1.50	38.1	.164	4.2	21	3.7	.55	14	12	52	.73	18.5	0.038	1.0	19.1	MW	CG	N
0.240	6.10	70715S	1.50	38.1	.164	4.2	18	3.2	.44	11	7.9	35	.73	18.5	0.038	1.0	19.1	SST	CG	N
0.240	6.10	70735	1.50	38.1	.160	4.1	25	4.5	.53	14	14	60	.81	20.4	0.040	1.0	20.1	MW	CG	N
0.240	6.10	70735S	1.50	38.1	.160	4.1	22	3.8	.43	11	9.2	41	.81	20.4	0.040	1.0	20.1	SST	CG	N
0.240	6.10	70756	1.50	38.1	.156	4.0	31	5.4	.51	13	16	70	.87	22.1	0.042	1.1	20.8	MW	CG	N
0.240	6.10	70756S	1.50	38.1	.156	4.0	26	4.6	.40	10	11	47	.87	22.1	0.042	1.1	20.8	SST	CG	N
0.240	6.10	70774	1.50	38.1	.150	3.8	43	7.6	.44	11	19	85	.91	23.1	0.045	1.1	20.3	MW	CG	N
0.240	6.10	70774S	1.50	38.1	.150	3.8	37	6.5	.35	8.9	13	57	.91	23.1	0.045	1.1	20.3	SST	CG	N
0.240	6.10	70534	1.75	44.5	.208	5.3	.80	.14	1.3	33	1.0	4.6	.20	5.1	0.016	0.4	12.5	MW	CG	N
0.240	6.10	70534S	1.75	44.5	.208	5.3	.68	.12	1.0	26	.68	3.0	.20	5.1	0.016	0.4	12.5	SST	CG	N
0.240	6.10	70551	1.75	44.5	.204	5.2	1.2	.21	1.2	31	1.5	6.5	.24	6.2	0.018	0.5	13.5	MW	CG	N
0.240	6.10	70551S	1.75	44.5	.204	5.2	1.0	.18	.95	24	.97	4.3	.24	6.2	0.018	0.5	13.5	SST	CG	N
0.240	6.10	70575	1.75	44.5	.200	5.1	1.5	.26	1.3	34	2.0	8.9	.33	8.3	0.020	0.5	16.3	MW	CG	N
0.240	6.10	70575S	1.75	44.5	.200	5.1	1.3	.22	1.0	26	1.3	5.9	.33	8.3	0.020	0.5	16.3	SST	CG	N
0.240	6.10	70598	1.75	44.5	.196	5.0	2.4	.41	1.1	29	2.6	12	.35	8.9	0.022	0.6	15.9	MW	CG	N
0.240	6.10	70598S	1.75	44.5	.196	5.0	2.0	.35	.88	22	1.8	7.8	.35	8.9	0.022	0.6	15.9	SST	CG	N
0.240	6.10	70618	1.75	44.5	.192	4.9	3.3	.57	1.1	27	3.4	15	.40	10.1	0.024	0.6	16.6	MW	CG	N
0.240	6.10	70618S	1.75	44.5	.192	4.9	2.8	.48	.82	21	2.3	10	.40	10.1	0.024	0.6	16.6	SST	CG	N
0.240	6.10	70639	1.75	44.5	.188	4.8	4.2	.73	.98	25	4.1	18	.47	12.0	0.026	0.7	18.1	MW	CG	N
0.240	6.10	70639S	1.75	44.5	.188	4.8	3.5	.62	.77	20	2.7	12	.47	12.0	0.026	0.7	18.1	SST	CG	N
0.240	6.10	70658	1.75	44.5	.182	4.6	6.2	1.1	.91	23	5.6	25	.57	14.4	0.029	0.7	19.5	MW	CG	N
0.240	6.10	70658S	1.75	44.5	.182	4.6	5.2	.92	.72	18	3.8	17	.57	14.4	0.029	0.7	19.5	SST	CG	N
0.240	6.10	70677	1.75	44.5	.176	4.5	9.2	1.6	.81	21	7.5	33	.65	16.5	0.032	0.8	20.3	MW	CG	N
0.240	6.10	70677S	1.75	44.5	.176	4.5	7.8	1.4	.64	16	5.0	22	.65	16.5	0.032	0.8	20.3	SST	CG	N
0.240	6.10	70696	1.75	44.5	.170	4.3	12	2.2	.75	19	9.2	41	.78	19.8	0.035	0.9	22.3	MW	CG	N
0.240	6.10	70696S	1.75	44.5	.170	4.3	11	1.8	.59	15	6.3	28	.78	19.8	0.035	0.9	22.3	SST	CG	N
0.240	6.10	70716	1.75	44.5	.164	4.2	18	3.1	.66	17	12	52	.86	21.8	0.038	1.0	22.6	MW	CG	N
0.240	6.10	70716S	1.75	44.5	.164	4.2	15	2.6	.53	13	7.9	35	.86	21.8	0.038	1.0	22.6	SST	CG	N
0.240	6.10	70736	1.75	44.5	.160	4.1	22	3.8	.63	16	14	60	.94	23.7	0.040	1.0	23.4	MW	CG	N
0.240	6.10	70736S	1.75	44.5	.160	4.1	18	3.2	.50	13	9.2	41	.94	23.7	0.040	1.0	23.4	SST	CG	N
0.240	6.10	70757	1.75	44.5	.156	4.0	27	4.6	.59	15	16	70	1.00	25.3	0.042	1.1	23.8	MW	CG	N
0.240	6.10	70757S	1.75	44.5	.156	4.0	23	3.9	.47	12	11	47	1.00	25.3	0.042	1.1	23.8	SST	CG	N
0.240	6.10	70775	1.75	44.5	.150	3.8	37	6.5	.52	13	19	85	1.06	26.9	0.045	1.1	23.5	MW	CG	N
0.240	6.10	70775S	1.75	44.5	.150	3.8	31	5.5	.41	10	13	57	1.06	26.9	0.045	1.1	23.5	SST	CG	N
0.240	6.10	70535	2.00	50.8	.208	5.3	.70	.12	1.5	37	1.0	4.6	.22	5.7	0.016	0.4	14.0	MW	CG	N
0.240	6.10	70535S	2.00	50.8	.208	5.3	.60	.10	1.2	29	.68	3.0	.22	5.7	0.016	0.4	14.0	SST	CG	N
0.240	6.10	70552	2.00	50.8	.204	5.2	1.0	.18	1.5	37	1.5	6.5	.28	7.2	0.018	0.5	15.8	MW	CG	N
0.240	6.10	70552S	2.00	50.8	.204	5.2	.85	.15	1.1	29	.97	4.3	.28	7.2	0.018	0.5	15.8	SST	CG	N
0.240	6.10	70576	2.00	50.8	.200	5.1	1.3	.23	1.5	38	2.0	8.9	.37	9.3	0.020	0.5	18.3	MW	CG	N
0.240	6.10	70576S	2.00	50.8	.200	5.1	1.1	.20	1.2	30	1.3	5.9	.37	9.3	0.020	0.5	18.3	SST	CG	N
0.240	6.10	70599	2.00	50.8	.196	5.0	2.1	.36	1.3	33	2.6	12	.39	10.0	0.022	0.6	17.9	MW	CG	N
0.240	6.10	70599S	2.00	50.8	.196	5.0	1.7	.31	1.0	26	1.8	7.8	.39	10.0	0.022	0.6	17.9	SST	CG	N
0.240	6.10	70619	2.00	50.8	.192	4.9	2.8	.48	1.2	32	3.4	15	.46	11.7	0.024	0.6	19.3	MW	CG	N
0.240	6.10	70619S	2.00	50.8	.192	4.9	2.3	.41	.97	25	2.3	10	.46	11.7	0.024	0.6	19.3	SST	CG	N
0.240	6.10	70640	2.00	50.8	.188	4.8	3.6	.63	1.1	29	4.1	18	.53	13.5	0.026	0.7	20.5	MW	CG	N
0.240	6.10	70640S	2.00	50.8	.188	4.8	3.1	.54	.89	23	2.7	12	.53	13.5	0.026	0.7	20.5	SST	CG	N
0.240	6.10	70659	2.00	50.8	.182	4.6	5.4	.94	1.0	27	5.6	25	.64	16.3	0.029	0.7	22.1	MW	CG	N
0.240	6.10	70659S	2.00	50.8	.182	4.6	4.6	.80	.82	21	3.8	17	.64	16.3	0.029	0.7	22.1	SST	CG	N
0.240	6.10	70678	2.00	50.8	.176	4.5	8.0	1.4	.94	24	7.5	33	.74	18.7	0.032	0.8	23.0	MW	CG	N
0.240	6.10	70678S	2.00	50.8	.176	4.5	6.8	1.2	.74	19	5.0	22	.74	18.7	0.032	0.8	23.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.240	6.10	70697	2.00	50.8	.170	4.3	11	1.9	.85	22	9.2	41	.88	22.2	0.035	0.9	25.0	MW	CG	N
0.240	6.10	70697S	2.00	50.8	.170	4.3	9.3	1.6	.67	17	6.3	28	.88	22.2	0.035	0.9	25.0	SST	CG	N
0.240	6.10	70717	2.00	50.8	.164	4.2	16	2.7	.75	19	12	52	.96	24.5	0.038	1.0	25.4	MW	CG	N
0.240	6.10	70717S	2.00	50.8	.164	4.2	13	2.3	.60	15	7.9	35	.96	24.5	0.038	1.0	25.4	SST	CG	N
0.240	6.10	70737	2.00	50.8	.160	4.1	19	3.3	.72	18	14	60	1.05	26.7	0.040	1.0	26.3	MW	CG	N
0.240	6.10	70737S	2.00	50.8	.160	4.1	16	2.8	.57	15	9.2	41	1.05	26.7	0.040	1.0	26.3	SST	CG	N
0.240	6.10	70758	2.00	50.8	.156	4.0	23	4.0	.68	17	16	70	1.13	28.8	0.042	1.1	27.0	MW	CG	N
0.240	6.10	70758S	2.00	50.8	.156	4.0	20	3.4	.54	14	11	47	1.13	28.8	0.042	1.1	27.0	SST	CG	N
0.240	6.10	70776	2.00	50.8	.150	3.8	32	5.6	.59	15	19	85	1.20	30.6	0.045	1.1	26.8	MW	CG	N
0.240	6.10	70776S	2.00	50.8	.150	3.8	27	4.8	.47	12	13	57	1.20	30.6	0.045	1.1	26.8	SST	CG	N
0.240	6.10	70698	2.25	57.2	.170	4.3	9.7	1.7	.95	24	9.2	41	.98	24.8	0.035	0.9	27.9	MW	CG	N
0.240	6.10	70698S	2.25	57.2	.170	4.3	8.2	1.4	.76	19	6.3	28	.98	24.8	0.035	0.9	27.9	SST	CG	N
0.240	6.10	70718	2.25	57.2	.164	4.2	14	2.4	.85	22	12	52	1.08	27.5	0.038	1.0	28.5	MW	CG	N
0.240	6.10	70718S	2.25	57.2	.164	4.2	12	2.0	.68	17	7.9	35	1.08	27.5	0.038	1.0	28.5	SST	CG	N
0.240	6.10	70738	2.25	57.2	.160	4.1	17	2.9	.82	21	14	60	1.20	30.4	0.040	1.0	29.9	MW	CG	N
0.240	6.10	70738S	2.25	57.2	.160	4.1	14	2.5	.66	17	9.2	41	1.20	30.4	0.040	1.0	29.9	SST	CG	N
0.240	6.10	70759	2.25	57.2	.156	4.0	20	3.6	.76	19	16	70	1.27	32.1	0.042	1.1	30.1	MW	CG	N
0.240	6.10	70759S	2.25	57.2	.156	4.0	17	3.0	.61	15	11	47	1.27	32.1	0.042	1.1	30.1	SST	CG	N
0.240	6.10	70777	2.25	57.2	.150	3.8	28	5.0	.67	17	19	85	1.35	34.3	0.045	1.1	30.0	MW	CG	N
0.240	6.10	70777S	2.25	57.2	.150	3.8	24	4.2	.53	14	13	57	1.35	34.3	0.045	1.1	30.0	SST	CG	N
0.240	6.10	A12-23	2.34	59.5	.164	4.2	8.3	1.4	.56	14	4.6	21	1.79	45.4	0.038	1.0	46.0	MW	C	N
0.240	6.10	70699	2.50	63.5	.170	4.3	8.8	1.5	1.1	27	9.2	41	1.07	27.2	0.035	0.9	30.6	MW	CG	N
0.240	6.10	70699S	2.50	63.5	.170	4.3	7.4	1.3	.84	21	6.3	28	1.07	27.2	0.035	0.9	30.6	SST	CG	N
0.240	6.10	70719	2.50	63.5	.164	4.2	12	2.2	.95	24	12	52	1.20	30.5	0.038	1.0	31.6	MW	CG	N
0.240	6.10	70719S	2.50	63.5	.164	4.2	10	1.8	.76	19	7.9	35	1.20	30.5	0.038	1.0	31.6	SST	CG	N
0.240	6.10	70739	2.50	63.5	.160	4.1	15	2.6	.91	23	14	60	1.32	33.4	0.040	1.0	32.9	MW	CG	N
0.240	6.10	70739S	2.50	63.5	.160	4.1	13	2.2	.73	18	9.2	41	1.32	33.4	0.040	1.0	32.9	SST	CG	N
0.240	6.10	70760	2.50	63.5	.156	4.0	18	3.2	.87	22	16	70	1.42	36.1	0.042	1.1	33.9	MW	CG	N
0.240	6.10	70760S	2.50	63.5	.156	4.0	15	2.7	.69	18	11	47	1.42	36.1	0.042	1.1	33.9	SST	CG	N
0.240	6.10	70778	2.50	63.5	.150	3.8	25	4.4	.75	19	19	85	1.50	38.0	0.045	1.1	33.3	MW	CG	N
0.240	6.10	70778S	2.50	63.5	.150	3.8	22	3.8	.60	15	13	57	1.50	38.0	0.045	1.1	33.3	SST	CG	N
0.240	6.10	70740	3.25	82.6	.160	4.1	22	3.8	.63	16	14	60	.93	23.6	0.040	1.0	23.3	MW	CG	N
0.240	6.10	70740S	3.25	82.6	.160	4.1	18	3.2	.50	13	9.2	41	.93	23.6	0.040	1.0	23.3	SST	CG	N
0.240	6.10	70741	5.25	133.4	.160	4.1	17	2.9	.81	21	14	60	1.18	30.0	0.040	1.0	29.5	MW	CG	N
0.240	6.10	70741S	5.25	133.4	.160	4.1	14	2.5	.65	16	9.2	41	1.18	30.0	0.040	1.0	29.5	SST	CG	N
0.245	6.22	12691	3.67	93.2	.175	4.4	6.1	1.1	1.0	25	6.1	27	1.26	32.0	0.035	0.9	35.0	SST	C	N
0.250	6.35	B8-29	.16	4.0	.182	4.6	191	33	.03	.83	6.2	28	.10	2.6	0.034	0.9	3.00	SPR	CG	Z
0.250	6.35	10200	.19	4.8	.214	5.4	8.1	1.4	.11	2.7	.86	3.8	.08	2.1	0.018	0.5	3.50	MW	C	Z
0.250	6.35	A15-20	.19	4.8	.164	4.2	369	65	.03	.80	12	52	.15	3.8	0.043	1.1	3.50	SPR	CG	N
0.250	6.35	K-78	.22	5.6	.174	4.4	159	28	.05	1.2	7.7	34	.14	3.6	0.038	1.0	3.75	SST	CG	N
0.250	6.35	Q-94	.25	6.4	.222	5.6	.48	.08	.09	2.2	.04	.18	.16	4.2	0.014	0.4	10.8	MW	C	Z
0.250	6.35	10269	.25	6.4	.220	5.6	2.2	.39	.17	4.2	.37	1.7	.08	2.1	0.015	0.4	4.50	MW	C	N
0.250	6.35	U-24	.25	6.4	.200	5.1	16	2.9	.10	2.5	1.6	7.3	.15	3.8	0.025	0.6	5.00	MW	C	GI
0.250	6.35	CC-26	.25	6.4	.186	4.7	73	13	.09	2.3	6.5	29	.16	4.1	0.032	0.8	4.00	MW	C	N
0.250	6.35	L-40	.25	6.4	.178	4.5	123	22	.06	1.4	7.0	31	.14	3.7	0.036	0.9	4.00	SPR	CG	Z
0.250	6.35	DD-33	.28	7.1	.220	5.6	.98	.17	.18	4.5	.17	.76	.11	2.7	0.015	0.4	7.00	SST	CG	N
0.250	6.35	G-83	.28	7.1	.214	5.4	4.0	.71	.17	4.4	.70	3.1	.11	2.7	0.018	0.5	5.00	MW	C	GI
0.250	6.35	DD-63	.28	7.1	.210	5.3	6.3	1.1	.16	4.1	1.0	4.5	.12	3.0	0.020	0.5	5.00	MW	C	N
0.250	6.35	F-49	.28	7.1	.188	4.8	56	9.8	.08	2.0	4.4	20	.16	3.9	0.031	0.8	4.00	SST	C	N
0.250	6.35	S-116	.31	7.9	.226	5.7	.32	.06	.20	5.2	.07	.29	.11	2.7	0.012	0.3	8.00	SST	C	N
0.250	6.35	MM-9	.31	7.9	.210	5.3	5.5	.96	.21	5.4	1.2	5.2	.10	2.5	0.020	0.5	5.00	SST	C	N
0.250	6.35	A9-3	.31	7.9	.190	4.8	42	7.3	.10	2.4	4.0	18	.13	3.3	0.030	0.8	4.33	SST	CG	N
0.250	6.35	AA-16	.31	7.9	.190	4.8	27	4.8	.13	3.4	3.6	16	.18	4.6	0.030	0.8	6.00	MW	CG	Z
0.250	6.35	O-158	.31	7.9	.188	4.8	44	7.7	.10	2.5	4.4	20	.14	3.5	0.031	0.8	4.50	SST	CG	N
0.250	6.35	F-94	.31	7.9	.186	4.7	58	10	.09	2.3	5.2	23	.18	4.5	0.032	0.8	4.50	SPR	C	Z
0.250	6.35	B15-10	.31	7.9	.186	4.7	48	8.5	.11	2.7	5.2	23	.16	4.1	0.032	0.8	5.00	SPR	CG	Z
0.250	6.35	A15-8	.34	8.7	.172	4.4	105	18	.08	2.0	8.2	37	.20	5.0	0.039	1.0	5.00	SST	CG	N
0.250	6.35	RR-25	.34	8.7	.170	4.3	265	46	.04	.91	9.5	42	.18	4.6	0.040	1.0	3.50	SPR	C	N
0.250	6.35	PP-17	.34	8.7	.164	4.2	185	32	.06	1.6	12	52	.22	5.5	0.043	1.1	5.00	SPR	CG	GI
0.250	6.35	Z-2	.38	9.5	.210	5.3	3.7	.64	.23	5.7	.82	3.7	.15	3.8	0.020	0.5	6.50	SST	C	N
0.250	6.35	CC-63	.38	9.5	.210	5.3	6.7	1.2	.19	4.8	1.3	5.7	.09	2.3	0.020	0.5	4.50	SST	CG	N
0.250	6.35	LL-85	.38	9.5	.208	5.3	5.8	1.0	.23	5.8	1.3	5.9	.15	3.7	0.021	0.5	6.00	MW	C	N
0.250	6.35	EE-49	.38	9.5	.202	5.1	10	1.8	.21	5.3	2.1	9.5	.17	4.3	0.024	0.6	6.00	MW	C	Z
0.250	6.35	PP-55	.38	9.5	.202	5.1	14	2.4	.23	5.9	3.2	14	.14	3.7	0.024	0.6	5.00	MW	C	Z
0.250	6.35	II-41	.38	9.5	.198	5.0	19	3.4	.20	5.1	3.9	17	.16	4.0	0.026	0.7	5.00	MW	C	N
0.250	6.35	11366	.38	9.5	.194	4.9	19	3.3	.17	4.3	3.3	15	.16	4.1	0.028	0.7	5.75	SST	CG	N
0.250	6.35	BB-22	.38	9.5	.188	4.8	27	4.8	.16	4.1	4.4	20	.19	4.7	0.031	0.8	6.00	SST	CG	N
0.250	6.35	AA-39	.38	9.5	.186	4.7	42	7.4	.11	2.9	4.8	21	.16	4.1	0.032	0.8	5.00	SST	CG	N
0.250	6.35	3566	.38	9.5	.180	4.6	54	9.5	.16	4.2	8.9	40	.21	5.3	0.035	0.9	6.00	MW	CG	Z
0.250	6.35	10218	.38	9.5	.180	4.6	43	7.6	.10	2.4	4.1	18	.28	7.1	0.035	0.9	7.00	SPR	C	Z
0.250	6.35	A15-14	.38	9.5	.166	4.2	126	22	.08	2.1	10	45	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.250	6.35	10958	.41	10.3	.226	5.7	.37	.06	.30	7.6	.11	.49	.11	2.7	0.012	0.3	8.00	MW	C	N
0.250	6.35	A-26	.41	10.3	.202	5.1	9.0	1.6	.24	6.2	2.2	9.7	.14	3.7	0.024	0.6	6.00	SST	CG	N
0.250	6.35	A-84	.41	10.3	.200	5.1	12	2.2	.26	6.5	3.2	14	.15	3.8	0.025	0.6	6.00	MW	CG	GI
0.250	6.35	F-15	.41	10.3	.198	5.0	19	3.4	.20	5.1	3.9	17	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.250	6.35	II-33	.41	10.3	.198	5.0	13	2.2	.21	5.3	2.6	12	.16	4.0	0.026	0.7	6.00	SST	CG	N
0.250	6.35	B-89	.41	10.3	.196	5.0	14	2.4	.19	4.8	2.6	12	.22	5.5	0.027	0.7	7.00	MW	C	Z
0.250	6.35	12744	.41	10.3	.192	4.9	21	3.7	.19	4.8	3.9	18	.22	5.5	0.029	0.7	6.50	MW	C	N
0.250	6.35	WW-57	.41	10.3	.162	4.1	119	21	.10	2.5	12	52	.29	7.3	0.044	1.1	6.50	SST	CG	N
0.250	6.35	FF-73	.44	11.1	.222	5.6	1.1	.18	.34	8.6	.36	1.6	.10	2.5	0.014	0.4	6.00	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.250	6.35	CC-43	.44	11.1	.210	5.3	3.3	.58	.28	7.1	.91	4.1	.16	4.1	0.020	0.5	7.00	SST	C	N
0.250	6.35	L-14	.44	11.1	.210	5.3	2.3	.41	.24	6.0	.56	2.5	.20	5.1	0.020	0.5	9.00	SST	C	N
0.250	6.35	2821	.44	11.1	.206	5.2	8.1	1.4	.30	7.5	2.4	11	.14	3.6	0.022	0.6	5.50	MW	C	Z
0.250	6.35	AA-13	.44	11.1	.206	5.2	7.1	1.2	.28	7.2	2.0	9.0	.15	3.9	0.022	0.6	6.00	MW	C	Z
0.250	6.35	B18-156	.44	11.1	.202	5.1	12	2.1	.28	7.1	3.3	15	.13	3.4	0.024	0.6	5.50	MW	CG	N
0.250	6.35	F-97	.44	11.1	.200	5.1	14	2.5	.25	6.3	3.5	16	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.250	6.35	B5-24	.44	11.1	.194	4.9	20	3.5	.24	6.2	4.9	22	.13	3.4	0.028	0.7	6.00	MW	CG	N
0.250	6.35	F-25	.44	11.1	.184	4.7	48	8.3	.12	3.0	5.7	25	.21	5.4	0.033	0.8	5.50	SPR	C	Z
0.250	6.35	A12-22	.47	11.9	.228	5.8	.26	.05	.37	9.4	.09	.42	.10	2.5	0.011	0.3	8.00	MW	C	Z
0.250	6.35	V-98	.47	11.9	.212	5.4	1.9	.34	.30	7.5	.57	2.5	.17	4.3	0.019	0.5	9.00	SST	CG	N
0.250	6.35	4278	.47	11.9	.210	5.3	3.8	.66	.31	7.8	1.2	5.2	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.250	6.35	BB-74	.47	11.9	.210	5.3	2.8	.49	.31	7.8	.86	3.8	.16	4.1	0.020	0.5	8.00	SST	CG	N
0.250	6.35	G-98	.47	11.9	.206	5.2	7.2	1.3	.23	6.0	1.7	7.5	.12	3.1	0.022	0.6	5.50	SST	CG	N
0.250	6.35	L-92	.47	11.9	.190	4.8	22	3.8	.19	4.7	4.0	18	.20	5.0	0.030	0.8	6.50	SST	CG	N
0.250	6.35	F-23	.47	11.9	.184	4.7	42	7.3	.14	3.5	5.7	25	.23	5.9	0.033	0.8	6.00	SPR	C	Z
0.250	6.35	J-71	.47	11.9	.172	4.4	71	12	.12	3.2	8.8	39	.27	6.9	0.039	1.0	7.00	SPR	CG	Z
0.250	6.35	J-72	.47	11.9	.168	4.3	89	16	.11	2.9	10	45	.29	7.3	0.041	1.0	7.00	SPR	CG	N
0.250	6.35	B15-3	.47	11.9	.120	3.0	1351	237	.03	.65	34	153	.33	8.3	0.065	1.7	5.00	SPR	CG	N
0.250	6.35	S-794	.50	12.7	.210	5.3	3.5	.61	.35	8.8	1.2	5.3	.16	3.9	0.020	0.5	6.75	SST	C	N
0.250	6.35	V-100	.50	12.7	.210	5.3	3.2	.55	.32	8.1	1.0	4.5	.18	4.6	0.020	0.5	8.00	MW	C	N
0.250	6.35	H-94	.50	12.7	.208	5.3	3.1	.54	.30	7.5	.90	4.0	.20	5.2	0.021	0.5	8.75	SST	C	N
0.250	6.35	S-717	.50	12.7	.206	5.2	6.6	1.2	.26	6.5	1.7	7.5	.15	3.8	0.022	0.6	5.75	SST	C	N
0.250	6.35	BB-16	.50	12.7	.204	5.2	7.5	1.3	.26	6.5	1.9	8.6	.16	4.1	0.023	0.6	6.00	SST	C	N
0.250	6.35	HH-84	.50	12.7	.204	5.2	4.6	.81	.28	7.2	1.3	5.8	.22	5.5	0.023	0.6	8.50	SST	C	N
0.250	6.35	B15-68	.50	12.7	.204	5.2	4.4	.76	.29	7.4	1.3	5.7	.21	5.3	0.023	0.6	9.00	SST	CG	N
0.250	6.35	GG-46	.50	12.7	.202	5.1	10	1.8	.32	8.1	3.3	15	.17	4.3	0.024	0.6	6.00	MW	C	Z
0.250	6.35	3985	.50	12.7	.200	5.1	16	2.9	.21	5.4	3.5	16	.15	3.8	0.025	0.6	5.00	MW	C	Z
0.250	6.35	F-13	.50	12.7	.200	5.1	12	2.2	.28	7.2	3.5	16	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.250	6.35	S-1178	.50	12.7	.200	5.1	14	2.5	.16	4.2	2.3	10	.15	3.8	0.025	0.6	5.00	SST	C	N
0.250	6.35	Z-53	.50	12.7	.200	5.1	11	1.9	.22	5.5	2.3	10	.18	4.4	0.025	0.6	6.00	SST	C	N
0.250	6.35	B2-9	.50	12.7	.200	5.1	9.9	1.7	.30	7.6	3.0	13	.20	5.1	0.025	0.6	7.00	MW	C	N
0.250	6.35	2532	.50	12.7	.198	5.0	12	2.0	.29	7.4	3.4	15	.21	5.3	0.026	0.7	7.00	MW	C	Z
0.250	6.35	HH-13	.50	12.7	.196	5.0	8.6	1.5	.26	6.5	2.2	9.8	.24	6.2	0.027	0.7	9.00	SST	CG	N
0.250	6.35	XX-63	.50	12.7	.196	5.0	11	2.0	.26	6.5	3.0	13	.24	6.2	0.027	0.7	8.00	MW	C	Z
0.250	6.35	12734	.50	12.7	.192	4.9	17	3.0	.21	5.3	3.6	16	.20	5.0	0.029	0.7	6.75	SST	CG	N
0.250	6.35	B9-16	.50	12.7	.192	4.9	19	3.3	.29	7.3	5.4	24	.20	5.2	0.029	0.7	7.00	MW	CG	Z
0.250	6.35	NN-59	.50	12.7	.190	4.8	22	3.8	.26	6.6	5.7	25	.24	6.1	0.030	0.8	7.00	MW	CL	N
0.250	6.35	2556	.50	12.7	.186	4.7	29	5.1	.18	4.5	5.2	23	.26	6.5	0.032	0.8	7.00	HD	C	Z
0.250	6.35	529	.50	12.7	.180	4.6	42	7.4	.15	3.7	6.2	28	.29	7.2	0.035	0.89	7.13	HD	C	Z
0.250	6.35	NN-15	.50	12.7	.180	4.6	54	9.5	.12	3.0	6.4	29	.25	6.2	0.035	0.9	6.00	SPR	C	Z
0.250	6.35	NN-73	.50	12.7	.180	4.6	28	4.8	.19	4.7	5.1	23	.32	8.0	0.035	0.9	9.00	SST	CG	N
0.250	6.35	FF-13	.50	12.7	.180	4.6	31	5.5	.19	4.9	6.0	27	.28	7.1	0.035	0.9	8.00	SST	CG	N
0.250	6.35	A9-11	.50	12.7	.178	4.5	49	8.6	.14	3.6	7.0	31	.25	6.4	0.036	0.9	7.00	SPR	CG	N
0.250	6.35	B1-48	.50	12.7	.172	4.4	64	11	.14	3.5	8.8	39	.29	7.4	0.039	1.0	7.50	SPR	CG	N
0.250	6.35	O-155	.50	12.7	.172	4.4	79	14	.11	2.8	8.8	39	.29	7.4	0.039	1.0	6.50	SPR	C	Z
0.250	6.35	BB-9	.50	12.7	.170	4.3	58	10	.15	3.9	8.9	39	.32	8.1	0.040	1.0	8.00	SST	CG	N
0.250	6.35	518	.50	12.7	.168	4.3	85	15	.12	3.0	10	45	.34	8.6	0.041	1.0	7.25	HD	C	Z
0.250	6.35	FF-81	.50	12.7	.160	4.1	144	25	.09	2.3	13	59	.30	7.7	0.045	1.1	6.75	SPR	CG	Z
0.250	6.35	I-83	.50	12.7	.158	4.0	126	22	.11	2.8	14	63	.37	9.3	0.046	1.2	8.00	SPR	CG	N
0.250	6.35	NN-48	.50	12.7	.142	3.6	353	62	.06	1.4	20	87	.32	8.2	0.054	1.4	6.00	SST	CG	N
0.250	6.35	L-100	.50	12.7	.130	3.3	429	75	.05	1.3	21	96	.45	11.4	0.060	1.5	7.50	SST	CG	N
0.250	6.35	OO-58	.52	13.1	.210	5.3	4.7	.83	.38	9.5	1.8	7.9	.14	3.6	0.020	0.5	6.00	MW	C	N
0.250	6.35	S-163	.53	13.5	.214	5.4	1.8	.31	.37	9.4	.66	2.9	.16	4.1	0.018	0.5	8.00	SST	C	N
0.250	6.35	Q-14	.53	13.5	.192	4.9	13	2.4	.27	6.9	3.6	16	.26	6.6	0.029	0.7	9.00	MW	CG	Z
0.250	6.35	2929	.53	13.5	.180	4.6	54	9.5	.12	3.0	6.4	29	.25	6.2	0.035	0.9	6.00	SPR	C	Z
0.250	6.35	S-31	.53	13.5	.180	4.6	32	5.6	.19	4.8	6.0	27	.32	8.0	0.035	0.9	8.00	SST	C	N
0.250	6.35	2611	.53	13.5	.176	4.5	70	12	.15	3.8	10	47	.22	5.6	0.037	0.9	6.00	MW	CG	Z
0.250	6.35	A-23	.53	13.5	.172	4.4	54	9.4	.15	3.9	8.2	37	.30	7.7	0.039	1.0	7.75	SST	CG	N
0.250	6.35	A14-9	.53	13.5	.172	4.4	59	10	.15	3.8	8.8	39	.31	7.9	0.039	1.0	8.00	SPR	CG	GI
0.250	6.35	NN-39	.53	13.5	.170	4.3	79	14	.12	3.0	9.5	42	.32	8.1	0.040	1.0	7.00	SPR	C	N
0.250	6.35	EE-41	.53	13.5	.170	4.3	50	8.8	.17	4.3	8.6	38	.36	9.1	0.040	1.0	9.00	SST	CG	N
0.250	6.35	H-92	.53	13.5	.166	4.2	75	13	.14	3.4	10	45	.33	8.3	0.042	1.1	7.75	SST	CG	N
0.250	6.35	S-836	.53	13.5	.166	4.2	77	13	.13	3.4	10	45	.37	9.3	0.042	1.1	7.75	SST	C	N
0.250	6.35	O-62	.53	13.5	.150	3.8	160	28	.08	2.1	13	58	.45	11.4	0.050	1.3	9.00	SPR	CG	Z
0.250	6.35	AA-11	.55	13.9	.170	4.3	79	14	.12	3.0	9.5	42	.28	7.1	0.040	1.0	7.00	SPR	CG	Z
0.250	6.35	S-1239	.56	14.3	.218	5.5	.91	.16	.40	10	.37	1.6	.16	4.1	0.016	0.4	9.00	SST	C	N
0.250	6.35	J-10	.56	14.3	.206	5.2	4.1	.72	.36	9.2	1.5	6.7	.20	5.0	0.022	0.6	8.00	SST	C	N
0.250	6.35	F-50	.56	14.3	.194	4.9	12	2.0	.28	7.2	3.3	14	.28	7.1	0.028	0.7	9.00	MW	C	Z
0.250	6.35	926	.56	14.3	.186	4.7	26	4.6	.27	6.9	7.2	32	.27	6.9	0.032	0.8	7.50	MW	C	Z
0.250	6.35	S-1109	.56	14.3	.154	3.9	134	23	.11	2.8	15	66	.38	9.8	0.048	1.2	8.00	SST	CG	N
0.250	6.35	M-100	.59	15.1	.208	5.3	3.4	.60	.43	11	1.5	6.5	.17	4.3	0.021	0.5	8.00	SST	CG	N
0.250	6.35	B7-5	.59	15.1	.206	5.2	5.7	1.0	.44	11	2.5	11	.15	3.9	0.022	0.6	7.00	MW	CG	N
0.250	6.35	10277	.59	15.1	.200	5.1	6.2	1.1	.32	8.1	2.0	8.7	.28	7.0	0.025	0.6	10.0	MW	C	Z
0.250	6.35	F-12	.59	15.1	.198	5.0	13	2.3	.30	7.7	3.9	17	.20	5.0	0.026	0.7	6.50	MW	C	Z
0.250	6.35	F-96	.59	15.1	.184	4.7	30	5.3	.19	4.8	5.7	25	.28	7.1	0.033	0.8	7.50	HD	C	Z
0.250	6.35	O-54	.59	15.1	.180	4.6	31	5.4	.21	5.3	6.4	29	.32	8.0	0.035	0.9	9.00	SPR	CG	N
0.250	6.35	B14-58	.59	15.1	.180	4.6	27	4.8	.24	6.0	6.4	29	.35	8.9	0.035	0.9	10.0	SPR	CG	N
0.250	6.35	W-59	.59	15.1	.172	4.4	52	9.2	.16	4.0	8.2	37	.31	7.9	0.039	1.0	8.00	SST	CG	N
0.250	6.35	10756	.59	15.1	.170	4.3	76	13	.13	3.2	9.5	42	.29	7.4	0.040	1.0	7.25	SPR	CG	N
0.250	6.35	10959	.63	15.9	.222	5.6	.99	.17	.47	12	.47	2.1	.10	2.4	0.014	0.4	5.75	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.250	6.35	A-62	.63	15.9	.214	5.4	1.1	.18	.41	10	.43	1.9	.22	5.5	0.018	0.5	12.0	SST	CG	N
0.250	6.35	MM-96	.63	15.9	.214	5.4	3.5	.60	.41	10	1.4	6.2	.12	3.0	0.018	0.5	5.50	MW	C	Z
0.250	6.35	BB-61	.63	15.9	.210	5.3	3.2	.55	.47	12	1.5	6.5	.16	4.1	0.020	0.5	8.00	MW	CG	N
0.250	6.35	GG-47	.63	15.9	.210	5.3	4.2	.73	.30	7.7	1.3	5.7	.12	3.0	0.020	0.5	6.00	SST	CG	N
0.250	6.35	A15-2	.63	15.9	.206	5.2	5.7	1.0	.45	11	2.5	11	.15	3.9	0.022	0.6	7.00	MW	CG	N
0.250	6.35	AA-30	.63	15.9	.206	5.2	3.3	.58	.39	10	1.3	5.8	.23	5.9	0.022	0.6	9.50	SST	C	N
0.250	6.35	S-718	.63	15.9	.206	5.2	5.2	.91	.32	8.3	1.7	7.5	.17	4.3	0.022	0.6	6.75	SST	C	N
0.250	6.35	O-60	.63	15.9	.200	5.1	5.4	.94	.35	8.9	1.9	8.3	.28	7.0	0.025	0.6	10.0	SST	C	N
0.250	6.35	10383	.63	15.9	.194	4.9	12	2.0	.37	9.5	4.3	19	.25	6.4	0.028	0.7	9.00	MW	CG	N
0.250	6.35	W-5	.63	15.9	.194	4.9	12	2.0	.28	7.1	3.3	15	.22	5.7	0.028	0.7	8.00	SST	CG	N
0.250	6.35	1931	.63	15.9	.192	4.9	21	3.7	.26	6.6	5.4	24	.22	5.5	0.029	0.7	6.50	MW	C	Z
0.250	6.35	JJ-95	.63	15.9	.190	4.8	18	3.2	.33	8.3	6.0	27	.27	6.9	0.030	0.8	8.00	MW	C	N
0.250	6.35	PP-11	.63	15.9	.186	4.7	19	3.4	.25	6.3	4.8	21	.27	6.9	0.032	0.8	8.50	SST	CG	N
0.250	6.35	F-10	.63	15.9	.186	4.7	24	4.2	.21	5.4	5.2	23	.29	7.3	0.032	0.8	8.00	HD	C	Z
0.250	6.35	212	.63	15.9	.182	4.6	27	4.8	.23	5.8	6.2	28	.34	8.6	0.034	0.9	9.00	HD	C	Z
0.250	6.35	A14-28	.63	15.9	.182	4.6	30	5.3	.20	5.2	6.2	28	.28	7.1	0.034	0.9	8.25	SPR	CG	GI
0.250	6.35	Y-10	.63	15.9	.176	4.5	56	9.8	.14	3.4	7.6	34	.26	6.6	0.037	0.9	7.00	SPR	CG	Z
0.250	6.35	A13-9	.63	15.9	.164	4.2	81	14	.14	3.7	12	52	.38	9.7	0.043	1.1	8.88	SPR	CG	N
0.250	6.35	10475	.63	15.9	.160	4.1	114	20	.12	3.0	13	59	.41	10.3	0.045	1.1	8.00	SPR	C	Z
0.250	6.35	N-8	.66	16.7	.202	5.1	7.5	1.3	.44	11	3.3	15	.18	4.6	0.024	0.6	7.50	MW	CG	Z
0.250	6.35	B7-7	.66	16.7	.198	5.0	9.4	1.6	.42	11	3.9	17	.21	5.4	0.026	0.7	8.25	MW	CG	N
0.250	6.35	10554	.66	16.7	.196	5.0	7.9	1.4	.34	8.6	2.7	12	.32	8.1	0.027	0.7	10.8	MW	C	Z
0.250	6.35	935	.66	16.7	.188	4.8	21	3.7	.31	7.9	6.6	29	.28	7.1	0.031	0.8	8.00	MW	C	Z
0.250	6.35	2524	.66	16.7	.186	4.7	22	3.9	.23	5.9	5.2	23	.30	7.7	0.032	0.8	8.50	HD	C	Z
0.250	6.35	Z-56	.66	16.7	.186	4.7	14	2.5	.30	7.7	4.4	19	.35	8.9	0.032	0.8	11.0	SST	CG	N
0.250	6.35	A10-54	.66	16.7	.184	4.7	23	4.0	.23	5.9	5.3	23	.31	8.0	0.033	0.8	8.50	SST	C	N
0.250	6.35	EE-81	.66	16.7	.176	4.5	40	7.0	.19	4.8	7.6	34	.33	8.5	0.037	0.9	9.00	SPR	CG	N
0.250	6.35	W-49	.66	16.7	.176	4.5	54	9.4	.13	3.3	7.1	32	.24	6.1	0.037	0.9	6.50	SST	CG	N
0.250	6.35	S-317	.69	17.4	.220	5.6	.54	.09	.51	13	.27	1.2	.18	4.6	0.015	0.4	11.0	SST	C	N
0.250	6.35	RR-46	.69	17.4	.210	5.3	3.3	.58	.39	9.9	1.3	5.7	.16	4.1	0.020	0.5	7.00	SST	C	N
0.250	6.35	KK-98	.69	17.4	.206	5.2	3.1	.54	.45	11	1.4	6.1	.24	6.1	0.022	0.6	10.0	SST	C	N
0.250	6.35	10609	.69	17.4	.202	5.1	6.4	1.1	.34	8.7	2.2	9.7	.21	5.3	0.024	0.6	7.75	SST	C	N
0.250	6.35	F-1	.69	17.4	.200	5.1	8.2	1.4	.43	11	3.5	16	.23	5.7	0.025	0.6	8.00	MW	C	Z
0.250	6.35	B1-44	.69	17.4	.198	5.0	8.3	1.5	.32	8.0	2.6	12	.21	5.4	0.026	0.7	8.25	SST	CG	N
0.250	6.35	HH-32	.69	17.4	.190	4.8	13	2.3	.34	8.7	4.4	20	.35	8.8	0.030	0.8	10.5	MW	C	Z
0.250	6.35	KK-24	.69	17.4	.190	4.8	11	1.9	.30	7.5	3.2	14	.39	9.9	0.030	0.8	12.0	MW	C	N
0.250	6.35	J-98	.69	17.4	.188	4.8	17	3.0	.26	6.5	4.4	20	.29	7.5	0.031	0.8	8.50	SST	C	N
0.250	6.35	J-49	.69	17.4	.186	4.7	21	3.6	.35	8.8	7.2	32	.32	8.1	0.032	0.8	9.00	MW	C	Z
0.250	6.35	B18-139	.69	17.4	.178	4.5	49	8.6	.14	3.6	7.0	31	.25	6.4	0.036	0.9	7.00	SPR	CG	Z
0.250	6.35	HH-94	.69	17.4	.174	4.4	36	6.4	.21	5.3	7.7	34	.36	9.2	0.038	1.0	9.50	SST	CG	N
0.250	6.35	AA-27	.69	17.4	.170	4.3	50	8.8	.18	4.5	8.9	39	.36	9.1	0.040	1.0	9.00	SST	CG	N
0.250	6.35	3584	.69	17.4	.166	4.2	66	12	.23	5.8	15	67	.40	10.1	0.042	1.1	9.50	MW	CG	GI
0.250	6.35	B1-4	.69	17.4	.164	4.2	74	13	.16	4.0	12	52	.41	10.4	0.043	1.1	9.50	SPR	CG	GI
0.250	6.35	V-22	.72	18.2	.212	5.4	3.0	.53	.54	14	1.6	7.3	.15	3.9	0.019	0.5	7.00	MW	C	Z
0.250	6.35	B15-53	.72	18.2	.172	4.4	51	8.9	.17	4.4	8.8	39	.39	9.9	0.039	1.0	9.00	SPR	C	N
0.250	6.35	B3-46	.73	18.6	.168	4.3	39	6.8	.20	5.1	7.8	35	.53	13.5	0.041	1.0	12.0	SST	C	N
0.250	6.35	W-53	.75	19.1	.210	5.3	1.6	.29	.49	12	.81	3.6	.26	6.6	0.020	0.5	12.0	SST	C	N
0.250	6.35	J-54	.75	19.1	.206	5.2	1.9	.34	.38	9.7	.74	3.3	.37	9.3	0.022	0.6	16.7	MW	CG	N
0.250	6.35	S-719	.75	19.1	.206	5.2	4.1	.72	.41	10	1.7	7.5	.20	5.0	0.022	0.6	8.00	SST	C	N
0.250	6.35	Q-89	.75	19.1	.206	5.2	4.5	.80	.56	14	2.5	11	.18	4.6	0.022	0.6	8.25	MW	CG	N
0.250	6.35	A15-45	.75	19.1	.204	5.2	4.9	.85	.39	10	1.9	8.6	.19	4.8	0.023	0.6	8.25	SST	CG	N
0.250	6.35	B2-12	.75	19.1	.204	5.2	3.7	.65	.50	13	1.9	8.3	.25	6.4	0.023	0.6	10.0	SST	CL	N
0.250	6.35	A14-20	.75	19.1	.202	5.1	6.9	1.2	.48	12	3.3	15	.19	4.9	0.024	0.6	8.00	MW	CG	GI
0.250	6.35	F-41	.75	19.1	.198	5.0	8.3	1.5	.47	12	3.9	17	.26	6.6	0.026	0.7	9.00	MW	C	Z
0.250	6.35	2977	.75	19.1	.194	4.9	10	1.8	.44	11	4.5	20	.31	7.8	0.028	0.7	10.0	MW	C	Z
0.250	6.35	N-60	.75	19.1	.188	4.8	18	3.2	.36	9.2	6.6	29	.28	7.1	0.031	0.8	9.00	MW	CG	Z
0.250	6.35	Q-67	.75	19.1	.188	4.8	18	3.2	.36	9.2	6.6	29	.31	7.9	0.031	0.8	9.00	MW	C	N
0.250	6.35	3733	.75	19.1	.186	4.7	18	3.2	.29	7.2	5.2	23	.35	8.9	0.032	0.8	10.0	HD	C	Z
0.250	6.35	K-58	.75	19.1	.186	4.7	17	3.0	.30	7.7	5.2	23	.37	9.3	0.032	0.8	10.5	HD	C	GI
0.250	6.35	S-720	.75	19.1	.186	4.7	16	2.9	.30	7.5	4.8	21	.34	8.7	0.032	0.8	9.75	SST	C	N
0.250	6.35	H-19	.75	19.1	.186	4.7	15	2.5	.36	9.1	5.2	23	.38	9.8	0.032	0.8	12.0	HD	CG	N
0.250	6.35	W-83	.75	19.1	.184	4.7	18	3.2	.29	7.4	5.3	23	.36	9.2	0.033	0.8	10.0	SST	C	N
0.250	6.35	F-9	.75	19.1	.184	4.7	22	3.9	.26	6.5	5.7	25	.35	8.8	0.033	0.8	9.50	SPR	C	Z
0.250	6.35	K-90	.75	19.1	.180	4.6	29	5.1	.22	5.6	6.4	29	.33	8.4	0.035	0.9	9.50	SPR	CG	Z
0.250	6.35	B2-15	.75	19.1	.180	4.6	39	6.9	.23	5.7	8.9	40	.30	7.6	0.035	0.9	7.50	MW	C	N
0.250	6.35	B14-10	.75	19.1	.176	4.5	27	4.8	.26	6.5	7.1	32	.41	10.3	0.037	0.9	11.0	SST	CG	N
0.250	6.35	G-13	.75	19.1	.174	4.4	33	5.7	.23	5.9	7.7	34	.40	10.1	0.038	1.0	10.5	SST	CG	N
0.250	6.35	K-28	.75	19.1	.168	4.3	74	13	.14	3.5	10	45	.37	9.4	0.041	1.0	8.00	SPR	C	N
0.250	6.35	A15-10	.75	19.1	.166	4.2	52	9.1	.20	5.0	10	45	.44	11.2	0.042	1.1	10.5	SST	CG	N
0.250	6.35	NN-75	.75	19.1	.160	4.1	66	12	.19	4.8	12	55	.54	13.7	0.045	1.1	11.0	SST	C	N
0.250	6.35	G-63	.75	19.1	.158	4.0	101	18	.14	3.6	14	63	.44	11.1	0.046	1.2	9.50	SPR	CG	Z
0.250	6.35	HH-63	.75	19.1	.150	3.8	107	19	.13	3.2	13	59	.63	15.9	0.050	1.3	12.5	SPR	CG	N
0.250	6.35	B14-36	.75	19.1	.146	3.7	169	30	.11	2.8	19	83	.52	13.2	0.052	1.3	10.0	SPR	CG	N
0.250	6.35	TT-64	.77	19.4	.130	3.3	340	59	.08	2.1	28	123	.60	15.2	0.060	1.5	10.0	SPR	CG	Z
0.250	6.35	O-86	.78	19.8	.220	5.6	.56	.10	.59	15	.33	1.5	.20	5.0	0.015	0.4	12.0	MW	C	Z
0.250	6.35	LL-58	.78	19.8	.206	5.2	4.7	.83	.54	14	2.5	11	.20	5.0	0.022	0.6	8.00	MW	C	N
0.250	6.35	F-26	.78	19.8	.192	4.9	9.3	1.6	.39	9.9	3.6	16	.32	8.1	0.029	0.7	11.0	SST	CG	N
0.250	6.35	KK-26	.78	19.8	.190	4.8	13	2.3	.46	12	6.0	27	.32	8.0	0.030	0.8	10.5	MW	CG	N
0.250	6.35	12713	.78	19.8	.174	4.4	47	8.2	.24	6.2	11	50	.37	9.4	0.038	1.0	8.75	MW	C	N
0.250	6.35	K-16	.78	19.8	.168	4.3	49	8.7	.21	5.2	10	45	.45	11.5	0.041	1.0	11.0	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.250	6.35	S-60	.81	20.6	.230	5.8	.10	.02	.69	18	.07	.31	.12	3.0	0.010	0.3	11.0	SST	C	N
0.250	6.35	B-69	.81	20.6	.218	5.5	.72	.13	.60	15	.43	1.9	.21	5.4	0.016	0.4	12.3	MW	C	N
0.250	6.35	A11-18	.81	20.6	.204	5.2	5.3	.93	.55	14	2.9	13	.20	5.0	0.023	0.6	8.50	MW	CG	GI
0.250	6.35	J-92	.81	20.6	.202	5.1	5.2	.90	.55	14	2.8	13	.26	6.7	0.024	0.6	10.0	MW	C	Z
0.250	6.35	B14-65	.81	20.6	.202	5.1	5.5	.96	.58	15	3.2	14	.23	5.8	0.024	0.6	9.50	MW	CG	N
0.250	6.35	YY-14	.81	20.6	.196	5.0	8.6	1.5	.51	13	4.4	19	.30	7.5	0.027	0.7	10.0	MW	C	N
0.250	6.35	4289	.81	20.6	.194	4.9	8.1	1.4	.48	12	3.8	17	.34	8.5	0.028	0.7	12.0	MW	CG	Z
0.250	6.35	HH-5	.81	20.6	.186	4.7	14	2.5	.33	8.5	4.8	21	.34	8.7	0.032	0.8	10.8	SST	CG	N
0.250	6.35	F-8	.81	20.6	.184	4.7	20	3.4	.29	7.3	5.7	25	.38	9.6	0.033	0.8	10.5	SPR	C	Z
0.250	6.35	B-58	.81	20.6	.182	4.6	25	4.5	.24	6.2	6.2	28	.36	9.1	0.034	0.9	9.50	SPR	C	N
0.250	6.35	BB-23	.81	20.6	.180	4.6	19	3.3	.32	8.1	6.0	27	.46	11.6	0.035	0.9	12.0	SST	C	N
0.250	6.35	3866	.81	20.6	.172	4.4	35	6.2	.25	6.3	8.8	39	.47	11.9	0.039	1.0	12.0	SPR	CG	Z
0.250	6.35	A11-24	.81	20.6	.172	4.4	39	6.9	.22	5.7	8.8	39	.43	10.9	0.039	1.0	11.0	SPR	CG	N
0.250	6.35	A15-21	.81	20.6	.172	4.4	35	6.1	.24	6.0	8.2	37	.43	10.9	0.039	1.0	11.0	SST	CG	N
0.250	6.35	AA-99	.81	20.6	.156	4.0	93	16	.16	4.1	15	67	.52	13.1	0.047	1.2	11.0	SPR	CG	GI
0.250	6.35	S-486	.81	20.6	.124	3.1	376	66	.08	2.0	30	132	.63	16.0	0.063	1.6	10.0	SST	CG	N
0.250	6.35	S-9	.81	20.6	.100	2.5	941	165	.05	1.2	44	196	.75	19.1	0.075	1.9	10.0	SST	CG	N
0.250	6.35	J-23	.84	21.4	.198	5.0	7.3	1.3	.54	14	3.9	17	.26	6.6	0.026	0.7	10.0	MW	CG	Z
0.250	6.35	F-40	.84	21.4	.186	4.7	17	2.9	.31	7.9	5.2	23	.38	9.6	0.032	0.8	10.8	HD	C	Z
0.250	6.35	H-10	.84	21.4	.182	4.6	27	4.8	.23	5.8	6.2	28	.31	7.8	0.034	0.9	9.00	SPR	CG	GI
0.250	6.35	S-1313	.88	22.2	.224	5.7	.38	.07	.75	19	.29	1.3	.13	3.3	0.013	0.3	9.00	SST	C	N
0.250	6.35	AA-21	.88	22.2	.220	5.6	.81	.14	.67	17	.54	2.4	.14	3.4	0.015	0.4	8.00	SST	C	N
0.250	6.35	W-62	.88	22.2	.200	5.1	4.8	.83	.49	12	2.3	10	.28	7.0	0.025	0.6	11.0	SST	CG	N
0.250	6.35	2948	.88	22.2	.198	5.0	6.7	1.2	.59	15	3.9	17	.28	7.1	0.026	0.7	10.8	MW	CG	Z
0.250	6.35	F-91	.88	22.2	.198	5.0	7.3	1.3	.54	14	3.9	17	.29	7.3	0.026	0.7	10.0	MW	C	Z
0.250	6.35	A13-3	.88	22.2	.196	5.0	7.4	1.3	.40	10	2.9	13	.28	7.0	0.027	0.7	10.3	SST	CG	N
0.250	6.35	FF-98	.88	22.2	.194	4.9	12	2.0	.42	11	4.9	22	.28	7.1	0.028	0.7	9.00	MW	C	Z
0.250	6.35	OO-4	.88	22.2	.190	4.8	12	2.0	.52	13	6.0	27	.35	8.8	0.030	0.8	11.5	MW	CG	GI
0.250	6.35	S-721	.88	22.2	.186	4.7	14	2.4	.35	9.0	4.8	21	.39	10.0	0.032	0.8	11.3	SST	C	N
0.250	6.35	927	.88	22.2	.182	4.6	21	3.7	.29	7.4	6.2	28	.37	9.5	0.034	0.9	11.0	HD	CG	Z
0.250	6.35	10285	.88	22.2	.180	4.6	25	4.3	.26	6.6	6.4	29	.41	10.4	0.035	0.9	10.8	SPR	C	Z
0.250	6.35	B7-27	.88	22.2	.180	4.6	23	4.0	.28	7.2	6.4	29	.40	10.2	0.035	0.9	11.5	SPR	CG	N
0.250	6.35	928	.88	22.2	.168	4.3	49	8.7	.21	5.2	10	45	.49	12.5	0.041	1.0	11.0	HD	C	Z
0.250	6.35	S-723	.88	22.2	.166	4.2	43	7.6	.24	6.0	10	45	.55	13.9	0.042	1.1	12.0	SST	C	N
0.250	6.35	3874	.88	22.2	.114	2.9	850	149	.05	1.2	39	172	.54	13.8	0.068	1.7	8.00	SPR	CG	Z
0.250	6.35	B14-11	.91	23.0	.184	4.7	49	8.6	.11	2.7	5.3	23	.20	5.0	0.033	0.8	5.00	SST	C	N
0.250	6.35	10412	.91	23.0	.174	4.4	33	5.8	.25	6.3	8.2	36	.44	11.1	0.038	1.0	11.5	SPR	CG	Z
0.250	6.35	11899	.91	23.0	.160	4.1	76	13	.17	4.4	13	59	.54	13.7	0.045	1.1	11.0	SPR	C	N
0.250	6.35	10149	.94	23.8	.210	5.3	1.7	.29	.65	17	1.1	4.9	.29	7.2	0.020	0.5	13.3	MW	C	Z
0.250	6.35	O-314	.94	23.8	.202	5.1	4.4	.78	.64	16	2.8	13	.30	7.5	0.024	0.6	11.3	MW	C	Z
0.250	6.35	KK-43	.94	23.8	.198	5.0	6.5	1.1	.60	15	3.9	17	.31	7.9	0.026	0.7	11.0	MW	C	N
0.250	6.35	B5-65	.94	23.8	.196	5.0	6.3	1.1	.56	14	3.5	16	.38	9.6	0.027	0.7	13.0	MW	C	N
0.250	6.35	FF-89	.94	23.8	.190	4.8	9.9	1.7	.52	13	5.1	23	.42	10.7	0.030	0.8	13.0	MW	C	Z
0.250	6.35	L-84	.94	23.8	.190	4.8	11	1.9	.55	14	6.0	27	.39	9.9	0.030	0.8	12.0	MW	C	Z
0.250	6.35	F-39	.94	23.8	.186	4.7	15	2.5	.36	9.1	5.2	23	.42	10.6	0.032	0.8	12.0	SPR	C	Z
0.250	6.35	FF-50	.94	23.8	.180	4.6	20	3.6	.30	7.5	6.0	27	.39	10.0	0.035	0.9	11.3	SST	CG	N
0.250	6.35	2833	.94	23.8	.160	4.1	71	12	.26	6.6	18	82	.52	13.3	0.045	1.1	11.6	MW	CG	Z
0.250	6.35	S-930	.94	23.8	.158	4.0	73	13	.18	4.6	13	59	.55	14.0	0.046	1.2	11.0	SST	C	N
0.250	6.35	B-47	.94	23.8	.150	3.8	103	18	.15	3.9	16	70	.58	14.6	0.050	1.3	11.5	SST	CG	N
0.250	6.35	3519	.94	23.8	.138	3.5	176	31	.18	4.6	32	142	.73	18.5	0.056	1.4	13.0	MW	CG	Z
0.250	6.35	DD-43	.97	24.6	.210	5.3	1.7	.29	.71	18	1.2	5.3	.26	6.6	0.020	0.5	12.0	SST	C	N
0.250	6.35	3115	1.00	25.4	.214	5.4	1.3	.22	.78	20	.99	4.4	.23	5.7	0.018	0.5	11.5	MW	C	GI
0.250	6.35	W-47	1.00	25.4	.214	5.4	1.2	.20	.78	20	.92	4.1	.22	5.5	0.018	0.5	11.0	SST	C	N
0.250	6.35	151-A	1.00	25.4	.210	5.3	2.8	.49	.68	17	1.9	8.5	.20	5.0	0.020	0.5	8.75	MW	C	Z
0.250	6.35	3811	1.00	25.4	.210	5.3	2.4	.41	.78	20	1.8	8.2	.22	5.6	0.020	0.5	10.0	MW	C	GI
0.250	6.35	HH-67	1.00	25.4	.210	5.3	3.4	.59	.38	9.7	1.3	5.7	.16	4.1	0.020	0.5	7.00	SST	C	N
0.250	6.35	W-9	1.00	25.4	.210	5.3	1.5	.26	.72	18	1.1	4.8	.28	7.1	0.020	0.5	13.0	SST	C	N
0.250	6.35	4111	1.00	25.4	.208	5.3	1.9	.33	.67	17	1.3	5.6	.33	8.3	0.021	0.5	14.5	MW	C	Z
0.250	6.35	12667	1.00	25.4	.206	5.2	3.8	.66	.67	17	2.5	11	.21	5.3	0.022	0.6	9.50	MW	CG	N
0.250	6.35	3614	1.00	25.4	.204	5.2	3.1	.55	.68	17	2.1	9.4	.32	8.2	0.023	0.6	13.0	MW	C	Z
0.250	6.35	Q-68	1.00	25.4	.204	5.2	4.0	.71	.72	18	2.9	13	.24	6.1	0.023	0.6	10.5	MW	CG	N
0.250	6.35	12786	1.00	25.4	.196	5.0	6.3	1.1	.62	16	3.9	17	.38	9.6	0.027	0.7	13.0	MW	C	N
0.250	6.35	10019	1.00	25.4	.194	4.9	9.0	1.6	.54	14	4.9	22	.34	8.5	0.028	0.7	11.0	MW	C	Z
0.250	6.35	FF-11	1.00	25.4	.190	4.8	8.1	1.4	.49	13	4.0	18	.42	10.7	0.030	0.8	14.0	SST	CG	N
0.250	6.35	M-18	1.00	25.4	.190	4.8	13	2.3	.45	11	6.0	27	.34	8.6	0.030	0.8	10.3	MW	C	Z
0.250	6.35	MM-37	1.00	25.4	.190	4.8	15	2.6	.41	10	6.0	27	.29	7.2	0.030	0.8	9.50	MW	CG	Z
0.250	6.35	3567	1.00	25.4	.188	4.8	18	3.2	.36	9.2	6.6	29	.31	7.9	0.031	0.8	9.00	MW	C	Z
0.250	6.35	A-41	1.00	25.4	.186	4.7	11	2.0	.46	12	5.2	23	.51	13.0	0.032	0.8	15.0	SPR	C	BO
0.250	6.35	QQ-66	1.00	25.4	.186	4.7	22	3.9	.32	8.2	7.2	32	.30	7.7	0.032	0.8	8.50	MW	C	Z
0.250	6.35	S-722	1.00	25.4	.186	4.7	12	2.1	.41	10	4.8	21	.44	11.2	0.032	0.8	12.8	SST	C	N
0.250	6.35	K-3	1.00	25.4	.184	4.7	15	2.5	.36	9.2	5.3	23	.43	10.9	0.033	0.8	12.0	SST	C	N
0.250	6.35	B15-54	1.00	25.4	.182	4.6	14	2.5	.44	11	6.2	28	.53	13.4	0.034	0.9	15.5	SPR	CG	N
0.250	6.35	10753	1.00	25.4	.180	4.6	20	3.5	.33	8.3	6.4	29	.49	12.4	0.035	0.9	13.0	SPR	C	N
0.250	6.35	201-A	1.00	25.4	.180	4.6	21	3.7	.42	11	8.9	40	.46	11.8	0.035	0.9	12.3	MW	C	Z
0.250	6.35	2565	1.00	25.4	.172	4.4	25	4.4	.34	8.6	8.5	38	.66	16.8	0.039	1.0	16.0	MW	C	Z
0.250	6.35	EE-5	1.00	25.4	.170	4.3	23	4.1	.32	8.1	7.5	33	.68	17.3	0.040	1.0	17.0	SST	CG	N
0.250	6.35	I-66	1.00	25.4	.170	4.3	44	7.7	.21	5.4	9.5	42	.44	11.2	0.040	1.0	11.0	SPR	CG	GI
0.250	6.35	S-724	1.00	25.4	.166	4.2	37	6.4	.28	7.0	10	45	.62	15.7	0.042	1.1	13.8	SST	C	N
0.250	6.35	A13-2	1.00	25.4	.164	4.2	47	8.3	.25	6.2	12	52	.59	14.9	0.043	1.1	13.7	SPR	CG	N
0.250	6.35	JJ-90	1.00	25.4	.150	3.8	89	16	.18	4.5	16	70	.70	17.8	0.050	1.3	13.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.250	6.35	A10-25	1.03	26.2	.214	5.4	.56	.10	.64	16	.36	1.6	.40	10.1	0.018	0.5	21.0	SST	C	N
0.250	6.35	10179	1.03	26.2	.202	5.1	4.6	.80	.52	13	2.4	11	.26	6.7	0.024	0.6	11.0	HD	CG	N
0.250	6.35	S-999	1.03	26.2	.188	4.8	12	2.1	.36	9.2	4.4	20	.34	8.7	0.031	0.8	11.0	SST	CG	N
0.250	6.35	2621	1.03	26.2	.172	4.4	25	4.4	.35	8.8	8.8	39	.66	16.8	0.039	1.0	16.0	HD	C	Z
0.250	6.35	A15-15	1.05	26.6	.170	4.3	30	5.3	.30	7.5	8.9	39	.59	15.0	0.040	1.0	13.8	SST	C	N
0.250	6.35	YY-3	1.06	27.0	.210	5.3	2.1	.36	.62	16	1.3	5.7	.22	5.6	0.020	0.5	10.0	SST	C	N
0.250	6.35	TT-19	1.06	27.0	.204	5.2	2.5	.45	.72	18	1.8	8.2	.34	8.6	0.023	0.6	13.8	SST	C	N
0.250	6.35	11468	1.06	27.0	.204	5.2	3.5	.61	.55	14	1.9	8.6	.27	6.9	0.023	0.6	10.8	SST	C	N
0.250	6.35	WW-33	1.06	27.0	.202	5.1	3.8	.66	.73	18	2.7	12	.34	8.5	0.024	0.6	13.0	MW	C	N
0.250	6.35	HH-65	1.06	27.0	.186	4.7	13	2.3	.39	10	5.2	23	.42	10.6	0.032	0.8	13.0	SPR	CG	N
0.250	6.35	F-21	1.06	27.0	.184	4.7	16	2.7	.37	9.3	5.7	25	.45	11.5	0.033	0.8	12.8	SPR	C	Z
0.250	6.35	A9-19	1.06	27.0	.178	4.5	15	2.7	.41	11	6.4	28	.65	16.5	0.036	0.9	18.0	SPR	CG	N
0.250	6.35	F-31	1.06	27.0	.156	4.0	88	15	.17	4.3	15	67	.54	13.7	0.047	1.2	11.5	SPR	CG	Z
0.250	6.35	12407	1.09	27.8	.224	5.7	.19	.03	.85	22	.16	.73	.25	6.3	0.013	0.3	18.0	MW	C	N
0.250	6.35	3274	1.09	27.8	.174	4.4	26	4.6	.31	7.9	8.2	36	.53	13.5	0.038	1.0	14.0	SPR	CG	Z
0.250	6.35	AA-35	1.13	28.6	.230	5.8	.04	.01	.85	21	.03	.14	.28	7.1	0.010	0.3	27.0	SST	C	N
0.250	6.35	S-197	1.13	28.6	.222	5.6	.23	.04	.86	22	.20	.89	.26	6.7	0.014	0.4	17.8	SST	C	N
0.250	6.35	2834	1.13	28.6	.216	5.5	1.0	.17	.91	23	.91	4.1	.21	5.4	0.017	0.4	11.5	MW	C	Z
0.250	6.35	2877	1.13	28.6	.216	5.5	.45	.08	.72	18	.32	1.4	.41	10.4	0.017	0.4	23.0	MW	C	Z
0.250	6.35	4288	1.13	28.6	.216	5.5	.50	.09	.75	19	.38	1.7	.37	9.5	0.017	0.4	21.0	MW	C	Z
0.250	6.35	II-5	1.13	28.6	.210	5.3	1.5	.25	.81	20	1.2	5.2	.32	8.1	0.020	0.5	15.0	MW	C	Z
0.250	6.35	1890	1.13	28.6	.200	5.1	4.5	.78	.78	20	3.5	15	.35	8.9	0.025	0.6	13.0	MW	C	Z
0.250	6.35	3561	1.13	28.6	.198	5.0	6.9	1.2	.57	14	3.9	17	.30	7.6	0.026	0.7	10.5	MW	C	Z
0.250	6.35	DD-8	1.13	28.6	.190	4.8	6.5	1.1	.59	15	3.8	17	.54	13.7	0.030	0.8	17.0	SST	C	N
0.250	6.35	S-1156	1.13	28.6	.186	4.7	13	2.2	.38	9.7	4.8	21	.42	10.6	0.032	0.8	12.0	SST	C	N
0.250	6.35	S-975	1.13	28.6	.180	4.6	16	2.8	.38	9.5	6.0	27	.48	12.2	0.035	0.9	13.8	SST	CG	N
0.250	6.35	YY-17	1.13	28.6	.178	4.5	18	3.1	.37	9.3	6.5	29	.50	12.8	0.036	0.9	14.0	SST	CG	N
0.250	6.35	A14-39	1.13	28.6	.174	4.4	24	4.2	.34	8.7	8.2	36	.58	14.7	0.038	1.0	15.3	SPR	CG	N
0.250	6.35	EE-34	1.13	28.6	.150	3.8	93	16	.17	4.3	16	70	.64	16.2	0.050	1.3	12.8	SST	CG	N
0.250	6.35	HH-55	1.16	29.4	.214	5.4	.58	.10	.78	20	.45	2.0	.38	9.6	0.018	0.5	20.0	SST	C	N
0.250	6.35	LL-70	1.16	29.4	.190	4.8	9.9	1.7	.60	15	6.0	27	.39	9.9	0.030	0.8	13.0	MW	CG	N
0.250	6.35	S-322	1.16	29.4	.156	4.0	66	12	.21	5.4	14	63	.61	15.5	0.047	1.2	13.0	SST	CG	N
0.250	6.35	O-102	1.19	30.2	.212	5.4	.89	.16	.81	21	.72	3.2	.38	9.7	0.019	0.5	19.0	MW	C	Z
0.250	6.35	BB-30	1.19	30.2	.170	4.3	27	4.7	.33	8.3	8.9	39	.60	15.2	0.040	1.0	15.0	SST	CG	N
0.250	6.35	L-30	1.23	31.3	.150	3.8	140	25	.12	3.0	17	74	.50	12.7	0.050	1.3	10.0	SPR	CG	Z
0.250	6.35	CC-87	1.25	31.8	.226	5.7	.18	.03	1.1	27	.19	.84	.19	4.7	0.012	0.3	14.5	MW	C	N
0.250	6.35	B2-39	1.25	31.8	.210	5.3	1.6	.28	.95	24	1.5	6.7	.30	7.6	0.020	0.5	14.0	MW	C	N
0.250	6.35	7	1.25	31.8	.204	5.2	3.0	.52	.70	18	2.1	9.3	.33	8.5	0.023	0.6	13.5	HD	C	Z
0.250	6.35	S-138	1.25	31.8	.202	5.1	2.6	.45	.84	21	2.2	9.6	.41	10.4	0.024	0.6	16.0	SST	C	N
0.250	6.35	Y-81	1.25	31.8	.202	5.1	3.2	.56	.87	22	2.8	12	.38	9.8	0.024	0.6	15.0	MW	C	N
0.250	6.35	F-14	1.25	31.8	.198	5.0	4.9	.85	.81	20	3.9	17	.39	9.9	0.026	0.7	14.0	MW	C	Z
0.250	6.35	CC-4	1.25	31.8	.190	4.8	4.8	.83	.50	13	2.4	11	.75	19.1	0.030	0.8	25.0	MW	CG	N
0.250	6.35	A14-3	1.25	31.8	.170	4.3	27	4.8	.35	8.8	9.5	42	.66	16.8	0.040	1.0	16.5	SPR	CG	N
0.250	6.35	S-725	1.25	31.8	.166	4.2	29	5.0	.35	9.0	10	45	.76	19.2	0.042	1.1	17.0	SST	C	N
0.250	6.35	B10-6	1.25	31.8	.162	4.1	39	6.7	.32	8.2	12	55	.79	20.1	0.044	1.1	18.0	SPR	CG	N
0.250	6.35	CC-57	1.28	32.5	.190	4.8	9.9	1.7	.60	15	6.0	27	.39	9.9	0.030	0.8	13.0	MW	CG	Z
0.250	6.35	4296	1.31	33.3	.182	4.6	14	2.5	.44	11	6.2	28	.56	14.2	0.034	0.9	15.5	SPR	C	Z
0.250	6.35	M-148	1.31	33.3	.166	4.2	36	6.2	.31	7.8	11	48	.67	17.1	0.042	1.1	16.0	SPR	CG	Z
0.250	6.35	S-331	1.34	34.1	.214	5.4	1.1	.19	.87	22	.93	4.2	.23	5.9	0.018	0.5	12.0	SST	C	N
0.250	6.35	151-B	1.38	34.9	.210	5.3	2.0	.35	.96	24	1.9	8.5	.25	6.4	0.020	0.5	11.5	MW	C	Z
0.250	6.35	3780	1.38	34.9	.194	4.9	6.0	1.0	.82	21	4.9	22	.46	11.7	0.028	0.7	15.5	MW	C	Z
0.250	6.35	J-47	1.38	34.9	.190	4.8	5.0	.87	.66	17	3.3	14	.72	18.3	0.030	0.8	24.0	MW	CG	Z
0.250	6.35	PP-99	1.38	34.9	.190	4.8	11	1.9	.38	9.6	4.0	18	.36	9.1	0.030	0.8	11.0	SST	C	N
0.250	6.35	201-B	1.38	34.9	.180	4.6	15	2.6	.60	15	8.9	40	.61	15.6	0.035	0.9	16.5	MW	C	Z
0.250	6.35	II-66	1.38	34.9	.170	4.3	27	4.8	.35	8.8	9.5	42	.70	17.8	0.040	1.0	16.5	SPR	C	Z
0.250	6.35	S-1023	1.38	34.9	.160	4.1	44	7.7	.28	7.2	12	55	.70	17.7	0.045	1.1	15.5	SST	CG	N
0.250	6.35	10877	1.41	35.7	.210	5.3	1.0	.18	1.0	25	1.0	4.5	.41	10.4	0.020	0.5	20.5	MW	CG	N
0.250	6.35	2980	1.41	35.7	.210	5.3	1.3	.23	1.1	27	1.4	6.3	.35	8.8	0.020	0.5	16.3	MW	C	Z
0.250	6.35	JJ-21	1.44	36.5	.190	4.8	3.6	.63	.57	14	2.0	9.1	.87	22.1	0.030	0.8	29.0	SST	CG	N
0.250	6.35	3938	1.44	36.5	.156	4.0	47	8.2	.32	8.2	15	67	.94	23.9	0.047	1.2	20.0	SPR	CG	Z
0.250	6.35	B4-12	1.44	36.6	.156	4.0	51	8.9	.30	7.5	15	67	.87	22.1	0.047	1.2	18.5	SPR	CG	N
0.250	6.35	929	1.50	38.1	.198	5.0	2.7	.47	.85	22	2.3	10	.65	16.5	0.026	0.7	24.0	MW	C	Z
0.250	6.35	524	1.50	38.1	.182	4.6	10	1.8	.61	15	6.2	28	.74	18.8	0.034	0.9	20.8	HD	C	Z
0.250	6.35	10423	1.50	38.1	.178	4.5	12	2.1	.58	15	7.0	31	.85	21.5	0.036	0.9	22.5	SPR	C	N
0.250	6.35	MM-49	1.50	38.1	.170	4.3	22	3.9	.43	11	9.5	42	.80	20.3	0.040	1.0	20.0	SPR	CG	GI
0.250	6.35	12253	1.50	38.1	.170	4.3	22	3.9	.43	11	9.5	42	.80	20.3	0.040	1.0	20.0	SPR	CG	GI
0.250	6.35	S-726	1.50	38.1	.166	4.2	23	4.1	.44	11	10	45	.90	22.9	0.042	1.1	20.5	SST	C	N
0.250	6.35	BB-25	1.50	38.1	.156	4.0	41	7.1	.35	8.8	14	63	.94	23.9	0.047	1.2	20.0	SST	CG	N
0.250	6.35	S-1506	1.56	39.7	.206	5.2	2.2	.39	.75	19	1.7	7.5	.31	7.8	0.022	0.6	13.0	SST	C	N
0.250	6.35	3583	1.58	40.1	.210	5.3	.99	.17	1.1	29	1.1	5.0	.44	11.2	0.020	0.5	21.0	MW	C	Z
0.250	6.35	H-70	1.59	40.5	.168	4.3	18	3.1	.49	12	8.6	38	1.11	28.1	0.041	1.0	27.0	SPR	CG	GI
0.250	6.35	B2-31	1.59	40.5	.190	4.8	4.3	.76	.84	21	3.6	16	.75	19.1	0.030	0.8	24.0	SST	C	N
0.250	6.35	10159	1.63	41.3	.224	5.7	.17	.03	1.4	35	.23	1.0	.25	6.5	0.013	0.3	18.5	SST	C	N
0.250	6.35	12411	1.63	41.3	.224	5.7	.19	.03	1.4	35	.26	1.1	.25	6.4	0.013	0.3	18.5	MW	C	N
0.250	6.35	10770	1.63	41.3	.190	4.8	5.0	.87	.88	22	4.3	19	.75	19.1	0.030	0.8	24.0	MW	C	N
0.250	6.35	S-1240	1.63	41.3	.186	4.7	6.3	1.1	.76	19	4.8	21	.74	18.7	0.032	0.8	22.0	SST	C	N
0.250	6.35	I-63	1.69	42.8	.188	4.8	5.7	1.0	.94	24	5.4	24	.74	18.9	0.031	0.8	24.0	MW	CG	Z
0.250	6.35	00-54	1.69	42.8	.170	4.3	22	3.9	.43	11	9.5	42	.80	20.3	0.040	1.0	20.0	SPR	CG	GI
0.250	6.35	151-C	1.75	44.5	.210	5.3	1.3	.22	1.39	6.2	1.8	8.0	.36	9.0	0.020	0.5	16.8	MW	C	Z
0.250	6.35	JJ-99	1.75	44.5	.210	5.3	1.1	.19	1.2	30	1.3	5.7	.36	9.1	0.020	0.5	17.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.250	6.35	G-96	1.75	44.5	.210	5.3	1.4	.24	1.4	36	1.9	8.5	.34	8.6	0.020	0.5	16.0	MW	C	N
0.250	6.35	12620	1.75	44.5	.200	5.1	2.3	.41	1.2	29	2.7	12	.60	15.2	0.025	0.6	23.0	MW	C	N
0.250	6.35	B2-4	1.75	44.5	.200	5.1	4.7	.82	.74	19	3.5	16	.34	8.6	0.025	0.6	12.5	MW	CL	N
0.250	6.35	11349	1.75	44.5	.190	4.8	3.3	.58	.81	20	2.6	12	.95	24.0	0.030	0.8	31.5	SST	CG	N
0.250	6.35	J-61	1.75	44.5	.182	4.6	8.7	1.5	.71	18	6.2	28	.82	20.7	0.034	0.9	24.0	SPR	C	Z
0.250	6.35	201-C	1.75	44.5	.180	4.6	12	2.0	.77	20	8.9	40	.76	19.3	0.035	0.9	20.8	MW	C	Z
0.250	6.35	A12-18	1.78	45.2	.200	5.1	2.3	.40	1.2	30	2.7	12	.61	15.6	0.025	0.6	23.5	MW	C	N
0.250	6.35	1941	1.78	45.2	.182	4.6	10	1.8	.60	15	6.2	28	.73	18.6	0.034	0.9	20.5	SPR	C	Z
0.250	6.35	2746	1.78	45.2	.176	4.5	15	2.7	.68	17	10	47	.78	19.7	0.037	0.9	20.0	MW	C	Z
0.250	6.35	10937	1.78	45.2	.170	4.3	19	3.3	.51	13	9.5	42	.93	23.6	0.040	1.0	23.3	SPR	CG	N
0.250	6.35	3005	1.81	46.0	.174	4.4	17	3.0	.47	12	8.2	36	.81	20.5	0.038	1.0	20.3	SPR	C	Z
0.250	6.35	11109	1.88	47.6	.210	5.3	1.1	.18	1.5	37	1.5	6.8	.42	10.7	0.020	0.5	20.0	MW	C	Z
0.250	6.35	10860	1.88	47.6	.188	4.8	5.3	.93	1.0	27	5.6	25	.83	21.1	0.031	0.8	25.8	MW	C	BO
0.250	6.35	F-61	1.94	49.2	.142	3.6	83	15	.25	6.3	21	92	1.16	29.5	0.054	1.4	21.5	SPR	CG	Z
0.250	6.35	3730	2.00	50.8	.216	5.5	.68	.12	1.7	43	1.2	5.2	.29	7.3	0.017	0.4	16.0	MW	C	GI
0.250	6.35	2566	2.00	50.8	.214	5.4	.55	.10	1.6	39	.85	3.8	.45	11.4	0.018	0.5	24.0	MW	C	Z
0.250	6.35	B2-45	2.00	50.8	.206	5.2	2.3	.40	1.1	28	2.5	11	.34	8.7	0.022	0.6	14.5	MW	C	Z
0.250	6.35	10191	2.00	50.8	.200	5.1	2.7	.48	1.3	32	3.5	16	.53	13.3	0.025	0.6	20.0	MW	C	Z
0.250	6.35	4251	2.00	50.8	.200	5.1	1.9	.33	1.3	32	2.4	11	.73	18.4	0.025	0.6	28.0	MW	C	Z
0.250	6.35	3511	2.00	50.8	.198	5.0	2.7	.47	1.4	34	3.6	16	.65	16.5	0.026	0.7	24.0	MW	C	Z
0.250	6.35	A14-35	2.00	50.8	.178	4.5	11	1.9	.64	16	7.0	31	.89	22.6	0.036	0.9	24.8	SPR	CG	N
0.250	6.35	L-60	2.02	51.2	.170	4.3	17	2.9	.57	15	9.5	42	1.04	26.4	0.040	1.0	26.0	SPR	CG	Z
0.250	6.35	S-3183	2.13	54.0	.168	4.3	14	2.4	.70	18	9.5	42	1.25	31.8	0.041	1.0	30.5	SST	CG	N
0.250	6.35	10430	2.22	56.4	.180	4.6	16	2.7	.42	11	6.4	29	.60	15.1	0.035	0.9	16.0	SPR	C	Z
0.250	6.35	F-99	2.25	57.2	.192	4.9	3.1	.55	1.3	33	4.1	18	.96	24.3	0.029	0.7	32.0	MW	C	Z
0.250	6.35	O-43	2.34	59.5	.192	4.9	4.3	.75	1.3	32	5.4	24	.73	18.4	0.029	0.7	24.0	MW	C	N
0.250	6.35	B10-41	2.38	60.3	.200	5.1	3.8	.66	.92	23	3.5	16	.40	10.2	0.025	0.6	15.0	MW	C	Z
0.250	6.35	4119	2.50	63.5	.190	4.8	4.7	.81	1.3	33	6.0	27	.80	20.2	0.030	0.8	25.5	MW	C	Z
0.250	6.35	OO-56	2.66	67.5	.170	4.3	12	2.1	.77	20	9.5	42	1.38	35.1	0.040	1.0	34.5	SPR	CG	BO
0.250	6.35	O-55	2.69	68.2	.202	5.1	2.0	.35	1.7	42	3.3	15	.57	14.5	0.024	0.6	22.8	MW	C	Z
0.250	6.35	A-79	2.75	69.9	.194	4.9	4.0	.71	1.2	31	4.9	22	.64	16.4	0.028	0.7	22.0	MW	C	N
0.250	6.35	LL-17	2.78	70.6	.190	4.8	2.6	.46	1.4	36	3.7	17	1.35	34.3	0.030	0.8	44.0	MW	C	N
0.250	6.35	W-55	3.00	76.2	.166	4.2	17	2.9	.66	17	11	48	1.39	35.2	0.042	1.1	32.0	SPR	C	Z
0.250	6.35	11477	3.03	77.0	.160	4.1	22	3.9	.60	15	13	59	1.53	38.9	0.045	1.1	33.0	SPR	CG	Z
0.250	6.35	12743	3.13	79.4	.178	4.5	5.6	.98	1.2	32	7.0	31	1.69	43.0	0.036	0.9	46.0	SPR	C	N
0.250	6.35	12505	3.38	85.7	.170	4.3	9.5	1.7	1.0	25	9.5	42	1.80	45.7	0.040	1.0	44.0	SPR	C	N
0.250	6.35	S-1001	3.75	95.3	.198	5.0	.91	.16	2.2	56	2.0	8.9	1.53	39.0	0.026	0.7	58.0	SST	C	N
0.250	6.35	S-1504	4.00	101.6	.200	5.1	.73	.13	2.5	62	1.8	7.9	1.55	39.4	0.025	0.6	61.0	SST	C	N
0.250	6.35	2822	4.75	120.7	.170	4.3	6.3	1.1	1.5	38	9.5	42	2.60	66.0	0.040	1.0	65.0	SPR	CG	GI
0.250	6.35	3946	4.88	123.8	.180	4.6	3.4	.59	1.9	48	6.4	29	2.31	58.7	0.035	0.9	66.0	SPR	CG	GI
0.250	6.35	B10-55	4.88	123.8	.174	4.4	4.8	.85	1.7	43	8.2	36	2.55	64.7	0.038	1.0	67.0	SPR	CG	Z
0.250	6.35	12708	6.50	165.1	.178	4.5	2.5	.44	2.9	73	7.2	32	3.64	92.4	0.036	0.9	100.0	MW	C	N
0.262	6.65	12798	.86	21.8	.166	4.2	80	14	.27	6.8	21	94	.56	14.3	0.048	1.2	11.8	MW	CG	N
0.266	6.76	W-46	.19	4.8	.232	5.9	5.2	.92	.11	2.8	.59	2.6	.08	1.9	0.017	0.4	3.50	MW	C	Z
0.266	6.76	J-77	.22	5.6	.176	4.5	277	48	.04	.99	11	48	.18	4.6	0.045	1.1	4.00	SPR	CG	N
0.266	6.76	EE-27	.28	7.1	.236	6.0	1.4	.24	.19	4.9	.26	1.2	.09	2.3	0.015	0.4	5.00	SST	C	N
0.266	6.76	B5-63	.31	7.9	.246	6.2	.17	.03	.23	5.9	.04	.18	.08	2.0	0.010	0.3	7.00	MW	C	N
0.266	6.76	CC-52	.31	7.9	.220	5.6	10	1.8	.18	4.6	1.9	8.3	.13	3.4	0.023	0.6	4.75	MW	C	N
0.266	6.76	O-27	.31	7.9	.206	5.2	45	7.9	.13	3.2	5.6	25	.15	3.8	0.030	0.8	4.00	MW	C	N
0.266	6.76	S-1389	.31	7.9	.206	5.2	31	5.5	.12	3.1	3.8	17	.17	4.2	0.030	0.8	4.50	SST	C	N
0.266	6.76	I-84	.31	7.9	.196	5.0	59	10	.10	2.6	6.1	27	.18	4.4	0.035	0.9	5.00	SPR	CG	Z
0.266	6.76	U-72	.34	8.7	.206	5.2	30	5.2	.19	4.8	5.6	25	.15	3.8	0.030	0.8	5.00	MW	CG	N
0.266	6.76	EE-26	.38	9.5	.214	5.4	8.4	1.5	.19	4.9	1.6	7.2	.18	4.6	0.026	0.7	7.00	SST	CG	N
0.266	6.76	Y-5	.38	9.5	.210	5.3	19	3.4	.16	4.1	3.1	14	.14	3.6	0.028	0.7	5.00	SST	CG	N
0.266	6.76	S-1112	.38	9.5	.202	5.1	35	6.0	.13	3.4	4.6	20	.16	4.1	0.032	0.8	5.00	SST	CG	N
0.266	6.76	S-815	.38	9.5	.160	4.1	345	60	.05	1.3	18	78	.27	6.7	0.053	1.3	5.00	SST	CG	N
0.266	6.76	B2-38	.39	9.9	.210	5.3	22	3.8	.21	5.4	4.6	20	.17	4.3	0.028	0.7	5.00	MW	C	N
0.266	6.76	FF-5	.44	11.1	.242	6.1	.20	.04	.31	7.8	.06	.27	.13	3.4	0.012	0.3	10.0	SST	C	N
0.266	6.76	10790	.44	11.1	.206	5.2	20	3.4	.19	4.9	3.8	17	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.266	6.76	A9-6	.44	11.1	.184	4.7	90	16	.11	2.7	9.6	43	.25	6.2	0.041	1.0	6.00	SPR	CG	N
0.266	6.76	NN-43	.44	11.1	.184	4.7	58	10	.13	3.3	7.6	34	.31	7.8	0.041	1.0	7.50	SST	CG	N
0.266	6.76	12032	.47	11.9	.240	6.1	.53	.09	.37	9.3	.20	.87	.10	2.6	0.013	0.3	6.75	MW	C	N
0.266	6.76	KK-45	.47	11.9	.230	5.8	2.0	.35	.32	8.2	.65	2.9	.14	3.7	0.018	0.5	7.00	MW	C	Z
0.266	6.76	3416	.47	11.9	.226	5.7	3.1	.55	.31	7.8	.96	4.3	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.266	6.76	3232	.47	11.9	.214	5.4	19	3.4	.19	4.9	3.7	16	.14	3.6	0.026	0.7	4.50	MW	C	Z
0.266	6.76	S-1024	.47	11.9	.204	5.2	31	5.4	.14	3.4	4.2	18	.16	3.9	0.031	0.8	5.00	SST	CG	N
0.266	6.76	S-1484	.47	11.9	.196	5.0	77	13	.07	1.9	5.7	25	.18	4.4	0.035	0.9	4.00	SST	C	N
0.266	6.76	I-36	.50	12.7	.226	5.7	3.2	.56	.36	9.0	1.1	5.1	.15	3.7	0.020	0.5	6.25	SST	C	N
0.266	6.76	L-65	.50	12.7	.226	5.7	3.4	.60	.35	9.0	1.2	5.3	.14	3.6	0.020	0.5	6.00	SST	C	N
0.266	6.76	W-61	.50	12.7	.218	5.5	11	2.0	.27	6.9	3.1	14	.14	3.7	0.024	0.6	5.00	MW	C	N
0.266	6.76	10802	.50	12.7	.216	5.5	8.9	1.6	.25	6.3	2.2	9.8	.15	3.8	0.025	0.6	6.00	SST	CG	N
0.266	6.76	10096	.50	12.7	.208	5.3	26	4.5	.20	5.0	5.1	23	.17	4.4	0.029	0.7	5.00	MW	C	Z
0.266	6.76	B-55	.50	12.7	.206	5.2	26	4.6	.15	3.7	3.8	17	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.266	6.76	JJ-15	.50	12.7	.206	5.2	18	3.1	.26	6.6	4.7	21	.24	6.1	0.030	0.8	7.00	MW	C	N
0.266	6.76	MM-13	.50	12.7	.206	5.2	20	3.4	.29	7.3	5.6	25	.20	5.0	0.030	0.8	6.50	MW	CG	GI
0.266	6.76	BB-29	.50	12.7	.196	5.0	31	5.4	.18	4.7	5.7	25	.25	6.2	0.035	0.9	7.00	SST	CG	N
0.266	6.76	B9-40	.50	12.7	.194	4.9	31	5.3	.19	4.9	5.9	26	.31	7.8	0.036	0.9	8.50	SPR	CG	Z
0.266	6.76	S-1212	.50	12.7	.192	4.9	30	5.3	.15	3.8	4.5	20	.35	8.9	0.037	0.9	8.50	SST	C	N
0.266	6.76	S-406	.50	12.7	.192	4.9	50	8.8	.13	3.4	6.7	30	.22	5.6	0.037	0.9	6.00	SST	CG	N
0.266	6.76	RR-7	.50	12.7	.160	4.1	238	42	.08	1.9	18	80	.42	10.8	0.053	1.3	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.266	6.76	W-14	.50	12.7	.146	3.7	376	66	.07	1.7	25	111	.42	10.7	0.060	1.5	7.00	SST	CG	N
0.266	6.76	NN-49	.50	12.7	.142	3.6	491	86	.06	1.4	27	121	.40	10.2	0.062	1.6	6.50	SST	CG	N
0.266	6.76	O-146	.53	13.5	.202	5.1	26	4.5	.18	4.5	4.6	20	.19	4.9	0.032	0.8	6.00	SST	CG	N
0.266	6.76	UU-40	.53	13.5	.202	5.1	24	4.2	.21	5.2	4.9	22	.26	6.5	0.032	0.8	7.00	SPR	C	N
0.266	6.76	N-62	.53	13.5	.196	5.0	30	5.2	.21	5.2	6.1	27	.28	7.1	0.035	0.9	8.00	SPR	CG	N
0.266	6.76	B-53	.53	13.5	.180	4.6	95	17	.12	3.0	11	49	.29	7.4	0.043	1.1	6.75	SPR	CG	Z
0.266	6.76	A-73	.56	14.3	.238	6.0	.87	.15	.46	12	.41	1.8	.10	2.5	0.014	0.4	6.00	MW	C	GI
0.266	6.76	JJ-45	.56	14.3	.210	5.3	8.2	1.4	.28	7.2	2.3	10	.28	7.1	0.028	0.7	9.00	SST	C	N
0.266	6.76	JJ-91	.56	14.3	.210	5.3	9.5	1.7	.28	7.2	2.7	12	.28	7.1	0.028	0.7	9.00	MW	C	N
0.266	6.76	3713	.56	14.3	.202	5.1	24	4.2	.29	7.3	6.8	30	.22	5.7	0.032	0.8	7.00	MW	CG	Z
0.266	6.76	A11-60	.56	14.3	.202	5.1	17	2.9	.27	6.9	4.6	20	.27	6.8	0.032	0.8	8.33	SST	CG	N
0.266	6.76	L-85	.56	14.3	.192	4.9	41	7.2	.17	4.4	7.2	32	.28	7.0	0.037	0.9	7.50	SPR	CG	Z
0.266	6.76	B11-33	.59	15.1	.230	5.8	.82	.14	.34	8.7	.28	1.3	.25	6.4	0.018	0.5	14.0	MW	CG	N
0.266	6.76	A10-35	.59	15.1	.204	5.2	20	3.6	.20	5.2	4.2	18	.23	5.9	0.031	0.8	6.50	SST	C	N
0.266	6.76	O-143	.59	15.1	.186	4.7	70	12	.12	3.0	8.4	37	.28	7.1	0.040	1.0	6.00	SST	C	N
0.266	6.76	II-99	.59	15.1	.172	4.4	150	26	.09	2.3	13	59	.28	7.2	0.047	1.2	6.00	SST	CG	N
0.266	6.76	H-27	.63	15.9	.208	5.3	13	2.3	.39	10	5.1	23	.23	5.9	0.029	0.7	8.00	MW	CG	N
0.266	6.76	S-156	.63	15.9	.204	5.2	30	5.3	.14	3.5	4.2	18	.19	4.7	0.031	0.8	5.00	SST	C	N
0.266	6.76	B8-34	.66	16.7	.212	5.4	9.0	1.6	.31	7.8	2.8	12	.20	5.1	0.027	0.7	7.50	SST	CG	N
0.266	6.76	3568	.66	16.7	.208	5.3	13	2.3	.40	10	5.1	23	.26	6.6	0.029	0.7	8.00	MW	C	Z
0.266	6.76	UU-37	.66	16.7	.186	4.7	35	6.1	.24	6.1	8.4	37	.40	10.2	0.040	1.0	10.0	SST	CG	N
0.266	6.76	N-12	.69	17.4	.248	6.3	.05	.01	.57	15	.03	.13	.11	2.9	0.009	0.2	11.8	SST	C	N
0.266	6.76	A13-51	.69	17.4	.238	6.0	.25	.04	.45	11	.11	.50	.24	6.0	0.014	0.4	16.0	SPR	C	N
0.266	6.76	II-88	.69	17.4	.216	5.5	3.5	.62	.36	9.2	1.3	5.7	.33	8.3	0.025	0.6	12.0	SST	C	N
0.266	6.76	B11-52	.69	17.4	.208	5.3	13	2.2	.40	10	5.1	23	.23	5.9	0.029	0.7	8.00	MW	CG	N
0.266	6.76	10897	.69	17.4	.184	4.7	61	11	.15	3.8	9.0	40	.30	7.6	0.041	1.0	7.25	SST	CG	N
0.266	6.76	A9-64	.69	17.4	.180	4.6	72	13	.14	3.6	10	46	.32	8.1	0.043	1.1	7.50	SST	CG	N
0.266	6.76	L-90	.69	17.4	.168	4.3	127	22	.13	3.2	16	71	.42	10.6	0.049	1.2	8.50	SPR	CG	GI
0.266	6.76	HH-71	.72	18.2	.184	4.7	40	7.0	.24	6.1	9.6	43	.45	11.5	0.041	1.0	11.0	SPR	CG	GI
0.266	6.76	3104	.75	19.1	.238	6.0	.58	.10	.62	16	.36	1.6	.13	3.2	0.014	0.4	8.00	MW	C	Z
0.266	6.76	A-50	.75	19.1	.236	6.0	.29	.05	.47	12	.14	.60	.29	7.2	0.015	0.4	18.0	MW	C	Z
0.266	6.76	A-28	.75	19.1	.226	5.7	1.3	.23	.49	12	.64	2.9	.27	6.7	0.020	0.5	12.3	SST	C	N
0.266	6.76	A-72	.75	19.1	.216	5.5	5.1	.89	.50	13	2.5	11	.25	6.4	0.025	0.6	10.0	MW	CG	Z
0.266	6.76	4292	.75	19.1	.212	5.4	5.2	.90	.40	10	2.1	9.1	.35	8.9	0.027	0.7	13.0	MW	CG	Z
0.266	6.76	Y-76	.75	19.1	.206	5.2	9.8	1.7	.39	9.8	3.8	17	.30	7.6	0.030	0.8	10.0	SST	CG	N
0.266	6.76	A15-22	.75	19.1	.202	5.1	12	2.1	.39	9.9	4.6	20	.35	8.9	0.032	0.8	11.0	SST	CG	N
0.266	6.76	S-211	.75	19.1	.196	5.0	17	3.0	.33	8.4	5.7	25	.39	9.8	0.035	0.9	11.0	SST	CG	N
0.266	6.76	FF-28	.81	20.6	.222	5.6	3.4	.59	.59	15	2.0	8.8	.22	5.6	0.022	0.6	9.00	MW	C	Z
0.266	6.76	Q-66	.81	20.6	.220	5.6	6.2	1.1	.29	7.4	1.8	8.1	.16	4.1	0.023	0.6	6.00	SST	C	N
0.266	6.76	S-907	.81	20.6	.198	5.0	19	3.4	.28	7.1	5.4	24	.31	7.8	0.034	0.9	9.00	SST	CG	N
0.266	6.76	LL-46	.84	21.4	.222	5.6	2.2	.39	.57	15	1.3	5.6	.27	6.8	0.022	0.6	11.3	SST	C	N
0.266	6.76	N-128	.84	21.4	.206	5.2	20	3.4	.29	7.3	5.6	25	.23	5.7	0.030	0.8	6.50	MW	C	Z
0.266	6.76	VV-17	.88	22.2	.236	6.0	.31	.05	.64	16	.20	.88	.24	6.1	0.015	0.4	15.0	SST	C	N
0.266	6.76	Y-72	.88	22.2	.196	5.0	22	3.9	.27	7.0	6.1	27	.39	9.8	0.035	0.9	10.0	SPR	C	N
0.266	6.76	S-1585	.88	22.2	.184	4.7	29	5.0	.31	8.0	9.0	40	.53	13.5	0.041	1.0	13.0	SST	CG	N
0.266	6.76	XX-67	.88	22.2	.180	4.6	37	6.6	.27	6.9	10	45	.60	15.3	0.043	1.1	14.0	SPR	CG	Z
0.266	6.76	S-1527	.88	22.2	.176	4.5	51	8.9	.23	5.9	12	52	.56	14.3	0.045	1.1	11.5	SST	C	N
0.266	6.76	3774	.94	23.8	.216	5.5	2.9	.51	.54	14	1.6	6.9	.40	10.2	0.025	0.6	16.0	MW	CG	Z
0.266	6.76	3732	.94	23.8	.192	4.9	19	3.3	.38	9.6	7.2	32	.52	13.2	0.037	0.9	14.0	SPR	CG	Z
0.266	6.76	NN-71	.94	23.8	.146	3.7	251	44	.11	2.7	26	118	.63	16.0	0.060	1.5	10.5	SPR	CG	N
0.266	6.76	00-9	.97	24.6	.206	5.2	7.1	1.3	.53	13	3.8	17	.39	9.9	0.030	0.8	13.0	SST	CG	N
0.266	6.76	AA-41	1.00	25.4	.226	5.7	1.5	.26	.73	19	1.1	4.8	.27	6.9	0.020	0.5	12.5	MW	C	Z
0.266	6.76	KK-65	1.00	25.4	.208	5.3	8.1	1.4	.63	16	5.1	23	.36	9.2	0.029	0.7	11.5	MW	C	Z
0.266	6.76	L-43	1.00	25.4	.206	5.2	13	2.2	.44	11	5.6	25	.30	7.6	0.030	0.8	9.00	MW	C	Z
0.266	6.76	S-203	1.00	25.4	.202	5.1	9.4	1.6	.48	12	4.6	20	.45	11.4	0.032	0.8	13.0	SST	C	N
0.266	6.76	2895	1.00	25.4	.198	5.0	14	2.5	.56	14	7.9	35	.44	11.2	0.034	0.9	13.0	MW	CG	Z
0.266	6.76	JJ-69	1.00	25.4	.166	4.2	105	18	.15	3.8	16	71	.53	13.3	0.050	1.3	10.5	SPR	CG	N
0.266	6.76	12586	1.03	26.2	.216	5.5	3.3	.59	.66	17	2.2	9.8	.38	9.5	0.025	0.6	14.0	MW	C	Z
0.266	6.76	10537	1.03	26.2	.202	5.1	9.8	1.7	.58	15	5.7	25	.45	11.4	0.032	0.8	14.0	MW	CG	Z
0.266	6.76	B7-19	1.06	27.0	.210	5.3	5.7	1.0	.68	17	3.9	17	.38	9.6	0.028	0.7	13.5	MW	CG	N
0.266	6.76	A9-58	1.06	27.0	.204	5.2	6.8	1.2	.55	14	3.7	17	.51	13.0	0.031	0.8	15.5	SST	C	N
0.266	6.76	S-1151	1.06	27.0	.190	4.8	17	3.0	.42	11	7.2	32	.57	14.5	0.038	1.0	15.0	SST	CG	N
0.266	6.76	A15-28	1.09	27.8	.194	4.9	15	2.6	.44	11	6.6	29	.59	15.1	0.036	0.9	15.5	SPR	C	Z
0.266	6.76	N-43	1.13	28.6	.236	6.0	.31	.05	.89	22	.28	1.2	.24	6.1	0.015	0.4	15.0	SST	C	N
0.266	6.76	4195	1.13	28.6	.228	5.8	.90	.16	.80	20	.72	3.2	.32	8.2	0.019	0.5	16.0	MW	C	Z
0.266	6.76	VV-14	1.13	28.6	.220	5.6	2.9	.51	.63	16	1.8	8.1	.26	6.7	0.023	0.6	10.5	SST	C	N
0.266	6.76	2523	1.13	28.6	.208	5.3	5.7	.99	.65	16	3.7	16	.48	12.2	0.029	0.7	15.5	MW	C	Z
0.266	6.76	10350	1.13	28.6	.176	4.5	44	7.7	.29	7.3	13	56	.65	16.6	0.045	1.1	14.5	SPR	CG	N
0.266	6.76	B7-12	1.13	28.6	.176	4.5	38	6.7	.33	8.3	13	56	.73	18.6	0.045	1.1	16.3	SPR	CG	N
0.266	6.76	EE-43	1.13	28.6	.166	4.2	63	11	.24	6.0	15	66	.73	18.4	0.050	1.3	14.5	SST	CG	N
0.266	6.76	3612	1.16	29.4	.198	5.0	16	2.9	.50	13	8.1	36	.43	10.8	0.034	0.9	11.5	MW	C	Z
0.266	6.76	Y-60	1.16	29.4	.196	5.0	12	2.1	.56	14	6.6	29	.60	15.1	0.035	0.9	17.0	MW	CG	GI
0.266	6.76	10485	1.16	29.4	.182	4.6	24	4.2	.34	8.6	8.1	36	.82	20.8	0.042	1.1	18.5	SPR	C	Z
0.266	6.76	S-1329	1.16	29.4	.172	4.4	45	7.9	.29	7.5	13	59	.71	17.9	0.047	1.2	15.0	SST	CG	N
0.266	6.76	10190	1.19	30.2	.218	5.5	3.1	.54	.85	22	2.6	12	.34	8.5	0.024	0.6	13.0	MW	C	Z
0.266	6.76	LL-81	1.19	30.2	.212	5.4	6.0	1.0	.69	18	4.1	18	.34	8.6	0.027	0.7	11.5	MW	C	Z
0.266	6.76	3524	1.22	31.0	.172	4.4	52	9.1	.27	7.0	14	63	.71	17.9	0.047	1.2	15.0	SPR	CG	Z
0.266	6.76	A-40	1.25	31.8	.216	5.5	3.7	.65	.89	23	3.3	15	.35	8.9	0.025	0.6	13.0	MW	C	Z
0.266	6.76	B8-2	1.28	32.5	.198	5.0	17	3.0	.34	8.7	5.9	26	.41	10.4	0.034	0.9	11.0	SPR	C	N
0.266	6.76	TT-62	1.31	33.3	.206	5.2	3.9	.68	.53	14	2.1	9.2	.78	19.8	0.030	0.8	25.0	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.266	6.76	M-26	1.38	34.9	.236	6.0	.38	.07	1.2	29	.44	2.0	.23	5.7	0.015	0.4	14.0	MW	C	Z
0.266	6.76	VV-59	1.38	34.9	.232	5.9	.79	.14	1.2	29	.91	4.0	.22	5.6	0.017	0.4	12.0	MW	C	Z
0.266	6.76	3264	1.38	34.9	.206	5.2	4.3	.75	.66	17	2.8	12	.72	18.3	0.030	0.8	23.0	MW	C	Z
0.266	6.76	3844	1.38	34.9	.206	5.2	3.9	.68	.60	15	2.3	10	.78	19.8	0.030	0.8	25.0	MW	C	N
0.266	6.76	S-1494	1.38	34.9	.170	4.3	39	6.8	.37	9.3	14	63	.90	22.9	0.048	1.2	18.8	SST	CG	N
0.266	6.76	10952	1.41	35.7	.184	4.7	28	4.9	.34	8.7	9.6	43	.65	16.4	0.041	1.0	14.8	SPR	C	N
0.266	6.76	12418	1.44	36.5	.218	5.5	3.1	.54	1.1	28	3.16	14.1	.34	8.5	0.024	0.6	13.0	MW	C	N
0.266	6.76	YY-57	1.44	36.5	.200	5.1	11	2.0	.47	12	5.4	24	.50	12.6	0.033	0.8	14.0	SPR	C	Z
0.266	6.76	11191	1.47	37.3	.186	4.7	24	4.2	.37	9.5	9.0	40	.65	16.5	0.040	1.0	15.3	SPR	C	Z
0.266	6.76	11418	1.50	38.1	.186	4.7	25	4.3	.37	9.3	9.0	40	.64	16.3	0.040	1.0	15.0	SPR	C	Z
0.266	6.76	2886	1.53	38.9	.200	5.1	8.0	1.4	.67	17	5.4	24	.53	13.4	0.033	0.8	16.0	SPR	CG	GI
0.266	6.76	1515	1.53	38.9	.196	5.0	12	2.2	.69	17	8.4	37	.57	14.5	0.035	0.9	16.3	MW	CG	GI
0.266	6.76	S-1354	1.56	39.7	.204	5.2	6.9	1.2	.60	15	4.2	18	.50	12.6	0.031	0.8	15.0	SST	C	N
0.266	6.76	3198	1.56	39.7	.202	5.1	9.2	1.6	.74	19	6.8	30	.51	13.0	0.032	0.8	15.0	MW	C	Z
0.266	6.76	NN-33	1.63	41.3	.222	5.6	1.3	.22	1.2	31	1.6	7.0	.40	10.1	0.022	0.6	18.0	SST	CG	N
0.266	6.76	3528	1.69	42.8	.212	5.4	2.0	.34	.85	22	1.7	7.4	.84	21.3	0.027	0.7	31.0	MW	CG	Z
0.266	6.76	2530	1.78	45.2	.220	5.6	.73	.13	.83	21	.60	2.7	.96	24.3	0.023	0.6	40.5	MW	C	Z
0.266	6.76	B11-56	1.88	47.6	.204	5.2	6.8	1.2	.91	23	6.2	28	.56	14.2	0.031	0.8	17.0	MW	C	Z
0.266	6.76	10043	1.88	47.6	.196	5.0	18	3.1	.34	8.7	6.1	27	.46	11.6	0.035	0.9	12.0	SPR	C	Z
0.266	6.76	A10-2	1.88	47.6	.170	4.3	88	15	.17	4.4	15	67	.50	12.8	0.048	1.2	10.5	SPR	CG	N
0.266	6.76	DD-66	1.94	49.2	.192	4.9	7.6	1.3	.88	22	6.7	30	1.04	26.3	0.037	0.9	28.0	SST	CG	N
0.266	6.76	3300	2.00	50.8	.210	5.3	3.7	.65	1.2	32	4.6	20	.59	14.9	0.028	0.7	20.0	MW	C	Z
0.266	6.76	3784	2.00	50.8	.190	4.8	9.9	1.7	.78	20	7.7	34	1.10	28.0	0.038	1.0	28.0	SPR	C	Z
0.266	6.76	10755	2.06	52.4	.192	4.9	7.7	1.3	.88	22	6.7	30	1.07	27.3	0.037	0.9	28.0	SST	C	N
0.266	6.76	10892	2.13	54.0	.222	5.6	1.0	.18	1.5	39	1.6	7.1	.48	12.3	0.022	0.6	22.0	SST	CG	N
0.266	6.76	YY-52	2.13	54.0	.176	4.5	25	4.4	.47	12	12	52	.99	25.1	0.045	1.1	21.0	SST	C	N
0.266	6.76	U-44	2.25	57.2	.214	5.4	1.9	.32	1.5	38	2.8	12	.75	19.2	0.026	0.7	28.0	MW	C	Z
0.266	6.76	K-91	2.25	57.2	.158	4.0	52	9.1	.38	9.6	20	88	1.46	37.0	0.054	1.4	27.0	SPR	CG	Z
0.266	6.76	II-28	2.28	57.9	.166	4.2	24	4.2	.53	13	13	57	1.75	44.5	0.050	1.3	35.0	SST	CG	N
0.266	6.76	3312	2.31	58.7	.212	5.4	2.5	.43	1.6	41	4.0	18	.70	17.8	0.027	0.7	25.0	MW	C	Z
0.266	6.76	OO-5	2.31	58.7	.146	3.7	77	14	.34	8.7	26	118	1.77	45.0	0.060	1.5	29.5	SPR	CG	Z
0.266	6.76	3915	2.50	63.5	.190	4.8	9.0	1.6	.86	22	7.7	34	1.20	30.4	0.038	1.0	30.5	SPR	C	Z
0.266	6.76	11462	3.00	76.2	.190	4.8	9.0	1.6	1.2	30	11	48	1.14	29.0	0.038	1.0	30.0	MW	CG	Z
0.266	6.76	UU-55	4.00	101.6	.212	5.4	.88	.15	2.4	61	2.1	9.4	1.59	40.5	0.027	0.7	58.0	SST	C	N
0.266	6.76	10435	4.06	103.2	.184	4.7	7.9	1.4	1.2	31	9.6	43	1.93	48.9	0.041	1.0	47.0	SPR	CG	N
0.275	6.99	A16-69	.94	23.8	.177	4.5	80	14	.27	6.9	22	96	.54	13.7	0.049	1.2	11.0	MW	CG	Z
0.281	7.14	10688	.22	5.6	.231	5.9	33	5.9	.09	2.4	3.1	14	.10	2.5	0.025	0.6	3.00	MW	C	N
0.281	7.14	10684	.25	6.4	.221	5.6	29	5.1	.09	2.3	2.7	12	.16	4.0	0.030	0.8	4.25	SST	C	N
0.281	7.14	12653	.25	6.4	.221	5.6	49	8.6	.11	2.8	5.4	24	.14	3.4	0.030	0.8	3.50	MW	C	N
0.281	7.14	OO-62	.25	6.4	.217	5.5	49	8.5	.10	2.4	4.7	21	.13	3.3	0.032	0.8	4.00	SPR	CG	N
0.281	7.14	DD-26	.28	7.1	.217	5.5	22	3.8	.09	2.3	1.9	8.6	.19	4.9	0.032	0.8	6.00	SST	CG	N
0.281	7.14	VV-63	.28	7.1	.211	5.4	72	13	.08	2.0	5.8	26	.18	4.4	0.035	0.9	4.00	SPR	C	Z
0.281	7.14	A9-56	.31	7.9	.257	6.5	.34	.06	.22	5.6	.08	.34	.09	2.3	0.012	0.3	6.50	MW	C	N
0.281	7.14	L-83	.31	7.9	.229	5.8	11	2.0	.18	4.6	2.1	9.3	.13	3.3	0.026	0.7	5.00	SST	CG	N
0.281	7.14	11439	.34	8.7	.221	5.6	29	5.1	.12	3.1	3.6	16	.16	4.0	0.030	0.8	4.25	SST	C	N
0.281	7.14	933	.38	9.5	.201	5.1	75	13	.11	2.9	8.5	38	.26	6.6	0.040	1.0	5.50	HD	C	Z
0.281	7.14	WW-46	.38	9.5	.175	4.4	319	56	.06	1.4	18	80	.27	6.7	0.053	1.3	5.00	SPR	CG	Z
0.281	7.14	930	.38	9.5	.173	4.4	348	61	.05	1.3	18	79	.32	8.2	0.054	1.4	5.00	HD	C	Z
0.281	7.14	I-72	.38	9.5	.131	3.3	2601	456	.02	.43	44	196	.30	7.6	0.075	1.9	4.00	SPR	CG	N
0.281	7.14	II-51	.41	10.3	.249	6.3	.68	.12	.25	6.5	.17	.77	.15	3.9	0.016	0.4	8.50	SST	C	N
0.281	7.14	10744	.41	10.3	.225	5.7	18	3.2	.24	6.0	4.3	19	.17	4.3	0.028	0.7	5.00	MW	C	N
0.281	7.14	Z-13	.41	10.3	.211	5.4	32	5.5	.17	4.4	5.4	24	.21	5.3	0.035	0.9	6.00	SST	C	N
0.281	7.14	NN-17	.41	10.3	.147	3.7	985	173	.03	.89	34	153	.34	8.5	0.067	1.7	5.00	SPR	CG	Z
0.281	7.14	J-12	.41	10.3	.139	3.5	1315	230	.03	.74	38	170	.36	9.0	0.071	1.8	5.00	SPR	CG	N
0.281	7.14	MM-61	.44	11.1	.251	6.4	.34	.06	.24	6.2	.08	.36	.20	5.0	0.015	0.4	12.0	SST	C	N
0.281	7.14	NN-14	.44	11.1	.243	6.2	1.6	.29	.28	7.0	.46	2.0	.16	4.1	0.019	0.5	7.50	SST	C	N
0.281	7.14	2913	.44	11.1	.211	5.4	48	8.5	.12	3.0	5.8	26	.21	5.3	0.035	0.9	5.00	SPR	C	Z
0.281	7.14	EE-13	.44	11.1	.211	5.4	36	6.3	.15	3.8	5.4	24	.19	4.9	0.035	0.9	5.50	SST	CG	N
0.281	7.14	RR-56	.44	11.1	.209	5.3	41	7.2	.15	3.9	6.3	28	.25	6.4	0.036	0.9	6.00	SPR	C	Z
0.281	7.14	3900	.44	11.1	.201	5.1	66	12	.13	3.3	8.5	38	.28	7.1	0.040	1.0	6.00	SPR	C	Z
0.281	7.14	AA-20	.44	11.1	.201	5.1	47	8.2	.16	4.0	7.4	33	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.281	7.14	B-79	.44	11.1	.187	4.7	136	24	.09	2.4	13	57	.26	6.6	0.047	1.2	5.50	SST	CG	N
0.281	7.14	S-1058	.44	11.1	.173	4.4	260	45	.07	1.7	18	79	.30	7.5	0.054	1.4	5.50	SST	CG	N
0.281	7.14	A9-1	.47	11.9	.237	6.0	2.3	.40	.26	6.6	.59	2.6	.21	5.3	0.022	0.6	9.50	SST	CG	N
0.281	7.14	DD-18	.47	11.9	.217	5.5	9.6	1.7	.08	2.1	.81	3.6	.38	9.8	0.032	0.8	11.0	SST	C	N
0.281	7.14	10945	.47	11.9	.215	5.5	37	6.5	.19	4.8	7.1	31	.20	5.0	0.033	0.8	5.00	MW	C	Z
0.281	7.14	A-63	.47	11.9	.203	5.2	78	14	.10	2.6	7.9	35	.20	5.0	0.039	1.0	5.00	SPR	CG	Z
0.281	7.14	J-66	.47	11.9	.189	4.8	104	18	.12	3.1	13	57	.31	7.9	0.046	1.2	6.75	SPR	CG	N
0.281	7.14	W-87	.50	12.7	.257	6.5	.12	.02	.33	8.3	.04	.17	.17	4.4	0.012	0.3	13.5	SST	C	N
0.281	7.14	A12-10	.50	12.7	.253	6.4	.31	.05	.33	8.3	.10	.46	.17	4.4	0.014	0.4	11.3	MW	C	Z
0.281	7.14	JJ-70	.50	12.7	.241	6.1	1.8	.32	.32	8.0	.57	2.5	.19	4.7	0.020	0.5	8.25	SST	C	N
0.281	7.14	2555	.50	12.7	.225	5.7	11	1.9	.28	7.0	3.0	13	.22	5.7	0.028	0.7	7.00	MW	C	Z
0.281	7.14	U-65	.50	12.7	.219	5.6	19	3.3	.30	7.6	5.6	25	.20	5.1	0.031	0.8	6.50	MW	CG	N
0.281	7.14	MM-97	.50	12.7	.173	4.4	265	46	.07	1.7	18	79	.30	7.5	0.054	1.4	5.50	SST	CG	N
0.281	7.14	W-13	.53	13.5	.241	6.1	2.2	.39	.39	9.9	.88	3.9	.14	3.6	0.020	0.5	7.00	SST	CG	N
0.281	7.14	Z-77	.53	13.5	.241	6.1	3.2	.57	.39	9.9	1.3	5.6	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.281	7.14	W-22	.53	13.5	.231	5.9	5.9	1.0	.33	8.4	2.0	8.7	.20	5.1	0.025	0.6	7.00	SST	C	N
0.281	7.14	HH-6	.53	13.5	.221	5.6	8.4	1.5	.24	6.1	2.0	8.9	.29	7.4	0.030	0.8	9.75	SST	CG	N
0.281	7.14	OO-2	.53	13.5	.217	5.5	13	2.3	.26	6.6	3.5	15	.27	6.9	0.032	0.8	8.50	SST	CG	N
0.281	7.14	B-2	.53	13.5	.211	5.4	41	7.2	.14	3.5	5.8	26	.19	4.9	0.035	0.9	5.50	HD	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.281	7.14	B2-37	.55	13.9	.201	5.1	46	8.0	.17	4.4	8.0	36	.32	8.1	0.040	1.0	7.00	SST	C	N
0.281	7.14	S-1078	.56	14.3	.231	5.9	9.7	1.7	.22	5.5	2.1	9.3	.15	3.8	0.025	0.6	14.0	SST	C	N
0.281	7.14	3467	.56	14.3	.229	5.8	13	2.3	.19	4.9	2.5	11	.13	3.3	0.026	0.7	5.00	HD	CG	Z
0.281	7.14	A9-50	.56	14.3	.219	5.6	19	3.3	.31	7.9	5.9	26	.23	5.9	0.031	0.8	6.50	MW	C	GI
0.281	7.14	LL-21	.56	14.3	.219	5.6	21	3.7	.28	7.0	5.9	26	.22	5.5	0.031	0.8	6.00	MW	C	N
0.281	7.14	DD-36	.56	14.3	.205	5.2	30	5.3	.23	5.8	6.9	31	.30	7.7	0.038	1.0	8.00	SST	CG	N
0.281	7.14	K-6	.56	14.3	.201	5.1	66	12	.13	3.3	8.5	38	.24	6.1	0.040	1.0	6.00	SPR	CG	Z
0.281	7.14	Q-13	.56	14.3	.187	4.7	100	17	.14	3.5	14	60	.35	9.0	0.047	1.2	7.50	SPR	CG	Z
0.281	7.14	M-25	.56	14.3	.179	4.5	158	28	.10	2.4	15	67	.33	8.4	0.051	1.3	6.50	SST	CG	N
0.281	7.14	S-1181	.56	14.3	.177	4.5	169	30	.09	2.4	16	71	.34	8.6	0.052	1.3	6.50	SST	CG	N
0.281	7.14	S-1076	.56	14.3	.173	4.4	182	32	.10	2.5	18	79	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.281	7.14	J-57	.59	15.1	.233	5.9	6.6	1.2	.42	11	2.8	12	.17	4.4	0.024	0.6	6.25	MW	C	GI
0.281	7.14	10845	.59	15.1	.231	5.9	4.2	.74	.37	9.3	1.6	6.9	.23	5.7	0.025	0.6	9.00	SST	CG	N
0.281	7.14	S-1366	.59	15.1	.187	4.7	79	14	.16	4.1	13	57	.38	9.6	0.047	1.2	8.00	SST	CG	N
0.281	7.14	S-1044	.59	15.1	.185	4.7	89	16	.15	3.9	14	60	.38	9.8	0.048	1.2	8.00	SST	CG	N
0.281	7.14	11836	.59	15.1	.185	4.7	89	16	.15	3.9	14	60	.38	9.8	0.048	1.2	8.00	SST	CG	N
0.281	7.14	B9-4	.63	15.9	.237	6.0	8.6	1.5	.26	6.7	2.3	10	.12	2.9	0.022	0.6	4.25	MW	C	BO
0.281	7.14	A9-28	.63	15.9	.219	5.6	15	2.7	.36	9.2	5.6	25	.26	6.7	0.031	0.8	7.50	MW	C	GI
0.281	7.14	GG-33	.63	15.9	.205	5.2	29	5.0	.24	6.1	6.9	31	.32	8.2	0.038	1.0	8.50	SST	CG	N
0.281	7.14	3888	.63	15.9	.201	5.1	44	7.7	.19	4.9	8.5	38	.32	8.1	0.040	1.0	8.00	SPR	CG	Z
0.281	7.14	Y-32	.63	15.9	.195	5.0	54	9.4	.18	4.6	9.9	44	.34	8.7	0.043	1.1	8.00	SST	CG	N
0.281	7.14	B-76	.66	16.7	.223	5.7	10	1.8	.32	8.0	3.2	14	.25	6.3	0.029	0.7	7.50	SST	C	N
0.281	7.14	A9-53	.66	16.7	.219	5.6	13	2.2	.31	8.0	3.9	18	.25	6.3	0.031	0.8	8.00	SST	CG	N
0.281	7.14	BB-18	.69	17.4	.257	6.5	.10	.02	.48	12	.05	.20	.20	5.2	0.012	0.3	16.0	SST	C	N
0.281	7.14	12652	.69	17.4	.247	6.3	1.3	.23	.55	14	.72	3.2	.14	3.5	0.017	0.4	7.00	MW	C	Z
0.281	7.14	3543	.69	17.4	.233	5.9	8.0	1.4	.37	9.3	2.9	13	.16	4.0	0.024	0.6	5.50	MW	C	Z
0.281	7.14	B9-42	.69	17.4	.233	5.9	2.3	.41	.35	8.9	.82	3.7	.34	8.5	0.024	0.6	14.0	MW	CG	N
0.281	7.14	JJ-77	.69	17.4	.231	5.9	8.4	1.5	.37	9.5	3.1	14	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.281	7.14	10885	.69	17.4	.221	5.6	11	2.0	.40	10	4.6	20	.29	7.2	0.030	0.8	8.50	MW	C	GI
0.281	7.14	S-1252	.69	17.4	.219	5.6	15	2.6	.27	6.8	3.9	18	.22	5.5	0.031	0.8	7.00	SST	CG	N
0.281	7.14	3592	.69	17.4	.217	5.5	18	3.1	.36	9.3	6.5	29	.27	6.9	0.032	0.8	7.50	MW	C	Z
0.281	7.14	DD-91	.69	17.4	.215	5.5	14	2.4	.34	8.7	4.7	21	.33	8.4	0.033	0.8	9.00	SST	C	N
0.281	7.14	HH-17	.69	17.4	.205	5.2	34	5.9	.20	5.2	6.9	31	.29	7.2	0.038	1.0	7.50	SST	CG	N
0.281	7.14	XX-12	.69	17.4	.187	4.7	100	17	.14	3.5	14	60	.35	9.0	0.047	1.2	7.50	SPR	CG	Z
0.281	7.14	AA-32	.69	17.4	.181	4.6	104	18	.15	3.7	15	67	.45	11.4	0.050	1.3	9.00	SPR	CG	N
0.281	7.14	A-100	.72	18.2	.233	5.9	4.3	.76	.49	12	2.1	9.4	.23	5.8	0.024	0.6	8.50	MW	C	Z
0.281	7.14	10170	.72	18.2	.231	5.9	5.1	.90	.48	12	2.5	11	.24	6.0	0.025	0.6	8.50	MW	C	N
0.281	7.14	DD-41	.72	18.2	.201	5.1	67	12	.12	3.0	8.0	36	.26	6.6	0.040	1.0	5.50	SST	C	N
0.281	7.14	DD-53	.75	19.1	.249	6.3	1.1	.19	.53	14	.59	2.6	.11	2.8	0.016	0.4	6.00	SST	C	N
0.281	7.14	4294	.75	19.1	.231	5.9	5.1	.90	.51	13	2.6	12	.24	6.0	0.025	0.6	8.50	MW	C	N
0.281	7.14	3710	.75	19.1	.225	5.7	9.1	1.6	.48	12	4.4	19	.22	5.7	0.028	0.7	8.00	MW	CG	GI
0.281	7.14	S-927	.75	19.1	.225	5.7	10	1.8	.29	7.3	2.9	13	.22	5.5	0.028	0.7	6.75	SST	C	N
0.281	7.14	M-130	.75	19.1	.219	5.6	9.2	1.6	.41	10	3.8	17	.34	8.7	0.031	0.8	10.0	SST	C	N
0.281	7.14	G-20	.75	19.1	.217	5.5	9.8	1.7	.37	9.3	3.6	16	.38	9.8	0.032	0.8	12.0	HD	CG	N
0.281	7.14	B-91	.75	19.1	.217	5.5	12	2.1	.38	9.7	4.7	21	.35	8.9	0.032	0.8	10.0	HD	C	N
0.281	7.14	G-67	.75	19.1	.201	5.1	31	5.4	.26	6.5	8.0	36	.38	9.7	0.040	1.0	9.50	SST	CG	N
0.281	7.14	VV-68	.75	19.1	.199	5.1	37	6.4	.24	6.0	8.6	38	.41	10.4	0.041	1.0	9.00	SST	C	N
0.281	7.14	S-914	.78	19.8	.249	6.3	1.1	.20	.52	13	.59	2.6	.11	2.8	0.016	0.4	6.00	SST	C	N
0.281	7.14	I-97	.78	19.8	.245	6.2	1.2	.21	.62	16	.76	3.4	.16	4.1	0.018	0.5	8.00	SST	C	N
0.281	7.14	HH-49	.78	19.8	.229	5.8	6.0	1.0	.39	10	2.4	10	.23	5.8	0.026	0.7	7.75	SST	C	N
0.281	7.14	JJ-65	.78	19.8	.201	5.1	29	5.1	.29	7.4	8.5	38	.44	11.2	0.040	1.0	11.0	SPR	CG	Z
0.281	7.14	W-94	.81	20.6	.253	6.4	.42	.07	.69	17	.29	1.3	.13	3.2	0.014	0.4	8.00	SST	C	N
0.281	7.14	S-363	.81	20.6	.251	6.4	.19	.03	.50	13	.09	.41	.32	8.0	0.015	0.4	20.0	SST	C	N
0.281	7.14	O-64	.81	20.6	.219	5.6	10.6	1.9	.375	9.53	4.0	18.1	.280	7.08	0.031	0.8	9.00	SST	CG	N
0.281	7.14	3703	.84	21.4	.191	4.9	56	9.8	.21	5.4	12	53	.45	11.4	0.045	1.1	10.0	SPR	CG	Z
0.281	7.14	3609	.88	22.2	.249	6.3	.46	.08	.65	17	.30	1.3	.22	5.7	0.016	0.4	13.0	MW	C	Z
0.281	7.14	EE-28	.88	22.2	.241	6.1	2.0	.35	.69	17	1.4	6.1	.19	4.8	0.020	0.5	8.50	MW	C	N
0.281	7.14	S-1190	.88	22.2	.223	5.7	12	2.0	.28	7.1	3.2	14	.22	5.7	0.029	0.7	6.75	SST	C	N
0.281	7.14	A10-19	.88	22.2	.213	5.4	15	2.7	.50	13	7.7	34	.35	8.9	0.034	0.9	10.3	MW	CG	N
0.281	7.14	00-64	.88	22.2	.211	5.4	18	3.2	.32	8.1	5.8	26	.35	8.9	0.035	0.9	10.0	SPR	CG	N
0.281	7.14	Q-88	.88	22.2	.209	5.3	21	3.6	.31	7.8	6.3	28	.40	10.1	0.036	0.9	10.0	SPR	C	GI
0.281	7.14	AA-17	.88	22.2	.181	4.6	79	14	.18	4.6	14	63	.50	12.7	0.050	1.3	10.0	SST	CG	N
0.281	7.14	3531	.91	23.0	.201	5.1	29	5.1	.40	10	12	53	.44	11.2	0.040	1.0	11.0	MW	CG	GI
0.281	7.14	U-14	.91	23.0	.199	5.1	37	6.4	.25	6.3	9.2	41	.41	10.4	0.041	1.0	10.0	SPR	CG	GI
0.281	7.14	G-53	.94	23.8	.245	6.2	1.3	.22	.77	19	.98	4.4	.17	4.3	0.018	0.5	8.50	MW	C	N
0.281	7.14	HH-28	.94	23.8	.245	6.2	1.1	.19	.75	19	.83	3.7	.19	4.8	0.018	0.5	9.50	MW	C	BO
0.281	7.14	CC-28	.94	23.8	.241	6.1	1.4	.25	.70	18	1.0	4.5	.24	6.1	0.020	0.5	11.0	MW	C	Z
0.281	7.14	S-107	.94	23.8	.225	5.7	5.8	1.0	.51	13	2.9	13	.32	8.0	0.028	0.7	10.3	SST	C	N
0.281	7.14	10827	1.00	25.4	.251	6.4	.62	.11	.78	20	.48	2.2	.11	2.9	0.015	0.4	7.50	SST	CG	N
0.281	7.14	2632	1.00	25.4	.251	6.4	.32	.06	.78	20	.25	1.1	.23	5.7	0.015	0.4	14.0	MW	C	Z
0.281	7.14	M-128	1.00	25.4	.251	6.4	.43	.08	.82	21	.35	1.6	.18	4.6	0.015	0.4	11.0	MW	C	N
0.281	7.14	A10-44	1.00	25.4	.245	6.2	.58	.10	.73	19	.42	1.9	.27	6.7	0.018	0.5	14.8	SST	CG	N
0.281	7.14	3522	1.00	25.4	.237	6.0	1.9	.34	.71	18	1.4	6.2	.29	7.3	0.022	0.6	12.0	MW	C	Z
0.281	7.14	932	1.00	25.4	.225	5.7	3.9	.68	.52	13	2.0	9.1	.48	12.1	0.028	0.7	16.0	MW	C	Z
0.281	7.14	PP-27	1.00	25.4	.225	5.7	5.0	.87	.59	15	2.9	13	.35	8.9	0.028	0.7	11.5	SST	C	N
0.281	7.14	I-80	1.00	25.4	.221	5.6	7.1	1.2	.50	13	3.6	16	.33	8.4	0.030	0.8	11.0	SST	CG	N
0.281	7.14	4208	1.00	25.4	.219	5.6	9.7	1.7	.61	15	5.9	26	.36	9.3	0.031	0.8	10.8	MW	C	Z
0.281	7.14	Z-84	1.00	25.4	.211	5.4	12	2.1	.49	12	5.8	26	.50	12.7	0.035	0.9	14.3	SPR	CG	N
0.281	7.14	B4-64	1.00	25.4	.205	5.2	21	3.7	.35	8.9	7.4	33	.46	11.6	0.038	1.0	12.0	SPR	CG	N
0.281	7.14	3649	1.00	25.4	.199	5.1	37	6.4	.35	8.8	13	56	.41	10.4	0.041	1.0	10.0	MW	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.281	7.14	S-998	1.00	25.4	.181	4.6	63	11	.23	5.7	14	63	.60	15.2	0.050	1.3	12.0	SST	CG	N
0.281	7.14	BB-51	1.00	25.4	.181	4.6	81	14	.19	4.8	15	67	.55	14.0	0.050	1.3	11.0	SPR	CG	N
0.281	7.14	S-1053	1.00	25.4	.177	4.5	90	16	.18	4.5	16	71	.55	13.9	0.052	1.3	10.5	SST	CG	N
0.281	7.14	934	1.00	25.4	.173	4.4	149	26	.13	3.2	19	84	.54	13.7	0.054	1.4	9.00	HD	C	Z
0.281	7.14	BB-90	1.00	25.4	.173	4.4	104	18	.18	4.6	19	84	.65	16.5	0.054	1.4	12.0	SPR	CG	Z
0.281	7.14	KK-88	1.00	25.4	.157	4.0	202	35	.14	3.5	28	124	.74	18.9	0.062	1.6	12.0	SPR	CG	N
0.281	7.14	10983	1.03	26.2	.219	5.6	8.4	1.5	.47	12	3.9	18	.34	8.7	0.031	0.8	11.0	SST	CG	N
0.281	7.14	11352	1.03	26.2	.211	5.4	9.3	1.6	.44	11	4.2	18	.59	14.9	0.035	0.9	15.8	SST	C	N
0.281	7.14	H-13	1.06	27.0	.237	6.0	1.2	.22	.71	18	.87	3.9	.35	8.9	0.022	0.6	16.0	SST	CG	N
0.281	7.14	Q-92	1.06	27.0	.201	5.1	22	3.8	.39	9.9	8.5	38	.56	14.2	0.040	1.0	14.0	SPR	CG	Z
0.281	7.14	2630	1.09	27.8	.245	6.2	.92	.16	.88	22	.81	3.6	.22	5.5	0.018	0.5	11.0	MW	C	Z
0.281	7.14	L-7	1.09	27.8	.229	5.8	4.4	.77	.78	20	3.4	15	.31	7.9	0.026	0.7	11.0	MW	C	N
0.281	7.14	H-59	1.09	27.8	.211	5.4	11	2.0	.52	13	5.8	26	.53	13.3	0.035	0.9	15.0	SPR	CG	N
0.281	7.14	HH-99	1.13	28.6	.243	6.2	.82	.14	.86	22	.71	3.1	.27	6.8	0.019	0.5	13.0	SST	C	N
0.281	7.14	3995	1.13	28.6	.225	5.7	4.8	.85	.73	18	3.5	16	.40	10.1	0.028	0.7	13.3	MW	C	Z
0.281	7.14	EE-57	1.13	28.6	.221	5.6	6.7	1.2	.71	18	4.7	21	.42	10.7	0.030	0.8	13.0	MW	C	N
0.281	7.14	3510	1.13	28.6	.215	5.5	10	1.8	.66	17	6.7	30	.46	11.7	0.033	0.8	13.0	MW	C	Z
0.281	7.14	2839	1.13	28.6	.213	5.4	9.3	1.6	.56	14	5.2	23	.57	14.5	0.034	0.9	15.8	MW	C	Z
0.281	7.14	3767	1.13	28.6	.211	5.4	13	2.3	.44	11	5.8	26	.46	11.6	0.035	0.9	13.0	SPR	C	Z
0.281	7.14	3450	1.19	30.2	.233	5.9	2.6	.45	.85	22	2.2	9.7	.34	8.5	0.024	0.6	13.0	MW	C	Z
0.281	7.14	A13-52	1.19	30.2	.209	5.3	8.4	1.5	.49	13	4.2	19	.69	17.6	0.036	0.9	19.3	SST	CG	N
0.281	7.14	1729	1.25	31.8	.265	6.7	.04	.01	1.2	30	.04	.19	.09	2.2	0.008	0.2	10.0	MW	C	TI
0.281	7.14	DD-20	1.25	31.8	.245	6.2	1.0	.18	1.1	27	1.1	4.9	.20	5.0	0.018	0.5	10.0	MW	C	N
0.281	7.14	O-83	1.25	31.8	.243	6.2	.80	.14	.95	24	.76	3.4	.30	7.7	0.019	0.5	15.0	MW	C	N
0.281	7.14	410	1.25	31.8	.231	5.9	2.0	.34	.95	24	1.8	8	.31	7.8	0.025	0.6	11.3	B	C	BO
0.281	7.14	3806	1.25	31.8	.225	5.7	5.2	.91	.84	21	4.4	19	.38	9.6	0.028	0.7	12.5	MW	C	GI
0.281	7.14	I-65	1.25	31.8	.225	5.7	4.7	.83	.84	21	4.0	18	.41	10.3	0.028	0.7	13.5	MW	C	Z
0.281	7.14	4212	1.25	31.8	.219	5.6	7.1	1.2	.79	20	5.6	25	.47	11.8	0.031	0.8	14.0	MW	C	Z
0.281	7.14	A11-56	1.25	31.8	.215	5.5	9.3	1.6	.55	14	5.1	23	.46	11.7	0.033	0.8	14.0	SPR	CG	N
0.281	7.14	3585	1.25	31.8	.195	5.0	36	6.4	.29	7.3	11	47	.52	13.1	0.043	1.1	12.0	SPR	CG	Z
0.281	7.14	NN-99	1.25	31.8	.181	4.6	56	9.8	.27	6.9	15	67	.75	19.1	0.050	1.3	15.0	SPR	CG	Z
0.281	7.14	B10-46	1.28	32.5	.211	5.4	16	2.8	.36	9.1	5.8	26	.39	9.8	0.035	0.9	11.0	SPR	CG	N
0.281	7.14	1637	1.28	32.5	.165	4.2	173	30	.13	3.4	23	103	.61	15.5	0.058	1.5	10.5	SPR	CG	Z
0.281	7.14	1927	1.31	33.3	.237	6.0	2.4	.42	.94	24	2.3	10	.24	6.1	0.022	0.6	10.0	MW	C	GI
0.281	7.14	B11-49	1.31	33.3	.199	5.1	33	5.7	.28	7.1	9.2	41	.45	11.5	0.041	1.0	11.0	SPR	CG	Z
0.281	7.14	NN-65	1.34	34.1	.229	5.8	3.6	.63	.98	25	3.5	16	.36	9.2	0.026	0.7	13.0	MW	C	N
0.281	7.14	10911	1.34	34.1	.191	4.9	33	5.8	.36	9.2	12	53	.74	18.9	0.045	1.1	15.5	SPR	C	N
0.281	7.14	W-4	1.34	34.1	.161	4.1	125	22	.19	4.8	24	106	.84	21.3	0.060	1.5	14.0	SST	CG	N
0.281	7.14	OO-92	1.38	34.9	.251	6.4	.39	.07	1.2	30	.46	2.0	.20	5.0	0.015	0.4	12.0	MW	C	N
0.281	7.14	4	1.38	34.9	.225	5.7	4.4	.76	.94	24	4.1	18	.43	11.0	0.028	0.7	14.5	MW	C	Z
0.281	7.14	3772	1.38	34.9	.221	5.6	4.1	.72	.75	19	3.0	14	.63	16.0	0.030	0.8	20.0	MW	C	Z
0.281	7.14	AA-9	1.38	34.9	.221	5.6	8.2	1.4	.65	17	5.4	24	.33	8.4	0.030	0.8	11.0	MW	CG	Z
0.281	7.14	3630	1.38	34.9	.181	4.6	43	7.5	.43	11	18	81	.95	24.1	0.050	1.3	19.0	MW	CG	Z
0.281	7.14	HH-9	1.38	34.9	.181	4.6	73	13	.21	5.3	15	67	.60	15.2	0.050	1.3	12.0	SPR	CG	N
0.281	7.14	2964	1.41	35.7	.219	5.6	6.1	1.1	.88	22	5.3	24	.53	13.4	0.031	0.8	16.0	MW	C	Z
0.281	7.14	2655	1.41	35.7	.215	5.5	10	1.8	.70	18	7.1	31	.46	11.7	0.033	0.8	13.0	MW	C	Z
0.281	7.14	LL-47	1.44	36.5	.221	5.6	7.0	1.2	.76	19	5.4	24	.41	10.3	0.030	0.8	12.5	MW	C	Z
0.281	7.14	S-1075	1.50	38.1	.217	5.5	5.3	.93	.82	21	4.3	19	.58	14.6	0.032	0.8	18.0	SST	CG	N
0.281	7.14	NN-72	1.50	38.1	.201	5.1	10	1.8	.50	13	5.1	23	1.00	25.4	0.040	1.0	25.0	SST	CG	N
0.281	7.14	JJ-85	1.50	38.1	.171	4.3	95	17	.21	5.3	20	88	.77	19.6	0.055	1.4	14.0	SPR	CG	Z
0.281	7.14	HH-41	1.56	39.7	.181	4.6	33	5.8	.43	11	14	63	1.08	27.3	0.050	1.3	21.5	SST	CG	N
0.281	7.14	L-60-A	1.63	41.3	.231	5.9	2.0	.36	1.1	29	2.3	10	.49	12.4	0.025	0.6	18.5	MW	C	N
0.281	7.14	S-1145	1.63	41.3	.231	5.9	.83	.15	.68	17	.56	2.5	.95	24.1	0.025	0.6	37.0	SST	C	N
0.281	7.14	2795	1.63	41.3	.223	5.7	4.0	.70	1.1	27	4.3	19	.55	14.0	0.029	0.7	18.0	MW	C	Z
0.281	7.14	HH-59	1.63	41.3	.221	5.6	5.3	.92	1.0	26	5.4	24	.48	12.2	0.030	0.8	16.0	MW	CG	GI
0.281	7.14	BB-91	1.63	41.3	.211	5.4	7.0	1.2	.77	20	5.4	24	.70	17.8	0.035	0.9	20.0	SST	CG	N
0.281	7.14	10433	1.63	41.3	.199	5.1	17	3.0	.54	14	9.2	41	.79	20.0	0.041	1.0	19.3	SPR	CG	N
0.281	7.14	UU-67	1.75	44.5	.243	6.2	.65	.11	1.4	36	.92	4.1	.32	8.2	0.019	0.5	16.0	SST	C	N
0.281	7.14	S-1338	1.75	44.5	.241	6.1	.75	.13	1.4	35	1.0	4.6	.36	9.1	0.020	0.5	17.0	SST	C	N
0.281	7.14	3622	1.84	46.8	.153	3.9	157	28	.27	6.8	42	187	1.15	29.3	0.064	1.6	17.0	MW	C	Z
0.281	7.14	K-33	2.00	50.8	.233	5.9	1.8	.32	1.6	40	2.8	13	.44	11.3	0.024	0.6	17.5	MW	C	Z
0.281	7.14	L-38	2.00	50.8	.225	5.7	2.6	.45	1.3	34	3.5	15	.67	17.1	0.028	0.7	23.0	MW	C	Z
0.281	7.14	S-1368	2.00	50.8	.215	5.5	3.8	.66	1.1	28	4.1	18	.92	23.3	0.033	0.8	27.8	SST	CG	N
0.281	7.14	NN-12	2.03	51.6	.201	5.1	8.6	1.5	.87	22	7.5	33	1.16	29.5	0.040	1.0	29.0	SST	CG	N
0.281	7.14	12331	2.06	52.4	.225	5.7	2.6	.45	1.4	35	3.6	16	.67	17.1	0.028	0.7	23.0	MW	C	Z
0.281	7.14	B10-35	2.44	61.9	.223	5.7	3.7	.64	1.3	33	4.8	22	.59	14.9	0.029	0.7	19.3	MW	C	Z
0.281	7.14	10812	2.50	63.5	.243	6.2	.31	.05	1.9	48	.58	2.6	.61	15.4	0.019	0.5	32.0	SST	CG	N
0.281	7.14	B11-65	2.53	64.3	.183	4.6	30	5.3	.51	13	15	68	1.23	31.1	0.049	1.2	24.0	SPR	C	Z
0.281	7.14	B10-33	2.63	66.7	.225	5.7	27	4.8	.16	4.1	4.4	19	.11	2.8	0.028	0.7	4.00	MW	CG	N
0.281	7.14	909	2.63	66.7	.213	5.4	4.5	.78	1.6	39	7.0	31	1.07	27.2	0.034	0.9	30.5	MW	C	Z
0.281	7.14	2897	3.13	79.4	.209	5.3	3.6	.64	1.4	36	5.2	23	1.70	43.2	0.036	0.9	47.3	SPR	CG	Z
0.281	7.14	RR-34	3.25	82.6	.207	5.3	7.7	1.4	.88	22	6.8	30	1.00	25.4	0.037	0.9	26.0	SPR	C	Z
0.281	7.14	B-51	3.50	88.9	.217	5.5	6.1	1.1	1.1	27	6.5	29	.61	15.4	0.032	0.8	18.0	MW	C	Z
0.281	7.14	3521	3.63	92.1	.207	5.3	5.0	.88	1.9	48	9.4	42	1.48	37.6	0.037	0.9	39.0	MW	C	Z
0.281	7.14	4307	5.00	127.0	.231	5.9	.56	.10	3.4	87	1.9	8.5	1.58	40.0	0.025	0.6	62.0	MW	C	Z
0.296	7.52	A11-21	.22	5.6	.230	5.8	82	14	.05	1.4	4.5	20	.10	2.5	0.033	0.8	3.00	SST	CG	N
0.296	7.52	DD-42	.25	6.4	.256	6.5	5.4	.94	.16	3.9	.83	3.7	.10	2.4	0.020	0.5	3.75	SST	C	N
0.296	7.52	B3-50	.25	6.4	.252	6.4	7.1	1.2	.14	3.6	1.0	4.4	.11	2.8	0.022	0.6	4.00	SST	C	N
0.296	7.52	10894	.25	6.4	.232	5.9	73	13	.06	1.4	4.1	18	.13	3.3	0.032	0.8	3.00	SST	C	N
0.296	7.52	J-59	.25	6.4	.226	5.7	104	18	.05	1.3	5.2	23	.11	2.7	0.035	0.9	3.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.296	7.52	GG-22	.25	6.4	.224	5.7	91	16	.07	1.7	6.0	27	.16	4.1	0.036	0.9	3.50	SPR	C	N
0.296	7.52	HH-19	.25	6.4	.216	5.5	130	23	.06	1.5	7.6	34	.14	3.6	0.040	1.0	3.50	SST	CG	N
0.296	7.52	Q-16	.28	7.1	.258	6.6	2.9	.51	.19	4.7	.54	2.4	.10	2.4	0.019	0.5	5.00	MW	CG	N
0.296	7.52	B-19	.28	7.1	.214	5.4	107	19	.08	1.9	8.2	36	.16	4.2	0.041	1.0	4.00	SST	CG	N
0.296	7.52	W-88	.28	7.1	.202	5.1	195	34	.06	1.6	12	54	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.296	7.52	M-11	.30	7.5	.226	5.7	42	7.3	.12	3.1	5.2	23	.16	4.0	0.035	0.9	4.50	SST	CG	N
0.296	7.52	12647	.30	7.5	.236	6.0	18	3.1	.15	3.7	2.6	12	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.296	7.52	B3-48	.30	7.5	.214	5.4	122	21	.09	2.3	11	50	.21	5.2	0.041	1.0	4.00	MW	C	GI
0.296	7.52	B-9	.31	7.9	.248	6.3	10	1.8	.18	4.6	1.9	8.3	.12	3.0	0.024	0.6	4.00	SST	C	N
0.296	7.52	II-100	.31	7.9	.214	5.4	107	19	.08	1.9	8.2	36	.16	4.2	0.041	1.0	4.00	SST	CG	N
0.296	7.52	XX-6	.31	7.9	.176	4.5	933	163	.03	.66	24	108	.21	5.3	0.060	1.5	3.50	SPR	CG	N
0.296	7.52	O-127	.31	7.9	.172	4.4	818	143	.03	.83	27	119	.25	6.3	0.062	1.6	4.00	SPR	CG	N
0.296	7.52	F-47	.34	8.7	.266	6.8	.93	.16	.25	6.2	.23	1.0	.10	2.5	0.015	0.4	5.50	MW	C	Z
0.296	7.52	W-10	.34	8.7	.244	6.2	9.6	1.7	.19	4.7	1.8	8.0	.16	4.0	0.026	0.7	5.00	SST	C	N
0.296	7.52	EE-75	.34	8.7	.236	6.0	20	3.6	.16	4.1	3.3	15	.18	4.6	0.030	0.8	5.00	MW	C	Z
0.296	7.52	W-32	.34	8.7	.214	5.4	86	15	.10	2.4	8.2	36	.23	5.7	0.041	1.0	4.50	SST	C	N
0.296	7.52	Q-78	.34	8.7	.196	5.0	238	42	.06	1.5	14	64	.23	5.7	0.050	1.3	4.50	SPR	CG	N
0.296	7.52	B18-131	.38	9.5	.278	7.1	.03	.01	.23	5.9	.01	.03	.14	3.7	0.009	0.2	15.0	MW	C	Z
0.296	7.52	NN-1	.38	9.5	.266	6.8	.54	.09	.24	6.1	.13	.58	.14	3.4	0.015	0.4	8.00	MW	C	N
0.296	7.52	WW-34	.38	9.5	.266	6.8	.46	.08	.23	5.7	.10	.46	.15	3.8	0.015	0.4	9.00	MW	C	Z
0.296	7.52	V-15	.38	9.5	.256	6.5	1.2	.21	.18	4.4	.21	.92	.20	5.1	0.020	0.5	10.0	SST	CG	N
0.296	7.52	JJ-59	.38	9.5	.254	6.5	2.9	.51	.23	5.8	.66	2.9	.15	3.7	0.021	0.5	6.00	SST	C	N
0.296	7.52	G-77	.38	9.5	.248	6.3	5.1	.89	.21	5.3	1.1	4.7	.17	4.3	0.024	0.6	6.00	SST	C	N
0.296	7.52	B8-5	.38	9.5	.230	5.8	27	4.7	.18	4.6	4.9	22	.18	4.6	0.033	0.8	5.50	SPR	CG	N
0.296	7.52	M-55	.38	9.5	.222	5.6	68	12	.10	2.4	6.5	29	.16	4.0	0.037	0.9	4.25	SPR	CG	N
0.296	7.52	B12-41	.38	9.5	.220	5.6	78	14	.09	2.3	7.0	31	.16	4.1	0.038	1.0	4.25	SPR	CG	N
0.296	7.52	K-72	.38	9.5	.202	5.1	130	23	.09	2.4	12	54	.24	6.0	0.047	1.2	5.00	SST	CG	N
0.296	7.52	2966	.38	9.5	.196	5.0	199	35	.07	1.9	14	64	.25	6.4	0.050	1.3	5.00	SPR	CG	Z
0.296	7.52	A10-22	.41	10.3	.256	6.5	2.2	.38	.27	6.8	.58	2.6	.14	3.6	0.020	0.5	7.00	MW	CG	N
0.296	7.52	11137	.41	10.3	.240	6.1	5.7	1.0	.10	2.5	.56	2.5	.31	7.8	0.028	0.7	10.0	MW	C	N
0.296	7.52	A15-34	.41	10.3	.230	5.8	31	5.4	.22	5.5	6.7	30	.17	4.2	0.033	0.8	5.00	MW	CG	N
0.296	7.52	A11-39	.41	10.3	.218	5.5	69	12	.10	2.6	7.1	31	.18	4.5	0.039	1.0	4.50	SST	CG	N
0.296	7.52	A15-31	.41	10.3	.212	5.4	96	17	.09	2.3	8.8	39	.19	4.8	0.042	1.1	4.50	SST	CG	N
0.296	7.52	L-5	.41	10.3	.202	5.1	120	21	.11	2.8	13	58	.27	6.9	0.047	1.2	5.75	SPR	CG	N
0.296	7.52	B1-24	.44	11.1	.246	6.2	9.9	1.7	.20	5.1	2.0	8.9	.14	3.5	0.025	0.6	4.50	SST	C	N
0.296	7.52	A11-6	.44	11.1	.244	6.2	13	2.3	.25	6.4	3.3	15	.12	3.0	0.026	0.7	4.50	MW	CG	GI
0.296	7.52	A10-10	.44	11.1	.236	6.0	18	3.2	.19	4.8	3.4	15	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.296	7.52	Z-98	.44	11.1	.234	5.9	21	3.7	.18	4.5	3.8	17	.16	3.9	0.031	0.8	5.00	SST	CG	N
0.296	7.52	II-98	.44	11.1	.232	5.9	20	3.6	.20	5.1	4.1	18	.19	4.7	0.032	0.8	5.00	SST	C	N
0.296	7.52	B-70	.44	11.1	.226	5.7	40	7.0	.14	3.5	5.5	25	.18	4.4	0.035	0.9	5.00	SPR	CG	GI
0.296	7.52	JJ-98	.44	11.1	.210	5.3	75	13	.13	3.2	9.4	42	.24	6.0	0.043	1.1	5.50	SST	CG	N
0.296	7.52	A-13	.47	11.9	.274	7.0	.30	.05	.40	10	.12	.54	.07	1.7	0.011	0.3	5.00	MW	C	N
0.296	7.52	PP-13	.47	11.9	.264	6.7	.94	.17	.35	8.8	.33	1.5	.12	3.0	0.016	0.4	6.50	MW	C	N
0.296	7.52	L-73	.47	11.9	.254	6.5	4.4	.78	.34	8.7	1.5	6.7	.13	3.2	0.021	0.5	5.00	MW	C	Z
0.296	7.52	O-82	.47	11.9	.244	6.2	10	1.8	.21	5.4	2.2	10	.12	3.1	0.026	0.7	4.75	SST	CG	N
0.296	7.52	Z-16	.47	11.9	.238	6.0	13	2.3	.29	7.5	3.9	17	.17	4.4	0.029	0.7	6.00	MW	CG	N
0.296	7.52	A13-59	.47	11.9	.214	5.4	61	11	.13	3.4	8.2	36	.23	5.7	0.041	1.0	5.50	SST	CG	N
0.296	7.52	A11-10	.47	11.9	.210	5.3	67	12	.14	3.6	9.4	42	.26	6.6	0.043	1.1	6.00	SST	CG	N
0.296	7.52	LL-60	.50	12.7	.276	7.0	.20	.04	.44	11	.09	.40	.06	1.5	0.010	0.3	5.00	MW	C	Z
0.296	7.52	10834	.50	12.7	.272	6.9	.18	.03	.39	9.8	.07	.31	.11	2.9	0.012	0.3	8.50	SST	C	N
0.296	7.52	II-84	.50	12.7	.272	6.9	.13	.02	.36	9.1	.05	.20	.14	3.6	0.012	0.3	10.8	SST	C	N
0.296	7.52	NN-58	.50	12.7	.272	6.9	.14	.03	.36	9.0	.05	.23	.14	3.7	0.012	0.3	11.0	MW	C	N
0.296	7.52	B15-35	.50	12.7	.272	6.9	.22	.04	.39	10	.09	.38	.11	2.7	0.012	0.3	8.00	MW	C	N
0.296	7.52	NN-62	.50	12.7	.264	6.7	.46	.08	.32	8.2	.15	.67	.18	4.5	0.016	0.4	10.0	SST	C	N
0.296	7.52	JJ-24	.50	12.7	.260	6.6	2.3	.41	.39	10	.91	4.0	.11	2.7	0.018	0.5	5.00	MW	C	N
0.296	7.52	XX-29	.50	12.7	.254	6.5	3.9	.67	.32	8.3	1.3	5.6	.13	3.2	0.021	0.5	5.00	SST	C	N
0.296	7.52	PP-70	.50	12.7	.252	6.4	5.4	.95	.37	9.3	2.0	8.8	.13	3.4	0.022	0.6	5.00	MW	C	Z
0.296	7.52	A15-9	.50	12.7	.250	6.4	7.8	1.4	.32	8.0	2.5	11	.10	2.6	0.023	0.6	4.50	MW	CG	N
0.296	7.52	AA-8	.50	12.7	.244	6.2	3.8	.67	.25	6.4	.97	4.3	.25	6.3	0.026	0.7	9.50	SST	CG	N
0.296	7.52	S-296	.50	12.7	.244	6.2	9.6	1.7	.23	5.9	2.2	10	.16	4.0	0.026	0.7	5.00	SST	C	N
0.296	7.52	B18-136	.50	12.7	.236	6.0	18	3.1	.29	7.3	5.1	23	.17	4.2	0.030	0.8	5.50	MW	CG	Z
0.296	7.52	K-1	.50	12.7	.234	5.9	14	2.5	.25	6.4	3.6	16	.25	6.3	0.031	0.8	7.00	MW	C	Z
0.296	7.52	I-71	.50	12.7	.232	5.9	27	4.8	.16	4.1	4.4	20	.16	4.1	0.032	0.8	5.00	SPR	CG	N
0.296	7.52	Z-43	.50	12.7	.230	5.8	19	3.2	.24	6.0	4.4	19	.26	6.7	0.033	0.8	7.00	SPR	C	Z
0.296	7.52	2563	.50	12.7	.218	5.5	65	11	.12	2.9	7.6	34	.23	5.9	0.039	1.0	5.00	SPR	C	Z
0.296	7.52	K-97	.50	12.7	.212	5.4	67	12	.13	3.3	8.8	39	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.296	7.52	B15-59	.50	12.7	.208	5.3	84	15	.13	3.2	11	48	.26	6.7	0.044	1.1	6.00	SPR	CG	Z
0.296	7.52	M-22	.50	12.7	.204	5.2	118	21	.10	2.6	12	54	.25	6.4	0.046	1.2	5.50	SPR	CG	Z
0.296	7.52	10962	.50	12.7	.194	4.9	147	26	.10	2.5	14	64	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.296	7.52	W-20	.50	12.7	.162	4.1	592	104	.05	1.3	31	138	.37	9.4	0.067	1.7	5.50	SST	CG	N
0.296	7.52	12422	.53	13.5	.272	6.9	.24	.04	.43	11	.10	.45	.10	2.6	0.012	0.3	7.50	MW	C	N
0.296	7.52	A11-63	.53	13.5	.252	6.4	2.9	.50	.36	9.0	1.0	4.5	.18	4.5	0.022	0.6	7.00	SST	C	N
0.296	7.52	3734	.53	13.5	.232	5.9	18	3.2	.29	7.4	5.2	23	.24	6.1	0.032	0.8	6.50	MW	C	Z
0.296	7.52	W-95	.53	13.5	.232	5.9	16	2.8	.26	6.6	4.1	18	.24	6.1	0.032	0.8	6.50	SST	C	N
0.296	7.52	BB-85	.53	13.5	.202	5.1	100	17	.13	3.3	13	58	.31	7.8	0.047	1.2	6.50	SPR	CG	Z
0.296	7.52	3914	.53	13.5	.188	4.8	213	37	.08	2.2	18	80	.32	8.2	0.054	1.4	6.00	SPR	CG	Z
0.296	7.52	S-1420	.56	14.3	.248	6.3	6.8	1.2	.27	7.0	1.9	8.3	.14	3.7	0.024	0.6	5.00	SST	C	N
0.296	7.52	J-5	.56	14.3	.246	6.2	7.0	1.2	.39	9.8	2.7	12	.18	4.4	0.025	0.6	6.00	MW	C	N
0.296	7.52	Q-73	.56	14.3	.242	6.1	6.5	1.1	.32	8.1	2.1	9.2	.24	6.2	0.027	0.7	8.00	MW	CG	Z
0.296	7.52	V-63	.56	14.3	.232	5.9	14	2.5	.29	7.4	4.1	18	.26	6.5	0.032	0.8	7.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.296	7.52	S-1372	.56	14.3	.226	5.7	23	4.1	.22	5.7	5.2	23	.23	5.8	0.035	0.9	6.50	SST	CG	N
0.296	7.52	O-126	.56	14.3	.216	5.5	64	11	.12	3.0	7.6	34	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.296	7.52	J-65	.56	14.3	.202	5.1	112	20	.12	2.9	13	58	.33	8.4	0.047	1.2	6.00	SPR	C	Z
0.296	7.52	S-1696	.58	14.7	.234	5.9	16	2.7	.24	6.2	3.8	17	.22	5.5	0.031	0.8	6.00	SST	C	N
0.296	7.52	12404	.59	15.1	.268	6.8	.55	.10	.49	12	.27	1.2	.11	2.7	0.014	0.4	6.50	MW	C	N
0.296	7.52	B1-70	.59	15.1	.248	6.3	6.9	1.2	.27	6.8	1.9	8.3	.14	3.7	0.024	0.6	5.00	SST	C	N
0.296	7.52	M-103	.59	15.1	.246	6.2	5.4	.94	.37	9.4	2.0	8.9	.16	4.1	0.025	0.6	6.50	SST	CG	N
0.296	7.52	B8-17	.59	15.1	.228	5.8	21	3.7	.25	6.3	5.3	24	.24	6.0	0.034	0.9	7.00	SPR	CG	N
0.296	7.52	H-74	.59	15.1	.202	5.1	107	19	.11	2.9	12	54	.27	6.9	0.047	1.2	5.75	SST	CG	N
0.296	7.52	4283	.63	15.9	.270	6.9	.33	.06	.51	13	.17	.75	.11	2.8	0.013	0.3	7.50	MW	C	N
0.296	7.52	10854	.63	15.9	.262	6.7	1.2	.21	.51	13	.62	2.8	.12	3.0	0.017	0.4	6.00	SST	C	N
0.296	7.52	B12-36	.63	15.9	.252	6.4	5.5	.96	.40	10	2.2	9.6	.11	2.8	0.022	0.6	5.00	MW	CG	N
0.296	7.52	3193	.63	15.9	.246	6.2	8.0	1.4	.37	9.5	3.0	13	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.296	7.52	II-24	.63	15.9	.246	6.2	4.9	.85	.41	10	2.0	8.9	.20	5.1	0.025	0.6	7.00	SST	C	N
0.296	7.52	B3-60	.63	15.9	.246	6.2	4.3	.76	.41	10	1.8	8.0	.21	5.4	0.025	0.6	8.50	MW	CG	Z
0.296	7.52	AA-98	.63	15.9	.240	6.1	7.2	1.3	.39	9.9	2.8	12	.21	5.3	0.028	0.7	7.50	SST	CG	N
0.296	7.52	L-81	.63	15.9	.232	5.9	18	3.2	.25	6.3	4.4	20	.24	6.1	0.032	0.8	6.50	HD	C	N
0.296	7.52	10077	.63	15.9	.228	5.8	21	3.7	.25	6.4	5.3	24	.27	6.9	0.034	0.9	7.00	SPR	C	Z
0.296	7.52	A12-39	.63	15.9	.216	5.5	58	10	.19	4.9	11	50	.23	5.8	0.040	1.0	5.75	MW	CG	GI
0.296	7.52	A11-19	.63	15.9	.204	5.2	66	11	.17	4.4	11	51	.35	8.8	0.046	1.2	7.50	SST	CG	N
0.296	7.52	F-65	.63	15.9	.202	5.1	90	16	.14	3.7	13	58	.38	9.6	0.047	1.2	7.00	HD	C	Z
0.296	7.52	BB-19	.63	15.9	.196	5.0	89	16	.15	3.9	14	61	.40	10.2	0.050	1.3	8.00	SST	CG	N
0.296	7.52	3861	.63	15.9	.192	4.9	102	18	.16	4.0	16	71	.47	11.9	0.052	1.3	9.00	SPR	CG	Z
0.296	7.52	I-16	.63	15.9	.188	4.8	148	26	.11	2.9	17	76	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.296	7.52	NN-61	.66	16.7	.256	6.5	2.2	.38	.50	13	1.1	4.8	.16	4.1	0.020	0.5	7.00	MW	C	N
0.296	7.52	S-1015	.66	16.7	.240	6.1	9.9	1.7	.28	7.2	2.8	12	.17	4.3	0.028	0.7	6.00	SST	CG	N
0.296	7.52	OO-6	.66	16.7	.236	6.0	14	2.4	.37	9.4	5.1	23	.20	5.0	0.030	0.8	6.50	MW	CG	Z
0.296	7.52	EE-91	.66	16.7	.224	5.7	30	5.3	.20	5.0	6.0	27	.27	6.9	0.036	0.9	6.50	SPR	C	N
0.296	7.52	H-26	.66	16.7	.216	5.5	31	5.5	.24	6.2	7.6	34	.32	8.1	0.040	1.0	8.00	SST	CG	N
0.296	7.52	JJ-32	.66	16.7	.192	4.9	104	18	.15	3.7	15	68	.42	10.6	0.052	1.3	8.00	SST	CG	N
0.296	7.52	B9-1	.69	17.4	.254	6.5	3.8	.67	.49	12	1.9	8.4	.12	2.9	0.021	0.5	5.50	MW	CG	Z
0.296	7.52	II-34	.69	17.4	.246	6.2	4.1	.72	.46	12	1.9	8.5	.23	5.7	0.025	0.6	8.00	SST	C	N
0.296	7.52	MM-14	.69	17.4	.238	6.0	9.6	1.7	.47	12	4.5	20	.22	5.5	0.029	0.7	7.50	MW	CG	GI
0.296	7.52	II-47	.69	17.4	.236	6.0	12	2.2	.41	10	5.1	23	.24	6.1	0.030	0.8	7.00	MW	C	N
0.296	7.52	MM-29	.69	17.4	.236	6.0	11.2	1.9	.46	12	3.8	17	.23	5.7	0.030	0.8	7.50	MW	CG	Z
0.296	7.52	RR-9	.69	17.4	.222	5.6	21	3.6	.30	7.5	6.1	27	.35	8.9	0.037	0.9	8.50	SST	C	N
0.296	7.52	A14-1	.69	17.4	.212	5.4	45	7.9	.21	5.3	9.4	42	.34	8.5	0.042	1.1	8.00	SPR	CG	GI
0.296	7.52	F-42	.69	17.4	.204	5.2	74	13	.16	4.2	12	54	.39	9.9	0.046	1.2	7.50	SPR	C	Z
0.296	7.52	F-43	.69	17.4	.202	5.1	83	14	.16	4.0	13	58	.40	10.1	0.047	1.2	7.50	HD	C	Z
0.296	7.52	NN-19	.69	17.4	.196	5.0	67	12	.19	4.7	13	56	.50	12.7	0.050	1.3	10.0	SST	CG	N
0.296	7.52	A10-16	.72	18.2	.264	6.7	.68	.12	.58	15	.40	1.8	.14	3.5	0.016	0.4	7.50	SST	C	N
0.296	7.52	B1-16	.72	18.2	.252	6.4	3.6	.63	.40	10	1.4	6.4	.13	3.4	0.022	0.6	6.00	SST	CG	N
0.296	7.52	J-88	.72	18.2	.238	6.0	8.8	1.5	.49	12	4.3	19	.23	5.9	0.029	0.7	8.00	MW	CG	Z
0.296	7.52	4396	.72	18.2	.180	4.6	238	42	.09	2.4	22	98	.41	10.3	0.058	1.5	7.00	SPR	CG	Z
0.296	7.52	S-3010	.75	19.1	.268	6.8	.34	.06	.62	16	.21	.94	.13	3.3	0.014	0.4	8.25	SST	C	N
0.296	7.52	3172	.75	19.1	.266	6.8	.52	.09	.61	16	.32	1.4	.14	3.5	0.015	0.4	8.25	MW	C	Z
0.296	7.52	KK-16	.75	19.1	.256	6.5	.84	.15	.45	11	.38	1.7	.30	7.6	0.020	0.5	15.0	MW	CG	N
0.296	7.52	KK-3	.75	19.1	.256	6.5	1.2	.21	.51	13	.61	2.7	.24	6.1	0.020	0.5	11.0	MW	C	N
0.296	7.52	W-75	.75	19.1	.252	6.4	2.5	.44	.54	14	1.3	6.0	.21	5.3	0.022	0.6	8.50	MW	C	N
0.296	7.52	G-25	.75	19.1	.252	6.4	4.1	.72	.53	13	2.2	9.6	.15	3.9	0.022	0.6	6.00	MW	C	N
0.296	7.52	10727	.75	19.1	.244	6.2	5.3	.94	.51	13	2.7	12	.24	6.1	0.026	0.7	8.25	MW	C	N
0.296	7.52	MM-22	.75	19.1	.236	6.0	6.9	1.2	.45	11	3.1	14	.30	7.6	0.030	0.8	10.0	SST	CG	N
0.296	7.52	S-124	.75	19.1	.236	6.0	8.9	1.6	.39	9.8	3.4	15	.27	6.9	0.030	0.8	8.00	SST	C	N
0.296	7.52	3892	.75	19.1	.224	5.7	24	4.2	.25	6.3	6.0	27	.28	7.1	0.036	0.9	7.00	SPR	C	Z
0.296	7.52	O-76	.75	19.1	.216	5.5	37	6.4	.22	5.7	8.1	36	.32	8.1	0.040	1.0	8.00	SPR	CG	N
0.296	7.52	OO-33	.75	19.1	.216	5.5	44	7.7	.19	4.7	8.1	36	.32	8.1	0.040	1.0	7.00	SPR	C	Z
0.296	7.52	I-45	.75	19.1	.206	5.2	55	9.6	.21	5.3	11	51	.39	10.0	0.045	1.1	8.75	SPR	CG	N
0.296	7.52	Q-86	.75	19.1	.202	5.1	75	13	.17	4.4	13	58	.38	9.6	0.047	1.2	8.00	SPR	CG	GI
0.296	7.52	J-6	.75	19.1	.202	5.1	64	11	.20	5.1	13	58	.47	11.9	0.047	1.2	9.00	SPR	C	Z
0.296	7.52	HH-21	.78	19.8	.256	6.5	2.7	.47	.60	15	1.6	7.2	.14	3.6	0.020	0.5	6.00	MW	C	N
0.296	7.52	O-157	.78	19.8	.246	6.2	5.4	.94	.37	9.4	2.0	8.9	.19	4.8	0.025	0.6	6.50	SST	C	N
0.296	7.52	10432	.78	19.8	.200	5.1	80	14	.17	4.4	14	61	.40	10.1	0.048	1.2	8.25	SPR	CG	BO
0.296	7.52	3523	.78	19.8	.176	4.5	155	27	.12	3.1	19	84	.66	16.8	0.060	1.5	11.0	SPR	CG	GI
0.296	7.52	L-57	.81	20.6	.260	6.6	.99	.17	.63	16	.63	2.8	.18	4.6	0.018	0.5	9.00	HD	C	Z
0.296	7.52	10869	.81	20.6	.256	6.5	1.9	.34	.56	14	1.1	4.8	.16	4.1	0.020	0.5	7.00	SST	C	N
0.296	7.52	A-19	.81	20.6	.256	6.5	1.2	.21	.59	15	.70	3.1	.22	5.6	0.020	0.5	10.0	SST	C	N
0.296	7.52	10221	.81	20.6	.246	6.2	5.6	.99	.53	13	3.0	13	.18	4.4	0.025	0.6	7.00	MW	CG	Z
0.296	7.52	A-96	.81	20.6	.232	5.9	12	2.0	.38	9.7	4.4	20	.29	7.3	0.032	0.8	9.00	SPR	CG	BO
0.296	7.52	B5-18	.81	20.6	.232	5.9	12	2.0	.38	9.6	4.4	20	.29	7.3	0.032	0.8	9.00	SPR	CG	N
0.296	7.52	I-44	.81	20.6	.232	5.9	9.3	1.6	.47	12	4.3	19	.34	8.7	0.032	0.8	10.8	MW	CG	Z
0.296	7.52	S-842	.81	20.6	.232	5.9	10	1.8	.41	10	4.1	18	.32	8.1	0.032	0.8	9.00	SST	C	N
0.296	7.52	A13-25	.81	20.6	.220	5.6	22	3.8	.30	7.6	6.6	29	.34	8.7	0.038	1.0	9.00	SST	CG	N
0.296	7.52	A15-58	.81	20.6	.208	5.3	46	8.0	.23	5.9	11	48	.41	10.3	0.044	1.1	9.25	SPR	CG	GI
0.296	7.52	J-13	.81	20.6	.206	5.2	41	7.2	.26	6.6	11	48	.44	11.1	0.045	1.1	9.75	SST	CG	N
0.296	7.52	B5-12	.81	20.6	.204	5.2	57	9.9	.21	5.5	12	54	.43	10.8	0.046	1.2	9.25	SPR	CG	N
0.296	7.52	F-30	.81	20.6	.202	5.1	65	11	.20	5.1	13	58	.47	11.9	0.047	1.2	9.00	HD	C	Z
0.296	7.52	G-24	.81	20.6	.202	5.1	63	11	.21	5.3	13	58	.43	11.0	0.047	1.2	9.25	SPR	CG	GI
0.296	7.52	N-45	.81	20.6	.198	5.0	67	12	.20	5.2	14	61	.49	12.4	0.049	1.2	9.00	SST	C	N
0.296	7.52	V-67	.84	21.4	.262	6.7	.79	.14	.67	17	.53	2.4	.17	4.3	0.017	0.4	9.00	MW	C	Z
0.296	7.52	2714	.84	21.4	.256	6.5	1.6	.28	.65	16	1.0	4.6	.20	5.0	0.020	0.5	8.75	HD	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.296	7.52	A14-49	.84	21.4	.242	6.1	6.3	1.1	.40	10	2.5	11	.20	5.1	0.027	0.7	7.50	SST	CG	N
0.296	7.52	AA-60	.84	21.4	.202	5.1	36	6.3	.23	5.9	8.4	37	.61	15.5	0.047	1.2	13.0	SST	CG	N
0.296	7.52	A12-8	.88	22.2	.270	6.9	.32	.06	.76	19	.24	1.1	.11	2.9	0.013	0.3	7.75	MW	C	N
0.296	7.52	EE-63	.88	22.2	.260	6.6	.73	.13	.65	17	.48	2.1	.23	5.7	0.018	0.5	11.5	MW	C	N
0.296	7.52	GG-93	.88	22.2	.260	6.6	.60	.11	.64	16	.39	1.7	.23	5.9	0.018	0.5	12.0	SST	C	N
0.296	7.52	BB-100	.88	22.2	.258	6.6	1.0	.18	.68	17	.68	3.0	.20	5.1	0.019	0.5	9.50	SST	C	N
0.296	7.52	2782	.88	22.2	.256	6.5	2.2	.38	.54	14	1.2	5.2	.16	4.1	0.020	0.5	7.00	HD	C	Z
0.296	7.52	B14-16	.88	22.2	.256	6.5	2.7	.48	.60	15	1.6	7.2	.12	3.0	0.020	0.5	6.00	MW	CG	N
0.296	7.52	S-1288	.88	22.2	.256	6.5	2.1	.37	.52	13	1.1	4.8	.15	3.8	0.020	0.5	6.50	SST	C	N
0.296	7.52	A13-6	.88	22.2	.250	6.4	4.3	.76	.57	14	2.5	11	.15	3.8	0.023	0.6	6.50	MW	CG	N
0.296	7.52	HH-51	.88	22.2	.248	6.3	2.1	.38	.58	15	1.2	5.5	.30	7.6	0.024	0.6	11.5	SST	C	N
0.296	7.52	A10-60	.88	22.2	.244	6.2	4.5	.79	.50	13	2.2	10	.22	5.6	0.026	0.7	8.50	SST	CG	N
0.296	7.52	GG-2	.88	22.2	.236	6.0	9.1	1.6	.37	9.5	3.4	15	.24	6.1	0.030	0.8	8.00	SST	CG	N
0.296	7.52	B1-12	.88	22.2	.232	5.9	13	2.2	.48	12	6.2	27	.27	6.8	0.032	0.8	8.33	MW	CG	N
0.296	7.52	AA-50	.88	22.2	.220	5.6	20	3.5	.33	8.3	6.6	29	.40	10.1	0.038	1.0	9.50	SST	C	N
0.296	7.52	2812	.88	22.2	.214	5.4	24	4.2	.34	8.7	8.3	37	.53	13.5	0.041	1.0	12.0	HD	C	Z
0.296	7.52	A11-29	.88	22.2	.212	5.4	31	5.4	.28	7.2	8.8	39	.41	10.4	0.042	1.1	9.75	SST	CG	N
0.296	7.52	B11-40	.88	22.2	.208	5.3	42	7.4	.26	6.5	11	48	.44	11.2	0.044	1.1	10.0	SPR	CG	N
0.296	7.52	K-4	.88	22.2	.206	5.2	38	6.6	.28	7.2	11	48	.47	12.0	0.045	1.1	10.5	SST	CG	N
0.296	7.52	F-34	.88	22.2	.204	5.2	56	9.8	.22	5.5	12	54	.47	12.0	0.046	1.2	9.25	SPR	C	Z
0.296	7.52	B11-48	.88	22.2	.204	5.2	37	6.6	.28	7.0	10	46	.60	15.2	0.046	1.2	13.0	SPR	CG	N
0.296	7.52	V-4	.91	23.0	.172	4.4	221	39	.12	3.1	27	119	.59	15.0	0.062	1.6	9.50	SPR	CG	N
0.296	7.52	GG-50	.94	23.8	.266	6.8	.47	.08	.80	20	.38	1.7	.14	3.4	0.015	0.4	8.00	SST	C	N
0.296	7.52	Z-5	.94	23.8	.234	5.9	7.8	1.4	.60	15	4.7	21	.34	8.7	0.031	0.8	11.0	MW	CG	Z
0.296	7.52	S-1497	.94	23.8	.220	5.6	19	3.4	.34	8.6	6.6	29	.37	9.4	0.038	1.0	9.75	SST	CG	N
0.296	7.52	JJ-42	.94	23.8	.216	5.5	27	4.8	.30	7.5	8.1	36	.40	10.2	0.040	1.0	10.0	SPR	CG	N
0.296	7.52	JJ-13	.94	23.8	.216	5.5	16	2.8	.34	8.6	5.5	24	.60	15.2	0.040	1.0	14.0	SST	C	N
0.296	7.52	A14-31	.94	23.8	.202	5.1	44	7.7	.28	7.0	12	54	.52	13.1	0.047	1.2	11.0	SST	CG	N
0.296	7.52	3667	.97	24.6	.230	5.8	12	2.0	.58	15	6.7	30	.36	9.2	0.033	0.8	10.0	MW	C	Z
0.296	7.52	A15-64	.97	24.6	.230	5.8	13	2.3	.37	9.3	4.9	22	.33	8.4	0.033	0.8	9.00	SPR	C	N
0.296	7.52	B14-32	.97	24.6	.222	5.6	19	3.4	.33	8.5	6.5	29	.37	9.4	0.037	0.9	10.0	SPR	CG	N
0.296	7.52	B11-30	.97	24.6	.220	5.6	22	3.8	.32	8.2	7.0	31	.38	9.7	0.038	1.0	10.0	SPR	C	N
0.296	7.52	B2-29	.98	25.0	.210	5.3	36	6.3	.28	7.1	10	45	.45	11.5	0.043	1.1	10.5	SPR	CG	N
0.296	7.52	Z-76	1.00	25.4	.272	6.9	.29	.05	.87	22	.25	1.1	.08	2.1	0.012	0.3	6.00	SST	C	N
0.296	7.52	10266	1.00	25.4	.266	6.8	.51	.09	.86	22	.43	1.9	.14	3.6	0.015	0.4	8.50	MW	C	Z
0.296	7.52	PP-81	1.00	25.4	.250	6.4	.89	.16	.49	13	.44	2.0	.51	12.9	0.023	0.6	21.0	SST	C	N
0.296	7.52	Z-49	1.00	25.4	.246	6.2	3.7	.65	.53	14	2.0	8.9	.24	6.0	0.025	0.6	8.50	SST	C	N
0.296	7.52	G-62	1.00	25.4	.244	6.2	3.3	.59	.67	17	2.2	9.9	.33	8.5	0.026	0.7	11.9	MW	C	Z
0.296	7.52	JJ-43	1.00	25.4	.242	6.1	4.9	.85	.70	18	3.4	15	.30	7.5	0.027	0.7	10.0	MW	C	N
0.296	7.52	2643	1.00	25.4	.240	6.1	3.0	.52	.49	12	1.5	6.5	.51	13.0	0.028	0.7	17.3	MW	C	Z
0.296	7.52	3763	1.00	25.4	.236	6.0	12	2.1	.42	11	5.1	23	.24	6.1	0.030	0.8	7.00	MW	C	Z
0.296	7.52	3875	1.00	25.4	.236	6.0	7.6	1.3	.67	17	5.1	23	.33	8.4	0.030	0.8	10.0	MW	C	Z
0.296	7.52	2666	1.00	25.4	.232	5.9	9.0	1.6	.62	16	5.5	25	.38	9.8	0.032	0.8	11.0	MW	C	Z
0.296	7.52	B9-43	1.00	25.4	.226	5.7	15	2.7	.34	8.5	5.2	23	.32	8.0	0.035	0.9	9.00	SST	CG	N
0.296	7.52	S-230	1.00	25.4	.224	5.7	14	2.4	.40	10	5.6	25	.38	9.6	0.036	0.9	10.5	SST	CG	N
0.296	7.52	M-87	1.00	25.4	.206	5.2	34	5.9	.32	8.1	11	48	.56	14.3	0.045	1.1	11.5	SST	C	N
0.296	7.52	UU-46	1.00	25.4	.206	5.2	43	7.6	.26	6.7	11	51	.52	13.1	0.045	1.1	10.5	SPR	C	N
0.296	7.52	S-10	1.00	25.4	.202	5.1	33	5.7	.30	7.5	9.6	43	.71	17.9	0.047	1.2	14.0	SST	C	N
0.296	7.52	L-55	1.00	25.4	.196	5.0	52	9.1	.28	7.1	14	64	.68	17.1	0.050	1.3	13.5	SPR	CG	N
0.296	7.52	KK-33	1.00	25.4	.186	4.7	77	13	.23	5.9	18	80	.74	18.9	0.055	1.4	12.5	SST	C	N
0.296	7.52	G-49	1.00	25.4	.172	4.4	242	42	.11	2.8	27	119	.54	13.8	0.062	1.6	8.75	SPR	CG	Z
0.296	7.52	S-1306	1.03	26.2	.220	5.6	20	3.5	.33	8.3	6.6	29	.36	9.2	0.038	1.0	9.50	SST	CG	N
0.296	7.52	S-37	1.03	26.2	.152	3.9	365	64	.10	2.5	36	159	.81	20.6	0.072	1.8	10.3	SST	C	N
0.296	7.52	M-112	1.06	27.0	.254	6.5	1.5	.26	.81	21	1.2	5.3	.25	6.4	0.021	0.5	11.0	MW	C	Z
0.296	7.52	A15-29	1.06	27.0	.250	6.4	1.1	.19	.65	17	.72	3.2	.41	10.4	0.023	0.6	17.8	SST	CG	N
0.296	7.52	JJ-19	1.06	27.0	.176	4.5	105	18	.22	5.6	23	102	.84	21.3	0.060	1.5	14.0	SST	CG	N
0.296	7.52	S-1088	1.13	28.6	.268	6.8	.10	.02	.79	20	.08	.35	.34	8.5	0.014	0.4	23.0	SST	C	N
0.296	7.52	H-53	1.13	28.6	.252	6.4	1.8	.31	.82	21	1.4	6.4	.24	6.1	0.022	0.6	10.0	SST	C	N
0.296	7.52	CC-29	1.13	28.6	.248	6.3	2.5	.43	.83	21	2.0	9.1	.30	7.6	0.024	0.6	11.5	MW	C	Z
0.296	7.52	10627	1.13	28.6	.232	5.9	7.1	1.2	.69	18	4.9	22	.43	11.0	0.032	0.8	13.5	MW	CG	Z
0.296	7.52	S-1117	1.13	28.6	.232	5.9	8.8	1.5	.47	12	4.1	18	.35	8.9	0.032	0.8	10.0	SST	C	N
0.296	7.52	3628	1.13	28.6	.220	5.6	18	3.2	.53	14	9.7	43	.44	11.1	0.038	1.0	11.5	MW	CG	Z
0.296	7.52	S-793	1.13	28.6	.220	5.6	16	2.8	.42	11	6.6	29	.44	11.1	0.038	1.0	11.5	SST	CG	N
0.296	7.52	MM-31	1.13	28.6	.216	5.5	16	2.8	.47	12	7.6	34	.60	15.2	0.040	1.0	14.0	SST	C	N
0.296	7.52	A11-42	1.13	28.6	.210	5.3	30	5.3	.33	8.5	10	45	.52	13.1	0.043	1.1	12.0	SPR	CG	GI
0.296	7.52	B8-31	1.16	29.4	.234	5.9	9.0	1.6	.42	11	3.8	17	.28	7.1	0.031	0.8	9.00	SST	CG	N
0.296	7.52	B9-45	1.19	30.2	.256	6.5	1.3	.23	.98	25	1.3	5.6	.21	5.3	0.020	0.5	10.5	MW	CG	N
0.296	7.52	3219	1.19	30.2	.254	6.5	1.4	.25	.93	24	1.3	6.0	.26	6.5	0.021	0.5	11.3	MW	C	Z
0.296	7.52	QQ-46	1.19	30.2	.236	6.0	4.7	.82	.71	18	3.3	15	.48	12.2	0.030	0.8	15.0	MW	C	Z
0.296	7.52	LL-59	1.19	30.2	.236	6.0	5.0	.87	.68	17	3.4	15	.39	9.9	0.030	0.8	13.0	SST	CG	N
0.296	7.52	S-40	1.19	30.2	.172	4.4	126	22	.20	5.1	25	112	.90	22.8	0.062	1.6	13.5	SST	C	N
0.296	7.52	S-1312	1.22	31.0	.258	6.6	1.3	.23	.71	18	.93	4.1	.17	4.2	0.019	0.5	7.75	SST	C	N
0.296	7.52	3749	1.25	31.8	.256	6.5	1.4	.24	1.0	26	1.4	6.2	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.296	7.52	4324	1.25	31.8	.242	6.1	3.2	.57	.85	21	2.7	12	.41	10.3	0.027	0.7	14.0	MW	C	Z
0.296	7.52	Q-25	1.25	31.8	.236	6.0	3.9	.68	.71	18	2.7	12	.54	13.7	0.030	0.8	18.0	MW	CG	GI
0.296	7.52	3839	1.25	31.8	.232	5.9	8.1	1.4	.55	14	4.4	20	.42	10.6	0.032	0.8	12.0	HD	C	Z
0.296	7.52	XX-52	1.25	31.8	.216	5.5	20	3.5	.41	10	8.1	36	.56	14.2	0.040	1.0	13.0	SPR	C	Z
0.296	7.52	Y-79	1.25	31.8	.186	4.7	84	15	.23	5.7	19	85	.72	18.2	0.055	1.4	13.0	SPR	CG	N
0.296	7.52	CC-67	1.28	32.5	.236	6.0	6.5	1.1	.53	13	3.4	15	.32	8.0	0.030	0.8	10.5	SST	CG	N
0.296	7.52	O-63	1.28	32.5	.188	4.8	62	11	.29	7.4	18	80	.86	21.9	0.054	1.4	16.0	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.296	7.52	M-96	1.28	32.5	.182	4.6	129	23	.16	4.1	21	94	.60	15.2	0.057	1.4	10.5	SPR	CG	Z
0.296	7.52	B7-9	1.31	33.3	.244	6.2	3.7	.65	.90	23	3.3	15	.29	7.3	0.026	0.7	11.0	MW	CG	N
0.296	7.52	S-3076	1.31	33.3	.238	6.0	5.4	.95	.57	15	3.1	14	.33	8.5	0.029	0.7	10.5	SST	C	N
0.296	7.52	I-77	1.31	33.3	.206	5.2	32	5.7	.35	9.0	11	51	.61	15.4	0.045	1.1	13.5	SPR	CG	N
0.296	7.52	AA-57	1.31	33.3	.176	4.5	98	17	.25	6.3	24	108	.99	25.1	0.060	1.5	16.5	SPR	CG	N
0.296	7.52	WW-56	1.38	34.9	.258	6.6	1.2	.22	1.1	29	1.4	6.2	.19	4.8	0.019	0.5	9.00	MW	C	Z
0.296	7.52	3855	1.38	34.9	.240	6.1	4.3	.76	.96	24	4.2	19	.38	9.6	0.028	0.7	12.5	MW	C	Z
0.296	7.52	KK-28	1.38	34.9	.236	6.0	6.2	1.1	.82	21	5.1	23	.36	9.1	0.030	0.8	12.0	MW	CG	GI
0.296	7.52	4319	1.38	34.9	.234	5.9	4.7	.82	.82	21	3.8	17	.56	14.2	0.031	0.8	17.0	MW	C	Z
0.296	7.52	A13-46	1.38	34.9	.218	5.5	15	2.6	.48	12	7.1	31	.54	13.6	0.039	1.0	13.8	SST	CG	N
0.296	7.52	A12-70	1.38	34.9	.218	5.5	20	3.4	.53	14	10	47	.51	12.9	0.039	1.0	12.0	MW	C	Z
0.296	7.52	2889	1.38	34.9	.214	5.4	16	2.8	.54	14	8.7	39	.74	18.7	0.041	1.0	17.0	SPR	C	Z
0.296	7.52	B15-57	1.38	34.9	.210	5.3	24	4.3	.41	11	10	45	.62	15.8	0.043	1.1	14.5	SPR	CG	Z
0.296	7.52	A11-13	1.38	34.9	.200	5.1	34	5.9	.38	9.7	13	58	.72	18.3	0.048	1.2	15.0	SST	CG	N
0.296	7.52	11405	1.41	35.7	.248	6.3	2.6	.46	1.1	27	2.8	12	.29	7.3	0.024	0.6	11.0	MW	C	Z
0.296	7.52	Q-54	1.44	36.5	.202	5.1	28	4.9	.44	11	12	54	.75	19.1	0.047	1.2	16.0	SST	CG	N
0.296	7.52	K-86	1.44	36.5	.196	5.0	40	7.0	.34	8.7	14	61	.75	19.1	0.050	1.3	15.0	SST	CG	N
0.296	7.52	H-83	1.50	38.1	.256	6.5	.72	.13	1.2	30	.85	3.8	.32	8.1	0.020	0.5	15.0	SST	C	N
0.296	7.52	4280	1.50	38.1	.238	6.0	4.1	.71	1.0	26	4.2	19	.46	11.8	0.029	0.7	15.0	MW	C	Z
0.296	7.52	11408	1.50	38.1	.226	5.7	8.8	1.5	.86	22	7.6	34	.59	14.9	0.035	0.9	15.8	MW	C	Z
0.296	7.52	B9-10	1.50	38.1	.226	5.7	9.3	1.6	.59	15	5.5	25	.53	13.3	0.035	0.9	15.0	SPR	CG	N
0.296	7.52	11900	1.50	38.1	.222	5.6	11	1.9	.55	14	6.1	27	.54	13.6	0.037	0.9	14.5	SST	CG	N
0.296	7.52	A13-8	1.50	38.1	.212	5.4	17	3.0	.50	13	8.8	39	.66	16.8	0.042	1.1	15.8	SST	CG	N
0.296	7.52	10057	1.50	38.1	.206	5.2	26	4.6	.44	11	11	51	.77	19.4	0.045	1.1	16.0	SPR	C	GI
0.296	7.52	A14-36	1.50	38.1	.206	5.2	23	4.1	.46	12	11	48	.72	18.3	0.045	1.1	16.0	SST	CG	N
0.296	7.52	2840	1.63	41.3	.228	5.8	5.9	1.0	.95	24	5.6	25	.68	17.2	0.034	0.9	19.9	MW	CG	Z
0.296	7.52	S-1558	1.63	41.3	.228	5.8	4.5	.79	.83	21	3.7	17	.80	20.3	0.034	0.9	22.5	SST	C	N
0.296	7.52	3532	1.66	42.1	.222	5.6	9.3	1.6	.70	18	6.5	29	.68	17.4	0.037	0.9	18.5	SPR	CG	GI
0.296	7.52	A-37	1.69	42.8	.170	4.3	105	18	.26	6.7	28	124	1.26	32.0	0.063	1.6	19.0	HD	C	N
0.296	7.52	U-36	1.72	43.6	.224	5.7	8.6	1.5	.70	18	6.0	27	.65	16.5	0.036	0.9	18.0	SPR	CG	GI
0.296	7.52	F-29	1.72	43.6	.172	4.4	126	22	.21	5.4	27	119	.99	25.2	0.062	1.6	15.0	SPR	C	Z
0.296	7.52	S-1433	1.75	44.5	.256	6.5	.99	.17	1.1	28	1.1	4.8	.25	6.4	0.020	0.5	11.5	SST	C	N
0.296	7.52	10203	1.75	44.5	.252	6.4	1.9	.34	1.1	29	2.2	9.6	.23	5.9	0.022	0.6	10.5	MW	CG	Z
0.296	7.52	AA-55	1.75	44.5	.246	6.2	2.5	.44	1.2	30	3.0	13	.35	8.9	0.025	0.6	13.0	MW	C	Z
0.296	7.52	QQ-64	1.75	44.5	.246	6.2	1.6	.28	1.2	31	2.0	8.8	.51	13.0	0.025	0.6	19.5	MW	C	Z
0.296	7.52	3603	1.75	44.5	.232	5.9	6.6	1.2	.93	24	6.2	27	.49	12.4	0.032	0.8	14.3	MW	C	Z
0.296	7.52	B12-15	1.78	45.2	.214	5.4	16	2.7	.56	14	8.7	39	.73	18.5	0.041	1.0	17.8	SPR	CG	N
0.296	7.52	1747	1.81	46.0	.244	6.2	3.3	.58	1.0	25	3.3	15	.34	8.6	0.026	0.7	12.0	MW	C	Z
0.296	7.52	M-124	1.88	47.6	.218	5.5	12	2.2	.61	15	7.6	34	.72	18.3	0.039	1.0	17.5	SPR	C	GI
0.296	7.52	3366	1.88	47.6	.216	5.5	14	2.4	.81	20	11	50	.74	18.8	0.040	1.0	17.5	MW	C	Z
0.296	7.52	2633	1.88	47.6	.172	4.4	109	19	.34	8.6	37	165	1.05	26.8	0.062	1.6	17.0	MW	CG	Z
0.296	7.52	11476	1.94	49.2	.236	6.0	4.4	.77	1.2	29	5.1	23	.51	13.0	0.030	0.8	16.0	MW	CG	GI
0.296	7.52	A10-68	1.94	49.2	.212	5.4	13	2.3	.66	17	8.8	39	.84	21.3	0.042	1.1	20.0	SST	CG	N
0.296	7.52	B4-14	1.95	49.6	.172	4.4	111	19	.24	6.1	27	119	1.12	28.3	0.062	1.6	17.0	SPR	C	N
0.296	7.52	S-1006	2.00	50.8	.234	5.9	3.5	.61	1.1	27	3.8	17	.64	16.1	0.031	0.8	19.5	SST	C	N
0.296	7.52	10071	2.00	50.8	.208	5.3	18	3.2	.58	15	11	48	.88	22.4	0.044	1.1	20.0	SPR	CG	Z
0.296	7.52	B10-7	2.09	53.2	.218	5.5	10	1.8	.74	19	7.6	34	.83	21.1	0.039	1.0	21.3	SPR	CG	N
0.296	7.52	B15-62	2.16	54.8	.204	5.2	17	3.0	.71	18	12	54	1.24	31.5	0.046	1.2	26.0	SPR	C	N
0.296	7.52	S-1026	2.16	54.8	.202	5.1	16	2.8	.75	19	12	54	1.27	32.2	0.047	1.2	26.0	SST	C	N
0.296	7.52	S-880	2.28	57.9	.238	6.0	1.4	.25	1.3	32	1.8	8.1	1.02	25.8	0.029	0.7	34.0	SST	C	N
0.296	7.52	Q-15	2.56	65.1	.218	5.5	9.6	1.7	.79	20	7.6	34	.88	22.3	0.039	1.0	22.5	SPR	CG	N
0.296	7.52	3651	2.56	65.1	.200	5.1	16	2.9	.84	21	14	61	1.54	39.0	0.048	1.2	32.0	SPR	CG	Z
0.296	7.52	S-1127	2.63	66.7	.224	5.7	5.8	1.0	.97	25	5.6	25	.85	21.5	0.036	0.9	22.5	SST	C	N
0.296	7.52	B8-18	2.75	69.9	.244	6.2	2.6	.45	1.3	33	3.3	15	.39	9.9	0.026	0.7	15.0	MW	CG	N
0.296	7.52	10625	2.75	69.9	.176	4.5	33	5.8	.74	19	24	108	1.50	38.1	0.060	1.5	25.0	PB	CG	N
0.296	7.52	S-190	2.78	70.6	.202	5.1	12	2.0	1.1	27	12	54	1.72	43.6	0.047	1.2	36.5	SST	CG	N
0.296	7.52	2531	3.00	76.2	.226	5.7	3.2	.56	1.6	40	5.0	22	1.44	36.4	0.035	0.9	40.0	MW	C	Z
0.296	7.52	S-1441	3.00	76.2	.200	5.1	13	2.3	.99	25	13	58	1.68	42.7	0.048	1.2	35.0	SST	CG	N
0.296	7.52	S-1581	3.25	82.6	.204	5.2	11	1.9	1.0	26	11	51	1.62	41.2	0.046	1.2	35.3	SST	CG	N
0.296	7.52	S-1014	3.41	86.5	.202	5.1	16	2.7	.78	20	12	54	1.32	33.4	0.047	1.2	27.0	SST	C	N
0.296	7.52	10647	3.88	98.4	.236	6.0	2.0	.36	2.5	63	5.1	23	.99	25.1	0.030	0.8	33.0	MW	C	Z
0.296	7.52	2570	7.50	190.5	.224	5.7	2.0	.35	3.0	76	6.0	27	2.59	65.8	0.036	0.9	71.0	SPR	C	Z
0.296	7.52	10513	7.50	190.5	.214	5.4	3.6	.62	2.5	62	8.7	39	2.90	73.7	0.041	1.0	70.8	SPR	CG	N
0.300	7.62	B4-65	.34	8.7	.254	6.5	4.7	.82	.22	5.5	1.0	4.5	.13	3.2	0.023	0.6	5.50	SST	CG	N
0.300	7.62	70779	.38	9.7	.256	6.5	8.6	1.5	.25	6.3	2.1	9.5	.09	2.2	0.022	0.6	3.88	MW	CG	N
0.300	7.62	70779S	.38	9.7	.256	6.5	7.3	1.3	.19	4.9	1.4	6.3	.09	2.2	0.022	0.6	3.88	SST	CG	N
0.300	7.62	70802	.38	9.7	.248	6.3	15	2.7	.21	5.4	3.3	15	.11	2.7	0.026	0.7	4.13	MW	CG	N
0.300	7.62	70802S	.38	9.7	.248	6.3	13	2.3	.17	4.3	2.2	9.8	.11	2.7	0.026	0.7	4.13	SST	CG	N
0.300	7.62	70825	.38	9.7	.240	6.1	26	4.5	.20	5.0	5.0	22	.13	3.3	0.030	0.8	4.38	MW	CG	N
0.300	7.62	70825S	.38	9.7	.240	6.1	22	3.8	.16	4.0	3.4	15	.13	3.3	0.030	0.8	4.38	SST	CG	N
0.300	7.62	70847	.38	9.7	.236	6.0	33	5.7	.19	4.8	6.1	27	.14	3.6	0.032	0.8	4.38	MW	CG	N
0.300	7.62	70847S	.38	9.7	.236	6.0	28	4.8	.15	3.7	4.1	18	.14	3.6	0.032	0.8	4.38	SST	CG	N
0.300	7.62	70868	.38	9.7	.230	5.8	46	8.0	.16	4.2	7.5	34	.16	4.0	0.035	0.9	4.50	MW	CG	N
0.300	7.62	70868S	.38	9.7	.230	5.8	39	6.8	.13	3.3	5.1	23	.16	4.0	0.035	0.9	4.50	SST	CG	N
0.300	7.62	70887	.38	9.7	.224	5.7	64	11	.15	3.8	9.6	43	.18	4.5	0.038	1.0	4.63	MW	CG	N
0.300	7.62	70887S	.38	9.7	.224	5.7	55	9.6	.12	3.0	6.5	29	.18	4.5	0.038	1.0	4.63	SST	CG	N
0.300	7.62	70906	.38	9.7	.220	5.6	78	14	.14	3.6	11	50	.19	4.8	0.040	1.0	4.75	MW	CG	N
0.300	7.62	70906S	.38	9.7	.220	5.6	66	12	.11	2.9	7.5	33	.19	4.8	0.040	1.0	4.75	SST	CG	N
0.300	7.62	70925	.38	9.7	.216	5.5	107	19	.12	3.1	13	57	.19	4.8	0.042	1.1	4.50	MW	CG	N
0.300	7.62	70925S	.38	9.7	.216	5.5	91	16	.10	2.4	8.7	39	.19	4.8	0.042	1.1	4.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.300	7.62	70944	.38	9.7	.210	5.3	124	22	.13	3.2	16	70	.22	5.6	0.045	1.1	4.88	MW	CG	N
0.300	7.62	70944S	.38	9.7	.210	5.3	105	18	.10	2.6	11	47	.22	5.6	0.045	1.1	4.88	SST	CG	N
0.300	7.62	70963	.38	9.7	.206	5.2	159	28	.11	2.8	18	79	.22	5.7	0.047	1.2	4.75	MW	CG	N
0.300	7.62	70963S	.38	9.7	.206	5.2	135	24	.09	2.3	12	53	.22	5.7	0.047	1.2	4.75	SST	CG	N
0.300	7.62	70984	.38	9.7	.202	5.1	190	33	.11	2.7	20	89	.23	5.9	0.049	1.2	4.75	MW	CG	N
0.300	7.62	70984S	.38	9.7	.202	5.1	161	28	.08	2.1	14	60	.23	5.9	0.049	1.2	4.75	SST	CG	N
0.300	7.62	71005	.38	9.7	.198	5.0	228	40	.09	2.3	21	94	.24	6.2	0.051	1.3	4.75	MW	CG	N
0.300	7.62	71005S	.38	9.7	.198	5.0	194	34	.07	1.9	14	63	.24	6.2	0.051	1.3	4.75	SST	CG	N
0.300	7.62	70780	.44	11.2	.256	6.5	7.2	1.3	.30	7.5	2.1	9.5	.09	2.3	0.022	0.6	4.13	MW	CG	N
0.300	7.62	70780S	.44	11.2	.256	6.5	6.1	1.1	.23	5.9	1.4	6.3	.09	2.3	0.022	0.6	4.13	SST	CG	N
0.300	7.62	70803	.44	11.2	.248	6.3	13	2.3	.25	6.4	3.3	15	.11	2.9	0.026	0.7	4.38	MW	CG	N
0.300	7.62	70803S	.44	11.2	.248	6.3	11	2.0	.20	5.0	2.2	9.8	.11	2.9	0.026	0.7	4.38	SST	CG	N
0.300	7.62	70826	.44	11.2	.240	6.1	21	3.6	.24	6.2	5.0	22	.15	3.7	0.030	0.8	4.88	MW	CG	N
0.300	7.62	70826S	.44	11.2	.240	6.1	18	3.1	.19	4.9	3.4	15	.15	3.7	0.030	0.8	4.88	SST	CG	N
0.300	7.62	70848	.44	11.2	.236	6.0	27	4.8	.22	5.7	6.1	27	.16	4.0	0.032	0.8	4.88	MW	CG	N
0.300	7.62	70848S	.44	11.2	.236	6.0	23	4.0	.18	4.5	4.1	18	.16	4.0	0.032	0.8	4.88	SST	CG	N
0.300	7.62	70869	.44	11.2	.230	5.8	38	6.7	.20	5.0	7.5	34	.18	4.4	0.035	0.9	5.00	MW	CG	N
0.300	7.62	70869S	.44	11.2	.230	5.8	33	5.7	.16	4.0	5.1	23	.18	4.4	0.035	0.9	5.00	SST	CG	N
0.300	7.62	70888	.44	11.2	.224	5.7	53	9.3	.18	4.6	9.6	43	.19	4.9	0.038	1.0	5.13	MW	CG	N
0.300	7.62	70888S	.44	11.2	.224	5.7	45	7.9	.14	3.6	6.5	29	.19	4.9	0.038	1.0	5.13	SST	CG	N
0.300	7.62	70907	.44	11.2	.220	5.6	65	11	.17	4.3	11	50	.21	5.3	0.040	1.0	5.25	MW	CG	N
0.300	7.62	70907S	.44	11.2	.220	5.6	56	9.7	.14	3.4	7.5	33	.21	5.3	0.040	1.0	5.25	SST	CG	N
0.300	7.62	70926	.44	11.2	.216	5.5	89	16	.14	3.6	13	57	.20	5.2	0.042	1.1	4.88	MW	CG	N
0.300	7.62	70926S	.44	11.2	.216	5.5	76	13	.11	2.9	8.7	39	.20	5.2	0.042	1.1	4.88	SST	CG	N
0.300	7.62	70945	.44	11.2	.210	5.3	105	18	.15	3.8	16	70	.24	6.1	0.045	1.1	5.38	MW	CG	N
0.300	7.62	70945S	.44	11.2	.210	5.3	89	16	.12	3.0	11	47	.24	6.1	0.045	1.1	5.38	SST	CG	N
0.300	7.62	70964	.44	11.2	.206	5.2	132	23	.13	3.4	18	79	.25	6.3	0.047	1.2	5.25	MW	CG	N
0.300	7.62	70964S	.44	11.2	.206	5.2	112	20	.11	2.7	12	53	.25	6.3	0.047	1.2	5.25	SST	CG	N
0.300	7.62	70985	.44	11.2	.202	5.1	156	27	.13	3.3	20	89	.26	6.7	0.049	1.2	5.38	MW	CG	N
0.300	7.62	70985S	.44	11.2	.202	5.1	133	23	.10	2.6	14	60	.26	6.7	0.049	1.2	5.38	SST	CG	N
0.300	7.62	71006	.44	11.2	.198	5.0	187	33	.11	2.9	21	94	.27	7.0	0.051	1.3	5.38	MW	CG	N
0.300	7.62	71006S	.44	11.2	.198	5.0	159	28	.09	2.3	14	63	.27	7.0	0.051	1.3	5.38	SST	CG	N
0.300	7.62	B4-69	.47	11.9	.258	6.6	2.7	.47	.31	7.8	.83	3.7	.16	4.1	0.021	0.5	6.75	MW	C	GI
0.300	7.62	70781	.50	12.7	.256	6.5	6.6	1.1	.33	8.3	2.1	9.5	.10	2.4	0.022	0.6	4.38	MW	CG	N
0.300	7.62	70781S	.50	12.7	.256	6.5	5.6	.97	.25	6.5	1.4	6.3	.10	2.4	0.022	0.6	4.38	SST	CG	N
0.300	7.62	70804	.50	12.7	.248	6.3	11	2.0	.29	7.4	3.3	15	.13	3.2	0.026	0.7	4.88	MW	CG	N
0.300	7.62	70804S	.50	12.7	.248	6.3	9.6	1.7	.23	5.8	2.2	9.8	.13	3.2	0.026	0.7	4.88	SST	CG	N
0.300	7.62	70827	.50	12.7	.240	6.1	18	3.1	.28	7.2	5.0	22	.16	4.1	0.030	0.8	5.38	MW	CG	N
0.300	7.62	70827S	.50	12.7	.240	6.1	15	2.6	.22	5.7	3.4	15	.16	4.1	0.030	0.8	5.38	SST	CG	N
0.300	7.62	70849	.50	12.7	.236	6.0	23	4.1	.26	6.6	6.1	27	.17	4.4	0.032	0.8	5.38	MW	CG	N
0.300	7.62	70849S	.50	12.7	.236	6.0	20	3.5	.21	5.2	4.1	18	.17	4.4	0.032	0.8	5.38	SST	CG	N
0.300	7.62	70870	.50	12.7	.230	5.8	33	5.8	.23	5.8	7.5	34	.19	4.9	0.035	0.9	5.50	MW	CG	N
0.300	7.62	70870S	.50	12.7	.230	5.8	28	4.9	.18	4.6	5.1	23	.19	4.9	0.035	0.9	5.50	SST	CG	N
0.300	7.62	70889	.50	12.7	.224	5.7	46	8.1	.21	5.3	9.6	43	.21	5.4	0.038	1.0	5.63	MW	CG	N
0.300	7.62	70889S	.50	12.7	.224	5.7	39	6.9	.17	4.2	6.5	29	.21	5.4	0.038	1.0	5.63	SST	CG	N
0.300	7.62	70908	.50	12.7	.220	5.6	55	9.7	.20	5.1	11	50	.23	5.8	0.040	1.0	5.75	MW	CG	N
0.300	7.62	70908S	.50	12.7	.220	5.6	47	8.3	.16	4.1	7.5	33	.23	5.8	0.040	1.0	5.75	SST	CG	N
0.300	7.62	70927	.50	12.7	.216	5.5	70	12	.18	4.6	13	57	.24	6.1	0.042	1.1	5.75	MW	CG	N
0.300	7.62	70927S	.50	12.7	.216	5.5	60	10	.15	3.7	8.7	39	.24	6.1	0.042	1.1	5.75	SST	CG	N
0.300	7.62	70946	.50	12.7	.210	5.3	91	16	.17	4.4	16	70	.26	6.7	0.045	1.1	5.88	MW	CG	N
0.300	7.62	70946S	.50	12.7	.210	5.3	78	14	.14	3.5	11	47	.26	6.7	0.045	1.1	5.88	SST	CG	N
0.300	7.62	70965	.50	12.7	.206	5.2	112	20	.16	4.0	18	79	.28	7.0	0.047	1.2	5.88	MW	CG	N
0.300	7.62	70965S	.50	12.7	.206	5.2	95	17	.13	3.2	12	53	.28	7.0	0.047	1.2	5.88	SST	CG	N
0.300	7.62	70986	.50	12.7	.202	5.1	133	23	.15	3.8	20	89	.29	7.5	0.049	1.2	6.00	MW	CG	N
0.300	7.62	70986S	.50	12.7	.202	5.1	113	20	.12	3.0	14	60	.29	7.5	0.049	1.2	6.00	SST	CG	N
0.300	7.62	71007	.50	12.7	.198	5.0	158	28	.13	3.4	21	94	.31	7.8	0.051	1.3	6.00	MW	CG	N
0.300	7.62	71007S	.50	12.7	.198	5.0	134	24	.11	2.7	14	63	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.300	7.62	70782	.56	14.2	.256	6.5	6.0	1.0	.36	9.1	2.1	9.5	.10	2.6	0.022	0.6	4.63	MW	CG	N
0.300	7.62	70782S	.56	14.2	.256	6.5	5.1	.89	.28	7.1	1.4	6.3	.10	2.6	0.022	0.6	4.63	SST	CG	N
0.300	7.62	70805	.56	14.2	.248	6.3	10	1.8	.33	8.3	3.3	15	.13	3.4	0.026	0.7	5.13	MW	CG	N
0.300	7.62	70805S	.56	14.2	.248	6.3	8.6	1.5	.26	6.5	2.2	9.8	.13	3.4	0.026	0.7	5.13	SST	CG	N
0.300	7.62	70828	.56	14.2	.240	6.1	16	2.7	.32	8.1	5.0	22	.17	4.4	0.030	0.8	5.75	MW	CG	N
0.300	7.62	70828S	.56	14.2	.240	6.1	13	2.3	.25	6.4	3.4	15	.17	4.4	0.030	0.8	5.75	SST	CG	N
0.300	7.62	70850	.56	14.2	.236	6.0	20	3.5	.30	7.7	6.1	27	.19	4.8	0.032	0.8	5.88	MW	CG	N
0.300	7.62	70850S	.56	14.2	.236	6.0	17	3.0	.24	6.0	4.1	18	.19	4.8	0.032	0.8	5.88	SST	CG	N
0.300	7.62	70871	.56	14.2	.230	5.8	29	5.0	.26	6.7	7.5	34	.21	5.3	0.035	0.9	6.00	MW	CG	N
0.300	7.62	70871S	.56	14.2	.230	5.8	24	4.3	.21	5.3	5.1	23	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.300	7.62	70890	.56	14.2	.224	5.7	39	6.8	.25	6.3	9.6	43	.24	6.0	0.038	1.0	6.25	MW	CG	N
0.300	7.62	70890S	.56	14.2	.224	5.7	33	5.8	.20	5.0	6.5	29	.24	6.0	0.038	1.0	6.25	SST	CG	N
0.300	7.62	70909	.56	14.2	.220	5.6	48	8.4	.23	5.9	11	50	.26	6.5	0.040	1.0	6.38	MW	CG	N
0.300	7.62	70909S	.56	14.2	.220	5.6	41	7.2	.18	4.7	7.5	33	.26	6.5	0.040	1.0	6.38	SST	CG	N
0.300	7.62	70928	.56	14.2	.216	5.5	60	11	.21	5.4	13	57	.27	6.8	0.042	1.1	6.38	MW	CG	N
0.300	7.62	70928S	.56	14.2	.216	5.5	51	8.9	.17	4.3	8.7	39	.27	6.8	0.042	1.1	6.38	SST	CG	N
0.300	7.62	70947	.56	14.2	.210	5.3	78	14	.20	5.1	16	70	.30	7.6	0.045	1.1	6.63	MW	CG	N
0.300	7.62	70947S	.56	14.2	.210	5.3	66	12	.16	4.1	11	47	.30	7.6	0.045	1.1	6.63	SST	CG	N
0.300	7.62	70966	.56	14.2	.206	5.2	97	17	.18	4.6	18	79	.31	7.8	0.047	1.2	6.50	MW	CG	N
0.300	7.62	70966S	.56	14.2	.206	5.2	83	14	.15	3.7	12	53	.31	7.8	0.047	1.2	6.50	SST	CG	N
0.300	7.62	70987	.56	14.2	.202	5.1	116	20	.17	4.4	20	89	.32	8.1	0.049	1.2	6.50	MW	CG	N
0.300	7.62	70987S	.56	14.2	.202	5.1	98	17	.14	3.5	14	60	.32	8.1	0.049	1.2	6.50	SST	CG	N
0.300	7.62	71008	.56	14.2	.198	5.0	137	24	.15	3.9	21	94	.34	8.6	0.051	1.3	6.63	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.300	7.62	71008S	.56	14.2	.198	5.0	116	20	.12	3.1	14	63	.34	8.6	0.051	1.3	6.63	SST	CG	N
0.300	7.62	B4-34	.56	14.3	.224	5.7	37	6.5	.26	6.6	9.6	43	.25	6.3	0.038	1.0	6.50	MW	CG	GI
0.300	7.62	70783	.63	16.0	.256	6.5	5.0	.88	.43	11	2.1	9.5	.11	2.9	0.022	0.6	5.13	MW	CG	N
0.300	7.62	70783S	.63	16.0	.256	6.5	4.3	.74	.33	8.5	1.4	6.3	.11	2.9	0.022	0.6	5.13	SST	CG	N
0.300	7.62	70806	.63	16.0	.248	6.3	9.0	1.6	.37	9.4	3.3	15	.15	3.7	0.026	0.7	5.63	MW	CG	N
0.300	7.62	70806S	.63	16.0	.248	6.3	7.6	1.3	.29	7.4	2.2	9.8	.15	3.7	0.026	0.7	5.63	SST	CG	N
0.300	7.62	70829	.63	16.0	.240	6.1	14	2.4	.36	9.2	5.0	22	.19	4.8	0.030	0.8	6.25	MW	CG	N
0.300	7.62	70829S	.63	16.0	.240	6.1	12	2.1	.28	7.2	3.4	15	.19	4.8	0.030	0.8	6.25	SST	CG	N
0.300	7.62	70851	.63	16.0	.236	6.0	18	3.2	.34	8.5	6.1	27	.20	5.2	0.032	0.8	6.38	MW	CG	N
0.300	7.62	70851S	.63	16.0	.236	6.0	15	2.7	.26	6.7	4.1	18	.20	5.2	0.032	0.8	6.38	SST	CG	N
0.300	7.62	70872	.63	16.0	.230	5.8	26	4.5	.29	7.5	7.5	34	.23	5.8	0.035	0.9	6.50	MW	CG	N
0.300	7.62	70872S	.63	16.0	.230	5.8	22	3.8	.23	6.0	5.1	23	.23	5.8	0.035	0.9	6.50	SST	CG	N
0.300	7.62	70891	.63	16.0	.224	5.7	35	6.1	.27	7.0	9.6	43	.26	6.5	0.038	1.0	6.75	MW	CG	N
0.300	7.62	70891S	.63	16.0	.224	5.7	30	5.2	.22	5.5	6.5	29	.26	6.5	0.038	1.0	6.75	SST	CG	N
0.300	7.62	70910	.63	16.0	.220	5.6	43	7.5	.26	6.6	11	50	.28	7.0	0.040	1.0	6.88	MW	CG	N
0.300	7.62	70910S	.63	16.0	.220	5.6	37	6.4	.21	5.2	7.5	33	.28	7.0	0.040	1.0	6.88	SST	CG	N
0.300	7.62	70929	.63	16.0	.216	5.5	52	9.1	.25	6.3	13	57	.29	7.5	0.042	1.1	7.00	MW	CG	N
0.300	7.62	70929S	.63	16.0	.216	5.5	44	7.7	.20	5.0	8.7	39	.29	7.5	0.042	1.1	7.00	SST	CG	N
0.300	7.62	70948	.63	16.0	.210	5.3	68	12	.23	5.8	16	70	.33	8.3	0.045	1.1	7.25	MW	CG	N
0.300	7.62	70948S	.63	16.0	.210	5.3	58	10	.18	4.6	11	47	.33	8.3	0.045	1.1	7.25	SST	CG	N
0.300	7.62	70967	.63	16.0	.206	5.2	86	15	.21	5.2	18	79	.33	8.4	0.047	1.2	7.00	MW	CG	N
0.300	7.62	70967S	.63	16.0	.206	5.2	73	13	.16	4.2	12	53	.33	8.4	0.047	1.2	7.00	SST	CG	N
0.300	7.62	70988	.63	16.0	.202	5.1	102	18	.20	5.0	20	89	.35	8.9	0.049	1.2	7.13	MW	CG	N
0.300	7.62	70988S	.63	16.0	.202	5.1	87	15	.16	4.0	14	60	.35	8.9	0.049	1.2	7.13	SST	CG	N
0.300	7.62	71009	.63	16.0	.198	5.0	121	21	.17	4.4	21	94	.37	9.4	0.051	1.3	7.25	MW	CG	N
0.300	7.62	71009S	.63	16.0	.198	5.0	103	18	.14	3.5	14	63	.37	9.4	0.051	1.3	7.25	SST	CG	N
0.300	7.62	70784	.69	17.5	.256	6.5	4.6	.81	.46	12	2.1	9.5	.12	3.0	0.022	0.6	5.38	MW	CG	N
0.300	7.62	70784S	.69	17.5	.256	6.5	3.9	.68	.36	9.2	1.4	6.3	.12	3.0	0.022	0.6	5.38	SST	CG	N
0.300	7.62	70807	.69	17.5	.248	6.3	7.9	1.4	.42	11	3.3	15	.16	4.0	0.026	0.7	6.00	MW	CG	N
0.300	7.62	70807S	.69	17.5	.248	6.3	6.7	1.2	.33	8.4	2.2	9.8	.16	4.0	0.026	0.7	6.00	SST	CG	N
0.300	7.62	70823	.69	17.5	.242	6.1	9.0	1.6	.47	12	4.2	19	.22	5.6	0.029	0.7	7.63	MW	CG	N
0.300	7.62	70823S	.69	17.5	.242	6.1	7.7	1.3	.40	10	3.1	14	.22	5.6	0.029	0.7	7.63	SST	CG	N
0.300	7.62	70830	.69	17.5	.240	6.1	13	2.2	.40	10	5.0	22	.20	5.1	0.030	0.8	6.75	MW	CG	N
0.300	7.62	70830S	.69	17.5	.240	6.1	11	1.9	.32	8.1	3.4	15	.20	5.1	0.030	0.8	6.75	SST	CG	N
0.300	7.62	70852	.69	17.5	.236	6.0	16	2.8	.38	9.6	6.1	27	.22	5.6	0.032	0.8	6.88	MW	CG	N
0.300	7.62	70852S	.69	17.5	.236	6.0	14	2.4	.30	7.5	4.1	18	.22	5.6	0.032	0.8	6.88	SST	CG	N
0.300	7.62	70873	.69	17.5	.230	5.8	23	4.0	.33	8.4	7.5	34	.25	6.3	0.035	0.9	7.13	MW	CG	N
0.300	7.62	70873S	.69	17.5	.230	5.8	19	3.4	.26	6.7	5.1	23	.25	6.3	0.035	0.9	7.13	SST	CG	N
0.300	7.62	70892	.69	17.5	.224	5.7	30	5.3	.32	8.1	9.6	43	.29	7.2	0.038	1.0	7.50	MW	CG	N
0.300	7.62	70892S	.69	17.5	.224	5.7	26	4.5	.25	6.4	6.5	29	.29	7.2	0.038	1.0	7.50	SST	CG	N
0.300	7.62	70911	.69	17.5	.220	5.6	38	6.7	.29	7.4	11	50	.30	7.6	0.040	1.0	7.50	MW	CG	N
0.300	7.62	70911S	.69	17.5	.220	5.6	32	5.7	.23	5.9	7.5	33	.30	7.6	0.040	1.0	7.50	SST	CG	N
0.300	7.62	70930	.69	17.5	.216	5.5	46	8.0	.28	7.2	13	57	.33	8.3	0.042	1.1	7.75	MW	CG	N
0.300	7.62	70930S	.69	17.5	.216	5.5	39	6.8	.22	5.7	8.7	39	.33	8.3	0.042	1.1	7.75	SST	CG	N
0.300	7.62	70949	.69	17.5	.210	5.3	62	11	.25	6.5	16	70	.35	8.9	0.045	1.1	7.75	MW	CG	N
0.300	7.62	70949S	.69	17.5	.210	5.3	52	9.2	.20	5.2	11	47	.35	8.9	0.045	1.1	7.75	SST	CG	N
0.300	7.62	70968	.69	17.5	.206	5.2	77	13	.23	5.9	18	79	.36	9.1	0.047	1.2	7.63	MW	CG	N
0.300	7.62	70968S	.69	17.5	.206	5.2	65	11	.18	4.7	12	53	.36	9.1	0.047	1.2	7.63	SST	CG	N
0.300	7.62	70989	.69	17.5	.202	5.1	90	16	.22	5.6	20	89	.38	9.6	0.049	1.2	7.75	MW	CG	N
0.300	7.62	70989S	.69	17.5	.202	5.1	77	13	.18	4.5	14	60	.38	9.6	0.049	1.2	7.75	SST	CG	N
0.300	7.62	71010	.69	17.5	.198	5.0	107	19	.20	5.0	21	94	.40	10.2	0.051	1.3	7.88	MW	CG	N
0.300	7.62	71010S	.69	17.5	.198	5.0	91	16	.16	4.0	14	63	.40	10.2	0.051	1.3	7.88	SST	CG	N
0.300	7.62	70785	.75	19.1	.256	6.5	4.1	.71	.53	13	2.1	9.5	.13	3.3	0.022	0.6	5.88	MW	CG	N
0.300	7.62	70785S	.75	19.1	.256	6.5	3.4	.60	.41	10	1.4	6.3	.13	3.3	0.022	0.6	5.88	SST	CG	N
0.300	7.62	70808	.75	19.1	.248	6.3	7.5	1.3	.44	11	3.3	15	.16	4.1	0.026	0.7	6.25	MW	CG	N
0.300	7.62	70808S	.75	19.1	.248	6.3	6.3	1.1	.35	8.9	2.2	9.8	.16	4.1	0.026	0.7	6.25	SST	CG	N
0.300	7.62	70831	.75	19.1	.240	6.1	11	2.0	.44	11	5.0	22	.21	5.4	0.030	0.8	7.13	MW	CG	N
0.300	7.62	70831S	.75	19.1	.240	6.1	9.7	1.7	.35	8.8	3.4	15	.21	5.4	0.030	0.8	7.13	SST	CG	N
0.300	7.62	70853	.75	19.1	.236	6.0	15	2.6	.41	10	6.1	27	.23	5.9	0.032	0.8	7.25	MW	CG	N
0.300	7.62	70853S	.75	19.1	.236	6.0	13	2.2	.32	8.1	4.1	18	.23	5.9	0.032	0.8	7.25	SST	CG	N
0.300	7.62	70874	.75	19.1	.230	5.8	21	3.6	.36	9.2	7.5	34	.27	6.8	0.035	0.9	7.63	MW	CG	N
0.300	7.62	70874S	.75	19.1	.230	5.8	18	3.1	.29	7.3	5.1	23	.27	6.8	0.035	0.9	7.63	SST	CG	N
0.300	7.62	70893	.75	19.1	.224	5.7	28	4.9	.34	8.7	9.6	43	.30	7.7	0.038	1.0	8.00	MW	CG	N
0.300	7.62	70893S	.75	19.1	.224	5.7	24	4.2	.27	6.9	6.5	29	.30	7.7	0.038	1.0	8.00	SST	CG	N
0.300	7.62	70912	.75	19.1	.220	5.6	34	6.0	.32	8.2	11	50	.33	8.3	0.040	1.0	8.13	MW	CG	N
0.300	7.62	70912S	.75	19.1	.220	5.6	29	5.1	.26	6.5	7.5	33	.33	8.3	0.040	1.0	8.13	SST	CG	N
0.300	7.62	70931	.75	19.1	.216	5.5	42	7.3	.31	7.8	13	57	.35	8.8	0.042	1.1	8.25	MW	CG	N
0.300	7.62	70931S	.75	19.1	.216	5.5	36	6.2	.24	6.2	8.7	39	.35	8.8	0.042	1.1	8.25	SST	CG	N
0.300	7.62	70950	.75	19.1	.210	5.3	55	9.6	.28	7.2	16	70	.38	9.7	0.045	1.1	8.50	MW	CG	N
0.300	7.62	70950S	.75	19.1	.210	5.3	47	8.2	.23	5.8	11	47	.38	9.7	0.045	1.1	8.50	SST	CG	N
0.300	7.62	70969	.75	19.1	.206	5.2	69	12	.26	6.5	18	79	.39	9.8	0.047	1.2	8.25	MW	CG	N
0.300	7.62	70969S	.75	19.1	.206	5.2	59	10	.20	5.2	12	53	.39	9.8	0.047	1.2	8.25	SST	CG	N
0.300	7.62	70990	.75	19.1	.202	5.1	82	14	.24	6.2	20	89	.41	10.4	0.049	1.2	8.38	MW	CG	N
0.300	7.62	70990S	.75	19.1	.202	5.1	70	12	.19	4.9	14	60	.41	10.4	0.049	1.2	8.38	SST	CG	N
0.300	7.62	71011	.75	19.1	.198	5.0	97	17	.22	5.5	21	94	.43	11.0	0.051	1.3	8.50	MW	CG	N
0.300	7.62	71011S	.75	19.1	.198	5.0	82	14	.17	4.4	14	63	.43	11.0	0.051	1.3	8.50	SST	CG	N
0.300	7.62	70786	.81	20.6	.256	6.5	3.7	.64	.58	15	2.1	9.5	.14	3.5	0.022	0.6	6.25	MW	CG	N
0.300	7.62	70786S	.81	20.6	.256	6.5	3.1	.54	.46	12	1.4	6.3	.14	3.5	0.022	0.6	6.25	SST	CG	N
0.300	7.62	70809	.81	20.6	.248	6.3	6.9	1.2	.48	12	3.3	15	.17	4.4	0.026	0.7	6.63	MW	CG	N
0.300	7.62	70809S	.81	20.6	.248	6.3	5.8	1.0	.38	9.6	2.2	9.8	.17	4.4	0.026	0.7	6.63	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.300	7.62	70832	.81	20.6	.240	6.1	10	1.8	.48	12	5.0	22	.23	5.8	0.030	0.8	7.63	MW	CG	N
0.300	7.62	70832S	.81	20.6	.240	6.1	8.9	1.6	.38	9.6	3.4	15	.23	5.8	0.030	0.8	7.63	SST	CG	N
0.300	7.62	70854	.81	20.6	.236	6.0	14	2.4	.45	11	6.1	27	.25	6.3	0.032	0.8	7.75	MW	CG	N
0.300	7.62	70854S	.81	20.6	.236	6.0	12	2.0	.35	9.0	4.1	18	.25	6.3	0.032	0.8	7.75	SST	CG	N
0.300	7.62	70875	.81	20.6	.230	5.8	19	3.3	.40	10	7.5	34	.28	7.2	0.035	0.9	8.13	MW	CG	N
0.300	7.62	70875S	.81	20.6	.230	5.8	16	2.8	.31	8.0	5.1	23	.28	7.2	0.035	0.9	8.13	SST	CG	N
0.300	7.62	70894	.81	20.6	.224	5.7	26	4.5	.37	9.4	9.6	43	.32	8.1	0.038	1.0	8.38	MW	CG	N
0.300	7.62	70894S	.81	20.6	.224	5.7	22	3.9	.29	7.5	6.5	29	.32	8.1	0.038	1.0	8.38	SST	CG	N
0.300	7.62	70913	.81	20.6	.220	5.6	32	5.5	.35	9.0	11	50	.35	8.8	0.040	1.0	8.63	MW	CG	N
0.300	7.62	70913S	.81	20.6	.220	5.6	27	4.7	.28	7.1	7.5	33	.35	8.8	0.040	1.0	8.63	SST	CG	N
0.300	7.62	70932	.81	20.6	.216	5.5	38	6.6	.34	8.6	13	57	.37	9.5	0.042	1.1	8.88	MW	CG	N
0.300	7.62	70932S	.81	20.6	.216	5.5	32	5.6	.27	6.9	8.7	39	.37	9.5	0.042	1.1	8.88	SST	CG	N
0.300	7.62	70951	.81	20.6	.210	5.3	51	9.0	.31	7.8	16	70	.41	10.3	0.045	1.1	9.00	MW	CG	N
0.300	7.62	70951S	.81	20.6	.210	5.3	43	7.6	.24	6.2	11	47	.41	10.3	0.045	1.1	9.00	SST	CG	N
0.300	7.62	70970	.81	20.6	.206	5.2	63	11	.28	7.1	18	79	.42	10.6	0.047	1.2	8.88	MW	CG	N
0.300	7.62	70970S	.81	20.6	.206	5.2	54	9.4	.22	5.7	12	53	.42	10.6	0.047	1.2	8.88	SST	CG	N
0.300	7.62	70991	.81	20.6	.202	5.1	75	13	.27	6.8	20	89	.44	11.2	0.049	1.2	9.00	MW	CG	N
0.300	7.62	70991S	.81	20.6	.202	5.1	64	11	.21	5.4	14	60	.44	11.2	0.049	1.2	9.00	SST	CG	N
0.300	7.62	71012	.81	20.6	.198	5.0	89	16	.24	6.0	21	94	.47	11.8	0.051	1.3	9.13	MW	CG	N
0.300	7.62	71012S	.81	20.6	.198	5.0	75	13	.19	4.8	14	63	.47	11.8	0.051	1.3	9.13	SST	CG	N
0.300	7.62	70787	.88	22.4	.256	6.5	3.3	.58	.65	16	2.1	9.5	.15	3.8	0.022	0.6	6.75	MW	CG	N
0.300	7.62	70787S	.88	22.4	.256	6.5	2.8	.49	.51	13	1.4	6.3	.15	3.8	0.022	0.6	6.75	SST	CG	N
0.300	7.62	70810	.88	22.4	.248	6.3	6.1	1.1	.55	14	3.3	15	.19	4.8	0.026	0.7	7.25	MW	CG	N
0.300	7.62	70810S	.88	22.4	.248	6.3	5.1	.90	.43	11	2.2	9.8	.19	4.8	0.026	0.7	7.25	SST	CG	N
0.300	7.62	70833	.88	22.4	.240	6.1	9.7	1.7	.52	13	5.0	22	.24	6.2	0.030	0.8	8.13	MW	CG	N
0.300	7.62	70833S	.88	22.4	.240	6.1	8.2	1.4	.41	10	3.4	15	.24	6.2	0.030	0.8	8.13	SST	CG	N
0.300	7.62	70855	.88	22.4	.236	6.0	12	2.2	.49	13	6.1	27	.27	6.8	0.032	0.8	8.38	MW	CG	N
0.300	7.62	70855S	.88	22.4	.236	6.0	10	1.8	.39	9.9	4.1	18	.27	6.8	0.032	0.8	8.38	SST	CG	N
0.300	7.62	70876	.88	22.4	.230	5.8	18	3.1	.43	11	7.5	34	.30	7.7	0.035	0.9	8.63	MW	CG	N
0.300	7.62	70876S	.88	22.4	.230	5.8	15	2.6	.34	8.7	5.1	23	.30	7.7	0.035	0.9	8.63	SST	CG	N
0.300	7.62	70895	.88	22.4	.224	5.7	23	4.0	.41	11	9.6	43	.35	8.9	0.038	1.0	9.25	MW	CG	N
0.300	7.62	70895S	.88	22.4	.224	5.7	20	3.4	.33	8.4	6.5	29	.35	8.9	0.038	1.0	9.25	SST	CG	N
0.300	7.62	70914	.88	22.4	.220	5.6	29	5.1	.38	9.7	11	50	.37	9.3	0.040	1.0	9.13	MW	CG	N
0.300	7.62	70914S	.88	22.4	.220	5.6	25	4.3	.30	7.7	7.5	33	.37	9.3	0.040	1.0	9.13	SST	CG	N
0.300	7.62	70933	.88	22.4	.216	5.5	34	5.9	.38	9.6	13	57	.40	10.3	0.042	1.1	9.63	MW	CG	N
0.300	7.62	70933S	.88	22.4	.216	5.5	29	5.0	.30	7.7	8.7	39	.40	10.3	0.042	1.1	9.63	SST	CG	N
0.300	7.62	70952	.88	22.4	.210	5.3	46	8.1	.34	8.6	16	70	.44	11.1	0.045	1.1	9.75	MW	CG	N
0.300	7.62	70952S	.88	22.4	.210	5.3	39	6.9	.27	6.9	11	47	.44	11.1	0.045	1.1	9.75	SST	CG	N
0.300	7.62	70971	.88	22.4	.206	5.2	58	10	.31	7.8	18	79	.45	11.3	0.047	1.2	9.50	MW	CG	N
0.300	7.62	70971S	.88	22.4	.206	5.2	49	8.6	.24	6.2	12	53	.45	11.3	0.047	1.2	9.50	SST	CG	N
0.300	7.62	70992	.88	22.4	.202	5.1	68	12	.29	7.4	20	89	.47	12.0	0.049	1.2	9.63	MW	CG	N
0.300	7.62	70992S	.88	22.4	.202	5.1	58	10	.23	5.9	14	60	.47	12.0	0.049	1.2	9.63	SST	CG	N
0.300	7.62	71013	.88	22.4	.198	5.0	81	14	.26	6.6	21	94	.50	12.6	0.051	1.3	9.75	MW	CG	N
0.300	7.62	71013S	.88	22.4	.198	5.0	69	12	.21	5.3	14	63	.50	12.6	0.051	1.3	9.75	SST	CG	N
0.300	7.62	70789	.94	23.9	.256	6.5	3.3	.58	.65	16	2.1	9.5	.15	3.8	0.022	0.6	6.75	MW	CG	N
0.300	7.62	70789S	.94	23.9	.256	6.5	2.8	.49	.51	13	1.4	6.3	.15	3.8	0.022	0.6	6.75	SST	CG	N
0.300	7.62	70811	.94	23.9	.248	6.3	5.5	.96	.60	15	3.3	15	.20	5.1	0.026	0.7	7.75	MW	CG	N
0.300	7.62	70811S	.94	23.9	.248	6.3	4.7	.82	.47	12	2.2	9.8	.20	5.1	0.026	0.7	7.75	SST	CG	N
0.300	7.62	70834	.94	23.9	.240	6.1	9.0	1.6	.56	14	5.0	22	.26	6.6	0.030	0.8	8.63	MW	CG	N
0.300	7.62	70834S	.94	23.9	.240	6.1	7.6	1.3	.44	11	3.4	15	.26	6.6	0.030	0.8	8.63	SST	CG	N
0.300	7.62	70856	.94	23.9	.236	6.0	11	2.0	.55	14	6.1	27	.29	7.3	0.032	0.8	9.00	MW	CG	N
0.300	7.62	70856S	.94	23.9	.236	6.0	9.5	1.7	.43	11	4.1	18	.29	7.3	0.032	0.8	9.00	SST	CG	N
0.300	7.62	70877	.94	23.9	.230	5.8	16	2.8	.46	12	7.5	34	.32	8.1	0.035	0.9	9.13	MW	CG	N
0.300	7.62	70877S	.94	23.9	.230	5.8	14	2.4	.37	9.4	5.1	23	.32	8.1	0.035	0.9	9.13	SST	CG	N
0.300	7.62	70896	.94	23.9	.224	5.7	22	3.8	.44	11	9.6	43	.37	9.3	0.038	1.0	9.63	MW	CG	N
0.300	7.62	70896S	.94	23.9	.224	5.7	19	3.3	.35	8.8	6.5	29	.37	9.3	0.038	1.0	9.63	SST	CG	N
0.300	7.62	70915	.94	23.9	.220	5.6	27	4.8	.41	10	11	50	.39	9.9	0.040	1.0	9.75	MW	CG	N
0.300	7.62	70915S	.94	23.9	.220	5.6	23	4.0	.33	8.3	7.5	33	.39	9.9	0.040	1.0	9.75	SST	CG	N
0.300	7.62	70934	.94	23.9	.216	5.5	32	5.6	.40	10	13	57	.43	10.8	0.042	1.1	10.1	MW	CG	N
0.300	7.62	70934S	.94	23.9	.216	5.5	27	4.8	.32	8.1	8.7	39	.43	10.8	0.042	1.1	10.1	SST	CG	N
0.300	7.62	70953	.94	23.9	.210	5.3	42	7.4	.37	9.4	16	70	.47	11.9	0.045	1.1	10.4	MW	CG	N
0.300	7.62	70953S	.94	23.9	.210	5.3	36	6.3	.30	7.5	11	47	.47	11.9	0.045	1.1	10.4	SST	CG	N
0.300	7.62	70972	.94	23.9	.206	5.2	54	9.4	.33	8.4	18	79	.47	11.9	0.047	1.2	10.0	MW	CG	N
0.300	7.62	70972S	.94	23.9	.206	5.2	46	8.0	.26	6.7	12	53	.47	11.9	0.047	1.2	10.0	SST	CG	N
0.300	7.62	70993	.94	23.9	.202	5.1	64	11	.32	8.0	20	89	.50	12.8	0.049	1.2	10.3	MW	CG	N
0.300	7.62	70993S	.94	23.9	.202	5.1	54	9.5	.25	6.4	14	60	.50	12.8	0.049	1.2	10.3	SST	CG	N
0.300	7.62	71014	.94	23.9	.198	5.0	75	13	.28	7.1	21	94	.53	13.4	0.051	1.3	10.4	MW	CG	N
0.300	7.62	71014S	.94	23.9	.198	5.0	64	11	.22	5.7	14	63	.53	13.4	0.051	1.3	10.4	SST	CG	N
0.300	7.62	70790	1.00	25.4	.256	6.5	3.0	.53	.71	18	2.1	9.5	.16	4.1	0.022	0.6	7.25	MW	CG	N
0.300	7.62	70790S	1.00	25.4	.256	6.5	2.6	.45	.56	14	1.4	6.3	.16	4.1	0.022	0.6	7.25	SST	CG	N
0.300	7.62	70812	1.00	25.4	.248	6.3	5.1	.88	.65	17	3.3	15	.22	5.5	0.026	0.7	8.38	MW	CG	N
0.300	7.62	70812S	1.00	25.4	.248	6.3	4.3	.75	.51	13	2.2	9.8	.22	5.5	0.026	0.7	8.38	SST	CG	N
0.300	7.62	70835	1.00	25.4	.240	6.1	8.4	1.5	.60	15	5.0	22	.27	7.0	0.030	0.8	9.13	MW	CG	N
0.300	7.62	70835S	1.00	25.4	.240	6.1	7.1	1.2	.47	12	3.4	15	.27	7.0	0.030	0.8	9.13	SST	CG	N
0.300	7.62	70857	1.00	25.4	.236	6.0	10	1.8	.59	15	6.1	27	.31	7.8	0.032	0.8	9.63	MW	CG	N
0.300	7.62	70857S	1.00	25.4	.236	6.0	8.8	1.5	.47	12	4.1	18	.31	7.8	0.032	0.8	9.63	SST	CG	N
0.300	7.62	70878	1.00	25.4	.230	5.8	15	2.7	.50	13	7.5	34	.34	8.6	0.035	0.9	9.63	MW	CG	N
0.300	7.62	70878S	1.00	25.4	.230	5.8	13	2.3	.40	10	5.1	23	.34	8.6	0.035	0.9	9.63	SST	CG	N
0.300	7.62	70897	1.00	25.4	.224	5.7	21	3.6	.46	12	9.6	43	.38	9.7	0.038	1.0	10.0	MW	CG	N
0.300	7.62	70897S	1.00	25.4	.224	5.7	18	3.1	.37	9.3	6.5	29	.38	9.7	0.038	1.0	10.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.300	7.62	70916	1.00	25.4	.220	5.6	25	4.4	.44	11	11	50	.41	10.4	0.040	1.0	10.3	MW	CG	N
0.300	7.62	70916S	1.00	25.4	.220	5.6	22	3.8	.35	8.9	7.5	33	.41	10.4	0.040	1.0	10.3	SST	CG	N
0.300	7.62	70935	1.00	25.4	.216	5.5	30	5.3	.43	11	13	57	.45	11.3	0.042	1.1	10.6	MW	CG	N
0.300	7.62	70935S	1.00	25.4	.216	5.5	26	4.5	.34	8.6	8.7	39	.45	11.3	0.042	1.1	10.6	SST	CG	N
0.300	7.62	70954	1.00	25.4	.210	5.3	40	7.0	.39	9.9	16	70	.49	12.4	0.045	1.1	10.9	MW	CG	N
0.300	7.62	70954S	1.00	25.4	.210	5.3	34	6.0	.31	7.9	11	47	.49	12.4	0.045	1.1	10.9	SST	CG	N
0.300	7.62	70973	1.00	25.4	.206	5.2	50	8.8	.35	9.0	18	79	.50	12.7	0.047	1.2	10.6	MW	CG	N
0.300	7.62	70973S	1.00	25.4	.206	5.2	43	7.5	.28	7.2	12	53	.50	12.7	0.047	1.2	10.6	SST	CG	N
0.300	7.62	70994	1.00	25.4	.202	5.1	59	10	.34	8.6	20	89	.53	13.5	0.049	1.2	10.9	MW	CG	N
0.300	7.62	70994S	1.00	25.4	.202	5.1	50	8.8	.27	6.8	14	60	.53	13.5	0.049	1.2	10.9	SST	CG	N
0.300	7.62	71015	1.00	25.4	.198	5.0	70	12	.30	7.6	21	94	.56	14.2	0.051	1.3	11.0	MW	CG	N
0.300	7.62	71015S	1.00	25.4	.198	5.0	60	10	.24	6.1	14	63	.56	14.2	0.051	1.3	11.0	SST	CG	N
0.300	7.62	70792	1.13	28.7	.256	6.5	2.7	.47	.79	20	2.1	9.5	.17	4.3	0.022	0.6	7.75	MW	CG	N
0.300	7.62	70792S	1.13	28.7	.256	6.5	2.3	.40	.62	16	1.4	6.3	.17	4.3	0.022	0.6	7.75	SST	CG	N
0.300	7.62	70814	1.13	28.7	.248	6.3	4.6	.81	.72	18	3.3	15	.23	5.9	0.026	0.7	9.00	MW	CG	N
0.300	7.62	70814S	1.13	28.7	.248	6.3	3.9	.68	.57	14	2.2	9.8	.23	5.9	0.026	0.7	9.00	SST	CG	N
0.300	7.62	70837	1.13	28.7	.240	6.1	7.6	1.3	.66	17	5.0	22	.29	7.4	0.030	0.8	9.75	MW	CG	N
0.300	7.62	70837S	1.13	28.7	.240	6.1	6.5	1.1	.52	13	3.4	15	.29	7.4	0.030	0.8	9.75	SST	CG	N
0.300	7.62	70859	1.13	28.7	.236	6.0	9.5	1.7	.64	16	6.1	27	.33	8.3	0.032	0.8	10.3	MW	CG	N
0.300	7.62	70859S	1.13	28.7	.236	6.0	8.1	1.4	.50	13	4.1	18	.33	8.3	0.032	0.8	10.3	SST	CG	N
0.300	7.62	70879	1.13	28.7	.230	5.8	13	2.4	.56	14	7.5	34	.37	9.4	0.035	0.9	10.6	MW	CG	N
0.300	7.62	70879S	1.13	28.7	.230	5.8	11	2.0	.45	11	5.1	23	.37	9.4	0.035	0.9	10.6	SST	CG	N
0.300	7.62	70898	1.13	28.7	.224	5.7	19	3.3	.51	13	9.6	43	.41	10.5	0.038	1.0	10.9	MW	CG	N
0.300	7.62	70898S	1.13	28.7	.224	5.7	16	2.8	.41	10	6.5	29	.41	10.5	0.038	1.0	10.9	SST	CG	N
0.300	7.62	70917	1.13	28.7	.220	5.6	22	3.9	.50	13	11	50	.46	11.6	0.040	1.0	11.4	MW	CG	N
0.300	7.62	70917S	1.13	28.7	.220	5.6	19	3.3	.40	10	7.5	33	.46	11.6	0.040	1.0	11.4	SST	CG	N
0.300	7.62	70936	1.13	28.7	.216	5.5	28	4.8	.47	12	13	57	.48	12.3	0.042	1.1	11.5	MW	CG	N
0.300	7.62	70936S	1.13	28.7	.216	5.5	23	4.1	.37	9.4	8.7	39	.48	12.3	0.042	1.1	11.5	SST	CG	N
0.300	7.62	70955	1.13	28.7	.210	5.3	36	6.3	.43	11	16	70	.53	13.6	0.045	1.1	11.9	MW	CG	N
0.300	7.62	70955S	1.13	28.7	.210	5.3	31	5.4	.35	8.8	11	47	.53	13.6	0.045	1.1	11.9	SST	CG	N
0.300	7.62	70974	1.13	28.7	.206	5.2	44	7.7	.40	10	18	79	.55	14.0	0.047	1.2	11.8	MW	CG	N
0.300	7.62	70974S	1.13	28.7	.206	5.2	38	6.6	.32	8.1	12	53	.55	14.0	0.047	1.2	11.8	SST	CG	N
0.300	7.62	70995	1.13	28.7	.202	5.1	52	9.2	.38	9.7	20	89	.59	14.9	0.049	1.2	12.0	MW	CG	N
0.300	7.62	70995S	1.13	28.7	.202	5.1	44	7.8	.30	7.7	14	60	.59	14.9	0.049	1.2	12.0	SST	CG	N
0.300	7.62	71016	1.13	28.7	.198	5.0	62	11	.34	8.7	21	94	.62	15.9	0.051	1.3	12.3	MW	CG	N
0.300	7.62	71016S	1.13	28.7	.198	5.0	52	9.2	.27	6.9	14	63	.62	15.9	0.051	1.3	12.3	SST	CG	N
0.300	7.62	70793	1.25	31.8	.256	6.5	2.4	.42	.89	23	2.1	9.5	.19	4.7	0.022	0.6	8.50	MW	CG	N
0.300	7.62	70793S	1.25	31.8	.256	6.5	2.0	.36	.70	18	1.4	6.3	.19	4.7	0.022	0.6	8.50	SST	CG	N
0.300	7.62	70815	1.25	31.8	.248	6.3	4.3	.75	.77	19	3.3	15	.24	6.2	0.026	0.7	9.38	MW	CG	N
0.300	7.62	70815S	1.25	31.8	.248	6.3	3.7	.64	.60	15	2.2	9.8	.24	6.2	0.026	0.7	9.38	SST	CG	N
0.300	7.62	70838	1.25	31.8	.240	6.1	6.6	1.2	.76	19	5.0	22	.33	8.4	0.030	0.8	11.0	MW	CG	N
0.300	7.62	70838S	1.25	31.8	.240	6.1	5.6	.98	.60	15	3.4	15	.33	8.4	0.030	0.8	11.0	SST	CG	N
0.300	7.62	70860	1.25	31.8	.236	6.0	8.6	1.5	.71	18	6.1	27	.36	9.0	0.032	0.8	11.1	MW	CG	N
0.300	7.62	70860S	1.25	31.8	.236	6.0	7.3	1.3	.56	14	4.1	18	.36	9.0	0.032	0.8	11.1	SST	CG	N
0.300	7.62	70880	1.25	31.8	.230	5.8	12	2.1	.63	16	7.5	34	.41	10.4	0.035	0.9	11.8	MW	CG	N
0.300	7.62	70880S	1.25	31.8	.230	5.8	10	1.8	.50	13	5.1	23	.41	10.4	0.035	0.9	11.8	SST	CG	N
0.300	7.62	70899	1.25	31.8	.224	5.7	16	2.9	.59	15	9.6	43	.47	11.8	0.038	1.0	12.3	MW	CG	N
0.300	7.62	70899S	1.25	31.8	.224	5.7	14	2.4	.47	12	6.5	29	.47	11.8	0.038	1.0	12.3	SST	CG	N
0.300	7.62	70918	1.25	31.8	.220	5.6	20	3.4	.57	14	11	50	.51	12.8	0.040	1.0	12.6	MW	CG	N
0.300	7.62	70918S	1.25	31.8	.220	5.6	17	2.9	.45	11	7.5	33	.51	12.8	0.040	1.0	12.6	SST	CG	N
0.300	7.62	70937	1.25	31.8	.216	5.5	24	4.2	.53	14	13	57	.54	13.7	0.042	1.1	12.9	MW	CG	N
0.300	7.62	70937S	1.25	31.8	.216	5.5	20	3.6	.42	11	8.7	39	.54	13.7	0.042	1.1	12.9	SST	CG	N
0.300	7.62	70956	1.25	31.8	.210	5.3	32	5.6	.49	12	16	70	.59	14.9	0.045	1.1	13.0	MW	CG	N
0.300	7.62	70956S	1.25	31.8	.210	5.3	27	4.8	.39	9.9	11	47	.59	14.9	0.045	1.1	13.0	SST	CG	N
0.300	7.62	70975	1.25	31.8	.206	5.2	39	6.9	.45	11	18	79	.61	15.5	0.047	1.2	13.0	MW	CG	N
0.300	7.62	70975S	1.25	31.8	.206	5.2	36	5.9	.36	9.1	12	53	.61	15.5	0.047	1.2	13.0	SST	CG	N
0.300	7.62	70996	1.25	31.8	.202	5.1	46	8.1	.43	11	20	89	.65	16.5	0.049	1.2	13.3	MW	CG	N
0.300	7.62	70996S	1.25	31.8	.202	5.1	39	6.9	.34	8.7	14	60	.65	16.5	0.049	1.2	13.3	SST	CG	N
0.300	7.62	71017	1.25	31.8	.198	5.0	55	9.6	.38	9.8	21	94	.69	17.5	0.051	1.3	13.5	MW	CG	N
0.300	7.62	71017S	1.25	31.8	.198	5.0	47	8.2	.31	7.8	14	63	.69	17.5	0.051	1.3	13.5	SST	CG	N
0.300	7.62	70795	1.38	35.1	.256	6.5	2.2	.39	.97	25	2.1	9.5	.20	5.1	0.022	0.6	9.13	MW	CG	N
0.300	7.62	70795S	1.38	35.1	.256	6.5	1.9	.33	.76	19	1.4	6.3	.20	5.1	0.022	0.6	9.13	SST	CG	N
0.300	7.62	70817	1.38	35.1	.248	6.3	3.8	.67	.87	22	3.3	15	.27	6.9	0.026	0.7	10.4	MW	CG	N
0.300	7.62	70817S	1.38	35.1	.248	6.3	3.2	.57	.68	17	2.2	9.8	.27	6.9	0.026	0.7	10.4	SST	CG	N
0.300	7.62	70840	1.38	35.1	.240	6.1	6.1	1.1	.83	21	5.0	22	.35	9.0	0.030	0.8	11.8	MW	CG	N
0.300	7.62	70840S	1.38	35.1	.240	6.1	5.2	.91	.65	17	3.4	15	.35	9.0	0.030	0.8	11.8	SST	CG	N
0.300	7.62	70862	1.38	35.1	.236	6.0	7.7	1.3	.79	20	6.1	27	.39	9.9	0.032	0.8	12.1	MW	CG	N
0.300	7.62	70862S	1.38	35.1	.236	6.0	6.5	1.1	.62	16	4.1	18	.39	9.9	0.032	0.8	12.1	SST	CG	N
0.300	7.62	70881	1.38	35.1	.230	5.8	11	1.9	.70	18	7.5	34	.45	11.3	0.035	0.9	12.8	MW	CG	N
0.300	7.62	70881S	1.38	35.1	.230	5.8	9.2	1.6	.56	14	5.1	23	.45	11.3	0.035	0.9	12.8	SST	CG	N
0.300	7.62	70900	1.38	35.1	.224	5.7	15	2.6	.64	16	9.6	43	.50	12.7	0.038	1.0	13.1	MW	CG	N
0.300	7.62	70900S	1.38	35.1	.224	5.7	13	2.2	.51	13	6.5	29	.50	12.7	0.038	1.0	13.1	SST	CG	N
0.300	7.62	70919	1.38	35.1	.220	5.6	18	3.1	.63	16	11	50	.56	14.1	0.040	1.0	13.9	MW	CG	N
0.300	7.62	70919S	1.38	35.1	.220	5.6	15	2.6	.50	13	7.5	33	.56	14.1	0.040	1.0	13.9	SST	CG	N
0.300	7.62	70938	1.38	35.1	.216	5.5	22	3.8	.59	15	13	57	.58	14.8	0.042	1.1	13.9	MW	CG	N
0.300	7.62	70938S	1.38	35.1	.216	5.5	19	3.3	.47	12	8.7	39	.58	14.8	0.042	1.1	13.9	SST	CG	N
0.300	7.62	70957	1.38	35.1	.210	5.3	29	5.1	.54	14	16	70	.64	16.3	0.045	1.1	14.3	MW	CG	N
0.300	7.62	70957S	1.38	35.1	.210	5.3	25	4.3	.43	11	11	47	.64	16.3	0.045	1.1	14.3	SST	CG	N
0.300	7.62	70976	1.38	35.1	.206	5.2	35	6.2	.50	13	18	79	.67	17.0	0.047	1.2	14.3	MW	CG	N
0.300	7.62	70976S	1.38	35.1	.206	5.2	30	5.3	.40	10	12	53	.67	17.0	0.047	1.2	14.3	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.300	7.62	70997	1.38	35.1	.202	5.1	42	7.3	.48	12	20	89	.72	18.2	0.049	1.2	14.6	MW	CG	N
0.300	7.62	70997S	1.38	35.1	.202	5.1	35	6.2	.38	9.7	14	60	.72	18.2	0.049	1.2	14.6	SST	CG	N
0.300	7.62	71018	1.38	35.1	.198	5.0	49	8.6	.43	11	21	94	.75	19.1	0.051	1.3	14.8	MW	CG	N
0.300	7.62	71018S	1.38	35.1	.198	5.0	42	7.3	.34	8.6	14	63	.75	19.1	0.051	1.3	14.8	SST	CG	N
0.300	7.62	70796	1.50	38.1	.256	6.5	2.1	.36	1.0	26	2.1	9.5	.21	5.4	0.022	0.6	9.63	MW	CG	N
0.300	7.62	70796S	1.50	38.1	.256	6.5	1.7	.31	.81	21	1.4	6.3	.21	5.4	0.022	0.6	9.63	SST	CG	N
0.300	7.62	70818	1.50	38.1	.248	6.3	3.5	.61	.94	24	3.3	15	.29	7.3	0.026	0.7	11.1	MW	CG	N
0.300	7.62	70818S	1.50	38.1	.248	6.3	3.0	.52	.74	19	2.2	9.8	.29	7.3	0.026	0.7	11.1	SST	CG	N
0.300	7.62	70841	1.50	38.1	.240	6.1	5.5	.95	.92	23	5.0	22	.39	9.8	0.030	0.8	12.9	MW	CG	N
0.300	7.62	70841S	1.50	38.1	.240	6.1	4.6	.81	.73	18	3.4	15	.39	9.8	0.030	0.8	12.9	SST	CG	N
0.300	7.62	70863	1.50	38.1	.236	6.0	7.1	1.2	.86	22	6.1	27	.42	10.7	0.032	0.8	13.1	MW	CG	N
0.300	7.62	70863S	1.50	38.1	.236	6.0	6.0	1.0	.68	17	4.1	18	.42	10.7	0.032	0.8	13.1	SST	CG	N
0.300	7.62	70882	1.50	38.1	.230	5.8	9.9	1.7	.76	19	7.5	34	.48	12.2	0.035	0.9	13.8	MW	CG	N
0.300	7.62	70882S	1.50	38.1	.230	5.8	8.4	1.5	.61	15	5.1	23	.48	12.2	0.035	0.9	13.8	SST	CG	N
0.300	7.62	70901	1.50	38.1	.224	5.7	14	2.4	.70	18	9.6	43	.54	13.6	0.038	1.0	14.1	MW	CG	N
0.300	7.62	70901S	1.50	38.1	.224	5.7	12	2.0	.56	14	6.5	29	.54	13.6	0.038	1.0	14.1	SST	CG	N
0.300	7.62	70920	1.50	38.1	.220	5.6	16	2.8	.70	18	11	50	.61	15.4	0.040	1.0	15.1	MW	CG	N
0.300	7.62	70920S	1.50	38.1	.220	5.6	14	2.4	.55	14	7.5	33	.61	15.4	0.040	1.0	15.1	SST	CG	N
0.300	7.62	70939	1.50	38.1	.216	5.5	20	3.5	.65	16	13	57	.64	16.1	0.042	1.1	15.1	MW	CG	N
0.300	7.62	70939S	1.50	38.1	.216	5.5	17	3.0	.51	13	8.7	39	.64	16.1	0.042	1.1	15.1	SST	CG	N
0.300	7.62	70958	1.50	38.1	.210	5.3	26	4.6	.60	15	16	70	.70	17.7	0.045	1.1	15.5	MW	CG	N
0.300	7.62	70958S	1.50	38.1	.210	5.3	22	3.9	.48	12	11	47	.70	17.7	0.045	1.1	15.5	SST	CG	N
0.300	7.62	12758	1.50	38.1	.206	5.2	27	4.8	.44	11	12	53	.74	18.8	0.047	1.2	15.8	SST	CG	N
0.300	7.62	70977	1.50	38.1	.206	5.2	32	5.7	.55	14	18	79	.72	18.4	0.047	1.2	15.4	MW	CG	N
0.300	7.62	70977S	1.50	38.1	.206	5.2	27	4.8	.44	11	12	53	.72	18.4	0.047	1.2	15.4	SST	CG	N
0.300	7.62	70998	1.50	38.1	.202	5.1	38	6.7	.53	13	20	89	.77	19.6	0.049	1.2	15.8	MW	CG	N
0.300	7.62	70998S	1.50	38.1	.202	5.1	32	5.7	.42	11	14	60	.77	19.6	0.049	1.2	15.8	SST	CG	N
0.300	7.62	71019	1.50	38.1	.198	5.0	45	7.9	.47	12	21	94	.82	20.7	0.051	1.3	16.0	MW	CG	N
0.300	7.62	71019S	1.50	38.1	.198	5.0	38	6.7	.37	9.5	14	63	.82	20.7	0.051	1.3	16.0	SST	CG	N
0.300	7.62	70797	1.75	44.5	.256	6.5	1.7	.30	1.2	31	2.1	9.5	.24	6.2	0.022	0.6	11.1	MW	CG	N
0.300	7.62	70797S	1.75	44.5	.256	6.5	1.5	.26	.97	25	1.4	6.3	.24	6.2	0.022	0.6	11.1	SST	CG	N
0.300	7.62	70819	1.75	44.5	.248	6.3	3.0	.53	1.1	28	3.3	15	.33	8.3	0.026	0.7	12.6	MW	CG	N
0.300	7.62	70819S	1.75	44.5	.248	6.3	2.6	.45	.87	22	2.2	9.8	.33	8.3	0.026	0.7	12.6	SST	CG	N
0.300	7.62	70842	1.75	44.5	.240	6.1	4.7	.81	1.1	27	5.0	22	.44	11.2	0.030	0.8	14.8	MW	CG	N
0.300	7.62	70842S	1.75	44.5	.240	6.1	4.0	.69	.85	22	3.4	15	.44	11.2	0.030	0.8	14.8	SST	CG	N
0.300	7.62	70864	1.75	44.5	.236	6.0	6.0	1.1	1.0	26	6.1	27	.48	12.2	0.032	0.8	15.0	MW	CG	N
0.300	7.62	70864S	1.75	44.5	.236	6.0	5.1	.89	.80	20	4.1	18	.48	12.2	0.032	0.8	15.0	SST	CG	N
0.300	7.62	70883	1.75	44.5	.230	5.8	8.4	1.5	.90	23	7.5	34	.55	14.0	0.035	0.9	15.8	MW	CG	N
0.300	7.62	70883S	1.75	44.5	.230	5.8	7.1	1.3	.71	18	5.1	23	.55	14.0	0.035	0.9	15.8	SST	CG	N
0.300	7.62	70902	1.75	44.5	.224	5.7	11	2.0	.85	22	9.6	43	.64	16.3	0.038	1.0	16.9	MW	CG	N
0.300	7.62	70902S	1.75	44.5	.224	5.7	9.5	1.7	.68	17	6.5	29	.64	16.3	0.038	1.0	16.9	SST	CG	N
0.300	7.62	70921	1.75	44.5	.220	5.6	14	2.4	.81	20	11	50	.69	17.4	0.040	1.0	17.1	MW	CG	N
0.300	7.62	70921S	1.75	44.5	.220	5.6	12	2.1	.64	16	7.5	33	.69	17.4	0.040	1.0	17.1	SST	CG	N
0.300	7.62	70940	1.75	44.5	.216	5.5	16	2.9	.78	20	13	57	.75	19.1	0.042	1.1	17.9	MW	CG	N
0.300	7.62	70940S	1.75	44.5	.216	5.5	14	2.4	.62	16	8.7	39	.75	19.1	0.042	1.1	17.9	SST	CG	N
0.300	7.62	70959	1.75	44.5	.210	5.3	22	3.8	.72	18	16	70	.83	21.0	0.045	1.1	18.4	MW	CG	N
0.300	7.62	70959S	1.75	44.5	.210	5.3	18	3.2	.57	15	11	47	.83	21.0	0.045	1.1	18.4	SST	CG	N
0.300	7.62	70978	1.75	44.5	.206	5.2	28	4.8	.65	16	18	79	.83	21.2	0.047	1.2	17.8	MW	CG	N
0.300	7.62	70978S	1.75	44.5	.206	5.2	23	4.1	.51	13	12	53	.83	21.2	0.047	1.2	17.8	SST	CG	N
0.300	7.62	70999	1.75	44.5	.202	5.1	32	5.7	.62	16	20	89	.89	22.6	0.049	1.2	18.1	MW	CG	N
0.300	7.62	70999S	1.75	44.5	.202	5.1	28	4.8	.49	13	14	60	.89	22.6	0.049	1.2	18.1	SST	CG	N
0.300	7.62	71020	1.75	44.5	.198	5.0	38	6.7	.55	14	21	94	.94	24.0	0.051	1.3	18.5	MW	CG	N
0.300	7.62	71020S	1.75	44.5	.198	5.0	32	5.7	.44	11	14	63	.94	24.0	0.051	1.3	18.5	SST	CG	N
0.300	7.62	70798	2.00	50.8	.256	6.5	1.5	.25	1.5	37	2.1	9.5	.28	7.1	0.022	0.6	12.8	MW	CG	N
0.300	7.62	70798S	2.00	50.8	.256	6.5	1.2	.22	1.2	29	1.4	6.3	.28	7.1	0.022	0.6	12.8	SST	CG	N
0.300	7.62	70820	2.00	50.8	.248	6.3	2.6	.46	1.3	32	3.3	15	.37	9.4	0.026	0.7	14.3	MW	CG	N
0.300	7.62	70820S	2.00	50.8	.248	6.3	2.2	.39	1.0	25	2.2	9.8	.37	9.4	0.026	0.7	14.3	SST	CG	N
0.300	7.62	70843	2.00	50.8	.240	6.1	4.0	.70	1.3	32	5.0	22	.50	12.8	0.030	0.8	16.8	MW	CG	N
0.300	7.62	70843S	2.00	50.8	.240	6.1	3.4	.60	.99	25	3.4	15	.50	12.8	0.030	0.8	16.8	SST	CG	N
0.300	7.62	70865	2.00	50.8	.236	6.0	5.3	.93	1.1	29	6.1	27	.54	13.6	0.032	0.8	16.8	MW	CG	N
0.300	7.62	70865S	2.00	50.8	.236	6.0	4.5	.79	.90	23	4.1	18	.54	13.6	0.032	0.8	16.8	SST	CG	N
0.300	7.62	70884	2.00	50.8	.230	5.8	7.3	1.3	1.0	26	7.5	34	.63	15.9	0.035	0.9	17.9	MW	CG	N
0.300	7.62	70884S	2.00	50.8	.230	5.8	6.2	1.1	.82	21	5.1	23	.63	15.9	0.035	0.9	17.9	SST	CG	N
0.300	7.62	70903	2.00	50.8	.224	5.7	9.6	1.7	1.0	25	9.6	43	.74	18.7	0.038	1.0	19.4	MW	CG	N
0.300	7.62	70903S	2.00	50.8	.224	5.7	8.2	1.4	.79	20	6.5	29	.74	18.7	0.038	1.0	19.4	SST	CG	N
0.300	7.62	70922	2.00	50.8	.220	5.6	12	2.1	.94	24	11	50	.79	19.9	0.040	1.0	19.6	MW	CG	N
0.300	7.62	70922S	2.00	50.8	.220	5.6	10	1.8	.74	19	7.5	33	.79	19.9	0.040	1.0	19.6	SST	CG	N
0.300	7.62	70941	2.00	50.8	.216	5.5	14	2.5	.89	23	13	57	.85	21.5	0.042	1.1	20.1	MW	CG	N
0.300	7.62	70941S	2.00	50.8	.216	5.5	12	2.1	.71	18	8.7	39	.85	21.5	0.042	1.1	20.1	SST	CG	N
0.300	7.62	70960	2.00	50.8	.210	5.3	19	3.3	.83	21	16	70	.94	23.9	0.045	1.1	20.9	MW	CG	N
0.300	7.62	70960S	2.00	50.8	.210	5.3	16	2.8	.66	17	11	47	.94	23.9	0.045	1.1	20.9	SST	CG	N
0.300	7.62	70979	2.00	50.8	.206	5.2	24	4.2	.74	19	18	79	.95	24.0	0.047	1.2	20.1	MW	CG	N
0.300	7.62	70979S	2.00	50.8	.206	5.2	20	3.6	.59	15	12	53	.95	24.0	0.047	1.2	20.1	SST	CG	N
0.300	7.62	71000	2.00	50.8	.202	5.1	28	4.9	.71	18	20	89	1.01	25.7	0.049	1.2	20.6	MW	CG	N
0.300	7.62	71000S	2.00	50.8	.202	5.1	24	4.2	.57	14	14	60	1.01	25.7	0.049	1.2	20.6	SST	CG	N
0.300	7.62	71021	2.00	50.8	.198	5.0	33	5.8	.64	16	21	94	1.07	27.2	0.051	1.3	21.0	MW	CG	N
0.300	7.62	71021S	2.00	50.8	.198	5.0	28	4.9	.51	13	14	63	1.07	27.2	0.051	1.3	21.0	SST	CG	N
0.300	7.62	70799	2.25	57.2	.256	6.5	1.3	.23	1.6	41	2.1	9.5	.31	7.8	0.022	0.6	14.0	MW	CG	N
0.300	7.62	70799S	2.25	57.2	.256	6.5	1.1	.19	1.3	32	1.4	6.3	.31	7.8	0.022	0.6	14.0	SST	CG	N
0.300	7.62	70821	2.25	57.2	.248	6.3	2.4	.42	1.4	35	3.3	15	.40	10.1	0.026	0.7	15.3	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.300	7.62	70821S	2.25	57.2	.248	6.3	2.0	.36	1.1	27	2.2	9.8	.40	10.1	0.026	0.7	15.3	SST	CG	N
0.300	7.62	70844	2.25	57.2	.240	6.1	3.6	.63	1.4	36	5.0	22	.56	14.2	0.030	0.8	18.6	MW	CG	N
0.300	7.62	70844S	2.25	57.2	.240	6.1	3.0	.53	1.1	28	3.4	15	.56	14.2	0.030	0.8	18.6	SST	CG	N
0.300	7.62	70866	2.25	57.2	.236	6.0	4.8	.84	1.3	32	6.1	27	.59	14.9	0.032	0.8	18.4	MW	CG	N
0.300	7.62	70866S	2.25	57.2	.236	6.0	4.1	.71	1.0	25	4.1	18	.59	14.9	0.032	0.8	18.4	SST	CG	N
0.300	7.62	70885	2.25	57.2	.230	5.8	6.5	1.1	1.2	30	7.5	34	.70	17.8	0.035	0.9	20.0	MW	CG	N
0.300	7.62	70885S	2.25	57.2	.230	5.8	5.5	.96	.93	24	5.1	23	.70	17.8	0.035	0.9	20.0	SST	CG	N
0.300	7.62	70904	2.25	57.2	.224	5.7	8.8	1.5	1.1	28	9.6	43	.80	20.3	0.038	1.0	21.0	MW	CG	N
0.300	7.62	70904S	2.25	57.2	.224	5.7	7.5	1.3	.87	22	6.5	29	.80	20.3	0.038	1.0	21.0	SST	CG	N
0.300	7.62	70923	2.25	57.2	.220	5.6	11	1.8	1.1	27	11	50	.88	22.2	0.040	1.0	21.9	MW	CG	N
0.300	7.62	70923S	2.25	57.2	.220	5.6	9.0	1.6	.84	21	7.5	33	.88	22.2	0.040	1.0	21.9	SST	CG	N
0.300	7.62	70942	2.25	57.2	.216	5.5	13	2.2	1.0	25	13	57	.94	23.9	0.042	1.1	22.4	MW	CG	N
0.300	7.62	70942S	2.25	57.2	.216	5.5	11	1.9	.80	20	8.7	39	.94	23.9	0.042	1.1	22.4	SST	CG	N
0.300	7.62	70961	2.25	57.2	.210	5.3	17	2.9	.93	24	16	70	1.04	26.4	0.045	1.1	23.1	MW	CG	N
0.300	7.62	70961S	2.25	57.2	.210	5.3	14	2.5	.74	19	11	47	1.04	26.4	0.045	1.1	23.1	SST	CG	N
0.300	7.62	70980	2.25	57.2	.206	5.2	21	3.7	.84	21	18	79	1.06	26.9	0.047	1.2	22.5	MW	CG	N
0.300	7.62	70980S	2.25	57.2	.206	5.2	18	3.1	.67	17	12	53	1.06	26.9	0.047	1.2	22.5	SST	CG	N
0.300	7.62	71001	2.25	57.2	.202	5.1	25	4.3	.81	21	20	89	1.13	28.8	0.049	1.2	23.1	MW	CG	N
0.300	7.62	71001S	2.25	57.2	.202	5.1	21	3.7	.64	16	14	60	1.13	28.8	0.049	1.2	23.1	SST	CG	N
0.300	7.62	71022	2.25	57.2	.198	5.0	29	5.1	.72	18	21	94	1.20	30.4	0.051	1.3	23.5	MW	CG	N
0.300	7.62	71022S	2.25	57.2	.198	5.0	25	4.4	.57	15	14	63	1.20	30.4	0.051	1.3	23.5	SST	CG	N
0.300	7.62	70800	2.50	63.5	.256	6.5	1.2	.21	1.8	46	2.1	9.5	.34	8.5	0.022	0.6	15.3	MW	CG	N
0.300	7.62	70800S	2.50	63.5	.256	6.5	1.0	.18	1.4	36	1.4	6.3	.34	8.5	0.022	0.6	15.3	SST	CG	N
0.300	7.62	70822	2.50	63.5	.248	6.3	2.1	.37	1.5	39	3.3	15	.44	11.1	0.026	0.7	16.9	MW	CG	N
0.300	7.62	70822S	2.50	63.5	.248	6.3	1.8	.32	1.2	31	2.2	9.8	.44	11.1	0.026	0.7	16.9	SST	CG	N
0.300	7.62	70845	2.50	63.5	.240	6.1	3.2	.57	1.6	39	5.0	22	.61	15.4	0.030	0.8	20.3	MW	CG	N
0.300	7.62	70845S	2.50	63.5	.240	6.1	2.8	.48	1.2	31	3.4	15	.61	15.4	0.030	0.8	20.3	SST	CG	N
0.300	7.62	70867	2.50	63.5	.236	6.0	4.3	.74	1.4	36	6.1	27	.65	16.6	0.032	0.8	20.4	MW	CG	N
0.300	7.62	70867S	2.50	63.5	.236	6.0	3.6	.63	1.1	29	4.1	18	.65	16.6	0.032	0.8	20.4	SST	CG	N
0.300	7.62	70886	2.50	63.5	.230	5.8	5.9	1.0	1.3	33	7.5	34	.77	19.4	0.035	0.9	21.9	MW	CG	N
0.300	7.62	70886S	2.50	63.5	.230	5.8	5.0	.87	1.0	26	5.1	23	.77	19.4	0.035	0.9	21.9	SST	CG	N
0.300	7.62	70905	2.50	63.5	.224	5.7	8.0	1.4	1.2	31	9.6	43	.87	22.2	0.038	1.0	23.0	MW	CG	N
0.300	7.62	70905S	2.50	63.5	.224	5.7	6.8	1.2	.96	24	6.5	29	.87	22.2	0.038	1.0	23.0	SST	CG	N
0.300	7.62	70924	2.50	63.5	.220	5.6	9.5	1.7	1.2	30	11	50	.96	24.4	0.040	1.0	24.0	MW	CG	N
0.300	7.62	70924S	2.50	63.5	.220	5.6	8.1	1.4	.93	24	7.5	33	.96	24.4	0.040	1.0	24.0	SST	CG	N
0.300	7.62	70943	2.50	63.5	.216	5.5	12	2.0	1.1	28	13	57	1.02	25.9	0.042	1.1	24.3	MW	CG	N
0.300	7.62	70943S	2.50	63.5	.216	5.5	9.9	1.7	.87	22	8.7	39	1.02	25.9	0.042	1.1	24.3	SST	CG	N
0.300	7.62	70962	2.50	63.5	.210	5.3	15	2.7	1.0	26	16	70	1.13	28.6	0.045	1.1	25.0	MW	CG	N
0.300	7.62	70962S	2.50	63.5	.210	5.3	13	2.3	.81	21	11	47	1.13	28.6	0.045	1.1	25.0	SST	CG	N
0.300	7.62	70981	2.50	63.5	.206	5.2	19	3.3	.94	24	18	79	1.17	29.7	0.047	1.2	24.9	MW	CG	N
0.300	7.62	70981S	2.50	63.5	.206	5.2	16	2.8	.75	19	12	53	1.17	29.7	0.047	1.2	24.9	SST	CG	N
0.300	7.62	71002	2.50	63.5	.202	5.1	22	3.9	.90	23	20	89	1.25	31.7	0.049	1.2	25.5	MW	CG	N
0.300	7.62	71002S	2.50	63.5	.202	5.1	19	3.3	.72	18	14	60	1.25	31.7	0.049	1.2	25.5	SST	CG	N
0.300	7.62	71023	2.50	63.5	.198	5.0	26	4.6	.80	20	21	94	1.33	33.7	0.051	1.3	26.0	MW	CG	N
0.300	7.62	71023S	2.50	63.5	.198	5.0	22	3.9	.64	16	14	63	1.33	33.7	0.051	1.3	26.0	SST	CG	N
0.300	7.62	70982	2.75	69.9	.206	5.2	17	3.0	1.0	26	18	79	1.29	32.7	0.047	1.2	27.4	MW	CG	N
0.300	7.62	70982S	2.75	69.9	.206	5.2	15	2.5	.83	21	12	53	1.29	32.7	0.047	1.2	27.4	SST	CG	N
0.300	7.62	71003	2.75	69.9	.202	5.1	20	3.5	.99	25	20	89	1.37	34.8	0.049	1.2	28.0	MW	CG	N
0.300	7.62	71003S	2.75	69.9	.202	5.1	17	3.0	.79	20	14	60	1.37	34.8	0.049	1.2	28.0	SST	CG	N
0.300	7.62	71024	2.75	69.9	.198	5.0	24	4.2	.88	22	21	94	1.45	36.9	0.051	1.3	28.5	MW	CG	N
0.300	7.62	71024S	2.75	69.9	.198	5.0	20	3.5	.71	18	14	63	1.45	36.9	0.051	1.3	28.5	SST	CG	N
0.300	7.62	12640	2.88	73.0	.260	6.6	.33	.06	2.3	57	.73	3.3	.62	15.7	0.020	0.5	30.0	SST	C	N
0.300	7.62	70983	3.00	76.2	.206	5.2	16	2.7	1.1	29	18	79	1.39	35.4	0.047	1.2	29.6	MW	CG	N
0.300	7.62	70983S	3.00	76.2	.206	5.2	13	2.3	.90	23	12	53	1.39	35.4	0.047	1.2	29.6	SST	CG	N
0.300	7.62	71004	3.00	76.2	.202	5.1	18	3.2	1.1	28	20	89	1.49	38.0	0.049	1.2	30.5	MW	CG	N
0.300	7.62	71004S	3.00	76.2	.202	5.1	16	2.7	.87	22	14	60	1.49	38.0	0.049	1.2	30.5	SST	CG	N
0.300	7.62	71025	3.00	76.2	.198	5.0	22	3.8	.97	25	21	94	1.58	40.2	0.051	1.3	31.0	MW	CG	N
0.300	7.62	71025S	3.00	76.2	.198	5.0	18	3.2	.77	20	14	63	1.58	40.2	0.051	1.3	31.0	SST	CG	N
0.304	7.72	A9-39	.78	19.8	.190	4.8	93	16	.22	5.6	21	92	.46	11.8	0.057	1.4	8.00	PB	CG	N
0.312	7.92	II-25	.19	4.8	.252	6.4	45	7.9	.07	1.7	3.1	14	.12	3.0	0.030	0.8	3.00	SST	C	N
0.312	7.92	KK-86	.22	5.6	.260	6.6	17	2.9	.10	2.6	1.7	7.5	.12	3.0	0.026	0.7	3.50	SST	C	N
0.312	7.92	NN-86	.25	6.4	.258	6.6	17	2.9	.12	2.9	1.9	8.4	.14	3.4	0.027	0.7	4.00	MW	C	N
0.312	7.92	A15-5	.25	6.4	.252	6.4	16	2.7	.10	2.5	1.6	7.0	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.312	7.92	EE-4	.25	6.4	.232	5.9	80	14	.09	2.3	7.2	32	.16	4.1	0.040	1.0	4.00	SST	CG	N
0.312	7.92	S-1267	.31	7.9	.288	7.3	.26	.04	.23	5.9	.06	.26	.08	2.1	0.012	0.3	5.75	SST	C	N
0.312	7.92	A-81	.31	7.9	.262	6.7	12	2.1	.19	4.7	2.2	9.9	.13	3.2	0.025	0.6	4.00	MW	C	Z
0.312	7.92	12482	.31	7.9	.248	6.3	46	8.0	.09	2.3	4.2	19	.14	3.7	0.032	0.8	3.50	SPR	C	N
0.312	7.92	GG-15	.31	7.9	.202	5.1	344	60	.05	1.3	17	76	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.312	7.92	Y-74	.34	8.7	.234	5.9	47	8.3	.14	3.6	6.7	30	.20	5.0	0.039	1.0	5.00	SST	CG	N
0.312	7.92	B15-32	.34	8.7	.184	4.7	632	111	.04	1.1	28	124	.29	7.3	0.064	1.6	4.50	SPR	CG	N
0.312	7.92	CC-58	.38	9.5	.292	7.4	.23	.04	.33	8.3	.07	.33	.05	1.3	0.010	0.3	4.00	SST	C	N
0.312	7.92	II-11	.38	9.5	.272	6.9	1.5	.27	.20	5.0	.30	1.3	.18	4.6	0.020	0.5	8.00	MW	C	N
0.312	7.92	PP-41	.38	9.5	.272	6.9	2.1	.37	.24	6.0	.50	2.2	.14	3.6	0.020	0.5	6.00	SST	C	N
0.312	7.92	10274	.38	9.5	.268	6.8	6.9	1.2	.29	7.3	2.0	8.8	.09	2.2	0.022	0.6	4.00	MW	CG	Z
0.312	7.92	EE-48	.38	9.5	.266	6.8	2.8	.49	.17	4.3	.47	2.1	.21	5.3	0.023	0.6	8.00	MW	C	Z
0.312	7.92	11356	.38	9.5	.266	6.8	3.3	.58	.23	5.7	.74	3.3	.15	3.8	0.023	0.6	6.50	SST	CG	N
0.312	7.92	OO-35	.38	9.5	.264	6.7	5.8	1.0	.23	5.9	1.3	5.9	.14	3.7	0.024	0.6	5.00	SST	C	N
0.312	7.92	O-87	.38	9.5	.256	6.5	13	2.3	.24	6.0	3.0	13	.14	3.6	0.028	0.7	5.00	MW	CG	N
0.312	7.92	Z-78	.38	9.5	.242	6.1	51	8.9	.10	2.6	5.2	23	.14	3.6	0.035	0.9	4.00	SPR	CG	N
0.312	7.92	2915	.38	9.5	.228	5.8	76	13	.12	3.0	8.9	40	.25	6.4	0.042	1.1	5.00	SPR	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.312	7.92	EE-9	.38	9.5	.226	5.7	101	18	.09	2.4	9.6	43	.19	4.9	0.043	1.1	4.50	SPR	CG	Z
0.312	7.92	S-1086	.38	9.5	.218	5.5	131	23	.09	2.2	12	52	.21	5.4	0.047	1.2	4.50	SST	CG	N
0.312	7.92	K-93	.38	9.5	.218	5.5	94	17	.09	2.4	8.8	39	.28	7.2	0.047	1.2	6.00	SPR	CG	Z
0.312	7.92	S-1125	.38	9.5	.214	5.4	158	28	.08	2.1	13	58	.22	5.6	0.049	1.2	4.50	SST	CG	N
0.312	7.92	3688	.41	10.3	.272	6.9	2.3	.40	.27	6.8	.61	2.7	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.312	7.92	JJ-22	.41	10.3	.244	6.2	26	4.6	.18	4.5	4.7	21	.20	5.2	0.034	0.9	5.00	SST	C	N
0.312	7.92	FF-3	.44	11.1	.280	7.1	.91	.16	.33	8.3	.30	1.3	.11	2.8	0.016	0.4	6.00	MW	C	N
0.312	7.92	KK-92	.44	11.1	.252	6.4	11	2.0	.23	5.8	2.6	11	.21	5.3	0.030	0.8	6.00	SST	C	N
0.312	7.92	A11-23	.44	11.1	.246	6.2	26	4.6	.18	4.5	4.6	21	.17	4.3	0.033	0.8	5.00	SPR	CG	GI
0.312	7.92	A14-25	.44	11.1	.236	6.0	39	6.8	.16	4.1	6.24	27.72	.12	3.0	0.038	1.0	5.25	SST	CG	N
0.312	7.92	LL-16	.44	11.1	.232	5.9	41	7.1	.18	4.6	7.3	32	.24	6.1	0.040	1.0	6.00	SST	CG	N
0.312	7.92	S-484	.44	11.1	.230	5.8	43	7.5	.18	4.6	7.8	35	.25	6.4	0.041	1.0	6.13	SST	CG	N
0.312	7.92	B9-30	.44	11.1	.230	5.8	82	14	.10	2.6	8.3	37	.18	4.7	0.041	1.0	4.50	SPR	CG	N
0.312	7.92	H-96	.44	11.1	.212	5.4	167	29	.08	2.1	14	62	.25	6.4	0.050	1.3	5.00	SPR	CG	Z
0.312	7.92	II-23	.44	11.1	.212	5.4	136	24	.10	2.4	13	58	.26	6.7	0.050	1.3	5.25	SST	CG	N
0.312	7.92	2920	.44	11.1	.180	4.6	697	122	.04	1.1	30	136	.31	7.8	0.066	1.7	4.63	SPR	CG	Z
0.312	7.92	NN-6	.47	11.9	.272	6.9	2.0	.36	.33	8.3	.67	3.0	.14	3.6	0.020	0.5	6.00	SST	C	N
0.312	7.92	J-27	.47	11.9	.252	6.4	11	2.0	.26	6.6	2.9	13	.21	5.3	0.030	0.8	6.00	SST	C	N
0.312	7.92	A10-36	.47	11.9	.250	6.4	18	3.1	.20	5.1	3.6	16	.16	3.9	0.031	0.8	5.00	SST	CG	N
0.312	7.92	DD-85	.47	11.9	.242	6.1	29	5.2	.17	4.2	4.9	22	.21	5.3	0.035	0.9	5.00	SST	C	N
0.312	7.92	J-52	.47	11.9	.238	6.0	43	7.6	.14	3.6	6.2	27	.22	5.6	0.037	0.9	5.00	SPR	C	N
0.312	7.92	10487	.50	12.7	.284	7.2	1.0	.18	.43	11	.45	2.0	.07	1.8	0.014	0.4	4.00	MW	C	N
0.312	7.92	4231	.50	12.7	.282	7.2	.51	.09	.37	9.5	.19	.84	.13	3.2	0.015	0.4	7.50	MW	C	N
0.312	7.92	4199	.50	12.7	.276	7.0	1.2	.21	.36	9.0	.42	1.9	.14	3.7	0.018	0.5	7.00	MW	C	Z
0.312	7.92	H-69	.50	12.7	.272	6.9	1.4	.24	.32	8.1	.44	1.9	.18	4.6	0.020	0.5	8.00	SST	C	N
0.312	7.92	B14-5	.50	12.7	.270	6.9	2.3	.40	.35	9.0	.80	3.6	.15	3.7	0.021	0.5	7.00	MW	CG	N
0.312	7.92	S-727	.50	12.7	.268	6.8	4.8	.84	.28	7.2	1.4	6.1	.12	3.1	0.022	0.6	4.50	SST	C	N
0.312	7.92	B2-28	.50	12.7	.266	6.8	7.4	1.3	.32	8.0	2.3	10	.12	3.1	0.023	0.6	4.25	MW	C	N
0.312	7.92	PP-31	.50	12.7	.256	6.5	13	2.3	.31	7.8	4.0	18	.14	3.6	0.028	0.7	5.00	MW	CG	N
0.312	7.92	10229	.50	12.7	.248	6.3	17	3.0	.25	6.2	4.2	19	.22	5.7	0.032	0.8	6.00	SPR	C	Z
0.312	7.92	931	.50	12.7	.238	6.0	37	6.5	.23	5.9	8.5	38	.20	5.2	0.037	0.9	5.50	MW	CG	Z
0.312	7.92	L-8	.50	12.7	.236	6.0	42	7.4	.15	3.8	6.3	28	.23	5.8	0.038	1.0	5.00	SST	C	N
0.312	7.92	10856	.50	12.7	.230	5.8	51	8.9	.16	4.1	8.3	37	.25	6.2	0.041	1.0	6.00	SPR	CG	N
0.312	7.92	DD-34	.50	12.7	.192	4.9	291	51	.08	2.0	23	104	.36	9.1	0.060	1.5	6.00	SPR	CG	N
0.312	7.92	S-1265	.53	13.5	.238	6.0	28	4.9	.21	5.2	5.8	26	.26	6.6	0.037	0.9	6.00	SST	C	N
0.312	7.92	HH-29	.53	13.5	.232	5.9	36	6.3	.20	5.1	7.3	32	.26	6.6	0.040	1.0	6.50	SST	CG	N
0.312	7.92	CC-11	.53	13.5	.232	5.9	52	9.1	.15	3.8	7.8	35	.26	6.6	0.040	1.0	5.50	SPR	C	N
0.312	7.92	MM-65	.53	13.5	.212	5.4	148	26	.09	2.2	13	58	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.312	7.92	S-27	.53	13.5	.210	5.3	121	21	.11	2.9	14	61	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.312	7.92	S-1016	.56	14.3	.282	7.2	.44	.08	.43	11	.19	.85	.13	3.2	0.015	0.4	7.50	SST	C	N
0.312	7.92	A-24	.56	14.3	.278	7.1	.49	.09	.37	9.3	.18	.80	.20	5.0	0.017	0.4	10.5	SST	C	N
0.312	7.92	2850	.56	14.3	.272	6.9	4.6	.81	.34	8.5	1.5	6.9	.10	2.5	0.020	0.5	4.00	MW	C	Z
0.312	7.92	YY-41	.56	14.3	.272	6.9	.73	.13	.28	7.2	.21	.92	.28	7.1	0.020	0.5	13.0	SST	C	N
0.312	7.92	10931	.56	14.3	.268	6.8	3.9	.69	.42	11	1.7	7.4	.14	3.6	0.022	0.6	5.50	MW	C	Z
0.312	7.92	3853	.56	14.3	.264	6.7	6.7	1.2	.40	10	2.7	12	.14	3.7	0.024	0.6	5.00	MW	C	Z
0.312	7.92	K-76	.56	14.3	.262	6.7	5.9	1.0	.39	9.8	2.3	10	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.312	7.92	B7-13	.56	14.3	.262	6.7	9.5	1.7	.30	7.6	2.8	13	.11	2.9	0.025	0.6	4.50	MW	CG	N
0.312	7.92	MM-15	.56	14.3	.252	6.4	12	2.0	.37	9.3	4.2	19	.20	5.0	0.030	0.8	6.50	MW	CG	N
0.312	7.92	H-66	.56	14.3	.204	5.2	237	42	.07	1.8	17	77	.27	6.9	0.054	1.4	5.00	SPR	CG	N
0.312	7.92	LL-73	.56	14.3	.192	4.9	258	45	.08	2.2	22	98	.36	9.1	0.060	1.5	6.00	SST	CG	N
0.312	7.92	10509	.59	15.1	.220	5.6	76	13	.15	3.9	12	52	.35	8.8	0.046	1.2	6.50	SPR	C	Z
0.312	7.92	A11-67	.63	15.9	.266	6.8	4.4	.78	.47	12	2.1	9.3	.16	3.9	0.023	0.6	5.75	MW	C	N
0.312	7.92	S-388	.63	15.9	.262	6.7	5.3	.93	.36	9.0	1.9	8.4	.17	4.4	0.025	0.6	5.88	SST	C	N
0.312	7.92	530	.63	15.9	.260	6.6	7.0	1.2	.44	11	3.1	14	.18	4.6	0.026	0.7	6.00	MW	C	Z
0.312	7.92	PP-97	.63	15.9	.258	6.6	9.6	1.7	.25	6.3	2.4	11	.16	4.1	0.027	0.7	5.00	SST	C	N
0.312	7.92	QQ-67	.63	15.9	.256	6.5	11	1.9	.36	9.1	4.0	18	.18	4.6	0.028	0.7	5.50	MW	C	Z
0.312	7.92	Y-20	.63	15.9	.246	6.2	26	4.6	.18	4.5	4.6	21	.20	5.0	0.033	0.8	5.00	SPR	C	N
0.312	7.92	PP-53	.63	15.9	.244	6.2	30	5.2	.17	4.3	5.0	22	.20	5.2	0.034	0.9	5.00	SPR	C	Z
0.312	7.92	FF-85	.63	15.9	.236	6.0	27	4.7	.23	6.0	6.3	28	.26	6.5	0.038	1.0	6.75	SST	CG	N
0.312	7.92	WW-32	.63	15.9	.236	6.0	32	5.5	.20	5.0	6.3	28	.23	5.8	0.038	1.0	6.00	SST	CG	N
0.312	7.92	A14-22	.63	15.9	.230	5.8	41	7.1	.20	5.2	8.3	37	.29	7.3	0.041	1.0	7.00	SPR	CG	GI
0.312	7.92	S-1065	.63	15.9	.204	5.2	124	22	.13	3.3	16	72	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.312	7.92	S-1226	.63	15.9	.188	4.8	278	49	.09	2.2	24	107	.39	9.8	0.062	1.6	6.25	SST	CG	N
0.312	7.92	2846	.66	16.7	.272	6.9	2.3	.40	.52	13	1.2	5.3	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.312	7.92	PP-67	.66	16.7	.272	6.9	2.3	.40	.52	13	1.2	5.3	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.312	7.92	I-42	.66	16.7	.238	6.0	16	2.9	.32	8.2	5.3	24	.33	8.5	0.037	0.9	9.00	SST	CG	N
0.312	7.92	2700	.66	16.7	.230	5.8	45	7.9	.18	4.7	8.3	37	.27	6.8	0.041	1.0	6.50	HD	CG	Z
0.312	7.92	A15-41	.66	16.7	.230	5.8	48	8.5	.16	4.1	7.8	35	.24	6.0	0.041	1.0	5.75	SST	CG	N
0.312	7.92	XX-25	.69	17.4	.256	6.5	7.7	1.4	.46	12	3.6	16	.22	5.7	0.028	0.7	7.00	MW	C	GI
0.312	7.92	4245	.69	17.4	.254	6.5	7.5	1.3	.43	11	3.2	14	.26	6.6	0.029	0.7	8.00	MW	C	Z
0.312	7.92	HH-73	.69	17.4	.242	6.1	18	3.2	.28	7.2	5.2	23	.30	7.6	0.035	0.9	7.50	SPR	C	GI
0.312	7.92	BB-2	.69	17.4	.232	5.9	23	4.1	.31	8.0	7.3	32	.36	9.1	0.040	1.0	9.00	SST	CG	N
0.312	7.92	KK-22	.69	17.4	.232	5.9	41	7.1	.19	4.8	7.8	35	.26	6.6	0.040	1.0	6.50	SPR	CG	Z
0.312	7.92	B7-2	.69	17.4	.226	5.7	53	9.3	.18	4.6	9.6	43	.29	7.4	0.043	1.1	6.75	SPR	CG	N
0.312	7.92	W-70	.69	17.4	.220	5.6	54	9.5	.20	5.1	11	49	.35	8.8	0.046	1.2	7.50	SST	CG	N
0.312	7.92	B9-38	.69	17.4	.220	5.6	53	9.2	.22	5.6	12	52	.39	9.9	0.046	1.2	8.50	SPR	CG	Z
0.312	7.92	L-39	.69	17.4	.216	5.5	64	11	.21	5.2	13	59	.41	10.4	0.048	1.2	8.50	SPR	CG	Z
0.312	7.92	O-48	.69	17.4	.212	5.4	67	12	.19	4.9	13	58	.43	10.8	0.050	1.3	8.50	SST	CG	N
0.312	7.92	Z-32	.69	17.4	.188	4.8	197	35	.12	3.1	24	107	.56	14.2	0.062	1.6	8.00	SST	C	N
0.312	7.92	3516	.69	17.4	.184	4.7	243	43	.11	2.9	28	124	.54	13.8	0.064	1.6	8.50	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.312	7.92	10013	.69	17.5	.236	6.0	24	4.3	.27	7.0	6.7	30	.30	7.7	0.038	1.0	8.00	SPR	CG	Z
0.312	7.92	KK-74	.72	18.2	.240	6.1	15	2.7	.34	8.6	5.2	23	.38	9.6	0.036	0.9	9.50	SPR	C	N
0.312	7.92	4246	.75	19.1	.282	7.2	.35	.06	.59	15	.20	.90	.17	4.2	0.015	0.4	10.0	MW	C	Z
0.312	7.92	S-1072	.75	19.1	.282	7.2	.24	.04	.56	14	.13	.60	.20	5.0	0.015	0.4	12.0	SST	C	N
0.312	7.92	S-23	.75	19.1	.278	7.1	.81	.14	.61	16	.50	2.2	.14	3.5	0.017	0.4	7.00	SST	C	N
0.312	7.92	10422	.75	19.1	.274	7.0	.85	.15	.60	15	.51	2.3	.15	3.7	0.019	0.5	6.75	PB	C	N
0.312	7.92	FF-25	.75	19.1	.272	6.9	.46	.08	.31	7.9	.14	.64	.44	11.2	0.020	0.5	22.0	MW	CG	N
0.312	7.92	B12-32	.75	19.1	.272	6.9	1.5	.27	.57	14	.88	3.9	.18	4.6	0.020	0.5	8.00	MW	C	N
0.312	7.92	S-728	.75	19.1	.268	6.8	3.2	.56	.43	11	1.4	6.1	.15	3.8	0.022	0.6	5.75	SST	C	N
0.312	7.92	WW-44	.75	19.1	.268	6.8	3.5	.60	.60	15	2.1	9.1	.15	3.9	0.022	0.6	6.00	MW	C	N
0.312	7.92	2539	.75	19.1	.266	6.8	3.7	.65	.58	15	2.1	9.5	.17	4.4	0.023	0.6	6.50	MW	C	Z
0.312	7.92	FF-93	.75	19.1	.264	6.7	1.9	.34	.46	12	.89	4.0	.29	7.3	0.024	0.6	11.0	SST	C	N
0.312	7.92	II-29	.75	19.1	.264	6.7	4.0	.70	.56	14	2.2	9.9	.19	4.9	0.024	0.6	7.00	MW	C	Z
0.312	7.92	Z-65	.75	19.1	.262	6.7	4.0	.69	.53	13	2.1	9.2	.23	5.7	0.025	0.6	8.00	MW	C	Z
0.312	7.92	3245	.75	19.1	.258	6.6	6.6	1.2	.53	14	3.5	16	.22	5.5	0.027	0.7	7.00	MW	C	Z
0.312	7.92	3190	.75	19.1	.248	6.3	9.8	1.7	.46	12	4.5	20	.29	7.3	0.032	0.8	9.00	MW	CG	GI
0.312	7.92	946	.75	19.1	.248	6.3	13	2.3	.45	11	5.9	26	.26	6.7	0.032	0.8	7.25	MW	C	Z
0.312	7.92	S-730	.75	19.1	.248	6.3	11	2.0	.35	8.8	3.9	17	.26	6.7	0.032	0.8	7.25	SST	C	N
0.312	7.92	W-17	.75	19.1	.246	6.2	13	2.3	.35	9.0	4.6	21	.30	7.5	0.033	0.8	8.00	SPR	C	N
0.312	7.92	2978	.75	19.1	.244	6.2	9.9	1.7	.38	9.6	3.7	17	.37	9.5	0.034	0.9	11.0	SPR	CG	Z
0.312	7.92	S-146	.75	19.1	.242	6.1	13	2.2	.39	9.9	4.9	22	.35	8.9	0.035	0.9	9.00	SST	C	N
0.312	7.92	S-934	.75	19.1	.242	6.1	14	2.5	.35	8.8	4.9	22	.29	7.3	0.035	0.9	8.25	SST	CG	N
0.312	7.92	2585	.75	19.1	.238	6.0	20	3.5	.43	11	8.5	38	.31	8.0	0.037	0.9	8.50	MW	CG	Z
0.312	7.92	B1-5	.75	19.1	.236	6.0	21	3.6	.30	7.7	6.3	28	.31	8.0	0.038	1.0	8.25	SST	CG	N
0.312	7.92	B12-1	.75	19.1	.228	5.8	35	6.1	.26	6.5	8.9	40	.36	9.1	0.042	1.1	8.50	SPR	CG	N
0.312	7.92	O-123	.75	19.1	.220	5.6	57	10	.20	5.2	12	52	.37	9.3	0.046	1.2	8.00	SPR	CG	Z
0.312	7.92	B17-125	.75	19.1	.216	5.5	69	12	.19	4.8	13	59	.38	9.8	0.048	1.2	8.00	SPR	CG	Z
0.312	7.92	O-32	.75	19.1	.210	5.3	137	24	.11	2.7	15	65	.31	7.8	0.051	1.3	6.00	SPR	CG	Z
0.312	7.92	S-204	.78	19.8	.272	6.9	.82	.14	.52	13	.43	1.9	.26	6.6	0.020	0.5	12.0	SST	C	N
0.312	7.92	FF-45	.78	19.8	.252	6.4	8.7	1.5	.54	14	4.7	21	.24	6.1	0.030	0.8	8.00	MW	CG	Z
0.312	7.92	NN-30	.78	19.8	.252	6.4	8.7	1.5	.54	14	4.7	21	.24	6.1	0.030	0.8	8.00	MW	CG	N
0.312	7.92	S-877	.78	19.8	.218	5.5	56	9.8	.21	5.3	12	52	.38	9.6	0.047	1.2	8.00	SST	CG	N
0.312	7.92	BB-62	.78	19.8	.214	5.4	50	8.7	.26	6.7	13	58	.49	12.4	0.049	1.2	10.0	SST	CG	N
0.312	7.92	2617	.78	19.8	.188	4.8	175	31	.15	3.7	26	114	.60	15.4	0.062	1.6	9.75	HD	CG	Z
0.312	7.92	CC-56	.81	20.6	.244	6.2	10	1.8	.45	12	4.7	21	.36	9.1	0.034	0.9	9.50	SST	C	N
0.312	7.92	3678	.81	20.6	.240	6.1	13	2.2	.42	11	5.3	24	.40	10.1	0.036	0.9	11.0	SPR	CG	Z
0.312	7.92	VV-35	.81	20.6	.240	6.1	16	2.9	.35	8.8	5.7	25	.32	8.2	0.036	0.9	9.00	SPR	CG	N
0.312	7.92	LL-52	.81	20.6	.222	5.6	56	9.9	.19	4.9	11	49	.34	8.6	0.045	1.1	7.50	SPR	CG	N
0.312	7.92	S-476	.84	21.4	.244	6.2	9.7	1.7	.47	12	4.6	20	.37	9.5	0.034	0.9	10.0	SST	C	N
0.312	7.92	MM-38	.84	21.4	.232	5.9	18	3.2	.36	9.2	6.6	30	.48	12.2	0.040	1.0	12.0	SPR	CG	Z
0.312	7.92	2614	.84	21.4	.208	5.3	89	16	.24	6.2	22	96	.46	11.6	0.052	1.3	8.75	MW	CG	Z
0.312	7.92	2949	.88	22.2	.272	6.9	1.8	.32	.72	18	1.3	5.9	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.312	7.92	J-81	.88	22.2	.272	6.9	.80	.14	.62	16	.49	2.2	.26	6.6	0.020	0.5	12.0	SST	C	N
0.312	7.92	M-89	.88	22.2	.272	6.9	1.9	.34	.72	18	1.4	6.2	.16	3.9	0.020	0.5	6.75	MW	C	N
0.312	7.92	Q-43	.88	22.2	.272	6.9	1.3	.23	.70	18	.93	4.1	.18	4.6	0.020	0.5	8.00	SST	C	N
0.312	7.92	EE-37	.88	22.2	.272	6.9	1.3	.23	.68	17	.89	4.0	.20	5.1	0.020	0.5	9.00	MW	C	N
0.312	7.92	10544	.88	22.2	.270	6.9	1.4	.25	.64	16	.91	4.1	.23	5.9	0.021	0.5	10.0	MW	C	Z
0.312	7.92	S-729	.88	22.2	.268	6.8	2.7	.47	.51	13	1.4	6.1	.17	4.2	0.022	0.6	6.50	SST	C	N
0.312	7.92	II-17	.88	22.2	.252	6.4	8.7	1.5	.56	14	4.8	22	.24	6.1	0.030	0.8	8.00	MW	CG	N
0.312	7.92	S-731	.88	22.2	.248	6.3	9.6	1.7	.41	10	3.9	17	.30	7.5	0.032	0.8	8.25	SST	C	N
0.312	7.92	W-71	.88	22.2	.188	4.8	161	28	.15	3.8	24	107	.59	15.0	0.062	1.6	9.50	SST	CG	N
0.312	7.92	S-244	.91	23.0	.276	7.0	.69	.12	.72	18	.49	2.2	.19	4.8	0.018	0.5	9.50	SST	C	N
0.312	7.92	3735	.91	23.0	.230	5.8	26	4.5	.33	8.3	8.3	37	.41	10.4	0.041	1.0	10.0	SPR	CG	Z
0.312	7.92	S-231	.91	23.0	.222	5.6	32	5.5	.32	8.2	10	46	.47	12.0	0.045	1.1	10.5	SST	CG	N
0.312	7.92	S-1587	.91	23.0	.222	5.6	33	5.8	.31	7.8	10	46	.46	11.7	0.045	1.1	10.3	SST	CG	N
0.312	7.92	N-138	.91	23.0	.214	5.4	51	8.9	.28	7.0	14	62	.59	14.9	0.049	1.2	11.0	SPR	C	N
0.312	7.92	H-63	.94	23.8	.278	7.1	.46	.08	.71	18	.33	1.5	.22	5.7	0.017	0.4	12.0	MW	C	Z
0.312	7.92	U-12	.94	23.8	.278	7.1	.68	.12	.79	20	.53	2.4	.15	3.9	0.017	0.4	8.00	SST	C	N
0.312	7.92	B1-23	.94	23.8	.260	6.6	4.3	.76	.49	12	2.1	9.5	.20	5.1	0.026	0.7	7.75	SST	CG	N
0.312	7.92	S-394	.94	23.8	.248	6.3	10	1.7	.39	10	3.9	17	.29	7.3	0.032	0.8	8.00	SST	C	N
0.312	7.92	W-98	.94	23.8	.238	6.0	12	2.1	.48	12	5.8	26	.46	11.7	0.037	0.9	11.5	SST	C	N
0.312	7.92	1651	.94	23.8	.230	5.8	16	2.9	.30	7.7	4.9	22	.64	16.2	0.041	1.0	14.5	SPR	C	Z
0.312	7.92	GG-34	.94	23.8	.204	5.2	88	15	.18	4.7	16	72	.49	12.3	0.054	1.4	9.00	SST	CG	N
0.312	7.92	GG-62	.97	24.6	.218	5.5	37	6.6	.31	7.9	12	52	.51	12.8	0.047	1.2	10.8	SST	CG	N
0.312	7.92	CC-2	1.00	25.4	.284	7.2	.35	.06	.87	22	.30	1.4	.13	3.2	0.014	0.4	8.00	MW	C	N
0.312	7.92	B17-126	1.00	25.4	.284	7.2	.38	.07	.88	22	.33	1.5	.12	3.0	0.014	0.4	7.50	MW	C	N
0.312	7.92	202-A	1.00	25.4	.280	7.1	.97	.17	.82	21	.80	3.5	.11	2.7	0.016	0.4	5.75	MW	C	Z
0.312	7.92	W-93	1.00	25.4	.278	7.1	.67	.12	.83	21	.55	2.5	.17	4.3	0.017	0.4	9.00	MW	C	Z
0.312	7.92	10917	1.00	25.4	.272	6.9	1.6	.27	.66	17	1.0	4.6	.17	4.2	0.020	0.5	7.25	SST	C	N
0.312	7.92	1789	1.00	25.4	.272	6.9	2.1	.36	.75	19	1.5	6.9	.15	3.8	0.020	0.5	6.50	MW	C	Z
0.312	7.92	II-15	1.00	25.4	.272	6.9	1.1	.20	.80	20	.92	4.1	.20	5.1	0.020	0.5	9.00	SST	C	N
0.312	7.92	N-123	1.00	25.4	.272	6.9	.62	.11	.68	17	.42	1.9	.32	8.1	0.020	0.5	15.0	SST	C	N
0.312	7.92	S-732	1.00	25.4	.248	6.3	8.2	1.4	.48	12	3.9	17	.33	8.3	0.032	0.8	9.25	SST	C	N
0.312	7.92	K-94	1.00	25.4	.246	6.2	7.1	1.2	.57	15	4.1	18	.43	10.9	0.033	0.8	13.0	SPR	CG	N
0.312	7.92	10201	1.00	25.4	.242	6.1	14	2.5	.36	9.2	5.2	23	.35	8.9	0.035	0.9	9.00	SPR	C	Z
0.312	7.92	G-10	1.00	25.4	.232	5.9	17	2.9	.47	12	7.8	35	.52	13.2	0.040	1.0	13.0	HD	CG	N
0.312	7.92	S-733	1.00	25.4	.228	5.8	23	4.0	.37	9.4	8.4	37	.49	12.5	0.042	1.1	10.8	SST	C	N
0.312	7.92	3736	1.00	25.4	.226	5.7	22	3.8	.38	9.6	8.3	37	.62	15.8	0.043	1.1	13.5	SPR	C	Z
0.312	7.92	3764	1.00	25.4	.188	4.8	247	43	.10	2.6	26	114	.47	11.8	0.062	1.6	7.50	HD	CG	Z
0.312	7.92	S-1580	1.03	26.2	.252	6.4	2.6	.45	.40	10	1.0	4.6	.63	16.0	0.030	0.8	20.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.312	7.92	S-790	1.03	26.2	.232	5.9	15	2.6	.49	13	7.3	32	.52	13.2	0.040	1.0	13.0	SST	CG	N
0.312	7.92	Z-51	1.03	26.2	.186	4.7	244	43	.11	2.8	27	119	.57	14.4	0.063	1.6	8.00	SPR	C	N
0.312	7.92	GG-12	1.06	27.0	.284	7.2	.35	.06	.94	24	.33	1.4	.13	3.2	0.014	0.4	8.00	MW	C	N
0.312	7.92	S-996	1.06	27.0	.276	7.0	.43	.08	.79	20	.34	1.5	.27	6.9	0.018	0.5	14.0	SST	C	N
0.312	7.92	AA-10	1.06	27.0	.272	6.9	.40	.07	.60	15	.24	1.1	.46	11.7	0.020	0.5	22.0	SST	C	N
0.312	7.92	A9-67	1.06	27.0	.254	6.5	6.4	1.1	.68	17	4.4	20	.29	7.4	0.029	0.7	9.00	MW	C	Z
0.312	7.92	3296	1.06	27.0	.252	6.4	6.9	1.2	.70	18	4.8	22	.32	8.0	0.030	0.8	9.50	MW	C	Z
0.312	7.92	V-62	1.06	27.0	.246	6.2	8.0	1.4	.54	14	4.3	19	.35	8.8	0.033	0.8	10.5	SST	CG	N
0.312	7.92	3092	1.06	27.0	.208	5.3	85	15	.18	4.6	15	69	.47	11.9	0.052	1.3	9.00	SPR	CG	Z
0.312	7.92	W-57	1.06	27.0	.204	5.2	56	9.9	.29	7.3	16	72	.70	17.8	0.054	1.4	13.0	SST	CG	N
0.312	7.92	11162	1.13	28.6	.274	7.0	.96	.17	.92	23	.88	3.9	.20	5.2	0.019	0.5	9.75	MW	C	Z
0.312	7.92	10910	1.13	28.6	.272	6.9	.99	.17	.90	23	.89	4.0	.23	5.7	0.020	0.5	10.3	SST	C	N
0.312	7.92	2791	1.13	28.6	.272	6.9	1.3	.23	.93	23	1.2	5.4	.20	5.1	0.020	0.5	9.00	MW	C	GI
0.312	7.92	CC-33	1.13	28.6	.272	6.9	1.5	.27	.97	25	1.5	6.6	.16	4.1	0.020	0.5	8.00	MW	CG	Z
0.312	7.92	S-483	1.13	28.6	.262	6.7	2.1	.36	.80	20	1.7	7.3	.33	8.3	0.025	0.6	12.0	SST	C	N
0.312	7.92	A9-41	1.13	28.6	.258	6.6	4.1	.72	.83	21	3.4	15	.30	7.5	0.027	0.7	10.0	MW	C	N
0.312	7.92	3514	1.13	28.6	.256	6.5	3.4	.59	.72	18	2.4	11	.41	10.3	0.028	0.7	13.5	MW	C	Z
0.312	7.92	3746	1.13	28.6	.252	6.4	6.9	1.2	.70	18	4.8	22	.32	8.0	0.030	0.8	9.50	MW	C	Z
0.312	7.92	HH-97	1.13	28.6	.246	6.2	8.0	1.4	.54	14	4.3	19	.38	9.6	0.033	0.8	10.5	SST	C	N
0.312	7.92	S-791	1.13	28.6	.242	6.1	7.4	1.3	.64	16	4.7	21	.49	12.4	0.035	0.9	14.0	SST	CG	N
0.312	7.92	10147	1.13	28.6	.236	6.0	13	2.3	.50	13	6.7	30	.49	12.5	0.038	1.0	13.0	SPR	CG	Z
0.312	7.92	S-788	1.13	28.6	.204	5.2	58	10	.28	7.1	16	72	.70	17.7	0.054	1.4	12.0	SST	CG	N
0.312	7.92	S-36	1.13	28.6	.186	4.7	104	18	.21	5.4	22	98	.91	23.2	0.063	1.6	14.5	SST	CG	N
0.312	7.92	S-1182	1.16	29.4	.262	6.7	3.4	.60	.55	14	1.9	8.4	.23	5.7	0.025	0.6	8.00	SST	C	N
0.312	7.92	K-43	1.19	30.2	.238	6.0	8.8	1.5	.61	16	5.4	24	.57	14.6	0.037	0.9	15.5	SST	C	N
0.312	7.92	10732	1.19	30.2	.230	5.8	29	5.1	.29	7.3	8.3	37	.37	9.4	0.041	1.0	9.00	SPR	CG	Z
0.312	7.92	B-49	1.19	30.2	.222	5.6	25	4.3	.44	11	11	49	.65	16.6	0.045	1.1	14.5	SPR	CG	Z
0.312	7.92	L-95	1.19	30.2	.168	4.3	279	49	.13	3.3	37	164	.86	21.9	0.072	1.8	12.0	HD	CG	Z
0.312	7.92	S-1686	1.20	30.5	.228	5.8	25	4.3	.34	8.6	8.4	37	.42	10.7	0.042	1.1	10.0	SST	CG	N
0.312	7.92	2807	1.22	31.0	.260	6.6	2.9	.50	.91	23	2.6	12	.31	7.8	0.026	0.7	11.8	MW	CG	Z
0.312	7.92	10504	1.22	31.0	.196	5.0	110	19	.19	4.9	21	94	.70	17.7	0.058	1.5	11.0	SPR	C	Z
0.312	7.92	1859	1.22	31.0	.194	4.9	134	24	.23	5.8	31	137	.65	16.5	0.059	1.5	10.0	MW	C	Z
0.312	7.92	N-38	1.25	31.8	.274	7.0	.81	.14	1.0	26	.84	3.7	.21	5.3	0.019	0.5	10.0	SST	C	N
0.312	7.92	11368	1.25	31.8	.272	6.9	.91	.16	1.0	26	.92	4.1	.24	6.1	0.020	0.5	11.0	SST	C	N
0.312	7.92	10049	1.25	31.8	.264	6.7	2.9	.50	.93	24	2.7	12	.24	6.1	0.024	0.6	9.00	MW	C	GI
0.312	7.92	S-3114	1.25	31.8	.262	6.7	3.4	.60	.55	14	1.9	8.4	.23	5.7	0.025	0.6	8.00	SST	C	N
0.312	7.92	G-3	1.25	31.8	.260	6.6	2.2	.38	.83	21	1.8	8.0	.42	10.6	0.026	0.7	15.0	MW	C	Z
0.312	7.92	AA-84	1.25	31.8	.252	6.4	4.3	.76	.80	20	3.5	15	.45	11.4	0.030	0.8	14.0	MW	C	Z
0.312	7.92	A9-46	1.25	31.8	.250	6.4	4.6	.81	.78	20	3.6	16	.42	10.6	0.031	0.8	13.5	SST	CG	N
0.312	7.92	3715	1.25	31.8	.246	6.2	6.0	1.0	.75	19	4.5	20	.50	12.7	0.033	0.8	15.0	SPR	CG	Z
0.312	7.92	2	1.25	31.8	.230	5.8	17	3.0	.49	12	8.3	37	.62	15.6	0.041	1.0	14.0	HD	C	Z
0.312	7.92	S-495	1.25	31.8	.230	5.8	11	2.0	.53	13	6.0	26	.72	18.4	0.041	1.0	17.7	SST	CG	N
0.312	7.92	S-734	1.25	31.8	.228	5.8	18	3.1	.48	12	8.4	37	.60	15.2	0.042	1.1	13.3	SST	C	N
0.312	7.92	3615	1.25	31.8	.218	5.5	25	4.4	.45	11	11	50	.80	20.3	0.047	1.2	17.0	HD	CG	Z
0.312	7.92	S-3131	1.25	31.8	.210	5.3	39	6.8	.36	9.0	14	61	.73	18.5	0.051	1.3	14.3	SST	CG	N
0.312	7.92	1543	1.25	31.8	.198	5.0	114	20	.18	4.5	20	90	.63	15.9	0.057	1.4	10.0	SPR	C	Z
0.312	7.92	10294	1.31	33.3	.258	6.6	3.0	.53	.93	24	2.8	12	.38	9.6	0.027	0.7	13.0	MW	C	Z
0.312	7.92	10021	1.31	33.3	.256	6.5	3.5	.61	.92	23	3.2	14	.39	10.0	0.028	0.7	13.0	MW	C	Z
0.312	7.92	1857	1.31	33.3	.252	6.4	3.8	.67	.82	21	3.1	14	.50	12.6	0.030	0.8	15.5	MW	C	Z
0.312	7.92	10328	1.31	33.3	.250	6.4	3.6	.63	.71	18	2.6	11	.61	15.4	0.031	0.8	18.5	MW	C	Z
0.312	7.92	3533	1.31	33.3	.250	6.4	5.1	.89	.85	22	4.4	19	.46	11.6	0.031	0.8	13.8	MW	C	Z
0.312	7.92	10193	1.31	33.3	.248	6.3	4.9	.86	.80	20	3.9	17	.51	13.0	0.032	0.8	16.0	SPR	CG	Z
0.312	7.92	10024	1.31	33.3	.246	6.2	6.5	1.1	.71	18	4.6	21	.50	12.6	0.033	0.8	14.0	SPR	C	Z
0.312	7.92	NN-78	1.31	33.3	.218	5.5	25	4.4	.49	13	12	55	.80	20.3	0.047	1.2	17.0	SPR	CG	N
0.312	7.92	L-59	1.31	33.3	.208	5.3	40	7.0	.36	9.3	15	65	.78	19.8	0.052	1.3	15.0	SST	CG	N
0.312	7.92	NN-79	1.31	33.3	.192	4.9	93	16	.25	6.4	23	104	.93	23.6	0.060	1.5	14.5	SPR	C	N
0.312	7.92	1697	1.31	33.3	.190	4.8	180	31	.14	3.4	24	109	.61	15.5	0.061	1.5	9.00	SPR	C	Z
0.312	7.92	B11-19	1.34	34.1	.274	7.0	.57	.10	1.1	27	.61	2.7	.29	7.2	0.019	0.5	15.0	MW	CG	N
0.312	7.92	202-B	1.38	34.9	.280	7.1	.40	.07	1.2	30	.48	2.1	.19	4.9	0.016	0.4	11.0	MW	C	Z
0.312	7.92	10903	1.38	34.9	.256	6.5	3.7	.64	1.0	25	3.7	16	.38	9.6	0.028	0.7	12.5	MW	C	N
0.312	7.92	12736	1.38	34.9	.256	6.5	2.3	.40	.82	21	1.8	8.2	.56	14.2	0.028	0.7	19.0	MW	C	N
0.312	7.92	B2-10	1.38	34.9	.256	6.5	2.2	.39	.80	20	1.8	7.9	.57	14.6	0.028	0.7	19.5	MW	C	N
0.312	7.92	3138	1.38	34.9	.252	6.4	3.8	.66	.90	23	3.4	15	.47	12.0	0.030	0.8	15.8	MW	CG	Z
0.312	7.92	113	1.38	34.9	.250	6.4	5.2	.91	.93	23	4.8	21	.45	11.4	0.031	0.8	13.5	MW	C	Z
0.312	7.92	10508	1.38	34.9	.248	6.3	4.3	.75	.77	19	3.3	15	.61	15.4	0.032	0.8	18.0	MW	C	Z
0.312	7.92	1781	1.38	34.9	.242	6.1	7.3	1.3	.72	18	5.2	23	.60	15.1	0.035	0.9	16.0	SPR	C	Z
0.312	7.92	4136	1.38	34.9	.228	5.8	25	4.4	.35	9.0	8.9	40	.50	12.8	0.042	1.1	11.0	SPR	C	Z
0.312	7.92	12702	1.40	35.6	.254	6.5	2.6	.46	.82	21	2.2	9.6	.58	14.7	0.029	0.7	19.0	MW	C	N
0.312	7.92	BB-10	1.41	35.7	.252	6.4	3.2	.56	.91	23	2.9	13	.50	12.6	0.030	0.8	16.5	SST	CG	N
0.312	7.92	QQ-69	1.44	36.5	.268	6.8	.81	.14	1.0	27	.85	3.8	.39	9.9	0.022	0.6	16.8	SST	C	N
0.312	7.92	12751	1.44	36.5	.254	6.5	2.6	.46	.86	22	2.3	10	.58	14.7	0.029	0.7	19.0	MW	C	N
0.312	7.92	Q-46	1.44	36.5	.248	6.3	4.3	.75	.83	21	3.6	16	.61	15.4	0.032	0.8	18.0	SPR	C	Z
0.312	7.92	B10-44	1.44	36.5	.238	6.0	12	2.2	.50	13	6.2	27	.46	11.7	0.037	0.9	12.5	SPR	CG	Z
0.312	7.92	2576	1.47	37.3	.262	6.7	1.6	.28	1.0	26	1.6	7.2	.45	11.4	0.025	0.6	17.0	MW	C	Z
0.312	7.92	LL-93	1.47	37.3	.212	5.4	29	5.0	.46	12	13	58	.93	23.5	0.050	1.3	17.5	SST	C	N
0.312	7.92	B3-69	1.48	37.6	.252	6.4	3.1	.53	.88	22	2.7	12	.60	15.2	0.030	0.8	19.0	MW	C	N
0.312	7.92	10736	1.50	38.1	.270	6.9	1.0	.18	1.2	31	1.2	5.5	.29	7.5	0.021	0.5	13.0	MW	C	GI
0.312	7.92	2759	1.50	38.1	.266	6.8	1.1	.19	1.1	27	1.2	5.2	.42	10.7	0.023	0.6	17.3	MW	C	Z
0.312	7.92	3	1.50	38.1	.266	6.8	1.8	.32	1.2	31	2.2	9.8	.28	7.2	0.023	0.6	11.3	MW	C	Z
0.312	7.92	S-44	1.50	38.1	.252	6.4	4.1	.72	.79	20	3.2	14	.42	10.7	0.030	0.8	13.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.312	7.92	6	1.50	38.1	.244	6.2	6.7	1.2	.75	19	5.0	22	.55	14.0	0.034	0.9	15.3	HD	C	Z
0.312	7.92	K-23	1.50	38.1	.242	6.1	6.5	1.1	.75	19	4.9	22	.58	14.7	0.035	0.9	15.5	SST	C	N
0.312	7.92	3908	1.50	38.1	.228	5.8	17	3.1	.51	13	8.9	40	.67	17.1	0.042	1.1	15.0	SPR	C	Z
0.312	7.92	S-735	1.50	38.1	.228	5.8	14	2.5	.58	15	8.4	37	.70	17.9	0.042	1.1	15.8	SST	C	N
0.312	7.92	N-70	1.50	38.1	.222	5.6	27	4.7	.41	10	11	49	.61	15.4	0.045	1.1	13.5	SPR	CG	GI
0.312	7.92	B14-31	1.50	38.1	.220	5.6	26	4.6	.44	11	12	52	.74	18.7	0.046	1.2	15.0	SPR	C	Z
0.312	7.92	936	1.50	38.1	.218	5.5	29	5.1	.43	11	12	55	.75	19.1	0.047	1.2	15.0	HD	C	Z
0.312	7.92	11237	1.50	38.1	.208	5.3	37	6.5	.41	11	15	69	.99	25.1	0.052	1.3	18.0	SPR	C	Z
0.312	7.92	11383	1.50	38.1	.198	5.0	87	15	.23	5.9	20	90	.71	18.1	0.057	1.4	12.5	HD	CG	Z
0.312	7.92	2823	1.53	38.9	.240	6.1	8.5	1.5	.93	24	7.9	35	.56	14.2	0.036	0.9	15.5	MW	CG	Z
0.312	7.92	S-180	1.59	40.5	.264	6.7	1.4	.24	1.2	31	1.7	7.5	.36	9.1	0.024	0.6	15.0	SST	CG	N
0.312	7.92	PP-65	1.63	41.3	.272	6.9	.92	.16	1.4	35	1.3	5.7	.24	6.1	0.020	0.5	12.0	MW	CG	Z
0.312	7.92	J-100	1.63	41.3	.242	6.1	6.3	1.1	.78	20	4.9	22	.56	14.2	0.035	0.9	16.0	SST	CG	N
0.312	7.92	WW-59	1.63	41.3	.242	6.1	6.3	1.1	.83	21	5.2	23	.63	16.0	0.035	0.9	18.0	SPR	CG	N
0.312	7.92	116	1.63	41.3	.230	5.8	13	2.2	.65	17	8.3	37	.78	19.8	0.041	1.0	18.0	HD	C	Z
0.312	7.92	10127	1.63	41.3	.228	5.8	17	3.1	.51	13	8.9	40	.67	17.1	0.042	1.1	15.0	SPR	C	Z
0.312	7.92	10916	1.63	41.3	.208	5.3	37	6.4	.42	11	15	69	1.00	25.4	0.052	1.3	18.3	SPR	C	N
0.312	7.92	10535	1.63	41.3	.202	5.1	48	8.5	.38	9.5	18	81	1.05	26.5	0.055	1.4	18.0	SPR	C	Z
0.312	7.92	A15-38	1.66	42.1	.256	6.5	1.6	.29	1.0	26	1.7	7.5	.64	16.2	0.028	0.7	22.8	SST	CG	N
0.312	7.92	12432	1.72	43.6	.250	6.4	5.3	.93	1.0	26	5.3	24	.44	11.2	0.031	0.8	13.3	MW	C	Z
0.312	7.92	202-C	1.75	44.5	.280	7.1	.39	.07	1.6	39	.61	2.7	.20	5.0	0.016	0.4	11.3	MW	C	Z
0.312	7.92	FF-42	1.75	44.5	.272	6.9	.97	.17	1.5	38	1.5	6.5	.25	6.4	0.020	0.5	11.5	MW	C	Z
0.312	7.92	4196	1.75	44.5	.260	6.6	2.8	.49	1.1	29	3.2	14	.34	8.6	0.026	0.7	12.0	MW	C	Z
0.312	7.92	JJ-100	1.75	44.5	.232	5.9	7.6	1.3	.79	20	6.0	27	.96	24.4	0.040	1.0	23.0	SST	C	N
0.312	7.92	10100	1.75	44.5	.222	5.6	23	4.0	.48	12	11	49	.74	18.9	0.045	1.1	15.5	SPR	C	Z
0.312	7.92	HH-93	1.75	44.5	.212	5.4	29	5.1	.47	12	14	62	.95	24.1	0.050	1.3	19.0	SPR	CG	N
0.312	7.92	3395	1.75	44.5	.198	5.0	48	8.4	.42	11	20	90	1.20	30.4	0.057	1.4	21.0	SPR	CG	Z
0.312	7.92	1937	1.75	44.5	.196	5.0	78	14	.27	6.9	21	94	.91	23.2	0.058	1.5	14.8	SPR	C	Z
0.312	7.92	B15-25	1.75	44.5	.180	4.6	126	22	.24	6.1	30	136	1.16	29.3	0.066	1.7	16.5	SPR	C	N
0.312	7.92	3183	1.78	45.2	.248	6.3	6.1	1.1	.97	25	5.9	26	.46	11.6	0.032	0.8	13.3	MW	C	Z
0.312	7.92	OO-87	1.88	47.6	.242	6.1	5.1	.89	1.0	26	5.2	23	.81	20.4	0.035	0.9	22.0	SPR	C	Z
0.312	7.92	10481	1.88	47.6	.230	5.8	11	2.0	.74	19	8.3	37	.86	21.9	0.041	1.0	20.0	SPR	C	Z
0.312	7.92	U-54	1.94	49.2	.260	6.6	2.0	.35	1.5	39	3.1	14	.42	10.6	0.026	0.7	16.0	MW	C	N
0.312	7.92	1942	1.94	49.2	.232	5.9	10	1.8	.75	19	7.8	35	.83	21.1	0.040	1.0	19.8	SPR	C	Z
0.312	7.92	J-87	1.94	49.2	.232	5.9	9.9	1.7	.73	19	7.3	32	.72	18.3	0.040	1.0	18.0	SST	CG	N
0.312	7.92	S-910	2.00	50.8	.264	6.7	1.4	.25	1.2	31	1.8	7.9	.34	8.5	0.024	0.6	14.0	SST	CG	N
0.312	7.92	9	2.00	50.8	.218	5.5	18	3.1	.70	18	12	55	1.14	28.9	0.047	1.2	23.3	HD	C	Z
0.312	7.92	S-297	2.00	50.8	.218	5.5	20	3.5	.58	15	12	52	.90	23.0	0.047	1.2	18.3	SST	C	N
0.312	7.92	3128	2.00	50.8	.214	5.4	28	5.0	.49	12	14	62	.93	23.6	0.049	1.2	18.0	SPR	C	Z
0.312	7.92	937	2.00	50.8	.204	5.2	44	7.8	.39	9.9	17	77	1.03	26.1	0.054	1.4	18.0	HD	C	Z
0.312	7.92	4122	2.13	54.0	.232	5.9	10	1.8	.76	19	7.8	35	.84	21.3	0.040	1.0	20.0	SPR	C	Z
0.312	7.92	S-821	2.16	54.8	.240	6.1	4.1	.71	1.2	30	4.8	21	.99	25.1	0.036	0.9	26.5	SST	C	N
0.312	7.92	S-1030	2.25	57.2	.228	5.8	9.9	1.7	.85	22	8.4	37	.92	23.5	0.042	1.1	22.0	SST	CG	N
0.312	7.92	Z-61	2.25	57.2	.228	5.8	13	2.3	.69	17	8.9	40	.82	20.8	0.042	1.1	19.5	SPR	CG	GI
0.312	7.92	12262	2.31	58.7	.256	6.5	1.9	.34	1.7	42	3.2	14	.64	16.4	0.028	0.7	22.0	MW	C	Z
0.312	7.92	12196	2.34	59.5	.216	5.5	22	3.8	.60	15	13	59	1.01	25.6	0.048	1.2	21.0	SPR	CG	Z
0.312	7.92	G-28	2.38	60.3	.218	5.5	17	2.9	.69	18	12	52	1.03	26.3	0.047	1.2	22.0	SST	CG	N
0.312	7.92	A9-62	2.50	63.5	.250	6.4	3.0	.52	1.8	45	5.3	24	.71	18.1	0.031	0.8	22.0	MW	C	Z
0.312	7.92	F-58	2.50	63.5	.208	5.3	24	4.2	.65	16	15	69	1.40	35.7	0.052	1.3	27.0	SPR	CG	GI
0.312	7.92	S-218	2.75	69.9	.260	6.6	.86	.15	1.9	49	1.7	7.4	.81	20.6	0.026	0.7	30.3	SST	C	N
0.312	7.92	B9-58	2.75	69.9	.202	5.1	36	6.2	.51	13	18	81	1.31	33.2	0.055	1.4	23.8	SPR	CG	N
0.312	7.92	S-1684	2.88	73.0	.274	7.0	.23	.04	2.3	58	.52	2.3	.60	15.2	0.019	0.5	30.5	SST	C	N
0.312	7.92	KK-11	3.00	76.2	.252	6.4	1.7	.30	1.9	48	3.2	14	.90	22.9	0.030	0.8	29.0	SST	C	N
0.312	7.92	Y-13	3.00	76.2	.248	6.3	2.3	.40	1.7	44	3.9	17	.94	23.8	0.032	0.8	28.3	SST	C	N
0.312	7.92	M-115	3.13	79.4	.216	5.5	12	2.1	1.1	28	13	59	1.78	45.1	0.048	1.2	37.0	SPR	CG	N
0.312	7.92	F-57	3.25	82.6	.224	5.7	8.5	1.5	1.2	31	10	46	1.54	39.1	0.044	1.1	35.0	HD	CG	Z
0.312	7.92	4109	3.25	82.6	.220	5.6	13	2.3	.87	22	12	52	1.31	33.3	0.046	1.2	27.5	SPR	C	N
0.312	7.92	1573	3.38	85.7	.242	6.1	4.2	.73	1.3	32	5.2	23	.95	24.2	0.035	0.9	26.3	SPR	C	Z
0.312	7.92	12498	3.44	87.4	.276	7.0	.21	.04	2.9	73	.61	2.7	.56	14.2	0.018	0.5	30.0	MW	C	Z
0.312	7.92	10479	3.66	92.9	.272	6.9	.36	.06	3.1	78	1.1	4.9	.58	14.6	0.020	0.5	27.8	MW	C	Z
0.312	7.92	B2-60	4.00	101.6	.276	7.0	.21	.04	3.4	87	.73	3.2	.56	14.2	0.018	0.5	30.0	MW	C	N
0.312	7.92	10222	4.00	101.6	.216	5.5	15	2.6	.89	23	13	59	1.49	37.8	0.048	1.2	30.0	SPR	C	Z
0.312	7.92	3087	5.00	127.0	.224	5.7	5.5	.96	1.9	47	10	46	2.33	59.2	0.044	1.1	53.0	SPR	CG	Z
0.312	7.92	10092	6.50	165.1	.230	5.8	2.6	.46	3.2	81	8.3	37	3.26	82.8	0.041	1.0	79.5	SPR	CG	Z
0.312	7.92	10772	7.44	188.9	.242	6.1	1.5	.26	3.6	90	5.2	23	2.51	63.8	0.035	0.9	70.8	SPR	C	Z
0.312	7.92	10978	7.50	190.5	.248	6.3	1.6	.28	3.7	93	5.9	26	1.47	37.4	0.032	0.8	45.0	MW	C	N
0.312	7.92	10686	7.50	190.5	.236	6.0	2.9	.50	2.3	59	6.7	30	2.05	52.1	0.038	1.0	53.0	SPR	C	N
0.312	7.92	3858	9.00	228.6	.228	5.8	2.7	.47	3.3	84	8.9	40	3.65	92.8	0.042	1.1	86.0	SPR	C	Z
0.312	7.92	2866	10.0	254.0	.218	5.5	5.1	.89	2.5	62	12	55	3.64	92.5	0.047	1.2	76.5	SPR	C	Z
0.312	7.92	12409	10.5	266.7	.220	5.6	4.4	.77	2.7	67	12	52	3.73	94.6	0.046	1.2	80.0	SPR	C	Z
0.312	7.92	12408	10.5	266.7	.216	5.5	5.3	.93	2.5	63	13	59	3.89	98.8	0.048	1.2	80.0	SPR	C	N
0.328	8.33	A9-4	.22	5.6	.232	5.9	206	36	.05	1.3	10	46	.17	4.3	0.048	1.2	3.50	SST	CG	N
0.328	8.33	10844	.25	6.4	.238	6.0	260	46	.04	1.0	10	46	.18	4.6	0.045	1.1	3.00	SPR	C	N
0.328	8.33	3761	.25	6.4	.228	5.8	558	98	.02	.60	13	59	.19	4.8	0.050	1.3	2.75	SPR	C	Z
0.328	8.33	Y-91	.28	7.1	.264	6.7	19	3.4	.12	3.1	2.3	10	.16	4.1	0.032	0.8	5.00	SPR	CG	N
0.328	8.33	B2-16	.28	7.1	.264	6.7	39	6.8	.10	2.6	4.0	18	.14	3.7	0.032	0.8	3.50	SPR	C	Z
0.328	8.33	B2-5	.30	7.5	.264	6.7	39	6.8	.10	2.6	4.0	18	.14	3.7	0.032	0.8	3.50	SPR	CL	Z
0.328	8.33	G-39	.31	7.9	.280	7.1	14	2.4	.19	4.7	2.5	11	.10	2.6	0.024	0.6	3.25	MW	C	N
0.328	8.33	FF-14	.31	7.9	.268	6.8	12	2.1	.11	2.8	1.3	5.7	.20	5.1	0.030	0.8	5.75	MW	C	N
0.328	8.33	NN-50	.31	7.9	.204	5.2	491	86	.05	1.2	23	103	.25	6.3	0.062	1.6	4.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.328	8.33	H-58	.34	8.7	.296	7.5	.92	.16	.25	6.3	.23	1.0	.10	2.4	0.016	0.4	5.00	SST	C	N
0.328	8.33	EE-32	.38	9.5	.270	6.9	8.3	1.4	.20	5.1	1.7	7.4	.17	4.4	0.029	0.7	6.00	SST	CG	N
0.328	8.33	XX-44	.38	9.5	.264	6.7	29	5.1	.14	3.5	4.0	18	.16	4.1	0.032	0.8	4.00	HD	C	Z
0.328	8.33	MM-69	.38	9.7	.208	5.3	429	75	.05	1.2	21	94	.30	7.6	0.060	1.5	4.00	SST	C	N
0.328	8.33	S-4	.41	10.3	.280	7.1	4.9	.86	.26	6.7	1.3	5.7	.14	3.7	0.024	0.6	5.00	SST	C	N
0.328	8.33	I-38	.44	11.1	.276	7.0	12	2.1	.25	6.5	3.0	13	.10	2.6	0.026	0.7	4.00	MW	CG	GI
0.328	8.33	II-31	.44	11.1	.268	6.8	22	3.9	.21	5.3	4.6	21	.12	3.0	0.030	0.8	4.00	MW	CG	Z
0.328	8.33	KK-1	.44	11.1	.268	6.8	5.5	.96	.14	3.5	.76	3.4	.30	7.6	0.030	0.8	10.0	MW	CG	Z
0.328	8.33	GG-24	.44	11.1	.258	6.6	25	4.4	.18	4.7	4.7	21	.18	4.4	0.035	0.9	5.00	SST	CG	N
0.328	8.33	2944	.44	11.1	.256	6.5	52	9.1	.11	2.7	5.4	24	.18	4.5	0.036	0.9	4.00	SPR	C	Z
0.328	8.33	A10-27	.44	11.1	.256	6.5	34	6.0	.15	3.8	5.1	23	.16	4.1	0.036	0.9	4.50	SST	CG	N
0.328	8.33	S-817	.44	11.1	.252	6.4	27	4.7	.21	5.3	5.6	25	.23	5.8	0.038	1.0	6.00	SST	CG	N
0.328	8.33	VV-43	.44	11.1	.246	6.2	40	7.0	.19	4.8	7.5	33	.24	6.0	0.041	1.0	5.75	SST	CG	N
0.328	8.33	3669	.44	11.1	.244	6.2	64	11	.13	3.4	8.5	38	.21	5.3	0.042	1.1	5.00	SPR	CG	Z
0.328	8.33	Y-71	.44	11.1	.238	6.0	116	20	.09	2.3	10	46	.19	4.9	0.045	1.1	4.25	SPR	CG	N
0.328	8.33	O-117	.50	12.7	.264	6.7	12	2.0	.24	6.2	2.8	13	.26	6.5	0.032	0.8	7.00	SPR	C	GI
0.328	8.33	2578	.50	12.7	.262	6.7	17	2.9	.27	6.7	4.4	20	.23	5.9	0.033	0.8	6.00	HD	C	Z
0.328	8.33	W-86	.50	12.7	.238	6.0	57	9.9	.17	4.4	9.8	44	.27	6.9	0.045	1.1	6.00	SST	CG	N
0.328	8.33	A10-51	.50	12.7	.236	6.0	31	5.5	.18	4.5	5.6	25	.32	8.2	0.046	1.2	7.00	SPR	CG	N
0.328	8.33	B4-11	.50	12.7	.236	6.0	72	13	.16	3.9	11	50	.28	7.0	0.046	1.2	6.00	SPR	CG	Z
0.328	8.33	3717	.50	12.7	.192	4.9	437	77	.07	1.8	32	142	.41	10.4	0.068	1.7	6.00	SPR	CG	Z
0.328	8.33	J-76	.50	12.7	.184	4.7	768	134	.05	1.2	35	158	.36	9.1	0.072	1.8	5.00	SPR	CG	N
0.328	8.33	2673	.56	14.3	.264	6.7	27	4.8	.21	5.2	5.6	25	.13	3.4	0.032	0.8	4.00	MW	CG	GI
0.328	8.33	11132	.56	14.3	.238	6.0	61	11	.17	4.3	10	46	.33	8.3	0.045	1.1	6.25	SPR	C	Z
0.328	8.33	I-11	.56	14.3	.226	5.7	101	18	.13	3.3	13	59	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.328	8.33	O-1	.59	15.1	.302	7.7	.19	.03	.46	12	.09	.39	.13	3.3	0.013	0.3	9.00	MW	C	GI
0.328	8.33	2671	.59	15.1	.288	7.3	3.9	.69	.37	9.5	1.5	6.6	.10	2.5	0.020	0.5	4.00	MW	C	Z
0.328	8.33	CC-97	.59	15.1	.242	6.1	42	7.4	.22	5.5	9.1	41	.30	7.6	0.043	1.1	7.00	SPR	CG	Z
0.328	8.33	A-17	.63	15.9	.300	7.6	.25	.04	.49	12	.12	.55	.14	3.6	0.014	0.4	9.00	MW	C	Z
0.328	8.33	BB-97	.63	15.9	.278	7.1	4.0	.71	.43	11	1.7	7.6	.20	5.1	0.025	0.6	7.00	MW	C	Z
0.328	8.33	L-36	.63	15.9	.278	7.1	4.5	.79	.46	12	2.1	9.2	.16	4.1	0.025	0.6	6.50	MW	CG	N
0.328	8.33	S-1429	.63	15.9	.270	6.9	8.3	1.4	.34	8.6	2.8	12	.20	5.2	0.029	0.7	6.00	SST	C	N
0.328	8.33	W-65	.63	15.9	.264	6.7	15	2.5	.28	7.0	4.0	18	.22	5.7	0.032	0.8	6.00	SPR	C	Z
0.328	8.33	FF-47	.63	15.9	.258	6.6	19	3.3	.25	6.4	4.7	21	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.328	8.33	S-797	.63	15.9	.258	6.6	15	2.6	.31	8.0	4.7	21	.25	6.2	0.035	0.9	7.00	SST	CG	N
0.328	8.33	A13-45	.63	15.9	.242	6.1	35	6.2	.26	6.6	9.1	41	.34	8.7	0.043	1.1	8.00	SPR	CG	N
0.328	8.33	LL-94	.63	15.9	.204	5.2	245	43	.09	2.4	23	103	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.328	8.33	B3-44	.66	16.7	.282	7.2	2.4	.41	.45	11	1.1	4.7	.21	5.3	0.023	0.6	8.00	MW	C	Z
0.328	8.33	O-142	.66	16.7	.246	6.2	30	5.3	.24	6.2	7.5	33	.29	7.3	0.041	1.0	7.00	SST	CG	N
0.328	8.33	Z-92	.66	16.7	.244	6.2	55	9.6	.16	4.0	8.5	38	.27	6.9	0.042	1.1	5.50	SPR	C	Z
0.328	8.33	I-76	.66	16.7	.236	6.0	51	8.9	.20	5.2	10	46	.32	8.2	0.046	1.2	7.00	SST	CG	N
0.328	8.33	B15-56	.69	17.4	.302	7.7	.19	.03	.57	14	.11	.49	.12	3.0	0.013	0.3	8.00	SST	C	N
0.328	8.33	S-893	.69	17.4	.274	7.0	6.6	1.2	.34	8.7	2.3	10	.18	4.6	0.027	0.7	5.75	SST	C	N
0.328	8.33	CC-77	.69	17.4	.272	6.9	6.9	1.2	.50	13	3.4	15	.19	4.8	0.028	0.7	6.75	MW	CG	N
0.328	8.33	A12-32	.69	17.4	.262	6.7	14	2.5	.28	7.2	4.1	18	.23	5.9	0.033	0.8	6.00	SST	C	N
0.328	8.33	S-3143	.69	17.4	.246	6.2	40	7.0	.19	4.8	7.5	33	.28	7.0	0.041	1.0	5.75	SST	C	N
0.328	8.33	U-40	.69	17.4	.234	5.9	53	9.2	.22	5.7	12	53	.38	9.6	0.047	1.2	8.00	SPR	CG	Z
0.328	8.33	A9-43	.72	18.2	.278	7.1	4.5	.78	.40	10	1.8	8.0	.18	4.4	0.025	0.6	6.00	SST	C	N
0.328	8.33	2872	.72	18.2	.270	6.9	5.9	1.0	.44	11	2.6	12	.28	7.0	0.029	0.7	8.50	MW	C	Z
0.328	8.33	12500	.72	18.3	.228	5.8	73	13	.18	4.6	13	59	.44	11.1	0.050	1.3	7.75	SPR	C	N
0.328	8.33	MM-17	.75	19.1	.300	7.6	.20	.03	.58	15	.12	.51	.17	4.3	0.014	0.4	11.0	MW	C	Z
0.328	8.33	I-19	.75	19.1	.296	7.5	.56	.10	.61	16	.35	1.5	.14	3.5	0.016	0.4	7.50	MW	C	N
0.328	8.33	S-3000	.75	19.1	.272	6.9	4.7	.83	.50	13	2.4	11	.25	6.4	0.028	0.7	8.00	SST	C	N
0.328	8.33	KK-46	.75	19.1	.268	6.8	9.8	1.7	.32	8.1	3.1	14	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.328	8.33	Y-88	.75	19.1	.268	6.8	5.5	.96	.45	11	2.5	11	.30	7.6	0.030	0.8	9.00	SST	C	N
0.328	8.33	10022	.75	19.1	.266	6.8	6.3	1.1	.41	10	2.6	12	.34	8.7	0.031	0.8	10.0	MW	C	Z
0.328	8.33	2546	.75	19.1	.258	6.6	12	2.1	.40	10	4.9	22	.35	8.9	0.035	0.9	9.00	MW	C	Z
0.328	8.33	A-86	.75	19.1	.248	6.3	26	4.5	.29	7.3	7.4	33	.32	8.1	0.040	1.0	8.00	SPR	CG	Z
0.328	8.33	K-68	.75	19.1	.248	6.3	27	4.7	.26	6.6	6.9	31	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.328	8.33	2919	.75	19.1	.234	5.9	53	9.2	.22	5.7	12	53	.38	9.6	0.047	1.2	8.00	HD	CG	Z
0.328	8.33	RR-24	.75	19.1	.234	5.9	52	9.2	.21	5.4	11	49	.34	8.7	0.047	1.2	7.25	SST	CG	N
0.328	8.33	WW-61	.75	19.1	.216	5.5	117	21	.16	4.0	18	82	.50	12.8	0.056	1.4	8.00	SPR	C	Z
0.328	8.33	FF-95	.78	19.8	.268	6.8	5.5	.96	.48	12	2.6	12	.30	7.6	0.030	0.8	9.00	SST	C	N
0.328	8.33	A9-13	.78	19.8	.232	5.9	50	8.8	.23	6.0	12	52	.39	9.9	0.048	1.2	8.00	SST	CG	N
0.328	8.33	K-100	.81	20.6	.248	6.3	21	3.6	.34	8.5	6.9	31	.34	8.6	0.040	1.0	8.50	SST	CG	N
0.328	8.33	00-29	.84	21.4	.198	5.0	175	31	.15	3.8	26	117	.59	14.9	0.065	1.7	9.00	SST	CG	N
0.328	8.33	10588	.88	22.2	.280	7.1	2.8	.50	.66	17	1.9	8.3	.22	5.5	0.024	0.6	8.00	MW	C	N
0.328	8.33	JJ-40	.88	22.2	.280	7.1	1.8	.32	.61	16	1.1	5.0	.26	6.7	0.024	0.6	10.0	SST	C	N
0.328	8.33	L-74	.88	22.2	.264	6.7	8.3	1.5	.48	12	4.0	18	.32	8.1	0.032	0.8	9.00	HD	C	N
0.328	8.33	B5-13	.88	22.2	.264	6.7	6.3	1.1	.52	13	3.2	14	.36	9.1	0.032	0.8	11.3	SPR	CG	N
0.328	8.33	4103	.88	22.2	.230	5.8	55	9.5	.25	6.2	13	59	.49	12.4	0.049	1.2	9.00	SPR	C	Z
0.328	8.33	G-34	.88	22.2	.214	5.4	127	22	.15	3.9	19	86	.46	11.6	0.057	1.4	8.00	SPR	CG	Z
0.328	8.33	11189	.88	22.2	.186	4.7	430	75	.08	2.0	34	152	.57	14.4	0.071	1.8	7.00	HD	C	Z
0.328	8.33	MM-58	.91	23.0	.288	7.3	.79	.14	.67	17	.52	2.3	.24	6.1	0.020	0.5	12.0	MW	CG	N
0.328	8.33	S-917	.91	23.0	.270	6.9	4.3	.75	.59	15	2.5	11	.32	8.0	0.029	0.7	10.0	SST	C	N
0.328	8.33	3207	.91	23.0	.234	5.9	45	7.9	.26	6.7	12	53	.47	11.9	0.047	1.2	9.00	HD	C	Z
0.328	8.33	1821	.91	23.0	.218	5.5	92	16	.26	6.7	24	108	.55	14.0	0.055	1.4	9.00	MW	C	Z
0.328	8.33	4182	.94	23.8	.220	5.6	66	12	.25	6.4	17	74	.65	16.5	0.054	1.4	11.0	SPR	C	Z
0.328	8.33	H-73	.97	24.6	.282	7.2	1.1	.19	.63	16	.68	3.0	.33	8.5	0.023	0.6	13.5	SST	C	N
0.328	8.33	GG-91	.97	24.6	.276	7.0	3.5	.62	.58	15	2.0	9.0	.23	5.9	0.026	0.7	8.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.328	8.33	HH-38	1.00	25.4	.282	7.2	1.4	.25	.70	18	.99	4.4	.30	7.6	0.023	0.6	12.0	MW	C	N
0.328	8.33	I-9	1.00	25.4	.274	7.0	3.3	.58	.69	18	2.3	10	.31	7.9	0.027	0.7	10.5	MW	C	Z
0.328	8.33	WW-53	1.00	25.4	.254	6.5	14	2.4	.41	10	5.5	25	.33	8.5	0.037	0.9	9.00	SST	CG	N
0.328	8.33	CC-69	1.00	25.4	.248	6.3	19	3.4	.38	9.8	7.4	33	.40	10.2	0.040	1.0	10.0	SPR	CG	Z
0.328	8.33	2581	1.00	25.4	.242	6.1	33	5.7	.39	9.8	13	56	.41	10.4	0.043	1.1	8.50	MW	C	Z
0.328	8.33	10040	1.00	25.4	.238	6.0	37	6.5	.28	7.1	10	46	.45	11.4	0.045	1.1	9.00	SPR	C	Z
0.328	8.33	10536	1.00	25.4	.238	6.0	27	4.8	.38	9.7	10	46	.56	14.3	0.045	1.1	11.5	SPR	C	Z
0.328	8.33	B4-25	1.00	25.4	.238	6.0	33	5.7	.44	11	14	64	.45	11.4	0.045	1.1	10.0	MW	CG	N
0.328	8.33	J-16	1.00	25.4	.224	5.7	71	13	.21	5.3	15	66	.47	11.9	0.052	1.3	9.00	SPR	CG	Z
0.328	8.33	O-103	1.03	26.2	.256	6.5	13	2.3	.42	11	5.4	24	.38	9.6	0.036	0.9	9.50	SPR	C	GI
0.328	8.33	A-69	1.06	27.0	.276	7.0	2.0	.35	.70	18	1.4	6.2	.36	9.2	0.026	0.7	14.0	MW	CG	N
0.328	8.33	Y-96	1.06	27.0	.232	5.9	40	7.0	.32	8.1	13	56	.52	13.1	0.048	1.2	10.8	SPR	CG	GI
0.328	8.33	B14-28	1.09	27.8	.290	7.4	.63	.11	.87	22	.55	2.4	.23	5.8	0.019	0.5	12.0	MW	CG	N
0.328	8.33	10255	1.09	27.8	.278	7.1	2.2	.39	.79	20	1.8	7.9	.30	7.6	0.025	0.6	11.0	MW	C	N
0.328	8.33	W-27	1.09	27.8	.220	5.6	59	10	.27	6.7	16	69	.59	15.1	0.054	1.4	11.0	SST	CG	N
0.328	8.33	CC-51	1.13	28.6	.268	6.8	6.8	1.2	.68	17	4.6	21	.29	7.2	0.030	0.8	8.50	MW	C	Z
0.328	8.33	HH-27	1.13	28.6	.268	6.8	4.6	.80	.67	17	3.1	14	.32	8.0	0.030	0.8	10.5	SST	CG	N
0.328	8.33	A-98	1.13	28.6	.256	6.5	11	2.0	.48	12	5.4	24	.38	9.6	0.036	0.9	10.5	HD	CG	N
0.328	8.33	S-229	1.13	28.6	.242	6.1	28	5.0	.30	7.7	8.6	38	.37	9.3	0.043	1.1	8.50	SST	C	N
0.328	8.33	Q-40	1.13	28.6	.238	6.0	18	3.2	.47	12	8.5	38	.65	16.6	0.045	1.1	14.5	SST	CG	N
0.328	8.33	S-413	1.13	28.6	.228	5.8	39	6.8	.32	8.1	12	55	.58	14.6	0.050	1.3	11.5	SST	CG	N
0.328	8.33	OO-72	1.13	28.6	.228	5.8	119	21	.11	2.8	13	59	.28	7.0	0.050	1.3	5.50	SPR	CG	Z
0.328	8.33	3606	1.13	28.6	.220	5.6	99	17	.17	4.2	17	74	.49	12.3	0.054	1.4	8.00	HD	C	Z
0.328	8.33	NN-36	1.19	30.2	.268	6.8	6.0	1.1	.52	13	3.1	14	.29	7.2	0.030	0.8	8.50	SST	C	N
0.328	8.33	B7-26	1.19	30.2	.248	6.3	13	2.3	.55	14	7.4	33	.54	13.7	0.040	1.0	13.5	SPR	CG	N
0.328	8.33	11101	1.19	30.2	.234	5.9	40	6.9	.30	7.6	12	53	.47	11.9	0.047	1.2	10.0	SPR	CG	Z
0.328	8.33	3958	1.19	30.2	.226	5.7	46	8.0	.31	7.8	14	62	.61	15.5	0.051	1.3	12.0	SPR	CG	Z
0.328	8.33	1507	1.19	30.2	.204	5.2	150	26	.23	5.7	34	151	.59	15.0	0.062	1.6	9.50	MW	CG	Z
0.328	8.33	I-3	1.22	31.0	.230	5.8	40	7.0	.33	8.5	13	59	.56	14.3	0.049	1.2	11.5	SPR	CG	N
0.328	8.33	PP-34	1.25	31.8	.288	7.3	.70	.12	.99	25	.69	3.1	.26	6.6	0.020	0.5	12.0	SST	C	N
0.328	8.33	3565	1.25	31.8	.272	6.9	4.1	.72	.92	23	3.8	17	.31	7.8	0.028	0.7	10.0	MW	C	Z
0.328	8.33	MM-74	1.25	31.8	.264	6.7	5.3	.93	.70	18	3.7	17	.40	10.2	0.032	0.8	11.5	SST	C	N
0.328	8.33	NN-27	1.25	31.8	.248	6.3	11	2.0	.61	15	6.9	31	.60	15.2	0.040	1.0	14.0	SST	C	N
0.328	8.33	EE-90	1.25	31.8	.188	4.8	251	44	.13	3.3	33	146	.70	17.8	0.070	1.8	10.0	SPR	CG	N
0.328	8.33	HH-2	1.25	31.8	.148	3.8	777	136	.08	2.0	62	276	.99	25.1	0.090	2.3	11.0	SPR	CG	GI
0.328	8.33	10876	1.28	32.5	.288	7.3	.87	.15	1.1	27	.93	4.1	.22	5.6	0.020	0.5	10.0	SST	C	N
0.328	8.33	10576	1.28	32.5	.258	6.6	7.6	1.3	.62	16	4.7	21	.42	10.7	0.035	0.9	12.0	SST	CG	N
0.328	8.33	10720	1.28	32.5	.246	6.2	16	2.7	.51	13	8.0	35	.57	14.6	0.041	1.0	13.0	SPR	C	Z
0.328	8.33	OO-97	1.28	32.5	.208	5.3	143	25	.15	3.7	21	94	.54	13.7	0.060	1.5	8.00	SST	C	N
0.328	8.33	2783	1.31	33.3	.266	6.8	7.9	1.4	.64	16	5.1	23	.29	7.4	0.031	0.8	8.25	MW	C	Z
0.328	8.33	S-186	1.31	33.3	.204	5.2	109	19	.21	5.4	23	103	.68	17.3	0.062	1.6	11.0	SST	CG	N
0.328	8.33	3644	1.38	34.9	.296	7.5	.41	.07	1.2	31	.50	2.2	.17	4.3	0.016	0.4	9.50	MW	C	N
0.328	8.33	11452	1.38	34.9	.234	5.9	35	6.2	.34	8.6	12	53	.56	14.3	0.047	1.2	11.0	HD	C	Z
0.328	8.33	1905	1.38	34.9	.146	3.7	823	144	.08	2.0	64	284	1.00	25.4	0.091	2.3	11.0	SPR	CG	Z
0.328	8.33	10534	1.41	35.7	.266	6.8	3.7	.65	.89	23	3.3	15	.52	13.2	0.031	0.8	15.8	MW	C	Z
0.328	8.33	S-825	1.41	35.7	.236	6.0	21	3.6	.50	13	10	46	.64	16.4	0.046	1.2	14.0	SST	CG	N
0.328	8.33	12468	1.47	37.3	.284	7.2	.98	.17	1.2	29	1.1	5.1	.31	7.8	0.022	0.6	14.0	MW	CG	Z
0.328	8.33	KK-59	1.47	37.3	.228	5.8	35	6.1	.38	9.6	13	59	.70	17.8	0.050	1.3	14.0	SPR	CG	N
0.328	8.33	MM-72	1.50	38.1	.288	7.3	.87	.15	1.1	29	.98	4.4	.22	5.6	0.020	0.5	10.0	SST	C	N
0.328	8.33	S-1159	1.50	38.1	.278	7.1	1.8	.32	.98	25	1.8	8.0	.31	7.9	0.025	0.6	11.5	SST	C	N
0.328	8.33	12251	1.50	38.1	.268	6.8	2.7	.47	1.0	26	2.7	12	.50	12.6	0.030	0.8	16.5	SST	CG	N
0.328	8.33	VV-70	1.50	38.1	.266	6.8	3.0	.52	.88	22	2.6	12	.62	15.7	0.031	0.8	19.0	MW	C	Z
0.328	8.33	K-30	1.50	38.1	.252	6.4	8.5	1.5	.70	18	6.0	27	.59	15.0	0.038	1.0	14.5	SST	C	N
0.328	8.33	O-59	1.50	38.1	.250	6.4	8.6	1.5	.80	20	6.9	31	.70	17.8	0.039	1.0	18.0	SPR	CG	Z
0.328	8.33	Q-47	1.59	40.5	.260	6.6	5.0	.88	.96	24	4.8	21	.58	14.7	0.034	0.9	17.0	SPR	CG	N
0.328	8.33	A11-57	1.59	40.5	.256	6.5	14	2.4	.39	10	5.4	24	.36	9.1	0.036	0.9	9.00	SPR	C	Z
0.328	8.33	L-54	1.69	42.8	.234	5.9	21	3.7	.56	14	12	53	.80	20.3	0.047	1.2	17.0	SPR	CG	Z
0.328	8.33	RR-69	1.69	42.8	.184	4.7	149	26	.24	6.1	35	158	1.26	32.0	0.072	1.8	17.5	HD	CG	Z
0.328	8.33	12212	1.75	44.5	.244	6.2	16	2.8	.54	14	8.5	38	.59	14.9	0.042	1.1	14.0	SPR	CG	GI
0.328	8.33	N-104	1.75	44.5	.218	5.5	31	5.4	.49	12	15	66	1.27	32.1	0.055	1.4	23.0	SPR	CG	Z
0.328	8.33	Q-36	1.88	47.6	.278	7.1	.88	.15	1.3	34	1.2	5.2	.55	14.0	0.025	0.6	22.0	SST	C	N
0.328	8.33	12406	1.88	47.6	.246	6.2	9.5	1.7	.83	21	8.0	35	.86	21.9	0.041	1.0	20.0	SPR	C	Z
0.328	8.33	LL-24	1.88	47.6	.208	5.3	65	11	.35	8.8	22	99	1.02	25.9	0.060	1.5	17.0	SPR	CG	Z
0.328	8.33	2695	1.91	48.4	.184	4.7	146	26	.24	6.2	35	158	1.28	32.5	0.072	1.8	17.8	HD	CG	Z
0.328	8.33	L-3	1.94	49.2	.220	5.6	29	5.1	.57	14	17	74	1.22	30.9	0.054	1.4	22.5	SPR	CG	GI
0.328	8.33	G-94	1.94	49.2	.280	7.1	1.1	.20	1.5	38	1.7	7.6	.43	11.0	0.024	0.6	17.0	MW	C	Z
0.328	8.33	11806	1.94	49.2	.216	5.5	34	6.0	.54	14	18	82	1.26	32.0	0.056	1.4	22.5	SPR	CG	Z
0.328	8.33	II-53	1.94	49.2	.214	5.4	37	6.5	.52	13	19	86	1.28	32.6	0.057	1.4	22.5	SPR	CG	GI
0.328	8.33	B11-11	2.00	50.8	.280	7.1	1.2	.22	1.6	41	2.0	8.8	.40	10.2	0.024	0.6	15.8	MW	C	N
0.328	8.33	B18-129	2.00	50.8	.246	6.2	12	2.2	.64	16	8.0	35	.65	16.4	0.041	1.0	15.8	SPR	CG	Z
0.328	8.33	B10-62	2.00	50.8	.234	5.9	29	5.0	.41	10	12	53	.61	15.5	0.047	1.2	13.0	SPR	CG	Z
0.328	8.33	3286	2.25	57.2	.248	6.3	9.6	1.7	.77	20	7.4	33	.72	18.3	0.040	1.0	18.0	SPR	CG	Z
0.328	8.33	L-61	2.31	58.7	.222	5.6	25	4.3	.63	16	16	70	1.33	33.7	0.053	1.3	24.0	SPR	C	Z
0.328	8.33	10035	2.44	61.9	.220	5.6	25	4.4	.62	16	16	69	1.22	30.9	0.054	1.4	22.5	SST	CG	N
0.328	8.33	11292	2.50	63.5	.272	6.9	1.3	.22	1.8	45	2.2	9.9	.73	18.5	0.028	0.7	25.0	SST	C	N
0.328	8.33	B-92	2.69	68.2	.276	7.0	1.1	.19	2.0	52	2.2	9.7	.66	16.7	0.026	0.7	24.3	MW	C	N
0.328	8.33	S-3025	2.75	69.9	.288	7.3	.20	.03	2.0	51	.40	1.8	.75	19.1	0.020	0.5	36.5	SST	C	N
0.328	8.33	OO-75	2.75	69.9	.208	5.3	37	6.5	.56	14	21	94	1.50	38.1	0.060	1.5	25.0	SST	CG	N
0.328	8.33	B11-23	3.00	76.2	.236	6.0	15	2.6	.76	19	11	50	.99	25.1	0.046	1.2	21.5	SPR	CG	N
0.328	8.33	B17-173	3.22	81.8	.238	6.0	9.3	1.6	1.1	29	10	46	1.35	34.3	0.045	1.1	30.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.328	8.33	1934	3.38	85.7	.254	6.5	4.3	.76	1.4	35	5.9	26	1.05	26.5	0.037	0.9	27.3	SPR	C	Z
0.328	8.33	S-3074	4.13	104.8	.274	7.0	.80	.14	2.8	72	2.3	10	.90	23.0	0.027	0.7	32.5	SST	C	N
0.328	8.33	S-3099	4.25	108.0	.274	7.0	.63	.11	3.1	79	2.0	8.8	1.12	28.5	0.027	0.7	40.5	SST	C	N
0.328	8.33	K-54	4.25	108.0	.258	6.6	2.0	.34	2.4	61	4.7	21	1.44	36.4	0.035	0.9	40.0	SST	C	N
0.338	8.59	12753	1.48	37.7	.274	7.0	5.3	.92	.74	19	3.9	17	.42	10.6	0.032	0.8	12.0	SPR	C	N
0.343	8.71	W-99	.16	4.0	.295	7.5	6.5	1.1	.04	.91	.23	1.0	.12	3.0	0.024	0.6	4.00	SST	C	N
0.343	8.71	S-855	.19	4.8	.285	7.2	46	8.0	.06	1.5	2.7	12	.08	1.9	0.029	0.7	2.50	SST	C	N
0.343	8.71	S-1324	.25	6.4	.273	6.9	32	5.6	.08	1.9	2.4	11	.18	4.4	0.035	0.9	4.00	SST	C	N
0.343	8.71	U-95	.28	7.1	.283	7.2	19	3.3	.16	4.1	3.1	14	.12	3.0	0.030	0.8	4.00	MW	CG	N
0.343	8.71	PP-51	.28	7.1	.243	6.2	211	37	.06	1.4	12	53	.18	4.4	0.050	1.3	3.50	SST	CG	N
0.343	8.71	DD-77	.31	7.9	.315	8.0	.31	.05	.20	5.1	.06	.28	.11	2.8	0.014	0.4	7.00	MW	C	N
0.343	8.71	GG-54	.31	7.9	.295	7.5	9.8	1.7	.20	5.2	2.0	8.9	.11	2.7	0.024	0.6	3.50	MW	C	N
0.343	8.71	U-74	.31	7.9	.283	7.2	8.3	1.4	.10	2.6	.84	3.7	.21	5.3	0.030	0.8	6.00	SST	C	N
0.343	8.71	2731	.31	7.9	.275	7.0	65	11	.07	1.8	4.6	21	.14	3.5	0.034	0.9	3.00	SPR	C	Z
0.343	8.71	B7-25	.34	8.7	.303	7.7	3.9	.68	.27	6.8	1.0	4.6	.08	1.9	0.020	0.5	3.75	MW	CG	N
0.343	8.71	G-52	.34	8.7	.261	6.6	49	8.6	.14	3.5	6.8	30	.21	5.2	0.041	1.0	5.00	SPR	CG	Z
0.343	8.71	B-71	.38	9.5	.315	8.0	.52	.09	.29	7.4	.15	.67	.08	2.1	0.014	0.4	5.00	MW	C	Z
0.343	8.71	O-53	.38	9.5	.293	7.4	7.6	1.3	.23	5.8	1.7	7.7	.13	3.2	0.025	0.6	4.00	SST	C	N
0.343	8.71	NN-40	.38	9.5	.283	7.2	19	3.3	.23	5.7	4.3	19	.15	3.8	0.030	0.8	4.00	MW	C	Z
0.343	8.71	B14-33	.38	9.5	.277	7.0	13	2.4	.17	4.3	2.3	10	.21	5.2	0.033	0.8	6.25	SPR	CG	N
0.343	8.71	MM-76	.38	9.5	.233	5.9	192	34	.07	1.8	14	62	.30	7.7	0.055	1.4	4.50	SST	C	N
0.343	8.71	V-55	.38	9.5	.231	5.9	212	37	.08	2.0	17	74	.25	6.4	0.056	1.4	4.50	SST	CG	N
0.343	8.71	A-5	.41	10.3	.263	6.7	33	5.8	.19	4.7	6.1	27	.22	5.6	0.040	1.0	5.50	SST	CG	N
0.343	8.71	I-28	.41	10.3	.245	6.2	130	23	.10	2.5	13	57	.22	5.6	0.049	1.2	4.50	SPR	CG	N
0.343	8.71	1925	.44	11.1	.281	7.1	22	3.8	.22	5.7	4.9	22	.16	3.9	0.031	0.8	4.00	MW	C	Z
0.343	8.71	2950	.44	11.1	.275	7.0	33	5.7	.14	3.6	4.6	21	.17	4.3	0.034	0.9	4.00	SPR	C	Z
0.343	8.71	A12-3	.45	11.5	.263	6.7	48	8.4	.15	3.8	7.1	32	.23	5.8	0.040	1.0	4.75	SPR	C	N
0.343	8.71	W-97	.47	11.9	.275	7.0	19	3.4	.22	5.7	4.3	19	.20	5.2	0.034	0.9	5.00	SST	C	N
0.343	8.71	Q-98	.47	11.9	.265	6.7	16	2.8	.10	2.5	1.6	7.0	.37	9.4	0.039	1.0	8.50	SST	C	N
0.343	8.71	11451	.50	12.7	.305	7.7	2.4	.43	.40	10	.98	4.4	.10	2.5	0.019	0.5	4.25	MW	C	N
0.343	8.71	N-39	.50	12.7	.301	7.6	1.7	.29	.36	9.2	.60	2.7	.14	3.5	0.021	0.5	6.50	SST	CG	N
0.343	8.71	BB-56	.50	12.7	.295	7.5	4.3	.75	.36	9.0	1.5	6.7	.14	3.7	0.024	0.6	5.00	SST	C	N
0.343	8.71	2568	.50	12.7	.287	7.3	14	2.5	.26	6.5	3.6	16	.14	3.6	0.028	0.7	4.00	MW	C	Z
0.343	8.71	II-43	.50	12.7	.283	7.2	3.3	.58	.07	1.7	.21	.95	.44	11.0	0.030	0.8	13.5	MW	C	N
0.343	8.71	S-114	.50	12.7	.279	7.1	13	2.3	.27	6.8	3.6	16	.20	5.1	0.032	0.8	5.25	SST	C	N
0.343	8.71	I-86	.50	12.7	.275	7.0	19	3.3	.23	5.8	4.3	19	.20	5.2	0.034	0.9	5.00	SST	C	N
0.343	8.71	3453	.50	12.7	.273	6.9	25	4.3	.20	5.0	4.8	21	.21	5.3	0.035	0.9	5.00	SPR	C	GI
0.343	8.71	MM-64	.50	12.7	.263	6.7	23	4.0	.22	5.6	5.1	23	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.343	8.71	10882	.50	12.7	.251	6.4	89	16	.17	4.2	15	66	.22	5.6	0.046	1.2	4.75	MW	CG	N
0.343	8.71	MM-35	.50	12.7	.243	6.2	84	15	.15	3.8	13	57	.31	7.9	0.050	1.3	6.25	SPR	CG	Z
0.343	8.71	DD-30	.50	12.7	.243	6.2	79	14	.15	3.8	12	53	.30	7.6	0.050	1.3	6.00	SST	CG	N
0.343	8.71	G-93	.50	12.7	.235	6.0	110	19	.14	3.4	15	67	.32	8.2	0.054	1.4	6.00	SST	CG	N
0.343	8.71	BB-39	.50	12.7	.183	4.6	1177	206	.04	.99	46	204	.38	9.7	0.080	2.0	4.75	SPR	CG	N
0.343	8.71	B17-145	.53	13.5	.313	8.0	.25	.04	.36	9.2	.09	.40	.17	4.3	0.015	0.4	10.3	MW	C	N
0.343	8.71	L-89	.53	13.5	.299	7.6	2.9	.51	.39	9.9	1.1	5.0	.14	3.6	0.022	0.6	5.50	MW	C	Z
0.343	8.71	H-88	.53	13.5	.293	7.4	8.7	1.5	.30	7.5	2.6	11	.13	3.2	0.025	0.6	4.00	MW	C	N
0.343	8.71	A10-69	.53	13.5	.285	7.2	5.3	.93	.31	8.0	1.7	7.4	.22	5.5	0.029	0.7	7.50	SST	CG	N
0.343	8.71	3509	.53	13.5	.283	7.2	11	1.9	.37	9.3	4.0	18	.17	4.2	0.030	0.8	5.50	MW	CG	Z
0.343	8.71	Q-97	.53	13.5	.283	7.2	6.7	1.2	.29	7.4	2.0	8.7	.24	6.1	0.030	0.8	7.00	SST	C	N
0.343	8.71	II-32	.53	13.5	.279	7.1	9.4	1.6	.32	8.0	2.9	13	.22	5.5	0.032	0.8	6.75	SST	CG	N
0.343	8.71	B-67	.53	13.5	.279	7.1	10	1.8	.28	7.0	2.8	12	.26	6.5	0.032	0.8	7.00	HD	C	N
0.343	8.71	JJ-61	.53	13.5	.259	6.6	36	6.2	.22	5.5	7.7	34	.25	6.4	0.042	1.1	6.00	SST	CG	N
0.343	8.71	1655	.53	13.5	.189	4.8	716	125	.06	1.5	41	183	.44	11.3	0.077	2.0	5.75	SPR	CG	Z
0.343	8.71	10730	.56	14.3	.309	7.8	1.4	.24	.47	12	.65	2.9	.09	2.4	0.017	0.4	4.50	MW	C	N
0.343	8.71	S-1040	.56	14.3	.309	7.8	1.0	.18	.46	12	.46	2.1	.10	2.6	0.017	0.4	5.00	SST	C	N
0.343	8.71	S-3122	.56	14.3	.301	7.6	1.2	.21	.37	9.5	.45	2.0	.19	4.8	0.021	0.5	8.00	SST	C	N
0.343	8.71	11342	.56	14.3	.293	7.4	3.3	.57	.39	10	1.3	5.7	.17	4.3	0.025	0.6	6.75	SST	CG	N
0.343	8.71	K-71	.56	14.3	.291	7.4	4.3	.76	.39	9.8	1.7	7.5	.18	4.5	0.026	0.7	6.75	MW	CG	N
0.343	8.71	KK-76	.56	14.3	.279	7.1	14	2.5	.27	6.8	3.9	17	.21	5.3	0.032	0.8	5.50	SPR	C	N
0.343	8.71	G-87	.56	14.3	.261	6.6	37	6.5	.21	5.3	7.6	34	.25	6.2	0.041	1.0	6.00	SPR	CG	Z
0.343	8.71	Q-30	.63	15.9	.303	7.7	1.1	.20	.45	11	.51	2.3	.18	4.6	0.020	0.5	8.00	MW	C	N
0.343	8.71	A-60-A	.63	15.9	.293	7.4	1.9	.34	.35	8.9	.68	3.0	.28	7.0	0.025	0.6	10.0	SST	C	N
0.343	8.71	MM-68	.63	15.9	.279	7.1	8.7	1.5	.40	10	3.5	16	.22	5.7	0.032	0.8	7.00	SST	CG	N
0.343	8.71	N-46	.63	15.9	.273	6.9	18	3.2	.26	6.6	4.8	21	.21	5.3	0.035	0.9	6.00	SPR	C	GI
0.343	8.71	OO-94	.63	15.9	.269	6.8	23	4.1	.23	5.8	5.3	24	.20	5.2	0.037	0.9	5.50	SST	CG	N
0.343	8.71	S-3119	.63	15.9	.261	6.6	37	6.4	.20	5.0	7.2	32	.27	6.8	0.041	1.0	5.50	SST	C	N
0.343	8.71	3814	.63	15.9	.253	6.4	45	7.8	.23	5.7	10	45	.36	9.1	0.045	1.1	7.00	SPR	C	Z
0.343	8.71	S-1043	.63	15.9	.247	6.3	57	10	.20	5.0	11	50	.31	7.9	0.048	1.2	6.50	SST	CG	N
0.343	8.71	B2-11	.63	16.0	.253	6.4	24	4.2	.14	3.5	3.3	15	.50	12.6	0.045	1.1	10.0	SST	CL	N
0.343	8.71	L-78	.66	16.7	.267	6.8	18	3.1	.35	8.8	6.1	27	.30	7.7	0.038	1.0	8.00	SPR	CG	N
0.343	8.71	11214	.66	16.7	.263	6.7	22	3.9	.30	7.6	6.7	30	.29	7.4	0.040	1.0	7.25	SST	CG	N
0.343	8.71	S-901	.66	16.7	.261	6.6	21	3.7	.33	8.3	7.0	31	.33	8.3	0.041	1.0	8.00	SST	CG	N
0.343	8.71	S-898	.66	16.7	.245	6.2	58	10	.21	5.3	12	54	.34	8.7	0.049	1.2	7.00	SST	CG	N
0.343	8.71	S-478	.66	16.7	.241	6.1	66	12	.19	4.9	13	56	.37	9.4	0.051	1.3	7.25	SST	CG	N
0.343	8.71	B2-64	.66	16.7	.221	5.6	197	35	.16	4.0	31	139	.40	10.1	0.061	1.5	6.50	MW	CG	Z
0.343	8.71	B-68	.69	17.4	.291	7.4	3.7	.64	.48	12	1.8	7.8	.21	5.3	0.026	0.7	7.00	SST	C	N
0.343	8.71	RR-64	.69	17.4	.271	6.9	14	2.4	.37	9.5	5.2	23	.29	7.3	0.036	0.9	8.00	SPR	CG	Z
0.343	8.71	4114	.69	17.4	.263	6.7	38	6.6	.19	4.8	7.1	32	.26	6.6	0.040	1.0	5.50	SPR	C	Z
0.343	8.71	K-89	.69	17.4	.261	6.6	23	4.1	.31	7.8	7.2	32	.31	7.8	0.041	1.0	7.50	SST	CG	N
0.343	8.71	B9-46	.69	17.4	.261	6.6	37	6.5	.21	5.3	7.6	34	.25	6.2	0.041	1.0	6.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.343	8.71	YY-59	.69	17.4	.241	6.1	130	23	.10	2.6	13	60	.26	6.5	0.051	1.3	5.00	SPR	CG	Z
0.343	8.71	B-86	.72	18.2	.299	7.6	2.2	.39	.56	14	1.2	5.5	.15	3.9	0.022	0.6	6.00	SST	C	N
0.343	8.71	10106	.72	18.3	.263	6.7	33	5.8	.21	5.5	7.1	32	.28	7.1	0.040	1.0	6.00	SPR	C	N
0.343	8.71	S-1094	.75	19.1	.317	8.1	.14	.02	.62	16	.09	.39	.13	3.3	0.013	0.3	9.00	SST	C	N
0.343	8.71	S-1002	.75	19.1	.303	7.7	1.5	.26	.61	15	.91	4.0	.14	3.6	0.020	0.5	6.00	SST	C	N
0.343	8.71	1527	.75	19.1	.297	7.5	2.7	.48	.58	15	1.6	7.0	.17	4.4	0.023	0.6	6.50	MW	C	Z
0.343	8.71	S-309	.75	19.1	.293	7.4	3.6	.63	.48	12	1.7	7.7	.18	4.6	0.025	0.6	6.25	SST	C	N
0.343	8.71	PP-58	.75	19.1	.287	7.3	6.1	1.1	.39	10	2.4	11	.17	4.3	0.028	0.7	6.00	SST	CG	N
0.343	8.71	H-79	.75	19.1	.283	7.2	8.3	1.4	.36	9.1	3.0	13	.18	4.6	0.030	0.8	6.00	SST	C	N
0.343	8.71	GG-98	.75	19.1	.275	7.0	9.4	1.7	.44	11	4.2	19	.31	7.8	0.034	0.9	8.00	SST	C	N
0.343	8.71	A10-47	.75	19.1	.269	6.8	17	2.9	.34	8.7	5.7	25	.28	7.2	0.037	0.9	7.75	SPR	CG	N
0.343	8.71	10804	.75	19.1	.267	6.8	18	3.1	.35	8.8	6.1	27	.30	7.7	0.038	1.0	8.00	SPR	CG	BO
0.343	8.71	S-1180	.75	19.1	.267	6.8	15	2.7	.37	9.5	5.7	25	.34	8.7	0.038	1.0	8.00	SST	C	N
0.343	8.71	I-20	.75	19.1	.257	6.5	29	5.0	.29	7.3	8.2	37	.32	8.2	0.043	1.1	7.50	SST	CG	N
0.343	8.71	GG-70	.75	19.1	.243	6.2	79	14	.15	3.8	12	53	.30	7.6	0.050	1.3	6.00	SST	CG	N
0.343	8.71	CC-100	.75	19.1	.239	6.1	62	11	.22	5.5	13	60	.42	10.6	0.052	1.3	8.00	SST	CG	N
0.343	8.71	Z-57	.75	19.1	.229	5.8	100	17	.19	4.7	19	83	.48	12.3	0.057	1.4	8.50	SPR	CG	Z
0.343	8.71	B-100	.75	19.1	.227	5.8	108	19	.18	4.6	20	87	.49	12.5	0.058	1.5	8.50	SPR	CG	N
0.343	8.71	B14-35	.75	19.1	.223	5.7	117	21	.18	4.7	22	96	.54	13.7	0.060	1.5	9.00	SPR	CG	N
0.343	8.71	FF-69	.75	19.1	.223	5.7	113	20	.19	4.8	22	96	.56	14.1	0.060	1.5	9.25	SPR	CG	Z
0.343	8.71	S-3127	.75	19.1	.219	5.6	145	25	.15	3.9	22	99	.48	12.2	0.062	1.6	7.75	SST	CG	N
0.343	8.71	OO-36	.78	19.8	.303	7.7	1.5	.27	.63	16	.96	4.3	.15	3.8	0.020	0.5	6.50	MW	C	N
0.343	8.71	10817	.78	19.8	.275	7.0	14	2.5	.44	11	6.4	29	.22	5.6	0.034	0.9	6.50	MW	CG	Z
0.343	8.71	I-90	.78	19.8	.255	6.5	33	5.7	.27	6.9	8.8	39	.33	8.4	0.044	1.1	7.50	SST	CG	N
0.343	8.71	12641	.78	19.8	.241	6.1	49	8.5	.26	6.6	13	56	.46	11.7	0.051	1.3	9.00	SST	CG	N
0.343	8.71	A-92	.81	20.6	.311	7.9	.60	.10	.69	18	.41	1.8	.12	3.0	0.016	0.4	6.50	MW	C	N
0.343	8.71	KK-84	.81	20.6	.287	7.3	2.9	.51	.49	12	1.4	6.3	.32	8.2	0.028	0.7	10.5	SST	C	N
0.343	8.71	M-120	.81	20.6	.277	7.0	17	2.9	.24	6.0	3.9	17	.20	5.0	0.033	0.8	5.00	SST	C	N
0.343	8.71	WW-49	.81	20.6	.277	7.0	17	2.9	.24	6.0	3.9	17	.20	5.0	0.033	0.8	5.00	SST	C	N
0.343	8.71	XX-22	.81	20.6	.277	7.0	7.6	1.3	.47	12	3.6	16	.35	8.8	0.033	0.8	9.50	SPR	C	GI
0.343	8.71	S-1232	.81	20.6	.273	6.9	12	2.0	.39	9.8	4.5	20	.26	6.7	0.035	0.9	7.50	SST	CG	N
0.343	8.71	3020	.81	20.6	.235	6.0	84	15	.19	4.8	16	71	.49	12.3	0.054	1.4	8.00	HD	C	Z
0.343	8.71	A-6	.81	20.6	.223	5.7	137	24	.16	4.0	22	96	.48	12.2	0.060	1.5	8.00	HD	CG	Z
0.343	8.71	B5-17	.84	21.4	.279	7.1	13	2.2	.31	7.8	3.9	17	.22	5.7	0.032	0.8	6.00	SPR	C	N
0.343	8.71	A10-66	.84	21.4	.219	5.6	160	28	.15	3.8	24	105	.50	12.6	0.062	1.6	8.00	SPR	CG	Z
0.343	8.71	OO-59	.88	22.2	.311	7.9	.29	.05	.70	18	.20	.91	.18	4.5	0.016	0.4	10.0	SST	C	N
0.343	8.71	S-3105	.88	22.2	.303	7.7	.79	.14	.67	17	.53	2.3	.21	5.3	0.020	0.5	9.50	SST	C	N
0.343	8.71	II-76	.88	22.2	.303	7.7	.34	.06	.42	11	.14	.63	.46	11.7	0.020	0.5	22.0	MW	C	N
0.343	8.71	HH-25	.88	22.2	.293	7.4	3.9	.68	.67	17	2.6	11	.19	4.8	0.025	0.6	6.50	MW	C	N
0.343	8.71	S-3081	.88	22.2	.293	7.4	3.8	.66	.46	12	1.7	7.7	.18	4.4	0.025	0.6	6.00	SST	C	N
0.343	8.71	BB-72	.88	22.2	.293	7.4	2.4	.43	.67	17	1.6	7.2	.21	5.2	0.025	0.6	8.25	SST	CG	N
0.343	8.71	L-77	.88	22.2	.285	7.2	4.4	.77	.60	15	2.6	12	.28	7.0	0.029	0.7	9.50	MW	CG	GI
0.343	8.71	Z-1	.88	22.2	.283	7.2	6.0	1.1	.49	13	3.0	13	.26	6.5	0.030	0.8	7.50	SST	C	N
0.343	8.71	A15-39	.88	22.2	.281	7.1	7.8	1.4	.42	11	3.3	15	.22	5.5	0.031	0.8	7.00	SST	CG	N
0.343	8.71	Q-62	.88	22.2	.273	6.9	7.6	1.3	.51	13	3.8	17	.37	9.3	0.035	0.9	10.5	SST	CG	N
0.343	8.71	11398	.88	22.2	.269	6.8	12	2.1	.44	11	5.3	24	.37	9.4	0.037	0.9	9.00	SST	C	N
0.343	8.71	B6-23	.88	22.2	.269	6.8	16	2.9	.34	8.7	5.7	25	.28	7.2	0.037	0.9	7.70	SPR	CG	N
0.343	8.71	O-78	.88	22.2	.269	6.8	16	2.7	.36	9.2	5.7	25	.33	8.5	0.037	0.9	8.00	SPR	C	GI
0.343	8.71	10064	.88	22.2	.261	6.6	20	3.4	.39	9.9	7.6	34	.39	9.9	0.041	1.0	9.50	SPR	CG	Z
0.343	8.71	3520	.88	22.2	.243	6.2	65	11	.27	6.9	18	79	.38	9.5	0.050	1.3	7.50	MW	CG	Z
0.343	8.71	MM-95	.88	22.2	.203	5.2	242	42	.13	3.3	32	141	.63	16.0	0.070	1.8	9.00	SPR	CG	N
0.343	8.71	MM-86	.88	22.2	.199	5.1	307	54	.10	2.7	32	143	.54	13.7	0.072	1.8	7.50	SST	CG	N
0.343	8.71	B12-25	.88	22.2	.191	4.9	315	55	.12	2.9	36	161	.76	19.3	0.076	1.9	10.0	SPR	CG	N
0.343	8.71	H-82	.91	23.0	.261	6.6	11	1.8	.21	5.3	2.2	9.8	.70	17.7	0.041	1.0	16.0	SPR	C	Z
0.343	8.71	2604	.91	23.0	.249	6.3	39	6.8	.41	10	16	70	.42	10.7	0.047	1.2	9.00	MW	CG	Z
0.343	8.71	O-145	.91	23.0	.245	6.2	59	10	.22	5.5	13	57	.37	9.3	0.049	1.2	7.50	SPR	CG	N
0.343	8.71	Z-4	.94	23.8	.293	7.4	2.5	.44	.69	17	1.7	7.6	.25	6.4	0.025	0.6	9.00	MW	C	N
0.343	8.71	U-37	.94	23.8	.273	6.9	11	1.9	.42	11	4.5	20	.28	7.1	0.035	0.9	8.00	SST	CG	N
0.343	8.71	JJ-86	.94	23.8	.259	6.6	21	3.6	.40	10	8.2	36	.46	11.7	0.042	1.1	10.0	SPR	C	Z
0.343	8.71	L-69	.94	23.8	.247	6.3	42	7.4	.28	7.2	12	54	.48	12.2	0.048	1.2	9.00	SPR	C	Z
0.343	8.71	PP-29	.94	23.8	.203	5.2	201	35	.15	3.8	30	132	.67	16.9	0.070	1.8	9.50	SST	CG	N
0.343	8.71	PP-28	.97	24.6	.263	6.7	20	3.6	.35	8.9	7.1	32	.34	8.6	0.040	1.0	8.50	SPR	CG	Z
0.343	8.71	L-13	.97	24.6	.249	6.3	34	5.9	.34	8.6	11	51	.52	13.1	0.047	1.2	10.0	SPR	C	Z
0.343	8.71	3658	1.00	25.4	.305	7.7	.79	.14	.81	21	.64	2.8	.19	4.8	0.019	0.5	9.00	MW	C	GI
0.343	8.71	11469	1.00	25.4	.303	7.7	1.4	.24	.84	21	1.1	5.1	.16	4.1	0.020	0.5	7.00	MW	C	N
0.343	8.71	11277	1.00	25.4	.285	7.2	3.8	.66	.66	17	2.5	11	.34	8.7	0.029	0.7	10.8	MW	C	N
0.343	8.71	B4-13	1.00	25.4	.283	7.2	5.4	.95	.73	19	4.0	18	.27	6.9	0.030	0.8	9.00	MW	CG	N
0.343	8.71	B-94	1.00	25.4	.279	7.1	7.7	1.4	.50	13	3.9	17	.27	6.9	0.032	0.8	8.50	HD	CG	Z
0.343	8.71	3639	1.00	25.4	.267	6.8	15	2.6	.56	14	8.5	38	.38	9.7	0.038	1.0	9.00	MW	C	Z
0.343	8.71	S-1163	1.00	25.4	.267	6.8	9.7	1.7	.53	13	5.1	23	.48	12.1	0.038	1.0	11.5	SST	C	N
0.343	8.71	1	1.00	25.4	.261	5.5	17.9	3.1	.58	11	7.6	39	.46	11.7	0.041	1.0	10.3	HD	C	Z
0.343	8.71	S-313	1.00	25.4	.261	6.6	13	2.2	.47	12	6.0	27	.53	13.5	0.041	1.0	12.0	SST	C	N
0.343	8.71	10375	1.00	25.4	.255	6.5	22	3.9	.42	11	9.4	42	.53	13.4	0.044	1.1	11.0	SPR	C	Z
0.343	8.71	B-14	1.00	25.4	.253	6.4	26	4.5	.36	9.2	9.4	42	.43	10.9	0.045	1.1	9.50	SST	CG	N
0.343	8.71	K-22	1.00	25.4	.247	6.3	37	6.5	.33	8.3	12	54	.48	12.2	0.048	1.2	10.0	SPR	CG	N
0.343	8.71	2786	1.00	25.4	.241	6.1	39	6.8	.34	8.8	13	60	.61	15.5	0.051	1.3	12.0	SPR	CG	Z
0.343	8.71	K-14	1.00	25.4	.231	5.9	66	12	.27	6.7	18	78	.62	15.6	0.056	1.4	11.0	SPR	CG	GI
0.343	8.71	S-268	1.00	25.4	.225	5.7	94	17	.20	5.2	19	86	.53	13.5	0.059	1.5	9.00	SST	CG	N
0.343	8.71	S-3097	1.00	25.4	.173	4.4	543	95	.09	2.4	51	225	.77	19.4	0.085	2.2	9.00	SST	CG	N
0.343	8.71	Q-5	1.03	26.2	.295	7.5	1.5	.26	.74	19	1.1	4.9	.29	7.3	0.024	0.6	12.0	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.343	8.71	PP-25	1.03	26.2	.283	7.2	4.2	.74	.67	17	2.8	13	.36	9.1	0.030	0.8	11.0	MW	C	Z
0.343	8.71	S-1056	1.06	27.0	.291	7.4	2.2	.39	.78	20	1.7	7.7	.29	7.3	0.026	0.7	10.0	SST	C	N
0.343	8.71	S-1456	1.06	27.0	.281	7.1	4.2	.74	.72	18	3.0	14	.34	8.7	0.031	0.8	11.0	SST	CG	N
0.343	8.71	A14-6	1.06	27.0	.277	7.0	6.8	1.2	.58	15	3.9	17	.31	8.0	0.033	0.8	9.50	SST	CG	N
0.343	8.71	S-1695	1.06	27.0	.273	6.9	11	1.9	.42	11	4.5	20	.32	8.0	0.035	0.9	8.00	SST	C	N
0.343	8.71	S-1347	1.06	27.0	.269	6.8	8.6	1.5	.62	16	5.3	24	.43	10.8	0.037	0.9	11.5	SST	CG	N
0.343	8.71	L-53	1.06	27.0	.263	6.7	19	3.3	.38	9.6	7.1	32	.36	9.1	0.040	1.0	9.00	SPR	CG	Z
0.343	8.71	4202	1.06	27.0	.253	6.4	25	4.3	.41	10	10	45	.54	13.7	0.045	1.1	11.0	SPR	C	Z
0.343	8.71	I-21	1.06	27.0	.253	6.4	17	2.9	.40	10	6.7	30	.66	16.9	0.045	1.1	13.8	SST	C	N
0.343	8.71	CC-85	1.06	27.0	.235	6.0	72	13	.22	5.6	16	71	.49	12.3	0.054	1.4	9.00	SPR	CG	Z
0.343	8.71	00-70	1.13	28.6	.283	7.2	4.2	.74	.71	18	3.0	13	.30	7.6	0.030	0.8	10.0	SST	CG	N
0.343	8.71	M-76	1.13	28.6	.273	6.9	9.2	1.6	.52	13	4.8	21	.35	8.9	0.035	0.9	10.0	SPR	CG	N
0.343	8.71	S-1057	1.13	28.6	.267	6.8	10	1.8	.56	14	5.7	25	.42	10.6	0.038	1.0	11.0	SST	CG	N
0.343	8.71	10387	1.19	30.2	.299	7.6	1.3	.22	.97	25	1.2	5.5	.22	5.6	0.022	0.6	10.0	MW	CG	Z
0.343	8.71	10273	1.19	30.2	.219	5.6	128	22	.19	4.7	24	105	.59	15.0	0.062	1.6	9.50	SPR	CG	Z
0.343	8.71	W-11	1.22	31.0	.273	6.9	7.1	1.2	.63	16	4.5	20	.39	9.8	0.035	0.9	11.0	SST	CG	N
0.343	8.71	S-1223	1.25	31.8	.279	7.1	4.4	.76	.82	21	3.6	16	.42	10.6	0.032	0.8	12.0	SST	C	N
0.343	8.71	12499	1.25	31.8	.275	7.0	8.7	1.5	.49	13	4.3	19	.32	8.2	0.034	0.9	8.50	SST	C	N
0.343	8.71	11256	1.25	31.8	.273	6.9	11	2.0	.59	15	6.6	30	.33	8.4	0.035	0.9	8.50	MW	C	Z
0.343	8.71	CC-7	1.25	31.8	.259	6.6	15	2.6	.55	14	8.2	36	.55	13.9	0.042	1.1	13.0	SPR	CG	GI
0.343	8.71	11257	1.25	31.8	.259	6.6	18	3.2	.42	11	7.7	34	.46	11.7	0.042	1.1	10.0	SST	C	N
0.343	8.71	B2-40	1.25	31.8	.255	6.5	23	4.0	.39	9.9	8.8	39	.47	12.0	0.044	1.1	9.75	SST	C	N
0.343	8.71	3842	1.25	31.8	.159	4.0	724	127	.09	2.2	64	285	1.01	25.7	0.092	2.3	11.0	SPR	CG	GI
0.343	8.71	3505	1.28	32.5	.273	6.9	7.4	1.3	.83	21	6.1	27	.46	11.6	0.035	0.9	12.0	MW	C	Z
0.343	8.71	B9-23	1.31	33.3	.257	6.5	16	2.8	.55	14	8.8	39	.62	15.8	0.043	1.1	13.5	SPR	C	N
0.343	8.71	L-44	1.38	34.9	.295	7.5	1.6	.28	1.0	26	1.6	7.2	.26	6.7	0.024	0.6	10.0	SST	C	N
0.343	8.71	3884	1.38	34.9	.289	7.3	2.2	.39	1.0	25	2.2	9.8	.38	9.6	0.027	0.7	13.0	MW	C	Z
0.343	8.71	3457	1.38	34.9	.279	7.1	7.7	1.4	.70	18	5.4	24	.30	7.7	0.032	0.8	8.50	MW	C	Z
0.343	8.71	L-32	1.44	36.5	.293	7.4	1.4	.24	1.0	27	1.4	6.4	.39	9.9	0.025	0.6	14.6	MW	C	Z
0.343	8.71	2594	1.44	36.5	.249	6.3	27	4.7	.42	11	11	51	.56	14.3	0.047	1.2	12.0	HD	CG	Z
0.343	8.71	10519	1.47	37.3	.259	6.6	14	2.4	.59	15	8.2	36	.62	15.7	0.042	1.1	13.8	SPR	C	Z
0.343	8.71	S-3101	1.50	38.1	.293	7.4	1.4	.25	1.2	29	1.6	7.3	.34	8.7	0.025	0.6	12.8	SST	C	N
0.343	8.71	1951	1.50	38.1	.283	7.2	3.5	.60	1.1	27	3.7	17	.42	10.7	0.030	0.8	13.0	MW	C	Z
0.343	8.71	12630	1.50	38.1	.283	7.2	3.8	.66	1.1	28	4.2	19	.39	9.9	0.030	0.8	12.0	MW	C	Z
0.343	8.71	3890	1.50	38.1	.273	6.9	7.0	1.2	.68	17	4.8	21	.47	12.0	0.035	0.9	12.5	SPR	C	Z
0.343	8.71	UU-47	1.50	38.1	.269	6.8	6.3	1.1	.83	21	5.2	23	.67	16.9	0.037	0.9	17.0	SPR	C	Z
0.343	8.71	5	1.50	38.1	.249	6.3	23	3.9	.50	13	11	51	.71	17.9	0.047	1.2	14.0	HD	C	Z
0.343	8.71	S-879	1.50	38.1	.249	6.3	19	3.3	.57	15	11	47	.69	17.5	0.047	1.2	14.8	SST	CG	N
0.343	8.71	11453	1.50	38.1	.219	5.6	113	20	.21	5.3	24	105	.65	16.5	0.062	1.6	10.5	HD	CG	Z
0.343	8.71	B2-53	1.50	38.1	.213	5.4	96	17	.28	7.2	27	120	.94	24.0	0.065	1.7	14.5	SPR	CG	N
0.343	8.71	12405	1.53	38.9	.311	7.9	.35	.06	1.4	35	.47	2.1	.17	4.4	0.016	0.4	9.75	MW	C	Z
0.343	8.71	11546	1.53	38.9	.257	6.5	17	3.0	.51	13	8.8	39	.58	14.7	0.043	1.1	12.5	SPR	CG	Z
0.343	8.71	10188	1.56	39.7	.303	7.7	.49	.09	1.2	31	.60	2.7	.34	8.6	0.020	0.5	16.0	MW	C	Z
0.343	8.71	QQ-36	1.56	39.7	.271	6.9	5.6	.97	.91	23	5.1	23	.65	16.5	0.036	0.9	17.0	SPR	C	Z
0.343	8.71	S-1099	1.56	39.7	.247	6.3	18	3.1	.64	16	11	50	.79	20.1	0.048	1.2	16.5	SST	CG	N
0.343	8.71	A15-36	1.56	39.7	.241	6.1	23	4.0	.55	14	13	56	.87	22.0	0.051	1.3	17.0	SST	CG	N
0.343	8.71	S-210	1.59	40.5	.287	7.3	1.6	.27	1.1	27	1.7	7.4	.53	13.5	0.028	0.7	18.0	SST	C	N
0.343	8.71	S-452	1.63	41.3	.303	7.7	.20	.04	.98	25	.20	.87	.65	16.5	0.020	0.5	31.5	SST	C	N
0.343	8.71	S-15	1.63	41.3	.273	6.9	6.4	1.1	.70	18	4.5	20	.46	11.6	0.035	0.9	12.0	SST	C	N
0.343	8.71	HH-58	1.63	41.3	.263	6.7	9.4	1.7	.75	19	7.1	32	.64	16.3	0.040	1.0	16.0	SPR	CG	N
0.343	8.71	KK-73	1.63	41.3	.243	6.2	27	4.7	.47	12	13	57	.76	19.4	0.050	1.3	15.3	SPR	CG	Z
0.343	8.71	S-1384	1.75	44.5	.303	7.7	.46	.08	1.4	36	.65	2.9	.32	8.1	0.020	0.5	15.0	SST	C	N
0.343	8.71	S-1492	1.81	46.0	.247	6.3	14	2.5	.79	20	11	50	.96	24.4	0.048	1.2	20.0	SST	CG	N
0.343	8.71	2933	1.81	46.0	.227	5.8	40	7.0	.49	12	20	87	1.13	28.7	0.058	1.5	19.5	SPR	CG	Z
0.343	8.71	2683	1.91	48.4	.227	5.8	50	8.8	.39	9.9	20	87	.93	23.6	0.058	1.5	16.0	SPR	CG	Z
0.343	8.71	11199	2.00	50.8	.293	7.4	.70	.12	1.3	33	.91	4.0	.70	17.8	0.025	0.6	27.0	MW	C	Z
0.343	8.71	1819	2.00	50.8	.279	7.1	3.1	.55	1.4	35	4.4	19	.61	15.4	0.032	0.8	18.0	MW	C	Z
0.343	8.71	B14-27	2.00	50.8	.275	7.0	4.3	.76	1.1	27	4.6	21	.61	15.5	0.034	0.9	17.0	SPR	C	Z
0.343	8.71	M-10	2.00	50.8	.271	6.9	4.4	.77	1.2	30	5.2	23	.79	20.1	0.036	0.9	21.0	SPR	C	N
0.343	8.71	A-76	2.00	50.8	.263	6.7	7.8	1.4	.91	23	7.1	32	.76	19.3	0.040	1.0	19.0	SPR	CG	Z
0.343	8.71	CC-71	2.00	50.8	.263	6.7	9.4	1.7	.75	19	7.1	32	.68	17.3	0.040	1.0	16.0	SPR	C	N
0.343	8.71	3442	2.00	50.8	.209	5.3	73	13	.41	10	29	131	1.41	35.7	0.067	1.7	21.0	SPR	CG	Z
0.343	8.71	11466	2.13	54.0	.293	7.4	.69	.12	1.5	38	1.0	4.6	.64	16.2	0.025	0.6	24.5	SST	C	N
0.343	8.71	VV-30	2.13	54.0	.249	6.3	15	2.6	.76	19	11	51	.94	23.9	0.047	1.2	20.0	HD	CG	N
0.343	8.71	10437	2.16	54.8	.293	7.4	.78	.14	1.5	39	1.2	5.2	.64	16.2	0.025	0.6	24.5	MW	C	Z
0.343	8.71	11722	2.16	54.8	.289	7.3	2.2	.39	1.5	37	3.2	14	.38	9.6	0.027	0.7	13.0	MW	C	Z
0.343	8.71	Q-38	2.25	57.2	.291	7.4	.87	.15	1.6	39	1.3	6.0	.70	17.7	0.026	0.7	25.8	MW	C	N
0.343	8.71	S-225	2.28	57.9	.191	4.9	128	22	.29	7.4	37	166	1.48	37.6	0.076	1.9	19.5	SST	CG	N
0.343	8.71	3691	2.34	59.5	.289	7.3	1.6	.28	1.9	47	3.0	13	.49	12.3	0.027	0.7	17.0	MW	C	Z
0.343	8.71	10868	2.44	61.9	.243	6.2	22	3.9	.57	14	13	57	.95	24.1	0.050	1.3	18.0	SPR	C	BO
0.343	8.71	B15-49	2.50	63.5	.297	7.5	.61	.11	2.0	50	1.2	5.4	.53	13.4	0.023	0.6	22.0	MW	C	N
0.343	8.71	J-29	2.50	63.5	.257	6.5	8.3	1.4	1.1	27	8.8	39	1.03	26.2	0.043	1.1	24.0	SPR	CG	Z
0.343	8.71	LL-29	2.53	64.3	.263	6.7	5.5	.97	1.3	33	7.1	32	1.04	26.4	0.040	1.0	26.0	SPR	CG	N
0.343	8.71	3896	2.63	66.7	.239	6.1	18	3.2	.79	20	14	63	1.38	35.0	0.052	1.3	25.5	SPR	C	Z
0.343	8.71	11880	3.00	76.2	.291	7.4	.76	.13	2.3	58	1.8	7.8	.70	17.8	0.026	0.7	26.0	SST	C	N
0.343	8.71	QQ-52	3.00	76.2	.253	6.4	6.9	1.2	1.4	34	9.4	42	1.40	35.4	0.045	1.1	30.0	SST	C	N
0.343	8.71	10105	3.13	79.4	.289	7.3	.73	.13	2.2	55	1.6	7.0	.97	24.7	0.027	0.7	35.0	MW	C	Z
0.343	8.71	1723	3.13	79.4	.279	7.1	2.3	.40	1.7	43	3.9	17	.80	20.3	0.032	0.8	24.0	SPR	C	N
0.343	8.71	S-434	4.13	104.8	.253	6.4	6.8	1.2	1.4	35	9.4	42	1.41	35.9	0.045	1.1	30.3	SST	C	N
0.343	8.71	4113	4.75	120.7	.281	7.1	1.6	.27	3.1	79	4.9	22	.96	24.4	0.031	0.8	30.0	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.343	8.71	B8-55	4.88	123.8	.247	6.3	8.4	1.5	1.4	37	12	54	1.85	46.9	0.048	1.2	37.5	SPR	C	Z
0.343	8.71	10546	5.25	133.4	.243	6.2	8.5	1.5	1.5	38	13	57	2.25	57.2	0.050	1.3	44.0	SPR	C	Z
0.343	8.71	1912	5.75	146.1	.263	6.7	2.5	.44	2.8	72	7.1	32	2.23	56.6	0.040	1.0	54.8	SPR	C	GI
0.350	8.89	B4-63	.62	15.8	.286	7.3	4.3	.75	.21	5.2	.88	3.9	.42	10.6	0.032	0.8	13.0	MW	CG	BO
0.350	8.89	12705	1.30	32.9	.260	6.6	24	4.2	.38	9.7	9.2	41	.47	12.0	0.045	1.1	9.50	SST	C	N
0.350	8.89	12752	1.87	47.5	.308	7.8	.49	.09	1.5	37	.72	3.2	.40	10.1	0.021	0.5	18.0	MW	C	N
0.360	9.14	MM-63	.25	6.4	.340	8.6	.07	.01	.18	4.6	.01	.06	.07	1.8	0.010	0.3	6.00	SST	C	N
0.360	9.14	2899	.25	6.4	.330	8.4	.60	.10	.16	4.1	.10	.42	.09	2.3	0.015	0.4	5.00	MW	C	Z
0.360	9.14	I-27	.25	6.4	.296	7.5	43	7.5	.09	2.2	3.7	16	.13	3.3	0.032	0.8	3.00	HD	C	N
0.360	9.14	L-66	.25	6.4	.284	7.2	91	16	.06	1.6	5.8	26	.11	2.9	0.038	1.0	3.00	SPR	CG	Z
0.360	9.14	I-53	.25	6.4	.280	7.1	99	17	.06	1.6	6.4	28	.16	4.1	0.040	1.0	3.00	SST	C	N
0.360	9.14	AA-93	.25	6.4	.266	6.8	201	35	.05	1.3	10	45	.14	3.6	0.047	1.2	3.00	SST	CG	N
0.360	9.14	PP-39	.34	8.7	.320	8.1	1.3	.23	.22	5.7	.29	1.3	.12	3.0	0.020	0.5	6.00	SST	CG	N
0.360	9.14	HH-45	.34	8.7	.300	7.6	13	2.3	.21	5.3	2.7	12	.14	3.4	0.030	0.8	4.50	MW	CG	Z
0.360	9.14	B1-1	.38	9.5	.314	8.0	3.5	.62	.24	6.0	.84	3.7	.14	3.5	0.023	0.6	5.00	MW	C	Z
0.360	9.14	10849	.38	9.5	.296	7.5	25	4.3	.21	5.3	5.1	23	.12	3.0	0.032	0.8	3.75	MW	CG	Z
0.360	9.14	G-54	.38	9.5	.292	7.4	28	4.9	.16	4.0	4.4	20	.17	4.3	0.034	0.9	4.00	SPR	C	N
0.360	9.14	M-142	.38	9.5	.286	7.3	40	7.1	.13	3.4	5.4	24	.19	4.7	0.037	0.9	4.00	SPR	C	N
0.360	9.14	2502	.38	9.5	.256	6.5	182	32	.10	2.6	19	84	.21	5.3	0.052	1.3	4.00	MW	CG	Z
0.360	9.14	71064	.38	9.7	.296	7.5	25	4.4	.20	5.2	5.1	23	.12	3.0	0.032	0.8	3.75	MW	CG	N
0.360	9.14	71064S	.38	9.7	.296	7.5	21	3.7	.16	4.1	3.4	15	.12	3.0	0.032	0.8	3.75	SST	CG	N
0.360	9.14	NN-35	.41	10.3	.300	7.6	7.1	1.2	.23	5.7	1.6	7.1	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.360	9.14	TT-33	.41	10.3	.288	7.3	19	3.3	.16	4.1	3.1	14	.24	6.2	0.036	0.9	5.75	SPR	C	Z
0.360	9.14	J-14	.41	10.3	.278	7.1	32	5.5	.12	3.0	3.8	17	.29	7.3	0.041	1.0	6.00	SPR	C	Z
0.360	9.14	LL-67	.41	10.3	.270	6.9	84	15	.11	2.7	9.0	40	.18	4.6	0.045	1.1	4.00	SST	CG	N
0.360	9.14	G-51	.41	10.3	.250	6.4	187	33	.09	2.2	16	71	.25	6.3	0.055	1.4	4.50	SPR	CG	Z
0.360	9.14	K-87	.41	10.3	.222	5.6	594	104	.05	1.3	31	137	.29	7.4	0.069	1.8	4.25	SPR	CG	Z
0.360	9.14	10956	.44	11.1	.314	8.0	4.7	.83	.32	8.1	1.5	6.6	.12	3.1	0.023	0.6	4.25	MW	C	N
0.360	9.14	II-83	.44	11.1	.298	7.6	5.5	.95	.16	4.0	.87	3.9	.28	7.1	0.031	0.8	8.00	SST	C	N
0.360	9.14	G-45	.44	11.1	.282	7.2	41	7.1	.16	3.9	6.3	28	.21	5.4	0.039	1.0	4.50	SPR	C	Z
0.360	9.14	I-15	.44	11.1	.280	7.1	45	7.9	.15	3.8	6.8	30	.18	4.6	0.040	1.0	4.50	SPR	CG	Z
0.360	9.14	FF-41	.44	11.1	.276	7.0	47	8.2	.17	4.3	7.8	35	.21	5.3	0.042	1.1	5.00	SPR	CG	Z
0.360	9.14	S-1505	.44	11.1	.266	6.8	67	12	.15	3.9	10	45	.24	6.0	0.047	1.2	5.00	SST	CG	N
0.360	9.14	S-1100	.44	11.1	.262	6.7	60	11	.14	3.7	8.7	39	.29	7.5	0.049	1.2	6.00	SST	CG	N
0.360	9.14	AA-95	.44	11.1	.262	6.7	93	16	.13	3.4	12	55	.25	6.2	0.049	1.2	5.00	SPR	CG	N
0.360	9.14	JJ-56	.44	11.1	.250	6.4	187	33	.09	2.2	16	71	.30	7.7	0.055	1.4	4.50	SPR	C	N
0.360	9.14	71027	.44	11.2	.308	7.8	10	1.8	.27	6.9	2.8	12	.10	2.5	0.026	0.7	3.75	MW	CG	N
0.360	9.14	71027S	.44	11.2	.308	7.8	8.7	1.5	.21	5.4	1.9	8.3	.10	2.5	0.026	0.7	3.75	SST	CG	N
0.360	9.14	71046	.44	11.2	.302	7.7	15	2.6	.26	6.7	3.8	17	.11	2.9	0.029	0.7	3.88	MW	CG	N
0.360	9.14	71046S	.44	11.2	.302	7.7	12	2.2	.21	5.2	2.6	11	.11	2.9	0.029	0.7	3.88	SST	CG	N
0.360	9.14	71065	.44	11.2	.296	7.5	21	3.6	.25	6.3	5.1	23	.13	3.3	0.032	0.8	4.00	MW	CG	N
0.360	9.14	71065S	.44	11.2	.296	7.5	18	3.1	.19	4.9	3.4	15	.13	3.3	0.032	0.8	4.00	SST	CG	N
0.360	9.14	71083	.44	11.2	.290	7.4	28	4.9	.23	5.7	6.3	28	.15	3.8	0.035	0.9	4.25	MW	CG	N
0.360	9.14	71083S	.44	11.2	.290	7.4	24	4.2	.18	4.6	4.3	19	.15	3.8	0.035	0.9	4.25	SST	CG	N
0.360	9.14	71101	.44	11.2	.284	7.2	38	6.6	.21	5.4	8.1	36	.17	4.2	0.038	1.0	4.38	MW	CG	N
0.360	9.14	71101S	.44	11.2	.284	7.2	32	5.6	.17	4.3	5.5	24	.17	4.2	0.038	1.0	4.38	SST	CG	N
0.360	9.14	71119	.44	11.2	.280	7.1	45	7.9	.21	5.3	9.4	42	.18	4.6	0.040	1.0	4.50	MW	CG	N
0.360	9.14	71119S	.44	11.2	.280	7.1	38	6.7	.17	4.2	6.4	28	.18	4.6	0.040	1.0	4.50	SST	CG	N
0.360	9.14	71137	.44	11.2	.276	7.0	57	10	.19	4.8	11	48	.19	4.8	0.042	1.1	4.50	MW	CG	N
0.360	9.14	71137S	.44	11.2	.276	7.0	48	8.5	.15	3.8	7.3	33	.19	4.8	0.042	1.1	4.50	SST	CG	N
0.360	9.14	71155	.44	11.2	.270	6.9	77	13	.17	4.4	13	59	.20	5.1	0.045	1.1	4.50	MW	CG	N
0.360	9.14	71155S	.44	11.2	.270	6.9	65	11	.14	3.5	9.0	40	.20	5.1	0.045	1.1	4.50	SST	CG	N
0.360	9.14	71174	.44	11.2	.266	6.8	93	16	.16	4.1	15	67	.21	5.4	0.047	1.2	4.50	MW	CG	N
0.360	9.14	71174S	.44	11.2	.266	6.8	79	14	.13	3.3	10	45	.21	5.4	0.047	1.2	4.50	SST	CG	N
0.360	9.14	71196	.44	11.2	.262	6.7	109	19	.16	4.0	17	76	.22	5.6	0.049	1.2	4.50	MW	CG	N
0.360	9.14	71196S	.44	11.2	.262	6.7	93	16	.12	3.2	12	51	.22	5.6	0.049	1.2	4.50	SST	CG	N
0.360	9.14	71218	.44	11.2	.258	6.6	127	22	.14	3.6	18	80	.24	6.0	0.051	1.3	4.63	MW	CG	N
0.360	9.14	71218S	.44	11.2	.258	6.6	108	19	.11	2.9	12	54	.24	6.0	0.051	1.3	4.63	SST	CG	N
0.360	9.14	71240	.44	11.2	.250	6.4	175	31	.13	3.2	22	99	.25	6.5	0.055	1.4	4.63	MW	CG	N
0.360	9.14	71240S	.44	11.2	.250	6.4	149	26	.10	2.6	15	67	.25	6.5	0.055	1.4	4.63	SST	CG	N
0.360	9.14	71262	.44	11.2	.242	6.1	238	42	.11	2.9	27	121	.27	6.9	0.059	1.5	4.63	MW	CG	N
0.360	9.14	71262S	.44	11.2	.242	6.1	202	35	.09	2.3	18	82	.27	6.9	0.059	1.5	4.63	SST	CG	N
0.360	9.14	M-71	.47	11.9	.286	7.3	27	4.7	.20	5.1	5.4	24	.19	4.7	0.037	0.9	5.00	SPR	CG	Z
0.360	9.14	EE-72	.47	11.9	.276	7.0	56	9.8	.14	3.5	7.8	35	.19	4.8	0.042	1.1	4.50	SPR	CG	Z
0.360	9.14	A10-31	.47	11.9	.244	6.2	93	16	.15	3.8	14	61	.32	8.1	0.058	1.5	5.50	PB	CG	N
0.360	9.14	S-133	.47	11.9	.234	5.9	258	45	.09	2.2	22	99	.32	8.0	0.063	1.6	5.00	SST	CG	N
0.360	9.14	LL-6	.50	12.7	.320	8.1	1.0	.17	.34	8.5	.33	1.5	.17	4.2	0.020	0.5	7.25	SST	C	N
0.360	9.14	A-52	.50	12.7	.310	7.9	7.5	1.3	.33	8.3	2.5	11	.13	3.2	0.025	0.6	4.00	MW	C	Z
0.360	9.14	10076	.50	12.7	.308	7.8	8.9	1.6	.31	7.9	2.8	12	.10	2.6	0.026	0.7	4.00	MW	CG	Z
0.360	9.14	71028	.50	12.7	.308	7.8	9.1	1.6	.30	7.7	2.8	12	.10	2.6	0.026	0.7	4.00	MW	CG	N
0.360	9.14	71028S	.50	12.7	.308	7.8	7.7	1.4	.24	6.1	1.9	8.3	.10	2.6	0.026	0.7	4.00	SST	CG	N
0.360	9.14	1627	.50	12.7	.306	7.8	10	1.8	.30	7.5	3.1	14	.14	3.4	0.027	0.7	4.00	MW	C	Z
0.360	9.14	A15-13	.50	12.7	.306	7.8	9.3	1.6	.22	5.7	2.1	9.2	.11	2.7	0.027	0.7	4.00	SST	CG	N
0.360	9.14	71047	.50	12.7	.302	7.7	13	2.2	.31	7.7	3.8	17	.12	3.1	0.029	0.7	4.25	MW	CG	N
0.360	9.14	71047S	.50	12.7	.302	7.7	11	1.9	.24	6.1	2.6	11	.12	3.1	0.029	0.7	4.25	SST	CG	N
0.360	9.14	10073	.50	12.7	.298	7.6	13	2.2	.31	8.0	3.9	18	.19	4.7	0.031	0.8	5.00	MW	C	Z
0.360	9.14	3571	.50	12.7	.296	7.5	17	3.0	.30	7.5	5.1	23	.18	4.5	0.032	0.8	4.50	MW	C	Z
0.360	9.14	71066	.50	12.7	.296	7.5	18	3.1	.29	7.2	5.1	23	.14	3.6	0.032	0.8	4.38	MW	CG	N
0.360	9.14	71066S	.50	12.7	.296	7.5	15	2.7	.22	5.7	3.4	15	.14	3.6	0.032	0.8	4.38	SST	CG	N
0.360	9.14	71084	.50	12.7	.290	7.4	24	4.2	.26	6.7	6.3	28	.16	4.1	0.035	0.9	4.63	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.360	9.14	71084S	.50	12.7	.290	7.4	20	3.6	.21	5.3	4.3	19	.16	4.1	0.035	0.9	4.63	SST	CG	N
0.360	9.14	10122	.50	12.7	.285	7.2	27	4.7	.21	5.3	5.6	25	.19	4.7	0.037	0.9	5.00	SPR	CG	Z
0.360	9.14	K-79	.50	12.7	.284	7.2	32	5.5	.17	4.4	5.5	24	.21	5.3	0.038	1.0	4.50	SST	C	N
0.360	9.14	71102	.50	12.7	.284	7.2	33	5.8	.24	6.2	8.1	36	.18	4.6	0.038	1.0	4.75	MW	CG	N
0.360	9.14	71102S	.50	12.7	.284	7.2	28	4.9	.19	4.9	5.5	24	.18	4.6	0.038	1.0	4.75	SST	CG	N
0.360	9.14	71120	.50	12.7	.280	7.1	39	6.8	.24	6.2	9.4	42	.20	5.0	0.040	1.0	4.88	MW	CG	N
0.360	9.14	71120S	.50	12.7	.280	7.1	33	5.8	.19	4.9	6.4	28	.20	5.0	0.040	1.0	4.88	SST	CG	N
0.360	9.14	A10-7	.50	12.7	.278	7.1	37	6.5	.18	4.7	6.8	30	.21	5.2	0.041	1.0	5.00	SST	CG	N
0.360	9.14	WW-67	.50	12.7	.278	7.1	28	4.9	.23	5.9	6.6	29	.27	6.8	0.041	1.0	6.50	SPR	CG	Z
0.360	9.14	B12-23	.50	12.7	.278	7.1	42	7.4	.17	4.4	7.3	32	.21	5.2	0.041	1.0	5.00	SPR	CG	N
0.360	9.14	B-45	.50	12.7	.276	7.0	35	6.1	.21	5.2	7.2	32	.29	7.5	0.042	1.1	6.00	SPR	C	Z
0.360	9.14	71138	.50	12.7	.276	7.0	47	8.3	.23	5.8	11	48	.21	5.3	0.042	1.1	5.00	MW	CG	N
0.360	9.14	71138S	.50	12.7	.276	7.0	40	7.0	.18	4.7	7.3	33	.21	5.3	0.042	1.1	5.00	SST	CG	N
0.360	9.14	L-70	.50	12.7	.270	6.9	56	9.9	.16	4.1	9.0	40	.23	5.7	0.045	1.1	5.00	SST	CG	N
0.360	9.14	71156	.50	12.7	.270	6.9	65	11	.20	5.2	13	59	.22	5.6	0.045	1.1	4.88	MW	CG	N
0.360	9.14	71156S	.50	12.7	.270	6.9	56	9.7	.16	4.1	9.0	40	.22	5.6	0.045	1.1	4.88	SST	CG	N
0.360	9.14	AA-96	.50	12.7	.266	6.8	66	12	.17	4.2	11	48	.26	6.6	0.047	1.2	5.50	SPR	CG	Z
0.360	9.14	71175	.50	12.7	.266	6.8	79	14	.19	4.9	15	67	.23	5.8	0.047	1.2	4.88	MW	CG	N
0.360	9.14	71175S	.50	12.7	.266	6.8	67	12	.15	3.9	10	45	.23	5.8	0.047	1.2	4.88	SST	CG	N
0.360	9.14	A13-16	.50	12.7	.266	6.8	77	13	.14	3.6	11	48	.24	6.0	0.047	1.2	5.00	SPR	CG	Z
0.360	9.14	71197	.50	12.7	.262	6.7	92	16	.18	4.7	17	76	.25	6.2	0.049	1.2	5.00	MW	CG	N
0.360	9.14	71197S	.50	12.7	.262	6.7	78	14	.15	3.7	12	51	.25	6.2	0.049	1.2	5.00	SST	CG	N
0.360	9.14	71219	.50	12.7	.258	6.6	108	19	.17	4.2	18	80	.26	6.5	0.051	1.3	5.00	MW	CG	N
0.360	9.14	71219S	.50	12.7	.258	6.6	92	16	.13	3.4	12	54	.26	6.5	0.051	1.3	5.00	SST	CG	N
0.360	9.14	71241	.50	12.7	.250	6.4	148	26	.15	3.8	22	99	.28	7.2	0.055	1.4	5.13	MW	CG	N
0.360	9.14	71241S	.50	12.7	.250	6.4	126	22	.12	3.1	15	67	.28	7.2	0.055	1.4	5.13	SST	CG	N
0.360	9.14	71263	.50	12.7	.242	6.1	201	35	.14	3.5	27	121	.30	7.7	0.059	1.5	5.13	MW	CG	N
0.360	9.14	71263S	.50	12.7	.242	6.1	171	30	.11	2.8	18	82	.30	7.7	0.059	1.5	5.13	SST	CG	N
0.360	9.14	3656	.50	12.7	.200	5.1	1084	190	.04	1.0	44	197	.36	9.1	0.080	2.0	4.50	SPR	CG	Z
0.360	9.14	B5-10	.53	13.5	.318	8.1	3.6	.63	.43	11	1.6	6.9	.08	2.1	0.021	0.5	4.00	MW	CG	N
0.360	9.14	M-82	.53	13.5	.300	7.6	7.3	1.3	.35	8.9	2.5	11	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.360	9.14	A13-20	.53	13.5	.294	7.5	15	2.5	.26	6.6	3.8	17	.17	4.2	0.033	0.8	5.00	SST	CG	N
0.360	9.14	A13-14	.53	13.5	.268	6.8	56	9.8	.17	4.4	9.6	43	.25	6.4	0.046	1.2	5.33	SST	CG	N
0.360	9.14	Y-14	.53	13.5	.264	6.7	113	20	.10	2.6	12	52	.20	5.2	0.048	1.2	4.25	SPR	CG	N
0.360	9.14	KK-89	.53	13.5	.260	6.6	101	18	.11	2.9	11	51	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.360	9.14	12622	.53	13.5	.260	6.6	101	18	.12	3.1	12	54	.25	6.4	0.050	1.3	5.00	SPR	CG	N
0.360	9.14	S-26	.53	13.5	.258	6.6	74	13	.16	4.2	12	54	.36	9.1	0.051	1.3	6.00	SST	C	N
0.360	9.14	12646	.55	13.9	.294	7.5	9.4	1.6	.33	8.4	3.1	14	.22	5.5	0.033	0.8	6.50	SST	CG	N
0.360	9.14	71029	.56	14.2	.308	7.8	8.1	1.4	.34	8.7	2.8	12	.11	2.7	0.026	0.7	4.13	MW	CG	N
0.360	9.14	71029S	.56	14.2	.308	7.8	6.9	1.2	.27	6.8	1.9	8.3	.11	2.7	0.026	0.7	4.13	SST	CG	N
0.360	9.14	71048	.56	14.2	.302	7.7	11	1.9	.35	8.8	3.8	17	.13	3.3	0.029	0.7	4.50	MW	CG	N
0.360	9.14	71048S	.56	14.2	.302	7.7	9.4	1.6	.27	6.9	2.6	11	.13	3.3	0.029	0.7	4.50	SST	CG	N
0.360	9.14	71067	.56	14.2	.296	7.5	16	2.8	.32	8.1	5.1	23	.15	3.8	0.032	0.8	4.63	MW	CG	N
0.360	9.14	71067S	.56	14.2	.296	7.5	14	2.4	.25	6.3	3.4	15	.15	3.8	0.032	0.8	4.63	SST	CG	N
0.360	9.14	71085	.56	14.2	.290	7.4	21	3.7	.30	7.7	6.3	28	.18	4.4	0.035	0.9	5.00	MW	CG	N
0.360	9.14	71085S	.56	14.2	.290	7.4	18	3.1	.24	6.2	4.3	19	.18	4.4	0.035	0.9	5.00	SST	CG	N
0.360	9.14	71103	.56	14.2	.284	7.2	28	5.0	.28	7.2	8.1	36	.19	4.9	0.038	1.0	5.13	MW	CG	N
0.360	9.14	71103S	.56	14.2	.284	7.2	24	4.2	.23	5.8	5.5	24	.19	4.9	0.038	1.0	5.13	SST	CG	N
0.360	9.14	71121	.56	14.2	.280	7.1	34	5.9	.28	7.1	9.4	42	.22	5.5	0.040	1.0	5.38	MW	CG	N
0.360	9.14	71121S	.56	14.2	.280	7.1	29	5.0	.22	5.6	6.4	28	.22	5.5	0.040	1.0	5.38	SST	CG	N
0.360	9.14	71139	.56	14.2	.276	7.0	42	7.3	.26	6.6	11	48	.23	5.7	0.042	1.1	5.38	MW	CG	N
0.360	9.14	71139S	.56	14.2	.276	7.0	35	6.2	.21	5.3	7.3	33	.23	5.7	0.042	1.1	5.38	SST	CG	N
0.360	9.14	71157	.56	14.2	.270	6.9	56	9.7	.24	6.1	13	59	.24	6.1	0.045	1.1	5.38	MW	CG	N
0.360	9.14	71157S	.56	14.2	.270	6.9	47	8.3	.19	4.8	9.0	40	.24	6.1	0.045	1.1	5.38	SST	CG	N
0.360	9.14	71176	.56	14.2	.266	6.8	69	12	.22	5.6	15	67	.25	6.4	0.047	1.2	5.38	MW	CG	N
0.360	9.14	71176S	.56	14.2	.266	6.8	58	10	.17	4.4	10	45	.25	6.4	0.047	1.2	5.38	SST	CG	N
0.360	9.14	71198	.56	14.2	.262	6.7	80	14	.21	5.4	17	76	.26	6.7	0.049	1.2	5.38	MW	CG	N
0.360	9.14	71198S	.56	14.2	.262	6.7	68	12	.17	4.3	12	51	.26	6.7	0.049	1.2	5.38	SST	CG	N
0.360	9.14	71220	.56	14.2	.258	6.6	94	16	.19	4.9	18	80	.28	7.1	0.051	1.3	5.50	MW	CG	N
0.360	9.14	71220S	.56	14.2	.258	6.6	80	14	.15	3.9	12	54	.28	7.1	0.051	1.3	5.50	SST	CG	N
0.360	9.14	71242	.56	14.2	.250	6.4	128	22	.17	4.4	22	99	.31	7.9	0.055	1.4	5.63	MW	CG	N
0.360	9.14	71242S	.56	14.2	.250	6.4	109	19	.14	3.5	15	67	.31	7.9	0.055	1.4	5.63	SST	CG	N
0.360	9.14	71264	.56	14.2	.242	6.1	173	30	.16	4.0	27	121	.33	8.4	0.059	1.5	5.63	MW	CG	N
0.360	9.14	71264S	.56	14.2	.242	6.1	147	26	.13	3.2	18	82	.33	8.4	0.059	1.5	5.63	SST	CG	N
0.360	9.14	U-97	.56	14.3	.332	8.4	.45	.08	.48	12	.21	.95	.08	2.1	0.014	0.4	5.00	MW	C	N
0.360	9.14	B18-132	.56	14.3	.312	7.9	5.1	.89	.45	12	2.3	10	.11	2.7	0.024	0.6	4.50	MW	CG	Z
0.360	9.14	10486	.56	14.3	.294	7.5	16	2.9	.25	6.3	4.0	18	.17	4.2	0.033	0.8	5.00	SPR	CG	GI
0.360	9.14	10029	.56	14.3	.284	7.2	30	5.3	.19	4.9	5.8	26	.19	4.8	0.038	1.0	5.00	SPR	CG	Z
0.360	9.14	HH-96	.56	14.3	.284	7.2	20	3.4	.28	7.1	5.5	24	.27	6.8	0.038	1.0	6.00	SST	C	N
0.360	9.14	B4-68	.56	14.3	.274	7.0	44	7.7	.26	6.7	12	52	.28	7.1	0.043	1.1	5.50	MW	C	Z
0.360	9.14	3247	.56	14.3	.234	5.9	291	51	.08	2.1	24	106	.38	9.6	0.063	1.6	5.00	SPR	C	Z
0.360	9.14	A14-48	.59	15.1	.316	8.0	3.8	.66	.47	12	1.8	8.0	.10	2.4	0.022	0.6	4.33	MW	CG	N
0.360	9.14	A11-54	.59	15.1	.276	7.0	31	5.5	.24	6.0	7.3	33	.25	6.4	0.042	1.1	6.00	SST	CG	N
0.360	9.14	BB-17	.59	15.1	.266	6.8	50	8.8	.20	5.2	10	45	.28	7.2	0.047	1.2	6.00	SST	CG	N
0.360	9.14	KK-47	.59	15.1	.264	6.7	51	8.9	.23	5.8	12	52	.34	8.5	0.048	1.2	7.00	SPR	CG	N
0.360	9.14	N-88	.59	15.1	.180	4.6	1074	188	.05	1.3	54	241	.54	13.7	0.090	2.3	6.00	SST	CG	N
0.360	9.14	A12-5	.63	15.9	.322	8.2	1.4	.24	.50	13	.68	3.0	.12	3.1	0.019	0.5	5.50	MW	C	Z
0.360	9.14	G-65	.63	15.9	.318	8.1	3.2	.56	.48	12	1.6	6.9	.11	2.8	0.021	0.5	4.25	MW	C	N
0.360	9.14	S-923	.63	15.9	.312	7.9	2.0	.35	.42	11	.84	3.8	.20	5.2	0.024	0.6	7.50	SST	C	N
0.360	9.14	3859	.63	15.9	.310	7.9	2.0	.35	.36	9.2	.73	3.2	.26	6.7	0.025	0.6	9.50	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	B1-45	.63	15.9	.308	7.8	6.3	1.1	.29	7.5	1.9	8.3	.12	3.0	0.026	0.7	4.50	SST	CG	N
0.360	9.14	B12-28	.63	15.9	.308	7.8	7.1	1.2	.39	9.9	2.8	12	.12	3.0	0.026	0.7	4.50	MW	CG	N
0.360	9.14	FF-66	.63	15.9	.300	7.6	8.3	1.5	.34	8.7	2.8	13	.20	5.0	0.030	0.8	5.50	SST	C	N
0.360	9.14	10815	.63	15.9	.296	7.5	14	2.5	.26	6.5	3.7	16	.19	4.9	0.032	0.8	5.00	SPR	C	Z
0.360	9.14	3047	.63	15.9	.296	7.5	12	2.2	.42	11	5.1	23	.18	4.5	0.032	0.8	5.50	MW	CG	Z
0.360	9.14	4267	.63	15.9	.280	7.1	41	7.2	.16	4.2	6.8	30	.23	5.8	0.040	1.0	4.75	SPR	C	Z
0.360	9.14	GG-77	.63	15.9	.280	7.1	28	5.0	.24	6.1	6.8	30	.24	6.1	0.040	1.0	6.00	SPR	CG	N
0.360	9.14	L-99	.63	15.9	.280	7.1	18	3.1	.33	8.3	5.8	26	.30	7.6	0.040	1.0	7.50	SST	CG	N
0.360	9.14	K-65	.63	15.9	.280	7.1	15	2.7	.29	7.2	4.3	19	.34	8.6	0.040	1.0	8.50	SST	CG	N
0.360	9.14	S-1262	.63	15.9	.278	7.1	29	5.1	.23	5.9	6.8	30	.24	6.0	0.041	1.0	5.75	SST	CG	N
0.360	9.14	V-66	.63	15.9	.270	6.9	32	5.6	.27	6.7	8.4	37	.36	9.1	0.045	1.1	8.00	SPR	CG	N
0.360	9.14	A11-16	.63	15.9	.268	6.8	47	8.2	.21	5.2	9.6	43	.28	7.0	0.046	1.2	6.00	SST	CG	N
0.360	9.14	B7-4	.63	15.9	.268	6.8	49	8.6	.21	5.3	10	45	.29	7.3	0.046	1.2	6.25	SPR	CG	Z
0.360	9.14	10878	.63	15.9	.266	6.8	58	10	.19	4.8	11	48	.33	8.4	0.047	1.2	6.00	SPR	C	N
0.360	9.14	71030	.63	16.0	.308	7.8	7.2	1.3	.38	9.8	2.8	12	.12	3.0	0.026	0.7	4.50	MW	CG	N
0.360	9.14	71030S	.63	16.0	.308	7.8	6.1	1.1	.30	7.7	1.9	8.3	.12	3.0	0.026	0.7	4.50	SST	CG	N
0.360	9.14	71049	.63	16.0	.302	7.7	9.9	1.7	.39	9.8	3.8	17	.14	3.6	0.029	0.7	4.88	MW	CG	N
0.360	9.14	71049S	.63	16.0	.302	7.7	8.4	1.5	.30	7.7	2.6	11	.14	3.6	0.029	0.7	4.88	SST	CG	N
0.360	9.14	71068	.63	16.0	.296	7.5	15	2.6	.35	8.8	5.1	23	.16	4.0	0.032	0.8	4.88	MW	CG	N
0.360	9.14	71068S	.63	16.0	.296	7.5	12	2.2	.27	7.0	3.4	15	.16	4.0	0.032	0.8	4.88	SST	CG	N
0.360	9.14	71086	.63	16.0	.290	7.4	19	3.2	.34	8.7	6.3	28	.19	4.8	0.035	0.9	5.38	MW	CG	N
0.360	9.14	71086S	.63	16.0	.290	7.4	16	2.8	.27	6.9	4.3	19	.19	4.8	0.035	0.9	5.38	SST	CG	N
0.360	9.14	71104	.63	16.0	.284	7.2	25	4.4	.32	8.2	8.1	36	.21	5.4	0.038	1.0	5.63	MW	CG	N
0.360	9.14	71104S	.63	16.0	.284	7.2	21	3.7	.26	6.6	5.5	24	.21	5.4	0.038	1.0	5.63	SST	CG	N
0.360	9.14	71122	.63	16.0	.280	7.1	30	5.2	.32	8.1	9.4	42	.23	5.8	0.040	1.0	5.75	MW	CG	N
0.360	9.14	71122S	.63	16.0	.280	7.1	25	4.4	.25	6.4	6.4	28	.23	5.8	0.040	1.0	5.75	SST	CG	N
0.360	9.14	71140	.63	16.0	.276	7.0	38	6.6	.29	7.3	11	48	.24	6.0	0.042	1.1	5.63	MW	CG	N
0.360	9.14	71140S	.63	16.0	.276	7.0	32	5.6	.23	5.8	7.3	33	.24	6.0	0.042	1.1	5.63	SST	CG	N
0.360	9.14	71158	.63	16.0	.270	6.9	49	8.6	.27	6.9	13	59	.26	6.7	0.045	1.1	5.88	MW	CG	N
0.360	9.14	71158S	.63	16.0	.270	6.9	42	7.3	.22	5.5	9.0	40	.26	6.7	0.045	1.1	5.88	SST	CG	N
0.360	9.14	71177	.63	16.0	.266	6.8	61	11	.25	6.3	15	67	.27	6.9	0.047	1.2	5.75	MW	CG	N
0.360	9.14	71177S	.63	16.0	.266	6.8	52	9.1	.20	5.0	10	45	.27	6.9	0.047	1.2	5.75	SST	CG	N
0.360	9.14	71199	.63	16.0	.262	6.7	71	12	.24	6.1	17	76	.29	7.3	0.049	1.2	5.88	MW	CG	N
0.360	9.14	71199S	.63	16.0	.262	6.7	60	11	.19	4.9	12	51	.29	7.3	0.049	1.2	5.88	SST	CG	N
0.360	9.14	71221	.63	16.0	.258	6.6	83	14	.22	5.5	18	80	.31	7.8	0.051	1.3	6.00	MW	CG	N
0.360	9.14	71221S	.63	16.0	.258	6.6	70	12	.17	4.4	12	54	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.360	9.14	71243	.63	16.0	.250	6.4	113	20	.20	5.0	22	99	.34	8.6	0.055	1.4	6.13	MW	CG	N
0.360	9.14	71243S	.63	16.0	.250	6.4	96	17	.16	4.0	15	67	.34	8.6	0.055	1.4	6.13	SST	CG	N
0.360	9.14	71265	.63	16.0	.242	6.1	153	27	.18	4.5	27	121	.36	9.2	0.059	1.5	6.13	MW	CG	N
0.360	9.14	71265S	.63	16.0	.242	6.1	130	23	.14	3.6	18	82	.36	9.2	0.059	1.5	6.13	SST	CG	N
0.360	9.14	JJ-53	.66	16.7	.284	7.2	23	4.0	.26	6.5	5.8	26	.23	5.8	0.038	1.0	6.00	SPR	CG	N
0.360	9.14	10954	.66	16.7	.266	6.8	42	7.4	.26	6.5	11	48	.40	10.2	0.047	1.2	7.50	SPR	C	N
0.360	9.14	12695	.67	17.1	.236	6.0	134	23	.18	4.5	24	105	.50	12.6	0.062	1.6	8.00	MW	CG	N
0.360	9.14	B5-16	.69	17.4	.314	8.0	4.2	.74	.48	12	2.0	9.1	.13	3.2	0.023	0.6	4.50	MW	C	N
0.360	9.14	B4-8	.69	17.4	.312	7.9	1.3	.22	.38	9.5	.47	2.1	.31	7.9	0.024	0.6	12.0	MW	C	Z
0.360	9.14	J-25	.69	17.4	.310	7.9	5.5	.96	.45	11	2.5	11	.14	3.7	0.025	0.6	4.75	MW	C	Z
0.360	9.14	W-45	.69	17.4	.280	7.1	20	3.5	.32	8.2	6.4	28	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.360	9.14	A13-11	.69	17.4	.274	7.0	32	5.6	.25	6.3	7.9	35	.27	6.9	0.043	1.1	6.25	SST	CG	N
0.360	9.14	N-68	.69	17.4	.270	6.9	24	4.2	.24	6.0	5.7	25	.45	11.4	0.045	1.1	9.00	SST	C	N
0.360	9.14	3668	.69	17.4	.268	6.8	52	9.2	.19	5.0	10	45	.32	8.2	0.046	1.2	6.00	SPR	C	Z
0.360	9.14	BB-79	.69	17.4	.250	6.4	66	11.6	.190	4.83	12.5	55.6	.50	12.7	0.055	1.4	9.00	SPR	CG	N
0.360	9.14	00-37	.69	17.4	.240	6.1	100	17	.15	3.7	15	65	.54	13.7	0.060	1.5	9.00	SPR	CG	N
0.360	9.14	71031	.69	17.5	.308	7.8	6.6	1.2	.42	11	2.8	12	.12	3.1	0.026	0.7	4.63	MW	CG	N
0.360	9.14	71031S	.69	17.5	.308	7.8	5.6	.98	.33	8.4	1.9	8.3	.12	3.1	0.026	0.7	4.63	SST	CG	N
0.360	9.14	71050	.69	17.5	.302	7.7	8.6	1.5	.45	11	3.8	17	.15	3.9	0.029	0.7	5.25	MW	CG	N
0.360	9.14	71050S	.69	17.5	.302	7.7	7.3	1.3	.35	8.9	2.6	11	.15	3.9	0.029	0.7	5.25	SST	CG	N
0.360	9.14	71069	.69	17.5	.296	7.5	13	2.3	.40	10	5.1	23	.17	4.3	0.032	0.8	5.25	MW	CG	N
0.360	9.14	71069S	.69	17.5	.296	7.5	11	1.9	.31	7.9	3.4	15	.17	4.3	0.032	0.8	5.25	SST	CG	N
0.360	9.14	71087	.69	17.5	.290	7.4	16	2.9	.39	9.8	6.3	28	.21	5.2	0.035	0.9	5.88	MW	CG	N
0.360	9.14	71087S	.69	17.5	.290	7.4	14	2.4	.31	7.8	4.3	19	.21	5.2	0.035	0.9	5.88	SST	CG	N
0.360	9.14	71105	.69	17.5	.284	7.2	22	3.9	.37	9.3	8.1	36	.23	5.9	0.038	1.0	6.13	MW	CG	N
0.360	9.14	71105S	.69	17.5	.284	7.2	19	3.3	.29	7.4	5.5	24	.23	5.9	0.038	1.0	6.13	SST	CG	N
0.360	9.14	71123	.69	17.5	.280	7.1	27	4.7	.35	9.0	9.4	42	.25	6.4	0.040	1.0	6.25	MW	CG	N
0.360	9.14	71123S	.69	17.5	.280	7.1	23	4.0	.28	7.1	6.4	28	.25	6.4	0.040	1.0	6.25	SST	CG	N
0.360	9.14	71141	.69	17.5	.276	7.0	34	5.9	.32	8.2	11	48	.26	6.5	0.042	1.1	6.13	MW	CG	N
0.360	9.14	71141S	.69	17.5	.276	7.0	28	5.0	.26	6.5	7.3	33	.26	6.5	0.042	1.1	6.13	SST	CG	N
0.360	9.14	71159	.69	17.5	.270	6.9	44	7.7	.30	7.7	13	59	.28	7.1	0.045	1.1	6.25	MW	CG	N
0.360	9.14	71159S	.69	17.5	.270	6.9	37	6.5	.24	6.1	9.0	40	.28	7.1	0.045	1.1	6.25	SST	CG	N
0.360	9.14	71178	.69	17.5	.266	6.8	54	9.4	.28	7.1	15	67	.29	7.5	0.047	1.2	6.25	MW	CG	N
0.360	9.14	71178S	.69	17.5	.266	6.8	46	8.0	.22	5.7	10	45	.29	7.5	0.047	1.2	6.25	SST	CG	N
0.360	9.14	71200	.69	17.5	.262	6.7	63	11	.27	6.9	17	76	.31	7.9	0.049	1.2	6.38	MW	CG	N
0.360	9.14	71200S	.69	17.5	.262	6.7	53	9.4	.22	5.5	12	51	.31	7.9	0.049	1.2	6.38	SST	CG	N
0.360	9.14	71222	.69	17.5	.258	6.6	73	13	.25	6.2	18	80	.33	8.4	0.051	1.3	6.50	MW	CG	N
0.360	9.14	71222S	.69	17.5	.258	6.6	62	11	.20	5.0	12	54	.33	8.4	0.051	1.3	6.50	SST	CG	N
0.360	9.14	71244	.69	17.5	.250	6.4	100	17	.22	5.7	22	99	.36	9.3	0.055	1.4	6.63	MW	CG	N
0.360	9.14	71244S	.69	17.5	.250	6.4	85	15	.18	4.5	15	67	.36	9.3	0.055	1.4	6.63	SST	CG	N
0.360	9.14	71266	.69	17.5	.242	6.1	134	23	.20	5.2	27	121	.40	10.1	0.059	1.5	6.75	MW	CG	N
0.360	9.14	71266S	.69	17.5	.242	6.1	114	20	.16	4.1	18	82	.40	10.1	0.059	1.5	6.75	SST	CG	N
0.360	9.14	11223	.72	18.2	.318	8.1	1.3	.23	.54	14	.71	3.2	.18	4.5	0.021	0.5	7.50	MW	C	N
0.360	9.14	B12-8	.72	18.2	.270	6.9	45	7.8	.21	5.4	9.6	43	.28	7.1	0.045	1.1	6.25	SPR	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	B7-54	.72	18.2	.268	6.8	49	8.6	.21	5.3	10	45	.33	8.5	0.046	1.2	6.25	SPR	C	N
0.360	9.14	3596	.72	18.2	.210	5.3	331	58	.11	2.8	37	164	.60	15.2	0.075	1.9	8.00	SPR	CG	Z
0.360	9.14	B12-18	.75	19.1	.316	8.0	2.9	.51	.61	15	1.8	8.0	.11	2.8	0.022	0.6	5.00	MW	CG	N
0.360	9.14	M-110	.75	19.1	.310	7.9	5.0	.88	.49	12	2.5	11	.15	3.8	0.025	0.6	5.00	MW	C	GI
0.360	9.14	71032	.75	19.1	.308	7.8	6.1	1.1	.46	12	2.8	12	.13	3.2	0.026	0.7	4.88	MW	CG	N
0.360	9.14	71032S	.75	19.1	.308	7.8	5.1	.90	.36	9.2	1.9	8.3	.13	3.2	0.026	0.7	4.88	SST	CG	N
0.360	9.14	B12-22	.75	19.1	.306	7.8	6.4	1.1	.48	12	3.1	14	.14	3.6	0.027	0.7	5.25	MW	CG	GI
0.360	9.14	71051	.75	19.1	.302	7.7	7.9	1.4	.48	12	3.8	17	.16	4.1	0.029	0.7	5.50	MW	CG	N
0.360	9.14	71051S	.75	19.1	.302	7.7	6.7	1.2	.38	9.7	2.6	11	.16	4.1	0.029	0.7	5.50	SST	CG	N
0.360	9.14	CC-50	.75	19.1	.300	7.6	7.1	1.2	.40	10	2.8	13	.21	5.3	0.030	0.8	6.00	SST	C	N
0.360	9.14	BB-71	.75	19.1	.300	7.6	3.6	.63	.45	11	1.6	7.3	.30	7.6	0.030	0.8	10.0	SST	CG	N
0.360	9.14	10014	.75	19.1	.296	7.5	11	1.9	.48	12	5.1	23	.19	4.9	0.032	0.8	6.00	MW	C	Z
0.360	9.14	71070	.75	19.1	.296	7.5	12	2.1	.43	11	5.1	23	.18	4.6	0.032	0.8	5.63	MW	CG	N
0.360	9.14	71070S	.75	19.1	.296	7.5	10	1.8	.34	8.6	3.4	15	.18	4.6	0.032	0.8	5.63	SST	CG	N
0.360	9.14	71088	.75	19.1	.290	7.4	15	2.6	.42	11	6.3	28	.21	5.4	0.035	0.9	6.13	MW	CG	N
0.360	9.14	71088S	.75	19.1	.290	7.4	13	2.2	.34	8.5	4.3	19	.21	5.4	0.035	0.9	6.13	SST	CG	N
0.360	9.14	B3-35	.75	19.1	.290	7.4	14	2.4	.45	12	6.3	28	.23	5.8	0.035	0.9	6.50	MW	CG	N
0.360	9.14	71106	.75	19.1	.284	7.2	21	3.7	.39	9.8	8.1	36	.24	6.0	0.038	1.0	6.25	MW	CG	N
0.360	9.14	71106S	.75	19.1	.284	7.2	18	3.1	.31	7.8	5.5	24	.24	6.0	0.038	1.0	6.25	SST	CG	N
0.360	9.14	S-1158	.75	19.1	.280	7.1	20	3.5	.32	8.2	6.4	28	.32	8.1	0.040	1.0	7.00	SST	C	N
0.360	9.14	71124	.75	19.1	.280	7.1	24	4.3	.39	9.8	9.4	42	.27	6.7	0.040	1.0	6.63	MW	CG	N
0.360	9.14	71124S	.75	19.1	.280	7.1	21	3.6	.31	7.8	6.4	28	.27	6.7	0.040	1.0	6.63	SST	CG	N
0.360	9.14	3785	.75	19.1	.276	7.0	28	4.9	.28	7.1	7.8	35	.34	8.5	0.042	1.1	7.00	SPR	C	Z
0.360	9.14	71142	.75	19.1	.276	7.0	31	5.4	.35	8.9	11	48	.27	6.9	0.042	1.1	6.50	MW	CG	N
0.360	9.14	71142S	.75	19.1	.276	7.0	26	4.6	.28	7.1	7.3	33	.27	6.9	0.042	1.1	6.50	SST	CG	N
0.360	9.14	A14-44	.75	19.1	.274	7.0	33	5.7	.26	6.5	8.4	37	.29	7.4	0.043	1.1	6.75	SPR	CG	Z
0.360	9.14	10027	.75	19.1	.270	6.9	38	6.7	.25	6.4	9.6	43	.32	8.0	0.045	1.1	7.00	SPR	CG	Z
0.360	9.14	G-22	.75	19.1	.270	6.9	18	3.2	.26	6.5	4.7	21	.50	12.6	0.045	1.1	11.0	SST	CG	N
0.360	9.14	H-29	.75	19.1	.270	6.9	33	5.8	.27	6.9	9.0	40	.32	8.0	0.045	1.1	7.00	SST	CG	N
0.360	9.14	71160	.75	19.1	.270	6.9	40	7.0	.33	8.5	13	59	.30	7.7	0.045	1.1	6.75	MW	CG	N
0.360	9.14	71160S	.75	19.1	.270	6.9	34	5.9	.27	6.8	9.0	40	.30	7.7	0.045	1.1	6.75	SST	CG	N
0.360	9.14	71179	.75	19.1	.266	6.8	39	6.9	.38	9.6	15	66	.37	9.4	0.047	1.2	7.88	MW	CG	N
0.360	9.14	71179S	.75	19.1	.266	6.8	33	5.8	.31	7.8	10	45	.37	9.4	0.047	1.2	7.88	SST	CG	N
0.360	9.14	AA-94	.75	19.1	.266	6.8	33	5.9	.30	7.7	10	45	.38	9.6	0.047	1.2	8.00	SST	CG	N
0.360	9.14	71201	.75	19.1	.262	6.7	57	10	.30	7.6	17	76	.34	8.6	0.049	1.2	6.88	MW	CG	N
0.360	9.14	71201S	.75	19.1	.262	6.7	48	8.5	.24	6.0	12	51	.34	8.6	0.049	1.2	6.88	SST	CG	N
0.360	9.14	2612	.75	19.1	.260	6.6	51	8.9	.24	6.1	12	54	.40	10.2	0.050	1.3	8.00	SPR	CG	Z
0.360	9.14	71223	.75	19.1	.258	6.6	66	12	.27	6.9	18	80	.36	9.1	0.051	1.3	7.00	MW	CG	N
0.360	9.14	71223S	.75	19.1	.258	6.6	56	9.8	.22	5.5	12	54	.36	9.1	0.051	1.3	7.00	SST	CG	N
0.360	9.14	DD-100	.75	19.1	.252	6.4	68	12	.21	5.3	14	64	.41	10.3	0.054	1.4	7.50	SST	CG	N
0.360	9.14	71245	.75	19.1	.250	6.4	90	16	.25	6.3	22	99	.39	10.0	0.055	1.4	7.13	MW	CG	N
0.360	9.14	71245S	.75	19.1	.250	6.4	77	13	.20	5.0	15	67	.39	10.0	0.055	1.4	7.13	SST	CG	N
0.360	9.14	M-107	.75	19.1	.242	6.1	117	21	.17	4.3	20	87	.44	11.2	0.059	1.5	7.50	SPR	CG	Z
0.360	9.14	71267	.75	19.1	.242	6.1	121	21	.22	5.7	27	121	.43	10.9	0.059	1.5	7.25	MW	CG	N
0.360	9.14	71267S	.75	19.1	.242	6.1	103	18	.18	4.6	18	82	.43	10.9	0.059	1.5	7.25	SST	CG	N
0.360	9.14	BB-52	.78	19.8	.300	7.6	9.7	1.7	.29	7.4	2.8	13	.15	3.8	0.030	0.8	5.00	SST	CG	N
0.360	9.14	B-85	.78	19.8	.298	7.6	8.3	1.5	.37	9.5	3.1	14	.22	5.5	0.031	0.8	6.00	SST	C	N
0.360	9.14	A13-17	.78	19.8	.292	7.4	14	2.4	.44	11	6.1	27	.20	5.2	0.034	0.9	6.00	MW	CG	N
0.360	9.14	S-1533	.78	19.8	.290	7.4	10	1.8	.43	11	4.3	19	.26	6.7	0.035	0.9	7.50	SST	CG	N
0.360	9.14	KK-49	.78	19.8	.260	6.6	51	8.9	.24	6.1	12	54	.40	10.2	0.050	1.3	8.00	SPR	CG	N
0.360	9.14	10447	.78	19.8	.258	6.6	67	12	.19	4.9	13	57	.41	10.4	0.051	1.3	7.00	SPR	C	Z
0.360	9.14	71033	.81	20.6	.308	7.8	5.6	.98	.49	13	2.8	12	.13	3.4	0.026	0.7	5.13	MW	CG	N
0.360	9.14	71033S	.81	20.6	.308	7.8	4.8	.83	.39	9.9	1.9	8.3	.13	3.4	0.026	0.7	5.13	SST	CG	N
0.360	9.14	71052	.81	20.6	.302	7.7	7.3	1.3	.52	13	3.8	17	.17	4.3	0.029	0.7	5.88	MW	CG	N
0.360	9.14	71052S	.81	20.6	.302	7.7	6.2	1.1	.41	10	2.6	11	.17	4.3	0.029	0.7	5.88	SST	CG	N
0.360	9.14	71071	.81	20.6	.296	7.5	11	1.9	.46	12	5.1	23	.19	4.8	0.032	0.8	5.88	MW	CG	N
0.360	9.14	71071S	.81	20.6	.296	7.5	9.4	1.7	.36	9.2	3.4	15	.19	4.8	0.032	0.8	5.88	SST	CG	N
0.360	9.14	71089	.81	20.6	.290	7.4	14	2.4	.46	12	6.3	28	.23	5.9	0.035	0.9	6.63	MW	CG	N
0.360	9.14	71089S	.81	20.6	.290	7.4	12	2.0	.37	9.3	4.3	19	.23	5.9	0.035	0.9	6.63	SST	CG	N
0.360	9.14	71107	.81	20.6	.284	7.2	19	3.3	.43	11	8.1	36	.26	6.5	0.038	1.0	6.75	MW	CG	N
0.360	9.14	71107S	.81	20.6	.284	7.2	16	2.8	.34	8.7	5.5	24	.26	6.5	0.038	1.0	6.75	SST	CG	N
0.360	9.14	71125	.81	20.6	.280	7.1	22	3.9	.42	11	9.4	42	.28	7.1	0.040	1.0	7.00	MW	CG	N
0.360	9.14	71125S	.81	20.6	.280	7.1	19	3.3	.33	8.5	6.4	28	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.360	9.14	71143	.81	20.6	.276	7.0	28	4.9	.39	9.9	11	48	.29	7.5	0.042	1.1	7.00	MW	CG	N
0.360	9.14	71143S	.81	20.6	.276	7.0	24	4.1	.31	7.9	7.3	33	.29	7.5	0.042	1.1	7.00	SST	CG	N
0.360	9.14	71161	.81	20.6	.270	6.9	36	6.4	.36	9.3	13	59	.32	8.1	0.045	1.1	7.13	MW	CG	N
0.360	9.14	71161S	.81	20.6	.270	6.9	31	5.4	.29	7.4	9.0	40	.32	8.1	0.045	1.1	7.13	SST	CG	N
0.360	9.14	71180	.81	20.6	.266	6.8	45	7.8	.34	8.6	15	67	.33	8.5	0.047	1.2	7.13	MW	CG	N
0.360	9.14	71180S	.81	20.6	.266	6.8	38	6.7	.27	6.8	10	45	.33	8.5	0.047	1.2	7.13	SST	CG	N
0.360	9.14	71202	.81	20.6	.262	6.7	52	9.1	.33	8.3	17	76	.36	9.0	0.049	1.2	7.25	MW	CG	N
0.360	9.14	71202S	.81	20.6	.262	6.7	44	7.7	.26	6.6	12	51	.36	9.0	0.049	1.2	7.25	SST	CG	N
0.360	9.14	71224	.81	20.6	.258	6.6	61	11	.30	7.5	18	80	.38	9.7	0.051	1.3	7.50	MW	CG	N
0.360	9.14	71224S	.81	20.6	.258	6.6	51	9.0	.24	6.0	12	54	.38	9.7	0.051	1.3	7.50	SST	CG	N
0.360	9.14	71246	.81	20.6	.250	6.4	82	14	.27	6.9	22	99	.42	10.7	0.055	1.4	7.63	MW	CG	N
0.360	9.14	71246S	.81	20.6	.250	6.4	70	12	.22	5.5	15	67	.42	10.7	0.055	1.4	7.63	SST	CG	N
0.360	9.14	71268	.81	20.6	.242	6.1	111	19	.25	6.3	27	121	.46	11.6	0.059	1.5	7.75	MW	CG	N
0.360	9.14	71268S	.81	20.6	.242	6.1	94	16	.20	5.0	18	82	.46	11.6	0.059	1.5	7.75	SST	CG	N
0.360	9.14	B-73	.81	20.6	.308	7.8	5.3	.92	.35	9.0	1.9	8.3	.16	4.0	0.026	0.7	5.00	SST	C	N
0.360	9.14	J-51	.81	20.6	.308	7.8	5.9	1.0	.47	12	2.8	12	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.360	9.14	B7-1	.81	20.6	.304	7.7	4.6	.81	.61	15	2.8	13	.20	5.2	0.028	0.7	7.25	MW	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.360	9.14	A13-26	.81	20.6	.294	7.5	10	1.8	.37	9.3	3.8	17	.21	5.2	0.033	0.8	6.25	SST	CG	N
0.360	9.14	H-64	.81	20.6	.290	7.4	12	2.0	.40	10	4.6	20	.26	6.7	0.035	0.9	7.50	SPR	CG	Z
0.360	9.14	4238	.81	20.6	.288	7.3	18	3.1	.28	7.1	5.0	22	.25	6.4	0.036	0.9	6.00	SPR	C	Z
0.360	9.14	B1-15	.81	20.6	.266	6.8	44	7.7	.25	6.3	11	48	.34	8.7	0.047	1.2	7.25	SPR	CG	GI
0.360	9.14	MM-48	.84	21.4	.304	7.7	6.1	1.1	.57	14	3.5	15	.20	5.0	0.028	0.7	6.00	MW	C	N
0.360	9.14	N-3	.84	21.4	.226	5.7	172	30	.15	3.9	27	118	.54	13.6	0.067	1.7	8.00	SST	CG	N
0.360	9.14	4279	.88	22.2	.310	7.9	4.3	.75	.57	15	2.5	11	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.360	9.14	S-1279	.88	22.2	.310	7.9	3.3	.57	.50	13	1.7	7.3	.15	3.8	0.025	0.6	6.00	SST	CG	N
0.360	9.14	Z-55	.88	22.2	.310	7.9	3.7	.66	.44	11	1.7	7.3	.16	4.1	0.025	0.6	5.50	SST	C	N
0.360	9.14	XX-69	.88	22.2	.306	7.8	5.6	.97	.56	14	3.1	14	.18	4.6	0.027	0.7	5.75	MW	C	Z
0.360	9.14	J-11	.88	22.2	.302	7.7	4.0	.71	.59	15	2.4	11	.29	7.4	0.029	0.7	9.00	MW	C	Z
0.360	9.14	B17-133	.88	22.2	.300	7.6	5.9	1.0	.65	17	3.9	17	.23	5.7	0.030	0.8	7.50	MW	CG	Z
0.360	9.14	W-19	.88	22.2	.296	7.5	7.5	1.3	.46	12	3.4	15	.22	5.7	0.032	0.8	7.00	SST	CG	N
0.360	9.14	10095	.88	22.2	.294	7.5	9.8	1.7	.41	10	4.0	18	.26	6.7	0.033	0.8	7.00	SPR	C	Z
0.360	9.14	A13-49	.88	22.2	.294	7.5	11	1.9	.37	9.4	4.0	18	.21	5.4	0.033	0.8	6.50	SPR	CG	GI
0.360	9.14	O-93	.88	22.2	.290	7.4	16	2.8	.29	7.3	4.6	20	.21	5.3	0.035	0.9	6.00	SPR	C	GI
0.360	9.14	QQ-68	.88	22.2	.282	7.2	13	2.3	.45	11	5.9	26	.38	9.7	0.039	1.0	8.75	SST	C	N
0.360	9.14	GG-10	.88	22.2	.280	7.1	13	2.2	.48	12	6.0	27	.40	10.2	0.040	1.0	10.0	SST	CG	N
0.360	9.14	S-1257	.88	22.2	.278	7.1	19	3.3	.36	9.1	6.8	30	.32	8.1	0.041	1.0	7.75	SST	CG	N
0.360	9.14	A11-25	.88	22.2	.268	6.8	31	5.4	.31	7.8	9.6	43	.37	9.3	0.046	1.2	8.00	SST	CG	N
0.360	9.14	W-44	.88	22.2	.266	6.8	37	6.4	.28	7.1	10	45	.35	9.0	0.047	1.2	7.50	SST	CG	N
0.360	9.14	H-22	.88	22.2	.252	6.4	50	8.7	.29	7.3	14	64	.51	13.0	0.054	1.4	9.50	SST	CG	N
0.360	9.14	L-82	.88	22.2	.252	6.4	51	8.9	.30	7.6	15	68	.57	14.4	0.054	1.4	10.5	SPR	CG	Z
0.360	9.14	O-34	.88	22.2	.230	5.8	149	26	.16	4.2	24	109	.52	13.2	0.065	1.7	8.00	SST	CG	N
0.360	9.14	71034	.88	22.4	.308	7.8	5.0	.87	.56	14	2.8	12	.15	3.7	0.026	0.7	5.63	MW	CG	N
0.360	9.14	71034S	.88	22.4	.308	7.8	4.2	.74	.44	11	1.9	8.3	.15	3.7	0.026	0.7	5.63	SST	CG	N
0.360	9.14	71053	.88	22.4	.302	7.7	6.7	1.2	.57	15	3.8	17	.18	4.5	0.029	0.7	6.13	MW	CG	N
0.360	9.14	71053S	.88	22.4	.302	7.7	5.7	1.0	.45	11	2.6	11	.18	4.5	0.029	0.7	6.13	SST	CG	N
0.360	9.14	71072	.88	22.4	.296	7.5	10	1.7	.51	13	5.1	23	.20	5.1	0.032	0.8	6.25	MW	CG	N
0.360	9.14	71072S	.88	22.4	.296	7.5	8.5	1.5	.41	10	3.4	15	.20	5.1	0.032	0.8	6.25	SST	CG	N
0.360	9.14	71090	.88	22.4	.290	7.4	13	2.2	.50	13	6.3	28	.24	6.1	0.035	0.9	6.88	MW	CG	N
0.360	9.14	71090S	.88	22.4	.290	7.4	11	1.9	.40	10	4.3	19	.24	6.1	0.035	0.9	6.88	SST	CG	N
0.360	9.14	71108	.88	22.4	.284	7.2	17	3.0	.48	12	8.1	36	.28	7.0	0.038	1.0	7.25	MW	CG	N
0.360	9.14	71108S	.88	22.4	.284	7.2	14	2.5	.38	9.6	5.5	24	.28	7.0	0.038	1.0	7.25	SST	CG	N
0.360	9.14	71126	.88	22.4	.280	7.1	20	3.6	.46	12	9.4	42	.30	7.6	0.040	1.0	7.50	MW	CG	N
0.360	9.14	71126S	.88	22.4	.280	7.1	17	3.0	.37	9.3	6.4	28	.30	7.6	0.040	1.0	7.50	SST	CG	N
0.360	9.14	71144	.88	22.4	.276	7.0	25	4.4	.43	11	11	48	.32	8.0	0.042	1.1	7.50	MW	CG	N
0.360	9.14	71144S	.88	22.4	.276	7.0	21	3.7	.34	8.7	7.3	33	.32	8.0	0.042	1.1	7.50	SST	CG	N
0.360	9.14	71162	.88	22.4	.270	6.9	33	5.8	.40	10	13	59	.35	8.9	0.045	1.1	7.75	MW	CG	N
0.360	9.14	71162S	.88	22.4	.270	6.9	28	4.9	.32	8.2	9.0	40	.35	8.9	0.045	1.1	7.75	SST	CG	N
0.360	9.14	71181	.88	22.4	.266	6.8	33	5.7	.46	12	15	66	.42	10.7	0.047	1.2	9.00	MW	CG	N
0.360	9.14	71181S	.88	22.4	.266	6.8	28	4.9	.37	9.3	10	45	.42	10.7	0.047	1.2	9.00	SST	CG	N
0.360	9.14	71203	.88	22.4	.262	6.7	48	8.3	.36	9.1	17	76	.38	9.6	0.049	1.2	7.75	MW	CG	N
0.360	9.14	71203S	.88	22.4	.262	6.7	41	7.1	.28	7.2	12	51	.38	9.6	0.049	1.2	7.75	SST	CG	N
0.360	9.14	71225	.88	22.4	.258	6.6	55	9.6	.32	8.3	18	80	.41	10.4	0.051	1.3	8.00	MW	CG	N
0.360	9.14	71225S	.88	22.4	.258	6.6	47	8.2	.26	6.6	12	54	.41	10.4	0.051	1.3	8.00	SST	CG	N
0.360	9.14	71247	.88	22.4	.250	6.4	75	13	.30	7.5	22	99	.45	11.4	0.055	1.4	8.13	MW	CG	N
0.360	9.14	71247S	.88	22.4	.250	6.4	64	11	.24	6.0	15	67	.45	11.4	0.055	1.4	8.13	SST	CG	N
0.360	9.14	71269	.88	22.4	.242	6.1	101	18	.27	6.9	27	121	.49	12.6	0.059	1.5	8.38	MW	CG	N
0.360	9.14	71269S	.88	22.4	.242	6.1	86	15	.22	5.5	18	82	.49	12.6	0.059	1.5	8.38	SST	CG	N
0.360	9.14	Y-24	.91	23.0	.290	7.4	9.1	1.6	.51	13	4.6	20	.32	8.0	0.035	0.9	9.00	SPR	CG	N
0.360	9.14	B2-14	.93	23.7	.258	6.6	6.3	1.1	.40	10	2.5	11	.54	13.6	0.051	1.3	9.50	MW	C	Z
0.360	9.14	M-133	.94	23.8	.330	8.4	.22	.04	.79	20	.17	.78	.15	3.8	0.015	0.4	9.00	SST	C	N
0.360	9.14	JJ-82	.94	23.8	.316	8.0	2.2	.39	.78	20	1.7	7.7	.15	3.9	0.022	0.6	6.00	MW	C	N
0.360	9.14	1929	.94	23.8	.310	7.9	3.9	.68	.63	16	2.5	11	.17	4.4	0.025	0.6	5.88	MW	C	Z
0.360	9.14	F-59	.94	23.8	.308	7.8	4.4	.78	.62	16	2.8	12	.18	4.6	0.026	0.7	6.00	MW	C	Z
0.360	9.14	A9-59	.94	23.8	.302	7.7	5.7	.99	.68	17	3.8	17	.20	5.2	0.029	0.7	7.00	MW	CG	N
0.360	9.14	S-179	.94	23.8	.298	7.6	5.6	.97	.56	14	3.1	14	.28	7.1	0.031	0.8	8.00	SST	C	N
0.360	9.14	KK-87	.94	23.8	.296	7.5	7.8	1.4	.65	17	5.1	23	.27	6.9	0.032	0.8	7.50	MW	C	N
0.360	9.14	F-60	.94	23.8	.270	6.9	32	5.6	.42	11	13	59	.41	10.3	0.045	1.1	8.00	MW	C	Z
0.360	9.14	S-373	.94	23.8	.150	3.8	1576	276	.05	1.3	81	361	.84	21.3	0.105	2.7	8.00	SST	CG	N
0.360	9.14	71035	.94	23.9	.308	7.8	4.6	.80	.61	15	2.8	12	.15	3.9	0.026	0.7	5.88	MW	CG	N
0.360	9.14	71035S	.94	23.9	.308	7.8	3.9	.68	.48	12	1.9	8.3	.15	3.9	0.026	0.7	5.88	SST	CG	N
0.360	9.14	71054	.94	23.9	.302	7.7	6.1	1.1	.63	16	3.8	17	.19	4.9	0.029	0.7	6.63	MW	CG	N
0.360	9.14	71054S	.94	23.9	.302	7.7	5.2	.91	.49	13	2.6	11	.19	4.9	0.029	0.7	6.63	SST	CG	N
0.360	9.14	71073	.94	23.9	.296	7.5	9.5	1.7	.54	14	5.1	23	.21	5.3	0.032	0.8	6.50	MW	CG	N
0.360	9.14	71073S	.94	23.9	.296	7.5	8.0	1.4	.43	11	3.4	15	.21	5.3	0.032	0.8	6.50	SST	CG	N
0.360	9.14	71091	.94	23.9	.290	7.4	12	2.1	.53	14	6.3	28	.25	6.4	0.035	0.9	7.25	MW	CG	N
0.360	9.14	71091S	.94	23.9	.290	7.4	10	1.8	.42	11	4.3	19	.25	6.4	0.035	0.9	7.25	SST	CG	N
0.360	9.14	71109	.94	23.9	.284	7.2	16	2.8	.51	13	8.1	36	.29	7.4	0.038	1.0	7.63	MW	CG	N
0.360	9.14	71109S	.94	23.9	.284	7.2	13	2.4	.41	10	5.5	24	.29	7.4	0.038	1.0	7.63	SST	CG	N
0.360	9.14	71127	.94	23.9	.280	7.1	19	3.3	.49	13	9.4	42	.32	8.0	0.040	1.0	7.88	MW	CG	N
0.360	9.14	71127S	.94	23.9	.280	7.1	16	2.8	.39	10	6.4	28	.32	8.0	0.040	1.0	7.88	SST	CG	N
0.360	9.14	71145	.94	23.9	.276	7.0	23	4.0	.47	12	11	48	.34	8.5	0.042	1.1	8.00	MW	CG	N
0.360	9.14	71145S	.94	23.9	.276	7.0	20	3.4	.37	9.5	7.3	33	.34	8.5	0.042	1.1	8.00	SST	CG	N
0.360	9.14	71163	.94	23.9	.270	6.9	30	5.3	.44	11	13	59	.37	9.4	0.045	1.1	8.25	MW	CG	N
0.360	9.14	71163S	.94	23.9	.270	6.9	26	4.5	.35	8.9	9.0	40	.37	9.4	0.045	1.1	8.25	SST	CG	N
0.360	9.14	71182	.94	23.9	.266	6.8	38	6.6	.40	10	15	67	.38	9.6	0.047	1.2	8.00	MW	CG	N
0.360	9.14	71182S	.94	23.9	.266	6.8	32	5.6	.32	8.0	10	45	.38	9.6	0.047	1.2	8.00	SST	CG	N
0.360	9.14	71204	.94	23.9	.262	6.7	44	7.7	.39	9.8	17	76	.40	10.3	0.049	1.2	8.25	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	71204S	.94	23.9	.262	6.7	38	6.6	.31	7.8	12	51	.40	10.3	0.049	1.2	8.25	SST	CG	N
0.360	9.14	71226	.94	23.9	.258	6.6	51	8.9	.35	8.9	18	80	.43	11.0	0.051	1.3	8.50	MW	CG	N
0.360	9.14	71226S	.94	23.9	.258	6.6	43	7.6	.28	7.1	12	54	.43	11.0	0.051	1.3	8.50	SST	CG	N
0.360	9.14	71248	.94	23.9	.250	6.4	70	12	.32	8.1	22	99	.47	12.0	0.055	1.4	8.63	MW	CG	N
0.360	9.14	71248S	.94	23.9	.250	6.4	59	10	.25	6.5	15	67	.47	12.0	0.055	1.4	8.63	SST	CG	N
0.360	9.14	71270	.94	23.9	.242	6.1	93	16	.29	7.4	27	121	.52	13.3	0.059	1.5	8.88	MW	CG	N
0.360	9.14	71270S	.94	23.9	.242	6.1	79	14	.23	5.9	18	82	.52	13.3	0.059	1.5	8.88	SST	CG	N
0.360	9.14	PP-49	.97	24.6	.280	7.1	10	1.8	.45	11	4.6	21	.52	13.2	0.040	1.0	13.0	SPR	CG	Z
0.360	9.14	I-8	.97	24.6	.224	5.7	178	31	.17	4.2	29	131	.68	17.3	0.068	1.7	9.00	SPR	C	N
0.360	9.14	NN-67	1.00	25.4	.328	8.3	.15	.03	.73	18	.11	.47	.27	6.9	0.016	0.4	16.0	SST	C	N
0.360	9.14	EE-64	1.00	25.4	.320	8.1	.98	.17	.82	21	.81	3.6	.18	4.6	0.020	0.5	8.00	MW	C	N
0.360	9.14	L-56	1.00	25.4	.318	8.1	2.1	.36	.75	19	1.6	6.9	.14	3.5	0.021	0.5	5.50	MW	C	N
0.360	9.14	10058	1.00	25.4	.316	8.0	2.2	.39	.81	21	1.8	8.0	.15	3.9	0.022	0.6	6.00	MW	C	GI
0.360	9.14	B5-43	1.00	25.4	.316	8.0	2.2	.39	.81	21	1.8	8.0	.13	3.4	0.022	0.6	6.00	MW	CG	N
0.360	9.14	2794	1.00	25.4	.308	7.8	1.4	.24	.58	15	.80	3.6	.42	10.6	0.026	0.7	15.0	MW	C	Z
0.360	9.14	71036	1.00	25.4	.308	7.8	4.1	.71	.68	17	2.8	12	.17	4.2	0.026	0.7	6.38	MW	CG	N
0.360	9.14	71036S	1.00	25.4	.308	7.8	3.4	.60	.54	14	1.9	8.3	.17	4.2	0.026	0.7	6.38	SST	CG	N
0.360	9.14	11735	1.00	25.4	.308	7.8	4.0	.69	.70	18	2.8	12	.20	5.0	0.026	0.7	6.50	MW	C	Z
0.360	9.14	10912	1.00	25.4	.306	7.8	5.2	.91	.59	15	3.1	14	.16	4.1	0.027	0.7	6.00	MW	CG	N
0.360	9.14	71055	1.00	25.4	.302	7.7	5.9	1.0	.65	16	3.8	17	.20	5.0	0.029	0.7	6.75	MW	CG	N
0.360	9.14	71055S	1.00	25.4	.302	7.7	5.0	.88	.51	13	2.6	11	.20	5.0	0.029	0.7	6.75	SST	CG	N
0.360	9.14	II-37	1.00	25.4	.300	7.6	3.6	.64	.64	16	2.3	10	.36	9.1	0.030	0.8	11.0	MW	C	N
0.360	9.14	PP-63	1.00	25.4	.300	7.6	5.8	1.0	.49	12	2.8	13	.21	5.3	0.030	0.8	7.00	SST	CG	N
0.360	9.14	71074	1.00	25.4	.296	7.5	8.5	1.5	.60	15	5.1	23	.22	5.7	0.032	0.8	7.00	MW	CG	N
0.360	9.14	71074S	1.00	25.4	.296	7.5	7.2	1.3	.47	12	3.4	15	.22	5.7	0.032	0.8	7.00	SST	CG	N
0.360	9.14	II-57	1.00	25.4	.290	7.4	11	1.9	.43	11	4.6	20	.28	7.1	0.035	0.9	8.00	SPR	C	Z
0.360	9.14	71092	1.00	25.4	.290	7.4	11	2.0	.57	14	6.3	28	.27	6.8	0.035	0.9	7.63	MW	CG	N
0.360	9.14	71092S	1.00	25.4	.290	7.4	9.5	1.7	.45	12	4.3	19	.27	6.8	0.035	0.9	7.63	SST	CG	N
0.360	9.14	71110	1.00	25.4	.284	7.2	15	2.6	.54	14	8.1	36	.30	7.7	0.038	1.0	8.00	MW	CG	N
0.360	9.14	71110S	1.00	25.4	.284	7.2	13	2.2	.43	11	5.5	24	.30	7.7	0.038	1.0	8.00	SST	CG	N
0.360	9.14	3446	1.00	25.4	.280	7.1	14	2.5	.48	12	6.8	30	.44	11.2	0.040	1.0	10.0	SPR	C	Z
0.360	9.14	71128	1.00	25.4	.280	7.1	18	3.1	.53	13	9.4	42	.34	8.5	0.040	1.0	8.38	MW	CG	N
0.360	9.14	71128S	1.00	25.4	.280	7.1	15	2.6	.42	11	6.4	28	.34	8.5	0.040	1.0	8.38	SST	CG	N
0.360	9.14	4281	1.00	25.4	.278	7.1	14	2.5	.51	13	7.1	32	.49	12.5	0.041	1.0	11.0	SPR	C	Z
0.360	9.14	Z-59	1.00	25.4	.278	7.1	13	2.3	.53	13	6.8	30	.43	10.9	0.041	1.0	10.5	SST	CG	N
0.360	9.14	B12-30	1.00	25.4	.278	7.1	19	3.4	.38	9.5	7.3	32	.35	8.9	0.041	1.0	8.50	SPR	CG	N
0.360	9.14	B1-63	1.00	25.4	.276	7.0	18	3.1	.41	10	7.3	33	.38	9.6	0.042	1.1	9.00	SST	CG	N
0.360	9.14	71146	1.00	25.4	.276	7.0	21	3.7	.51	13	11	48	.36	9.1	0.042	1.1	8.50	MW	CG	N
0.360	9.14	71146S	1.00	25.4	.276	7.0	18	3.2	.41	10	7.3	33	.36	9.1	0.042	1.1	8.50	SST	CG	N
0.360	9.14	XX-45	1.00	25.4	.272	6.9	27	4.6	.34	8.6	9.0	40	.37	9.5	0.044	1.1	8.50	SPR	CG	Z
0.360	9.14	10104	1.00	25.4	.270	6.9	27	4.8	.35	9.0	9.6	43	.45	11.4	0.045	1.1	9.00	SPR	C	Z
0.360	9.14	71164	1.00	25.4	.270	6.9	28	4.9	.47	12	13	59	.39	10.0	0.045	1.1	8.75	MW	CG	N
0.360	9.14	71164S	1.00	25.4	.270	6.9	24	4.2	.38	9.6	9.0	40	.39	10.0	0.045	1.1	8.75	SST	CG	N
0.360	9.14	1587	1.00	25.4	.268	6.8	26	4.6	.39	9.9	10	45	.46	11.7	0.046	1.2	10.0	SPR	CG	Z
0.360	9.14	71183	1.00	25.4	.266	6.8	35	6.2	.43	11	15	67	.40	10.1	0.047	1.2	8.50	MW	CG	N
0.360	9.14	71183S	1.00	25.4	.266	6.8	30	5.3	.34	8.6	10	45	.40	10.1	0.047	1.2	8.50	SST	CG	N
0.360	9.14	71205	1.00	25.4	.262	6.7	41	7.2	.41	11	17	76	.43	10.9	0.049	1.2	8.75	MW	CG	N
0.360	9.14	71205S	1.00	25.4	.262	6.7	35	6.1	.33	8.4	12	51	.43	10.9	0.049	1.2	8.75	SST	CG	N
0.360	9.14	71227	1.00	25.4	.258	6.6	48	8.4	.38	9.5	18	80	.45	11.5	0.051	1.3	8.88	MW	CG	N
0.360	9.14	71227S	1.00	25.4	.258	6.6	41	7.1	.30	7.6	12	54	.45	11.5	0.051	1.3	8.88	SST	CG	N
0.360	9.14	71249	1.00	25.4	.250	6.4	65	11	.34	8.7	22	99	.50	12.7	0.055	1.4	9.13	MW	CG	N
0.360	9.14	71249S	1.00	25.4	.250	6.4	55	9.6	.27	7.0	15	67	.50	12.7	0.055	1.4	9.13	SST	CG	N
0.360	9.14	2813	1.03	26.2	.270	6.9	27	4.8	.49	12	13	59	.41	10.3	0.045	1.1	9.00	MW	CG	Z
0.360	9.14	A13-34	1.03	26.2	.268	6.8	27	4.7	.36	9.1	9.6	43	.41	10.5	0.046	1.2	9.00	SST	CG	N
0.360	9.14	AA-24	1.03	26.2	.260	6.6	38	6.7	.32	8.1	12	54	.50	12.7	0.050	1.3	10.0	SPR	CG	N
0.360	9.14	S-1282	1.06	27.0	.310	7.9	2.6	.46	.63	16	1.7	7.3	.18	4.4	0.025	0.6	7.00	SST	CG	N
0.360	9.14	JJ-35	1.06	27.0	.278	7.1	11	1.9	.57	14	6.3	28	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.360	9.14	KK-95	1.06	27.0	.266	6.8	29	5.1	.38	9.6	11	48	.47	11.9	0.047	1.2	10.0	SPR	CG	Z
0.360	9.14	12330	1.09	27.8	.294	7.5	7.9	1.4	.47	12	3.8	17	.28	7.1	0.033	0.8	7.50	SST	C	N
0.360	9.14	S-1582	1.09	27.8	.288	7.3	8.5	1.5	.55	14	4.7	21	.34	8.7	0.036	0.9	9.50	SST	CG	N
0.360	9.14	A14-29	1.09	27.8	.272	6.9	23	4.0	.39	9.9	9.0	40	.42	10.6	0.044	1.1	9.50	SPR	CG	GI
0.360	9.14	S-857	1.09	27.8	.266	6.8	19	3.3	.49	13	9.4	42	.60	15.2	0.047	1.2	12.8	SST	CG	N
0.360	9.14	10866	1.09	27.8	.248	6.3	44	7.7	.36	9.2	16	71	.69	17.4	0.056	1.4	12.3	SST	CG	N
0.360	9.14	L-86	1.13	28.6	.338	8.6	.02	.00	.85	22	.02	.07	.28	7.0	0.011	0.3	24.0	SST	C	N
0.360	9.14	10162	1.13	28.6	.310	7.9	3.0	.53	.82	21	2.5	11	.20	5.1	0.025	0.6	7.00	MW	C	Z
0.360	9.14	K-34	1.13	28.6	.304	7.7	1.9	.34	.76	19	1.5	6.5	.36	9.2	0.028	0.7	13.0	SST	CG	N
0.360	9.14	2508	1.13	28.6	.302	7.7	4.9	.86	.78	20	3.8	17	.25	6.5	0.029	0.7	7.75	MW	C	Z
0.360	9.14	QQ-50	1.13	28.6	.302	7.7	4.6	.81	.83	21	3.8	17	.20	5.1	0.029	0.7	6.50	MW	C	Z
0.360	9.14	10108	1.13	28.6	.296	7.5	7.2	1.3	.71	18	5.1	23	.29	7.3	0.032	0.8	8.00	MW	C	GI
0.360	9.14	B12-42	1.13	28.6	.296	7.5	7.8	1.4	.47	12	3.7	16	.24	6.1	0.032	0.8	7.50	SPR	CG	N
0.360	9.14	10316	1.13	28.6	.278	7.1	14	2.5	.52	13	7.3	32	.49	12.5	0.041	1.0	11.0	SPR	C	Z
0.360	9.14	S-1124	1.13	28.6	.276	7.0	12	2.0	.60	15	7.0	31	.53	13.3	0.042	1.1	12.5	SST	CG	N
0.360	9.14	S-1285	1.13	28.6	.272	6.9	19	3.3	.45	11	8.4	37	.44	11.2	0.044	1.1	10.0	SST	CG	N
0.360	9.14	WW-41	1.13	28.6	.270	6.9	21	3.6	.43	11	9.0	40	.50	12.6	0.045	1.1	10.0	SST	C	N
0.360	9.14	S-1586	1.13	28.6	.242	6.1	64	11	.29	7.4	18	82	.65	16.5	0.059	1.5	11.0	SST	CG	N
0.360	9.14	3898	1.13	28.6	.236	6.0	101	18	.22	5.7	23	101	.62	15.7	0.062	1.6	10.0	HD	CG	Z
0.360	9.14	71037	1.13	28.7	.308	7.8	3.7	.65	.75	19	2.8	12	.18	4.5	0.026	0.7	6.75	MW	CG	N
0.360	9.14	71037S	1.13	28.7	.308	7.8	3.1	.55	.59	15	1.9	8.3	.18	4.5	0.026	0.7	6.75	SST	CG	N
0.360	9.14	71056	1.13	28.7	.302	7.7	5.2	.91	.74	19	3.8	17	.21	5.4	0.029	0.7	7.38	MW	CG	N
0.360	9.14	71056S	1.13	28.7	.302	7.7	4.4	.77	.58	15	2.6	11	.21	5.4	0.029	0.7	7.38	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	71075	1.13	28.7	.296	7.5	7.5	1.3	.68	17	5.1	23	.25	6.3	0.032	0.8	7.75	MW	CG	N
0.360	9.14	71075S	1.13	28.7	.296	7.5	6.4	1.1	.54	14	3.4	15	.25	6.3	0.032	0.8	7.75	SST	CG	N
0.360	9.14	71093	1.13	28.7	.290	7.4	9.8	1.7	.65	17	6.3	28	.30	7.6	0.035	0.9	8.50	MW	CG	N
0.360	9.14	71093S	1.13	28.7	.290	7.4	8.3	1.5	.52	13	4.3	19	.30	7.6	0.035	0.9	8.50	SST	CG	N
0.360	9.14	71111	1.13	28.7	.284	7.2	13	2.3	.62	16	8.1	36	.34	8.6	0.038	1.0	8.88	MW	CG	N
0.360	9.14	71111S	1.13	28.7	.284	7.2	11	1.9	.50	13	5.5	24	.34	8.6	0.038	1.0	8.88	SST	CG	N
0.360	9.14	71129	1.13	28.7	.280	7.1	16	2.7	.60	15	9.4	42	.37	9.3	0.040	1.0	9.13	MW	CG	N
0.360	9.14	71129S	1.13	28.7	.280	7.1	13	2.3	.48	12	6.4	28	.37	9.3	0.040	1.0	9.13	SST	CG	N
0.360	9.14	71147	1.13	28.7	.276	7.0	19	3.3	.58	15	11	48	.39	10.0	0.042	1.1	9.38	MW	CG	N
0.360	9.14	71147S	1.13	28.7	.276	7.0	16	2.8	.46	12	7.3	33	.39	10.0	0.042	1.1	9.38	SST	CG	N
0.360	9.14	71165	1.13	28.7	.270	6.9	25	4.3	.54	14	13	59	.43	11.0	0.045	1.1	9.63	MW	CG	N
0.360	9.14	71165S	1.13	28.7	.270	6.9	21	3.7	.43	11	9.0	40	.43	11.0	0.045	1.1	9.63	SST	CG	N
0.360	9.14	71184	1.13	28.7	.266	6.8	31	5.5	.48	12	15	67	.44	11.2	0.047	1.2	9.38	MW	CG	N
0.360	9.14	71184S	1.13	28.7	.266	6.8	27	4.6	.38	9.8	10	45	.44	11.2	0.047	1.2	9.38	SST	CG	N
0.360	9.14	71206	1.13	28.7	.262	6.7	36	6.3	.47	12	17	76	.47	12.0	0.049	1.2	9.63	MW	CG	N
0.360	9.14	71206S	1.13	28.7	.262	6.7	31	5.4	.37	9.5	12	51	.47	12.0	0.049	1.2	9.63	SST	CG	N
0.360	9.14	71228	1.13	28.7	.258	6.6	42	7.4	.43	11	18	80	.50	12.8	0.051	1.3	9.88	MW	CG	N
0.360	9.14	71228S	1.13	28.7	.258	6.6	36	6.3	.34	8.6	12	54	.50	12.8	0.051	1.3	9.88	SST	CG	N
0.360	9.14	71250	1.13	28.7	.250	6.4	57	10	.39	9.9	22	99	.56	14.1	0.055	1.4	10.1	MW	CG	N
0.360	9.14	71250S	1.13	28.7	.250	6.4	48	8.5	.31	7.9	15	67	.56	14.1	0.055	1.4	10.1	SST	CG	N
0.360	9.14	71271	1.13	28.7	.242	6.1	77	13	.36	9.1	27	121	.61	15.5	0.059	1.5	10.4	MW	CG	N
0.360	9.14	71271S	1.13	28.7	.242	6.1	65	11	.28	7.2	18	82	.61	15.5	0.059	1.5	10.4	SST	CG	N
0.360	9.14	PP-77	1.16	29.4	.300	7.6	4.7	.83	.60	15	2.8	13	.24	6.1	0.030	0.8	8.00	SST	CG	N
0.360	9.14	F-35	1.19	30.2	.308	7.8	3.6	.62	.78	20	2.8	12	.21	5.3	0.026	0.7	7.00	MW	C	Z
0.360	9.14	YY-43	1.19	30.2	.292	7.4	5.1	.89	.71	18	3.6	16	.48	12.1	0.034	0.9	13.0	SPR	C	Z
0.360	9.14	3664	1.19	30.2	.270	6.9	15	2.6	.47	12	6.9	30	.72	18.3	0.045	1.1	15.0	SPR	C	Z
0.360	9.14	71038	1.25	31.8	.308	7.8	3.3	.57	.85	22	2.8	12	.19	4.9	0.026	0.7	7.38	MW	CG	N
0.360	9.14	71038S	1.25	31.8	.308	7.8	2.8	.48	.67	17	1.9	8.3	.19	4.9	0.026	0.7	7.38	SST	CG	N
0.360	9.14	S-1272	1.25	31.8	.302	7.7	4.5	.78	.57	15	2.6	11	.25	6.3	0.029	0.7	7.50	SST	C	N
0.360	9.14	71057	1.25	31.8	.302	7.7	4.6	.81	.83	21	3.8	17	.24	6.0	0.029	0.7	8.13	MW	CG	N
0.360	9.14	71057S	1.25	31.8	.302	7.7	3.9	.68	.66	17	2.6	11	.24	6.0	0.029	0.7	8.13	SST	CG	N
0.360	9.14	NN-46	1.25	31.8	.300	7.6	5.8	1.0	.49	12	2.8	13	.21	5.3	0.030	0.8	7.00	SST	CG	N
0.360	9.14	71076	1.25	31.8	.296	7.5	6.8	1.2	.75	19	5.1	23	.26	6.7	0.032	0.8	8.25	MW	CG	N
0.360	9.14	71076S	1.25	31.8	.296	7.5	5.8	1.0	.59	15	3.4	15	.26	6.7	0.032	0.8	8.25	SST	CG	N
0.360	9.14	12502	1.25	31.8	.292	7.4	8.0	1.4	.51	13	4.1	18	.31	7.8	0.034	0.9	8.00	SST	C	N
0.360	9.14	71094	1.25	31.8	.290	7.4	8.8	1.5	.73	18	6.3	28	.32	8.1	0.035	0.9	9.13	MW	CG	N
0.360	9.14	71094S	1.25	31.8	.290	7.4	7.4	1.3	.58	15	4.3	19	.32	8.1	0.035	0.9	9.13	SST	CG	N
0.360	9.14	S-1281	1.25	31.8	.286	7.3	9.4	1.6	.54	14	5.1	23	.35	8.9	0.037	0.9	9.50	SST	CG	N
0.360	9.14	TT-38	1.25	31.8	.284	7.2	9.1	1.6	.64	16	5.8	26	.49	12.5	0.038	1.0	12.0	SPR	C	Z
0.360	9.14	71112	1.25	31.8	.284	7.2	12	2.1	.68	17	8.1	36	.37	9.3	0.038	1.0	9.63	MW	CG	N
0.360	9.14	71112S	1.25	31.8	.284	7.2	10	1.8	.54	14	5.5	24	.37	9.3	0.038	1.0	9.63	SST	CG	N
0.360	9.14	71130	1.25	31.8	.280	7.1	14	2.4	.67	17	9.4	42	.40	10.2	0.040	1.0	10.0	MW	CG	N
0.360	9.14	71130S	1.25	31.8	.280	7.1	12	2.1	.54	14	6.4	28	.40	10.2	0.040	1.0	10.0	SST	CG	N
0.360	9.14	71148	1.25	31.8	.276	7.0	17	3.0	.64	16	11	48	.43	10.8	0.042	1.1	10.1	MW	CG	N
0.360	9.14	71148S	1.25	31.8	.276	7.0	14	2.5	.51	13	7.3	33	.43	10.8	0.042	1.1	10.1	SST	CG	N
0.360	9.14	71166	1.25	31.8	.270	6.9	22	3.8	.60	15	13	59	.48	12.1	0.045	1.1	10.6	MW	CG	N
0.360	9.14	71166S	1.25	31.8	.270	6.9	19	3.3	.48	12	9.0	40	.48	12.1	0.045	1.1	10.6	SST	CG	N
0.360	9.14	71185	1.25	31.8	.266	6.8	28	4.9	.54	14	15	67	.48	12.2	0.047	1.2	10.3	MW	CG	N
0.360	9.14	71185S	1.25	31.8	.266	6.8	24	4.1	.43	11	10	45	.48	12.2	0.047	1.2	10.3	SST	CG	N
0.360	9.14	71207	1.25	31.8	.262	6.7	32	5.6	.53	13	17	76	.51	13.1	0.049	1.2	10.5	MW	CG	N
0.360	9.14	71207S	1.25	31.8	.262	6.7	27	4.8	.42	11	12	51	.51	13.1	0.049	1.2	10.5	SST	CG	N
0.360	9.14	71229	1.25	31.8	.258	6.6	37	6.5	.48	12	18	80	.55	14.1	0.051	1.3	10.9	MW	CG	N
0.360	9.14	71229S	1.25	31.8	.258	6.6	32	5.6	.38	9.7	12	54	.55	14.1	0.051	1.3	10.9	SST	CG	N
0.360	9.14	71251	1.25	31.8	.250	6.4	51	8.9	.44	11	22	99	.61	15.5	0.055	1.4	11.1	MW	CG	N
0.360	9.14	71251S	1.25	31.8	.250	6.4	43	7.5	.35	8.9	15	67	.61	15.5	0.055	1.4	11.1	SST	CG	N
0.360	9.14	71272	1.25	31.8	.242	6.1	68	12	.40	10	27	121	.67	17.0	0.059	1.5	11.4	MW	CG	N
0.360	9.14	71272S	1.25	31.8	.242	6.1	58	10	.32	8.2	18	82	.67	17.0	0.059	1.5	11.4	SST	CG	N
0.360	9.14	10450	1.28	32.5	.302	7.7	2.6	.45	.88	22	2.3	10	.41	10.3	0.029	0.7	13.0	MW	C	Z
0.360	9.14	HH-85	1.31	33.3	.328	8.3	.18	.03	1.1	28	.20	.89	.22	5.7	0.016	0.4	13.0	SST	C	N
0.360	9.14	S-1270	1.31	33.3	.278	7.1	10	1.7	.68	17	6.8	30	.53	13.5	0.041	1.0	13.0	SST	CG	N
0.360	9.14	MM-83	1.31	33.3	.276	7.0	17	3.0	.46	12	7.8	35	.47	12.0	0.042	1.1	10.3	SPR	C	GI
0.360	9.14	3265	1.31	33.3	.274	7.0	18	3.2	.46	12	8.4	37	.45	11.5	0.043	1.1	10.5	SPR	CG	Z
0.360	9.14	F-62	1.31	33.3	.270	6.9	23	4.0	.42	11	9.6	43	.51	13.0	0.045	1.1	11.0	SPR	C	Z
0.360	9.14	12503	1.31	33.3	.268	6.8	23	4.1	.41	10	9.6	43	.50	12.6	0.046	1.2	9.75	SST	C	N
0.360	9.14	VV-53	1.31	33.3	.248	6.3	56	9.9	.30	7.6	17	75	.62	15.6	0.056	1.4	11.0	SPR	CG	Z
0.360	9.14	S-3185	1.33	33.7	.280	7.1	9.0	1.6	.71	18	6.4	28	.52	13.2	0.040	1.0	13.0	SST	CG	N
0.360	9.14	2871	1.34	34.1	.284	7.2	10	1.8	.80	20	8.1	36	.42	10.6	0.038	1.0	11.0	MW	CG	Z
0.360	9.14	O-44	1.34	34.1	.236	6.0	74	13	.31	7.8	23	101	.87	22.0	0.062	1.6	13.0	SPR	C	N
0.360	9.14	A13-31	1.38	34.9	.292	7.4	7.5	1.3	.59	15	4.4	20	.32	8.2	0.034	0.9	9.50	SPR	CG	GI
0.360	9.14	3930	1.38	34.9	.284	7.2	13	2.3	.45	11	5.8	26	.38	9.7	0.038	1.0	9.00	SPR	C	Z
0.360	9.14	3601	1.38	34.9	.270	6.9	19	3.3	.50	13	9.6	43	.59	14.9	0.045	1.1	12.0	SPR	C	Z
0.360	9.14	VV-67	1.38	34.9	.258	6.6	27	4.7	.48	12	13	57	.74	18.8	0.051	1.3	14.5	SPR	CG	GI
0.360	9.14	S-789	1.38	34.9	.240	6.1	67	12	.29	7.3	19	86	.66	16.8	0.060	1.5	11.0	SST	CG	N
0.360	9.14	71040	1.38	35.1	.308	7.8	3.0	.53	.92	23	2.8	12	.20	5.2	0.026	0.7	7.88	MW	CG	N
0.360	9.14	71040S	1.38	35.1	.308	7.8	2.6	.45	.73	18	1.9	8.3	.20	5.2	0.026	0.7	7.88	SST	CG	N
0.360	9.14	71058	1.38	35.1	.302	7.7	4.2	.73	.92	23	3.8	17	.25	6.4	0.029	0.7	8.75	MW	CG	N
0.360	9.14	71058S	1.38	35.1	.302	7.7	3.5	.62	.73	18	2.6	11	.25	6.4	0.029	0.7	8.75	SST	CG	N
0.360	9.14	71077	1.38	35.1	.296	7.5	6.3	1.1	.82	21	5.1	23	.28	7.2	0.032	0.8	8.88	MW	CG	N
0.360	9.14	71077S	1.38	35.1	.296	7.5	5.3	.93	.65	16	3.4	15	.28	7.2	0.032	0.8	8.88	SST	CG	N
0.360	9.14	71095	1.38	35.1	.290	7.4	7.9	1.4	.81	21	6.3	28	.35	8.9	0.035	0.9	10.0	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.360	9.14	71095S	1.38	35.1	.290	7.4	6.7	1.2	.64	16	4.3	19	.35	8.9	0.035	0.9	10.0	SST	CG	N
0.360	9.14	71113	1.38	35.1	.284	7.2	10	1.8	.79	20	8.1	36	.41	10.4	0.038	1.0	10.8	MW	CG	N
0.360	9.14	71113S	1.38	35.1	.284	7.2	8.7	1.5	.63	16	5.5	24	.41	10.4	0.038	1.0	10.8	SST	CG	N
0.360	9.14	71131	1.38	35.1	.280	7.1	13	2.2	.75	19	9.4	42	.44	11.2	0.040	1.0	11.0	MW	CG	N
0.360	9.14	71131S	1.38	35.1	.280	7.1	11	1.9	.60	15	6.4	28	.44	11.2	0.040	1.0	11.0	SST	CG	N
0.360	9.14	71149	1.38	35.1	.276	7.0	16	2.8	.69	17	11	48	.45	11.5	0.042	1.1	10.8	MW	CG	N
0.360	9.14	71149S	1.38	35.1	.276	7.0	13	2.4	.55	14	7.3	33	.45	11.5	0.042	1.1	10.8	SST	CG	N
0.360	9.14	71167	1.38	35.1	.270	6.9	20	3.5	.67	17	13	59	.52	13.1	0.045	1.1	11.5	MW	CG	N
0.360	9.14	71167S	1.38	35.1	.270	6.9	17	3.0	.53	14	9.0	40	.52	13.1	0.045	1.1	11.5	SST	CG	N
0.360	9.14	71186	1.38	35.1	.266	6.8	25	4.4	.61	15	15	67	.53	13.4	0.047	1.2	11.3	MW	CG	N
0.360	9.14	71186S	1.38	35.1	.266	6.8	21	3.7	.48	12	10	45	.53	13.4	0.047	1.2	11.3	SST	CG	N
0.360	9.14	71208	1.38	35.1	.262	6.7	29	5.1	.59	15	17	76	.56	14.3	0.049	1.2	11.5	MW	CG	N
0.360	9.14	71208S	1.38	35.1	.262	6.7	25	4.3	.47	12	12	51	.56	14.3	0.049	1.2	11.5	SST	CG	N
0.360	9.14	71230	1.38	35.1	.258	6.6	34	5.9	.53	14	18	80	.61	15.4	0.051	1.3	11.9	MW	CG	N
0.360	9.14	71230S	1.38	35.1	.258	6.6	28	5.0	.43	11	12	54	.61	15.4	0.051	1.3	11.9	SST	CG	N
0.360	9.14	71252	1.38	35.1	.250	6.4	45	8.0	.49	12	22	99	.67	17.1	0.055	1.4	12.3	MW	CG	N
0.360	9.14	71252S	1.38	35.1	.250	6.4	39	6.8	.39	9.9	15	67	.67	17.1	0.055	1.4	12.3	SST	CG	N
0.360	9.14	71273	1.38	35.1	.242	6.1	61	11	.45	11	27	121	.74	18.7	0.059	1.5	12.5	MW	CG	N
0.360	9.14	71273S	1.38	35.1	.242	6.1	52	9.0	.36	9.1	18	82	.74	18.7	0.059	1.5	12.5	SST	CG	N
0.360	9.14	S-827	1.41	35.7	.294	7.5	5.4	.94	.70	18	3.8	17	.37	9.3	0.033	0.8	10.0	SST	C	N
0.360	9.14	A14-43	1.44	36.5	.294	7.5	5.2	.92	.72	18	3.8	17	.34	8.6	0.033	0.8	10.3	SST	CG	N
0.360	9.14	S-1284	1.44	36.5	.286	7.3	8.5	1.5	.59	15	5.1	23	.38	9.6	0.037	0.9	10.3	SST	CG	N
0.360	9.14	2802	1.44	36.5	.270	6.9	17	3.0	.77	19	13	59	.63	16.0	0.045	1.1	13.0	MW	C	Z
0.360	9.14	3742	1.44	36.5	.256	6.5	28	4.9	.49	12	14	61	.78	19.8	0.052	1.3	15.0	SPR	CG	Z
0.360	9.14	N-52	1.44	36.5	.246	6.2	73	13	.24	6.2	18	79	.60	15.2	0.057	1.4	9.50	SPR	C	N
0.360	9.14	10724	1.47	37.3	.278	7.1	11	1.9	.68	17	7.3	32	.61	15.4	0.041	1.0	13.8	SPR	C	Z
0.360	9.14	N-47	1.47	37.3	.236	6.0	68	12	.34	8.5	23	101	.87	22.0	0.062	1.6	14.0	SPR	CG	Z
0.360	9.14	HH-12	1.50	38.1	.312	7.9	1.3	.22	1.2	30	1.5	6.7	.31	7.9	0.024	0.6	12.0	MW	C	N
0.360	9.14	71041	1.50	38.1	.308	7.8	2.8	.48	1.0	26	2.8	12	.22	5.5	0.026	0.7	8.38	MW	CG	N
0.360	9.14	71041S	1.50	38.1	.308	7.8	2.3	.41	.79	20	1.9	8.3	.22	5.5	0.026	0.7	8.38	SST	CG	N
0.360	9.14	71059	1.50	38.1	.302	7.7	3.8	.67	1.0	25	3.8	17	.27	6.9	0.029	0.7	9.38	MW	CG	N
0.360	9.14	71059S	1.50	38.1	.302	7.7	3.3	.57	.79	20	2.6	11	.27	6.9	0.029	0.7	9.38	SST	CG	N
0.360	9.14	HH-87	1.50	38.1	.300	7.6	2.6	.45	1.1	27	2.8	12	.42	10.7	0.030	0.8	13.0	SST	C	N
0.360	9.14	S-1286	1.50	38.1	.298	7.6	4.0	.69	.79	20	3.1	14	.32	8.1	0.031	0.8	10.3	SST	CG	N
0.360	9.14	1597	1.50	38.1	.296	7.5	5.1	.89	1.0	26	5.1	23	.37	9.3	0.032	0.8	10.5	MW	C	Z
0.360	9.14	71078	1.50	38.1	.296	7.5	5.5	.95	.94	24	5.1	23	.32	8.0	0.032	0.8	9.88	MW	CG	N
0.360	9.14	71078S	1.50	38.1	.296	7.5	4.6	.81	.74	19	3.4	15	.32	8.0	0.032	0.8	9.88	SST	CG	N
0.360	9.14	K-26	1.50	38.1	.294	7.5	3.5	.60	.96	24	3.3	15	.54	13.6	0.033	0.8	16.3	SPR	CG	GI
0.360	9.14	S-1567	1.50	38.1	.292	7.4	4.7	.83	.87	22	4.1	18	.43	10.8	0.034	0.9	12.5	SST	CG	N
0.360	9.14	71096	1.50	38.1	.290	7.4	7.2	1.3	.89	23	6.3	28	.38	9.6	0.035	0.9	10.8	MW	CG	N
0.360	9.14	71096S	1.50	38.1	.290	7.4	6.1	1.1	.71	18	4.3	19	.38	9.6	0.035	0.9	10.8	SST	CG	N
0.360	9.14	G-88	1.50	38.1	.286	7.3	8.3	1.4	.61	16	5.1	23	.39	9.9	0.037	0.9	10.5	SST	CG	N
0.360	9.14	B3-67	1.50	38.1	.286	7.3	6.0	1.1	.84	21	5.1	23	.54	13.6	0.037	0.9	13.5	SST	C	N
0.360	9.14	71114	1.50	38.1	.284	7.2	9.3	1.6	.87	22	8.1	36	.44	11.2	0.038	1.0	11.6	MW	CG	N
0.360	9.14	71114S	1.50	38.1	.284	7.2	7.9	1.4	.69	18	5.5	24	.44	11.2	0.038	1.0	11.6	SST	CG	N
0.360	9.14	A13-4	1.50	38.1	.284	7.2	9.8	1.7	.60	15	5.8	26	.43	10.9	0.038	1.0	11.3	SPR	CG	GI
0.360	9.14	GG-85	1.50	38.1	.280	7.1	9.0	1.6	.71	18	6.4	28	.52	13.2	0.040	1.0	13.0	SST	CG	N
0.360	9.14	71132	1.50	38.1	.280	7.1	12	2.0	.81	21	9.4	42	.47	11.8	0.040	1.0	11.6	MW	CG	N
0.360	9.14	71132S	1.50	38.1	.280	7.1	9.9	1.7	.65	16	6.4	28	.47	11.8	0.040	1.0	11.6	SST	CG	N
0.360	9.14	71150	1.50	38.1	.276	7.0	15	2.5	.75	19	11	48	.49	12.4	0.042	1.1	11.6	MW	CG	N
0.360	9.14	71150S	1.50	38.1	.276	7.0	12	2.2	.60	15	7.3	33	.49	12.4	0.042	1.1	11.6	SST	CG	N
0.360	9.14	S-1308	1.50	38.1	.272	6.9	14	2.4	.62	16	8.4	37	.57	14.5	0.044	1.1	13.0	SST	CG	N
0.360	9.14	71168	1.50	38.1	.270	6.9	18	3.1	.74	19	13	59	.56	14.3	0.045	1.1	12.5	MW	CG	N
0.360	9.14	71168S	1.50	38.1	.270	6.9	15	2.7	.59	15	9.0	40	.56	14.3	0.045	1.1	12.5	SST	CG	N
0.360	9.14	2615	1.50	38.1	.268	6.8	20	3.5	.71	18	14	63	.58	14.6	0.046	1.2	12.5	MW	CG	Z
0.360	9.14	71187	1.50	38.1	.266	6.8	23	4.0	.66	17	15	67	.56	14.3	0.047	1.2	12.0	MW	CG	N
0.360	9.14	71187S	1.50	38.1	.266	6.8	19	3.4	.53	13	10	45	.56	14.3	0.047	1.2	12.0	SST	CG	N
0.360	9.14	71209	1.50	38.1	.262	6.7	27	4.6	.64	16	17	76	.61	15.4	0.049	1.2	12.4	MW	CG	N
0.360	9.14	71209S	1.50	38.1	.262	6.7	23	3.9	.51	13	12	51	.61	15.4	0.049	1.2	12.4	SST	CG	N
0.360	9.14	71231	1.50	38.1	.258	6.6	31	5.4	.58	15	18	80	.65	16.5	0.051	1.3	12.8	MW	CG	N
0.360	9.14	71231S	1.50	38.1	.258	6.6	26	4.6	.46	12	12	54	.65	16.5	0.051	1.3	12.8	SST	CG	N
0.360	9.14	71253	1.50	38.1	.250	6.4	42	7.3	.54	14	22	99	.72	18.3	0.055	1.4	13.1	MW	CG	N
0.360	9.14	71253S	1.50	38.1	.250	6.4	35	6.2	.43	11	15	67	.72	18.3	0.055	1.4	13.1	SST	CG	N
0.360	9.14	71274	1.50	38.1	.242	6.1	56	9.7	.49	12	27	121	.80	20.2	0.059	1.5	13.5	MW	CG	N
0.360	9.14	71274S	1.50	38.1	.242	6.1	47	8.3	.39	10	18	82	.80	20.2	0.059	1.5	13.5	SST	CG	N
0.360	9.14	JJ-16	1.50	38.1	.240	6.1	103	18	.19	4.8	19	86	.54	13.7	0.060	1.5	8.00	SST	C	N
0.360	9.14	S-1653	1.53	38.9	.298	7.6	4.0	.71	.77	20	3.1	14	.35	8.9	0.031	0.8	10.3	SST	C	N
0.360	9.14	A15-54	1.53	38.9	.294	7.5	6.0	1.0	.94	24	5.6	25	.37	9.4	0.033	0.8	10.3	MW	C	N
0.360	9.14	F-63	1.53	38.9	.270	6.9	17	3.0	.55	14	9.6	43	.63	16.0	0.045	1.1	13.0	SPR	C	Z
0.360	9.14	S-850	1.63	41.3	.298	7.6	3.5	.62	.88	22	3.1	14	.38	9.6	0.031	0.8	11.3	SST	C	N
0.360	9.14	A13-41	1.63	41.3	.248	6.3	51	8.9	.33	8.5	17	75	.67	17.1	0.056	1.4	12.0	SPR	CG	N
0.360	9.14	RR-8	1.69	42.8	.298	7.6	2.3	.41	1.2	30	2.8	12	.50	12.6	0.031	0.8	16.0	SST	C	N
0.360	9.14	W-31	1.69	42.8	.268	6.8	12	2.1	.80	20	9.6	43	.81	20.4	0.046	1.2	17.5	SST	CG	N
0.360	9.14	B8-56	1.69	42.8	.268	6.8	14	2.5	.73	19	10	45	.78	19.9	0.046	1.2	17.0	SPR	CG	N
0.360	9.14	10245	1.69	42.8	.266	6.8	29	5.1	.38	9.6	11	48	.52	13.1	0.047	1.2	10.0	SPR	C	Z
0.360	9.14	10623	1.75	44.5	.324	8.2	.38	.07	1.6	39	.58	2.6	.20	5.0	0.018	0.5	11.0	SST	CG	N
0.360	9.14	FF-96	1.75	44.5	.310	7.9	1.4	.25	1.4	36	2.0	9.0	.34	8.6	0.025	0.6	12.5	MW	C	Z
0.360	9.14	71042	1.75	44.5	.308	7.8	2.4	.42	1.2	29	2.8	12	.24	6.2	0.026	0.7	9.38	MW	CG	N
0.360	9.14	71042S	1.75	44.5	.308	7.8	2.0	.36	.91	23	1.9	8.3	.24	6.2	0.026	0.7	9.38	SST	CG	N
0.360	9.14	71060	1.75	44.5	.302	7.7	3.3	.57	1.2	30	3.8	17	.30	7.7	0.029	0.7	10.5	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	71060S	1.75	44.5	.302	7.7	2.8	.49	.92	23	2.6	11	.30	7.7	0.029	0.7	10.5	SST	CG	N
0.360	9.14	71079	1.75	44.5	.296	7.5	4.6	.81	1.1	28	5.1	23	.36	9.1	0.032	0.8	11.3	MW	CG	N
0.360	9.14	71079S	1.75	44.5	.296	7.5	3.9	.68	.88	22	3.4	15	.36	9.1	0.032	0.8	11.3	SST	CG	N
0.360	9.14	71097	1.75	44.5	.290	7.4	6.2	1.1	1.0	26	6.3	28	.42	10.8	0.035	0.9	12.1	MW	CG	N
0.360	9.14	71097S	1.75	44.5	.290	7.4	5.3	.92	.81	21	4.3	19	.42	10.8	0.035	0.9	12.1	SST	CG	N
0.360	9.14	71115	1.75	44.5	.284	7.2	8.3	1.4	.98	25	8.1	36	.49	12.4	0.038	1.0	12.9	MW	CG	N
0.360	9.14	71115S	1.75	44.5	.284	7.2	7.0	1.2	.78	20	5.5	24	.49	12.4	0.038	1.0	12.9	SST	CG	N
0.360	9.14	71133	1.75	44.5	.280	7.1	9.8	1.7	.96	24	9.4	42	.54	13.7	0.040	1.0	13.5	MW	CG	N
0.360	9.14	71133S	1.75	44.5	.280	7.1	8.3	1.5	.76	19	6.4	28	.54	13.7	0.040	1.0	13.5	SST	CG	N
0.360	9.14	71151	1.75	44.5	.276	7.0	12	2.1	.91	23	11	48	.58	14.7	0.042	1.1	13.8	MW	CG	N
0.360	9.14	71151S	1.75	44.5	.276	7.0	10	1.8	.73	18	7.3	33	.58	14.7	0.042	1.1	13.8	SST	CG	N
0.360	9.14	71169	1.75	44.5	.270	6.9	15	2.7	.86	22	13	59	.64	16.3	0.045	1.1	14.3	MW	CG	N
0.360	9.14	71169S	1.75	44.5	.270	6.9	13	2.3	.69	17	9.0	40	.64	16.3	0.045	1.1	14.3	SST	CG	N
0.360	9.14	HH-89	1.75	44.5	.268	6.8	12	2.1	.81	20	9.7	43	.94	24.0	0.046	1.2	19.5	SPR	C	Z
0.360	9.14	71188	1.75	44.5	.266	6.8	19	3.4	.78	20	15	67	.65	16.6	0.047	1.2	13.9	MW	CG	N
0.360	9.14	71188S	1.75	44.5	.266	6.8	16	2.9	.62	16	10	45	.65	16.6	0.047	1.2	13.9	SST	CG	N
0.360	9.14	K-45	1.75	44.5	.264	6.7	16	2.8	.73	19	12	52	.91	23.2	0.048	1.2	18.0	SPR	C	GI
0.360	9.14	71210	1.75	44.5	.262	6.7	22	3.9	.76	19	17	76	.70	17.7	0.049	1.2	14.3	MW	CG	N
0.360	9.14	71210S	1.75	44.5	.262	6.7	19	3.3	.60	15	12	51	.70	17.7	0.049	1.2	14.3	SST	CG	N
0.360	9.14	71232	1.75	44.5	.258	6.6	26	4.6	.69	17	18	80	.75	18.9	0.051	1.3	14.6	MW	CG	N
0.360	9.14	71232S	1.75	44.5	.258	6.6	22	3.9	.55	14	12	54	.75	18.9	0.051	1.3	14.6	SST	CG	N
0.360	9.14	71254	1.75	44.5	.250	6.4	35	6.2	.63	16	22	99	.84	21.3	0.055	1.4	15.3	MW	CG	N
0.360	9.14	71254S	1.75	44.5	.250	6.4	30	5.2	.51	13	15	67	.84	21.3	0.055	1.4	15.3	SST	CG	N
0.360	9.14	71275	1.75	44.5	.242	6.1	47	8.2	.58	15	27	121	.92	23.4	0.059	1.5	15.6	MW	CG	N
0.360	9.14	71275S	1.75	44.5	.242	6.1	40	7.0	.46	12	18	82	.92	23.4	0.059	1.5	15.6	SST	CG	N
0.360	9.14	2629	1.78	45.2	.290	7.4	5.0	.87	.92	23	4.6	20	.55	14.0	0.035	0.9	14.8	SPR	C	Z
0.360	9.14	11571	1.81	46.0	.280	7.1	11	2.0	.60	15	6.8	30	.52	13.2	0.040	1.0	12.0	SPR	C	N
0.360	9.14	S-852	1.88	47.6	.312	7.9	.59	.10	1.4	35	.82	3.6	.50	12.6	0.024	0.6	20.5	SST	CG	N
0.360	9.14	S-100	1.88	47.6	.260	6.6	15	2.6	.78	20	11	51	1.00	25.4	0.050	1.3	20.0	SST	CG	N
0.360	9.14	B14-21	1.88	47.6	.250	6.4	26	4.6	.61	15	16	71	1.09	27.6	0.055	1.4	19.8	SPR	CG	Z
0.360	9.14	A-61	1.94	49.2	.288	7.3	3.8	.66	1.2	30	4.5	20	.76	19.2	0.036	0.9	21.0	SPR	CG	Z
0.360	9.14	10110	2.00	50.8	.310	7.9	.63	.11	1.3	34	.83	3.7	.68	17.1	0.025	0.6	26.0	MW	C	Z
0.360	9.14	71043	2.00	50.8	.308	7.8	2.1	.37	1.3	34	2.8	12	.27	6.9	0.026	0.7	10.4	MW	CG	N
0.360	9.14	71043S	2.00	50.8	.308	7.8	1.8	.31	1.0	26	1.9	8.3	.27	6.9	0.026	0.7	10.4	SST	CG	N
0.360	9.14	71061	2.00	50.8	.302	7.7	2.8	.49	1.4	35	3.8	17	.35	8.8	0.029	0.7	12.0	MW	CG	N
0.360	9.14	71061S	2.00	50.8	.302	7.7	2.4	.42	1.1	27	2.6	11	.35	8.8	0.029	0.7	12.0	SST	CG	N
0.360	9.14	11884	2.00	50.8	.302	7.7	1.8	.31	1.4	37	2.6	11	.55	14.0	0.029	0.7	18.0	MW	C	N
0.360	9.14	10185	2.00	50.8	.296	7.5	2.7	.47	1.4	35	3.8	17	.61	15.4	0.032	0.8	18.0	MW	C	Z
0.360	9.14	71080	2.00	50.8	.296	7.5	4.0	.70	1.3	33	5.1	23	.40	10.3	0.032	0.8	12.6	MW	CG	N
0.360	9.14	71080S	2.00	50.8	.296	7.5	3.4	.60	1.0	26	3.4	15	.40	10.3	0.032	0.8	12.6	SST	CG	N
0.360	9.14	71098	2.00	50.8	.290	7.4	5.3	.93	1.2	30	6.3	28	.49	12.3	0.035	0.9	13.9	MW	CG	N
0.360	9.14	71098S	2.00	50.8	.290	7.4	4.5	.79	.95	24	4.3	19	.49	12.3	0.035	0.9	13.9	SST	CG	N
0.360	9.14	71116	2.00	50.8	.284	7.2	7.4	1.3	1.1	28	8.1	36	.54	13.8	0.038	1.0	14.3	MW	CG	N
0.360	9.14	71116S	2.00	50.8	.284	7.2	6.2	1.1	.88	22	5.5	24	.54	13.8	0.038	1.0	14.3	SST	CG	N
0.360	9.14	71134	2.00	50.8	.280	7.1	8.6	1.5	1.1	28	9.4	42	.60	15.2	0.040	1.0	15.0	MW	CG	N
0.360	9.14	71134S	2.00	50.8	.280	7.1	7.3	1.3	.87	22	6.4	28	.60	15.2	0.040	1.0	15.0	SST	CG	N
0.360	9.14	HH-14	2.00	50.8	.280	7.1	5.3	.93	1.2	29	6.1	27	.84	21.3	0.040	1.0	21.0	SST	CG	N
0.360	9.14	71152	2.00	50.8	.276	7.0	10	1.8	1.0	26	11	48	.65	16.4	0.042	1.1	15.4	MW	CG	N
0.360	9.14	71152S	2.00	50.8	.276	7.0	8.8	1.5	.83	21	7.3	33	.65	16.4	0.042	1.1	15.4	SST	CG	N
0.360	9.14	71170	2.00	50.8	.270	6.9	13	2.3	1.0	25	13	59	.73	18.6	0.045	1.1	16.3	MW	CG	N
0.360	9.14	71170S	2.00	50.8	.270	6.9	11	2.0	.80	20	9.0	40	.73	18.6	0.045	1.1	16.3	SST	CG	N
0.360	9.14	H-40	2.00	50.8	.266	6.8	12	2.1	.86	22	10	45	.89	22.7	0.047	1.2	19.0	SST	CG	N
0.360	9.14	71189	2.00	50.8	.266	6.8	17	2.9	.90	23	15	67	.73	18.7	0.047	1.2	15.6	MW	CG	N
0.360	9.14	71189S	2.00	50.8	.266	6.8	14	2.5	.71	18	10	45	.73	18.7	0.047	1.2	15.6	SST	CG	N
0.360	9.14	71211	2.00	50.8	.262	6.7	20	3.4	.87	22	17	76	.79	20.1	0.049	1.2	16.1	MW	CG	N
0.360	9.14	71211S	2.00	50.8	.262	6.7	17	2.9	.69	18	12	51	.79	20.1	0.049	1.2	16.1	SST	CG	N
0.360	9.14	71233	2.00	50.8	.258	6.6	23	4.0	.79	20	18	80	.85	21.5	0.051	1.3	16.6	MW	CG	N
0.360	9.14	71233S	2.00	50.8	.258	6.6	19	3.4	.63	16	12	54	.85	21.5	0.051	1.3	16.6	SST	CG	N
0.360	9.14	71255	2.00	50.8	.250	6.4	31	5.3	.73	19	22	99	.95	24.1	0.055	1.4	17.3	MW	CG	N
0.360	9.14	71255S	2.00	50.8	.250	6.4	26	4.5	.58	15	15	67	.95	24.1	0.055	1.4	17.3	SST	CG	N
0.360	9.14	71276	2.00	50.8	.242	6.1	41	7.1	.67	17	27	121	1.05	26.6	0.059	1.5	17.8	MW	CG	N
0.360	9.14	71276S	2.00	50.8	.242	6.1	35	6.1	.53	14	18	82	1.05	26.6	0.059	1.5	17.8	SST	CG	N
0.360	9.14	B14-50	2.03	51.6	.244	6.2	43	7.5	.44	11	19	83	.99	25.0	0.058	1.5	16.0	SPR	C	Z
0.360	9.14	10205	2.06	52.4	.278	7.1	11	1.8	.69	18	7.3	32	.57	14.6	0.041	1.0	14.0	SPR	CG	Z
0.360	9.14	71044	2.25	57.2	.308	7.8	1.9	.33	1.5	37	2.8	12	.30	7.5	0.026	0.7	11.4	MW	CG	N
0.360	9.14	71044S	2.25	57.2	.308	7.8	1.6	.28	1.2	29	1.9	8.3	.30	7.5	0.026	0.7	11.4	SST	CG	N
0.360	9.14	S-3048	2.25	57.2	.302	7.7	2.7	.48	.94	24	2.6	11	.35	8.8	0.029	0.7	11.0	SST	C	N
0.360	9.14	71063	2.25	57.2	.302	7.7	2.5	.44	1.5	39	3.8	17	.38	9.8	0.029	0.7	13.3	MW	CG	N
0.360	9.14	71063S	2.25	57.2	.302	7.7	2.1	.37	1.2	31	2.6	11	.38	9.8	0.029	0.7	13.3	SST	CG	N
0.360	9.14	10112	2.25	57.2	.298	7.6	3.4	.60	1.4	35	4.7	21	.40	10.2	0.031	0.8	13.0	MW	CG	Z
0.360	9.14	71081	2.25	57.2	.296	7.5	3.7	.65	1.4	35	5.1	23	.43	11.0	0.032	0.8	13.5	MW	CG	N
0.360	9.14	71081S	2.25	57.2	.296	7.5	3.1	.55	1.1	28	3.4	15	.43	11.0	0.032	0.8	13.5	SST	CG	N
0.360	9.14	71099	2.25	57.2	.290	7.4	4.7	.82	1.4	34	6.3	28	.54	13.7	0.035	0.9	15.4	MW	CG	N
0.360	9.14	71099S	2.25	57.2	.290	7.4	4.0	.70	1.1	27	4.3	19	.54	13.7	0.035	0.9	15.4	SST	CG	N
0.360	9.14	71117	2.25	57.2	.284	7.2	6.5	1.1	1.3	32	8.1	36	.60	15.3	0.038	1.0	15.9	MW	CG	N
0.360	9.14	71117S	2.25	57.2	.284	7.2	5.5	.96	1.0	25	5.5	24	.60	15.3	0.038	1.0	15.9	SST	CG	N
0.360	9.14	71135	2.25	57.2	.280	7.1	7.6	1.3	1.2	32	9.4	42	.68	17.1	0.040	1.0	16.9	MW	CG	N
0.360	9.14	71135S	2.25	57.2	.280	7.1	6.4	1.1	.99	25	6.4	28	.68	17.1	0.040	1.0	16.9	SST	CG	N
0.360	9.14	71153	2.25	57.2	.276	7.0	9.1	1.6	1.2	30	11	48	.73	18.5	0.042	1.1	17.4	MW	CG	N
0.360	9.14	71153S	2.25	57.2	.276	7.0	7.7	1.3	.95	24	7.3	33	.73	18.5	0.042	1.1	17.4	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.360	9.14	71171	2.25	57.2	.270	6.9	12	2.1	1.1	29	13	59	.81	20.6	0.045	1.1	18.0	MW	CG	N
0.360	9.14	71171S	2.25	57.2	.270	6.9	10	1.7	.90	23	9.0	40	.81	20.6	0.045	1.1	18.0	SST	CG	N
0.360	9.14	71190	2.25	57.2	.266	6.8	15	2.6	1.0	26	15	67	.82	20.7	0.047	1.2	17.4	MW	CG	N
0.360	9.14	71190S	2.25	57.2	.266	6.8	13	2.2	.81	20	10	45	.82	20.7	0.047	1.2	17.4	SST	CG	N
0.360	9.14	10347	2.25	57.2	.264	6.7	22	3.9	.52	13	12	52	.65	16.5	0.048	1.2	13.5	SPR	CG	Z
0.360	9.14	71212	2.25	57.2	.262	6.7	17	3.0	.99	25	17	76	.88	22.4	0.049	1.2	18.0	MW	CG	N
0.360	9.14	71212S	2.25	57.2	.262	6.7	15	2.6	.79	20	12	51	.88	22.4	0.049	1.2	18.0	SST	CG	N
0.360	9.14	71234	2.25	57.2	.258	6.6	20	3.5	.90	23	18	80	.95	24.1	0.051	1.3	18.6	MW	CG	N
0.360	9.14	71234S	2.25	57.2	.258	6.6	17	3.0	.72	18	12	54	.95	24.1	0.051	1.3	18.6	SST	CG	N
0.360	9.14	71256	2.25	57.2	.250	6.4	27	4.7	.83	21	22	99	1.06	26.9	0.055	1.4	19.3	MW	CG	N
0.360	9.14	71256S	2.25	57.2	.250	6.4	23	4.0	.66	17	15	67	1.06	26.9	0.055	1.4	19.3	SST	CG	N
0.360	9.14	71277	2.25	57.2	.242	6.1	36	6.3	.76	19	27	121	1.17	29.6	0.059	1.5	19.8	MW	CG	N
0.360	9.14	71277S	2.25	57.2	.242	6.1	31	5.4	.60	15	18	82	1.17	29.6	0.059	1.5	19.8	SST	CG	N
0.360	9.14	U-61A	2.28	57.9	.272	6.9	10	1.8	.89	22	9.0	40	.88	22.4	0.044	1.1	19.0	SPR	C	Z
0.360	9.14	12229	2.34	59.5	.304	7.7	1.7	.30	1.9	48	3.3	15	.45	11.4	0.028	0.7	16.0	MW	CG	GI
0.360	9.14	S-1589	2.34	59.5	.284	7.2	3.7	.64	1.4	36	5.2	23	.91	23.2	0.038	1.0	24.0	SST	CG	N
0.360	9.14	71082	2.50	63.5	.296	7.5	3.3	.58	1.5	39	5.1	23	.48	12.1	0.032	0.8	14.9	MW	CG	N
0.360	9.14	71082S	2.50	63.5	.296	7.5	2.8	.49	1.2	31	3.4	15	.48	12.1	0.032	0.8	14.9	SST	CG	N
0.360	9.14	71100	2.50	63.5	.290	7.4	4.2	.74	1.5	38	6.3	28	.60	15.1	0.035	0.9	17.0	MW	CG	N
0.360	9.14	71100S	2.50	63.5	.290	7.4	3.6	.63	1.2	31	4.3	19	.60	15.1	0.035	0.9	17.0	SST	CG	N
0.360	9.14	71118	2.50	63.5	.284	7.2	5.8	1.0	1.4	36	8.1	36	.67	17.0	0.038	1.0	17.6	MW	CG	N
0.360	9.14	71118S	2.50	63.5	.284	7.2	4.9	.86	1.1	28	5.5	24	.67	17.0	0.038	1.0	17.6	SST	CG	N
0.360	9.14	71136	2.50	63.5	.280	7.1	6.7	1.2	1.4	36	9.4	42	.75	19.1	0.040	1.0	18.8	MW	CG	N
0.360	9.14	71136S	2.50	63.5	.280	7.1	5.7	1.0	1.1	28	6.4	28	.75	19.1	0.040	1.0	18.8	SST	CG	N
0.360	9.14	71154	2.50	63.5	.276	7.0	8.2	1.4	1.3	34	11	48	.80	20.3	0.042	1.1	19.0	MW	CG	N
0.360	9.14	71154S	2.50	63.5	.276	7.0	6.9	1.2	1.1	27	7.3	33	.80	20.3	0.042	1.1	19.0	SST	CG	N
0.360	9.14	3600	2.50	63.5	.270	6.9	10	1.8	1.3	34	13	59	.99	25.1	0.045	1.1	21.0	MW	C	Z
0.360	9.14	71172	2.50	63.5	.270	6.9	11	1.8	1.3	32	13	59	.89	22.7	0.045	1.1	19.9	MW	CG	N
0.360	9.14	71172S	2.50	63.5	.270	6.9	9.0	1.6	1.0	25	9.0	40	.89	22.7	0.045	1.1	19.9	SST	CG	N
0.360	9.14	71191	2.50	63.5	.266	6.8	13	2.3	1.1	29	15	67	.90	23.0	0.047	1.2	19.3	MW	CG	N
0.360	9.14	71191S	2.50	63.5	.266	6.8	11	2.0	.90	23	10	45	.90	23.0	0.047	1.2	19.3	SST	CG	N
0.360	9.14	3788	2.50	63.5	.264	6.7	10	1.8	1.1	29	12	52	1.30	32.9	0.048	1.2	27.0	SPR	CG	Z
0.360	9.14	71213	2.50	63.5	.262	6.7	15	2.7	1.1	28	17	76	.97	24.7	0.049	1.2	19.9	MW	CG	N
0.360	9.14	71213S	2.50	63.5	.262	6.7	13	2.3	.88	22	12	51	.97	24.7	0.049	1.2	19.9	SST	CG	N
0.360	9.14	12473	2.50	63.5	.260	6.6	15	2.7	.80	20	12	54	1.10	27.9	0.050	1.3	22.0	SPR	CG	Z
0.360	9.14	71235	2.50	63.5	.258	6.6	18	3.1	1.0	25	18	80	1.04	26.4	0.051	1.3	20.4	MW	CG	N
0.360	9.14	71235S	2.50	63.5	.258	6.6	15	2.7	.80	20	12	54	1.04	26.4	0.051	1.3	20.4	SST	CG	N
0.360	9.14	71257	2.50	63.5	.250	6.4	24	4.2	.92	23	22	99	1.17	29.7	0.055	1.4	21.3	MW	CG	N
0.360	9.14	71257S	2.50	63.5	.250	6.4	20	3.6	.74	19	15	67	1.17	29.7	0.055	1.4	21.3	SST	CG	N
0.360	9.14	71278	2.50	63.5	.242	6.1	32	5.6	.85	22	27	121	1.29	32.8	0.059	1.5	21.9	MW	CG	N
0.360	9.14	71278S	2.50	63.5	.242	6.1	27	4.8	.68	17	18	82	1.29	32.8	0.059	1.5	21.9	SST	CG	N
0.360	9.14	LL-12	2.63	66.7	.180	4.6	262	46	.22	5.7	59	260	1.85	46.9	0.090	2.3	20.5	SPR	CG	Z
0.360	9.14	B10-53	2.69	68.2	.274	7.0	9.7	1.7	.86	22	8.4	37	.82	20.8	0.043	1.1	18.0	SPR	C	BO
0.360	9.14	3940	2.69	68.2	.252	6.4	21	3.7	.72	18	15	68	1.20	30.5	0.054	1.4	22.3	SPR	CG	Z
0.360	9.14	71173	2.75	69.9	.270	6.9	9.6	1.7	1.4	35	13	59	.97	24.7	0.045	1.1	21.6	MW	CG	N
0.360	9.14	71173S	2.75	69.9	.270	6.9	8.2	1.4	1.1	28	9.0	40	.97	24.7	0.045	1.1	21.6	SST	CG	N
0.360	9.14	71192	2.75	69.9	.266	6.8	12	2.1	1.2	32	15	67	.98	24.9	0.047	1.2	20.9	MW	CG	N
0.360	9.14	71192S	2.75	69.9	.266	6.8	10	1.8	.99	25	10	45	.98	24.9	0.047	1.2	20.9	SST	CG	N
0.360	9.14	71214	2.75	69.9	.262	6.7	14	2.5	1.2	31	17	76	1.06	26.9	0.049	1.2	21.6	MW	CG	N
0.360	9.14	71214S	2.75	69.9	.262	6.7	12	2.1	.97	25	12	51	1.06	26.9	0.049	1.2	21.6	SST	CG	N
0.360	9.14	71236	2.75	69.9	.258	6.6	16	2.8	1.1	28	18	80	1.14	29.0	0.051	1.3	22.4	MW	CG	N
0.360	9.14	71236S	2.75	69.9	.258	6.6	14	2.4	.88	22	12	54	1.14	29.0	0.051	1.3	22.4	SST	CG	N
0.360	9.14	71258	2.75	69.9	.250	6.4	22	3.8	1.0	26	22	99	1.28	32.5	0.055	1.4	23.3	MW	CG	N
0.360	9.14	71258S	2.75	69.9	.250	6.4	19	3.3	.81	21	15	67	1.28	32.5	0.055	1.4	23.3	SST	CG	N
0.360	9.14	71279	2.75	69.9	.242	6.1	29	5.1	.94	24	27	121	1.42	36.0	0.059	1.5	24.0	MW	CG	N
0.360	9.14	71279S	2.75	69.9	.242	6.1	25	4.3	.75	19	18	82	1.42	36.0	0.059	1.5	24.0	SST	CG	N
0.360	9.14	4318	2.81	71.4	.272	6.9	7.4	1.3	1.2	31	9.0	40	1.16	29.3	0.044	1.1	25.3	SPR	C	Z
0.360	9.14	10642	2.88	73.0	.270	6.9	7.6	1.3	1.3	32	9.6	43	1.26	32.0	0.045	1.1	27.0	SPR	C	Z
0.360	9.14	LL-32	2.88	73.0	.240	6.1	25	4.3	.78	20	19	86	1.62	41.1	0.060	1.5	27.0	SST	CG	N
0.360	9.14	12154	3.00	76.2	.274	7.0	5.8	1.0	1.5	37	8.4	37	1.25	31.7	0.043	1.1	29.0	SPR	CG	Z
0.360	9.14	71193	3.00	76.2	.266	6.8	11	1.9	1.4	35	15	67	1.07	27.2	0.047	1.2	22.8	MW	CG	N
0.360	9.14	71193S	3.00	76.2	.266	6.8	9.4	1.6	1.1	28	10	45	1.07	27.2	0.047	1.2	22.8	SST	CG	N
0.360	9.14	71215	3.00	76.2	.262	6.7	13	2.2	1.3	34	17	76	1.15	29.2	0.049	1.2	23.5	MW	CG	N
0.360	9.14	71215S	3.00	76.2	.262	6.7	11	1.9	1.1	27	12	51	1.15	29.2	0.049	1.2	23.5	SST	CG	N
0.360	9.14	71237	3.00	76.2	.258	6.6	15	2.6	1.2	31	18	80	1.24	31.4	0.051	1.3	24.3	MW	CG	N
0.360	9.14	71237S	3.00	76.2	.258	6.6	13	2.2	.96	24	12	54	1.24	31.4	0.051	1.3	24.3	SST	CG	N
0.360	9.14	71259	3.00	76.2	.250	6.4	20	3.5	1.1	28	22	99	1.39	35.3	0.055	1.4	25.3	MW	CG	N
0.360	9.14	71259S	3.00	76.2	.250	6.4	17	3.0	.89	23	15	67	1.39	35.3	0.055	1.4	25.3	SST	CG	N
0.360	9.14	71280	3.00	76.2	.242	6.1	27	4.7	1.0	26	27	121	1.53	39.0	0.059	1.5	26.0	MW	CG	N
0.360	9.14	71280S	3.00	76.2	.242	6.1	23	4.0	.82	21	18	82	1.53	39.0	0.059	1.5	26.0	SST	CG	N
0.360	9.14	12805	3.25	82.6	.290	7.4	2.0	.35	2.0	51	4.0	18	1.23	31.1	0.035	0.9	34.0	SPR	C	Z
0.360	9.14	71194	3.25	82.6	.266	6.8	10	1.8	1.5	38	15	67	1.16	29.4	0.047	1.2	24.6	MW	CG	N
0.360	9.14	71194S	3.25	82.6	.266	6.8	8.6	1.5	1.2	30	10	45	1.16	29.4	0.047	1.2	24.6	SST	CG	N
0.360	9.14	71216	3.25	82.6	.262	6.7	12	2.1	1.4	37	17	76	1.24	31.6	0.049	1.2	25.4	MW	CG	N
0.360	9.14	71216S	3.25	82.6	.262	6.7	10	1.8	1.1	29	12	51	1.24	31.6	0.049	1.2	25.4	SST	CG	N
0.360	9.14	71238	3.25	82.6	.258	6.6	14	2.4	1.3	33	18	80	1.34	34.0	0.051	1.3	26.3	MW	CG	N
0.360	9.14	71238S	3.25	82.6	.258	6.6	12	2.0	1.0	27	12	54	1.34	34.0	0.051	1.3	26.3	SST	CG	N
0.360	9.14	71260	3.25	82.6	.250	6.4	19	3.2	1.2	31	22	99	1.49	37.7	0.055	1.4	27.0	MW	CG	N
0.360	9.14	71260S	3.25	82.6	.250	6.4	16	2.8	.96	24	15	67	1.49	37.7	0.055	1.4	27.0	SST	CG	N
0.360	9.14	71281	3.25	82.6	.242	6.1	25	4.3	1.1	28	27	121	1.66	42.1	0.059	1.5	28.1	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.360	9.14	71281S	3.25	82.6	.242	6.1	21	3.6	.89	23	18	82	1.66	42.1	0.059	1.5	28.1	SST	CG	N
0.360	9.14	10850	3.50	88.9	.280	7.1	5.0	.88	1.3	32	6.4	28	.88	22.4	0.040	1.0	22.0	SST	CG	N
0.360	9.14	71195	3.50	88.9	.266	6.8	9.4	1.6	1.6	41	15	67	1.24	31.5	0.047	1.2	26.4	MW	CG	N
0.360	9.14	71195S	3.50	88.9	.266	6.8	8.6	1.4	1.3	32	10	45	1.24	31.5	0.047	1.2	26.4	SST	CG	N
0.360	9.14	71217	3.50	88.9	.262	6.7	11	1.9	1.6	40	17	76	1.34	33.9	0.049	1.2	27.3	MW	CG	N
0.360	9.14	71217S	3.50	88.9	.262	6.7	9.3	1.6	1.2	32	12	51	1.34	33.9	0.049	1.2	27.3	SST	CG	N
0.360	9.14	71239	3.50	88.9	.258	6.6	13	2.2	1.4	36	18	80	1.43	36.4	0.051	1.3	28.1	MW	CG	N
0.360	9.14	71239S	3.50	88.9	.258	6.6	11	1.9	1.1	29	12	54	1.43	36.4	0.051	1.3	28.1	SST	CG	N
0.360	9.14	71261	3.50	88.9	.250	6.4	17	3.0	1.3	33	22	99	1.60	40.7	0.055	1.4	29.1	MW	CG	N
0.360	9.14	71261S	3.50	88.9	.250	6.4	15	2.5	1.0	26	15	67	1.60	40.7	0.055	1.4	29.1	SST	CG	N
0.360	9.14	71282	3.50	88.9	.242	6.1	23	4.0	1.2	31	27	121	1.78	45.1	0.059	1.5	30.1	MW	CG	N
0.360	9.14	71282S	3.50	88.9	.242	6.1	19	3.4	.96	24	18	82	1.78	45.1	0.059	1.5	30.1	SST	CG	N
0.360	9.14	UU-54	3.75	95.3	.290	7.4	2.0	.35	2.3	59	4.6	20	1.23	31.1	0.035	0.9	34.0	SPR	C	Z
0.360	9.14	2907	4.00	101.6	.180	4.6	148	26	.40	10	59	260	3.13	79.4	0.090	2.3	34.8	SPR	CG	Z
0.360	9.14	L-33	4.13	104.8	.266	6.8	6.1	1.1	1.8	46	11	48	1.88	47.8	0.047	1.2	40.0	SPR	CG	Z
0.360	9.14	11422	4.38	111.1	.300	7.6	.91	.16	3.2	81	2.9	13	1.17	29.7	0.030	0.8	38.0	MW	C	Z
0.360	9.14	11515	4.81	122.2	.292	7.4	1.7	.31	2.5	64	4.4	20	1.19	30.2	0.034	0.9	34.0	SPR	C	Z
0.360	9.14	3053	4.88	123.8	.266	6.8	5.4	.94	2.0	51	11	48	2.12	53.7	0.047	1.2	45.0	HD	CG	Z
0.360	9.14	12265	5.25	133.4	.236	6.0	32	5.7	.70	18	23	101	1.67	42.5	0.062	1.6	27.0	SPR	CG	GI
0.360	9.14	12117	6.25	158.8	.282	7.2	2.1	.37	3.0	76	6.3	28	1.99	50.5	0.039	1.0	50.0	SPR	C	Z
0.360	9.14	2623	6.50	165.1	.284	7.2	2.0	.36	2.9	73	5.8	26	1.81	45.8	0.038	1.0	46.5	SPR	C	Z
0.360	9.14	12202	7.63	193.7	.264	6.7	3.8	.66	3.1	78	12	52	3.36	85.3	0.048	1.2	69.0	SPR	C	Z
0.362	9.19	12745	1.19	30.1	.290	7.4	7.7	1.4	.76	19	5.8	26	.43	11.0	0.036	0.9	11.0	MW	C	N
0.364	9.25	12694	2.25	57.2	.264	6.7	18	3.2	.92	23	17	74	.95	24.1	0.050	1.3	18.0	MW	C	BO
0.370	9.40	B4-61	.88	22.2	.314	8.0	5.5	.96	.41	10	2.3	10	.18	4.6	0.028	0.7	5.50	SST	C	N
0.375	9.53	BB-89*	.19	4.8	.335	8.5	8.9	1.6	.10	2.4	.86	3.8	.07	1.8	0.020	0.5	2.50	SST	C	N
0.375	9.53	4104	.25	6.4	.291	7.4	121	21	.06	1.6	7.5	34	.13	3.2	0.042	1.1	3.00	SPR	CG	Z
0.375	9.53	3289	.28	7.1	.299	7.6	39	6.9	.09	2.3	3.6	16	.19	4.8	0.038	1.0	4.00	SPR	C	Z
0.375	9.53	10183	.31	7.9	.347	8.8	.78	.14	.25	6.3	.19	.87	.06	1.6	0.014	0.4	3.50	MW	C	Z
0.375	9.53	S-1315	.38	9.5	.315	8.0	25	4.3	.11	2.8	2.7	12	.12	3.0	0.030	0.8	3.00	SST	C	N
0.375	9.53	K-20	.38	9.5	.305	7.7	27	4.8	.16	4.1	4.4	20	.18	4.4	0.035	0.9	4.00	SPR	C	GI
0.375	9.53	K-69	.38	9.5	.293	7.4	32	5.5	.17	4.3	5.4	24	.21	5.2	0.041	1.0	5.00	SST	CG	N
0.375	9.53	A-32	.38	9.5	.285	7.2	66	11	.14	3.6	9.2	41	.20	5.1	0.045	1.1	4.50	SPR	CG	N
0.375	9.53	A10-38	.38	9.5	.273	6.9	127	22	.09	2.3	12	52	.20	5.2	0.051	1.3	4.00	SST	CG	N
0.375	9.53	S-166	.38	9.5	.265	6.7	116	20	.10	2.5	12	52	.28	7.0	0.055	1.4	5.00	SST	CG	N
0.375	9.53	10634	.41	10.3	.315	8.0	20	3.5	.14	3.4	2.7	12	.13	3.3	0.030	0.8	3.25	SST	C	N
0.375	9.53	B2-47	.42	10.7	.279	7.1	87	15	.13	3.2	11	50	.26	6.7	0.048	1.2	4.50	SPR	C	N
0.375	9.53	H-4	.44	11.1	.291	7.4	42	7.4	.17	4.3	7.1	31	.19	4.8	0.042	1.1	4.50	SST	CG	N
0.375	9.53	10132	.44	11.1	.285	7.2	66	11	.14	3.6	9.2	41	.20	5.2	0.045	1.1	4.50	SPR	CG	Z
0.375	9.53	V-38	.44	11.1	.285	7.2	82	14	.11	2.9	9.2	41	.18	4.6	0.045	1.1	4.00	SPR	CG	Z
0.375	9.53	B4-17	.44	11.1	.279	7.1	87	15	.13	3.2	11	50	.26	6.7	0.048	1.2	4.50	SPR	C	N
0.375	9.53	3666	.47	11.9	.327	8.3	3.3	.58	.34	8.6	1.1	5.0	.13	3.2	0.024	0.6	5.33	MW	C	Z
0.375	9.53	AA-66	.47	11.9	.305	7.7	16	2.8	.25	6.5	4.1	18	.21	5.3	0.035	0.9	5.00	SST	C	N
0.375	9.53	O-61	.47	11.9	.295	7.5	33	5.7	.20	5.1	6.5	29	.24	6.1	0.040	1.0	5.00	SPR	C	N
0.375	9.53	F-33	.47	11.9	.285	7.2	94	16	.10	2.5	9.2	41	.21	5.4	0.045	1.1	4.75	SPR	C	Z
0.375	9.53	TT-36	.47	11.9	.283	7.2	52	9.0	.19	4.8	9.8	44	.25	6.4	0.046	1.2	5.50	SPR	CG	Z
0.375	9.53	A-20	.47	11.9	.275	7.0	58	10	.17	4.3	9.7	43	.30	7.6	0.050	1.3	6.00	SST	CG	N
0.375	9.53	2583	.50	12.7	.335	8.5	2.1	.36	.39	9.9	.80	3.6	.11	2.8	0.020	0.5	4.50	MW	C	Z
0.375	9.53	N-36	.50	12.7	.335	8.5	1.8	.31	.39	9.9	.70	3.1	.11	2.8	0.020	0.5	4.50	SST	C	N
0.375	9.53	PP-71	.50	12.7	.335	8.5	.82	.14	.32	8.0	.26	1.2	.19	4.7	0.020	0.5	8.25	MW	C	BO
0.375	9.53	NN-38	.50	12.7	.333	8.5	.90	.16	.29	7.4	.26	1.2	.21	5.3	0.021	0.5	9.00	MW	C	N
0.375	9.53	B12-33	.50	12.7	.331	8.4	1.9	.34	.37	9.3	.70	3.1	.13	3.4	0.022	0.6	6.00	MW	CG	N
0.375	9.53	4254	.50	12.7	.329	8.4	1.7	.29	.30	7.7	.51	2.3	.20	5.0	0.023	0.6	7.50	MW	C	Z
0.375	9.53	K-5	.50	12.7	.323	8.2	2.6	.45	.27	6.8	.69	3.0	.23	5.9	0.026	0.7	8.00	MW	C	Z
0.375	9.53	CC-46	.50	12.7	.311	7.9	8.1	1.4	.28	7.0	2.2	10	.22	5.7	0.032	0.8	6.00	SST	C	N
0.375	9.53	S-1184	.50	12.7	.303	7.7	20	3.4	.23	5.8	4.5	20	.17	4.3	0.036	0.9	4.75	SST	CG	N
0.375	9.53	BB-6	.50	12.7	.301	7.6	17	3.0	.26	6.6	4.5	20	.24	6.1	0.037	0.9	5.50	SST	C	N
0.375	9.53	10153	.50	12.7	.293	7.4	31	5.5	.23	5.7	7.0	31	.23	5.7	0.041	1.0	5.50	SPR	CG	Z
0.375	9.53	S-837	.50	12.7	.293	7.4	32	5.5	.21	5.3	6.6	29	.21	5.2	0.041	1.0	5.00	SST	CG	N
0.375	9.53	EE-50	.50	12.7	.293	7.4	44	7.6	.16	4.1	7.0	31	.23	5.7	0.041	1.0	4.50	SPR	C	N
0.375	9.53	938	.50	12.7	.281	7.1	99	17	.11	2.7	10	47	.24	6.0	0.047	1.2	4.00	HD	C	Z
0.375	9.53	K-96	.50	12.7	.281	7.1	57	9.9	.18	4.7	10	47	.26	6.6	0.047	1.2	5.50	SPR	CG	N
0.375	9.53	MM-77	.50	12.7	.275	7.0	65	11	.17	4.3	11	49	.28	7.0	0.050	1.3	5.50	SST	CG	N
0.375	9.53	FF-18	.50	12.7	.275	7.0	105	18	.11	2.8	12	52	.23	5.7	0.050	1.3	4.50	SPR	CG	N
0.375	9.53	PP-4	.50	12.7	.265	6.7	100	18	.15	3.9	15	69	.33	8.4	0.055	1.4	6.00	SPR	CG	Z
0.375	9.53	S-312	.50	12.7	.265	6.7	112	20	.13	3.3	15	65	.28	7.2	0.055	1.4	5.00	SST	CG	N
0.375	9.53	939	.50	12.7	.251	6.4	231	40	.09	2.4	22	97	.31	7.9	0.062	1.6	5.00	HD	CG	Z
0.375	9.53	S-1477	.50	12.7	.251	6.4	201	35	.10	2.6	21	92	.31	7.9	0.062	1.6	5.00	SST	CG	N
0.375	9.53	S-1119	.50	12.7	.247	6.3	349	61	.06	1.6	23	100	.32	8.1	0.064	1.6	4.00	SST	C	N
0.375	9.53	3618	.50	12.7	.209	5.3	1096	192	.06	1.5	66	295	.37	9.5	0.083	2.1	4.50	MW	CG	Z
0.375	9.53	S-867	.53	13.5	.323	8.2	5.4	.94	.33	8.4	1.8	7.9	.12	3.0	0.026	0.7	4.50	SST	CG	N
0.375	9.53	10813	.53	13.5	.321	8.2	6.0	1.1	.37	9.4	2.2	9.9	.16	4.1	0.027	0.7	5.00	MW	C	Z
0.375	9.53	S-3086	.53	13.5	.311	7.9	17	2.9	.20	5.1	3.3	15	.13	3.3	0.032	0.8	4.00	SST	CG	N
0.375	9.53	Z-58	.53	13.5	.303	7.7	21	3.6	.23	5.9	4.8	21	.18	4.6	0.036	0.9	5.00	SPR	CG	Z
0.375	9.53	F-28	.53	13.5	.285	7.2	55	9.6	.17	4.3	9.2	41	.27	6.9	0.045	1.1	5.00	HD	C	Z
0.375	9.53	UU-62	.53	13.5	.281	7.1	66	12	.16	4.0	10	47	.28	7.2	0.047	1.2	5.00	SPR	C	Z
0.375	9.53	10136	.53	13.5	.215	5.5	765	134	.06	1.4	43	190	.40	10.2	0.080	2.0	5.00	SPR	CG	N
0.375	9.53	10613	.53	13.5	.215	5.5	706	124	.06	1.5	43	190	.42	10.7	0.080	2.0	5.25	SPR	CG	N
0.375	9.53	BB-37	.56	14.3	.345	8.8	.45	.08	.47	12	.21	.95	.09	2.3	0.015	0.4	5.00	SST	C	N
0.375	9.53	F-45	.56	14.3	.323	8.2	7.7	1.4	.34	8.8	2.7	12	.13	3.3	0.026	0.7	4.00	MW	C	Z

*Rate is calculated only.

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.375	9.53	10581	.56	14.3	.317	8.1	7.6	1.3	.41	10	3.1	14	.15	3.9	0.029	0.7	5.25	MW	CG	Z
0.375	9.53	2654	.56	14.3	.299	7.6	26	4.6	.22	5.5	5.6	25	.19	4.8	0.038	1.0	5.00	SPR	CG	Z
0.375	9.53	1891	.56	14.3	.285	7.2	41	7.2	.23	5.7	9.2	41	.27	6.9	0.045	1.1	6.00	SPR	CG	Z
0.375	9.53	O-75	.56	14.3	.283	7.2	45	7.9	.22	5.5	9.8	44	.28	7.0	0.046	1.2	6.00	SPR	CG	N
0.375	9.53	J-56	.56	14.3	.281	7.1	50	8.8	.19	5.0	9.8	44	.31	7.8	0.047	1.2	5.50	SST	C	N
0.375	9.53	I-33	.56	14.3	.277	7.0	80	14	.15	3.8	12	53	.29	7.5	0.049	1.2	5.00	SPR	C	N
0.375	9.53	B15-17	.56	14.3	.211	5.4	646	113	.07	1.8	45	201	.49	12.5	0.082	2.1	6.00	SPR	CG	N
0.375	9.53	W-15	.59	15.1	.323	8.2	2.4	.42	.35	8.8	.82	3.7	.25	6.3	0.026	0.7	8.50	MW	C	N
0.375	9.53	S-908	.59	15.1	.301	7.6	15	2.7	.31	8.0	4.9	22	.22	5.6	0.037	0.9	6.00	SST	CG	N
0.375	9.53	B14-7	.59	15.1	.289	7.3	38	6.7	.21	5.4	8.1	36	.24	6.0	0.043	1.1	5.50	SPR	CG	N
0.375	9.53	B12-48	.63	15.9	.347	8.8	.59	.10	.56	14	.33	1.4	.07	1.8	0.014	0.4	4.00	MW	C	N
0.375	9.53	00-63	.63	15.9	.335	8.5	1.5	.26	.51	13	.75	3.3	.12	3.0	0.020	0.5	5.00	SST	C	N
0.375	9.53	HH-80	.63	15.9	.331	8.4	1.7	.30	.46	12	.78	3.5	.17	4.2	0.022	0.6	6.50	MW	C	N
0.375	9.53	O-90	.63	15.9	.327	8.3	1.6	.28	.41	10	.65	2.9	.22	5.5	0.024	0.6	8.00	SST	C	N
0.375	9.53	12433	.63	15.9	.323	8.2	5.2	.90	.47	12	2.4	11	.16	4.0	0.026	0.7	5.00	MW	C	GI
0.375	9.53	G-95	.63	15.9	.323	8.2	2.4	.42	.40	10	.96	4.3	.22	5.6	0.026	0.7	8.50	MW	CG	N
0.375	9.53	10305	.63	15.9	.317	8.1	3.5	.61	.34	8.5	1.2	5.2	.29	7.4	0.029	0.7	9.00	MW	C	Z
0.375	9.53	Z-8	.63	15.9	.315	8.0	4.7	.83	.39	9.8	1.8	8.1	.24	6.1	0.030	0.8	8.00	MW	CG	Z
0.375	9.53	2603	.63	15.9	.303	7.7	15	2.7	.37	9.5	5.8	26	.25	6.4	0.036	0.9	6.00	MW	C	Z
0.375	9.53	KK-38	.63	15.9	.295	7.5	17	2.9	.34	8.5	5.5	25	.29	7.4	0.040	1.0	7.25	SST	CG	N
0.375	9.53	BB-54	.63	15.9	.289	7.3	34	5.9	.24	6.1	8.1	36	.26	6.6	0.043	1.1	6.00	SPR	CG	Z
0.375	9.53	516	.63	15.9	.281	7.1	46	8.0	.23	5.8	10	47	.34	8.8	0.047	1.2	6.33	HD	C	Z
0.375	9.53	H-60-A	.63	15.9	.281	7.1	36	6.3	.27	6.9	9.8	44	.35	9.0	0.047	1.2	7.50	SPR	CG	Z
0.375	9.53	S-3027	.63	15.9	.273	6.9	68	12	.17	4.4	12	52	.34	8.7	0.051	1.3	5.75	SST	C	N
0.375	9.53	G-97	.63	15.9	.263	6.7	145	25	.11	2.9	16	73	.34	8.5	0.056	1.4	5.00	SPR	C	N
0.375	9.53	RR-12	.63	15.9	.255	6.5	119	21	.15	3.7	17	77	.48	12.2	0.060	1.5	7.00	MW	C	N
0.375	9.53	507	.63	15.9	.251	6.4	160	28	.14	3.5	22	97	.45	11.5	0.062	1.6	6.33	HD	C	Z
0.375	9.53	F-46	.63	15.9	.249	6.3	186	33	.12	3.1	23	102	.38	9.6	0.063	1.6	6.00	HD	CG	Z
0.375	9.53	K-70	.63	15.9	.231	5.9	278	49	.11	2.9	32	142	.50	12.8	0.072	1.8	7.00	SPR	CG	N
0.375	9.53	11311	.63	15.9	.225	5.7	421	74	.08	2.2	36	159	.45	11.4	0.075	1.9	6.00	SPR	CG	Z
0.375	9.53	S-1689	.64	16.3	.325	8.3	5.7	1.0	.28	7.1	1.6	7.1	.13	3.2	0.025	0.6	4.00	SST	C	N
0.375	9.53	1785	.66	16.7	.323	8.2	5.2	.90	.50	13	2.6	11	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.375	9.53	12655	.66	16.7	.323	8.2	5.6	.98	.47	12	2.7	12	.15	3.8	0.026	0.7	4.75	MW	C	N
0.375	9.53	2769	.66	16.7	.211	5.4	704	123	.09	2.3	64	285	.55	13.9	0.082	2.1	5.67	MW	C	Z
0.375	9.53	12429	.69	17.4	.327	8.3	3.7	.64	.54	14	2.0	8.9	.14	3.7	0.024	0.6	5.00	MW	C	GI
0.375	9.53	12421	.69	17.4	.321	8.2	6.0	1.1	.49	13	3.0	13	.16	4.1	0.027	0.7	5.00	MW	C	N
0.375	9.53	S-892	.69	17.4	.311	7.9	4.1	.71	.34	8.5	1.4	6.0	.35	8.9	0.032	0.8	10.0	SST	C	N
0.375	9.53	3637	.69	17.4	.305	7.7	11	1.9	.40	10	4.4	20	.28	7.1	0.035	0.9	7.00	SPR	C	Z
0.375	9.53	B12-26	.69	17.4	.305	7.7	14	2.4	.32	8.2	4.4	20	.21	5.3	0.035	0.9	6.00	SPR	CG	N
0.375	9.53	A15-3	.69	17.4	.297	7.5	21	3.6	.29	7.5	6.1	27	.24	6.2	0.039	1.0	6.25	SPR	CG	N
0.375	9.53	I-85	.69	17.4	.283	7.2	28	4.9	.25	6.4	7.0	31	.44	11.1	0.046	1.2	8.50	SPR	C	N
0.375	9.53	KK-8	.69	17.4	.271	6.9	62	11	.21	5.4	13	58	.36	9.2	0.052	1.3	7.00	SPR	CG	Z
0.375	9.53	H-11	.69	17.4	.251	6.4	173	30	.13	3.2	22	97	.37	9.4	0.062	1.6	6.00	SPR	CG	Z
0.375	9.53	A12-15	.70	17.9	.333	8.5	.55	.10	.40	10	.22	.97	.31	7.7	0.021	0.5	13.5	MW	C	N
0.375	9.53	4252	.75	19.1	.343	8.7	.34	.06	.61	15	.21	.91	.14	3.7	0.016	0.4	8.00	MW	C	Z
0.375	9.53	FF-52	.75	19.1	.341	8.7	.24	.04	.54	14	.13	.57	.21	5.4	0.017	0.4	11.5	SST	C	N
0.375	9.53	S-7	.75	19.1	.335	8.5	.75	.13	.57	14	.42	1.9	.18	4.6	0.020	0.5	8.00	SST	C	N
0.375	9.53	B2-7	.75	19.1	.333	8.5	.55	.10	.45	11	.24	1.1	.31	7.7	0.021	0.5	13.5	MW	CL	N
0.375	9.53	GG-99	.75	19.1	.325	8.3	2.8	.50	.56	14	1.6	7.1	.18	4.4	0.025	0.6	6.00	SST	C	N
0.375	9.53	G-99	.75	19.1	.323	8.2	5.2	.90	.52	13	2.7	12	.16	4.0	0.026	0.7	5.00	MW	C	N
0.375	9.53	A-51	.75	19.1	.319	8.1	3.7	.64	.55	14	2.0	9.1	.20	5.0	0.028	0.7	7.00	SST	CG	N
0.375	9.53	526	.75	19.1	.313	8.0	7.7	1.3	.42	11	3.2	14	.22	5.7	0.031	0.8	6.25	HD	C	Z
0.375	9.53	A-70	.75	19.1	.297	7.5	17	3.0	.34	8.5	5.7	25	.25	6.4	0.039	1.0	6.50	SST	CG	N
0.375	9.53	I-12	.75	19.1	.295	7.5	24	4.3	.27	6.8	6.5	29	.24	6.1	0.040	1.0	6.00	SPR	CG	GI
0.375	9.53	B2-70	.75	19.1	.295	7.5	24	4.3	.37	9.4	9.0	40	.28	7.1	0.040	1.0	6.00	MW	C	N
0.375	9.53	291	.75	19.1	.293	7.4	23	4.0	.31	7.8	7.0	31	.32	8.1	0.041	1.0	6.75	HD	C	Z
0.375	9.53	S-740	.75	19.1	.291	7.4	22	3.9	.32	8.1	7.1	31	.33	8.3	0.042	1.1	6.75	SST	C	N
0.375	9.53	12234	.75	19.1	.291	7.4	24	4.2	.31	7.9	7.5	34	.34	8.5	0.042	1.1	7.00	SPR	C	Z
0.375	9.53	B15-61	.75	19.1	.285	7.2	30	5.2	.31	7.9	9.2	41	.38	9.7	0.045	1.1	7.50	SPR	C	N
0.375	9.53	F-37	.75	19.1	.283	7.2	36	6.3	.27	6.9	9.8	44	.37	9.3	0.046	1.2	7.00	HD	C	Z
0.375	9.53	II-79	.75	19.1	.281	7.1	31	5.4	.30	7.7	9.3	41	.45	11.3	0.047	1.2	8.50	SPR	C	Z
0.375	9.53	2557	.75	19.1	.279	7.1	35	6.1	.35	9.0	12	55	.40	10.1	0.048	1.2	8.25	MW	CG	Z
0.375	9.53	4358	.75	19.1	.275	7.0	65	11	.18	4.6	12	52	.35	8.9	0.050	1.3	6.00	SPR	C	Z
0.375	9.53	367	.75	19.1	.267	6.8	67	12	.22	5.5	15	65	.46	11.7	0.054	1.4	7.50	HD	C	Z
0.375	9.53	KK-39	.75	19.1	.247	6.3	146	26	.16	4.2	24	107	.48	12.2	0.064	1.6	7.50	SPR	CG	Z
0.375	9.53	10905	.78	19.8	.343	8.7	.33	.06	.63	16	.21	.92	.15	3.8	0.016	0.4	8.25	MW	C	N
0.375	9.53	S-342	.78	19.8	.325	8.3	1.7	.29	.56	14	.92	4.1	.23	5.7	0.025	0.6	9.00	SST	CG	N
0.375	9.53	A10-11	.78	19.8	.285	7.2	24	4.2	.36	9.1	8.6	38	.41	10.3	0.045	1.1	8.00	SST	C	N
0.375	9.53	L-45	.78	19.8	.267	6.8	67	12	.22	5.5	15	65	.41	10.3	0.054	1.4	7.50	SPR	CG	N
0.375	9.53	940	.81	20.6	.329	8.4	2.6	.46	.66	17	1.7	7.8	.15	3.8	0.023	0.6	5.50	MW	C	Z
0.375	9.53	F-7	.81	20.6	.323	8.2	4.8	.83	.56	14	2.7	12	.16	4.1	0.026	0.7	5.25	MW	C	Z
0.375	9.53	10243	.81	20.6	.305	7.7	9.1	1.6	.48	12	4.4	20	.28	7.1	0.035	0.9	8.00	SPR	CG	Z
0.375	9.53	S-1455	.81	20.6	.301	7.6	7.8	1.4	.45	11	3.5	16	.36	9.2	0.037	0.9	9.75	SST	CG	N
0.375	9.53	I-64	.81	20.6	.297	7.5	13	2.3	.47	12	6.1	27	.34	8.7	0.039	1.0	8.75	SPR	CG	Z
0.375	9.53	S-1450	.81	20.6	.267	6.8	32	5.6	.16	4.2	5.3	23	.65	16.5	0.054	1.4	12.0	SST	CG	N
0.375	9.53	QQ-15	.84	21.4	.289	7.3	27	4.7	.30	7.6	8.1	36	.34	8.7	0.043	1.1	7.00	SPR	C	Z
0.375	9.53	F-52	.84	21.4	.285	7.2	30	5.2	.31	7.9	9.2	41	.38	9.7	0.045	1.1	7.50	SPR	C	Z
0.375	9.53	JJ-81	.88	22.2	.335	8.5	.89	.16	.72	18	.64	2.8	.16	4.1	0.020	0.5	7.00	SST	C	N
0.375	9.53	363	.88	22.2	.329	8.4	2.6	.46	.73	18	1.9	8.5	.15	3.8	0.023	0.6	5.50	MW	C	Z
0.375	9.53	11288	.88	22.2	.325	8.3	2.7	.48	.58	15	1.6	7.1	.18	4.6	0.025	0.6	6.25	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.375	9.53	3093	.88	22.2	.319	8.1	3.6	.63	.63	16	2.3	10	.25	6.3	0.028	0.7	7.75	MW	C	Z
0.375	9.53	S-46	.88	22.2	.317	8.1	1.4	.25	.35	9.0	.50	2.2	.52	13.3	0.029	0.7	17.0	SST	C	N
0.375	9.53	I-89	.88	22.2	.315	8.0	4.1	.71	.61	15	2.5	11	.27	6.9	0.030	0.8	9.00	MW	CG	Z
0.375	9.53	DD-90	.88	22.2	.315	8.0	3.9	.68	.59	15	2.3	10	.29	7.2	0.030	0.8	8.50	SST	C	N
0.375	9.53	2571	.88	22.2	.313	8.0	3.3	.57	.47	12	1.5	6.8	.40	10.2	0.031	0.8	12.0	MW	C	Z
0.375	9.53	S-736	.88	22.2	.311	7.9	7.2	1.3	.46	12	3.3	15	.24	6.1	0.032	0.8	6.50	SST	C	N
0.375	9.53	N-95	.88	22.2	.305	7.7	4.8	.84	.46	12	2.2	9.7	.42	10.7	0.035	0.9	12.0	SST	CG	N
0.375	9.53	UU-33	.88	22.2	.297	7.5	16	2.8	.38	9.7	6.1	27	.33	8.4	0.039	1.0	7.50	SPR	C	Z
0.375	9.53	S-741	.88	22.2	.291	7.4	19	3.4	.37	9.4	7.1	31	.36	9.1	0.042	1.1	7.50	SST	C	N
0.375	9.53	3616	.88	22.2	.281	7.1	33	5.8	.32	8.0	10	47	.42	10.7	0.047	1.2	8.00	HD	C	Z
0.375	9.53	B14-59	.88	22.2	.271	6.9	69	12	.19	4.8	13	58	.39	9.9	0.052	1.3	6.50	SPR	C	Z
0.375	9.53	Y-25	.88	22.2	.255	6.5	86	15	.22	5.5	19	83	.48	12.2	0.060	1.5	8.00	SST	CG	N
0.375	9.53	885	.88	22.2	.215	5.5	328	57	.13	3.3	43	190	.72	18.3	0.080	2.0	9.00	HD	CG	Z
0.375	9.53	B9-15	.91	23.0	.317	8.1	4.6	.81	.69	18	3.2	14	.21	5.4	0.029	0.7	7.33	MW	CG	GI
0.375	9.53	S-492	.91	23.0	.305	7.7	6.0	1.0	.56	14	3.3	15	.35	8.9	0.035	0.9	10.0	SST	CG	N
0.375	9.53	B3-38	.91	23.0	.269	6.8	52	9.2	.27	6.8	14	62	.45	11.4	0.053	1.3	8.50	SPR	CG	N
0.375	9.53	K-42	.94	23.8	.335	8.5	1.1	.20	.77	20	.86	3.8	.14	3.6	0.020	0.5	6.00	SST	C	N
0.375	9.53	10263	.94	23.8	.325	8.3	4.8	.83	.50	13	2.4	11	.14	3.7	0.025	0.6	4.75	MW	C	Z
0.375	9.53	A11-58	.94	23.8	.315	8.0	5.4	.95	.73	18	4.0	18	.21	5.3	0.030	0.8	7.00	MW	CG	N
0.375	9.53	F-38	.94	23.8	.285	7.2	23	4.1	.39	10	9.2	41	.45	11.4	0.045	1.1	9.00	SPR	C	Z
0.375	9.53	O-45	.94	23.8	.281	7.1	33	5.8	.32	8.0	10	47	.42	10.7	0.047	1.2	8.00	SPR	C	Z
0.375	9.53	12310	.94	23.8	.279	7.1	36	6.4	.31	7.8	11	50	.43	11.0	0.048	1.2	8.00	SPR	C	Z
0.375	9.53	S-1008	.94	23.8	.273	6.9	38	6.6	.31	7.9	12	52	.45	11.3	0.051	1.3	8.75	SST	CG	N
0.375	9.53	2928	.94	23.8	.251	6.4	77	13	.26	6.5	20	88	.68	17.3	0.062	1.6	11.0	HD	CG	GI
0.375	9.53	B11-36	.97	24.6	.319	8.1	2.1	.37	.63	16	1.3	5.9	.34	8.5	0.028	0.7	12.0	MW	CG	N
0.375	9.53	A-78	1.00	25.4	.335	8.5	.48	.08	.76	19	.36	1.6	.25	6.2	0.020	0.5	11.3	SST	C	N
0.375	9.53	H-7	1.00	25.4	.327	8.3	1.2	.21	.74	19	.88	3.9	.26	6.7	0.024	0.6	10.0	SST	C	N
0.375	9.53	3230	1.00	25.4	.315	8.0	4.4	.76	.72	18	3.1	14	.29	7.2	0.030	0.8	8.50	MW	C	Z
0.375	9.53	HH-74	1.00	25.4	.315	8.0	5.0	.88	.54	14	2.7	12	.24	6.1	0.030	0.8	7.00	SST	C	N
0.375	9.53	U-26	1.00	25.4	.315	8.0	3.0	.52	.63	16	1.9	8.3	.38	9.5	0.030	0.8	11.5	MW	C	N
0.375	9.53	S-737	1.00	25.4	.311	7.9	6.2	1.1	.53	14	3.3	15	.26	6.7	0.032	0.8	7.25	SST	C	N
0.375	9.53	10763	1.00	25.4	.305	7.7	5.4	.95	.58	15	3.1	14	.42	10.7	0.035	0.9	11.0	SST	C	N
0.375	9.53	O-156	1.00	25.4	.297	7.5	11	1.9	.55	14	6.1	27	.43	10.9	0.039	1.0	10.0	SPR	C	GI
0.375	9.53	3577	1.00	25.4	.293	7.4	14	2.4	.55	14	7.5	33	.45	11.5	0.041	1.0	10.0	MW	C	GI
0.375	9.53	3595	1.00	25.4	.291	7.4	17	3.0	.57	15	9.8	43	.43	10.8	0.042	1.1	9.00	MW	C	GI
0.375	9.53	S-742	1.00	25.4	.291	7.4	16	2.8	.44	11	7.1	31	.40	10.1	0.042	1.1	8.50	SST	C	N
0.375	9.53	XX-64	1.00	25.4	.289	7.3	17	2.9	.48	12	8.1	36	.47	12.0	0.043	1.1	10.0	SPR	C	Z
0.375	9.53	TT-58	1.00	25.4	.285	7.2	18	3.2	.46	12	8.4	37	.54	13.7	0.045	1.1	11.0	SPR	C	GI
0.375	9.53	B15-39	1.00	25.4	.285	7.2	18	3.2	.48	12	8.6	38	.50	12.6	0.045	1.1	10.0	SST	C	N
0.375	9.53	200	1.00	25.4	.281	7.1	27	4.6	.40	10	10	47	.49	12.5	0.047	1.2	9.50	HD	C	Z
0.375	9.53	Z-37	1.00	25.4	.281	7.1	22	3.8	.45	12	9.8	44	.47	11.9	0.047	1.2	10.0	SST	CG	N
0.375	9.53	L-10	1.00	25.4	.249	6.3	166	29	.14	3.5	23	102	.41	10.4	0.063	1.6	6.50	SPR	CG	N
0.375	9.53	10220	1.00	25.4	.231	5.9	174	30	.18	4.7	32	142	.72	18.3	0.072	1.8	10.0	SPR	CG	GI
0.375	9.53	B3-42	1.00	25.4	.215	5.5	353	62	.12	3.1	43	190	.76	19.3	0.080	2.0	8.50	SPR	C	N
0.375	9.53	4290	1.03	26.2	.313	8.0	4.7	.82	.75	19	3.5	16	.28	7.1	0.031	0.8	9.00	MW	CG	Z
0.375	9.53	10067	1.06	27.0	.321	8.2	1.4	.24	.63	16	.88	3.9	.43	11.0	0.027	0.7	15.0	MW	C	Z
0.375	9.53	GG-92	1.06	27.0	.307	7.8	7.7	1.3	.52	13	3.9	18	.29	7.3	0.034	0.9	7.50	SST	C	N
0.375	9.53	Z-48	1.06	27.0	.297	7.5	12	2.0	.52	13	6.1	27	.37	9.4	0.039	1.0	9.50	SPR	CG	GI
0.375	9.53	2542	1.06	27.0	.285	7.2	23	4.1	.39	10	9.2	41	.41	10.3	0.045	1.1	9.00	SPR	CG	Z
0.375	9.53	10038	1.06	27.0	.281	7.1	25	4.4	.42	11	10	47	.52	13.1	0.047	1.2	10.0	SPR	C	Z
0.375	9.53	B11-61	1.09	27.8	.325	8.3	3.3	.57	.72	18	2.4	11	.18	4.4	0.025	0.6	6.00	MW	C	Z
0.375	9.53	11871	1.09	27.8	.323	8.2	1.2	.22	.73	19	.91	4.0	.36	9.2	0.026	0.7	13.0	SST	C	N
0.375	9.53	A10-70	1.09	27.8	.265	6.7	50	8.8	.31	7.8	15	69	.55	14.0	0.055	1.4	10.0	SPR	CG	Z
0.375	9.53	S-913	1.09	27.8	.249	6.3	84	15	.26	6.5	22	96	.61	15.6	0.063	1.6	9.75	SST	CG	N
0.375	9.53	S-3039	1.13	28.6	.327	8.3	.66	.12	.71	18	.47	2.1	.42	10.7	0.024	0.6	16.5	SST	C	N
0.375	9.53	B11-22	1.13	28.6	.315	8.0	3.5	.62	.80	20	2.8	13	.33	8.4	0.030	0.8	10.0	MW	C	N
0.375	9.53	U-3	1.13	28.6	.309	7.8	5.3	.93	.73	19	3.9	17	.36	9.2	0.033	0.8	10.0	SPR	C	Z
0.375	9.53	11755	1.13	28.6	.307	7.8	7.5	1.3	.57	14	4.2	19	.29	7.3	0.034	0.9	8.50	SPR	CG	Z
0.375	9.53	519	1.13	28.6	.293	7.4	13	2.3	.53	14	7.0	31	.46	11.7	0.041	1.0	10.3	HD	C	Z
0.375	9.53	F-44	1.13	28.6	.285	7.2	21	3.6	.45	11	9.2	41	.50	12.6	0.045	1.1	10.0	SPR	C	Z
0.375	9.53	10078	1.13	28.6	.279	7.1	26	4.5	.43	11	11	50	.50	12.8	0.048	1.2	10.5	SPR	CG	Z
0.375	9.53	FF-90	1.13	28.6	.265	6.7	44	7.6	.33	8.5	15	65	.55	14.0	0.055	1.4	10.0	SST	CG	N
0.375	9.53	N-111	1.13	28.6	.251	6.4	75	13	.27	6.9	21	92	.62	15.7	0.062	1.6	10.0	SST	CG	N
0.375	9.53	501	1.13	28.6	.231	5.9	154	27	.21	5.2	32	142	.86	21.9	0.072	1.8	11.0	HD	C	Z
0.375	9.53	S-851	1.16	29.4	.319	8.1	1.3	.22	.70	18	.90	4.0	.46	11.6	0.028	0.7	16.3	SST	CG	N
0.375	9.53	HH-44	1.19	30.2	.315	8.0	3.5	.62	.86	22	3.0	14	.33	8.4	0.030	0.8	10.0	MW	C	N
0.375	9.53	2661	1.19	30.2	.293	7.4	11	1.9	.64	16	7.0	31	.49	12.5	0.041	1.0	12.0	SPR	CG	GI
0.375	9.53	II-55	1.19	30.2	.277	7.0	19	3.3	.55	14	10	46	.64	16.2	0.049	1.2	13.0	SST	CG	N
0.375	9.53	GG-84	1.19	30.2	.265	6.7	38	6.7	.40	10	15	69	.69	17.5	0.055	1.4	12.5	SPR	CG	Z
0.375	9.53	B10-37	1.22	31.0	.293	7.4	12	2.1	.58	15	7.0	31	.49	12.5	0.041	1.0	11.0	SPR	C	N
0.375	9.53	S-1146	1.25	31.8	.325	8.3	1.9	.33	.84	21	1.6	7.1	.23	5.7	0.025	0.6	8.00	SST	C	N
0.375	9.53	TT-61	1.25	31.8	.319	8.1	1.9	.34	.86	22	1.6	7.3	.39	10.0	0.028	0.7	13.0	MW	C	Z
0.375	9.53	S-738	1.25	31.8	.311	7.9	4.8	.84	.69	17	3.3	15	.31	7.9	0.032	0.8	8.75	SST	C	N
0.375	9.53	10017	1.25	31.8	.307	7.8	4.8	.85	.81	21	3.9	17	.44	11.2	0.034	0.9	12.0	SPR	C	Z
0.375	9.53	3677	1.25	31.8	.293	7.4	14	2.4	.52	13	7.0	31	.45	11.5	0.041	1.0	10.0	SPR	C	Z
0.375	9.53	S-743	1.25	31.8	.291	7.4	12	2.2	.57	14	7.1	31	.48	12.3	0.042	1.1	10.5	SST	C	N
0.375	9.53	3847	1.25	31.8	.281	7.1	23	4.1	.45	11	10	47	.54	13.7	0.047	1.2	10.5	SPR	C	Z
0.375	9.53	10797	1.25	31.8	.279	7.1	22	3.8	.49	12	10	46	.53	13.4	0.048	1.2	11.0	SST	CG	N
0.375	9.53	GG-11	1.25	31.8	.275	7.0	28	5.0	.41	11	12	52	.56	14.3	0.050	1.3	11.3	SPR	CG	Z
0.375	9.53	LL-61	1.28	32.5	.275	7.0	19	3.4	.57	14	11	49	.70	17.8	0.050	1.3	14.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.375	9.53	B-11	1.28	32.5	.263	6.7	29	5.1	.33	8.4	9.6	42	.95	24.2	0.056	1.4	17.0	HD	CG	GI
0.375	9.53	V-60	1.31	33.3	.305	7.7	4.3	.76	.86	22	3.7	17	.46	11.6	0.035	0.9	13.0	SST	CG	N
0.375	9.53	10032	1.31	33.3	.285	7.2	15	2.6	.62	16	9.2	41	.63	16.0	0.045	1.1	13.0	SPR	C	Z
0.375	9.53	12400	1.38	34.9	.341	8.7	.22	.04	1.1	28	.24	1.1	.26	6.5	0.017	0.4	14.0	MW	C	N
0.375	9.53	UU-68	1.38	34.9	.327	8.3	.96	.17	1.1	27	1.0	4.5	.31	7.9	0.024	0.6	12.0	SST	C	N
0.375	9.53	3507	1.38	34.9	.315	8.0	3.7	.64	1.1	27	3.9	17	.32	8.2	0.030	0.8	9.75	MW	C	Z
0.375	9.53	S-207	1.38	34.9	.293	7.4	8.6	1.5	.76	19	6.6	29	.57	14.6	0.041	1.0	13.0	SST	C	N
0.375	9.53	S-282	1.38	34.9	.257	6.5	51	8.8	.35	9.0	18	79	.68	17.2	0.059	1.5	11.5	SST	CG	N
0.375	9.53	H-44	1.38	34.9	.247	6.3	68	12	.35	8.9	24	107	.88	22.4	0.064	1.6	13.8	SPR	CG	GI
0.375	9.53	S-1067	1.38	34.9	.231	5.9	142	25	.21	5.3	30	133	.76	19.2	0.072	1.8	10.5	SST	CG	N
0.375	9.53	12712	1.39	35.3	.307	7.8	6.1	1.1	.97	25	5.9	26	.37	9.5	0.034	0.9	10.0	MW	C	N
0.375	9.53	10579	1.41	35.7	.335	8.5	.51	.09	1.1	29	.59	2.6	.26	6.6	0.020	0.5	12.0	MW	C	Z
0.375	9.53	3936	1.41	35.7	.313	8.0	5.4	.95	.82	21	4.5	20	.28	7.1	0.031	0.8	8.00	MW	C	Z
0.375	9.53	N-125	1.44	36.5	.315	8.0	3.1	.54	.88	22	2.7	12	.33	8.4	0.030	0.8	10.0	SST	C	N
0.375	9.53	FF-87	1.44	36.5	.315	8.0	3.8	.66	.72	18	2.7	12	.29	7.2	0.030	0.8	8.50	SST	C	N
0.375	9.53	FF-94	1.44	36.5	.281	7.1	13	2.3	.64	16	8.5	38	.80	20.3	0.047	1.2	17.0	SPR	CG	GI
0.375	9.53	4183	1.50	38.1	.341	8.7	.19	.03	1.2	31	.23	1.0	.28	7.2	0.017	0.4	15.8	MW	C	N
0.375	9.53	111	1.50	38.1	.325	8.3	1.7	.31	1.2	31	2.2	9.6	.26	6.7	0.025	0.6	9.50	MW	C	Z
0.375	9.53	S-1421	1.50	38.1	.321	8.2	3.0	.53	.66	17	2.0	8.9	.22	5.7	0.027	0.7	7.25	SST	C	N
0.375	9.53	30	1.50	38.1	.319	8.1	2.6	.46	1.2	30	3.2	14	.31	7.8	0.028	0.7	10.0	MW	C	Z
0.375	9.53	S-14	1.50	38.1	.317	8.1	2.1	.37	1.1	29	2.4	11	.38	9.6	0.029	0.7	12.0	SST	C	N
0.375	9.53	2551	1.50	38.1	.315	8.0	2.6	.45	1.1	27	2.8	12	.42	10.7	0.030	0.8	13.0	MW	C	Z
0.375	9.53	S-739	1.50	38.1	.311	7.9	3.9	.69	.84	21	3.3	15	.36	9.1	0.032	0.8	10.3	SST	C	N
0.375	9.53	3820	1.50	38.1	.299	7.6	8.2	1.4	.68	17	5.6	25	.44	11.1	0.038	1.0	11.5	SPR	CG	Z
0.375	9.53	G-73	1.50	38.1	.293	7.4	9.7	1.7	.68	17	6.6	29	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.375	9.53	S-744	1.50	38.1	.291	7.4	10	1.8	.69	17	7.1	31	.56	14.1	0.042	1.1	12.3	SST	C	N
0.375	9.53	S-1216	1.50	38.1	.287	7.3	16	2.8	.50	13	8.1	36	.48	12.3	0.044	1.1	10.0	SST	C	N
0.375	9.53	2554	1.50	38.1	.285	7.2	16	2.7	.59	15	9.2	41	.61	15.4	0.045	1.1	12.5	SPR	C	Z
0.375	9.53	J-50	1.50	38.1	.285	7.2	12	2.1	.73	18	8.6	38	.63	16.0	0.045	1.1	14.0	SST	CG	N
0.375	9.53	10001	1.50	38.1	.281	7.1	20	3.5	.73	19	15	65	.61	15.5	0.047	1.2	12.0	MW	C	Z
0.375	9.53	MM-42	1.50	38.1	.275	7.0	24	4.3	.45	11	11	49	.58	14.6	0.050	1.3	11.5	SST	CG	N
0.375	9.53	3712	1.50	38.1	.263	6.7	33	5.9	.49	12	16	73	.84	21.3	0.056	1.4	15.0	SPR	CG	Z
0.375	9.53	YY-56	1.50	38.1	.245	6.2	78	14	.44	11	35	155	.85	21.5	0.065	1.7	13.0	MW	CG	Z
0.375	9.53	B2-46	1.50	38.1	.213	5.4	325	57	.14	3.5	44	197	.77	19.6	0.081	2.1	9.50	SPR	CG	N
0.375	9.53	4268	1.56	39.7	.335	8.5	.49	.09	1.3	33	.63	2.8	.27	6.9	0.020	0.5	12.5	MW	C	BO
0.375	9.53	2650	1.56	39.7	.299	7.6	7.3	1.3	.77	20	5.6	25	.52	13.3	0.038	1.0	12.8	SPR	C	Z
0.375	9.53	L-46	1.56	39.7	.295	7.5	8.5	1.5	.77	20	6.5	29	.58	14.7	0.040	1.0	13.5	SPR	C	N
0.375	9.53	10998	1.56	39.7	.275	7.0	27	4.7	.44	11	12	52	.64	16.2	0.050	1.3	11.8	HD	C	Z
0.375	9.53	10167	1.59	40.5	.319	8.1	2.6	.46	1.3	32	3.3	15	.31	7.8	0.028	0.7	10.0	MW	C	Z
0.375	9.53	UU-59	1.69	42.8	.231	5.9	93	16	.34	8.7	32	142	1.22	31.1	0.072	1.8	17.0	HD	CG	Z
0.375	9.53	S-1442	1.69	42.8	.215	5.5	166	29	.24	6.1	40	178	1.20	30.5	0.080	2.0	14.0	SST	C	N
0.375	9.53	3904	1.75	44.5	.335	8.5	.57	.10	1.5	38	.86	3.8	.24	6.1	0.020	0.5	11.0	MW	C	Z
0.375	9.53	3316	1.75	44.5	.325	8.3	1.0	.18	1.4	34	1.4	6.0	.40	10.2	0.025	0.6	15.0	MW	C	Z
0.375	9.53	TT-63	1.75	44.5	.325	8.3	.84	.15	1.3	33	1.1	4.8	.46	11.7	0.025	0.6	17.5	MW	C	Z
0.375	9.53	525	1.75	44.5	.307	7.8	3.7	.65	1.1	29	4.2	19	.54	13.8	0.034	0.9	15.0	HD	C	Z
0.375	9.53	12480	1.75	44.5	.305	7.7	3.7	.64	1.1	29	4.1	18	.53	13.3	0.035	0.9	15.0	SST	CG	N
0.375	9.53	114	1.75	44.5	.293	7.4	8.2	1.4	.85	22	7.0	31	.67	16.9	0.041	1.0	15.3	HD	C	Z
0.375	9.53	12293	1.75	44.5	.281	7.1	15	2.6	.71	18	10	47	.73	18.5	0.047	1.2	15.5	SPR	CG	GI
0.375	9.53	3037	1.78	45.2	.287	7.3	11	1.9	.79	20	8.6	38	.68	17.3	0.044	1.1	15.5	SPR	CG	GI
0.375	9.53	3941	1.78	45.2	.251	6.4	46	8.1	.47	12	22	97	1.05	26.8	0.062	1.6	17.0	SPR	CG	Z
0.375	9.53	11587	1.81	46.0	.287	7.3	11	2.0	.76	19	8.6	38	.70	17.9	0.044	1.1	15.0	SPR	CG	N
0.375	9.53	CC-94	1.81	46.0	.285	7.2	11	1.9	.79	20	8.6	38	.68	17.1	0.045	1.1	15.0	SST	CG	N
0.375	9.53	4363	1.88	47.6	.281	7.1	19	3.3	.55	14	10	47	.59	14.9	0.047	1.2	12.5	SPR	CG	Z
0.375	9.53	S-1382	2.00	50.8	.335	8.5	.56	.10	1.5	39	.86	3.8	.22	5.6	0.020	0.5	10.0	SST	C	N
0.375	9.53	10192	2.00	50.8	.319	8.1	1.5	.26	1.6	39	2.3	10	.45	11.4	0.028	0.7	16.0	MW	CG	Z
0.375	9.53	10284	2.00	50.8	.315	8.0	2.0	.35	1.5	38	3.0	13	.51	13.0	0.030	0.8	16.0	MW	C	Z
0.375	9.53	S-442	2.00	50.8	.311	7.9	2.0	.36	1.4	36	2.9	13	.58	14.6	0.032	0.8	18.0	SST	CG	N
0.375	9.53	00-91	2.00	50.8	.295	7.5	5.8	1.0	1.1	29	6.5	29	.76	19.3	0.040	1.0	19.0	SPR	CG	N
0.375	9.53	384	2.00	50.8	.293	7.4	7.1	1.3	.98	25	7.0	31	.75	19.0	0.041	1.0	17.3	HD	C	Z
0.375	9.53	3605	2.00	50.8	.285	7.2	11	1.9	1.2	30	13	57	.81	20.6	0.045	1.1	17.0	MW	C	Z
0.375	9.53	17	2.00	50.8	.281	7.1	12	2.1	.88	22	10	47	.93	23.6	0.047	1.2	18.8	HD	C	Z
0.375	9.53	II-77	2.00	50.8	.281	7.1	10	1.8	.94	24	9.8	44	.87	22.1	0.047	1.2	18.5	SST	CG	N
0.375	9.53	12759	2.00	50.8	.281	7.1	14	2.5	.74	19	10	47	.75	19.1	0.047	1.2	16.0	HD	CG	Z
0.375	9.53	B2-52	2.00	50.8	.279	7.1	15	2.5	1.1	27	15	69	.86	21.9	0.048	1.2	17.0	MW	C	N
0.375	9.53	2579	2.00	50.8	.275	7.0	17	3.1	.93	24	16	72	.85	21.6	0.050	1.3	17.0	MW	CG	Z
0.375	9.53	3631	2.00	50.8	.263	6.7	36	6.4	.62	16	23	101	.78	19.9	0.056	1.4	14.0	MW	CG	Z
0.375	9.53	B18-172	2.00	50.8	.251	6.4	44	7.7	.47	12	21	92	.99	25.2	0.062	1.6	16.0	SST	CG	N
0.375	9.53	11225	2.03	51.6	.233	5.9	73	13	.42	11	31	136	1.40	35.6	0.071	1.8	19.8	SPR	CG	Z
0.375	9.53	I-37	2.06	52.4	.247	6.3	50	8.8	.48	12	24	107	1.15	29.3	0.064	1.6	18.0	SPR	CG	Z
0.375	9.53	MM-57	2.19	55.6	.315	8.0	2.6	.45	1.6	40	4.1	18	.39	9.9	0.030	0.8	13.0	MW	CG	GI
0.375	9.53	12686	2.25	57.2	.317	8.1	1.9	.34	1.3	32	2.5	11	.41	10.3	0.029	0.7	13.0	SST	C	N
0.375	9.53	14	2.25	57.2	.251	6.4	34	5.9	.65	16	22	97	1.46	37.0	0.062	1.6	22.5	HD	C	Z
0.375	9.53	2788	2.25	57.2	.251	6.4	39	6.8	.56	14	22	97	1.23	31.3	0.062	1.6	20.0	SPR	CG	Z
0.375	9.53	4180	2.25	57.2	.247	6.3	45	7.8	.54	14	24	107	1.34	34.1	0.064	1.6	20.0	SPR	C	Z
0.375	9.53	K-57	2.38	60.3	.327	8.3	1.0	.18	2.0	52	2.0	9.1	.34	8.5	0.024	0.6	13.0	MW	C	GI
0.375	9.53	3928	2.38	60.3	.307	7.8	2.7	.47	1.6	40	4.2	19	.71	18.1	0.034	0.9	20.0	SPR	C	Z
0.375	9.53	3557	2.38	60.3	.293	7.4	5.5	.95	1.5	37	8.0	36	.90	22.9	0.041	1.0	22.0	MW	CG	Z
0.375	9.53	12471	2.38	60.3	.275	7.0	14	2.4	.85	22	12	52	1.05	26.7	0.050	1.3	21.0	SPR	CG	Z
0.375	9.53	S-1122	2.50	63.5	.251	6.4	23	4.1	.76	19	18	79	1.74	44.1	0.062	1.6	28.0	SST	CG	N
0.375	9.53	S-1621	2.53	64.3	.285	7.2	7.9	1.4	1.1	28	8.6	38	.97	24.6	0.045	1.1	20.5	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.375	9.53	11733	2.59	65.9	.250	6.4	33	5.7	.69	17	22	100	1.56	39.7	0.063	1.6	24.0	SPR	CG	Z
0.375	9.53	I-48	2.63	66.7	.295	7.5	5.8	1.0	1.1	28	6.5	29	.79	20.1	0.040	1.0	18.8	SPR	C	N
0.375	9.53	11981	2.66	67.5	.295	7.5	6.1	1.1	1.1	27	6.5	29	.76	19.3	0.040	1.0	18.0	SPR	C	Z
0.375	9.53	B2-49	2.75	69.9	.291	7.4	6.4	1.1	1.1	28	7.1	31	.78	19.7	0.042	1.1	18.5	SST	CG	N
0.375	9.53	12537	2.91	73.9	.231	5.9	56	9.7	.57	15	32	142	2.02	51.2	0.072	1.8	27.0	SPR	C	N
0.375	9.53	12201	3.00	76.2	.313	8.0	1.5	.26	2.2	57	3.3	15	.78	19.7	0.031	0.8	24.0	MW	C	Z
0.375	9.53	12257	3.00	76.2	.291	7.4	6.5	1.1	1.2	29	7.5	34	.90	22.9	0.042	1.1	20.5	SPR	C	Z
0.375	9.53	10002	3.00	76.2	.281	7.1	10	1.8	1.0	26	10	47	1.06	26.9	0.047	1.2	21.5	SPR	C	Z
0.375	9.53	B17-177	3.19	81.0	.281	7.1	6.6	1.2	1.6	40	10	47	1.50	38.2	0.047	1.2	32.0	SPR	CG	Z
0.375	9.53	1713	3.34	84.9	.299	7.6	2.7	.47	2.1	53	5.6	25	1.23	31.2	0.038	1.0	31.3	SPR	C	Z
0.375	9.53	10921	3.38	85.7	.273	6.9	11	2.0	1.1	28	12	55	1.43	36.3	0.051	1.3	27.0	SPR	C	Z
0.375	9.53	3134	3.47	88.1	.267	6.8	13	2.4	1.1	28	15	65	1.65	41.8	0.054	1.4	29.5	SPR	C	Z
0.375	9.53	S-1335	3.50	88.9	.313	8.0	1.4	.25	2.1	54	3.0	13	.71	18.1	0.031	0.8	22.0	SST	C	N
0.375	9.53	12007	3.50	88.9	.295	7.5	4.7	.82	1.4	36	6.5	29	.96	24.4	0.040	1.0	23.0	SPR	C	Z
0.375	9.53	2545	3.50	88.9	.263	6.7	16	2.8	1.0	26	16	73	1.72	43.6	0.056	1.4	29.7	SPR	C	Z
0.375	9.53	2947	3.63	92.1	.293	7.4	3.2	.56	2.1	54	6.8	30	1.52	38.5	0.041	1.0	36.0	SPR	C	Z
0.375	9.53	3921	3.75	95.3	.247	6.3	22	3.8	1.1	28	24	107	2.50	63.4	0.064	1.6	39.0	SPR	CG	Z
0.375	9.53	12210	3.75	95.3	.245	6.2	23	4.1	1.1	27	25	111	2.54	64.4	0.065	1.7	39.0	SPR	CG	N
0.375	9.53	4301	3.75	95.3	.231	5.9	40	6.9	.80	20	32	142	2.66	67.7	0.072	1.8	37.0	SPR	CG	Z
0.375	9.53	B4-7	4.00	101.6	.329	8.4	3.7	.65	.53	14	2.0	8.7	.13	3.2	0.023	0.6	4.50	MW	C	N
0.375	9.53	10600	4.00	101.6	.275	7.0	6.2	1.1	1.8	46	11	50	2.20	55.9	0.050	1.3	44.0	SPR	CG	Z
0.375	9.53	10173	4.50	114.3	.275	7.0	6.9	1.2	1.7	43	12	52	2.00	50.8	0.050	1.3	40.0	SPR	CG	Z
0.375	9.53	3103	7.50	190.5	.251	6.4	12	2.0	1.9	48	22	97	3.91	99.2	0.062	1.6	62.0	SPR	C	Z
0.375	9.53	517	9.00	228.6	.281	7.1	2.6	.44	4.2	107	10	47	3.88	98.5	0.047	1.2	81.5	HD	C	Z
0.375	9.53	12649	10.5	266.7	.299	7.6	1.1	.19	5.1	129	5.6	25	2.74	69.5	0.038	1.0	71.0	SPR	O	N
0.375	9.53	508	12.0	304.8	.251	6.4	5.9	1.0	3.7	94	22	97	7.44	189.0	0.062	1.6	119.0	HD	C	Z
0.380	9.65	A12-31	1.00	25.4	.338	8.6	1.1	.19	.82	21	.90	4.0	.18	4.5	0.021	0.5	7.50	MW	C	Z
0.390	9.91	K-73	.25	6.4	.310	7.9	75	13	.08	2.0	5.9	26	.12	3.0	0.040	1.0	3.00	SST	CG	N
0.390	9.91	10472	.31	7.9	.346	8.8	1.2	.22	.13	3.2	.15	.68	.19	4.7	0.022	0.6	7.50	MW	C	Z
0.390	9.91	FF-12	.34	8.7	.290	7.4	114	20	.09	2.4	11	47	.19	4.8	0.050	1.3	3.75	SST	CG	N
0.390	9.91	A13-57	.38	9.5	.320	8.1	28	4.8	.15	3.9	4.3	19	.13	3.3	0.035	0.9	3.75	SPR	CG	N
0.390	9.91	DD-61	.38	9.5	.286	7.3	118	21	.10	2.6	12	53	.21	5.3	0.052	1.3	4.00	SST	CG	N
0.390	9.91	DD-79	.41	10.3	.320	8.1	21	3.8	.20	5.0	4.3	19	.15	3.8	0.035	0.9	4.25	SPR	CG	N
0.390	9.91	O-49	.44	11.1	.326	8.3	7.3	1.3	.25	6.2	1.8	8.0	.19	4.9	0.032	0.8	6.00	SST	CG	N
0.390	9.91	MM-30	.44	11.1	.310	7.9	25	4.3	.22	5.5	5.3	24	.22	5.6	0.040	1.0	5.50	SPR	CG	Z
0.390	9.91	10946	.47	11.9	.340	8.6	4.1	.72	.33	8.4	1.4	6.0	.14	3.5	0.025	0.6	4.50	SST	C	N
0.390	9.91	O-77	.50	12.7	.330	8.4	6.2	1.1	.29	7.4	1.8	8.0	.21	5.3	0.030	0.8	6.00	MW	C	N
0.390	9.91	W-8	.50	12.7	.324	8.2	9.4	1.6	.27	6.8	2.5	11	.23	5.9	0.033	0.8	6.00	SPR	C	GI
0.390	9.91	G-79	.50	12.7	.316	8.0	15	2.7	.28	7.1	4.3	19	.22	5.6	0.037	0.9	6.00	SPR	CG	N
0.390	9.91	H-84	.50	12.7	.310	7.9	25	4.4	.24	6.0	5.9	26	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.390	9.91	71283	.50	12.7	.304	7.7	42	7.3	.26	6.6	11	48	.21	5.3	0.043	1.1	4.88	MW	CG	N
0.390	9.91	71283S	.50	12.7	.304	7.7	35	6.2	.21	5.2	7.3	32	.21	5.3	0.043	1.1	4.88	SST	CG	N
0.390	9.91	71298	.50	12.7	.296	7.5	59	10	.24	6.0	14	62	.24	6.0	0.047	1.2	5.00	MW	CG	N
0.390	9.91	71298S	.50	12.7	.296	7.5	50	8.8	.19	4.8	9.5	42	.24	6.0	0.047	1.2	5.00	SST	CG	N
0.390	9.91	S-144	.50	12.7	.220	5.6	920	161	.05	1.3	46	205	.38	9.7	0.085	2.2	4.50	SST	CG	N
0.390	9.91	71284	.56	14.2	.304	7.7	36	6.4	.30	7.5	11	48	.23	5.7	0.043	1.1	5.25	MW	CG	N
0.390	9.91	71284S	.56	14.2	.304	7.7	31	5.4	.24	6.0	7.3	32	.23	5.7	0.043	1.1	5.25	SST	CG	N
0.390	9.91	71299	.56	14.2	.296	7.5	51	9.0	.27	6.9	14	62	.25	6.4	0.047	1.2	5.38	MW	CG	N
0.390	9.91	71299S	.56	14.2	.296	7.5	44	7.6	.22	5.5	9.5	42	.25	6.4	0.047	1.2	5.38	SST	CG	N
0.390	9.91	K-64	.56	14.3	.336	8.5	3.2	.56	.35	8.8	1.1	4.9	.22	5.5	0.027	0.7	7.00	MW	C	Z
0.390	9.91	10331	.59	15.1	.328	8.3	14	2.5	.30	7.6	4.3	19	.12	3.1	0.031	0.8	4.00	MW	CG	Z
0.390	9.91	WW-8	.63	15.9	.360	9.1	.48	.08	.54	14	.26	1.2	.08	2.1	0.015	0.4	4.50	SST	C	N
0.390	9.91	M-84	.63	15.9	.344	8.7	1.4	.24	.44	11	.60	2.7	.18	4.7	0.023	0.6	8.00	MW	C	BO
0.390	9.91	FF-99	.63	15.9	.270	6.9	148	26	.13	3.3	19	85	.39	9.9	0.060	1.5	5.50	SPR	C	N
0.390	9.91	S-47	.63	15.9	.266	6.8	105	18	.19	4.8	20	88	.43	11.0	0.062	1.6	7.00	SST	CG	N
0.390	9.91	71285	.63	16.0	.304	7.7	32	5.6	.34	8.6	11	48	.25	6.3	0.043	1.1	5.75	MW	CG	N
0.390	9.91	71285S	.63	16.0	.304	7.7	27	4.7	.27	6.9	7.3	32	.25	6.3	0.043	1.1	5.75	SST	CG	N
0.390	9.91	71300	.63	16.0	.296	7.5	45	8.0	.31	7.8	14	62	.28	7.0	0.047	1.2	5.88	MW	CG	N
0.390	9.91	71300S	.63	16.0	.296	7.5	39	6.8	.25	6.2	9.5	42	.28	7.0	0.047	1.2	5.88	SST	CG	N
0.390	9.91	I-23	.69	17.4	.328	8.3	8.2	1.4	.49	12	4.0	18	.20	5.1	0.031	0.8	5.50	MW	C	N
0.390	9.91	AA-28	.69	17.4	.310	7.9	19	3.3	.31	7.9	5.9	26	.24	6.1	0.040	1.0	6.00	SST	CG	N
0.390	9.91	71286	.69	17.5	.304	7.7	29	5.0	.38	9.6	11	48	.26	6.7	0.043	1.1	6.13	MW	CG	N
0.390	9.91	71286S	.69	17.5	.304	7.7	24	4.2	.30	7.7	7.3	32	.26	6.7	0.043	1.1	6.13	SST	CG	N
0.390	9.91	71301	.69	17.5	.296	7.5	41	7.1	.35	8.8	14	62	.29	7.5	0.047	1.2	6.25	MW	CG	N
0.390	9.91	71301S	.69	17.5	.296	7.5	34	6.0	.27	7.0	9.5	42	.29	7.5	0.047	1.2	6.25	SST	CG	N
0.390	9.91	B5-64	.75	19.1	.372	9.4	.03	.01	.68	17	.02	.10	.07	1.8	0.009	0.2	7.00	MW	C	N
0.390	9.91	PP-91	.75	19.1	.310	7.9	12	2.2	.39	9.9	4.9	22	.36	9.1	0.040	1.0	8.00	SST	C	N
0.390	9.91	71287	.75	19.1	.304	7.7	26	4.6	.41	10	11	48	.28	7.1	0.043	1.1	6.50	MW	CG	N
0.390	9.91	71287S	.75	19.1	.304	7.7	22	3.9	.33	8.4	7.3	32	.28	7.1	0.043	1.1	6.50	SST	CG	N
0.390	9.91	2862	.75	19.1	.296	7.5	35	6.1	.29	7.4	10	45	.38	9.6	0.047	1.2	7.00	SPR	C	Z
0.390	9.91	71302	.75	19.1	.296	7.5	35	6.0	.41	10	14	62	.33	8.4	0.047	1.2	7.00	MW	CG	N
0.390	9.91	71302S	.75	19.1	.296	7.5	29	5.1	.32	8.2	9.5	42	.33	8.4	0.047	1.2	7.00	SST	CG	N
0.390	9.91	B9-5	.75	19.1	.278	7.1	95	17	.17	4.2	16	70	.34	8.5	0.056	1.4	6.00	SPR	CG	N
0.390	9.91	3604	.75	19.1	.272	6.9	120	21	.21	5.4	25	113	.35	9.0	0.059	1.5	6.00	MW	CG	Z
0.390	9.91	K-82	.75	19.1	.266	6.8	150	26	.14	3.6	21	94	.37	9.4	0.062	1.6	6.00	HD	CG	N
0.390	9.91	71288	.81	20.6	.304	7.7	24	4.2	.45	11	11	48	.30	7.5	0.043	1.1	6.88	MW	CG	N
0.390	9.91	71288S	.81	20.6	.304	7.7	20	3.6	.36	9.1	7.3	32	.30	7.5	0.043	1.1	6.88	SST	CG	N
0.390	9.91	71303	.81	20.6	.296	7.5	34	5.9	.42	11	14	62	.33	8.5	0.047	1.2	7.13	MW	CG	N
0.390	9.91	71303S	.81	20.6	.296	7.5	29	5.0	.33	8.4	9.5	42	.33	8.5	0.047	1.2	7.13	SST	CG	N
0.390	9.91	11290	.81	20.6	.348	8.8	1.2	.22	.67	17	.82	3.6	.15	3.7	0.021	0.5	6.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.390	9.91	NN-47	.81	20.6	.334	8.5	2.8	.49	.57	14	1.6	7.1	.25	6.2	0.028	0.7	7.75	SST	C	N
0.390	9.91	HH-18	.81	20.6	.326	8.3	6.3	1.1	.50	13	3.2	14	.24	6.1	0.032	0.8	6.50	SST	C	N
0.390	9.91	A-91	.88	22.2	.342	8.7	1.6	.28	.66	17	1.1	4.8	.22	5.5	0.024	0.6	8.00	MW	C	N
0.390	9.91	CC-78	.88	22.2	.340	8.6	2.7	.47	.57	14	1.5	6.8	.17	4.3	0.025	0.6	5.75	SST	C	N
0.390	9.91	11448	.88	22.2	.332	8.4	4.8	.84	.50	13	2.4	11	.20	5.2	0.029	0.7	6.00	SST	C	N
0.390	9.91	10919	.88	22.2	.330	8.4	5.5	.97	.47	12	2.6	12	.21	5.3	0.030	0.8	6.00	SST	C	N
0.390	9.91	B10-16	.88	22.2	.322	8.2	14	2.5	.29	7.3	4.1	18	.20	5.2	0.034	0.9	5.00	SPR	C	N
0.390	9.91	H-31	.88	22.2	.320	8.1	6.0	1.0	.56	14	3.4	15	.32	8.0	0.035	0.9	9.00	SST	CG	N
0.390	9.91	3845	.88	22.2	.310	7.9	17	3.0	.37	9.3	6.3	28	.28	7.1	0.040	1.0	7.00	SPR	CG	Z
0.390	9.91	B15-34	.88	22.2	.310	7.9	13	2.2	.47	12	5.9	26	.32	8.1	0.040	1.0	8.00	SST	CG	N
0.390	9.91	AA-44	.88	22.2	.290	7.4	34	5.9	.32	8.0	11	47	.40	10.2	0.050	1.3	8.00	SST	CG	N
0.390	9.91	3781	.88	22.2	.266	6.8	100	18	.21	5.3	21	94	.50	12.6	0.062	1.6	8.00	HD	CG	Z
0.390	9.91	71289	.88	22.4	.304	7.7	22	3.8	.49	13	11	48	.32	8.1	0.043	1.1	7.38	MW	CG	N
0.390	9.91	71289S	.88	22.4	.304	7.7	19	3.2	.39	10	7.3	32	.32	8.1	0.043	1.1	7.38	SST	CG	N
0.390	9.91	71304	.88	22.4	.296	7.5	29	5.0	.49	12	14	62	.38	9.7	0.047	1.2	8.13	MW	CG	N
0.390	9.91	71304S	.88	22.4	.296	7.5	24	4.2	.39	9.9	9.5	42	.38	9.7	0.047	1.2	8.13	SST	CG	N
0.390	9.91	S-1694	.91	23.0	.334	8.5	4.0	.71	.53	13	2.1	9.5	.20	5.0	0.028	0.7	6.00	SST	C	N
0.390	9.91	3576	.91	23.0	.320	8.1	4.7	.82	.48	12	2.2	10	.43	10.9	0.035	0.9	12.3	HD	CG	GI
0.390	9.91	A10-26	.91	23.0	.306	7.8	15	2.6	.45	11	6.8	30	.35	8.8	0.042	1.1	8.25	SST	CG	N
0.390	9.91	BB-8	.94	23.8	.350	8.9	.75	.13	.77	20	.58	2.6	.17	4.2	0.020	0.5	7.25	SST	C	N
0.390	9.91	MM-43	.94	23.8	.230	5.8	395	69	.10	2.7	41	185	.56	14.2	0.080	2.0	7.00	SPR	CG	BO
0.390	9.91	71290	.94	23.9	.304	7.7	20	3.5	.53	14	11	48	.34	8.6	0.043	1.1	7.88	MW	CG	N
0.390	9.91	71290S	.94	23.9	.304	7.7	17	3.0	.43	11	7.3	32	.34	8.6	0.043	1.1	7.88	SST	CG	N
0.390	9.91	71305	.94	23.9	.296	7.5	28	5.0	.49	13	14	62	.38	9.7	0.047	1.2	8.13	MW	CG	N
0.390	9.91	71305S	.94	23.9	.296	7.5	24	4.2	.39	9.9	9.5	42	.38	9.7	0.047	1.2	8.13	SST	CG	N
0.390	9.91	10955	.97	24.6	.344	8.7	1.5	.26	.77	20	1.1	5.1	.20	5.0	0.023	0.6	7.50	MW	C	Z
0.390	9.91	S-912	.97	24.6	.308	7.8	12	2.1	.53	14	6.3	28	.37	9.4	0.041	1.0	9.00	SST	CG	N
0.390	9.91	U-30	.97	24.6	.262	6.7	73	13	.30	7.5	22	97	.66	16.7	0.064	1.6	10.3	SST	CG	N
0.390	9.91	A12-14	.97	24.6	.346	8.8	1.2	.22	.78	20	.96	4.3	.19	4.7	0.022	0.6	7.50	MW	C	Z
0.390	9.91	EE-98	1.00	25.4	.344	8.7	.49	.09	.55	14	.27	1.2	.45	11.4	0.023	0.6	18.5	MW	C	Z
0.390	9.91	A-82	1.00	25.4	.320	8.1	8.8	1.5	.48	12	4.3	19	.30	7.6	0.035	0.9	7.50	SPR	C	Z
0.390	9.91	0-154	1.00	25.4	.308	7.8	13	2.2	.53	14	6.8	30	.43	10.9	0.041	1.0	9.50	SPR	C	GI
0.390	9.91	71291	1.00	25.4	.304	7.7	19	3.3	.58	15	11	48	.35	9.0	0.043	1.1	8.25	MW	CG	N
0.390	9.91	71291S	1.00	25.4	.304	7.7	16	2.8	.46	12	7.3	32	.35	9.0	0.043	1.1	8.25	SST	CG	N
0.390	9.91	71306	1.00	25.4	.296	7.5	27	4.7	.52	13	14	62	.40	10.1	0.047	1.2	8.50	MW	CG	N
0.390	9.91	71306S	1.00	25.4	.296	7.5	23	4.0	.42	11	9.5	42	.40	10.1	0.047	1.2	8.50	SST	CG	N
0.390	9.91	PP-6	1.00	25.4	.290	7.4	24	4.2	.45	11	11	47	.53	13.3	0.050	1.3	10.5	SST	CG	N
0.390	9.91	B9-28	1.00	25.4	.272	6.9	84	15	.22	5.6	18	81	.46	11.6	0.059	1.5	7.75	SPR	CG	Z
0.390	9.91	B10-23	1.06	27.0	.274	7.0	54	9.5	.30	7.7	16	73	.54	13.6	0.058	1.5	9.25	SST	CG	N
0.390	9.91	H-61	1.06	27.0	.262	6.7	99	17	.23	5.9	23	103	.58	14.6	0.064	1.6	9.00	SPR	CG	Z
0.390	9.91	S-1130	1.13	28.6	.360	9.1	.15	.03	.96	24	.14	.64	.17	4.2	0.015	0.4	10.0	SST	C	N
0.390	9.91	4134	1.13	28.6	.260	6.6	107	19	.23	5.8	24	108	.65	16.5	0.065	1.7	9.00	SPR	C	Z
0.390	9.91	71292	1.13	28.7	.304	7.7	17	2.9	.65	17	11	48	.39	10.0	0.043	1.1	9.13	MW	CG	N
0.390	9.91	71292S	1.13	28.7	.304	7.7	14	2.5	.52	13	7.3	32	.39	10.0	0.043	1.1	9.13	SST	CG	N
0.390	9.91	71307	1.13	28.7	.296	7.5	24	4.1	.59	15	14	62	.44	11.2	0.047	1.2	9.38	MW	CG	N
0.390	9.91	71307S	1.13	28.7	.296	7.5	20	3.5	.47	12	9.5	42	.44	11.2	0.047	1.2	9.38	SST	CG	N
0.390	9.91	K-7	1.19	30.2	.316	8.0	7.2	1.3	.65	16	4.7	21	.39	9.9	0.037	0.9	9.50	SST	C	N
0.390	9.91	G-55	1.19	30.2	.308	7.8	9.8	1.7	.65	16	6.3	28	.47	12.0	0.041	1.0	10.5	SST	C	N
0.390	9.91	3243	1.19	30.2	.290	7.4	23	4.1	.48	12	11	50	.64	16.2	0.050	1.3	11.8	SPR	C	Z
0.390	9.91	A-90	1.19	30.2	.262	6.7	103	18	.22	5.7	23	103	.56	14.2	0.064	1.6	8.75	HD	CG	N
0.390	9.91	A10-5	1.22	31.0	.340	8.6	1.9	.33	.82	21	1.5	6.8	.19	4.8	0.025	0.6	7.50	SST	CG	N
0.390	9.91	YY-67	1.25	31.8	.346	8.8	.68	.12	.96	24	.65	2.9	.29	7.3	0.022	0.6	12.0	MW	C	Z
0.390	9.91	B4-19	1.25	31.8	.344	8.7	1.1	.20	1.0	26	1.1	5.1	.24	6.0	0.023	0.6	9.25	MW	C	N
0.390	9.91	71293	1.25	31.8	.304	7.7	15	2.6	.73	19	11	48	.43	10.9	0.043	1.1	10.0	MW	CG	N
0.390	9.91	71293S	1.25	31.8	.304	7.7	13	2.2	.58	15	7.3	32	.43	10.9	0.043	1.1	10.0	SST	CG	N
0.390	9.91	71308	1.25	31.8	.296	7.5	21	3.6	.67	17	14	62	.49	12.4	0.047	1.2	10.4	MW	CG	N
0.390	9.91	71308S	1.25	31.8	.296	7.5	18	3.1	.54	14	9.5	42	.49	12.4	0.047	1.2	10.4	SST	CG	N
0.390	9.91	S-304	1.25	31.8	.266	6.8	43	7.5	.35	8.9	15	67	.90	22.8	0.062	1.6	14.5	SST	CG	N
0.390	9.91	3002	1.25	31.8	.264	6.7	76	13	.29	7.4	22	98	.66	16.8	0.063	1.6	10.5	SPR	CG	Z
0.390	9.91	U-56	1.25	31.8	.264	6.7	79	14	.28	7.2	22	98	.71	18.0	0.063	1.6	10.3	SPR	C	Z
0.390	9.91	12132	1.28	32.5	.262	6.7	82	14	.28	7.2	23	103	.74	18.7	0.064	1.6	10.5	SPR	C	Z
0.390	9.91	S-894	1.28	32.5	.260	6.6	52	9.1	.34	8.6	18	78	.94	23.9	0.065	1.7	14.5	SST	CG	N
0.390	9.91	QQ-54	1.34	34.1	.318	8.1	6.8	1.2	.94	24	6.4	28	.40	10.1	0.036	0.9	10.0	MW	C	Z
0.390	9.91	3850	1.38	34.9	.330	8.4	4.2	.73	.94	24	3.9	17	.27	6.9	0.030	0.8	8.00	MW	C	Z
0.390	9.91	10037	1.38	34.9	.328	8.3	2.9	.50	1.0	25	2.9	13	.37	9.4	0.031	0.8	12.0	MW	CG	Z
0.390	9.91	A-89	1.38	34.9	.308	7.8	9.2	1.6	.69	17	6.3	28	.45	11.5	0.041	1.0	11.0	SST	CG	N
0.390	9.91	71294	1.38	35.1	.304	7.7	13	2.3	.81	20	11	48	.46	11.7	0.043	1.1	10.8	MW	CG	N
0.390	9.91	71294S	1.38	35.1	.304	7.7	11	2.0	.64	16	7.3	32	.46	11.7	0.043	1.1	10.8	SST	CG	N
0.390	9.91	71309	1.38	35.1	.296	7.5	19	3.3	.75	19	14	62	.53	13.4	0.047	1.2	11.3	MW	CG	N
0.390	9.91	71309S	1.38	35.1	.296	7.5	16	2.8	.59	15	9.5	42	.53	13.4	0.047	1.2	11.3	SST	CG	N
0.390	9.91	LL-77	1.44	36.5	.308	7.8	8.3	1.5	.76	19	6.3	28	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.390	9.91	NN-54	1.47	37.3	.322	8.2	4.6	.81	.82	21	3.8	17	.37	9.5	0.034	0.9	10.0	SST	C	N
0.390	9.91	HH-54	1.47	37.3	.276	7.0	34	6.0	.48	12	17	74	.80	20.3	0.057	1.4	14.0	SPR	CG	GI
0.390	9.91	MM-84	1.50	38.1	.308	7.8	8.1	1.4	.83	21	6.8	30	.60	15.4	0.041	1.0	13.8	SPR	C	BO
0.390	9.91	71295	1.50	38.1	.304	7.7	12	2.1	.88	22	11	48	.50	12.7	0.043	1.1	11.6	MW	CG	N
0.390	9.91	71295S	1.50	38.1	.304	7.7	10	1.8	.70	18	7.3	32	.50	12.7	0.043	1.1	11.6	SST	CG	N
0.390	9.91	71310	1.50	38.1	.296	7.5	17	3.0	.82	21	14	62	.57	14.5	0.047	1.2	12.1	MW	CG	N
0.390	9.91	71310S	1.50	38.1	.296	7.5	15	2.6	.65	17	9.5	42	.57	14.5	0.047	1.2	12.1	SST	CG	N
0.390	9.91	3073	1.53	38.9	.296	7.5	13	2.3	.76	19	10	45	.71	17.9	0.047	1.2	15.0	SPR	CG	Z
0.390	9.91	12638	1.69	42.8	.312	7.9	6.1	1.1	.90	23	5.5	24	.55	13.9	0.039	1.0	13.0	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.390	9.91	L-34	1.75	44.5	.350	8.9	.33	.06	1.4	36	.46	2.1	.34	8.6	0.020	0.5	16.0	MW	C	Z
0.390	9.91	BB-76	1.75	44.5	.346	8.8	.53	.09	1.4	37	.77	3.4	.31	7.8	0.022	0.6	13.0	SST	C	N
0.390	9.91	71296	1.75	44.5	.304	7.7	10	1.8	1.0	26	11	48	.57	14.5	0.043	1.1	13.3	MW	CG	N
0.390	9.91	71296S	1.75	44.5	.304	7.7	8.9	1.6	.82	21	7.3	32	.57	14.5	0.043	1.1	13.3	SST	CG	N
0.390	9.91	71311	1.75	44.5	.296	7.5	15	2.5	.96	24	14	62	.66	16.7	0.047	1.2	14.0	MW	CG	N
0.390	9.91	71311S	1.75	44.5	.296	7.5	12	2.2	.77	19	9.5	42	.66	16.7	0.047	1.2	14.0	SST	CG	N
0.390	9.91	2922	1.81	46.0	.348	8.8	.40	.07	1.5	37	.58	2.6	.36	9.1	0.021	0.5	16.0	MW	C	Z
0.390	9.91	H-86	1.88	47.6	.350	8.9	.35	.06	1.6	39	.54	2.4	.32	8.1	0.020	0.5	15.0	MW	C	Z
0.390	9.91	3314	1.88	47.6	.296	7.5	17	3.0	.58	15	10	45	.61	15.5	0.047	1.2	12.0	HD	C	Z
0.390	9.91	TT-29	1.88	47.6	.290	7.4	14	2.5	.75	19	11	47	.80	20.3	0.050	1.3	16.0	SST	CG	N
0.390	9.91	I-50	1.88	47.6	.276	7.0	28	5.0	.58	15	17	74	.94	23.9	0.057	1.4	16.5	SPR	CG	GI
0.390	9.91	10086	2.00	50.8	.310	7.9	5.1	.90	1.2	31	6.3	28	.75	19.1	0.040	1.0	18.8	SPR	CG	N
0.390	9.91	2607	2.00	50.8	.308	7.8	6.4	1.1	1.3	32	8.0	36	.74	18.7	0.041	1.0	17.0	MW	C	GI
0.390	9.91	71297	2.00	50.8	.304	7.7	9.8	1.7	1.1	28	11	48	.60	15.3	0.043	1.1	14.0	MW	CG	N
0.390	9.91	71297S	2.00	50.8	.304	7.7	8.3	1.5	.88	22	7.3	32	.60	15.3	0.043	1.1	14.0	SST	CG	N
0.390	9.91	71312	2.00	50.8	.296	7.5	13	2.2	1.1	28	14	62	.74	18.8	0.047	1.2	15.8	MW	CG	N
0.390	9.91	71312S	2.00	50.8	.296	7.5	11	1.9	.88	22	9.5	42	.74	18.8	0.047	1.2	15.8	SST	CG	N
0.390	9.91	2764	2.00	50.8	.296	7.5	9.7	1.7	1.0	27	10	45	.94	23.9	0.047	1.2	20.0	HD	CG	Z
0.390	9.91	2943	2.03	51.6	.338	8.6	1.5	.27	1.7	43	2.6	11	.29	7.3	0.026	0.7	11.0	MW	CG	Z
0.390	9.91	2883	2.13	54.0	.296	7.5	11	1.9	.95	24	10	45	.86	21.9	0.047	1.2	18.3	SPR	CG	Z
0.390	9.91	GG-86	2.25	57.2	.326	8.3	2.0	.36	1.6	40	3.2	14	.54	13.8	0.032	0.8	16.0	SST	C	N
0.390	9.91	EE-96	2.50	63.5	.210	5.3	184	32	.30	7.6	55	246	1.89	48.0	0.090	2.3	21.0	SPR	CG	N
0.390	9.91	11396	2.69	68.2	.282	7.2	17	3.0	.83	21	14	63	1.19	30.2	0.054	1.4	21.0	HD	C	Z
0.390	9.91	S-1337	3.25	82.6	.288	7.3	10	1.8	1.1	28	11	50	1.25	31.7	0.051	1.3	23.5	SST	C	N
0.390	9.91	3392	3.38	85.7	.298	7.6	7.5	1.3	1.3	32	9.5	42	1.10	28.0	0.046	1.2	23.0	SPR	C	Z
0.390	9.91	10901	3.50	88.9	.314	8.0	3.8	.67	1.4	36	5.4	24	.76	19.3	0.038	1.0	20.0	SPR	CG	N
0.390	9.91	11465	4.75	120.7	.326	8.3	1.24	.218	2.55	64.77	3.16	14.12	.83	21.1	0.032	0.8	25.0	SST	C	N
0.406	10.31	BB-78	.38	9.5	.368	9.3	.94	.16	.28	7.1	.26	1.2	.10	2.4	0.019	0.5	5.00	SST	C	N
0.406	10.31	B-62	.38	9.5	.336	8.5	21	3.7	.19	4.9	4.1	18	.14	3.6	0.035	0.9	4.00	SPR	CG	Z
0.406	10.31	12533	.41	10.3	.370	9.4	1.5	.26	.33	8.3	.49	2.2	.08	2.1	0.018	0.5	3.50	SST	C	N
0.406	10.31	J-41	.41	10.3	.370	9.4	.86	.15	.30	7.6	.26	1.1	.11	2.7	0.018	0.5	5.00	MW	C	N
0.406	10.31	A-66	.41	10.3	.348	8.8	6.3	1.1	.26	6.6	1.7	7.3	.15	3.7	0.029	0.7	5.00	MW	CG	N
0.406	10.31	M-24	.41	10.3	.306	7.8	72	13	.15	3.8	11	48	.24	6.0	0.050	1.3	4.75	SPR	CG	N
0.406	10.31	S-1096	.44	11.1	.356	9.0	2.2	.39	.26	6.7	.58	2.6	.18	4.4	0.025	0.6	6.00	SST	C	N
0.406	10.31	W-28	.44	11.1	.350	8.9	7.3	1.3	.28	7.2	2.1	9.2	.14	3.6	0.028	0.7	4.00	SST	C	N
0.406	10.31	BB-42	.44	11.1	.306	7.8	66	12	.16	4.2	11	48	.25	6.4	0.050	1.3	5.00	SPR	CG	N
0.406	10.31	JJ-12	.50	12.7	.358	9.1	1.9	.33	.36	9.0	.66	2.9	.14	3.7	0.024	0.6	6.00	SST	CG	N
0.406	10.31	EE-89	.50	12.7	.348	8.8	6.3	1.1	.33	8.3	2.1	9.2	.17	4.4	0.029	0.7	5.00	MW	C	Z
0.406	10.31	N-63	.50	12.7	.334	8.5	16	2.8	.28	7.1	4.4	20	.18	4.6	0.036	0.9	5.00	SPR	CG	Z
0.406	10.31	A10-55	.50	12.7	.332	8.4	15	2.7	.30	7.5	4.5	20	.20	5.2	0.037	0.9	5.50	SPR	CG	N
0.406	10.31	GG-69	.50	12.7	.326	8.3	25	4.4	.24	6.2	6.1	27	.20	5.1	0.040	1.0	5.00	SPR	CG	Z
0.406	10.31	K-95	.50	12.7	.282	7.2	161	28	.13	3.2	20	91	.33	8.3	0.062	1.6	5.25	HD	CG	Z
0.406	10.31	J-17	.50	12.7	.272	6.9	297	52	.09	2.2	25	113	.30	7.7	0.067	1.7	4.50	SPR	CG	GI
0.406	10.31	I-98	.50	12.7	.242	6.1	678	119	.06	1.5	40	179	.37	9.4	0.082	2.1	4.50	SST	CG	N
0.406	10.31	B7-22	.53	13.5	.328	8.3	27	4.7	.21	5.3	5.6	25	.18	4.5	0.039	1.0	4.50	SPR	CG	Z
0.406	10.31	10843	.53	13.5	.278	7.1	172	30	.13	3.3	22	99	.35	8.9	0.064	1.6	5.50	SPR	CG	N
0.406	10.31	3629	.53	13.5	.232	5.9	846	148	.06	1.5	51	226	.44	11.0	0.087	2.2	5.00	SPR	CG	GI
0.406	10.31	A12-13	.54	13.7	.364	9.2	2.1	.37	.43	11	.92	4.1	.11	2.7	0.021	0.5	4.00	SST	C	N
0.406	10.31	B11-32	.56	14.3	.360	9.1	1.8	.31	.42	11	.76	3.4	.14	3.5	0.023	0.6	6.00	MW	CG	N
0.406	10.31	H-1	.56	14.3	.354	9.0	2.6	.46	.38	9.7	.99	4.4	.18	4.6	0.026	0.7	6.00	SST	C	N
0.406	10.31	XX-35	.56	14.3	.352	8.9	4.9	.85	.38	9.6	1.8	8.2	.15	3.8	0.027	0.7	4.50	SST	C	N
0.406	10.31	XX-47	.56	14.3	.350	8.9	3.3	.57	.34	8.6	1.1	4.9	.22	5.7	0.028	0.7	7.00	MW	C	Z
0.406	10.31	OO-45	.56	14.3	.346	8.8	4.4	.77	.35	8.9	1.5	6.9	.21	5.3	0.030	0.8	7.00	MW	CG	N
0.406	10.31	3718	.56	14.3	.324	8.2	17	2.9	.28	7.0	4.6	20	.29	7.3	0.041	1.0	7.00	SPR	CG	Z
0.406	10.31	J-4	.56	14.3	.316	8.0	56	9.8	.15	3.9	8.6	38	.19	4.9	0.045	1.1	4.25	SPR	CG	Z
0.406	10.31	I-55	.59	15.1	.358	9.1	1.4	.25	.38	9.6	.54	2.4	.22	5.5	0.024	0.6	8.00	MW	C	BO
0.406	10.31	A-2	.59	15.1	.358	9.1	1.4	.25	.40	10	.57	2.5	.19	4.9	0.024	0.6	8.00	MW	CG	N
0.406	10.31	S-1480	.59	15.1	.350	8.9	4.7	.83	.43	11	2.0	9.0	.17	4.3	0.028	0.7	5.00	SST	C	N
0.406	10.31	O-2	.59	15.1	.346	8.8	5.5	.96	.41	10	2.3	10	.18	4.6	0.030	0.8	6.00	MW	CG	N
0.406	10.31	10798	.59	15.1	.330	8.4	16	2.8	.33	8.3	5.2	23	.22	5.6	0.038	1.0	5.75	SPR	CG	BO
0.406	10.31	11086	.59	15.1	.308	7.8	31	5.4	.24	6.0	7.3	33	.36	9.0	0.049	1.2	7.25	SST	CG	N
0.406	10.31	Q-39	.63	15.9	.358	9.1	3.4	.60	.49	13	1.7	7.5	.13	3.4	0.024	0.6	4.50	MW	C	N
0.406	10.31	S-865	.63	15.9	.344	8.7	2.8	.49	.28	7.2	.78	3.5	.34	8.7	0.031	0.8	10.0	SST	C	N
0.406	10.31	N-31	.63	15.9	.300	7.6	76	13	.16	4.1	12	54	.27	6.7	0.053	1.3	5.00	SST	CG	N
0.406	10.31	B15-12	.63	15.9	.284	7.2	162	28	.12	3.1	19	87	.37	9.3	0.061	1.5	5.00	SPR	C	N
0.406	10.31	V-6	.63	15.9	.284	7.2	108	19	.18	4.6	19	87	.40	10.1	0.061	1.5	6.50	SPR	CG	N
0.406	10.31	S-1195	.63	15.9	.276	7.0	141	25	.16	4.0	22	98	.39	9.9	0.065	1.7	6.00	SST	CG	N
0.406	10.31	A9-63	.66	16.7	.342	8.7	3.6	.63	.30	7.7	1.1	4.9	.35	8.9	0.032	0.8	10.0	MW	C	Z
0.406	10.31	BB-13	.69	17.4	.346	8.8	4.1	.72	.48	12	2.0	8.8	.20	5.1	0.030	0.8	6.75	SST	CG	N
0.406	10.31	3569	.69	17.4	.344	8.7	3.1	.55	.35	8.8	1.1	4.8	.34	8.7	0.031	0.8	10.0	MW	C	Z
0.406	10.31	S-1231	.69	17.4	.336	8.5	9.4	1.6	.41	10	3.8	17	.25	6.2	0.035	0.9	6.00	SST	C	N
0.406	10.31	B10-2	.69	17.4	.278	7.1	151	26	.15	3.8	22	99	.38	9.8	0.064	1.6	6.00	SPR	CG	N
0.406	10.31	YY-46	.72	18.2	.342	8.7	4.8	.84	.43	11	2.1	9.2	.29	7.3	0.032	0.8	8.00	MW	C	Z
0.406	10.31	PP-3	.72	18.2	.326	8.3	16	2.7	.36	9.2	5.7	25	.25	6.4	0.040	1.0	6.25	SST	CG	N
0.406	10.31	V-7	.75	19.1	.352	8.9	1.8	.31	.48	12	.84	3.7	.27	6.9	0.027	0.7	10.0	MW	CG	N
0.406	10.31	NN-88	.75	19.1	.346	8.8	3.1	.55	.45	11	1.4	6.3	.30	7.6	0.030	0.8	9.00	MW	C	Z
0.406	10.31	S-16	.75	19.1	.344	8.7	2.4	.43	.38	9.6	.92	4.1	.37	9.4	0.031	0.8	11.0	SST	C	N
0.406	10.31	II-89	.75	19.1	.332	8.4	9.3	1.6	.45	12	4.2	19	.30	7.5	0.037	0.9	7.00	SST	C	N
0.406	10.31	FF-8	.75	19.1	.326	8.3	11	1.9	.43	11	4.8	21	.32	8.1	0.040	1.0	8.00	SST	CG	N
0.406	10.31	10857	.75	19.1	.298	7.6	51	8.9	.27	6.8	14	61	.41	10.3	0.054	1.4	7.50	SPR	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.406	10.31	4327	.75	19.1	.282	7.2	116	20	.18	4.5	20	91	.40	10.2	0.062	1.6	6.50	SPR	CG	Z
0.406	10.31	K-81	.75	19.1	.278	7.1	151	26	.15	3.8	22	99	.38	9.8	0.064	1.6	6.00	SPR	CG	N
0.406	10.31	A12-27	.80	20.3	.364	9.2	.49	.09	.53	13	.26	1.1	.27	6.9	0.021	0.5	12.0	MW	C	N
0.406	10.31	10811	.81	20.6	.382	9.7	.09	.02	.72	18	.06	.28	.10	2.4	0.012	0.3	7.00	SST	C	N
0.406	10.31	S-1323	.81	20.6	.370	9.4	.28	.05	.63	16	.18	.79	.18	4.6	0.018	0.5	10.0	SST	CG	N
0.406	10.31	10155	.81	20.6	.366	9.3	.53	.09	.60	15	.32	1.4	.21	5.3	0.020	0.5	9.50	MW	C	Z
0.406	10.31	A-53	.81	20.6	.324	8.2	15	2.7	.43	11	6.5	29	.31	7.8	0.041	1.0	7.50	SPR	CG	GI
0.406	10.31	A10-30	.81	20.6	.304	7.7	35	6.1	.33	8.4	12	51	.42	10.7	0.051	1.3	8.25	SPR	CG	GI
0.406	10.31	N-49	.81	20.6	.286	7.3	78	14	.22	5.7	17	78	.42	10.7	0.060	1.5	7.00	SST	CG	N
0.406	10.31	PP-96	.81	20.6	.286	7.3	62	11	.26	6.5	16	71	.56	14.1	0.060	1.5	9.25	SPR	CG	Z
0.406	10.31	2865	.88	22.2	.382	9.7	.07	.01	.76	19	.05	.23	.12	3.0	0.012	0.3	9.00	MW	C	Z
0.406	10.31	1559	.88	22.2	.364	9.2	.78	.14	.68	17	.53	2.4	.19	4.9	0.021	0.5	8.25	MW	C	Z
0.406	10.31	V-52	.88	22.2	.356	9.0	1.3	.22	.63	16	.79	3.5	.25	6.4	0.025	0.6	9.00	SST	C	N
0.406	10.31	10125	.88	22.2	.336	8.5	11	1.8	.39	9.8	4.1	18	.25	6.2	0.035	0.9	6.00	SPR	C	GI
0.406	10.31	PP-73	.88	22.2	.326	8.3	11	1.9	.51	13	5.7	25	.32	8.1	0.040	1.0	8.00	SST	CG	N
0.406	10.31	GG-82	.88	22.2	.324	8.2	10	1.8	.51	13	5.3	23	.37	9.4	0.041	1.0	9.00	SST	CG	N
0.406	10.31	I-96	.88	22.2	.310	7.9	24	4.2	.44	11	10	46	.43	11.0	0.048	1.2	9.00	SPR	CG	Z
0.406	10.31	GG-90	.88	22.2	.288	7.3	66	12	.25	6.4	17	74	.50	12.7	0.059	1.5	7.50	SST	C	N
0.406	10.31	S-134	.88	22.2	.262	6.7	150	26	.19	4.7	28	124	.58	14.6	0.072	1.8	8.00	SST	CG	N
0.406	10.31	3745	.88	22.2	.246	6.2	283	50	.14	3.6	40	179	.64	16.3	0.080	2.0	8.00	SPR	CG	Z
0.406	10.31	10539	.91	23.0	.322	8.2	14	2.4	.48	12	6.6	29	.34	8.5	0.042	1.1	8.00	SST	CG	N
0.406	10.31	1545	.94	23.8	.362	9.2	1.0	.18	.74	19	.74	3.3	.20	5.0	0.022	0.6	8.00	MW	C	Z
0.406	10.31	U-11	.94	23.8	.354	9.0	1.7	.30	.70	18	1.2	5.4	.23	5.9	0.026	0.7	8.00	SST	C	N
0.406	10.31	B-4	.94	23.8	.330	8.4	8.6	1.5	.60	15	5.1	23	.34	8.7	0.038	1.0	9.00	HD	CG	Z
0.406	10.31	2863	.94	23.8	.324	8.2	19	3.3	.35	8.9	6.5	29	.31	7.8	0.041	1.0	6.50	SPR	C	Z
0.406	10.31	L-58	.94	23.8	.302	7.7	39	6.9	.31	7.9	12	54	.42	10.6	0.052	1.3	8.00	SPR	CG	Z
0.406	10.31	G-64	.97	24.6	.356	9.0	1.5	.26	.74	19	1.1	5.0	.23	5.7	0.025	0.6	8.00	SST	C	N
0.406	10.31	W-3	.97	24.6	.344	8.7	4.5	.78	.62	16	2.8	12	.22	5.5	0.031	0.8	7.00	SST	CG	N
0.406	10.31	10963	.98	25.0	.262	6.7	230	40	.13	3.3	30	132	.54	13.7	0.072	1.8	6.50	HD	C	Z
0.406	10.31	U-86	1.00	25.4	.372	9.4	.26	.05	.85	22	.22	.97	.15	3.9	0.017	0.4	9.00	SST	CG	N
0.406	10.31	S-1152	1.00	25.4	.368	9.3	.70	.12	.87	22	.61	2.7	.13	3.4	0.019	0.5	6.00	SST	C	N
0.406	10.31	S-265	1.00	25.4	.362	9.2	1.1	.20	.84	21	.96	4.3	.17	4.2	0.022	0.6	6.50	SST	C	N
0.406	10.31	S-477	1.00	25.4	.358	9.1	.46	.08	.54	14	.25	1.1	.46	11.6	0.024	0.6	18.0	SST	C	N
0.406	10.31	S-1046	1.00	25.4	.354	9.0	.65	.11	.51	13	.33	1.5	.49	12.5	0.026	0.7	18.0	SST	C	N
0.406	10.31	V-65	1.00	25.4	.342	8.7	3.6	.63	.68	17	2.4	11	.32	8.1	0.032	0.8	9.00	SST	C	N
0.406	10.31	3607	1.00	25.4	.338	8.6	7.5	1.3	.73	18	5.4	24	.27	6.9	0.034	0.9	7.00	MW	C	GI
0.406	10.31	3624	1.00	25.4	.326	8.3	10	1.8	.61	15	6.1	27	.38	9.7	0.040	1.0	9.50	SPR	CG	Z
0.406	10.31	3919	1.00	25.4	.322	8.2	11	1.9	.56	14	6.1	27	.44	11.2	0.042	1.1	10.5	SPR	CG	Z
0.406	10.31	941	1.00	25.4	.306	7.8	28	5.0	.50	13	14	63	.50	12.7	0.050	1.3	9.00	MW	C	Z
0.406	10.31	A-49	1.00	25.4	.282	7.2	95	17	.21	5.5	20	91	.53	13.4	0.062	1.6	7.50	SPR	C	Z
0.406	10.31	3901	1.00	25.4	.278	7.1	67	12	.30	7.5	20	88	.70	17.9	0.064	1.6	11.0	SPR	CG	Z
0.406	10.31	QQ-39	1.00	25.4	.278	7.1	93	16	.33	8.5	31	138	.54	13.8	0.064	1.6	8.50	MW	CG	Z
0.406	10.31	EE-55	1.03	26.2	.306	7.8	27	4.8	.40	10	11	48	.46	11.7	0.050	1.3	9.25	SPR	CG	N
0.406	10.31	M-108	1.06	27.0	.356	9.0	1.1	.19	.81	21	.90	4.0	.25	6.4	0.025	0.6	10.0	SST	CG	N
0.406	10.31	JJ-96	1.06	27.0	.342	8.7	5.8	1.0	.57	14	3.3	15	.26	6.5	0.032	0.8	7.00	HD	C	GI
0.406	10.31	3794	1.06	27.0	.312	7.9	22	3.8	.45	11	9.7	43	.42	10.7	0.047	1.2	9.00	SPR	CG	Z
0.406	10.31	H-41	1.06	27.0	.298	7.6	28	4.9	.46	12	13	57	.58	14.7	0.054	1.4	10.8	SST	CG	N
0.406	10.31	3696	1.06	27.0	.282	7.2	75	13	.27	6.9	20	91	.56	14.2	0.062	1.6	9.00	SPR	CG	Z
0.406	10.31	S-119	1.06	27.0	.262	6.7	167	29	.17	4.2	28	124	.61	15.5	0.072	1.8	7.50	SST	C	N
0.406	10.31	B8-50	1.09	27.8	.338	8.6	5.3	.93	.74	19	3.9	17	.34	8.6	0.034	0.9	9.00	SPR	C	N
0.406	10.31	O-57	1.09	27.8	.328	8.3	11	2.0	.50	13	5.6	25	.31	7.9	0.039	1.0	8.00	SPR	CG	GI
0.406	10.31	B12-31	1.13	28.6	.356	9.0	.66	.11	.69	17	.45	2.0	.44	11.1	0.025	0.6	17.5	MW	CG	N
0.406	10.31	3508	1.13	28.6	.332	8.4	7.4	1.3	.65	17	4.8	21	.38	9.6	0.037	0.9	9.25	HD	C	Z
0.406	10.31	N-117	1.13	28.6	.236	6.0	324	57	.15	3.7	48	212	.77	19.4	0.085	2.2	9.00	SPR	CG	N
0.406	10.31	FF-84	1.19	30.2	.336	8.5	6.0	1.1	.68	17	4.1	18	.35	8.9	0.035	0.9	9.00	SPR	C	N
0.406	10.31	FF-40	1.19	30.2	.326	8.3	6.7	1.2	.71	18	4.7	21	.48	12.2	0.040	1.0	12.0	SST	CG	N
0.406	10.31	3766	1.19	30.2	.324	8.2	20	3.4	.33	8.4	6.5	29	.30	7.6	0.041	1.0	6.25	SPR	C	GI
0.406	10.31	A15-46	1.19	30.2	.306	7.8	22	3.9	.49	12	11	48	.54	13.8	0.050	1.3	11.0	SPR	CG	N
0.406	10.31	S-1682	1.20	30.6	.368	9.3	.30	.05	.97	25	.29	1.3	.24	6.0	0.019	0.5	11.5	SST	C	N
0.406	10.31	Y-35	1.25	31.8	.356	9.0	1.2	.21	.96	24	1.1	5.1	.29	7.3	0.025	0.6	10.5	MW	C	N
0.406	10.31	A12-16	1.25	31.8	.330	8.4	6.7	1.2	.79	20	5.3	24	.46	11.6	0.038	1.0	11.0	MW	C	N
0.406	10.31	B11-70	1.25	31.8	.326	8.3	11	1.9	.57	14	6.1	27	.36	9.1	0.040	1.0	9.00	SPR	CG	N
0.406	10.31	3538	1.28	32.5	.336	8.5	5.6	.99	.73	18	4.1	18	.33	8.4	0.035	0.9	9.50	HD	CG	Z
0.406	10.31	12530	1.31	33.3	.330	8.4	7.1	1.2	.88	22	6.2	28	.44	11.1	0.038	1.0	10.5	MW	C	N
0.406	10.31	B2-67	1.31	33.3	.330	8.4	7.1	1.2	.88	22	6.2	28	.44	11.1	0.038	1.0	10.5	MW	CL	N
0.406	10.31	I-39	1.31	33.3	.304	7.7	21	3.7	.54	14	12	51	.62	15.9	0.051	1.3	12.3	SPR	CG	Z
0.406	10.31	V-33	1.31	33.3	.282	7.2	45	7.9	.42	11	19	85	.74	18.9	0.062	1.6	12.0	SST	CG	N
0.406	10.31	A9-45	1.34	34.1	.322	8.2	7.3	1.3	.72	18	5.3	23	.62	15.7	0.042	1.1	14.8	SPR	CG	Z
0.406	10.31	Z-62	1.38	34.9	.322	8.2	12	2.0	.60	15	7.0	31	.42	10.7	0.042	1.1	10.0	SPR	CG	BO
0.406	10.31	EE-53	1.38	34.9	.302	7.7	22	3.8	.53	13	12	51	.60	15.2	0.052	1.3	11.5	SST	CG	N
0.406	10.31	4250	1.44	36.5	.336	8.5	3.8	.67	.98	25	3.8	17	.46	11.6	0.035	0.9	13.0	SPR	CG	BO
0.406	10.31	S-471	1.44	36.5	.308	7.8	20	3.6	.50	13	10	46	.53	13.4	0.049	1.2	9.75	SST	C	N
0.406	10.31	1533	1.50	38.1	.328	8.3	6.4	1.1	.88	22	5.6	25	.49	12.4	0.039	1.0	12.5	SPR	CG	Z
0.406	10.31	10216	1.50	38.1	.304	7.7	22	3.8	.53	14	12	51	.61	15.5	0.051	1.3	12.0	SPR	CG	Z
0.406	10.31	12242	1.59	40.5	.282	7.2	47	8.3	.43	11	20	91	.81	20.5	0.062	1.6	13.0	SPR	CG	Z
0.406	10.31	942	1.63	41.3	.326	8.3	7.1	1.3	1.1	28	7.8	34	.54	13.7	0.040	1.0	12.5	MW	C	Z
0.406	10.31	B3-39	1.63	41.3	.282	7.2	45	7.9	.45	11	20	91	.84	21.3	0.062	1.6	13.5	SPR	CG	N
0.406	10.31	3621	1.63	41.3	.280	7.1	51	8.9	.58	15	30	132	.82	20.8	0.063	1.6	13.0	MW	CG	Z
0.406	10.31	H-45	1.69	42.8	.312	7.9	8.9	1.6	.79	20	7.1	31	.89	22.7	0.047	1.2	19.0	SPR	CG	Z
0.406	10.31	I-18	1.72	43.6	.298	7.6	17	3.0	.72	18	12	54	1.00	25.4	0.054	1.4	18.5	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.406	10.31	FF-76	1.75	44.5	.346	8.8	3.1	.55	1.2	31	3.8	17	.27	6.9	0.030	0.8	9.00	MW	CG	N
0.406	10.31	NN-44	1.75	44.5	.346	8.8	1.7	.30	1.3	32	2.1	9.5	.48	12.2	0.030	0.8	15.0	MW	C	Z
0.406	10.31	S-935	1.75	44.5	.324	8.2	6.3	1.1	.97	25	6.1	27	.56	14.3	0.041	1.0	13.8	SST	CG	N
0.406	10.31	8	1.75	44.5	.282	7.2	37	6.5	.55	14	20	91	.99	25.2	0.062	1.6	16.0	HD	CG	Z
0.406	10.31	FF-88	1.75	44.5	.186	4.7	738	129	.12	3.1	89	396	1.43	36.3	0.110	2.8	13.0	SPR	CG	N
0.406	10.31	11131	1.78	45.2	.342	8.7	3.4	.59	1.3	34	4.6	20	.37	9.3	0.032	0.8	10.5	MW	C	Z
0.406	10.31	NN-53	1.78	45.2	.306	7.8	12	2.2	.88	22	11	48	.90	22.9	0.050	1.3	18.0	SPR	CG	Z
0.406	10.31	2860	1.78	45.2	.298	7.6	21	3.6	.92	23	19	84	.84	21.4	0.054	1.4	15.5	MW	CG	Z
0.406	10.31	12235	1.78	45.2	.284	7.2	44	7.7	.44	11	19	87	.79	20.1	0.061	1.5	13.0	SPR	CG	Z
0.406	10.31	GG-58	1.88	47.6	.346	8.8	1.7	.30	1.4	36	2.4	11	.45	11.4	0.030	0.8	15.0	MW	CG	N
0.406	10.31	10533	1.88	47.6	.294	7.5	21	3.7	.72	18	15	68	1.05	26.7	0.056	1.4	17.8	SPR	C	Z
0.406	10.31	12735	1.91	48.5	.302	7.7	24	4.1	.52	13	12	54	.68	17.2	0.052	1.3	12.0	SPR	C	N
0.406	10.31	3646	2.00	50.8	.336	8.5	3.8	.67	1.5	37	5.7	25	.49	12.4	0.035	0.9	13.0	MW	C	GI
0.406	10.31	11443	2.00	50.8	.322	8.2	6.2	1.1	1.1	29	7.0	31	.76	19.2	0.042	1.1	17.0	HD	C	Z
0.406	10.31	115	2.00	50.8	.312	7.9	10	1.8	.95	24	9.7	43	.83	21.2	0.047	1.2	16.8	HD	C	Z
0.406	10.31	10873	2.03	51.6	.294	7.5	22	3.8	.65	17	14	64	.86	21.8	0.056	1.4	15.3	SST	CG	N
0.406	10.31	A9-30	2.06	52.4	.310	7.9	9.2	1.6	1.1	28	10	45	.96	24.4	0.048	1.2	20.0	SPR	CG	GI
0.406	10.31	3602	2.13	54.0	.312	7.9	8.4	1.5	1.2	29	9.7	43	.94	23.9	0.047	1.2	20.0	HD	CG	GI
0.406	10.31	3574	2.31	58.7	.314	8.0	8.6	1.5	1.1	27	9.1	41	.83	21.0	0.046	1.2	18.0	HD	CG	Z
0.406	10.31	B14-40	2.34	59.5	.274	7.0	39	6.8	.63	16	24	109	1.39	35.2	0.066	1.7	20.0	SPR	C	Z
0.406	10.31	4220	2.38	60.3	.346	8.8	1.7	.30	1.9	48	3.2	14	.48	12.2	0.030	0.8	15.0	MW	C	Z
0.406	10.31	4176	2.38	60.3	.308	7.8	12	2.1	.91	23	11	49	.88	22.4	0.049	1.2	17.0	SPR	C	Z
0.406	10.31	EE-93	2.38	60.3	.306	7.8	12	2.2	.88	22	11	48	.90	22.9	0.050	1.3	18.0	SPR	CG	Z
0.406	10.31	2507	2.44	61.9	.250	6.4	77	14	.68	17	52	232	1.76	44.6	0.078	2.0	21.5	MW	C	Z
0.406	10.31	11415	2.50	63.5	.312	7.9	7.2	1.3	1.3	34	9.7	43	1.13	28.7	0.047	1.2	23.0	HD	C	Z
0.406	10.31	11307	2.50	63.5	.306	7.8	9.7	1.7	1.1	27	10	46	1.01	25.7	0.050	1.3	20.3	SST	CG	N
0.406	10.31	4261	2.56	65.1	.344	8.7	1.4	.24	1.9	48	2.6	11	.67	16.9	0.031	0.8	20.5	MW	C	Z
0.406	10.31	11480	2.59	65.9	.346	8.8	1.7	.30	2.1	54	3.6	16	.48	12.2	0.030	0.8	15.0	MW	CG	Z
0.406	10.31	4216	2.75	69.9	.344	8.7	1.6	.28	2.2	55	3.4	15	.59	15.0	0.031	0.8	18.0	MW	C	Z
0.406	10.31	22	2.75	69.9	.312	7.9	7.3	1.3	1.3	34	9.7	43	1.12	28.3	0.047	1.2	22.8	HD	C	Z
0.406	10.31	1914	2.81	71.4	.312	7.9	8.7	1.5	1.1	29	9.7	43	.96	24.5	0.047	1.2	19.5	SPR	C	Z
0.406	10.31	LL-99	3.25	82.6	.282	7.2	22	3.8	.94	24	20	91	1.61	40.9	0.062	1.6	26.0	SPR	CG	N
0.406	10.31	10575	3.31	84.1	.262	6.7	37	6.5	.80	20	30	132	2.16	54.9	0.072	1.8	30.0	SPR	CG	Z
0.406	10.31	10699	4.00	101.6	.332	8.4	2.3	.40	2.1	54	4.8	21	.94	24.0	0.037	0.9	25.5	SPR	CG	Z
0.406	10.31	3613	4.25	108.0	.322	8.2	3.3	.58	2.9	74	9.7	43	1.26	32.0	0.042	1.1	30.0	MW	CG	Z
0.406	10.31	3802	4.38	111.1	.316	8.0	3.8	.66	2.3	57	8.6	38	1.62	41.1	0.045	1.1	35.0	SPR	C	Z
0.406	10.31	11948	4.38	111.1	.306	7.8	6.0	1.1	1.8	46	11	48	1.75	44.5	0.050	1.3	35.0	SPR	CG	GI
0.406	10.31	10380	7.25	184.2	.262	6.7	21	3.6	1.4	36	30	132	3.74	95.1	0.072	1.8	52.0	SPR	CG	Z
0.406	10.31	11833	8.25	209.6	.256	6.5	20	3.5	1.6	40	31	139	4.37	111.0	0.075	1.9	57.3	SST	C	N
0.406	10.31	10908	8.50	215.9	.260	6.6	23	4.0	1.4	35	31	138	3.72	94.6	0.073	1.9	51.0	SPR	CG	N
0.410	10.41	12683	2.75	69.9	.310	7.9	15	2.7	.97	25	15	67	.78	19.7	0.050	1.3	14.5	MW	C	N
0.420	10.67	H-25	.28	7.1	.338	8.6	74	13	.09	2.2	6.3	28	.12	3.1	0.041	1.0	3.00	SPR	CG	N
0.420	10.67	K-83	.31	7.9	.340	8.6	59	10	.09	2.4	5.5	24	.12	3.0	0.040	1.0	3.00	SST	CG	N
0.420	10.67	B10-50	.31	7.9	.340	8.6	67	12	.09	2.2	5.9	26	.16	4.1	0.040	1.0	3.00	SPR	C	N
0.420	10.67	JJ-92	.31	7.9	.338	8.6	64	11	.09	2.3	5.9	26	.16	4.2	0.041	1.0	3.00	SST	C	N
0.420	10.67	LL-95	.31	7.9	.326	8.3	117	20	.08	1.9	8.8	39	.14	3.6	0.047	1.2	3.00	SST	CG	N
0.420	10.67	MM-67	.31	7.9	.320	8.1	156	27	.06	1.6	9.9	44	.15	3.8	0.050	1.3	3.00	SST	CG	N
0.420	10.67	PP-10	.34	8.7	.340	8.6	116	20	.05	1.2	5.5	24	.14	3.6	0.040	1.0	2.50	SST	C	N
0.420	10.67	XX-51	.34	8.7	.312	7.9	108	19	.12	2.9	12	55	.22	5.5	0.054	1.4	4.00	SST	CG	N
0.420	10.67	DD-21	.38	9.5	.340	8.6	59	10	.09	2.4	5.5	24	.12	3.0	0.040	1.0	3.00	SST	CG	N
0.420	10.67	A9-42	.38	9.5	.334	8.5	61	11	.12	3.0	7.3	32	.15	3.8	0.043	1.1	3.50	SPR	CG	Z
0.420	10.67	S-1090	.38	9.5	.320	8.1	51	8.9	.13	3.2	6.4	28	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.420	10.67	L-17	.38	9.5	.306	7.8	137	24	.09	2.3	12	55	.29	7.2	0.057	1.4	4.00	SST	C	N
0.420	10.67	M-105	.38	9.5	.296	7.5	266	47	.07	1.8	19	83	.22	5.5	0.062	1.6	3.50	SST	CG	N
0.420	10.67	II-27	.41	10.3	.382	9.7	1.3	.22	.31	7.8	.39	1.7	.10	2.5	0.019	0.5	4.25	MW	C	N
0.420	10.67	11291	.41	10.3	.338	8.6	16	2.9	.16	4.1	2.6	12	.25	6.2	0.041	1.0	6.00	SST	CG	N
0.420	10.67	10972	.41	10.3	.328	8.3	87	15	.10	2.4	8.3	37	.15	3.8	0.046	1.2	3.25	SST	CG	N
0.420	10.67	JJ-5	.41	10.3	.300	7.6	158	28	.11	2.9	18	80	.27	6.9	0.060	1.5	4.50	SPR	CG	N
0.420	10.67	10099	.41	10.3	.332	8.4	29	5.0	.17	4.2	4.7	21	.24	6.1	0.044	1.1	5.50	SPR	CG	BO
0.420	10.67	S-400	.44	11.1	.376	9.6	2.3	.40	.35	8.9	.81	3.6	.09	2.2	0.022	0.6	4.00	SST	CG	N
0.420	10.67	S-1073	.44	11.1	.370	9.4	2.0	.34	.26	6.7	.52	2.3	.18	4.4	0.025	0.6	6.00	SST	C	N
0.420	10.67	2691	.44	11.1	.338	8.6	37	6.5	.17	4.3	6.3	28	.21	5.2	0.041	1.0	4.00	SPR	C	Z
0.420	10.67	B-52	.44	11.1	.330	8.4	89	16	.10	2.5	8.3	37	.15	3.8	0.045	1.1	3.25	SPR	CG	N
0.420	10.67	YY-44	.44	11.1	.330	8.4	64	11	.12	3.1	7.8	35	.16	4.0	0.045	1.1	3.50	SST	CG	N
0.420	10.67	HH-31	.44	11.1	.326	8.3	52	9.1	.17	4.3	8.8	39	.20	5.1	0.047	1.2	4.25	SST	CG	N
0.420	10.67	3899	.44	11.1	.312	7.9	165	29	.08	2.0	13	59	.19	4.8	0.054	1.4	3.50	SPR	CG	Z
0.420	10.67	JJ-23	.44	11.1	.300	7.6	158	28	.11	2.7	17	76	.33	8.4	0.060	1.5	4.50	SPR	C	N
0.420	10.67	S-1464	.44	11.1	.276	7.0	395	69	.07	1.7	27	120	.29	7.3	0.072	1.8	4.00	SST	CG	N
0.420	10.67	I-30	.47	11.9	.336	8.5	27	4.8	.25	6.3	6.8	30	.21	5.3	0.042	1.1	5.00	SPR	CG	Z
0.420	10.67	O-74	.47	11.9	.316	8.0	186	32	.06	1.5	11	50	.16	4.0	0.052	1.3	3.00	SST	CG	N
0.420	10.67	10426	.47	11.9	.312	7.9	99	17	.13	3.4	13	59	.24	6.2	0.054	1.4	4.50	SPR	CG	Z
0.420	10.67	H-33	.47	11.9	.280	7.1	355	62	.08	1.9	27	119	.30	7.6	0.070	1.8	4.25	SPR	CG	Z
0.420	10.67	L-76	.50	12.7	.380	9.7	.71	.12	.34	8.6	.24	1.1	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.420	10.67	A10-39	.50	12.7	.378	9.6	.87	.15	.33	8.4	.29	1.3	.17	4.3	0.021	0.5	7.00	MW	C	Z
0.420	10.67	B18-160	.50	12.7	.372	9.4	1.9	.33	.33	8.4	.63	2.8	.17	4.3	0.024	0.6	6.00	MW	C	N
0.420	10.67	71313	.50	12.7	.350	8.9	19	3.3	.29	7.4	5.5	24	.14	3.6	0.035	0.9	4.00	MW	CG	N
0.420	10.67	71313S	.50	12.7	.350	8.9	16	2.8	.23	5.9	3.7	16	.14	3.6	0.035	0.9	4.00	SST	CG	N
0.420	10.67	71327	.50	12.7	.344	8.7	23	3.9	.31	7.9	7.0	31	.17	4.2	0.038	1.0	4.38	MW	CG	N
0.420	10.67	71327S	.50	12.7	.344	8.7	19	3.3	.25	6.3	4.7	21	.17	4.2	0.038	1.0	4.38	SST	CG	N
0.420	10.67	GG-23	.50	12.7	.340	8.6	20	3.4	.28	7.1	5.5	24	.20	5.1	0.040	1.0	5.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.420	10.67	3948	.50	12.7	.338	8.6	27	4.7	.23	6.0	6.3	28	.24	6.0	0.041	1.0	4.75	SPR	C	Z
0.420	10.67	71339	.50	12.7	.336	8.5	34	6.0	.28	7.0	9.4	42	.18	4.7	0.042	1.1	4.38	MW	CG	N
0.420	10.67	71339S	.50	12.7	.336	8.5	29	5.1	.22	5.6	6.4	28	.18	4.7	0.042	1.1	4.38	SST	CG	N
0.420	10.67	71351	.50	12.7	.330	8.4	43	7.6	.27	6.8	12	51	.21	5.3	0.045	1.1	4.63	MW	CG	N
0.420	10.67	71351S	.50	12.7	.330	8.4	37	6.4	.21	5.4	7.8	35	.21	5.3	0.045	1.1	4.63	SST	CG	N
0.420	10.67	71362	.50	12.7	.326	8.3	54	9.5	.24	6.1	13	58	.21	5.4	0.047	1.2	4.50	MW	CG	N
0.420	10.67	71362S	.50	12.7	.326	8.3	46	8.0	.19	4.9	8.8	39	.21	5.4	0.047	1.2	4.50	SST	CG	N
0.420	10.67	71371	.50	12.7	.324	8.2	61	11	.23	5.8	14	62	.22	5.5	0.048	1.2	4.50	MW	CG	N
0.420	10.67	71371S	.50	12.7	.324	8.2	52	9.0	.18	4.6	9.4	42	.22	5.5	0.048	1.2	4.50	SST	CG	N
0.420	10.67	71386	.50	12.7	.318	8.1	74	13	.21	5.3	16	69	.24	6.0	0.051	1.3	4.63	MW	CG	N
0.420	10.67	71386S	.50	12.7	.318	8.1	63	11	.17	4.2	11	47	.24	6.0	0.051	1.3	4.63	SST	CG	N
0.420	10.67	71397	.50	12.7	.310	7.9	95	17	.20	5.2	19	86	.27	6.8	0.055	1.4	4.88	MW	CG	N
0.420	10.67	71397S	.50	12.7	.310	7.9	81	14	.16	4.1	13	58	.27	6.8	0.055	1.4	4.88	SST	CG	N
0.420	10.67	71408	.50	12.7	.302	7.7	137	24	.17	4.4	24	106	.28	7.1	0.059	1.5	4.75	MW	CG	N
0.420	10.67	71408S	.50	12.7	.302	7.7	116	20	.14	3.5	16	72	.28	7.1	0.059	1.5	4.75	SST	CG	N
0.420	10.67	EE-97	.50	12.7	.300	7.6	158	28	.11	2.9	18	80	.27	6.9	0.060	1.5	4.50	SPR	CG	N
0.420	10.67	71419	.50	12.7	.294	7.5	183	32	.16	4.0	29	128	.30	7.6	0.063	1.6	4.75	MW	CG	N
0.420	10.67	71419S	.50	12.7	.294	7.5	155	27	.13	3.2	19	87	.30	7.6	0.063	1.6	4.75	SST	CG	N
0.420	10.67	1803	.53	13.5	.330	8.4	44	7.8	.26	6.6	12	51	.25	6.3	0.045	1.1	4.50	MW	C	Z
0.420	10.67	F-36	.53	13.5	.312	7.9	82	14	.16	4.1	13	59	.32	8.2	0.054	1.4	5.00	SPR	C	Z
0.420	10.67	71328	.56	14.2	.344	8.7	20	3.5	.35	8.9	7.0	31	.18	4.6	0.038	1.0	4.75	MW	CG	N
0.420	10.67	71328S	.56	14.2	.344	8.7	17	3.0	.28	7.1	4.7	21	.18	4.6	0.038	1.0	4.75	SST	CG	N
0.420	10.67	71340	.56	14.2	.336	8.5	31	5.4	.30	7.7	9.4	42	.19	4.9	0.042	1.1	4.63	MW	CG	N
0.420	10.67	71340S	.56	14.2	.336	8.5	26	4.6	.24	6.1	6.4	28	.19	4.9	0.042	1.1	4.63	SST	CG	N
0.420	10.67	Z-33	.56	14.3	.370	9.4	1.2	.20	.34	8.7	.40	1.8	.22	5.6	0.025	0.6	8.75	SST	CG	N
0.420	10.67	H-62	.56	14.3	.356	9.0	13	2.2	.23	5.9	3.0	13	.12	3.0	0.032	0.8	3.75	SST	CG	N
0.420	10.67	M-116	.56	14.3	.346	8.8	12	2.1	.36	9.1	4.2	19	.20	5.2	0.037	0.9	5.50	SST	CG	N
0.420	10.67	XX-60	.56	14.3	.334	8.5	23	4.0	.28	7.2	6.4	28	.28	7.1	0.043	1.1	5.50	SST	C	N
0.420	10.67	GG-57	.56	14.3	.200	5.1	3498	613	.02	.63	87	388	.44	11.2	0.110	2.8	4.00	SPR	CG	Z
0.420	10.67	11198	.59	15.1	.390	9.9	.28	.05	.50	13	.14	.61	.10	2.5	0.015	0.4	5.50	SST	C	N
0.420	10.67	3756	.59	15.1	.270	6.9	366	64	.09	2.3	32	145	.38	9.5	0.075	1.9	5.00	SPR	CG	Z
0.420	10.67	A11-52	.59	15.1	.210	5.3	2769	485	.03	.73	80	354	.42	10.7	0.105	2.7	4.00	SPR	CG	N
0.420	10.67	LL-78	.59	15.1	.210	5.3	2769	485	.03	.73	80	354	.42	10.7	0.105	2.7	4.00	SPR	CG	N
0.420	10.67	3653	.63	15.9	.364	9.2	4.9	.85	.46	12	2.2	9.9	.17	4.3	0.028	0.7	5.00	MW	C	Z
0.420	10.67	00-89	.63	15.9	.348	8.8	15	2.6	.27	7.0	4.0	18	.20	5.0	0.036	0.9	4.50	SST	C	N
0.420	10.67	S-387	.63	15.9	.336	8.5	24	4.2	.27	6.8	6.4	28	.25	6.4	0.042	1.1	5.00	SST	C	N
0.420	10.67	B11-13	.63	15.9	.336	8.5	27	4.8	.25	6.3	6.8	30	.25	6.4	0.042	1.1	5.00	SPR	C	N
0.420	10.67	B-96	.63	15.9	.332	8.4	22	3.8	.33	8.5	7.3	32	.26	6.7	0.044	1.1	6.00	SST	CG	N
0.420	10.67	3369	.63	15.9	.322	8.2	40	7.0	.27	6.7	11	47	.34	8.7	0.049	1.2	6.00	SPR	C	Z
0.420	10.67	FF-78	.63	15.9	.310	7.9	77	13	.18	4.6	14	62	.30	7.7	0.055	1.4	5.50	SPR	CG	Z
0.420	10.67	B10-30	.63	15.9	.292	7.4	134	24	.15	3.9	20	91	.35	8.9	0.064	1.6	5.50	SST	CG	N
0.420	10.67	A-95	.63	15.9	.270	6.9	212	37	.14	3.5	29	130	.49	12.4	0.075	1.9	6.50	SST	CG	N
0.420	10.67	71314	.63	16.0	.350	8.9	15	2.5	.38	9.6	5.5	24	.16	4.1	0.035	0.9	4.63	MW	CG	N
0.420	10.67	71314S	.63	16.0	.350	8.9	12	2.2	.30	7.6	3.7	16	.16	4.1	0.035	0.9	4.63	SST	CG	N
0.420	10.67	71329	.63	16.0	.344	8.7	18	3.2	.39	9.9	7.0	31	.19	4.8	0.038	1.0	5.00	MW	CG	N
0.420	10.67	71329S	.63	16.0	.344	8.7	15	2.7	.31	7.8	4.7	21	.19	4.8	0.038	1.0	5.00	SST	CG	N
0.420	10.67	71341	.63	16.0	.336	8.5	28	4.8	.34	8.7	9.4	42	.21	5.3	0.042	1.1	5.00	MW	CG	N
0.420	10.67	71341S	.63	16.0	.336	8.5	23	4.1	.27	6.9	6.4	28	.21	5.3	0.042	1.1	5.00	SST	CG	N
0.420	10.67	71352	.63	16.0	.330	8.4	34	6.0	.34	8.6	12	51	.24	6.0	0.045	1.1	5.25	MW	CG	N
0.420	10.67	71352S	.63	16.0	.330	8.4	29	5.1	.27	6.8	7.8	35	.24	6.0	0.045	1.1	5.25	SST	CG	N
0.420	10.67	71363	.63	16.0	.326	8.3	41	7.2	.32	8.1	13	58	.25	6.3	0.047	1.2	5.25	MW	CG	N
0.420	10.67	71363S	.63	16.0	.326	8.3	35	6.1	.25	6.4	8.8	39	.25	6.3	0.047	1.2	5.25	SST	CG	N
0.420	10.67	71373	.63	16.0	.324	8.2	45	7.9	.31	7.8	14	62	.25	6.4	0.048	1.2	5.25	MW	CG	N
0.420	10.67	71373S	.63	16.0	.324	8.2	38	6.7	.25	6.2	9.4	42	.25	6.4	0.048	1.2	5.25	SST	CG	N
0.420	10.67	71387	.63	16.0	.318	8.1	57	9.9	.27	7.0	16	69	.27	7.0	0.051	1.3	5.38	MW	CG	N
0.420	10.67	71387S	.63	16.0	.318	8.1	48	8.5	.22	5.5	11	47	.27	7.0	0.051	1.3	5.38	SST	CG	N
0.420	10.67	71398	.63	16.0	.310	7.9	75	13	.26	6.6	19	86	.31	7.9	0.055	1.4	5.63	MW	CG	N
0.420	10.67	71398S	.63	16.0	.310	7.9	64	11	.21	5.2	13	58	.31	7.9	0.055	1.4	5.63	SST	CG	N
0.420	10.67	71409	.63	16.0	.302	7.7	103	18	.23	5.9	24	106	.33	8.4	0.059	1.5	5.63	MW	CG	N
0.420	10.67	71409S	.63	16.0	.302	7.7	88	15	.18	4.7	16	72	.33	8.4	0.059	1.5	5.63	SST	CG	N
0.420	10.67	71420	.63	16.0	.294	7.5	137	24	.21	5.3	29	128	.35	9.0	0.063	1.6	5.63	MW	CG	N
0.420	10.67	71420S	.63	16.0	.294	7.5	117	20	.17	4.2	19	87	.35	9.0	0.063	1.6	5.63	SST	CG	N
0.420	10.67	S-798	.66	16.7	.334	8.5	20	3.5	.34	8.6	6.8	30	.26	6.6	0.043	1.1	6.00	SST	CG	N
0.420	10.67	3503	.69	17.4	.388	9.9	.57	.10	.60	15	.34	1.5	.09	2.2	0.016	0.4	4.50	MW	C	Z
0.420	10.67	B12-50	.69	17.4	.384	9.8	.37	.06	.52	13	.19	.85	.17	4.2	0.018	0.5	8.25	MW	C	N
0.420	10.67	2921	.69	17.4	.366	9.3	4.2	.73	.53	13	2.2	9.7	.16	4.1	0.027	0.7	5.00	MW	C	Z
0.420	10.67	S-1062	.69	17.4	.356	9.0	6.4	1.1	.47	12	3.0	13	.21	5.3	0.032	0.8	5.50	SST	C	N
0.420	10.67	S-3181	.69	17.4	.338	8.6	18	3.2	.32	8.2	5.9	26	.23	5.7	0.041	1.0	5.50	SST	CG	N
0.420	10.67	10187	.69	17.4	.326	8.3	34	5.9	.28	7.2	9.4	42	.33	8.4	0.047	1.2	6.00	SPR	C	Z
0.420	10.67	10779	.69	17.4	.322	8.2	54	9.4	.20	5.0	11	47	.29	7.5	0.049	1.2	5.00	SPR	C	Z
0.420	10.67	J-42	.69	17.4	.312	7.9	71	12	.19	4.8	13	59	.35	8.9	0.054	1.4	5.50	SPR	C	Z
0.420	10.67	10449	.72	18.2	.348	8.8	10	1.7	.49	13	4.9	22	.23	5.7	0.036	0.9	6.25	MW	CG	GI
0.420	10.67	S-8	.75	19.1	.380	9.7	.78	.14	.61	15	.47	2.1	.14	3.6	0.020	0.5	6.00	SST	C	N
0.420	10.67	U-4	.75	19.1	.376	9.6	1.3	.23	.61	15	.80	3.6	.14	3.6	0.022	0.6	5.50	SST	C	N
0.420	10.67	S-845	.75	19.1	.350	8.9	14	2.4	.27	6.7	3.7	16	.15	3.9	0.035	0.9	4.33	SST	CG	N
0.420	10.67	71315	.75	19.1	.350	8.9	12	2.1	.46	12	5.5	24	.18	4.7	0.035	0.9	5.25	MW	CG	N
0.420	10.67	71315S	.75	19.1	.350	8.9	10	1.8	.37	9.4	3.7	16	.18	4.7	0.035	0.9	5.25	SST	CG	N
0.420	10.67	A9-61	.75	19.1	.348	8.8	8.9	1.6	.47	12	4.2	19	.28	7.1	0.036	0.9	6.75	SPR	C	N
0.420	10.67	Q-87	.75	19.1	.348	8.8	8.5	1.5	.50	13	4.2	19	.25	6.4	0.036	0.9	7.00	SPR	CG	Z
0.420	10.67	71330	.75	19.1	.344	8.7	14	2.5	.49	12	7.0	31	.22	5.5	0.038	1.0	5.75	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.420	10.67	71330S	.75	19.1	.344	8.7	12	2.1	.39	9.9	4.7	21	.22	5.5	0.038	1.0	5.75	SST	CG	N
0.420	10.67	AA-56	.75	19.1	.344	8.7	11	1.9	.47	12	5.0	22	.27	6.8	0.038	1.0	7.00	SPR	CG	GI
0.420	10.67	B14-22	.75	19.1	.342	8.7	14	2.5	.36	9.2	5.1	23	.22	5.7	0.039	1.0	5.75	SST	CG	N
0.420	10.67	S-3007	.75	19.1	.340	8.6	17	2.9	.33	8.5	5.5	24	.26	6.6	0.040	1.0	5.50	SST	C	N
0.420	10.67	I-35	.75	19.1	.338	8.6	11	1.9	.34	8.6	3.6	16	.41	10.4	0.041	1.0	9.00	SPR	C	GI
0.420	10.67	71342	.75	19.1	.336	8.5	22	3.9	.43	11	9.4	42	.24	6.1	0.042	1.1	5.75	MW	CG	N
0.420	10.67	71342S	.75	19.1	.336	8.5	19	3.3	.34	8.6	6.4	28	.24	6.1	0.042	1.1	5.75	SST	CG	N
0.420	10.67	U-50	.75	19.1	.334	8.5	18	3.2	.40	10	7.3	32	.34	8.7	0.043	1.1	7.00	SPR	C	Z
0.420	10.67	71353	.75	19.1	.330	8.4	27	4.8	.42	11	12	51	.28	7.0	0.045	1.1	6.13	MW	CG	N
0.420	10.67	71353S	.75	19.1	.330	8.4	23	4.1	.34	8.5	7.8	35	.28	7.0	0.045	1.1	6.13	SST	CG	N
0.420	10.67	71364	.75	19.1	.326	8.3	34	6.0	.38	9.8	13	58	.28	7.2	0.047	1.2	6.00	MW	CG	N
0.420	10.67	71364S	.75	19.1	.326	8.3	29	5.1	.31	7.8	8.8	39	.28	7.2	0.047	1.2	6.00	SST	CG	N
0.420	10.67	71374	.75	19.1	.324	8.2	37	6.5	.37	9.4	14	62	.29	7.3	0.048	1.2	6.00	MW	CG	N
0.420	10.67	71374S	.75	19.1	.324	8.2	32	5.6	.30	7.5	9.4	42	.29	7.3	0.048	1.2	6.00	SST	CG	N
0.420	10.67	CC-12	.75	19.1	.320	8.1	25	4.4	.30	7.6	7.5	34	.45	11.4	0.050	1.3	9.00	HD	CG	N
0.420	10.67	71388	.75	19.1	.318	8.1	46	8.0	.34	8.7	16	69	.32	8.1	0.051	1.3	6.25	MW	CG	N
0.420	10.67	71388S	.75	19.1	.318	8.1	39	6.8	.27	6.9	11	47	.32	8.1	0.051	1.3	6.25	SST	CG	N
0.420	10.67	3816	.75	19.1	.312	7.9	55	9.6	.24	6.1	13	59	.41	10.3	0.054	1.4	6.50	SPR	C	Z
0.420	10.67	2959	.75	19.1	.310	7.9	67	12	.21	5.3	14	62	.33	8.4	0.055	1.4	6.00	SPR	CG	Z
0.420	10.67	71399	.75	19.1	.310	7.9	62	11	.32	8.0	19	86	.35	8.9	0.055	1.4	6.38	MW	CG	N
0.420	10.67	71399S	.75	19.1	.310	7.9	52	9.2	.25	6.4	13	58	.35	8.9	0.055	1.4	6.38	SST	CG	N
0.420	10.67	71410	.75	19.1	.302	7.7	83	14	.29	7.3	24	106	.38	9.7	0.059	1.5	6.50	MW	CG	N
0.420	10.67	71410S	.75	19.1	.302	7.7	70	12	.23	5.8	16	72	.38	9.7	0.059	1.5	6.50	SST	CG	N
0.420	10.67	GG-97	.75	19.1	.296	7.5	83	15	.24	6.0	20	88	.47	11.8	0.062	1.6	7.50	HD	CG	N
0.420	10.67	S-1316	.75	19.1	.296	7.5	80	14	.23	5.9	19	83	.43	11.0	0.062	1.6	7.00	SST	CG	N
0.420	10.67	71421	.75	19.1	.294	7.5	109	19	.26	6.7	29	128	.42	10.6	0.063	1.6	6.63	MW	CG	N
0.420	10.67	71421S	.75	19.1	.294	7.5	93	16	.21	5.3	19	87	.42	10.6	0.063	1.6	6.63	SST	CG	N
0.420	10.67	71430	.75	19.1	.286	7.3	144	25	.24	6.0	34	153	.44	11.3	0.067	1.7	6.63	MW	CG	N
0.420	10.67	71430S	.75	19.1	.286	7.3	123	21	.19	4.8	23	104	.44	11.3	0.067	1.7	6.63	SST	CG	N
0.420	10.67	2876	.75	19.1	.284	7.2	140	24	.18	4.7	26	115	.48	12.1	0.068	1.7	7.00	SPR	CG	GI
0.420	10.67	OO-40	.75	19.1	.260	6.6	263	46	.14	3.5	37	163	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.420	10.67	L-63	.78	19.8	.380	9.7	.89	.16	.64	16	.57	2.5	.14	3.6	0.020	0.5	6.00	MW	C	Z
0.420	10.67	HH-61	.81	20.6	.376	9.6	.92	.16	.64	16	.59	2.6	.18	4.5	0.022	0.6	7.00	SST	C	N
0.420	10.67	L-12	.81	20.6	.352	8.9	4.8	.84	.54	14	2.6	12	.27	6.9	0.034	0.9	8.00	SST	CG	N
0.420	10.67	A9-54	.81	20.6	.352	8.9	3.7	.64	.47	12	1.7	7.7	.34	8.6	0.034	0.9	10.0	SST	CG	N
0.420	10.67	10553	.81	20.6	.300	7.6	88	15	.20	5.2	18	80	.39	9.9	0.060	1.5	6.50	SPR	CG	Z
0.420	10.67	S-1205	.81	20.6	.276	7.0	144	25	.19	4.8	27	120	.54	13.7	0.072	1.8	7.50	SST	CG	N
0.420	10.67	10521	.84	21.4	.338	8.6	11	1.9	.52	13	5.6	25	.33	8.3	0.041	1.0	8.00	SST	CG	N
0.420	10.67	1679	.84	21.4	.338	8.6	12	2.2	.47	12	5.8	26	.37	9.4	0.041	1.0	8.00	SPR	C	Z
0.420	10.67	10880	.84	21.4	.286	7.3	97	17	.24	6.1	23	104	.54	13.6	0.067	1.7	8.00	SST	CG	N
0.420	10.67	B2-42	.84	21.4	.312	7.9	59	10	.23	5.7	13	59	.34	8.6	0.054	1.4	6.25	SPR	CG	GI
0.420	10.67	S-1542	.88	22.2	.338	8.6	6.4	1.1	.38	9.7	2.5	11	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.420	10.67	3593	.88	22.2	.312	7.9	45	7.9	.41	10	18	82	.46	11.7	0.054	1.4	7.50	MW	C	Z
0.420	10.67	10298	.88	22.2	.310	7.9	54	9.4	.26	6.6	14	62	.39	9.8	0.055	1.4	7.00	SPR	CG	Z
0.420	10.67	S-1050	.88	22.2	.296	7.5	73	13	.26	6.5	19	83	.47	11.8	0.062	1.6	7.50	SST	CG	N
0.420	10.67	12506	.88	22.2	.296	7.5	115	20	.16	4.1	19	83	.34	8.7	0.062	1.6	5.50	SST	CG	N
0.420	10.67	Q-76	.88	22.2	.278	7.1	126	22	.21	5.2	26	116	.57	14.4	0.071	1.8	8.00	SST	CG	N
0.420	10.67	Z-96	.88	22.2	.276	7.0	122	21	.22	5.7	27	120	.61	15.5	0.072	1.8	8.50	SST	CG	N
0.420	10.67	S-1052	.88	22.2	.260	6.6	235	41	.16	4.0	37	163	.60	15.2	0.080	2.0	7.50	SST	CG	N
0.420	10.67	S-482	.88	22.2	.260	6.6	215	38	.17	4.3	37	163	.64	16.3	0.080	2.0	8.00	SST	CG	N
0.420	10.67	71316	.88	22.4	.350	8.9	10	1.8	.55	14	5.5	24	.20	5.1	0.035	0.9	5.75	MW	CG	N
0.420	10.67	71316S	.88	22.4	.350	8.9	8.5	1.5	.44	11	3.7	16	.20	5.1	0.035	0.9	5.75	SST	CG	N
0.420	10.67	71331	.88	22.4	.344	8.7	12	2.1	.57	14	7.0	31	.24	6.2	0.038	1.0	6.38	MW	CG	N
0.420	10.67	71331S	.88	22.4	.344	8.7	10	1.8	.45	12	4.7	21	.24	6.2	0.038	1.0	6.38	SST	CG	N
0.420	10.67	71343	.88	22.4	.336	8.5	19	3.2	.51	13	9.4	42	.27	6.9	0.042	1.1	6.50	MW	CG	N
0.420	10.67	71343S	.88	22.4	.336	8.5	16	2.8	.40	10	6.4	28	.27	6.9	0.042	1.1	6.50	SST	CG	N
0.420	10.67	71354	.88	22.4	.330	8.4	23	4.0	.50	13	12	51	.31	7.9	0.045	1.1	6.88	MW	CG	N
0.420	10.67	71354S	.88	22.4	.330	8.4	20	3.4	.40	10	7.8	35	.31	7.9	0.045	1.1	6.88	SST	CG	N
0.420	10.67	71365	.88	22.4	.326	8.3	28	4.9	.47	12	13	58	.32	8.2	0.047	1.2	6.88	MW	CG	N
0.420	10.67	71365S	.88	22.4	.326	8.3	24	4.2	.37	9.4	8.8	39	.32	8.2	0.047	1.2	6.88	SST	CG	N
0.420	10.67	71376	.88	22.4	.324	8.2	31	5.4	.45	12	14	62	.33	8.4	0.048	1.2	6.88	MW	CG	N
0.420	10.67	71376S	.88	22.4	.324	8.2	26	4.6	.36	9.2	9.4	42	.33	8.4	0.048	1.2	6.88	SST	CG	N
0.420	10.67	71389	.88	22.4	.318	8.1	38	6.7	.41	10	16	69	.36	9.2	0.051	1.3	7.13	MW	CG	N
0.420	10.67	71389S	.88	22.4	.318	8.1	32	5.7	.33	8.3	11	47	.36	9.2	0.051	1.3	7.13	SST	CG	N
0.420	10.67	71400	.88	22.4	.310	7.9	52	9.1	.37	9.5	19	86	.40	10.1	0.055	1.4	7.25	MW	CG	N
0.420	10.67	71400S	.88	22.4	.310	7.9	44	7.7	.30	7.5	13	58	.40	10.1	0.055	1.4	7.25	SST	CG	N
0.420	10.67	71411	.88	22.4	.302	7.7	69	12	.35	8.8	24	106	.44	11.1	0.059	1.5	7.38	MW	CG	N
0.420	10.67	71411S	.88	22.4	.302	7.7	58	10	.28	7.0	16	72	.44	11.1	0.059	1.5	7.38	SST	CG	N
0.420	10.67	71422	.88	22.4	.294	7.5	91	16	.32	8.1	29	128	.47	12.0	0.063	1.6	7.50	MW	CG	N
0.420	10.67	71422S	.88	22.4	.294	7.5	77	13	.25	6.4	19	87	.47	12.0	0.063	1.6	7.50	SST	CG	N
0.420	10.67	S-132	.91	23.0	.296	7.5	58	10	.32	8.1	19	83	.56	14.2	0.062	1.6	9.00	SST	CG	N
0.420	10.67	S-833	.91	23.0	.272	6.9	138	24	.21	5.4	29	130	.63	16.0	0.074	1.9	8.50	SST	CG	N
0.420	10.67	B2-51	.91	23.1	.288	7.3	110	18	.23	5.9	24	105	.53	13.4	0.067	1.7	8.00	SPR	CG	N
0.420	10.67	KK-79	.94	23.8	.384	9.8	.29	.05	.76	19	.22	.97	.18	4.6	0.018	0.5	9.00	SST	C	N
0.420	10.67	3587	.94	23.8	.374	9.5	1.1	.19	.73	19	.78	3.5	.21	5.3	0.023	0.6	8.00	MW	C	Z
0.420	10.67	S-1068	.94	23.8	.344	8.7	7.1	1.2	.62	16	4.4	20	.32	8.2	0.038	1.0	8.50	SST	CG	N
0.420	10.67	2547	1.00	25.4	.380	9.7	.45	.08	.78	20	.35	1.5	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.420	10.67	M-38	1.00	25.4	.362	9.2	2.4	.42	.71	18	1.7	7.6	.29	7.4	0.029	0.7	9.00	MW	C	BO
0.420	10.67	OO-71	1.00	25.4	.360	9.1	1.6	.29	.63	16	1.0	4.6	.38	9.5	0.030	0.8	12.5	SST	CG	N
0.420	10.67	Q-77	1.00	25.4	.352	8.9	6.6	1.2	.57	15	3.8	17	.24	6.0	0.034	0.9	7.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.420	10.67	71317	1.00	25.4	.350	8.9	8.7	1.5	.63	16	5.5	24	.22	5.7	0.035	0.9	6.38	MW	CG	N
0.420	10.67	71317S	1.00	25.4	.350	8.9	7.4	1.3	.50	13	3.7	16	.22	5.7	0.035	0.9	6.38	SST	CG	N
0.420	10.67	71332	1.00	25.4	.344	8.7	11	1.9	.64	16	7.0	31	.26	6.6	0.038	1.0	6.88	MW	CG	N
0.420	10.67	71332S	1.00	25.4	.344	8.7	9.4	1.6	.51	13	4.7	21	.26	6.6	0.038	1.0	6.88	SST	CG	N
0.420	10.67	I-40	1.00	25.4	.340	8.6	8.3	1.5	.60	15	5.0	22	.40	10.2	0.040	1.0	10.0	SPR	CG	N
0.420	10.67	I-29	1.00	25.4	.336	8.5	10	1.8	.58	15	6.0	26	.42	10.7	0.042	1.1	10.0	SPR	CG	BO
0.420	10.67	71344	1.00	25.4	.336	8.5	16	2.8	.59	15	9.4	42	.30	7.6	0.042	1.1	7.13	MW	CG	N
0.420	10.67	71344S	1.00	25.4	.336	8.5	14	2.4	.47	12	6.4	28	.30	7.6	0.042	1.1	7.13	SST	CG	N
0.420	10.67	10404	1.00	25.4	.330	8.4	20	3.5	.41	10	8.3	37	.34	8.6	0.045	1.1	7.50	SPR	CG	Z
0.420	10.67	71355	1.00	25.4	.330	8.4	20	3.5	.58	15	12	51	.34	8.7	0.045	1.1	7.63	MW	CG	N
0.420	10.67	71355S	1.00	25.4	.330	8.4	17	3.0	.46	12	7.8	35	.34	8.7	0.045	1.1	7.63	SST	CG	N
0.420	10.67	71366	1.00	25.4	.326	8.3	25	4.4	.52	13	13	58	.35	8.8	0.047	1.2	7.38	MW	CG	N
0.420	10.67	71366S	1.00	25.4	.326	8.3	21	3.7	.42	11	8.8	39	.35	8.8	0.047	1.2	7.38	SST	CG	N
0.420	10.67	71377	1.00	25.4	.324	8.2	27	4.7	.51	13	14	62	.36	9.1	0.048	1.2	7.50	MW	CG	N
0.420	10.67	71377S	1.00	25.4	.324	8.2	23	4.0	.41	10	9.4	42	.36	9.1	0.048	1.2	7.50	SST	CG	N
0.420	10.67	Z-18	1.00	25.4	.322	8.2	23	4.0	.46	12	11	47	.44	11.2	0.049	1.2	9.00	SPR	CG	Z
0.420	10.67	71390	1.00	25.4	.318	8.1	33	5.8	.47	12	16	69	.40	10.2	0.051	1.3	7.88	MW	CG	N
0.420	10.67	71390S	1.00	25.4	.318	8.1	28	4.9	.38	9.6	11	47	.40	10.2	0.051	1.3	7.88	SST	CG	N
0.420	10.67	71401	1.00	25.4	.310	7.9	45	7.8	.44	11	19	86	.45	11.4	0.055	1.4	8.13	MW	CG	N
0.420	10.67	71401S	1.00	25.4	.310	7.9	38	6.6	.35	8.8	13	58	.45	11.4	0.055	1.4	8.13	SST	CG	N
0.420	10.67	71412	1.00	25.4	.302	7.7	59	10	.40	10	24	106	.49	12.4	0.059	1.5	8.25	MW	CG	N
0.420	10.67	71412S	1.00	25.4	.302	7.7	50	8.8	.32	8.1	16	72	.49	12.4	0.059	1.5	8.25	SST	CG	N
0.420	10.67	71423	1.00	25.4	.294	7.5	78	14	.37	9.4	29	128	.53	13.4	0.063	1.6	8.38	MW	CG	N
0.420	10.67	71423S	1.00	25.4	.294	7.5	66	12	.29	7.5	19	87	.53	13.4	0.063	1.6	8.38	SST	CG	N
0.420	10.67	71431	1.00	25.4	.286	7.3	103	18	.33	8.5	34	153	.56	14.3	0.067	1.7	8.38	MW	CG	N
0.420	10.67	71431S	1.00	25.4	.286	7.3	87	15	.27	6.8	23	104	.56	14.3	0.067	1.7	8.38	SST	CG	N
0.420	10.67	S-177	1.00	25.4	.276	7.0	113	20	.24	6.1	27	120	.65	16.5	0.072	1.8	9.00	SST	CG	N
0.420	10.67	71438	1.00	25.4	.276	7.0	139	24	.29	7.4	40	180	.62	15.8	0.072	1.8	8.63	MW	CG	N
0.420	10.67	71438S	1.00	25.4	.276	7.0	118	21	.23	5.8	27	120	.62	15.8	0.072	1.8	8.63	SST	CG	N
0.420	10.67	10729	1.03	26.2	.360	9.1	4.3	.76	.84	21	3.6	16	.20	5.0	0.030	0.8	6.50	MW	CG	Z
0.420	10.67	MM-36	1.03	26.2	.340	8.6	13	2.3	.44	11	5.9	26	.32	8.1	0.040	1.0	7.00	SPR	C	Z
0.420	10.67	3650	1.03	26.2	.310	7.9	45	7.8	.31	7.9	14	62	.50	12.6	0.055	1.4	8.00	SPR	C	Z
0.420	10.67	B9-2	1.06	27.0	.332	8.4	18	3.2	.43	11	7.8	35	.33	8.4	0.044	1.1	7.50	SPR	CG	Z
0.420	10.67	2543	1.13	28.6	.356	9.0	3.2	.56	.77	20	2.5	11	.35	8.9	0.032	0.8	10.0	SPR	C	Z
0.420	10.67	S-52	1.13	28.6	.310	7.9	25	4.3	.44	11	11	48	.69	17.5	0.055	1.4	11.5	SST	C	N
0.420	10.67	B3-47	1.19	30.1	.304	7.7	37	6.5	.41	10	15	68	.58	14.7	0.058	1.5	10.0	SST	CG	N
0.420	10.67	CC-98	1.19	30.2	.370	9.4	1.5	.26	.95	24	1.4	6.3	.21	5.2	0.025	0.6	7.25	SST	C	N
0.420	10.67	3937	1.19	30.2	.276	7.0	91	16	.32	8.1	29	129	.86	21.9	0.072	1.8	12.0	SPR	CG	Z
0.420	10.67	10477	1.22	31.0	.310	7.9	35	6.1	.40	10	14	62	.54	13.6	0.055	1.4	9.75	SPR	CG	Z
0.420	10.67	B-99	1.25	31.8	.382	9.7	.37	.07	1.0	27	.39	1.7	.20	5.2	0.019	0.5	9.75	MW	C	N
0.420	10.67	10589	1.25	31.8	.378	9.6	.26	.05	.87	22	.22	1.0	.38	9.6	0.021	0.5	17.0	SST	C	N
0.420	10.67	10094	1.25	31.8	.352	8.9	3.7	.64	.84	21	3.1	14	.41	10.4	0.034	0.9	11.0	SPR	C	Z
0.420	10.67	71318	1.25	31.8	.350	8.9	6.9	1.2	.80	20	5.5	24	.26	6.7	0.035	0.9	7.50	MW	CG	N
0.420	10.67	71318S	1.25	31.8	.350	8.9	5.8	1.0	.64	16	3.7	16	.26	6.7	0.035	0.9	7.50	SST	CG	N
0.420	10.67	3617	1.25	31.8	.348	8.8	5.6	.99	.76	19	4.3	19	.34	8.7	0.036	0.9	9.50	HD	CG	Z
0.420	10.67	10596	1.25	31.8	.346	8.8	6.3	1.1	.74	19	4.7	21	.35	8.9	0.037	0.9	9.50	SPR	CG	Z
0.420	10.67	71333	1.25	31.8	.344	8.7	8.5	1.5	.82	21	7.0	31	.32	8.1	0.038	1.0	8.38	MW	CG	N
0.420	10.67	71333S	1.25	31.8	.344	8.7	7.2	1.3	.65	17	4.7	21	.32	8.1	0.038	1.0	8.38	SST	CG	N
0.420	10.67	71345	1.25	31.8	.336	8.5	13	2.3	.72	18	9.4	42	.35	8.9	0.042	1.1	8.38	MW	CG	N
0.420	10.67	71345S	1.25	31.8	.336	8.5	11	1.9	.57	15	6.4	28	.35	8.9	0.042	1.1	8.38	SST	CG	N
0.420	10.67	71356	1.25	31.8	.330	8.4	16	2.8	.73	18	12	51	.41	10.3	0.045	1.1	9.00	MW	CG	N
0.420	10.67	71356S	1.25	31.8	.330	8.4	13	2.4	.58	15	7.8	35	.41	10.3	0.045	1.1	9.00	SST	CG	N
0.420	10.67	71367	1.25	31.8	.326	8.3	19	3.3	.69	17	13	58	.43	10.9	0.047	1.2	9.13	MW	CG	N
0.420	10.67	71367S	1.25	31.8	.326	8.3	16	2.8	.55	14	8.8	39	.43	10.9	0.047	1.2	9.13	SST	CG	N
0.420	10.67	71378	1.25	31.8	.324	8.2	21	3.7	.66	17	14	62	.43	11.0	0.048	1.2	9.00	MW	CG	N
0.420	10.67	71378S	1.25	31.8	.324	8.2	18	3.2	.52	13	9.4	42	.43	11.0	0.048	1.2	9.00	SST	CG	N
0.420	10.67	71391	1.25	31.8	.318	8.1	26	4.5	.60	15	16	69	.48	12.3	0.051	1.3	9.50	MW	CG	N
0.420	10.67	71391S	1.25	31.8	.318	8.1	22	3.8	.48	12	11	47	.48	12.3	0.051	1.3	9.50	SST	CG	N
0.420	10.67	71402	1.25	31.8	.310	7.9	35	6.1	.55	14	19	86	.54	13.6	0.055	1.4	9.75	MW	CG	N
0.420	10.67	71402S	1.25	31.8	.310	7.9	30	5.2	.44	11	13	58	.54	13.6	0.055	1.4	9.75	SST	CG	N
0.420	10.67	71413	1.25	31.8	.302	7.7	46	8.1	.52	13	24	106	.59	15.0	0.059	1.5	10.0	MW	CG	N
0.420	10.67	71413S	1.25	31.8	.302	7.7	39	6.9	.41	10	16	72	.59	15.0	0.059	1.5	10.0	SST	CG	N
0.420	10.67	71424	1.25	31.8	.294	7.5	61	11	.48	12	29	128	.65	16.4	0.063	1.6	10.3	MW	CG	N
0.420	10.67	71424S	1.25	31.8	.294	7.5	51	9.0	.38	9.6	19	87	.65	16.4	0.063	1.6	10.3	SST	CG	N
0.420	10.67	12240	1.25	31.8	.290	7.4	63	11	.36	9.1	23	101	.72	18.2	0.065	1.7	11.0	SPR	CG	Z
0.420	10.67	71432	1.25	31.8	.286	7.3	80	14	.43	11	34	153	.69	17.4	0.067	1.7	10.3	MW	CG	N
0.420	10.67	71432S	1.25	31.8	.286	7.3	68	12	.34	8.7	23	104	.69	17.4	0.067	1.7	10.3	SST	CG	N
0.420	10.67	3589	1.25	31.8	.276	7.0	114	20	.36	9.0	40	180	.72	18.3	0.072	1.8	10.0	MW	CG	Z
0.420	10.67	71439	1.25	31.8	.276	7.0	108	19	.38	9.5	40	180	.76	19.2	0.072	1.8	10.5	MW	CG	N
0.420	10.67	71439S	1.25	31.8	.276	7.0	92	16	.30	7.5	27	120	.76	19.2	0.072	1.8	10.5	SST	CG	N
0.420	10.67	A9-70	1.25	31.8	.274	7.0	107	19	.26	6.7	28	125	.73	18.5	0.073	1.9	10.0	SST	CG	N
0.420	10.67	12643	1.25	31.8	.268	6.8	146	26	.22	5.5	32	141	.68	17.4	0.076	1.9	9.00	SST	CG	N
0.420	10.67	3662	1.28	32.5	.340	8.6	11	1.9	.53	13	5.9	26	.36	9.1	0.040	1.0	8.00	SPR	C	Z
0.420	10.67	3548	1.28	32.5	.312	7.9	31	5.4	.59	15	18	82	.59	15.1	0.054	1.4	10.0	MW	C	Z
0.420	10.67	A11-47	1.28	32.5	.294	7.5	58	10	.36	9.1	21	92	.66	16.8	0.063	1.6	10.5	SPR	CG	Z
0.420	10.67	B9-24	1.38	34.9	.332	8.4	18	3.2	.43	11	7.8	35	.33	8.4	0.044	1.1	7.50	SPR	CG	Z
0.420	10.67	3527	1.38	34.9	.326	8.3	14	2.5	.67	17	9.4	42	.59	14.9	0.047	1.2	11.5	HD	C	Z
0.420	10.67	3675	1.41	35.7	.332	8.4	17	3.1	.44	11	7.8	35	.34	8.7	0.044	1.1	7.75	SPR	CG	Z
0.420	10.67	4257	1.41	35.7	.326	8.3	13	2.3	.70	18	9.4	42	.56	14.3	0.047	1.2	12.0	SPR	CG	N
0.420	10.67	Q-61	1.44	36.5	.374	9.5	.53	.09	1.1	29	.60	2.7	.31	7.9	0.023	0.6	12.5	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.420	10.67	S-1489	1.44	36.5	.312	7.9	30	5.2	.42	11	12	55	.50	12.7	0.054	1.4	9.25	SST	CG	N
0.420	10.67	A13-30	1.44	36.5	.198	5.0	862	151	.10	2.6	89	398	1.17	29.6	0.111	2.8	10.5	SPR	CG	N
0.420	10.67	S-402	1.47	37.3	.258	6.6	161	28	.24	6.0	38	168	.85	21.6	0.081	2.1	10.5	SST	CG	N
0.420	10.67	S-1204	1.50	38.1	.380	9.7	.22	.04	1.2	29	.26	1.1	.34	8.6	0.020	0.5	16.0	SST	C	N
0.420	10.67	RR-40	1.50	38.1	.368	9.3	.89	.16	1.1	28	.99	4.4	.39	9.9	0.026	0.7	14.0	MW	C	Z
0.420	10.67	11305	1.50	38.1	.364	9.2	1.7	.30	1.2	30	2.0	9.0	.32	8.2	0.028	0.7	10.5	MW	C	GI
0.420	10.67	71319	1.50	38.1	.350	8.9	5.6	.98	.98	25	5.5	24	.31	7.8	0.035	0.9	8.75	MW	CG	N
0.420	10.67	71319S	1.50	38.1	.350	8.9	4.8	.83	.78	20	3.7	16	.31	7.8	0.035	0.9	8.75	SST	CG	N
0.420	10.67	10230	1.50	38.1	.344	8.7	7.4	1.3	.69	17	5.0	22	.39	9.9	0.038	1.0	9.25	SPR	C	Z
0.420	10.67	71334	1.50	38.1	.344	8.7	7.1	1.2	.98	25	7.0	31	.37	9.3	0.038	1.0	9.63	MW	CG	N
0.420	10.67	71334S	1.50	38.1	.344	8.7	6.0	1.1	.78	20	4.7	21	.37	9.3	0.038	1.0	9.63	SST	CG	N
0.420	10.67	71346	1.50	38.1	.336	8.5	11	1.8	.89	23	9.4	42	.41	10.5	0.042	1.1	9.88	MW	CG	N
0.420	10.67	71346S	1.50	38.1	.336	8.5	8.9	1.6	.71	18	6.4	28	.41	10.5	0.042	1.1	9.88	SST	CG	N
0.420	10.67	71357	1.50	38.1	.330	8.4	13	2.3	.89	23	12	51	.48	12.1	0.045	1.1	10.6	MW	CG	N
0.420	10.67	71357S	1.50	38.1	.330	8.4	11	1.9	.71	18	7.8	35	.48	12.1	0.045	1.1	10.6	SST	CG	N
0.420	10.67	S-3137	1.50	38.1	.326	8.3	16	2.7	.57	14	8.8	39	.45	11.3	0.047	1.2	9.50	SST	CG	N
0.420	10.67	71368	1.50	38.1	.326	8.3	16	2.7	.84	21	13	58	.51	12.8	0.047	1.2	10.8	MW	CG	N
0.420	10.67	71368S	1.50	38.1	.326	8.3	13	2.3	.67	17	8.8	39	.51	12.8	0.047	1.2	10.8	SST	CG	N
0.420	10.67	71379	1.50	38.1	.324	8.2	17	3.0	.81	21	14	62	.51	13.0	0.048	1.2	10.6	MW	CG	N
0.420	10.67	71379S	1.50	38.1	.324	8.2	15	2.6	.64	16	9.4	42	.51	13.0	0.048	1.2	10.6	SST	CG	N
0.420	10.67	71392	1.50	38.1	.318	8.1	21	3.7	.74	19	16	69	.57	14.4	0.051	1.3	11.1	MW	CG	N
0.420	10.67	71392S	1.50	38.1	.318	8.1	18	3.1	.59	15	11	47	.57	14.4	0.051	1.3	11.1	SST	CG	N
0.420	10.67	A16-68	1.50	38.1	.318	8.1	13	2.2	.62	16	7.9	35	.88	22.4	0.051	1.3	17.3	MW	CG	N
0.420	10.67	YY-69	1.50	38.1	.312	7.9	26	4.6	.51	13	13	59	.68	17.1	0.054	1.4	11.5	SPR	C	Z
0.420	10.67	71403	1.50	38.1	.310	7.9	29	5.0	.68	17	19	86	.63	16.1	0.055	1.4	11.5	MW	CG	N
0.420	10.67	71403S	1.50	38.1	.310	7.9	24	4.2	.54	14	13	58	.63	16.1	0.055	1.4	11.5	SST	CG	N
0.420	10.67	71414	1.50	38.1	.302	7.7	38	6.6	.63	16	24	106	.69	17.6	0.059	1.5	11.8	MW	CG	N
0.420	10.67	71414S	1.50	38.1	.302	7.7	32	5.6	.50	13	16	72	.69	17.6	0.059	1.5	11.8	SST	CG	N
0.420	10.67	CC-82	1.50	38.1	.300	7.6	32	5.6	.53	13	17	75	.78	19.8	0.060	1.5	13.0	SST	CG	N
0.420	10.67	S-1395	1.50	38.1	.296	7.5	44	7.8	.42	11	19	83	.68	17.3	0.062	1.6	11.0	SST	CG	N
0.420	10.67	71425	1.50	38.1	.294	7.5	50	8.7	.58	15	29	128	.76	19.2	0.063	1.6	12.0	MW	CG	N
0.420	10.67	71425S	1.50	38.1	.294	7.5	42	7.4	.46	12	19	87	.76	19.2	0.063	1.6	12.0	SST	CG	N
0.420	10.67	71433	1.50	38.1	.286	7.3	65	11	.53	13	34	153	.81	20.6	0.067	1.7	12.1	MW	CG	N
0.420	10.67	71433S	1.50	38.1	.286	7.3	55	9.7	.42	11	23	104	.81	20.6	0.067	1.7	12.1	SST	CG	N
0.420	10.67	71440	1.50	38.1	.276	7.0	88	15	.46	12	40	180	.89	22.6	0.072	1.8	12.4	MW	CG	N
0.420	10.67	71440S	1.50	38.1	.276	7.0	75	13	.36	9.2	27	120	.89	22.6	0.072	1.8	12.4	SST	CG	N
0.420	10.67	S-841	1.56	39.7	.338	8.6	7.3	1.3	.82	21	5.9	26	.45	11.3	0.041	1.0	11.0	SST	CG	N
0.420	10.67	I-56	1.63	41.3	.292	7.4	44	7.7	.49	12	22	96	.90	22.8	0.064	1.6	14.0	SPR	CG	Z
0.420	10.67	11239	1.63	41.3	.256	6.5	148	26	.26	6.7	39	174	.98	25.0	0.082	2.1	12.0	SST	CG	N
0.420	10.67	71320	1.75	44.5	.350	8.9	4.9	.85	1.1	29	5.5	24	.34	8.7	0.035	0.9	9.75	MW	CG	N
0.420	10.67	71320S	1.75	44.5	.350	8.9	4.1	.72	.90	23	3.7	16	.34	8.7	0.035	0.9	9.75	SST	CG	N
0.420	10.67	12110	1.75	44.5	.350	8.9	4.2	.73	.95	24	4.0	18	.42	10.7	0.035	0.9	11.0	SPR	C	Z
0.420	10.67	71335	1.75	44.5	.344	8.7	6.3	1.1	1.1	28	7.0	31	.40	10.1	0.038	1.0	10.5	MW	CG	N
0.420	10.67	71335S	1.75	44.5	.344	8.7	5.4	.94	.88	22	4.7	21	.40	10.1	0.038	1.0	10.5	SST	CG	N
0.420	10.67	71347	1.75	44.5	.336	8.5	9.2	1.6	1.0	26	9.4	42	.46	11.7	0.042	1.1	11.0	MW	CG	N
0.420	10.67	71347S	1.75	44.5	.336	8.5	7.8	1.4	.82	21	6.4	28	.46	11.7	0.042	1.1	11.0	SST	CG	N
0.420	10.67	71358	1.75	44.5	.330	8.4	11	2.0	1.0	26	12	51	.53	13.4	0.045	1.1	11.8	MW	CG	N
0.420	10.67	71358S	1.75	44.5	.330	8.4	9.7	1.7	.80	20	7.8	35	.53	13.4	0.045	1.1	11.8	SST	CG	N
0.420	10.67	71369	1.75	44.5	.326	8.3	14	2.4	.97	25	13	58	.56	14.3	0.047	1.2	12.0	MW	CG	N
0.420	10.67	71369S	1.75	44.5	.326	8.3	11	2.0	.77	20	8.8	39	.56	14.3	0.047	1.2	12.0	SST	CG	N
0.420	10.67	71380	1.75	44.5	.324	8.2	15	2.6	.94	24	14	62	.58	14.6	0.048	1.2	12.0	MW	CG	N
0.420	10.67	71380S	1.75	44.5	.324	8.2	13	2.2	.75	19	9.4	42	.58	14.6	0.048	1.2	12.0	SST	CG	N
0.420	10.67	3432	1.75	44.5	.320	8.1	23	4.0	.47	12	11	47	.49	12.4	0.050	1.3	9.75	SPR	CG	Z
0.420	10.67	71393	1.75	44.5	.318	8.1	17	3.0	.89	23	16	69	.67	17.0	0.051	1.3	13.1	MW	CG	N
0.420	10.67	71393S	1.75	44.5	.318	8.1	15	2.6	.71	18	11	47	.67	17.0	0.051	1.3	13.1	SST	CG	N
0.420	10.67	71404	1.75	44.5	.310	7.9	24	4.2	.80	20	19	86	.72	18.3	0.055	1.4	13.1	MW	CG	N
0.420	10.67	71404S	1.75	44.5	.310	7.9	21	3.6	.64	16	13	58	.72	18.3	0.055	1.4	13.1	SST	CG	N
0.420	10.67	71415	1.75	44.5	.302	7.7	32	5.6	.74	19	24	106	.80	20.4	0.059	1.5	13.6	MW	CG	N
0.420	10.67	71415S	1.75	44.5	.302	7.7	27	4.8	.59	15	16	72	.80	20.4	0.059	1.5	13.6	SST	CG	N
0.420	10.67	71426	1.75	44.5	.294	7.5	42	7.3	.69	17	29	128	.87	22.2	0.063	1.6	13.9	MW	CG	N
0.420	10.67	71426S	1.75	44.5	.294	7.5	36	6.2	.55	14	19	87	.87	22.2	0.063	1.6	13.9	SST	CG	N
0.420	10.67	71434	1.75	44.5	.286	7.3	55	9.6	.62	16	34	153	.94	23.8	0.067	1.7	14.0	MW	CG	N
0.420	10.67	71434S	1.75	44.5	.286	7.3	47	8.2	.50	13	23	104	.94	23.8	0.067	1.7	14.0	SST	CG	N
0.420	10.67	71441	1.75	44.5	.276	7.0	74	13	.54	14	40	180	1.04	26.3	0.072	1.8	14.4	MW	CG	N
0.420	10.67	71441S	1.75	44.5	.276	7.0	63	11	.43	11	27	120	1.04	26.3	0.072	1.8	14.4	SST	CG	N
0.420	10.67	1898	1.78	45.2	.304	7.7	34	6.0	.67	17	23	101	.70	17.7	0.058	1.5	12.0	MW	CG	Z
0.420	10.67	A-56	1.81	46.0	.300	7.6	30	5.3	.59	15	18	80	.90	22.9	0.060	1.5	15.0	SPR	CG	Z
0.420	10.67	CC-89	1.88	47.6	.260	6.6	110	19	.35	9.0	39	174	1.24	31.5	0.080	2.0	15.5	SPR	CG	N
0.420	10.67	S-131	1.94	49.2	.326	8.3	7.5	1.3	1.1	27	8.0	36	.87	22.1	0.047	1.2	17.5	SST	C	N
0.420	10.67	B9-20	1.97	50.0	.380	9.7	.36	.06	1.7	43	.61	2.7	.26	6.6	0.020	0.5	12.0	MW	C	N
0.420	10.67	71322	2.00	50.8	.350	8.9	4.3	.75	1.3	32	5.5	24	.38	9.6	0.035	0.9	10.8	MW	CG	N
0.420	10.67	71322S	2.00	50.8	.350	8.9	3.7	.64	1.0	26	3.7	16	.38	9.6	0.035	0.9	10.8	SST	CG	N
0.420	10.67	71336	2.00	50.8	.344	8.7	5.7	.99	1.2	31	7.0	31	.44	11.1	0.038	1.0	11.5	MW	CG	N
0.420	10.67	71336S	2.00	50.8	.344	8.7	4.8	.84	.98	25	4.7	21	.44	11.1	0.038	1.0	11.5	SST	CG	N
0.420	10.67	3555	2.00	50.8	.336	8.5	6.8	1.2	1.4	35	9.4	42	.59	14.9	0.042	1.1	14.0	MW	CG	Z
0.420	10.67	71348	2.00	50.8	.336	8.5	7.8	1.4	1.2	31	9.4	42	.53	13.5	0.042	1.1	12.6	MW	CG	N
0.420	10.67	71348S	2.00	50.8	.336	8.5	6.6	1.2	.96	24	6.4	28	.53	13.5	0.042	1.1	12.6	SST	CG	N
0.420	10.67	71359	2.00	50.8	.330	8.4	9.9	1.7	1.2	30	12	51	.60	15.1	0.045	1.1	13.3	MW	CG	N
0.420	10.67	71359S	2.00	50.8	.330	8.4	8.4	1.5	.92	23	7.8	35	.60	15.1	0.045	1.1	13.3	SST	CG	N
0.420	10.67	71370	2.00	50.8	.326	8.3	12	2.0	1.1	29	13	58	.65	16.4	0.047	1.2	13.8	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.420	10.67	71370S	2.00	50.8	.326	8.3	9.8	1.7	.90	23	8.8	39	.65	16.4	0.047	1.2	13.8	SST	CG	N
0.420	10.67	71381	2.00	50.8	.324	8.2	13	2.3	1.1	27	14	62	.65	16.5	0.048	1.2	13.5	MW	CG	N
0.420	10.67	71381S	2.00	50.8	.324	8.2	11	1.9	.86	22	9.4	42	.65	16.5	0.048	1.2	13.5	SST	CG	N
0.420	10.67	71394	2.00	50.8	.318	8.1	16	2.7	1.0	25	16	69	.74	18.8	0.051	1.3	14.5	MW	CG	N
0.420	10.67	71394S	2.00	50.8	.318	8.1	13	2.3	.80	20	11	47	.74	18.8	0.051	1.3	14.5	SST	CG	N
0.420	10.67	71405	2.00	50.8	.310	7.9	21	3.7	.92	23	19	86	.81	20.6	0.055	1.4	14.8	MW	CG	N
0.420	10.67	71405S	2.00	50.8	.310	7.9	18	3.1	.73	19	13	58	.81	20.6	0.055	1.4	14.8	SST	CG	N
0.420	10.67	71416	2.00	50.8	.302	7.7	28	4.9	.86	22	24	106	.91	23.0	0.059	1.5	15.4	MW	CG	N
0.420	10.67	71416S	2.00	50.8	.302	7.7	24	4.1	.68	17	16	72	.91	23.0	0.059	1.5	15.4	SST	CG	N
0.420	10.67	71427	2.00	50.8	.294	7.5	36	6.4	.79	20	29	128	.99	25.2	0.063	1.6	15.8	MW	CG	N
0.420	10.67	71427S	2.00	50.8	.294	7.5	31	5.4	.63	16	19	87	.99	25.2	0.063	1.6	15.8	SST	CG	N
0.420	10.67	71435	2.00	50.8	.286	7.3	48	8.3	.72	18	34	153	1.06	27.0	0.067	1.7	15.9	MW	CG	N
0.420	10.67	71435S	2.00	50.8	.286	7.3	40	7.1	.58	15	23	104	1.06	27.0	0.067	1.7	15.9	SST	CG	N
0.420	10.67	71442	2.00	50.8	.276	7.0	64	11	.63	16	40	180	1.17	29.7	0.072	1.8	16.3	MW	CG	N
0.420	10.67	71442S	2.00	50.8	.276	7.0	55	9.6	.50	13	27	120	1.17	29.7	0.072	1.8	16.3	SST	CG	N
0.420	10.67	4374	2.06	52.4	.276	7.0	62	11	.47	12	29	129	1.21	30.6	0.072	1.8	16.8	SPR	CG	Z
0.420	10.67	71324	2.25	57.2	.350	8.9	3.8	.67	1.4	37	5.5	24	.42	10.7	0.035	0.9	12.0	MW	CG	N
0.420	10.67	71324S	2.25	57.2	.350	8.9	3.2	.57	1.1	29	3.7	16	.42	10.7	0.035	0.9	12.0	SST	CG	N
0.420	10.67	S-1410	2.25	57.2	.346	8.8	5.2	.91	.85	21	4.4	19	.41	10.3	0.037	0.9	10.0	SST	C	N
0.420	10.67	71337	2.25	57.2	.344	8.7	5.0	.88	1.4	36	7.0	31	.48	12.3	0.038	1.0	12.8	MW	CG	N
0.420	10.67	71337S	2.25	57.2	.344	8.7	4.3	.74	1.1	28	4.7	21	.48	12.3	0.038	1.0	12.8	SST	CG	N
0.420	10.67	71349	2.25	57.2	.336	8.5	7.2	1.3	1.3	33	9.4	42	.57	14.4	0.042	1.1	13.5	MW	CG	N
0.420	10.67	71349S	2.25	57.2	.336	8.5	6.1	1.1	1.0	26	6.4	28	.57	14.4	0.042	1.1	13.5	SST	CG	N
0.420	10.67	71360	2.25	57.2	.330	8.4	8.7	1.5	1.3	34	12	51	.67	17.0	0.045	1.1	14.9	MW	CG	N
0.420	10.67	71360S	2.25	57.2	.330	8.4	7.4	1.3	1.1	27	7.8	35	.67	17.0	0.045	1.1	14.9	SST	CG	N
0.420	10.67	71383	2.25	57.2	.324	8.2	11	1.9	1.3	32	14	62	.74	18.7	0.048	1.2	15.4	MW	CG	N
0.420	10.67	71383S	2.25	57.2	.324	8.2	9.4	1.7	1.0	25	9.4	42	.74	18.7	0.048	1.2	15.4	SST	CG	N
0.420	10.67	71395	2.25	57.2	.318	8.1	14	2.4	1.1	29	16	69	.82	20.7	0.051	1.3	16.0	MW	CG	N
0.420	10.67	71395S	2.25	57.2	.318	8.1	12	2.1	.90	23	11	47	.82	20.7	0.051	1.3	16.0	SST	CG	N
0.420	10.67	71406	2.25	57.2	.310	7.9	18	3.2	1.1	27	19	86	.92	23.4	0.055	1.4	16.8	MW	CG	N
0.420	10.67	71406S	2.25	57.2	.310	7.9	16	2.7	.84	21	13	58	.92	23.4	0.055	1.4	16.8	SST	CG	N
0.420	10.67	71417	2.25	57.2	.302	7.7	25	4.3	.97	25	24	106	1.01	25.7	0.059	1.5	17.1	MW	CG	N
0.420	10.67	71417S	2.25	57.2	.302	7.7	21	3.6	.77	20	16	72	1.01	25.7	0.059	1.5	17.1	SST	CG	N
0.420	10.67	71428	2.25	57.2	.294	7.5	32	5.6	.90	23	29	128	1.10	28.0	0.063	1.6	17.5	MW	CG	N
0.420	10.67	71428S	2.25	57.2	.294	7.5	27	4.8	.72	18	19	87	1.10	28.0	0.063	1.6	17.5	SST	CG	N
0.420	10.67	71436	2.25	57.2	.286	7.3	42	7.4	.82	21	34	153	1.18	30.0	0.067	1.7	17.6	MW	CG	N
0.420	10.67	71436S	2.25	57.2	.286	7.3	36	6.3	.65	17	23	104	1.18	30.0	0.067	1.7	17.6	SST	CG	N
0.420	10.67	71443	2.25	57.2	.276	7.0	57	9.9	.71	18	40	180	1.31	33.4	0.072	1.8	18.3	MW	CG	N
0.420	10.67	71443S	2.25	57.2	.276	7.0	48	8.4	.56	14	27	120	1.31	33.4	0.072	1.8	18.3	SST	CG	N
0.420	10.67	4243	2.38	60.3	.360	9.1	1.5	.26	1.9	48	2.8	13	.48	12.2	0.030	0.8	15.0	MW	C	Z
0.420	10.67	10568	2.38	60.3	.268	6.8	62	11	.55	14	34	150	1.59	40.4	0.076	1.9	210.0	SPR	CG	N
0.420	10.67	10615	2.50	63.5	.370	9.4	.62	.11	2.1	53	1.3	5.8	.40	10.2	0.025	0.6	15.0	SST	C	N
0.420	10.67	71326	2.50	63.5	.350	8.9	3.4	.60	1.6	41	5.5	24	.46	11.7	0.035	0.9	13.1	MW	CG	N
0.420	10.67	71326S	2.50	63.5	.350	8.9	2.9	.51	1.3	33	3.7	16	.46	11.7	0.035	0.9	13.1	SST	CG	N
0.420	10.67	71338	2.50	63.5	.344	8.7	4.5	.79	1.6	39	7.0	31	.53	13.5	0.038	1.0	14.0	MW	CG	N
0.420	10.67	71338S	2.50	63.5	.344	8.7	3.8	.67	1.2	31	4.7	21	.53	13.5	0.038	1.0	14.0	SST	CG	N
0.420	10.67	71350	2.50	63.5	.336	8.5	6.5	1.1	1.5	37	9.4	42	.62	15.9	0.042	1.1	14.9	MW	CG	N
0.420	10.67	71350S	2.50	63.5	.336	8.5	5.5	.96	1.2	29	6.4	28	.62	15.9	0.042	1.1	14.9	SST	CG	N
0.420	10.67	71361	2.50	63.5	.330	8.4	7.9	1.4	1.5	37	12	51	.73	18.6	0.045	1.1	16.3	MW	CG	N
0.420	10.67	71361S	2.50	63.5	.330	8.4	6.7	1.2	1.2	30	7.8	35	.73	18.6	0.045	1.1	16.3	SST	CG	N
0.420	10.67	71385	2.50	63.5	.324	8.2	9.9	1.7	1.4	36	14	62	.82	20.7	0.048	1.2	17.0	MW	CG	N
0.420	10.67	71385S	2.50	63.5	.324	8.2	8.4	1.5	1.1	28	9.4	42	.82	20.7	0.048	1.2	17.0	SST	CG	N
0.420	10.67	71396	2.50	63.5	.318	8.1	12	2.2	1.3	32	16	69	.90	22.8	0.051	1.3	17.6	MW	CG	N
0.420	10.67	71396S	2.50	63.5	.318	8.1	10	1.8	1.0	25	11	47	.90	22.8	0.051	1.3	17.6	SST	CG	N
0.420	10.67	71407	2.50	63.5	.310	7.9	17	2.9	1.2	30	19	86	1.01	25.7	0.055	1.4	18.4	MW	CG	N
0.420	10.67	71407S	2.50	63.5	.310	7.9	14	2.5	.94	24	13	58	1.01	25.7	0.055	1.4	18.4	SST	CG	N
0.420	10.67	71418	2.50	63.5	.302	7.7	22	3.8	1.1	28	24	106	1.11	28.3	0.059	1.5	18.9	MW	CG	N
0.420	10.67	71418S	2.50	63.5	.302	7.7	19	3.3	.87	22	16	72	1.11	28.3	0.059	1.5	18.9	SST	CG	N
0.420	10.67	71429	2.50	63.5	.294	7.5	29	5.0	1.0	25	29	128	1.22	31.0	0.063	1.6	19.4	MW	CG	N
0.420	10.67	71429S	2.50	63.5	.294	7.5	24	4.3	.80	20	19	87	1.22	31.0	0.063	1.6	19.4	SST	CG	N
0.420	10.67	71437	2.50	63.5	.286	7.3	38	6.6	.91	23	34	153	1.31	33.2	0.067	1.7	19.5	MW	CG	N
0.420	10.67	71437S	2.50	63.5	.286	7.3	32	5.6	.73	19	23	104	1.31	33.2	0.067	1.7	19.5	SST	CG	N
0.420	10.67	71444	2.50	63.5	.276	7.0	51	8.9	.80	20	40	180	1.45	36.8	0.072	1.8	20.1	MW	CG	N
0.420	10.67	71444S	2.50	63.5	.276	7.0	43	7.5	.63	16	27	120	1.45	36.8	0.072	1.8	20.1	SST	CG	N
0.420	10.67	3431	2.50	63.5	.260	6.6	76	13	.51	13	39	174	1.72	43.7	0.080	2.0	21.5	SPR	CG	Z
0.420	10.67	3634	2.63	66.7	.284	7.2	35	6.1	1.0	26	36	160	1.50	38.0	0.068	1.7	22.0	MW	CG	Z
0.420	10.67	12147	2.66	67.5	.340	8.6	4.8	.83	1.2	31	5.9	26	.64	16.3	0.040	1.0	16.0	SPR	CG	Z
0.420	10.67	A9-51	2.66	67.5	.338	8.6	4.9	.86	1.3	33	6.3	28	.70	17.7	0.041	1.0	17.0	SPR	CG	Z
0.420	10.67	3857	2.75	69.9	.348	8.8	2.2	.39	1.9	49	4.3	19	.79	20.1	0.036	0.9	21.0	SPR	C	Z
0.420	10.67	11679	3.19	81.0	.346	8.8	2.0	.35	2.2	57	4.4	20	.96	24.4	0.037	0.9	26.0	SPR	CG	Z
0.420	10.67	3495	3.25	82.6	.292	7.4	24	4.2	.90	23	22	96	1.54	39.0	0.064	1.6	24.0	SPR	CG	Z
0.420	10.67	10379	3.56	90.5	.276	7.0	31	5.5	.92	23	29	129	2.30	58.5	0.072	1.8	31.0	SPR	C	Z
0.420	10.67	10512	3.75	95.3	.280	7.1	40	7.0	.67	17	27	119	1.54	39.1	0.070	1.8	22.0	SPR	CG	Z
0.420	10.67	B15-60	4.13	104.8	.308	7.8	12	2.1	1.2	30	14	62	1.34	34.1	0.056	1.4	24.0	SST	CG	N
0.420	10.67	4127	4.88	123.8	.332	8.4	4.4	.77	1.8	45	7.8	35	1.14	29.1	0.044	1.1	25.0	SPR	C	Z
0.420	10.67	1529	4.94	125.4	.324	8.2	5.0	.87	2.8	71	14	62	1.51	38.4	0.048	1.2	31.5	MW	CG	Z
0.420	10.67	10760	6.00	152.4	.328	8.3	2.7	.47	3.3	83	8.9	39	2.16	54.9	0.046	1.2	47.0	SPR	CG	N
0.420	10.67	10605	7.13	181.0	.336	8.5	1.4	.24	4.5	115	6.2	28	2.59	65.9	0.042	1.1	61.8	SPR	CG	GI
0.420	10.67	3979	7.75	196.9	.236	6.0	50	8.7	1.1	28	55	247	5.52	140.2	0.092	2.3	60.0	SPR	CG	Z
0.420	10.67	11289	8.00	203.2	.338	8.6	1.5	.26	3.9	100	5.9	26	1.91	48.4	0.041	1.0	45.5	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.420	10.67	11666	9.50	241.3	.322	8.2	2.0	.34	5.4	137	11	47	4.12	104.5	0.049	1.2	84.0	SPR	CG	GI
0.420	10.67	S-424	15.8	400.1	.346	8.8	.32	.06	11	274	3.4	15	4.96	125.9	0.037	0.9	133.0	SST	C	N
0.432	10.97	B3-63	1.23	31.3	.280	7.1	132	23	.23	5.9	31	137	.68	17.4	0.076	1.9	9.00	SST	CG	N
0.437	11.10	S-1266	.31	7.9	.407	10.3	.21	.04	.21	5.3	.04	.19	.11	2.7	0.015	0.4	6.00	SST	C	N
0.437	11.10	12611	.31	7.9	.391	9.9	.99	.17	.13	3.3	.13	.56	.18	4.7	0.023	0.6	7.00	SST	C	N
0.437	11.10	11454	.31	7.9	.387	9.8	3.6	.62	.19	4.7	.67	3.0	.13	3.2	0.025	0.6	4.00	SST	C	N
0.437	11.10	A15-44	.34	8.7	.355	9.0	26	4.5	.16	4.0	4.1	18	.18	4.7	0.041	1.0	4.50	SPR	CG	N
0.437	11.10	S-1144	.38	9.5	.381	9.7	4.5	.78	.22	5.6	.99	4.4	.15	3.9	0.028	0.7	4.50	SST	C	N
0.437	11.10	3984	.41	10.3	.361	9.2	23	4.1	.21	5.3	4.9	22	.19	4.8	0.038	1.0	4.00	SPR	C	Z
0.437	11.10	S-876	.41	10.3	.355	9.0	34	6.0	.17	4.2	5.7	25	.15	3.8	0.041	1.0	3.75	SST	CG	N
0.437	11.10	3920	.44	11.1	.353	9.0	36	6.3	.18	4.6	6.5	29	.17	4.3	0.042	1.1	4.00	SPR	CG	Z
0.437	11.10	S-157	.44	11.1	.327	8.3	104	18	.12	3.1	13	56	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.437	11.10	S-196	.44	11.1	.327	8.3	69	12	.11	2.7	7.5	33	.33	8.4	0.055	1.4	5.00	SST	C	N
0.437	11.10	JJ-30	.47	11.9	.377	9.6	6.1	1.1	.33	8.5	2.0	9.1	.14	3.4	0.030	0.8	4.50	SST	CG	N
0.437	11.10	N-84	.47	11.9	.369	9.4	10	1.8	.28	7.1	2.8	13	.19	4.7	0.034	0.9	4.50	SST	C	N
0.437	11.10	FF-60	.47	11.9	.337	8.6	45	7.8	.21	5.5	9.6	43	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.437	11.10	WW-68	.47	11.9	.313	8.0	133	23	.14	3.6	19	85	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.437	11.10	2659	.47	11.9	.311	7.9	143	25	.14	3.5	20	89	.32	8.0	0.063	1.6	5.00	SPR	CG	Z
0.437	11.10	S-1039	.47	11.9	.277	7.0	446	78	.08	2.0	35	157	.36	9.1	0.080	2.0	4.50	SST	CG	N
0.437	11.10	11219	.50	12.7	.411	10.4	.12	.02	.41	10	.05	.22	.09	2.3	0.013	0.3	6.00	SST	C	N
0.437	11.10	TT-43	.50	12.7	.397	10.1	.91	.16	.38	9.7	.35	1.5	.12	3.0	0.020	0.5	5.00	SST	C	N
0.437	11.10	2989	.50	12.7	.377	9.6	8.6	1.5	.35	8.9	3.0	13	.15	3.8	0.030	0.8	4.00	MW	C	Z
0.437	11.10	12661	.50	12.7	.377	9.6	7.5	1.3	.31	8.0	2.4	10	.15	3.8	0.030	0.8	4.00	SST	C	N
0.437	11.10	10250	.50	12.7	.367	9.3	15	2.6	.26	6.6	3.8	17	.18	4.7	0.035	0.9	4.25	SPR	C	Z
0.437	11.10	AA-88	.50	12.7	.357	9.1	17	3.0	.30	7.6	5.1	23	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.437	11.10	K-25	.50	12.7	.355	9.0	28	4.9	.20	5.1	5.7	25	.21	5.2	0.041	1.0	4.00	SST	C	N
0.437	11.10	S-1557	.50	12.7	.337	8.6	54	9.4	.18	4.5	9.6	43	.23	5.7	0.050	1.3	4.50	SST	CG	N
0.437	11.10	B9-21	.50	12.7	.287	7.3	274	48	.09	2.2	24	107	.41	10.5	0.075	1.9	5.50	SPR	CG	N
0.437	11.10	S-3172	.53	13.5	.391	9.9	1.4	.24	.38	9.7	.53	2.4	.15	3.8	0.023	0.6	5.50	SST	C	N
0.437	11.10	B-48	.53	13.5	.363	9.2	15	2.5	.31	7.9	4.5	20	.18	4.6	0.037	0.9	5.00	SPR	CG	N
0.437	11.10	4206	.53	13.5	.293	7.4	263	46	.11	2.7	28	124	.36	9.1	0.072	1.8	5.00	SPR	CG	Z
0.437	11.10	11182	.56	14.3	.387	9.8	1.6	.28	.36	9.2	.58	2.6	.20	5.1	0.025	0.6	7.00	MW	C	N
0.437	11.10	3371	.56	14.3	.373	9.5	10	1.8	.31	7.8	3.1	14	.17	4.3	0.032	0.8	4.25	HD	C	Z
0.437	11.10	B-88	.56	14.3	.327	8.3	70	12	.18	4.6	13	56	.28	7.0	0.055	1.4	5.00	SST	CG	N
0.437	11.10	2993	.56	14.3	.313	8.0	133	23	.14	3.6	19	85	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.437	11.10	4309	.56	14.3	.303	7.7	142	25	.16	4.1	23	101	.40	10.2	0.067	1.7	6.00	SPR	CG	Z
0.437	11.10	4275	.59	15.1	.313	8.0	100	17	.19	4.9	19	85	.37	9.4	0.062	1.6	6.00	SPR	CG	Z
0.437	11.10	S-1063	.63	15.9	.381	9.7	5.6	.98	.34	8.7	1.9	8.5	.14	3.6	0.028	0.7	4.00	SST	C	N
0.437	11.10	S-3062	.63	15.9	.373	9.5	9.8	1.7	.29	7.4	2.8	13	.16	4.1	0.032	0.8	4.00	SST	C	N
0.437	11.10	B11-67	.63	15.9	.373	9.5	11	2.0	.27	6.9	3.1	14	.13	3.3	0.032	0.8	4.00	SPR	CG	N
0.437	11.10	A12-6	.63	15.9	.359	9.1	18	3.1	.30	7.6	5.2	23	.23	5.9	0.039	1.0	5.00	SPR	C	N
0.437	11.10	2517	.63	15.9	.343	8.7	30	5.2	.31	7.8	9.1	40	.28	7.2	0.047	1.2	6.00	SPR	CG	Z
0.437	11.10	G-78	.63	15.9	.325	8.3	114	20	.12	3.2	14	63	.24	6.0	0.056	1.4	4.25	SPR	CG	N
0.437	11.10	JJ-64	.66	16.7	.405	10.3	.28	.05	.54	14	.15	.66	.12	3.0	0.016	0.4	6.50	MW	C	Z
0.437	11.10	S-897	.66	16.7	.385	9.8	2.1	.36	.50	13	1.0	4.6	.16	4.0	0.026	0.7	6.00	SST	CG	N
0.437	11.10	A11-48	.66	16.7	.345	8.8	33	5.8	.24	6.2	8.0	36	.27	6.9	0.046	1.2	5.00	SST	C	N
0.437	11.10	A11-69	.69	17.4	.287	7.3	317	56	.10	2.5	31	140	.38	9.5	0.075	1.9	5.00	SPR	CG	Z
0.437	11.10	12513	.69	17.5	.337	8.6	48	8.4	.30	7.5	14	63	.31	8.0	0.050	1.3	5.25	MW	C	N
0.437	11.10	S-128	.75	19.1	.397	10.1	.68	.12	.61	15	.42	1.9	.14	3.6	0.020	0.5	6.00	SST	C	N
0.437	11.10	S-920	.75	19.1	.385	9.8	1.6	.29	.54	14	.89	3.9	.21	5.3	0.026	0.7	7.00	SST	C	N
0.437	11.10	913	.75	19.1	.381	9.7	4.3	.75	.58	15	2.5	11	.17	4.3	0.028	0.7	5.00	MW	C	Z
0.437	11.10	11397	.75	19.1	.377	9.6	5.8	1.0	.57	14	3.3	15	.18	4.6	0.030	0.8	5.00	MW	C	Z
0.437	11.10	10795	.75	19.1	.367	9.3	7.4	1.3	.48	12	3.6	16	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.437	11.10	3977	.75	19.1	.367	9.3	9.4	1.6	.40	10	3.8	17	.19	4.9	0.035	0.9	5.50	SPR	CG	Z
0.437	11.10	S-1031	.75	19.1	.361	9.2	12	2.0	.39	9.9	4.6	20	.21	5.3	0.038	1.0	5.50	SST	CG	N
0.437	11.10	3791	.75	19.1	.353	9.0	29	5.0	.23	5.8	6.5	29	.23	5.9	0.042	1.1	4.50	SPR	C	Z
0.437	11.10	S-745	.75	19.1	.353	9.0	18	3.1	.34	8.7	6.1	27	.27	6.9	0.042	1.1	5.50	SST	C	N
0.437	11.10	10253	.75	19.1	.331	8.4	40	7.0	.30	7.7	12	54	.42	10.8	0.053	1.3	7.00	SPR	C	Z
0.437	11.10	513	.75	19.1	.329	8.4	48	8.4	.27	6.8	13	57	.41	10.3	0.054	1.4	6.50	HD	C	Z
0.437	11.10	00-98	.75	19.1	.329	8.4	47	8.2	.26	6.5	12	53	.32	8.2	0.054	1.4	6.00	SST	CG	N
0.437	11.10	VV-34	.75	19.1	.329	8.4	36	6.3	.32	8.1	11	51	.43	11.0	0.054	1.4	8.00	SPR	CG	Z
0.437	11.10	10592	.75	19.1	.327	8.3	47	8.3	.29	7.2	13	60	.39	9.8	0.055	1.4	7.00	SPR	CG	N
0.437	11.10	S-404	.75	19.1	.311	7.9	93	16	.20	5.1	19	84	.38	9.6	0.063	1.6	6.00	SST	CG	N
0.437	11.10	A-36	.75	19.1	.297	7.5	173	30	.15	3.8	26	115	.49	12.4	0.070	1.8	6.00	SPR	C	Z
0.437	11.10	10439	.81	20.6	.367	9.3	6.0	1.1	.51	13	3.1	14	.30	7.6	0.035	0.9	7.50	SPR	C	Z
0.437	11.10	10870	.81	20.6	.361	9.2	13	2.4	.36	9.2	4.9	22	.21	5.3	0.038	1.0	5.50	SPR	CG	N
0.437	11.10	3068	.81	20.6	.355	9.0	11	1.9	.44	11	4.8	21	.37	9.4	0.041	1.0	8.00	SPR	C	Z
0.437	11.10	F-56	.81	20.6	.287	7.3	190	33	.17	4.2	31	140	.53	13.3	0.075	1.9	7.00	SPR	CG	Z
0.437	11.10	A9-44	.81	20.6	.281	7.1	228	40	.15	3.9	35	156	.55	13.9	0.078	2.0	7.00	SPR	CG	N
0.437	11.10	11370	.81	20.6	.277	7.0	270	47	.13	3.3	35	157	.50	12.7	0.080	2.0	6.25	SST	CG	N
0.437	11.10	3182	.84	21.4	.387	9.8	1.6	.27	.64	16	.99	4.4	.20	5.2	0.025	0.6	7.00	MW	C	Z
0.437	11.10	2648	.84	21.4	.377	9.6	3.4	.60	.63	16	2.2	9.7	.21	5.3	0.030	0.8	7.00	MW	CG	Z
0.437	11.10	3211	.88	22.2	.385	9.8	3.1	.55	.72	18	2.3	10	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.437	11.10	1563	.88	22.2	.383	9.7	2.2	.39	.69	17	1.5	6.8	.19	4.8	0.027	0.7	7.00	MW	CG	Z
0.437	11.10	B11-62	.88	22.2	.383	9.7	2.2	.39	.66	17	1.5	6.5	.22	5.5	0.027	0.7	7.00	MW	C	N
0.437	11.10	3988	.88	22.2	.375	9.5	1.6	.29	.41	10	.67	3.0	.47	11.8	0.031	0.8	14.0	MW	C	Z
0.437	11.10	S-1283	.88	22.2	.363	9.2	10	1.8	.41	10	4.2	19	.20	5.2	0.037	0.9	5.50	SST	CG	N
0.437	11.10	S-746	.88	22.2	.353	9.0	15	2.6	.42	11	6.1	27	.30	7.7	0.042	1.1	6.25	SST	C	N
0.437	11.10	S-750	.88	22.2	.327	8.3	41	7.1	.31	7.9	13	56	.44	11.2	0.055	1.4	7.00	SST	C	N
0.437	11.10	F-64	.88	22.2	.317	8.1	69	12	.25	6.4	17	77	.42	10.7	0.060	1.5	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.437	11.10	UU-66	.88	22.2	.313	8.0	80	14	.24	6.1	19	85	.43	11.0	0.062	1.6	7.00	HD	CG	Z
0.437	11.10	3212	.88	22.2	.293	7.4	158	28	.18	4.5	28	124	.50	12.8	0.072	1.8	7.00	SPR	CG	Z
0.437	11.10	S-1352	.88	22.2	.277	7.0	223	39	.16	4.0	35	157	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.437	11.10	S-1374	.91	23.0	.343	8.7	21	3.8	.40	10	8.5	38	.32	8.1	0.047	1.2	6.75	SST	CG	N
0.437	11.10	2582	.91	23.0	.327	8.3	43	7.5	.44	11	19	83	.41	10.5	0.055	1.4	7.50	MW	CG	Z
0.437	11.10	HH-100	.91	23.0	.293	7.4	108	19	.24	6.2	26	116	.61	15.5	0.072	1.8	8.50	SST	CG	N
0.437	11.10	A-74	.94	23.8	.397	10.1	.39	.07	.72	18	.28	1.3	.22	5.6	0.020	0.5	10.0	MW	C	BO
0.437	11.10	A-99	.94	23.8	.387	9.8	1.2	.20	.74	19	.85	3.8	.20	5.1	0.025	0.6	8.00	SST	CG	N
0.437	11.10	B10-3	.94	23.8	.373	9.5	4.5	.79	.67	17	3.1	14	.26	6.5	0.032	0.8	7.00	SPR	C	Z
0.437	11.10	S-848	.94	23.8	.367	9.3	5.8	1.0	.61	16	3.6	16	.25	6.2	0.035	0.9	7.00	SST	CG	N
0.437	11.10	U-63	.94	23.8	.353	9.0	14	2.5	.45	12	6.5	29	.29	7.5	0.042	1.1	7.00	SPR	CG	GI
0.437	11.10	S-787	.97	24.6	.381	9.7	2.2	.39	.77	20	1.7	7.7	.20	5.0	0.028	0.7	7.00	SST	CG	N
0.437	11.10	S-862	.97	24.6	.369	9.4	5.2	.91	.66	17	3.4	15	.27	6.8	0.034	0.9	7.00	SST	C	N
0.437	11.10	10206	1.00	25.4	.397	10.1	.39	.07	.78	20	.31	1.4	.22	5.6	0.020	0.5	10.0	MW	C	Z
0.437	11.10	S-1253	1.00	25.4	.389	9.9	1.5	.26	.83	21	1.2	5.4	.17	4.3	0.024	0.6	6.00	SST	C	N
0.437	11.10	MM-78	1.00	25.4	.381	9.7	2.5	.43	.77	20	1.9	8.5	.21	5.3	0.028	0.7	6.50	SST	C	N
0.437	11.10	1930	1.00	25.4	.377	9.6	3.5	.60	.76	19	2.6	12	.24	6.1	0.030	0.8	7.00	MW	C	Z
0.437	11.10	3996	1.00	25.4	.371	9.4	6.4	1.1	.52	13	3.4	15	.20	5.0	0.033	0.8	6.00	SPR	CG	Z
0.437	11.10	S-1059	1.00	25.4	.357	9.1	8.5	1.5	.63	16	5.3	24	.36	9.1	0.040	1.0	8.00	SST	C	N
0.437	11.10	HH-35	1.00	25.4	.357	9.1	12	2.0	.46	12	5.3	24	.26	6.6	0.040	1.0	6.50	SST	CG	N
0.437	11.10	S-747	1.00	25.4	.353	9.0	13	2.2	.49	12	6.1	27	.34	8.5	0.042	1.1	7.00	SST	C	N
0.437	11.10	EE-82	1.00	25.4	.353	9.0	9.0	1.6	.54	14	4.8	22	.46	11.7	0.042	1.1	10.0	SPR	C	Z
0.437	11.10	4151	1.00	25.4	.345	8.8	16	2.9	.52	13	8.5	38	.44	11.1	0.046	1.2	8.50	SPR	C	Z
0.437	11.10	943	1.00	25.4	.343	8.7	23	4.1	.39	9.8	9.1	40	.38	9.6	0.047	1.2	7.00	HD	C	Z
0.437	11.10	12657	1.00	25.4	.343	8.7	24	4.1	.53	14	13	56	.33	8.4	0.047	1.2	7.00	MW	CG	N
0.437	11.10	10936	1.00	25.4	.327	8.3	34	5.9	.40	10	13	60	.50	12.6	0.055	1.4	9.00	SPR	CG	N
0.437	11.10	S-751	1.00	25.4	.327	8.3	34	5.9	.37	9.5	13	56	.50	12.6	0.055	1.4	8.00	SST	C	N
0.437	11.10	Z-87	1.00	25.4	.305	7.7	77	13	.28	7.1	22	96	.53	13.4	0.066	1.7	8.00	SST	CG	N
0.437	11.10	J-19	1.00	25.4	.295	7.5	80	14	.29	7.4	23	104	.71	18.0	0.071	1.8	10.0	SST	CG	N
0.437	11.10	10312	1.00	25.4	.293	7.4	132	23	.21	5.4	28	124	.65	16.5	0.072	1.8	8.00	SPR	C	Z
0.437	11.10	A9-26	1.03	26.2	.397	10.1	.39	.07	.81	21	.32	1.4	.22	5.6	0.020	0.5	10.0	MW	C	BO
0.437	11.10	B10-31	1.03	26.2	.355	9.0	8.7	1.5	.60	15	5.2	23	.43	10.9	0.041	1.0	9.50	SPR	C	N
0.437	11.10	520	1.06	27.0	.355	9.0	11	2.0	.54	14	6.1	27	.36	9.1	0.041	1.0	7.75	HD	C	Z
0.437	11.10	Q-41	1.06	27.0	.347	8.8	14	2.5	.53	14	7.5	33	.36	9.1	0.045	1.1	8.00	SST	CG	N
0.437	11.10	3454	1.06	27.0	.313	8.0	53	9.3	.36	9.1	19	85	.59	15.0	0.062	1.6	9.50	HD	CG	Z
0.437	11.10	509	1.06	27.0	.313	8.0	80	14	.24	6.1	19	85	.50	12.6	0.062	1.6	7.00	HD	C	Z
0.437	11.10	3534	1.06	27.0	.311	7.9	78	14	.36	9.0	28	123	.47	12.0	0.063	1.6	7.50	MW	CG	Z
0.437	11.10	10862	1.06	27.0	.295	7.5	110	19	.23	5.8	25	112	.64	16.2	0.071	1.8	8.00	SST	C	N
0.437	11.10	10765	1.08	27.4	.369	9.4	3.6	.64	.74	19	2.7	12	.34	8.6	0.034	0.9	10.0	SPR	CG	Z
0.437	11.10	10480	1.09	27.8	.393	10.0	1.3	.24	.95	24	1.3	5.7	.14	3.6	0.022	0.6	5.50	MW	C	N
0.437	11.10	V-3	1.09	27.8	.377	9.6	3.1	.54	.77	19	2.4	10	.24	6.1	0.030	0.8	7.00	SST	C	N
0.437	11.10	B15-70	1.09	27.8	.359	9.1	5.3	.92	.63	16	3.3	15	.47	11.9	0.039	1.0	12.0	SPR	CG	N
0.437	11.10	S-1164	1.13	28.6	.377	9.6	3.0	.52	.79	20	2.4	10	.24	6.1	0.030	0.8	7.00	SST	C	N
0.437	11.10	10762	1.13	28.6	.343	8.7	24	4.1	.38	9.8	9.1	40	.33	8.4	0.047	1.2	7.00	SPR	CG	Z
0.437	11.10	B9-61	1.13	28.6	.343	8.7	19	3.3	.45	11	8.5	38	.40	10.1	0.047	1.2	7.50	SST	C	N
0.437	11.10	11126	1.13	28.6	.307	7.8	100	17	.22	5.6	22	97	.52	13.2	0.065	1.7	7.00	SPR	C	Z
0.437	11.10	J-60	1.13	28.6	.293	7.4	105	18	.27	6.8	28	124	.68	17.4	0.072	1.8	9.50	SPR	CG	Z
0.437	11.10	12295	1.16	29.4	.345	8.8	12	2.1	.60	15	7.2	32	.55	14.0	0.046	1.2	11.0	SPR	C	Z
0.437	11.10	3725	1.16	29.4	.327	8.3	28	4.8	.49	12	13	60	.58	14.7	0.055	1.4	10.5	SPR	CG	Z
0.437	11.10	S-1679	1.16	29.4	.251	6.4	293	51	.18	4.5	51	229	.93	23.6	0.093	2.4	10.0	SST	CG	N
0.437	11.10	QQ-56	1.19	30.2	.369	9.4	4.9	.85	.88	22	4.3	19	.31	7.8	0.034	0.9	8.00	MW	C	GI
0.437	11.10	10883	1.19	30.2	.313	8.0	57	9.9	.32	8.0	18	80	.51	13.0	0.062	1.6	8.25	SST	CG	N
0.437	11.10	S-1467	1.25	31.8	.355	9.0	10	1.8	.56	14	5.7	25	.31	7.8	0.041	1.0	7.50	SST	CG	N
0.437	11.10	3166	1.25	31.8	.353	9.0	6.7	1.2	.67	17	4.5	20	.58	14.7	0.042	1.1	12.8	SPR	C	Z
0.437	11.10	S-748	1.25	31.8	.353	9.0	9.6	1.7	.63	16	6.1	27	.40	10.1	0.042	1.1	8.50	SST	C	N
0.437	11.10	10202	1.25	31.8	.347	8.8	16	2.9	.49	12	8.0	36	.36	9.1	0.045	1.1	8.00	SPR	CG	Z
0.437	11.10	S-409	1.25	31.8	.343	8.7	7.8	1.4	.55	14	4.3	19	.71	17.9	0.047	1.2	15.0	SST	CG	N
0.437	11.10	S-1297	1.25	31.8	.329	8.4	26	4.5	.46	12	12	53	.50	12.7	0.054	1.4	9.25	SST	CG	N
0.437	11.10	S-752	1.25	31.8	.327	8.3	26	4.6	.48	12	13	56	.59	15.0	0.055	1.4	9.75	SST	C	N
0.437	11.10	11337	1.25	31.8	.313	8.0	45	7.8	.40	10	18	80	.62	15.7	0.062	1.6	10.0	SST	CG	N
0.437	11.10	N-133	1.25	31.8	.309	7.8	51	9.0	.41	10	21	93	.70	17.9	0.064	1.6	11.0	SPR	CG	Z
0.437	11.10	S-810	1.25	31.8	.293	7.4	76	13	.34	8.7	26	116	.79	20.1	0.072	1.8	11.0	SST	CG	N
0.437	11.10	A11-3	1.31	33.3	.363	9.2	1.8	.32	.78	20	1.4	6.3	.54	13.6	0.037	0.9	14.5	PB	CG	N
0.437	11.10	K-60	1.31	33.3	.343	8.7	23	4.1	.39	9.8	9.1	40	.33	8.4	0.047	1.2	7.00	SPR	CG	N
0.437	11.10	3598	1.34	34.1	.377	9.6	1.4	.24	.88	22	1.2	5.4	.47	11.8	0.030	0.8	14.5	MW	C	Z
0.437	11.10	A13-36	1.34	34.1	.359	9.1	9.1	1.6	.58	15	5.2	23	.34	8.7	0.039	1.0	7.75	SPR	C	N
0.437	11.10	1892	1.34	34.1	.313	8.0	45	7.8	.59	15	26	118	.68	17.3	0.062	1.6	11.0	MW	CG	Z
0.437	11.10	12118	1.34	34.1	.309	7.8	46	8.1	.45	11	21	93	.77	19.5	0.064	1.6	12.0	SPR	CG	Z
0.437	11.10	A11-53	1.38	34.9	.347	8.8	9.3	1.6	.80	20	7.5	33	.55	14.0	0.045	1.1	11.3	SST	C	N
0.437	11.10	11166	1.38	34.9	.343	8.7	9.5	1.7	.65	16	6.1	27	.73	18.5	0.047	1.2	14.5	HD	C	Z
0.437	11.10	L-47	1.38	34.9	.337	8.6	15	2.7	.66	17	10	45	.60	15.2	0.050	1.3	12.0	SPR	CG	Z
0.437	11.10	4258	1.38	34.9	.335	8.5	21	3.7	.51	13	11	48	.56	14.2	0.051	1.3	10.0	SPR	C	Z
0.437	11.10	10518	1.38	34.9	.327	8.3	21	3.8	.63	16	13	60	.72	18.2	0.055	1.4	13.0	SPR	CG	GI
0.437	11.10	3579	1.38	34.9	.311	7.9	53	9.3	.53	13	28	123	.64	16.2	0.063	1.6	10.1	MW	CG	Z
0.437	11.10	3830	1.38	34.9	.287	7.3	95	17	.33	8.4	31	140	.90	22.9	0.075	1.9	12.0	SPR	CG	GI
0.437	11.10	3184	1.41	35.7	.373	9.5	1.4	.24	.78	20	1.1	4.7	.62	15.8	0.032	0.8	18.5	SPR	C	Z
0.437	11.10	10495	1.41	35.7	.343	8.7	9.1	1.6	.65	17	5.9	26	.75	19.1	0.047	1.2	15.0	SPR	C	Z
0.437	11.10	B3-34	1.42	36.1	.293	7.4	79	14	.35	8.9	28	124	.86	21.9	0.072	1.8	12.0	SPR	CG	N
0.437	11.10	B10-66	1.44	36.5	.363	9.2	7.3	1.3	.61	16	4.5	20	.32	8.2	0.037	0.9	7.75	SPR	CG	Z
0.437	11.10	10249	1.44	36.5	.329	8.4	31	5.4	.41	10	13	57	.49	12.3	0.054	1.4	9.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.437	11.10	A-55	1.44	36.5	.297	7.5	73	13	.35	9.0	26	115	.81	20.4	0.070	1.8	11.5	SPR	CG	N
0.437	11.10	J-24	1.50	38.1	.399	10.1	.44	.08	1.3	34	.60	2.7	.15	3.9	0.019	0.5	7.00	SST	C	N
0.437	11.10	1753	1.50	38.1	.397	10.1	.71	.12	1.4	34	.95	4.2	.15	3.8	0.020	0.5	6.50	MW	C	Z
0.437	11.10	12223	1.50	38.1	.365	9.3	5.8	1.0	.72	18	4.1	18	.31	7.8	0.036	0.9	8.50	SPR	CG	GI
0.437	11.10	S-749	1.50	38.1	.353	9.0	8.1	1.4	.76	19	6.1	27	.45	11.5	0.042	1.1	9.75	SST	C	N
0.437	11.10	S-1295	1.50	38.1	.349	8.9	10	1.8	.69	17	7.0	31	.42	10.6	0.044	1.1	9.50	SST	CG	N
0.437	11.10	A11-36	1.50	38.1	.347	8.8	13	2.3	.62	16	8.0	36	.43	10.9	0.045	1.1	9.50	SPR	CG	N
0.437	11.10	CC-10	1.50	38.1	.337	8.6	21	3.6	.49	13	10	45	.48	12.1	0.050	1.3	9.50	SPR	CG	N
0.437	11.10	S-753	1.50	38.1	.327	8.3	21	3.8	.59	15	13	56	.63	16.1	0.055	1.4	11.5	SST	CG	N
0.437	11.10	B11-54	1.50	38.1	.325	8.3	27	4.7	.53	13	14	63	.70	17.8	0.056	1.4	11.5	SPR	C	Z
0.437	11.10	10262	1.50	38.1	.293	7.4	88	15	.32	8.0	28	124	.79	20.1	0.072	1.8	11.0	SPR	CG	Z
0.437	11.10	3273	1.50	38.1	.253	6.4	262	46	.21	5.2	54	239	1.06	26.9	0.092	2.3	11.5	SPR	CG	Z
0.437	11.10	12423	1.56	39.7	.401	10.2	.46	.08	1.4	36	.65	2.9	.14	3.4	0.018	0.5	6.50	MW	C	GI
0.437	11.10	10129	1.56	39.7	.355	9.0	8.7	1.5	.70	18	6.1	27	.43	10.9	0.041	1.0	9.50	SPR	C	Z
0.437	11.10	10895	1.56	39.7	.345	8.8	11	1.9	.80	20	8.5	38	.60	15.2	0.046	1.2	12.0	SPR	C	Z
0.437	11.10	10232	1.63	41.3	.397	10.1	.63	.11	1.5	37	.93	4.1	.16	4.1	0.020	0.5	7.00	MW	C	Z
0.437	11.10	10126	1.63	41.3	.393	10.0	.94	.16	1.4	37	1.4	6.1	.18	4.5	0.022	0.6	7.00	MW	C	Z
0.437	11.10	S-1379	1.63	41.3	.393	10.0	.63	.11	1.4	36	.89	3.9	.21	5.3	0.022	0.6	8.50	SST	C	N
0.437	11.10	00-77	1.63	41.3	.337	8.6	12	2.1	.85	22	10	45	.75	19.1	0.050	1.3	15.0	SPR	CG	N
0.437	11.10	10752	1.66	42.1	.293	7.4	83	15	.34	8.6	28	124	.83	21.0	0.072	1.8	11.5	SPR	CG	GI
0.437	11.10	12428	1.69	42.8	.387	9.8	.94	.17	1.4	36	1.3	5.9	.29	7.3	0.025	0.6	10.5	MW	C	N
0.437	11.10	3123	1.69	42.8	.385	9.8	1.1	.19	1.4	35	1.5	6.8	.30	7.6	0.026	0.7	10.5	MW	C	GI
0.437	11.10	S-1274	1.69	42.8	.375	9.5	2.4	.43	1.1	27	2.6	12	.31	7.9	0.031	0.8	9.00	SST	C	N
0.437	11.10	B11-27	1.69	42.8	.337	8.6	39	6.8	.26	6.7	10	45	.30	7.6	0.050	1.3	6.00	SPR	CG	N
0.437	11.10	TT-56	1.69	42.8	.287	7.3	86	15	.36	9.2	31	140	.98	24.8	0.075	1.9	13.0	SPR	CG	Z
0.437	11.10	10767	1.75	44.5	.361	9.2	3.4	.59	1.1	29	3.8	17	.61	15.4	0.038	1.0	16.0	SPR	CG	N
0.437	11.10	4154	1.75	44.5	.287	7.3	79	14	.40	10	31	140	1.13	28.6	0.075	1.9	14.0	SPR	C	Z
0.437	11.10	10374	1.78	45.2	.267	6.8	146	26	.31	7.8	45	199	1.17	29.7	0.085	2.2	13.8	SPR	CG	Z
0.437	11.10	10389	1.81	46.0	.389	9.9	.82	.14	1.5	39	1.3	5.6	.27	6.9	0.024	0.6	10.3	MW	C	N
0.437	11.10	112	1.88	47.6	.369	9.4	3.1	.54	1.2	30	3.7	16	.43	10.8	0.034	0.9	11.5	HD	C	Z
0.437	11.10	4163	1.88	47.6	.357	9.1	6.5	1.1	.87	22	5.7	25	.48	12.2	0.040	1.0	11.0	SPR	C	Z
0.437	11.10	KK-78	1.88	47.6	.217	5.5	860	151	.10	2.5	85	378	.99	25.1	0.110	2.8	9.00	SPR	CG	Z
0.437	11.10	Q-49	1.94	49.2	.327	8.3	13	2.3	.85	22	11	50	1.09	27.6	0.055	1.4	19.8	SPR	CG	GI
0.437	11.10	3652	2.00	50.8	.375	9.5	1.4	.25	1.5	37	2.1	9.2	.53	13.4	0.031	0.8	16.0	HD	C	Z
0.437	11.10	S-854	2.00	50.8	.343	8.7	6.6	1.2	1.1	29	7.4	33	.87	22.1	0.047	1.2	17.5	SST	C	N
0.437	11.10	16	2.00	50.8	.329	8.4	16	2.8	.79	20	13	57	.89	22.6	0.054	1.4	15.5	HD	C	Z
0.437	11.10	S-1154	2.00	50.8	.329	8.4	14	2.5	.83	21	12	53	.86	21.9	0.054	1.4	15.0	SST	C	N
0.437	11.10	3553	2.00	50.8	.323	8.2	15	2.7	.86	22	13	58	1.14	29.0	0.057	1.4	20.0	MW	CG	Z
0.437	11.10	502	2.00	50.8	.293	7.4	52	9.0	.54	14	28	124	1.31	33.4	0.072	1.8	17.3	HD	C	Z
0.437	11.10	527	2.13	54.0	.375	9.5	2.3	.42	1.4	35	2.8	12	.41	10.5	0.032	0.8	11.8	HD	C	Z
0.437	11.10	2527	2.13	54.0	.353	9.0	6.0	1.1	1.1	27	6.5	29	.63	16.0	0.042	1.1	14.0	SPR	C	Z
0.437	11.10	4248	2.25	57.2	.389	9.9	.48	.08	1.8	47	.88	3.9	.41	10.4	0.024	0.6	16.0	MW	C	Z
0.437	11.10	13	2.25	57.2	.355	9.0	4.9	.86	1.2	31	6.1	27	.67	16.9	0.041	1.0	15.3	HD	C	Z
0.437	11.10	S-840	2.44	61.9	.297	7.5	33	5.8	.73	19	24	107	1.42	36.0	0.070	1.8	20.3	SST	CG	N
0.437	11.10	2816	2.47	62.7	.295	7.5	40	7.1	.93	24	37	167	1.44	36.5	0.071	1.8	20.3	MW	CG	Z
0.437	11.10	11334	2.50	63.5	.341	8.7	8.9	1.6	1.1	27	9.7	43	.84	21.3	0.048	1.2	16.5	HD	C	Z
0.437	11.10	11889	2.50	63.5	.313	8.0	26	4.6	.73	19	19	85	1.09	27.6	0.062	1.6	17.5	SPR	CG	Z
0.437	11.10	3728	2.50	63.5	.277	7.0	66	12	.57	15	38	168	1.72	43.7	0.080	2.0	21.5	SPR	CG	Z
0.437	11.10	12452	2.59	65.9	.341	8.7	7.2	1.3	1.3	34	9.7	43	.96	24.4	0.048	1.2	20.0	SPR	CG	N
0.437	11.10	10403	2.75	69.9	.375	9.5	1.3	.22	2.2	55	2.8	12	.57	14.6	0.031	0.8	17.5	MW	C	Z
0.437	11.10	11968	2.78	70.6	.325	8.3	13	2.4	1.1	27	14	63	1.23	31.3	0.056	1.4	21.0	SPR	C	Z
0.437	11.10	2552	2.88	73.0	.285	7.2	46	8.1	.70	18	33	145	1.82	46.3	0.076	1.9	24.0	SPR	CG	Z
0.437	11.10	4150	3.00	76.2	.343	8.7	9.0	1.6	1.0	26	9.1	40	.75	19.1	0.047	1.2	15.0	HD	C	Z
0.437	11.10	4152	3.13	79.4	.313	8.0	22	3.9	.86	22	19	85	1.30	33.1	0.062	1.6	20.0	HD	C	Z
0.437	11.10	3217	3.22	81.8	.293	7.4	32	5.5	.89	23	28	124	1.94	49.4	0.072	1.8	27.0	SPR	CG	Z
0.437	11.10	10180	3.38	85.7	.321	8.2	10	1.7	1.5	39	15	67	1.86	47.1	0.058	1.5	32.0	SPR	CG	Z
0.437	11.10	2965	3.44	87.3	.357	9.1	2.3	.41	2.3	59	5.4	24	1.12	28.4	0.040	1.0	27.0	MW	C	Z
0.437	11.10	3690	3.44	87.3	.323	8.2	8.6	1.5	1.5	38	13	57	1.94	49.2	0.057	1.4	34.0	SPR	CG	Z
0.437	11.10	1928	3.75	95.3	.297	7.5	35	6.1	.74	19	26	115	1.54	39.1	0.070	1.8	22.0	SPR	CG	Z
0.437	11.10	10089	3.75	95.3	.287	7.3	38	6.7	.83	21	31	140	2.03	51.4	0.075	1.9	27.0	SPR	CG	Z
0.437	11.10	12476	4.25	108.0	.289	7.3	28	4.9	1.1	27	30	134	2.59	65.8	0.074	1.9	34.0	SPR	C	Z
0.437	11.10	12085	5.00	127.0	.357	9.1	1.8	.32	3.1	78	5.7	25	1.36	34.5	0.040	1.0	34.0	SPR	CG	Z
0.437	11.10	10098	5.00	127.0	.343	8.7	3.4	.59	2.7	69	9.1	40	1.79	45.4	0.047	1.2	37.0	SPR	C	Z
0.437	11.10	11490	5.16	131.0	.341	8.7	3.7	.64	2.6	67	9.7	43	1.84	46.6	0.048	1.2	37.3	SPR	C	Z
0.437	11.10	S-1685	6.25	158.8	.309	7.8	12	2.1	1.6	41	20	88	2.32	58.9	0.064	1.6	35.3	SST	C	N
0.437	11.10	1641	8.63	219.1	.343	8.7	2.4	.42	5.3	134	13	56	2.42	61.5	0.047	1.2	51.5	MW	CG	GI
0.443	11.25	12795	1.44	36.5	.347	8.8	10	1.8	.72	18	7.4	33	.72	18.3	0.048	1.2	14.0	MW	C	Z
0.447	11.35	A16-65	.88	22.2	.329	8.4	92	16	.24	6.2	22	100	.37	9.4	0.059	1.5	5.25	MW	C	N
0.453	11.51	K-44	.31	7.9	.355	9.0	84	15	.12	3.0	9.9	44	.17	4.4	0.049	1.2	3.50	SPR	CG	Z
0.453	11.51	B-24	.34	8.7	.271	6.9	1843	323	.03	.65	47	209	.27	6.9	0.091	2.3	3.00	SST	CG	N
0.453	11.51	S-1538	.36	9.1	.341	8.7	52	9.2	.04	.94	1.9	8.6	.32	8.2	0.056	1.4	5.75	SST	CG	N
0.453	11.51	10036	.38	9.5	.371	9.4	29	5.1	.17	4.3	4.9	22	.21	5.2	0.041	1.0	4.00	SPR	C	Z
0.453	11.51	3768	.38	9.5	.339	8.6	163	29	.09	2.3	14	64	.26	6.5	0.057	1.4	3.50	SPR	C	Z
0.453	11.51	EE-15	.44	11.1	.383	9.7	10	1.8	.28	7.1	2.9	13	.16	4.0	0.035	0.9	4.50	SST	CG	N
0.453	11.51	S-272	.44	11.1	.379	9.6	22	3.8	.19	4.8	4.1	18	.13	3.3	0.037	0.9	3.50	SST	CG	N
0.453	11.51	EE-67	.44	11.1	.333	8.5	136	24	.12	2.9	16	70	.24	6.1	0.060	1.5	4.00	SST	CG	N
0.453	11.51	00-78	.44	11.1	.325	8.3	178	31	.11	2.7	19	85	.26	6.5	0.064	1.6	4.00	SST	CG	N
0.453	11.51	B2-30	.45	11.5	.377	9.6	24	4.2	.27	6.9	6.5	29	.18	4.6	0.038	1.0	3.75	MW	C	N
0.453	11.51	B15-8	.47	11.9	.329	8.4	118	21	.16	4.0	18	82	.31	7.9	0.062	1.6	5.00	SPR	CG	N
0.453	11.51	A14-38	.50	12.7	.343	8.7	74	13	.17	4.2	12	54	.25	6.4	0.055	1.4	4.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.453	11.51	B1-6	.50	12.7	.341	8.7	90	16	.15	3.9	14	61	.25	6.4	0.056	1.4	4.50	SPR	CG	GI
0.453	11.51	RR-16	.50	12.7	.341	8.7	70	12	.20	5.0	14	61	.29	7.5	0.056	1.4	5.25	SPR	CG	N
0.453	11.51	K-80	.53	13.5	.383	9.7	12	2.1	.31	7.9	3.7	16	.16	4.0	0.035	0.9	4.50	SPR	CG	N
0.453	11.51	JJ-2	.53	13.5	.373	9.5	17	3.0	.31	8.0	5.5	24	.20	5.1	0.040	1.0	5.00	SPR	CG	N
0.453	11.51	12517	.56	14.3	.389	9.9	8.1	1.4	.39	9.8	3.1	14	.18	4.5	0.032	0.8	4.50	MW	C	Z
0.453	11.51	B1-31	.56	14.3	.363	9.2	35	6.1	.22	5.7	7.7	34	.20	5.1	0.045	1.1	4.50	SPR	CG	N
0.453	11.51	U-60	.56	14.3	.345	8.8	59	10	.21	5.3	12	55	.28	7.2	0.054	1.4	5.25	SPR	CG	N
0.453	11.51	1767	.56	14.3	.337	8.6	88	15	.24	6.1	21	94	.29	7.4	0.058	1.5	5.00	MW	CG	Z
0.453	11.51	S-1098	.56	14.3	.325	8.3	102	18	.19	4.8	19	85	.35	8.9	0.064	1.6	5.50	SST	CG	N
0.453	11.51	S-1472	.59	15.1	.379	9.6	13	2.3	.31	7.9	4.1	18	.20	5.2	0.037	0.9	4.50	SST	C	N
0.453	11.51	PP-93	.63	15.9	.397	10.1	2.6	.45	.42	11	1.1	4.7	.21	5.3	0.028	0.7	6.50	MW	C	N
0.453	11.51	N-105	.63	15.9	.391	9.9	5.1	.90	.47	12	2.4	11	.16	3.9	0.031	0.8	5.00	SST	CG	N
0.453	11.51	B10-67	.63	15.9	.381	9.7	17	2.9	.24	6.1	4.0	18	.14	3.7	0.036	0.9	4.00	SPR	CG	Z
0.453	11.51	K-40	.63	15.9	.377	9.6	15	2.6	.30	7.7	4.4	20	.17	4.3	0.038	1.0	4.50	SST	CG	N
0.453	11.51	B7-17	.63	15.9	.373	9.5	19	3.3	.29	7.3	5.5	24	.19	4.8	0.040	1.0	4.75	SPR	CG	Z
0.453	11.51	A14-42	.63	15.9	.367	9.3	18	3.1	.37	9.3	6.5	29	.26	6.6	0.043	1.1	6.00	SPR	CG	GI
0.453	11.51	A11-61	.66	16.7	.321	8.2	118	21	.19	4.8	22	99	.40	10.1	0.066	1.7	6.00	SPR	CG	Z
0.453	11.51	YY-66	.69	17.4	.417	10.6	.32	.06	.54	14	.17	.77	.14	3.7	0.018	0.5	7.00	SST	C	N
0.453	11.51	A14-30	.69	17.4	.377	9.6	12	2.2	.35	9.0	4.4	20	.19	4.8	0.038	1.0	5.00	SST	CG	N
0.453	11.51	B12-19	.72	18.2	.389	9.9	5.8	1.0	.51	13	2.9	13	.21	5.3	0.032	0.8	5.50	SPR	C	N
0.453	11.51	B14-49	.72	18.2	.369	9.4	21	3.8	.29	7.5	6.3	28	.21	5.3	0.042	1.1	5.00	SPR	CG	Z
0.453	11.51	S-3174	.75	19.1	.409	10.4	.46	.08	.51	13	.23	1.0	.24	6.1	0.022	0.6	10.0	SST	C	N
0.453	11.51	B14-54	.75	19.1	.381	9.7	8.4	1.5	.44	11	3.7	17	.20	5.0	0.036	0.9	5.50	SST	CG	N
0.453	11.51	A14-32	.75	19.1	.375	9.5	16	2.7	.32	8.2	5.1	23	.20	5.0	0.039	1.0	5.00	SPR	CG	N
0.453	11.51	10072	.75	19.1	.371	9.4	15	2.5	.40	10	5.9	26	.29	7.3	0.041	1.0	6.00	SPR	C	Z
0.453	11.51	A13-55	.75	19.1	.363	9.2	22	3.9	.33	8.4	7.2	32	.25	6.3	0.045	1.1	5.50	SST	CG	N
0.453	11.51	10227	.75	19.1	.351	8.9	30	5.2	.35	8.9	10	46	.36	9.1	0.051	1.3	7.00	SPR	CG	Z
0.453	11.51	3441	.75	19.1	.345	8.8	35	6.1	.29	7.4	10	45	.46	11.7	0.054	1.4	7.50	SPR	C	Z
0.453	11.51	10055	.75	19.1	.341	8.7	56	9.9	.24	6.2	14	61	.39	10.0	0.056	1.4	6.00	SPR	C	GI
0.453	11.51	FF-64	.75	19.1	.333	8.5	77	13	.22	5.6	17	75	.36	9.1	0.060	1.5	6.00	SPR	CG	N
0.453	11.51	1952	.78	19.8	.401	10.2	2.8	.49	.63	16	1.8	7.8	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.453	11.51	M-144	.78	19.8	.389	9.9	3.3	.57	.51	13	1.7	7.4	.27	6.9	0.032	0.8	7.50	SST	C	N
0.453	11.51	B1-40	.78	19.8	.367	9.3	22	3.8	.31	7.8	6.8	30	.23	5.7	0.043	1.1	5.25	SPR	CG	N
0.453	11.51	S-1434	.81	20.6	.371	9.4	14	2.5	.38	9.7	5.5	24	.23	5.7	0.041	1.0	5.50	SST	CG	N
0.453	11.51	3907	.81	20.6	.345	8.8	32	5.6	.33	8.3	10	47	.49	12.3	0.054	1.4	8.00	SPR	C	Z
0.453	11.51	H-91	.88	22.2	.423	10.7	.06	.01	.64	16	.04	.16	.24	6.1	0.015	0.4	15.0	SST	C	N
0.453	11.51	12424	.88	22.2	.407	10.3	1.7	.30	.74	19	1.2	5.5	.14	3.5	0.023	0.6	5.00	MW	C	GI
0.453	11.51	S-1191	.88	22.2	.393	10.0	2.2	.39	.61	15	1.3	6.0	.27	6.9	0.030	0.8	8.00	SST	C	N
0.453	11.51	PP-24	.88	22.2	.393	10.0	1.3	.22	.46	12	.58	2.6	.42	10.7	0.030	0.8	14.0	MW	CG	N
0.453	11.51	LL-97	.88	22.2	.377	9.6	10	1.8	.42	11	4.4	20	.25	6.3	0.038	1.0	5.50	SST	C	N
0.453	11.51	10143	.88	22.2	.369	9.4	16	2.8	.39	10	6.3	28	.25	6.4	0.042	1.1	6.00	SPR	CG	Z
0.453	11.51	K-36	.88	22.2	.367	9.3	14	2.5	.47	12	6.8	30	.30	7.6	0.043	1.1	7.00	SPR	CG	Z
0.453	11.51	A11-34	.88	22.2	.363	9.2	20	3.6	.38	9.6	7.7	34	.28	7.1	0.045	1.1	6.25	SPR	CG	GI
0.453	11.51	A13-42	.88	22.2	.361	9.2	21	3.6	.38	9.6	7.7	34	.28	7.2	0.046	1.2	6.00	SST	CG	N
0.453	11.51	CC-35	.88	22.2	.353	9.0	27	4.8	.36	9.1	9.8	44	.40	10.2	0.050	1.3	7.00	SPR	C	Z
0.453	11.51	DD-22	.88	22.2	.353	9.0	24	4.3	.38	9.7	9.3	41	.35	8.9	0.050	1.3	7.00	SST	CG	N
0.453	11.51	QQ-70	.88	22.2	.351	8.9	25	4.4	.42	11	10	46	.41	10.4	0.051	1.3	8.00	SPR	CG	Z
0.453	11.51	A14-45	.88	22.2	.343	8.7	39	6.8	.31	8.0	12	54	.37	9.4	0.055	1.4	6.75	SST	CG	N
0.453	11.51	10746	.88	22.2	.329	8.4	53	9.2	.33	8.4	17	77	.50	12.6	0.062	1.6	8.00	SST	CG	N
0.453	11.51	1761	.91	23.0	.407	10.3	1.7	.30	.77	20	1.3	5.8	.14	3.5	0.023	0.6	5.00	MW	C	Z
0.453	11.51	12417	.94	23.8	.407	10.3	1.7	.30	.80	20	1.3	6.0	.14	3.5	0.023	0.6	5.00	MW	C	N
0.453	11.51	12435	.94	23.8	.405	10.3	2.0	.35	.79	20	1.6	7.1	.14	3.7	0.024	0.6	5.00	MW	C	N
0.453	11.51	A13-27	.94	23.8	.377	9.6	11	1.9	.43	11	4.7	21	.22	5.7	0.038	1.0	6.00	SPR	CG	N
0.453	11.51	10194	1.00	25.4	.419	10.6	.41	.07	.89	23	.37	1.6	.11	2.8	0.017	0.4	5.50	MW	N	N
0.453	11.51	LL-54	1.00	25.4	.409	10.4	.56	.10	.77	20	.43	1.9	.23	5.9	0.022	0.6	9.50	MW	C	Z
0.453	11.51	S-93	1.00	25.4	.403	10.2	2.1	.36	.64	16	1.3	5.9	.13	3.2	0.025	0.6	5.00	SST	CG	N
0.453	11.51	2830	1.00	25.4	.395	10.0	2.7	.47	.77	20	2.0	9.1	.23	5.9	0.029	0.7	7.00	MW	C	Z
0.453	11.51	N-142	1.00	25.4	.393	10.0	2.2	.39	.73	19	1.6	7.2	.27	6.9	0.030	0.8	8.00	SST	C	N
0.453	11.51	10215	1.00	25.4	.391	9.9	3.9	.69	.80	20	3.1	14	.20	5.1	0.031	0.8	6.50	MW	CG	GI
0.453	11.51	A14-58	1.00	25.4	.375	9.5	10	1.8	.46	12	4.8	21	.23	5.9	0.039	1.0	6.00	SST	CG	N
0.453	11.51	3765	1.00	25.4	.373	9.5	6.5	1.1	.60	15	3.9	17	.40	10.2	0.040	1.0	10.0	SPR	CG	Z
0.453	11.51	10085	1.00	25.4	.371	9.4	14	2.4	.43	11	5.9	26	.26	6.5	0.041	1.0	6.25	SPR	CG	GI
0.453	11.51	B1-60	1.00	25.4	.361	9.2	17	3.0	.46	12	7.7	34	.32	8.2	0.046	1.2	7.00	SST	CG	N
0.453	11.51	TT-60	1.00	25.4	.319	8.1	72	13	.32	8.2	23	103	.60	15.3	0.067	1.7	9.00	SPR	CG	GI
0.453	11.51	OO-16	1.00	25.4	.293	7.4	168	29	.20	5.2	34	153	.64	16.3	0.080	2.0	8.00	SST	CG	N
0.453	11.51	A11-46	1.03	26.2	.369	9.4	12	2.1	.48	12	5.9	26	.28	7.1	0.042	1.1	6.75	SST	CG	N
0.453	11.51	A15-51	1.03	26.2	.343	8.7	36	6.4	.36	9.1	13	58	.43	10.8	0.055	1.4	7.75	SPR	CG	GI
0.453	11.51	H-50	1.06	27.0	.407	10.3	.66	.12	.82	21	.54	2.4	.24	6.2	0.023	0.6	9.50	MW	C	Z
0.453	11.51	B12-35	1.06	27.0	.359	9.1	12	2.0	.55	14	6.3	28	.52	13.1	0.047	1.2	11.0	SPR	CG	N
0.453	11.51	S-206	1.09	27.8	.389	9.9	2.7	.47	.79	20	2.1	9.5	.30	7.7	0.032	0.8	8.50	SST	C	N
0.453	11.51	S-1419	1.13	28.6	.411	10.4	.60	.11	.96	24	.58	2.6	.17	4.3	0.021	0.5	7.00	SST	C	N
0.453	11.51	A15-24	1.13	28.6	.373	9.5	11	1.9	.50	13	5.5	24	.27	6.9	0.040	1.0	6.75	SPR	CG	GI
0.453	11.51	11720	1.13	28.6	.369	9.4	13	2.3	.49	12	6.3	28	.29	7.5	0.042	1.1	7.00	SPR	CG	Z
0.453	11.51	A11-30	1.13	28.6	.361	9.2	18	3.1	.46	12	8.3	37	.34	8.6	0.046	1.2	7.25	SPR	CG	GI
0.453	11.51	H-34	1.13	28.6	.341	8.7	35	6.1	.39	10	14	61	.48	12.1	0.056	1.4	8.50	SPR	CG	GI
0.453	11.51	Z-39	1.19	30.2	.361	9.2	21	3.7	.37	9.3	7.7	34	.28	7.0	0.046	1.2	6.00	SST	CG	N
0.453	11.51	10346	1.19	30.2	.345	8.8	15	2.6	.32	8.2	4.8	21	.86	21.9	0.054	1.4	15.0	SPR	C	Z
0.453	11.51	J-22	1.19	30.2	.345	8.8	19	3.4	.54	14	10	46	.65	16.5	0.054	1.4	12.0	SPR	CG	N
0.453	11.51	B17-138	1.22	31.0	.367	9.3	11	2.0	.55	14	6.3	28	.32	8.2	0.043	1.1	7.50	SST	CG	N
0.453	11.51	B8-54	1.22	31.0	.329	8.4	53	9.2	.33	8.4	17	77	.56	14.2	0.062	1.6	8.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.453	11.51	A14-60	1.25	31.8	.369	9.4	9.5	1.7	.62	16	5.9	26	.34	8.5	0.042	1.1	8.00	SST	CG	N
0.453	11.51	S-1278	1.25	31.8	.363	9.2	13	2.2	.58	15	7.2	32	.41	10.3	0.045	1.1	8.00	SST	C	N
0.453	11.51	A11-41	1.25	31.8	.359	9.1	17	3.1	.50	13	8.8	39	.38	9.6	0.047	1.2	8.00	SPR	CG	GI
0.453	11.51	CC-93	1.25	31.8	.353	9.0	16	2.8	.57	14	9.3	41	.48	12.1	0.050	1.3	9.50	SST	CG	N
0.453	11.51	BB-81	1.25	31.8	.351	8.9	16	2.8	.60	15	9.8	44	.51	13.0	0.051	1.3	10.0	SST	CG	N
0.453	11.51	OO-80	1.25	31.8	.333	8.5	38	6.7	.44	11	17	75	.60	15.2	0.060	1.5	10.0	SPR	CG	N
0.453	11.51	A14-27	1.25	31.8	.309	7.8	69	12	.37	9.4	25	113	.79	20.1	0.072	1.8	11.0	SST	CG	N
0.453	11.51	12414	1.28	32.5	.399	10.1	1.3	.24	1.0	26	1.4	6.1	.26	6.5	0.027	0.7	8.50	SST	C	N
0.453	11.51	12434	1.28	32.5	.395	10.0	2.1	.36	1.0	26	2.1	9.2	.28	7.0	0.029	0.7	8.50	MW	C	N
0.453	11.51	S-1601	1.28	32.5	.365	9.3	12	2.0	.58	15	6.8	30	.40	10.1	0.044	1.1	8.00	SST	CG	N
0.453	11.51	WW-42	1.28	32.5	.273	6.9	263	46	.19	4.7	49	219	.86	21.7	0.090	2.3	9.50	SPR	CG	Z
0.453	11.51	12651	1.31	33.3	.407	10.3	.88	.15	1.1	29	.99	4.4	.18	4.7	0.023	0.6	7.00	SST	C	N
0.453	11.51	A11-70	1.31	33.3	.293	7.4	123	21	.30	7.6	37	163	.90	22.9	0.080	2.0	11.3	SPR	CG	Z
0.453	11.51	2849	1.34	34.1	.405	10.3	.81	.14	1.1	28	.88	3.9	.25	6.4	0.024	0.6	9.50	MW	C	Z
0.453	11.51	S-245	1.38	34.9	.361	9.2	13	2.3	.58	15	7.7	34	.38	9.6	0.046	1.2	8.25	SST	CG	N
0.453	11.51	3640	1.38	34.9	.345	8.8	26	4.5	.48	12	12	55	.51	13.0	0.054	1.4	9.50	SPR	CG	Z
0.453	11.51	S-453	1.38	34.9	.343	8.7	23	4.1	.52	13	12	54	.54	13.6	0.055	1.4	9.75	SST	CG	N
0.453	11.51	S-480	1.41	35.7	.363	9.2	6.9	1.2	.82	21	5.6	25	.59	14.9	0.045	1.1	13.0	SST	CG	N
0.453	11.51	S-386	1.44	36.5	.369	9.4	6.8	1.2	.87	22	5.9	26	.43	10.9	0.042	1.1	10.3	SST	CG	N
0.453	11.51	B1-58	1.47	37.3	.375	9.5	7.2	1.3	.70	18	5.1	23	.33	8.4	0.039	1.0	8.50	SPR	CG	N
0.453	11.51	10406	1.50	38.1	.419	10.6	.13	.02	1.3	32	.16	.71	.23	5.7	0.017	0.4	12.3	SST	C	N
0.453	11.51	3610	1.50	38.1	.405	10.3	1.1	.19	1.3	33	1.4	6.3	.20	5.2	0.024	0.6	7.50	MW	C	Z
0.453	11.51	10116	1.50	38.1	.403	10.2	1.4	.25	1.3	33	1.9	8.3	.20	5.1	0.025	0.6	7.00	MW	C	BO
0.453	11.51	S-264	1.50	38.1	.395	10.0	1.8	.31	1.2	29	2.1	9.1	.28	7.0	0.029	0.7	8.50	SST	C	N
0.453	11.51	B14-12	1.50	38.1	.379	9.6	5.1	.89	.80	20	4.1	18	.31	8.0	0.037	0.9	8.50	SST	CG	N
0.453	11.51	10879	1.50	38.1	.377	9.6	5.7	1.0	.77	20	4.4	20	.32	8.2	0.038	1.0	8.50	SST	CG	N
0.453	11.51	LL-14	1.50	38.1	.373	9.5	7.5	1.3	.73	19	5.5	24	.36	9.1	0.040	1.0	9.00	SPR	CG	GI
0.453	11.51	10018	1.50	38.1	.363	9.2	12	2.0	.67	17	7.7	34	.47	12.0	0.045	1.1	9.50	SPR	C	Z
0.453	11.51	K-11	1.50	38.1	.363	9.2	12	2.1	.65	16	7.7	34	.42	10.6	0.045	1.1	9.25	SPR	CG	N
0.453	11.51	11346	1.50	38.1	.363	9.2	11	1.9	.68	17	7.2	32	.42	10.6	0.045	1.1	9.25	SST	CG	N
0.453	11.51	Z-64	1.50	38.1	.349	8.9	18	3.2	.61	15	11	49	.62	15.8	0.052	1.3	11.0	SPR	C	GI
0.453	11.51	B14-39	1.50	38.1	.347	8.8	18	3.2	.59	15	11	49	.56	14.1	0.053	1.3	10.5	SST	CG	N
0.453	11.51	10144	1.50	38.1	.343	8.7	24	4.2	.55	14	13	58	.59	15.0	0.055	1.4	10.8	SPR	CG	Z
0.453	11.51	S-875	1.50	38.1	.343	8.7	22	3.8	.56	14	12	54	.57	14.4	0.055	1.4	10.3	SST	CG	N
0.453	11.51	B1-37	1.53	38.9	.367	9.3	10	1.8	.68	17	6.8	30	.44	11.1	0.043	1.1	9.00	SPR	C	N
0.453	11.51	S-1349	1.56	39.7	.407	10.3	.52	.09	1.3	34	.68	3.0	.24	6.1	0.023	0.6	10.5	SST	CG	N
0.453	11.51	K-51	1.63	41.3	.345	8.8	20	3.5	.61	15	12	55	.62	15.8	0.054	1.4	11.5	SPR	CG	N
0.453	11.51	3775	1.69	42.8	.329	8.4	42	7.3	.44	11	18	82	.71	18.1	0.062	1.6	10.5	HD	C	Z
0.453	11.51	12241	1.69	42.8	.329	8.4	39	6.9	.47	12	18	82	.74	18.9	0.062	1.6	11.0	SPR	C	Z
0.453	11.51	S-97	1.69	42.8	.293	7.4	126	22	.27	6.9	34	153	.88	22.4	0.080	2.0	10.0	SST	C	N
0.453	11.51	B-61	1.75	44.5	.329	8.4	32	5.7	.57	15	18	82	.87	22.0	0.062	1.6	13.0	HD	C	Z
0.453	11.51	S-67	1.78	45.2	.369	9.4	8.2	1.4	.72	18	5.9	26	.42	10.7	0.042	1.1	9.00	SST	C	N
0.453	11.51	S-1486	1.81	46.0	.363	9.2	6.3	1.1	1.2	29	7.2	32	.63	16.0	0.045	1.1	14.0	SST	CG	N
0.453	11.51	10922	1.81	46.0	.309	7.8	50	8.7	.54	14	27	120	1.15	29.3	0.072	1.8	16.0	SPR	CG	Z
0.453	11.51	S-811	1.88	47.6	.385	9.8	2.2	.38	1.5	37	3.1	14	.43	10.8	0.034	0.9	12.5	SST	CG	N
0.453	11.51	11887	1.88	47.6	.355	9.0	12	2.1	.83	21	9.9	44	.66	16.8	0.049	1.2	12.5	SPR	C	N
0.453	11.51	B17-169	1.88	47.6	.329	8.4	25	4.4	.73	18	18	82	.99	25.2	0.062	1.6	16.0	SPR	CG	Z
0.453	11.51	B-25	1.94	49.2	.379	9.6	3.7	.66	1.2	29	4.3	19	.44	11.3	0.037	0.9	12.0	HD	CG	N
0.453	11.51	HH-75	1.94	49.2	.373	9.5	3.9	.68	1.3	33	5.1	23	.62	15.7	0.040	1.0	15.5	SPR	CG	GI
0.453	11.51	11743	2.00	50.8	.345	8.8	13	2.2	.96	24	12	55	.86	21.9	0.054	1.4	15.0	SPR	O	Z
0.453	11.51	10330	2.13	54.0	.345	8.8	14	2.5	.88	22	12	55	.91	23.0	0.054	1.4	15.8	SPR	C	Z
0.453	11.51	3798	2.25	57.2	.269	6.8	219	38	.24	6.1	52	232	1.10	28.0	0.092	2.3	12.0	SPR	CG	Z
0.453	11.51	Z-28	2.34	59.5	.375	9.5	3.6	.63	1.4	36	5.1	23	.59	14.9	0.039	1.0	15.0	SPR	CG	Z
0.453	11.51	11538	2.47	62.7	.353	9.0	11	1.9	.90	23	9.8	44	.78	19.7	0.050	1.3	14.5	SPR	CG	Z
0.453	11.51	12377	2.50	63.5	.357	9.1	7.9	1.4	1.2	30	9.4	42	.84	21.3	0.048	1.2	16.5	SPR	C	Z
0.453	11.51	V-58	2.50	63.5	.355	9.0	11	2.0	.89	23	9.9	44	.65	16.5	0.049	1.2	13.3	SPR	CG	Z
0.453	11.51	4107	2.50	63.5	.353	9.0	9.8	1.7	1.0	26	9.8	44	.85	21.6	0.050	1.3	16.0	SPR	C	Z
0.453	11.51	2878	2.50	63.5	.289	7.3	85	15	.46	12	39	175	1.39	35.4	0.082	2.1	17.0	SPR	CG	Z
0.453	11.51	3684	2.53	64.3	.265	6.7	125	22	.44	11	56	247	2.01	50.9	0.094	2.4	21.0	SPR	CG	GI
0.453	11.51	W-40	2.63	66.7	.359	9.1	5.1	.89	1.6	41	8.2	37	.94	23.9	0.047	1.2	20.0	SST	CG	N
0.453	11.51	11990	2.72	69.0	.373	9.5	3.1	.54	1.8	45	5.5	24	.76	19.3	0.040	1.0	19.0	SPR	CG	GI
0.453	11.51	11817	2.75	69.9	.363	9.2	4.6	.80	1.7	43	7.7	34	.95	24.0	0.045	1.1	21.0	SPR	CG	Z
0.453	11.51	S-414	2.75	69.9	.359	9.1	4.8	.84	1.7	44	8.2	37	.99	25.1	0.047	1.2	21.0	SST	CG	N
0.453	11.51	1731	3.00	76.2	.293	7.4	63	11	.81	21	51	228	1.60	40.6	0.080	2.0	20.0	MW	CG	Z
0.453	11.51	11676	3.50	88.9	.335	8.5	17	2.9	.95	24	16	71	1.18	30.0	0.059	1.5	19.0	SPR	C	Z
0.453	11.51	4172	5.00	127.0	.285	7.2	38	6.7	1.1	28	42	187	3.36	85.3	0.084	2.1	39.0	SPR	C	Z
0.455	11.56	71445	.50	12.7	.377	9.6	23	4.0	.31	7.8	7.0	31	.16	4.0	0.039	1.0	4.00	MW	CG	N
0.455	11.56	71445S	.50	12.7	.377	9.6	19	3.4	.24	6.2	4.7	21	.16	4.0	0.039	1.0	4.00	SST	CG	N
0.455	11.56	71455	.50	12.7	.363	9.2	41	7.2	.28	7.0	11	51	.20	5.0	0.046	1.2	4.25	MW	CG	N
0.455	11.56	71455S	.50	12.7	.363	9.2	35	6.1	.22	5.6	7.7	34	.20	5.0	0.046	1.2	4.25	SST	CG	N
0.455	11.56	71446	.63	16.0	.377	9.6	18	3.1	.39	10	7.0	31	.18	4.6	0.039	1.0	4.63	MW	CG	N
0.455	11.56	71446S	.63	16.0	.377	9.6	15	2.6	.31	7.9	4.7	21	.18	4.6	0.039	1.0	4.63	SST	CG	N
0.455	11.56	71456	.63	16.0	.363	9.2	32	5.6	.36	9.1	11	51	.23	5.8	0.046	1.2	5.00	MW	CG	N
0.455	11.56	71456S	.63	16.0	.363	9.2	27	4.7	.28	7.2	7.7	34	.23	5.8	0.046	1.2	5.00	SST	CG	N
0.455	11.56	71447	.75	19.1	.377	9.6	14	2.5	.49	12	7.0	31	.20	5.2	0.039	1.0	5.25	MW	CG	N
0.455	11.56	71447S	.75	19.1	.377	9.6	12	2.1	.39	9.9	4.7	21	.20	5.2	0.039	1.0	5.25	SST	CG	N
0.455	11.56	71457	.75	19.1	.363	9.2	26	4.5	.44	11	11	51	.26	6.6	0.046	1.2	5.63	MW	CG	N
0.455	11.56	71457S	.75	19.1	.363	9.2	22	3.8	.35	9.0	7.7	34	.26	6.6	0.046	1.2	5.63	SST	CG	N
0.455	11.56	71448	.88	22.4	.377	9.6	12	2.1	.58	15	7.0	31	.22	5.7	0.039	1.0	5.75	MW	CG	N
0.455	11.56	71448S	.88	22.4	.377	9.6	10	1.8	.46	12	4.7	21	.22	5.7	0.039	1.0	5.75	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.455	11.56	71458	.88	22.4	.363	9.2	21	3.8	.53	13	11	51	.29	7.4	0.046	1.2	6.38	MW	CG	N
0.455	11.56	71458S	.88	22.4	.363	9.2	18	3.2	.42	11	7.7	34	.29	7.4	0.046	1.2	6.38	SST	CG	N
0.455	11.56	71449	1.00	25.4	.377	9.6	11	1.8	.66	17	7.0	31	.25	6.3	0.039	1.0	6.38	MW	CG	N
0.455	11.56	71449S	1.00	25.4	.377	9.6	9.0	1.6	.53	13	4.7	21	.25	6.3	0.039	1.0	6.38	SST	CG	N
0.455	11.56	71459	1.00	25.4	.363	9.2	19	3.3	.61	16	11	51	.32	8.2	0.046	1.2	7.00	MW	CG	N
0.455	11.56	71459S	1.00	25.4	.363	9.2	16	2.8	.49	12	7.7	34	.32	8.2	0.046	1.2	7.00	SST	CG	N
0.455	11.56	71450	1.25	31.8	.377	9.6	8.2	1.4	.85	22	7.0	31	.30	7.6	0.039	1.0	7.63	MW	CG	N
0.455	11.56	71450S	1.25	31.8	.377	9.6	7.0	1.2	.68	17	4.7	21	.30	7.6	0.039	1.0	7.63	SST	CG	N
0.455	11.56	71460	1.25	31.8	.363	9.2	15	2.5	.78	20	11	51	.39	9.9	0.046	1.2	8.50	MW	CG	N
0.455	11.56	71460S	1.25	31.8	.363	9.2	12	2.2	.62	16	7.7	34	.39	9.9	0.046	1.2	8.50	SST	CG	N
0.455	11.56	71451	1.50	38.1	.377	9.6	6.8	1.2	1.0	26	7.0	31	.35	8.8	0.039	1.0	8.88	MW	CG	N
0.455	11.56	71451S	1.50	38.1	.377	9.6	5.7	1.0	.82	21	4.7	21	.35	8.8	0.039	1.0	8.88	SST	CG	N
0.455	11.56	71461	1.50	38.1	.363	9.2	12	2.1	.95	24	11	51	.45	11.5	0.046	1.2	9.88	MW	CG	N
0.455	11.56	71461S	1.50	38.1	.363	9.2	10	1.8	.76	19	7.7	34	.45	11.5	0.046	1.2	9.88	SST	CG	N
0.455	11.56	71452	1.75	44.5	.377	9.6	5.8	1.0	1.2	31	7.0	31	.39	9.9	0.039	1.0	10.0	MW	CG	N
0.455	11.56	71452S	1.75	44.5	.377	9.6	4.9	.86	.97	25	4.7	21	.39	9.9	0.039	1.0	10.0	SST	CG	N
0.455	11.56	71462	1.75	44.5	.363	9.2	10	1.8	1.1	28	11	51	.52	13.1	0.046	1.2	11.3	MW	CG	N
0.455	11.56	71462S	1.75	44.5	.363	9.2	8.7	1.5	.89	22	7.7	34	.52	13.1	0.046	1.2	11.3	SST	CG	N
0.455	11.56	71454	2.00	50.8	.377	9.6	5.5	.96	1.3	32	7.0	31	.40	10.3	0.039	1.0	10.4	MW	CG	N
0.455	11.56	71454S	2.00	50.8	.377	9.6	4.7	.82	1.0	26	4.7	21	.40	10.3	0.039	1.0	10.4	SST	CG	N
0.455	11.56	71464	2.00	50.8	.363	9.2	9.5	1.7	1.2	30	11	51	.55	13.9	0.046	1.2	11.9	MW	CG	N
0.455	11.56	71464S	2.00	50.8	.363	9.2	8.1	1.4	.95	24	7.7	34	.55	13.9	0.046	1.2	11.9	SST	CG	N
0.468	11.89	S-864	.25	6.4	.378	9.6	69	12	.10	2.6	7.0	31	.14	3.4	0.045	1.1	3.00	SST	CG	N
0.468	11.89	DD-28	.31	7.9	.288	7.3	1549	271	.03	.73	44	197	.27	6.9	0.090	2.3	3.00	SST	CG	N
0.468	11.89	A10-53	.34	8.7	.436	11.1	.45	.08	.26	6.7	.12	.53	.08	2.0	0.016	0.4	4.00	SST	C	N
0.468	11.89	PP-57	.44	11.1	.388	9.9	17	2.9	.26	6.6	4.3	19	.18	4.6	0.040	1.0	4.50	SST	CG	N
0.468	11.89	I-99	.44	11.1	.356	9.0	202	35	.07	1.7	13	59	.17	4.3	0.056	1.4	3.00	SPR	CG	Z
0.468	11.89	S-1409	.50	12.7	.410	10.4	6.0	1.0	.33	8.5	2.0	8.9	.11	2.8	0.029	0.7	3.75	SST	CG	N
0.468	11.89	G-42	.50	12.7	.348	8.8	159	28	.10	2.4	15	68	.21	5.3	0.060	1.5	3.50	SST	CG	N
0.468	11.89	MM-87	.50	12.7	.344	8.7	106	19	.17	4.3	18	80	.31	7.9	0.062	1.6	5.00	HD	CG	N
0.468	11.89	00-51	.53	13.5	.408	10.4	2.5	.43	.32	8.2	.79	3.5	.21	5.3	0.030	0.8	7.00	SST	CG	N
0.468	11.89	S-35	.53	13.5	.392	10.0	13	2.3	.32	8.1	4.3	19	.21	5.3	0.038	1.0	4.50	SST	C	N
0.468	11.89	3638	.53	13.5	.344	8.7	127	22	.20	5.0	25	111	.28	7.1	0.062	1.6	4.50	MW	CG	Z
0.468	11.89	3800	.56	14.3	.384	9.8	39	6.8	.16	4.0	6.1	27	.19	4.8	0.042	1.1	3.50	SPR	C	Z
0.468	11.89	B17-148	.59	15.1	.400	10.2	12	2.1	.29	7.4	3.4	15	.14	3.5	0.034	0.9	4.00	SPR	CG	Z
0.468	11.89	S-812	.59	15.1	.398	10.1	5.9	1.0	.35	8.8	2.1	9.1	.25	6.2	0.035	0.9	6.00	SST	C	N
0.468	11.89	S-3130	.63	15.9	.422	10.7	1.3	.23	.49	12	.64	2.9	.14	3.5	0.023	0.6	5.00	SST	C	N
0.468	11.89	S-3006	.63	15.9	.420	10.7	1.6	.28	.48	12	.76	3.4	.14	3.7	0.024	0.6	5.00	SST	C	N
0.468	11.89	A15-37	.63	15.9	.414	10.5	4.5	.79	.36	9.1	1.6	7.2	.13	3.3	0.027	0.7	3.75	SST	C	N
0.468	11.89	I-7	.63	15.9	.398	10.1	9.2	1.6	.36	9.2	3.3	15	.19	4.9	0.035	0.9	4.50	SST	C	N
0.468	11.89	A10-40	.69	17.4	.410	10.4	3.3	.57	.51	13	1.7	7.4	.18	4.6	0.029	0.7	5.25	SST	C	N
0.468	11.89	3877	.69	17.4	.400	10.2	7.8	1.4	.44	11	3.4	15	.20	5.2	0.034	0.9	5.00	SPR	C	Z
0.468	11.89	L-41	.69	17.4	.382	9.7	21	3.7	.31	7.8	6.6	29	.22	5.5	0.043	1.1	5.00	SPR	CG	Z
0.468	11.89	I-91	.72	18.2	.392	10.0	6.1	1.1	.43	11	2.6	12	.29	7.2	0.038	1.0	7.50	SST	CG	N
0.468	11.89	S-451	.72	18.2	.358	9.1	47	8.3	.25	6.4	12	53	.30	7.7	0.055	1.4	5.50	SST	CG	N
0.468	11.89	S-1091	.72	18.2	.340	8.6	71	12	.26	6.7	19	82	.42	10.6	0.064	1.6	6.50	SST	CG	N
0.468	11.89	K-32	.75	19.1	.408	10.4	4.0	.69	.56	14	2.2	9.8	.20	5.0	0.030	0.8	5.50	MW	C	Z
0.468	11.89	B14-70	.75	19.1	.390	9.9	12	2.1	.41	10	4.9	22	.21	5.4	0.039	1.0	5.50	SPR	CG	Z
0.468	11.89	CC-55	.75	19.1	.384	9.8	13	2.2	.46	12	5.7	25	.25	6.4	0.042	1.1	6.00	SST	CG	N
0.468	11.89	3203	.78	19.8	.416	10.6	2.8	.48	.63	16	1.7	7.8	.15	3.8	0.026	0.7	4.75	MW	C	Z
0.468	11.89	MM-100	.78	19.8	.348	8.8	57	10	.27	6.8	15	68	.38	9.5	0.060	1.5	6.25	SST	CG	N
0.468	11.89	10800	.81	20.6	.422	10.7	.68	.12	.61	15	.41	1.8	.21	5.3	0.023	0.6	8.00	SST	C	N
0.468	11.89	A11-65	.81	20.6	.420	10.7	.94	.17	.62	16	.58	2.6	.20	5.0	0.024	0.6	7.00	SST	C	N
0.468	11.89	CC-86	.81	20.6	.416	10.6	1.8	.31	.64	16	1.1	5.0	.18	4.5	0.026	0.7	5.75	SST	C	N
0.468	11.89	S-50	.81	20.6	.408	10.4	3.0	.53	.63	16	1.9	8.5	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.468	11.89	O-47	.81	20.6	.384	9.8	7.2	1.3	.39	10	2.8	13	.42	10.7	0.042	1.1	10.0	SPR	CG	BO
0.468	11.89	A15-33	.81	20.6	.374	9.5	21	3.7	.38	9.7	8.0	36	.28	7.2	0.047	1.2	6.00	SST	CG	N
0.468	11.89	1613	.83	21.0	.416	10.6	2.5	.44	.67	17	1.7	7.6	.16	4.0	0.026	0.7	5.00	MW	C	Z
0.468	11.89	S-473	.83	21.0	.406	10.3	3.1	.54	.60	15	1.8	8.1	.23	5.9	0.031	0.8	6.50	SST	C	N
0.468	11.89	3643	.83	21.0	.384	9.8	12	2.1	.50	13	6.1	27	.28	7.2	0.042	1.1	6.75	HD	CG	GI
0.468	11.89	A14-15	.84	21.4	.396	10.1	4.6	.81	.53	13	2.4	11	.32	8.0	0.036	0.9	7.75	SST	C	N
0.468	11.89	3257	.88	22.2	.412	10.5	3.0	.52	.69	18	2.1	9.1	.18	4.6	0.028	0.7	5.50	MW	C	Z
0.468	11.89	A-75	.88	22.2	.356	9.0	29	5.1	.43	11	13	56	.45	11.4	0.056	1.4	8.00	SST	CG	N
0.468	11.89	K-84	.88	22.2	.348	8.8	68	12	.22	5.7	15	68	.39	9.9	0.060	1.5	5.50	SST	C	N
0.468	11.89	B14-8	.88	22.2	.310	7.9	200	35	.17	4.4	34	153	.53	13.5	0.079	2.0	6.75	SPR	CG	Z
0.468	11.89	11201	.91	23.0	.408	10.4	2.7	.48	.68	17	1.9	8.3	.23	5.7	0.030	0.8	6.50	SST	C	N
0.468	11.89	12105	.91	23.0	.360	9.1	29	5.0	.42	11	12	53	.43	11.0	0.054	1.4	8.00	SPR	CG	N
0.468	11.89	I-54	.94	23.8	.406	10.3	3.2	.56	.72	18	2.3	10	.22	5.5	0.031	0.8	7.00	MW	CG	Z
0.468	11.89	J-60-A	.94	23.8	.404	10.3	4.5	.80	.71	18	3.2	14	.22	5.7	0.032	0.8	6.00	MW	C	BO
0.468	11.89	10738	.94	23.8	.366	9.3	22	3.9	.45	12	10	45	.41	10.4	0.051	1.3	8.00	SPR	CG	N
0.468	11.89	UU-45	.94	23.8	.344	8.7	46	8.1	.37	9.3	17	75	.50	12.6	0.062	1.6	8.00	SST	CG	N
0.468	11.89	12324	.94	23.8	.342	8.7	57	9.9	.33	8.4	19	84	.50	12.8	0.063	1.6	8.00	SPR	CG	Z
0.468	11.89	PP-100	.94	23.8	.308	7.8	168	29	.21	5.4	36	158	.64	16.3	0.080	2.0	8.00	HD	CG	Z
0.468	11.89	10258	.97	24.6	.324	8.2	104	18	.25	6.4	26	117	.58	14.6	0.072	1.8	8.00	SPR	CG	Z
0.468	11.89	3515	.97	24.6	.276	7.0	474	83	.12	3.1	57	255	.67	17.1	0.096	2.4	7.00	SPR	CG	Z
0.468	11.89	1511	1.00	25.4	.410	10.4	2.2	.38	.75	19	1.6	7.3	.25	6.3	0.029	0.7	7.50	MW	C	Z
0.468	11.89	2598	1.00	25.4	.408	10.4	2.5	.44	.75	19	1.9	8.3	.26	6.5	0.030	0.8	7.50	MW	C	Z
0.468	11.89	2934	1.00	25.4	.408	10.4	3.2	.55	.78	20	2.5	11	.22	5.6	0.030	0.8	6.25	MW	C	Z
0.468	11.89	PP-60	1.00	25.4	.408	10.4	2.8	.50	.76	19	2.2	9.7	.24	6.0	0.030	0.8	7.00	MW	C	N
0.468	11.89	S-3144	1.00	25.4	.394	10.0	7.8	1.4	.50	13	3.9	18	.21	5.4	0.037	0.9	5.75	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.468	11.89	S-1344	1.00	25.4	.386	9.8	10	1.8	.53	13	5.3	24	.31	7.8	0.041	1.0	6.50	SST	C	N
0.468	11.89	3504	1.00	25.4	.358	9.1	34	5.9	.37	9.5	13	56	.41	10.5	0.055	1.4	7.50	SPR	CG	Z
0.468	11.89	S-3079	1.00	25.4	.344	8.7	46	8.1	.37	9.3	17	75	.56	14.2	0.062	1.6	8.00	SST	C	N
0.468	11.89	3708	1.00	25.4	.338	8.6	71	12	.29	7.3	21	92	.49	12.4	0.065	1.7	7.50	SPR	CG	Z
0.468	11.89	PP-20	1.00	25.4	.328	8.3	100	17	.24	6.2	24	108	.53	13.3	0.070	1.8	7.50	SPR	CG	Z
0.468	11.89	10780	1.03	26.2	.398	10.1	2.6	.46	.65	16	1.7	7.5	.39	9.8	0.035	0.9	11.0	SST	CG	N
0.468	11.89	NN-51	1.03	26.2	.368	9.3	18	3.1	.54	14	9.6	42	.45	11.4	0.050	1.3	9.00	SPR	CG	Z
0.468	11.89	A11-12	1.06	27.0	.408	10.4	2.5	.43	.85	22	2.1	9.3	.21	5.3	0.030	0.8	7.00	SST	CG	N
0.468	11.89	EE-92	1.06	27.0	.374	9.5	21	3.7	.41	10	8.5	38	.31	7.8	0.047	1.2	6.50	SPR	CG	Z
0.468	11.89	10641	1.06	27.0	.344	8.7	71	12	.25	6.5	18	80	.40	10.2	0.062	1.6	6.50	SPR	CG	N
0.468	11.89	3962	1.06	27.0	.258	6.6	552	97	.12	3.1	68	304	.81	20.7	0.105	2.7	7.75	SST	CG	N
0.468	11.89	A10-29	1.09	27.8	.398	10.1	3.1	.55	.76	19	2.4	11	.33	8.4	0.035	0.9	9.50	SST	CG	N
0.468	11.89	2981	1.09	27.8	.324	8.2	89	16	.30	7.5	26	117	.65	16.5	0.072	1.8	9.00	SPR	CG	Z
0.468	11.89	10421	1.11	28.2	.296	7.5	217	38	.20	5.1	44	195	.73	18.6	0.086	2.2	8.50	SPR	CG	Z
0.468	11.89	Z-44	1.13	28.6	.398	10.1	6.6	1.2	.54	14	3.6	16	.25	6.2	0.035	0.9	6.00	SPR	C	Z
0.468	11.89	S-488	1.13	28.6	.394	10.0	5.9	1.0	.67	17	3.9	18	.30	7.5	0.037	0.9	7.00	SST	C	N
0.468	11.89	HH-88	1.13	28.6	.378	9.6	9.7	1.7	.63	16	6.1	27	.50	12.6	0.045	1.1	10.0	SPR	C	Z
0.468	11.89	AA-78	1.13	28.6	.368	9.3	15	2.7	.58	15	8.8	39	.55	14.0	0.050	1.3	10.0	SPR	C	Z
0.468	11.89	3591	1.13	28.6	.348	8.8	46	8.0	.49	13	23	101	.48	12.2	0.060	1.5	8.00	MW	CG	Z
0.468	11.89	S-1341	1.13	28.6	.324	8.2	77	14	.32	8.1	25	110	.65	16.5	0.072	1.8	9.00	SST	CG	N
0.468	11.89	B3-33	1.16	29.4	.408	10.4	2.3	.40	.89	23	2.0	9.1	.27	6.9	0.030	0.8	8.00	MW	C	N
0.468	11.89	11770	1.16	29.4	.404	10.3	2.3	.40	.84	21	1.9	8.5	.32	8.1	0.032	0.8	10.0	SPR	CG	Z
0.468	11.89	Y-56	1.16	29.4	.338	8.6	52	9.2	.37	9.4	19	86	.55	14.0	0.065	1.7	8.50	SST	CG	N
0.468	11.89	11376	1.19	30.2	.374	9.5	19	3.2	.43	11	8.0	36	.31	7.8	0.047	1.2	6.50	SST	CG	N
0.468	11.89	QQ-65	1.19	30.2	.352	8.9	30	5.2	.50	13	15	66	.58	14.7	0.058	1.5	10.0	SPR	CG	Z
0.468	11.89	2720	1.19	30.2	.282	7.2	340	60	.22	5.5	73	326	.74	18.9	0.093	2.4	8.00	MW	CG	Z
0.468	11.89	10470	1.19	30.2	.264	6.7	508	89	.13	3.4	68	302	.84	21.4	0.102	2.6	8.25	SPR	CG	Z
0.468	11.89	A-25	1.22	31.0	.368	9.3	14	2.5	.66	17	9.6	42	.53	13.3	0.050	1.3	10.5	SPR	CG	N
0.468	11.89	N-56	1.22	31.0	.362	9.2	21	3.7	.54	14	11	50	.50	12.8	0.053	1.3	9.50	SPR	CG	Z
0.468	11.89	M-111	1.22	31.0	.360	9.1	23	4.0	.52	13	12	53	.51	13.0	0.054	1.4	9.50	SPR	CG	Z
0.468	11.89	Z-50	1.25	31.8	.436	11.1	.06	.01	.92	23	.05	.24	.33	8.3	0.016	0.4	19.5	MW	C	Z
0.468	11.89	10097	1.25	31.8	.398	10.1	6.6	1.2	.54	14	3.6	16	.25	6.2	0.035	0.9	6.00	SPR	C	Z
0.468	11.89	L-42	1.25	31.8	.386	9.8	5.0	.87	.74	19	3.7	16	.51	13.0	0.041	1.0	12.5	MW	CG	Z
0.468	11.89	F-55	1.25	31.8	.378	9.6	9.7	1.7	.77	20	7.5	33	.45	11.4	0.045	1.1	10.0	SPR	CG	GI
0.468	11.89	TT-54	1.25	31.8	.378	9.6	8.2	1.4	.69	17	5.6	25	.56	14.3	0.045	1.1	11.5	SPR	C	Z
0.468	11.89	KK-77	1.25	31.8	.378	9.6	11	1.9	.65	16	7.0	31	.37	9.4	0.045	1.1	8.25	SST	CG	N
0.468	11.89	RR-67	1.25	31.8	.370	9.4	11	1.9	.71	18	7.7	34	.54	13.7	0.049	1.2	11.0	SST	CG	N
0.468	11.89	S-1697	1.25	31.8	.368	9.3	15	2.7	.59	15	9.0	40	.45	11.4	0.050	1.3	9.00	SST	CG	N
0.468	11.89	3086	1.25	31.8	.344	8.7	45	7.9	.40	10	18	80	.56	14.2	0.062	1.6	9.00	SPR	CG	Z
0.468	11.89	10555	1.25	31.8	.292	7.4	180	31	.26	6.6	47	208	.95	24.0	0.088	2.2	10.8	SPR	CG	Z
0.468	11.89	S-1167	1.28	32.5	.394	10.0	6.9	1.2	.57	15	3.9	18	.27	6.8	0.037	0.9	6.25	SST	C	N
0.468	11.89	10696	1.31	33.3	.386	9.8	6.7	1.2	.85	22	5.7	25	.40	10.2	0.041	1.0	9.75	SPR	CG	Z
0.468	11.89	A13-65	1.31	33.3	.372	9.4	10	1.7	.72	18	7.2	32	.59	15.0	0.048	1.2	12.3	SPR	CG	N
0.468	11.89	B8-57	1.31	33.3	.288	7.3	249	44	.19	4.9	48	213	.81	20.6	0.090	2.3	9.00	SPR	CG	Z
0.468	11.89	12470	1.31	33.3	.284	7.2	323	57	.16	4.0	51	226	.74	18.7	0.092	2.3	8.00	SPR	CG	Z
0.468	11.89	3966	1.38	34.9	.414	10.5	1.3	.23	1.1	29	1.5	6.7	.24	6.0	0.027	0.7	8.75	MW	CG	Z
0.468	11.89	10855	1.38	34.9	.408	10.4	1.9	.33	1.1	28	2.1	9.2	.29	7.2	0.030	0.8	8.50	SST	C	N
0.468	11.89	S-1447	1.38	34.9	.392	10.0	5.7	1.0	.75	19	4.3	19	.29	7.5	0.038	1.0	7.75	SST	CG	N
0.468	11.89	CC-48	1.38	34.9	.384	9.8	6.3	1.1	.91	23	5.7	25	.46	11.7	0.042	1.1	10.0	SST	C	N
0.468	11.89	S-181	1.38	34.9	.380	9.7	9.8	1.7	.67	17	6.6	29	.36	9.2	0.044	1.1	8.25	SST	CG	N
0.468	11.89	S-214	1.38	34.9	.378	9.6	7.5	1.3	.84	21	6.3	28	.54	13.7	0.045	1.1	11.0	SST	C	N
0.468	11.89	S-3063	1.38	34.9	.324	8.2	60	11	.41	10	25	110	.79	20.1	0.072	1.8	11.0	SST	CG	N
0.468	11.89	FF-77	1.38	34.9	.288	7.3	217	38	.20	5.2	44	197	.81	20.6	0.090	2.3	9.00	SST	CG	N
0.468	11.89	12426	1.41	35.7	.412	10.5	1.2	.21	1.1	28	1.4	6.1	.29	7.5	0.028	0.7	9.50	SST	C	N
0.468	11.89	DD-82	1.41	35.7	.328	8.3	54	9.4	.42	11	23	101	.77	19.6	0.070	1.8	11.0	SST	CG	N
0.468	11.89	3737	1.44	36.5	.400	10.2	3.9	.69	.88	22	3.4	15	.31	7.8	0.034	0.9	8.00	SPR	C	Z
0.468	11.89	HH-92	1.44	36.5	.376	9.6	8.3	1.4	.91	23	7.5	33	.51	12.9	0.046	1.2	11.0	SST	CG	N
0.468	11.89	12494	1.44	36.5	.372	9.4	8.2	1.4	.69	18	5.7	25	.74	18.9	0.048	1.2	14.5	SPR	C	N
0.468	11.89	YY-64	1.44	36.5	.348	8.8	34	6.0	.48	12	16	72	.60	15.2	0.060	1.5	10.0	SPR	CG	GI
0.468	11.89	S-785	1.47	37.3	.410	10.4	1.6	.28	1.2	30	1.9	8.3	.28	7.1	0.029	0.7	8.50	SST	C	N
0.468	11.89	OO-93	1.50	38.1	.418	10.6	.80	.14	1.3	32	1.0	4.5	.25	6.4	0.025	0.6	9.00	SST	C	N
0.468	11.89	10887	1.50	38.1	.408	10.4	1.7	.30	1.2	30	2.0	9.0	.31	7.8	0.030	0.8	9.25	SST	C	N
0.468	11.89	S-38	1.50	38.1	.398	10.1	3.3	.58	1.0	26	3.3	15	.35	8.9	0.035	0.9	9.00	SST	C	N
0.468	11.89	B12-69	1.53	38.9	.348	8.8	27	4.8	.59	15	16	72	.72	18.3	0.060	1.5	12.0	SPR	CG	N
0.468	11.89	3769	1.56	39.7	.228	5.8	786	138	.13	3.3	102	456	1.32	33.5	0.120	3.0	11.0	SPR	CG	GI
0.468	11.89	N-41	1.59	40.5	.324	8.2	54	9.5	.46	12	25	110	.86	21.9	0.072	1.8	12.0	SST	CG	N
0.468	11.89	10156	1.59	40.5	.268	6.8	240	42	.19	4.9	46	206	1.40	35.6	0.100	2.5	14.0	SPR	CG	Z
0.468	11.89	11726	1.63	41.3	.384	9.8	6.4	1.1	.95	24	6.1	27	.46	11.7	0.042	1.1	11.0	SPR	CG	GI
0.468	11.89	B2-44	1.67	42.5	.370	9.4	11	2.0	.86	22	9.6	43	.59	14.9	0.049	1.2	12.0	SPR	CG	N
0.468	11.89	10951	1.69	42.8	.388	9.9	8.2	1.4	.65	16	5.3	24	.35	8.9	0.040	1.0	7.75	SPR	C	Z
0.468	11.89	12484	1.75	44.5	.388	9.9	4.5	.78	1.2	30	5.3	24	.54	13.7	0.040	1.0	12.5	SPR	C	Z
0.468	11.89	3978	1.75	44.5	.338	8.6	30	5.3	.68	17	21	92	1.04	26.4	0.065	1.7	15.0	SPR	C	Z
0.468	11.89	S-994	1.75	44.5	.334	8.5	31	5.4	.68	17	21	94	1.05	26.6	0.067	1.7	14.8	SST	C	N
0.468	11.89	1893	1.75	44.5	.318	8.1	68	12	.61	15	41	184	.98	24.8	0.075	1.9	13.0	MW	CG	GI
0.468	11.89	3554	1.75	44.5	.248	6.3	417	73	.27	6.9	113	503	1.43	36.3	0.110	2.8	13.0	MW	CG	Z
0.468	11.89	S-65	1.78	45.2	.322	8.2	59	10	.44	11	26	114	.95	24.1	0.073	1.9	12.0	SST	C	N
0.468	11.89	A13-38	1.80	45.6	.358	9.1	22	3.9	.54	14	12	53	.52	13.3	0.055	1.4	9.50	SST	CG	N
0.468	11.89	S-918	1.81	46.0	.398	10.1	3.3	.58	1.0	26	3.3	15	.35	8.9	0.035	0.9	9.00	SST	C	N
0.468	11.89	RR-37	1.81	46.0	.324	8.2	57	9.9	.65	17	37	163	.94	23.8	0.072	1.8	13.0	MW	CG	Z
0.468	11.89	3714	1.94	49.2	.388	9.9	4.7	.82	1.1	29	5.3	24	.48	12.2	0.040	1.0	12.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.468	11.89	A15-61	1.94	49.2	.376	9.6	8.7	1.5	.86	22	7.5	33	.49	12.6	0.046	1.2	10.8	SST	CG	N
0.468	11.89	RR-62	2.00	50.8	.418	10.6	.51	.09	1.7	42	.84	3.7	.35	8.9	0.025	0.6	13.0	SST	C	N
0.468	11.89	S-1404	2.00	50.8	.378	9.6	5.1	.90	1.3	32	6.5	29	.73	18.6	0.045	1.1	15.3	SST	C	N
0.468	11.89	3573	2.00	50.8	.372	9.4	9.4	1.6	1.3	34	13	56	.62	15.8	0.048	1.2	13.0	MW	CG	Z
0.468	11.89	KK-34	2.00	50.8	.348	8.8	20	3.6	.76	19	15	68	.84	21.3	0.060	1.5	14.0	SST	CG	N
0.468	11.89	2852	2.00	50.8	.340	8.6	37	6.4	.75	19	27	121	.77	19.5	0.064	1.6	12.0	MW	CG	Z
0.468	11.89	10923	2.06	52.4	.334	8.5	45	7.9	.50	13	22	100	.87	22.1	0.067	1.7	12.0	SPR	C	Z
0.468	11.89	4300	2.13	54.0	.360	9.1	13	2.2	.94	24	12	53	.89	22.6	0.054	1.4	15.5	SPR	C	Z
0.468	11.89	S-1104	2.13	54.0	.268	6.8	201	35	.30	7.5	60	265	1.45	36.8	0.100	2.5	14.5	SST	CG	N
0.468	11.89	3225	2.34	59.5	.308	7.8	64	11	.55	14	36	158	1.41	35.9	0.080	2.0	17.8	SPR	CG	Z
0.468	11.89	A13-32	2.41	61.1	.304	7.7	68	12	.56	14	38	170	1.52	38.5	0.082	2.1	18.5	SPR	CG	N
0.468	11.89	10062	2.50	63.5	.388	9.9	3.2	.57	1.6	42	5.3	24	.66	16.8	0.040	1.0	16.5	SPR	CG	Z
0.468	11.89	12	2.50	63.5	.360	9.1	11	1.9	1.1	29	12	53	1.04	26.4	0.054	1.4	18.3	HD	C	Z
0.468	11.89	3693	2.50	63.5	.342	8.7	24	4.3	.77	20	19	84	1.07	27.2	0.063	1.6	16.0	SPR	C	Z
0.468	11.89	S-1536	2.56	65.1	.360	9.1	7.5	1.3	1.4	35	10	46	1.19	30.2	0.054	1.4	22.0	SST	CG	N
0.468	11.89	NN-91	2.63	66.7	.396	10.1	2.0	.35	1.8	46	3.6	16	.58	14.6	0.036	0.9	15.0	SST	C	N
0.468	11.89	S-1153	2.63	66.7	.388	9.9	2.4	.42	1.8	46	4.4	19	.80	20.3	0.040	1.0	19.0	SST	C	N
0.468	11.89	3014	2.88	73.0	.318	8.1	37	6.6	.79	20	30	132	1.65	41.9	0.075	1.9	22.0	SPR	CG	Z
0.468	11.89	S-496	3.06	77.8	.374	9.5	3.8	.67	2.0	50	7.4	33	1.10	28.1	0.047	1.2	23.5	SST	CG	N
0.468	11.89	2818	3.06	77.8	.338	8.6	25	4.3	.84	21	21	92	1.24	31.4	0.065	1.7	18.0	SPR	C	Z
0.468	11.89	4210	3.50	88.9	.366	9.3	8.3	1.4	1.2	31	10	45	.98	24.9	0.051	1.3	18.3	SPR	C	Z
0.468	11.89	11522	3.50	88.9	.344	8.7	17	2.9	1.1	27	18	80	1.36	34.6	0.062	1.6	21.0	SPR	CG	GI
0.468	11.89	11893	3.50	88.9	.326	8.3	30	5.2	.80	20	24	105	1.38	35.2	0.071	1.8	19.5	SST	CG	N
0.468	11.89	S-242	3.50	88.9	.308	7.8	33	5.8	1.0	26	33	148	2.28	57.9	0.080	2.0	28.5	SST	CG	N
0.468	11.89	3032	4.00	101.6	.258	6.6	126	22	.58	15	74	328	3.26	82.7	0.105	2.7	31.0	SPR	CG	Z
0.468	11.89	11822	4.94	125.4	.360	9.1	4.9	.86	2.4	62	12	53	2.05	52.1	0.054	1.4	37.0	SPR	C	Z
0.468	11.89	1571	8.00	203.2	.348	8.8	6.2	1.1	2.6	67	16	72	2.85	72.4	0.060	1.5	46.5	SPR	C	Z
0.468	11.89	12243	10.3	260.4	.360	9.1	2.3	.40	5.2	132	12	53	4.16	105.6	0.054	1.4	77.0	SPR	CG	Z
0.480	12.19	71465	.50	12.7	.410	10.4	16	2.7	.31	7.8	4.8	21	.12	3.1	0.035	0.9	3.50	MW	CG	N
0.480	12.19	71465S	.50	12.7	.410	10.4	13	2.3	.24	6.2	3.3	15	.12	3.1	0.035	0.9	3.50	SST	CG	N
0.480	12.19	71476	.50	12.7	.404	10.3	20	3.5	.31	7.8	6.2	27	.14	3.6	0.038	1.0	3.75	MW	CG	N
0.480	12.19	71476S	.50	12.7	.404	10.3	17	3.0	.24	6.2	4.2	19	.14	3.6	0.038	1.0	3.75	SST	CG	N
0.480	12.19	71490	.50	12.7	.396	10.1	28	4.9	.30	7.5	8.3	37	.16	4.1	0.042	1.1	3.88	MW	CG	N
0.480	12.19	71490S	.50	12.7	.396	10.1	24	4.2	.24	6.0	5.6	25	.16	4.1	0.042	1.1	3.88	SST	CG	N
0.480	12.19	71504	.50	12.7	.390	9.9	35	6.1	.29	7.4	10	45	.18	4.6	0.045	1.1	4.00	MW	CG	N
0.480	12.19	71504S	.50	12.7	.390	9.9	30	5.2	.23	5.9	6.9	31	.18	4.6	0.045	1.1	4.00	SST	CG	N
0.480	12.19	71518	.50	12.7	.378	9.6	59	10	.23	5.9	14	61	.21	5.3	0.051	1.3	4.13	MW	CG	N
0.480	12.19	71518S	.50	12.7	.378	9.6	50	8.8	.18	4.7	9.3	41	.21	5.3	0.051	1.3	4.13	SST	CG	N
0.480	12.19	71532	.50	12.7	.370	9.4	72	13	.24	6.0	17	76	.24	6.1	0.055	1.4	4.38	MW	CG	N
0.480	12.19	71532S	.50	12.7	.370	9.4	61	11	.19	4.8	12	52	.24	6.1	0.055	1.4	4.38	SST	CG	N
0.480	12.19	71546	.50	12.7	.362	9.2	103	18	.21	5.2	21	94	.25	6.4	0.059	1.5	4.25	MW	CG	N
0.480	12.19	71546S	.50	12.7	.362	9.2	87	15	.16	4.2	14	63	.25	6.4	0.059	1.5	4.25	SST	CG	N
0.480	12.19	71560	.50	12.7	.354	9.0	123	21	.21	5.3	25	113	.28	7.2	0.063	1.6	4.50	MW	CG	N
0.480	12.19	71560S	.50	12.7	.354	9.0	104	18	.17	4.2	17	77	.28	7.2	0.063	1.6	4.50	SST	CG	N
0.480	12.19	71575	.50	12.7	.346	8.8	180	31	.17	4.3	30	136	.28	7.2	0.067	1.7	4.25	MW	CG	N
0.480	12.19	71575S	.50	12.7	.346	8.8	153	27	.14	3.4	21	92	.28	7.2	0.067	1.7	4.25	SST	CG	N
0.480	12.19	71588	.50	12.7	.336	8.5	256	45	.14	3.6	36	160	.31	7.8	0.072	1.8	4.25	MW	CG	N
0.480	12.19	71588S	.50	12.7	.336	8.5	217	38	.11	2.8	24	107	.31	7.8	0.072	1.8	4.25	SST	CG	N
0.480	12.19	71603	.50	12.7	.332	8.4	289	51	.13	3.4	39	173	.31	8.0	0.074	1.9	4.25	MW	CG	N
0.480	12.19	71603S	.50	12.7	.332	8.4	246	43	.11	2.7	26	116	.31	8.0	0.074	1.9	4.25	SST	CG	N
0.480	12.19	71618	.50	12.7	.318	8.1	447	78	.11	2.9	50	224	.33	8.5	0.081	2.1	4.13	MW	CG	N
0.480	12.19	71618S	.50	12.7	.318	8.1	380	66	.09	2.3	34	150	.33	8.5	0.081	2.1	4.13	SST	CG	N
0.480	12.19	71466	.63	16.0	.410	10.4	12	2.1	.40	10	4.8	21	.14	3.6	0.035	0.9	4.00	MW	CG	N
0.480	12.19	71466S	.63	16.0	.410	10.4	10	1.8	.31	8.0	3.3	15	.14	3.6	0.035	0.9	4.00	SST	CG	N
0.480	12.19	71477	.63	16.0	.404	10.3	15	2.6	.41	10	6.2	27	.17	4.2	0.038	1.0	4.38	MW	CG	N
0.480	12.19	71477S	.63	16.0	.404	10.3	13	2.2	.33	8.3	4.2	19	.17	4.2	0.038	1.0	4.38	SST	CG	N
0.480	12.19	71491	.63	16.0	.396	10.1	22	3.8	.38	9.8	8.3	37	.19	4.8	0.042	1.1	4.50	MW	CG	N
0.480	12.19	71491S	.63	16.0	.396	10.1	18	3.2	.31	7.8	5.6	25	.19	4.8	0.042	1.1	4.50	SST	CG	N
0.480	12.19	71505	.63	16.0	.390	9.9	28	4.9	.36	9.2	10	45	.20	5.1	0.045	1.1	4.50	MW	CG	N
0.480	12.19	71505S	.63	16.0	.390	9.9	24	4.2	.29	7.3	6.9	31	.20	5.1	0.045	1.1	4.50	SST	CG	N
0.480	12.19	71519	.63	16.0	.378	9.6	45	7.9	.30	7.7	14	61	.24	6.2	0.051	1.3	4.75	MW	CG	N
0.480	12.19	71519S	.63	16.0	.378	9.6	38	6.7	.24	6.2	9.3	41	.24	6.2	0.051	1.3	4.75	SST	CG	N
0.480	12.19	71533	.63	16.0	.370	9.4	56	9.8	.31	7.8	17	76	.28	7.0	0.055	1.4	5.00	MW	CG	N
0.480	12.19	71533S	.63	16.0	.370	9.4	48	8.3	.24	6.2	12	52	.28	7.0	0.055	1.4	5.00	SST	CG	N
0.480	12.19	71547	.63	16.0	.362	9.2	78	14	.27	6.8	21	94	.30	7.5	0.059	1.5	5.00	MW	CG	N
0.480	12.19	71547S	.63	16.0	.362	9.2	67	12	.21	5.4	14	63	.30	7.5	0.059	1.5	5.00	SST	CG	N
0.480	12.19	71561	.63	16.0	.354	9.0	95	17	.27	6.8	25	113	.33	8.4	0.063	1.6	5.25	MW	CG	N
0.480	12.19	71561S	.63	16.0	.354	9.0	81	14	.21	5.4	17	77	.33	8.4	0.063	1.6	5.25	SST	CG	N
0.480	12.19	71576	.63	16.0	.346	8.8	135	24	.23	5.8	30	136	.34	8.5	0.067	1.7	5.00	MW	CG	N
0.480	12.19	71576S	.63	16.0	.346	8.8	114	20	.18	4.6	21	92	.34	8.5	0.067	1.7	5.00	SST	CG	N
0.480	12.19	71589	.63	16.0	.336	8.5	191	33	.19	4.8	36	160	.36	9.1	0.072	1.8	5.00	MW	CG	N
0.480	12.19	71589S	.63	16.0	.336	8.5	163	28	.15	3.8	24	107	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.480	12.19	71604	.63	16.0	.332	8.4	216	38	.18	4.6	39	173	.37	9.4	0.074	1.9	5.00	MW	CG	N
0.480	12.19	71604S	.63	16.0	.332	8.4	183	32	.14	3.6	26	116	.37	9.4	0.074	1.9	5.00	SST	CG	N
0.480	12.19	71619	.63	16.0	.318	8.1	330	58	.15	3.9	50	224	.41	10.3	0.081	2.1	5.00	MW	CG	N
0.480	12.19	71619S	.63	16.0	.318	8.1	280	49	.12	3.1	34	150	.41	10.3	0.081	2.1	5.00	SST	CG	N
0.480	12.19	12785	.66	16.7	.386	9.8	35	6.1	.33	8.5	12	51	.21	5.4	0.047	1.2	4.50	MW	CG	Z
0.480	12.19	12746	.73	18.6	.392	10.0	14	2.5	.40	10	5.8	26	.33	8.4	0.044	1.1	6.50	SPR	C	N
0.480	12.19	71467	.75	19.1	.410	10.4	9.9	1.7	.49	12	4.8	21	.16	4.0	0.035	0.9	4.50	MW	CG	N
0.480	12.19	71467S	.75	19.1	.410	10.4	8.4	1.5	.39	9.8	3.3	15	.16	4.0	0.035	0.9	4.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.480	12.19	71478	.75	19.1	.404	10.3	13	2.2	.49	12	6.2	27	.18	4.6	0.038	1.0	4.75	MW	CG	N
0.480	12.19	71478S	.75	19.1	.404	10.3	11	1.9	.39	9.9	4.2	19	.18	4.6	0.038	1.0	4.75	SST	CG	N
0.480	12.19	71492	.75	19.1	.396	10.1	18	3.2	.46	12	8.3	37	.21	5.3	0.042	1.1	5.00	MW	CG	N
0.480	12.19	71492S	.75	19.1	.396	10.1	15	2.7	.37	9.3	5.6	25	.21	5.3	0.042	1.1	5.00	SST	CG	N
0.480	12.19	71506	.75	19.1	.390	9.9	22	3.9	.46	12	10	45	.24	6.0	0.045	1.1	5.25	MW	CG	N
0.480	12.19	71506S	.75	19.1	.390	9.9	19	3.3	.37	9.3	6.9	31	.24	6.0	0.045	1.1	5.25	SST	CG	N
0.480	12.19	71520	.75	19.1	.378	9.6	37	6.5	.37	9.3	14	61	.27	6.8	0.051	1.3	5.25	MW	CG	N
0.480	12.19	71520S	.75	19.1	.378	9.6	32	5.6	.29	7.4	9.3	41	.27	6.8	0.051	1.3	5.25	SST	CG	N
0.480	12.19	71534	.75	19.1	.370	9.4	47	8.2	.36	9.3	17	76	.31	7.9	0.055	1.4	5.63	MW	CG	N
0.480	12.19	71534S	.75	19.1	.370	9.4	40	7.0	.29	7.4	12	52	.31	7.9	0.055	1.4	5.63	SST	CG	N
0.480	12.19	71548	.75	19.1	.362	9.2	63	11	.33	8.5	21	94	.34	8.6	0.059	1.5	5.75	MW	CG	N
0.480	12.19	71548S	.75	19.1	.362	9.2	53	9.4	.27	6.8	14	63	.34	8.6	0.059	1.5	5.75	SST	CG	N
0.480	12.19	71562	.75	19.1	.354	9.0	78	14	.33	8.4	25	113	.38	9.6	0.063	1.6	6.00	MW	CG	N
0.480	12.19	71562S	.75	19.1	.354	9.0	66	12	.26	6.7	17	77	.38	9.6	0.063	1.6	6.00	SST	CG	N
0.480	12.19	71577	.75	19.1	.346	8.8	107	19	.29	7.3	30	136	.39	10.0	0.067	1.7	5.88	MW	CG	N
0.480	12.19	71577S	.75	19.1	.346	8.8	91	16	.23	5.8	21	92	.39	10.0	0.067	1.7	5.88	SST	CG	N
0.480	12.19	71590	.75	19.1	.336	8.5	150	26	.24	6.1	36	160	.41	10.5	0.072	1.8	5.75	MW	CG	N
0.480	12.19	71590S	.75	19.1	.336	8.5	128	22	.19	4.8	24	107	.41	10.5	0.072	1.8	5.75	SST	CG	N
0.480	12.19	71605	.75	19.1	.332	8.4	169	30	.23	5.8	39	173	.43	10.8	0.074	1.9	5.75	MW	CG	N
0.480	12.19	71605S	.75	19.1	.332	8.4	144	25	.18	4.6	26	116	.43	10.8	0.074	1.9	5.75	SST	CG	N
0.480	12.19	71620	.75	19.1	.318	8.1	257	45	.20	5.0	50	224	.47	11.8	0.081	2.1	5.75	MW	CG	N
0.480	12.19	71620S	.75	19.1	.318	8.1	218	38	.15	3.9	34	150	.47	11.8	0.081	2.1	5.75	SST	CG	N
0.480	12.19	71468	.88	22.4	.410	10.4	8.3	1.5	.58	15	4.8	21	.18	4.4	0.035	0.9	5.00	MW	CG	N
0.480	12.19	71468S	.88	22.4	.410	10.4	7.1	1.2	.46	12	3.3	15	.18	4.4	0.035	0.9	5.00	SST	CG	N
0.480	12.19	71479	.88	22.4	.404	10.3	11	1.8	.59	15	6.2	27	.20	5.1	0.038	1.0	5.25	MW	CG	N
0.480	12.19	71479S	.88	22.4	.404	10.3	8.9	1.6	.47	12	4.2	19	.20	5.1	0.038	1.0	5.25	SST	CG	N
0.480	12.19	71493	.88	22.4	.396	10.1	15	2.6	.55	14	8.3	37	.23	5.9	0.042	1.1	5.50	MW	CG	N
0.480	12.19	71493S	.88	22.4	.396	10.1	13	2.2	.44	11	5.6	25	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.480	12.19	71507	.88	22.4	.390	9.9	19	3.3	.53	14	10	45	.26	6.6	0.045	1.1	5.75	MW	CG	N
0.480	12.19	71507S	.88	22.4	.390	9.9	16	2.8	.42	11	6.9	31	.26	6.6	0.045	1.1	5.75	SST	CG	N
0.480	12.19	71521	.88	22.4	.378	9.6	30	5.3	.45	11	14	61	.31	7.8	0.051	1.3	6.00	MW	CG	N
0.480	12.19	71521S	.88	22.4	.378	9.6	26	4.5	.36	9.1	9.3	41	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.480	12.19	71535	.88	22.4	.370	9.4	38	6.7	.45	11	17	76	.36	9.1	0.055	1.4	6.50	MW	CG	N
0.480	12.19	71535S	.88	22.4	.370	9.4	32	5.7	.36	9.1	12	52	.36	9.1	0.055	1.4	6.50	SST	CG	N
0.480	12.19	71549	.88	22.4	.362	9.2	51	8.9	.41	10	21	94	.39	9.9	0.059	1.5	6.63	MW	CG	N
0.480	12.19	71549S	.88	22.4	.362	9.2	43	7.6	.33	8.4	14	63	.39	9.9	0.059	1.5	6.63	SST	CG	N
0.480	12.19	71563	.88	22.4	.354	9.0	66	11	.39	9.9	25	113	.43	10.8	0.063	1.6	6.75	MW	CG	N
0.480	12.19	71563S	.88	22.4	.354	9.0	56	9.7	.31	7.9	17	77	.43	10.8	0.063	1.6	6.75	SST	CG	N
0.480	12.19	71578	.88	22.4	.346	8.8	88	15	.34	8.8	30	136	.44	11.3	0.067	1.7	6.63	MW	CG	N
0.480	12.19	71578S	.88	22.4	.346	8.8	75	13	.27	7.0	21	92	.44	11.3	0.067	1.7	6.63	SST	CG	N
0.480	12.19	71591	.88	22.4	.336	8.5	124	22	.29	7.4	36	160	.48	12.1	0.072	1.8	6.63	MW	CG	N
0.480	12.19	71591S	.88	22.4	.336	8.5	105	18	.23	5.8	24	107	.48	12.1	0.072	1.8	6.63	SST	CG	N
0.480	12.19	71606	.88	22.4	.332	8.4	139	24	.28	7.1	39	173	.49	12.5	0.074	1.9	6.63	MW	CG	N
0.480	12.19	71606S	.88	22.4	.332	8.4	118	21	.22	5.6	26	116	.49	12.5	0.074	1.9	6.63	SST	CG	N
0.480	12.19	71621	.88	22.4	.318	8.1	210	37	.24	6.1	50	224	.54	13.6	0.081	2.1	6.63	MW	CG	N
0.480	12.19	71621S	.88	22.4	.318	8.1	179	31	.19	4.8	34	150	.54	13.6	0.081	2.1	6.63	SST	CG	N
0.480	12.19	71469	1.00	25.4	.410	10.4	7.2	1.3	.67	17	4.8	21	.19	4.8	0.035	0.9	5.38	MW	CG	N
0.480	12.19	71469S	1.00	25.4	.410	10.4	6.1	1.1	.53	14	3.3	15	.19	4.8	0.035	0.9	5.38	SST	CG	N
0.480	12.19	71480	1.00	25.4	.404	10.3	9.3	1.6	.66	17	6.2	27	.22	5.5	0.038	1.0	5.75	MW	CG	N
0.480	12.19	71480S	1.00	25.4	.404	10.3	7.9	1.4	.53	13	4.2	19	.22	5.5	0.038	1.0	5.75	SST	CG	N
0.480	12.19	71494	1.00	25.4	.396	10.1	13	2.3	.64	16	8.3	37	.26	6.5	0.042	1.1	6.13	MW	CG	N
0.480	12.19	71494S	1.00	25.4	.396	10.1	11	1.9	.51	13	5.6	25	.26	6.5	0.042	1.1	6.13	SST	CG	N
0.480	12.19	71508	1.00	25.4	.390	9.9	17	3.0	.60	15	10	45	.28	7.1	0.045	1.1	6.25	MW	CG	N
0.480	12.19	71508S	1.00	25.4	.390	9.9	14	2.5	.47	12	6.9	31	.28	7.1	0.045	1.1	6.25	SST	CG	N
0.480	12.19	71522	1.00	25.4	.378	9.6	26	4.6	.53	13	14	61	.34	8.7	0.051	1.3	6.75	MW	CG	N
0.480	12.19	71522S	1.00	25.4	.378	9.6	22	3.9	.42	11	9.3	41	.34	8.7	0.051	1.3	6.75	SST	CG	N
0.480	12.19	71536	1.00	25.4	.370	9.4	35	6.1	.49	12	17	76	.38	9.6	0.055	1.4	6.88	MW	CG	N
0.480	12.19	71536S	1.00	25.4	.370	9.4	30	5.2	.39	9.9	12	52	.38	9.6	0.055	1.4	6.88	SST	CG	N
0.480	12.19	71550	1.00	25.4	.362	9.2	45	7.8	.47	12	21	94	.43	10.9	0.059	1.5	7.25	MW	CG	N
0.480	12.19	71550S	1.00	25.4	.362	9.2	38	6.7	.38	9.5	14	63	.43	10.9	0.059	1.5	7.25	SST	CG	N
0.480	12.19	71564	1.00	25.4	.354	9.0	57	10	.45	11	25	113	.47	12.0	0.063	1.6	7.50	MW	CG	N
0.480	12.19	71564S	1.00	25.4	.354	9.0	48	8.5	.36	9.1	17	77	.47	12.0	0.063	1.6	7.50	SST	CG	N
0.480	12.19	71579	1.00	25.4	.346	8.8	76	13	.40	10	30	136	.49	12.6	0.067	1.7	7.38	MW	CG	N
0.480	12.19	71579S	1.00	25.4	.346	8.8	65	11	.32	8.1	21	92	.49	12.6	0.067	1.7	7.38	SST	CG	N
0.480	12.19	71592	1.00	25.4	.336	8.5	106	19	.34	8.6	36	160	.53	13.5	0.072	1.8	7.38	MW	CG	N
0.480	12.19	71592S	1.00	25.4	.336	8.5	90	16	.27	6.8	24	107	.53	13.5	0.072	1.8	7.38	SST	CG	N
0.480	12.19	71607	1.00	25.4	.332	8.4	119	21	.33	8.3	39	173	.55	13.9	0.074	1.9	7.38	MW	CG	N
0.480	12.19	71607S	1.00	25.4	.332	8.4	101	18	.26	6.5	26	116	.55	13.9	0.074	1.9	7.38	SST	CG	N
0.480	12.19	71622	1.00	25.4	.318	8.1	180	32	.28	7.1	50	224	.60	15.2	0.081	2.1	7.38	MW	CG	N
0.480	12.19	71622S	1.00	25.4	.318	8.1	153	27	.22	5.6	34	150	.60	15.2	0.081	2.1	7.38	SST	CG	N
0.480	12.19	71470	1.25	31.8	.410	10.4	5.7	1.0	.85	21	4.8	21	.22	5.6	0.035	0.9	6.25	MW	CG	N
0.480	12.19	71470S	1.25	31.8	.410	10.4	4.8	.85	.67	17	3.3	15	.22	5.6	0.035	0.9	6.25	SST	CG	N
0.480	12.19	71481	1.25	31.8	.404	10.3	7.5	1.3	.82	21	6.2	27	.25	6.4	0.038	1.0	6.63	MW	CG	N
0.480	12.19	71481S	1.25	31.8	.404	10.3	6.4	1.1	.65	17	4.2	19	.25	6.4	0.038	1.0	6.63	SST	CG	N
0.480	12.19	71495	1.25	31.8	.396	10.1	10	1.8	.83	21	8.3	37	.31	7.9	0.042	1.1	7.38	MW	CG	N
0.480	12.19	71495S	1.25	31.8	.396	10.1	8.5	1.5	.66	17	5.6	25	.31	7.9	0.042	1.1	7.38	SST	CG	N
0.480	12.19	71509	1.25	31.8	.390	9.9	13	2.3	.78	20	10	45	.34	8.6	0.045	1.1	7.50	MW	CG	N
0.480	12.19	71509S	1.25	31.8	.390	9.9	11	1.9	.62	16	6.9	31	.34	8.6	0.045	1.1	7.50	SST	CG	N
0.480	12.19	71523	1.25	31.8	.378	9.6	20	3.6	.67	17	14	61	.41	10.4	0.051	1.3	8.00	MW	CG	N
0.480	12.19	71523S	1.25	31.8	.378	9.6	17	3.0	.54	14	9.3	41	.41	10.4	0.051	1.3	8.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.480	12.19	71537	1.25	31.8	.370	9.4	27	4.7	.63	16	17	76	.46	11.7	0.055	1.4	8.38	MW	CG	N
0.480	12.19	71537S	1.25	31.8	.370	9.4	23	4.0	.51	13	12	52	.46	11.7	0.055	1.4	8.38	SST	CG	N
0.480	12.19	71551	1.25	31.8	.362	9.2	35	6.1	.60	15	21	94	.51	12.9	0.059	1.5	8.63	MW	CG	N
0.480	12.19	71551S	1.25	31.8	.362	9.2	30	5.2	.48	12	14	63	.51	12.9	0.059	1.5	8.63	SST	CG	N
0.480	12.19	71565	1.25	31.8	.354	9.0	45	7.9	.57	14	25	113	.57	14.4	0.063	1.6	9.00	MW	CG	N
0.480	12.19	71565S	1.25	31.8	.354	9.0	38	6.7	.45	11	17	77	.57	14.4	0.063	1.6	9.00	SST	CG	N
0.480	12.19	71580	1.25	31.8	.346	8.8	59	10	.52	13	30	136	.60	15.3	0.067	1.7	9.00	MW	CG	N
0.480	12.19	71580S	1.25	31.8	.346	8.8	50	8.7	.42	11	21	92	.60	15.3	0.067	1.7	9.00	SST	CG	N
0.480	12.19	71593	1.25	31.8	.336	8.5	82	14	.44	11	36	160	.64	16.2	0.072	1.8	8.88	MW	CG	N
0.480	12.19	71593S	1.25	31.8	.336	8.5	70	12	.34	8.7	24	107	.64	16.2	0.072	1.8	8.88	SST	CG	N
0.480	12.19	71608	1.25	31.8	.332	8.4	92	16	.42	11	39	173	.67	16.9	0.074	1.9	9.00	MW	CG	N
0.480	12.19	71608S	1.25	31.8	.332	8.4	78	14	.33	8.4	26	116	.67	16.9	0.074	1.9	9.00	SST	CG	N
0.480	12.19	71623	1.25	31.8	.318	8.1	139	24	.36	9.2	50	224	.73	18.5	0.081	2.1	9.00	MW	CG	N
0.480	12.19	71623S	1.25	31.8	.318	8.1	118	21	.29	7.3	34	150	.73	18.5	0.081	2.1	9.00	SST	CG	N
0.480	12.19	71566	1.38	35.1	.354	9.0	43	7.5	.60	15	25	113	.59	15.0	0.063	1.6	9.38	MW	CG	N
0.480	12.19	71566S	1.38	35.1	.354	9.0	36	6.4	.48	12	17	77	.59	15.0	0.063	1.6	9.38	SST	CG	N
0.480	12.19	71471	1.50	38.1	.410	10.4	4.7	.82	1.0	26	4.8	21	.25	6.4	0.035	0.9	7.25	MW	CG	N
0.480	12.19	71471S	1.50	38.1	.410	10.4	4.0	.70	.82	21	3.3	15	.25	6.4	0.035	0.9	7.25	SST	CG	N
0.480	12.19	71482	1.50	38.1	.404	10.3	6.0	1.1	1.0	26	6.2	27	.29	7.5	0.038	1.0	7.75	MW	CG	N
0.480	12.19	71482S	1.50	38.1	.404	10.3	5.1	.89	.82	21	4.2	19	.29	7.5	0.038	1.0	7.75	SST	CG	N
0.480	12.19	71496	1.50	38.1	.396	10.1	8.5	1.5	.97	25	8.3	37	.35	8.8	0.042	1.1	8.25	MW	CG	N
0.480	12.19	71496S	1.50	38.1	.396	10.1	7.2	1.3	.77	20	5.6	25	.35	8.8	0.042	1.1	8.25	SST	CG	N
0.480	12.19	71510	1.50	38.1	.390	9.9	11	1.9	.92	23	10	45	.38	9.7	0.045	1.1	8.50	MW	CG	N
0.480	12.19	71510S	1.50	38.1	.390	9.9	9.4	1.6	.73	19	6.9	31	.38	9.7	0.045	1.1	8.50	SST	CG	N
0.480	12.19	71524	1.50	38.1	.378	9.6	17	2.9	.82	21	14	61	.48	12.1	0.051	1.3	9.38	MW	CG	N
0.480	12.19	71524S	1.50	38.1	.378	9.6	14	2.5	.65	17	9.3	41	.48	12.1	0.051	1.3	9.38	SST	CG	N
0.480	12.19	71538	1.50	38.1	.370	9.4	22	3.9	.78	20	17	76	.54	13.6	0.055	1.4	9.75	MW	CG	N
0.480	12.19	71538S	1.50	38.1	.370	9.4	19	3.3	.62	16	12	52	.54	13.6	0.055	1.4	9.75	SST	CG	N
0.480	12.19	71552	1.50	38.1	.362	9.2	29	5.0	.73	19	21	94	.60	15.2	0.059	1.5	10.1	MW	CG	N
0.480	12.19	71552S	1.50	38.1	.362	9.2	24	4.3	.58	15	14	63	.60	15.2	0.059	1.5	10.1	SST	CG	N
0.480	12.19	71567	1.50	38.1	.354	9.0	38	6.6	.68	17	25	113	.65	16.6	0.063	1.6	10.4	MW	CG	N
0.480	12.19	71567S	1.50	38.1	.354	9.0	32	5.6	.54	14	17	77	.65	16.6	0.063	1.6	10.4	SST	CG	N
0.480	12.19	71581	1.50	38.1	.346	8.8	48	8.4	.63	16	30	136	.70	17.9	0.067	1.7	10.5	MW	CG	N
0.480	12.19	71581S	1.50	38.1	.346	8.8	41	7.2	.51	13	21	92	.70	17.9	0.067	1.7	10.5	SST	CG	N
0.480	12.19	71594	1.50	38.1	.336	8.5	67	12	.54	14	36	160	.76	19.2	0.072	1.8	10.5	MW	CG	N
0.480	12.19	71594S	1.50	38.1	.336	8.5	57	10	.42	11	24	107	.76	19.2	0.072	1.8	10.5	SST	CG	N
0.480	12.19	71609	1.50	38.1	.332	8.4	75	13	.52	13	39	173	.78	19.7	0.074	1.9	10.5	MW	CG	N
0.480	12.19	71609S	1.50	38.1	.332	8.4	64	11	.41	10	26	116	.78	19.7	0.074	1.9	10.5	SST	CG	N
0.480	12.19	71624	1.50	38.1	.318	8.1	113	20	.45	11	50	224	.86	21.9	0.081	2.1	10.6	MW	CG	N
0.480	12.19	71624S	1.50	38.1	.318	8.1	96	17	.35	8.9	34	150	.86	21.9	0.081	2.1	10.6	SST	CG	N
0.480	12.19	71483	1.63	41.4	.404	10.3	5.5	.96	1.1	28	6.2	27	.31	8.0	0.038	1.0	8.25	MW	CG	N
0.480	12.19	71483S	1.63	41.4	.404	10.3	4.7	.82	.89	23	4.2	19	.31	8.0	0.038	1.0	8.25	SST	CG	N
0.480	12.19	71497	1.63	41.4	.396	10.1	7.7	1.3	1.1	27	8.3	37	.37	9.5	0.042	1.1	8.88	MW	CG	N
0.480	12.19	71497S	1.63	41.4	.396	10.1	6.5	1.1	.85	22	5.6	25	.37	9.5	0.042	1.1	8.88	SST	CG	N
0.480	12.19	71511	1.63	41.4	.390	9.9	9.8	1.7	1.0	26	10	45	.42	10.7	0.045	1.1	9.38	MW	CG	N
0.480	12.19	71511S	1.63	41.4	.390	9.9	8.3	1.5	.83	21	6.9	31	.42	10.7	0.045	1.1	9.38	SST	CG	N
0.480	12.19	71525	1.63	41.4	.378	9.6	15	2.6	.93	24	14	61	.53	13.4	0.051	1.3	10.4	MW	CG	N
0.480	12.19	71525S	1.63	41.4	.378	9.6	13	2.2	.74	19	9.3	41	.53	13.4	0.051	1.3	10.4	SST	CG	N
0.480	12.19	71539	1.63	41.4	.370	9.4	20	3.5	.86	22	17	76	.58	14.8	0.055	1.4	10.6	MW	CG	N
0.480	12.19	71539S	1.63	41.4	.370	9.4	17	3.0	.68	17	12	52	.58	14.8	0.055	1.4	10.6	SST	CG	N
0.480	12.19	71553	1.63	41.4	.362	9.2	26	4.5	.83	21	21	94	.66	16.7	0.059	1.5	11.1	MW	CG	N
0.480	12.19	71553S	1.63	41.4	.362	9.2	22	3.8	.66	17	14	63	.66	16.7	0.059	1.5	11.1	SST	CG	N
0.480	12.19	71568	1.63	41.4	.354	9.0	34	6.0	.75	19	25	113	.70	17.8	0.063	1.6	11.1	MW	CG	N
0.480	12.19	71568S	1.63	41.4	.354	9.0	29	5.1	.60	15	17	77	.70	17.8	0.063	1.6	11.1	SST	CG	N
0.480	12.19	71472	1.75	44.5	.410	10.4	4.0	.70	1.2	31	4.8	21	.28	7.2	0.035	0.9	8.13	MW	CG	N
0.480	12.19	71472S	1.75	44.5	.410	10.4	3.4	.60	.96	24	3.3	15	.28	7.2	0.035	0.9	8.13	SST	CG	N
0.480	12.19	71484	1.75	44.5	.404	10.3	5.2	.91	1.2	30	6.2	27	.33	8.3	0.038	1.0	8.63	MW	CG	N
0.480	12.19	71484S	1.75	44.5	.404	10.3	4.4	.77	.94	24	4.2	19	.33	8.3	0.038	1.0	8.63	SST	CG	N
0.480	12.19	71498	1.75	44.5	.396	10.1	7.3	1.3	1.1	29	8.3	37	.39	9.9	0.042	1.1	9.25	MW	CG	N
0.480	12.19	71498S	1.75	44.5	.396	10.1	6.2	1.1	.90	23	5.6	25	.39	9.9	0.042	1.1	9.25	SST	CG	N
0.480	12.19	71512	1.75	44.5	.390	9.9	9.3	1.6	1.1	28	10	45	.44	11.1	0.045	1.1	9.75	MW	CG	N
0.480	12.19	71512S	1.75	44.5	.390	9.9	7.9	1.4	.87	22	6.9	31	.44	11.1	0.045	1.1	9.75	SST	CG	N
0.480	12.19	71526	1.75	44.5	.378	9.6	14	2.5	.96	24	14	61	.54	13.8	0.051	1.3	10.6	MW	CG	N
0.480	12.19	71526S	1.75	44.5	.378	9.6	12	2.1	.77	19	9.3	41	.54	13.8	0.051	1.3	10.6	SST	CG	N
0.480	12.19	71540	1.75	44.5	.370	9.4	19	3.3	.92	23	17	76	.61	15.5	0.055	1.4	11.1	MW	CG	N
0.480	12.19	71540S	1.75	44.5	.370	9.4	16	2.8	.73	19	12	52	.61	15.5	0.055	1.4	11.1	SST	CG	N
0.480	12.19	71554	1.75	44.5	.362	9.2	24	4.3	.87	22	21	94	.69	17.4	0.059	1.5	11.6	MW	CG	N
0.480	12.19	71554S	1.75	44.5	.362	9.2	21	3.6	.69	18	14	63	.69	17.4	0.059	1.5	11.6	SST	CG	N
0.480	12.19	71569	1.75	44.5	.354	9.0	32	5.5	.81	20	25	113	.75	19.0	0.063	1.6	11.9	MW	CG	N
0.480	12.19	71569S	1.75	44.5	.354	9.0	27	4.7	.64	16	17	77	.75	19.0	0.063	1.6	11.9	SST	CG	N
0.480	12.19	71582	1.75	44.5	.346	8.8	41	7.1	.75	19	30	136	.81	20.6	0.067	1.7	12.1	MW	CG	N
0.480	12.19	71582S	1.75	44.5	.346	8.8	35	6.1	.60	15	21	92	.81	20.6	0.067	1.7	12.1	SST	CG	N
0.480	12.19	71595	1.75	44.5	.336	8.5	57	9.9	.63	16	36	160	.86	21.9	0.072	1.8	12.0	MW	CG	N
0.480	12.19	71595S	1.75	44.5	.336	8.5	48	8.4	.50	13	24	107	.86	21.9	0.072	1.8	12.0	SST	CG	N
0.480	12.19	71610	1.75	44.5	.332	8.4	64	11	.61	16	39	173	.90	22.8	0.074	1.9	12.1	MW	CG	N
0.480	12.19	71610S	1.75	44.5	.332	8.4	54	9.5	.48	12	26	116	.90	22.8	0.074	1.9	12.1	SST	CG	N
0.480	12.19	71625	1.75	44.5	.318	8.1	95	17	.53	13	50	224	.99	25.2	0.081	2.1	12.3	MW	CG	N
0.480	12.19	71625S	1.75	44.5	.318	8.1	81	14	.42	11	34	150	.99	25.2	0.081	2.1	12.3	SST	CG	N
0.480	12.19	71473	2.00	50.8	.410	10.4	3.5	.61	1.4	35	4.8	21	.32	8.0	0.035	0.9	9.00	MW	CG	N
0.480	12.19	71473S	2.00	50.8	.410	10.4	3.0	.52	1.1	28	3.3	15	.32	8.0	0.035	0.9	9.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.480	12.19	71485	2.00	50.8	.404	10.3	4.5	.79	1.4	35	6.2	27	.37	9.3	0.038	1.0	9.63	MW	CG	N
0.480	12.19	71485S	2.00	50.8	.404	10.3	3.8	.67	1.1	27	4.2	19	.37	9.3	0.038	1.0	9.63	SST	CG	N
0.480	12.19	71499	2.00	50.8	.396	10.1	6.4	1.1	1.3	33	8.3	37	.44	11.1	0.042	1.1	10.4	MW	CG	N
0.480	12.19	71499S	2.00	50.8	.396	10.1	5.4	.95	1.0	26	5.6	25	.44	11.1	0.042	1.1	10.4	SST	CG	N
0.480	12.19	71513	2.00	50.8	.390	9.9	8.1	1.4	1.3	32	10	45	.49	12.4	0.045	1.1	10.9	MW	CG	N
0.480	12.19	71513S	2.00	50.8	.390	9.9	6.8	1.2	1.0	25	6.9	31	.49	12.4	0.045	1.1	10.9	SST	CG	N
0.480	12.19	71527	2.00	50.8	.378	9.6	12	2.2	1.1	28	14	61	.61	15.4	0.051	1.3	11.9	MW	CG	N
0.480	12.19	71527S	2.00	50.8	.378	9.6	11	1.9	.88	22	9.3	41	.61	15.4	0.051	1.3	11.9	SST	CG	N
0.480	12.19	71541	2.00	50.8	.370	9.4	16	2.9	1.0	27	17	76	.69	17.5	0.055	1.4	12.5	MW	CG	N
0.480	12.19	71541S	2.00	50.8	.370	9.4	14	2.4	.83	21	12	52	.69	17.5	0.055	1.4	12.5	SST	CG	N
0.480	12.19	71555	2.00	50.8	.362	9.2	21	3.7	1.0	25	21	94	.77	19.5	0.059	1.5	13.0	MW	CG	N
0.480	12.19	71555S	2.00	50.8	.362	9.2	18	3.1	.79	20	14	63	.77	19.5	0.059	1.5	13.0	SST	CG	N
0.480	12.19	71570	2.00	50.8	.354	9.0	27	4.8	.93	24	25	113	.84	21.4	0.063	1.6	13.4	MW	CG	N
0.480	12.19	71570S	2.00	50.8	.354	9.0	23	4.1	.74	19	17	77	.84	21.4	0.063	1.6	13.4	SST	CG	N
0.480	12.19	71583	2.00	50.8	.346	8.8	35	6.2	.87	22	30	136	.91	23.2	0.067	1.7	13.6	MW	CG	N
0.480	12.19	71583S	2.00	50.8	.346	8.8	30	5.2	.69	18	21	92	.91	23.2	0.067	1.7	13.6	SST	CG	N
0.480	12.19	71596	2.00	50.8	.336	8.5	49	8.6	.73	19	36	160	.98	24.9	0.072	1.8	13.6	MW	CG	N
0.480	12.19	71596S	2.00	50.8	.336	8.5	42	7.3	.58	15	24	107	.98	24.9	0.072	1.8	13.6	SST	CG	N
0.480	12.19	71611	2.00	50.8	.332	8.4	55	9.6	.71	18	39	173	1.02	25.8	0.074	1.9	13.8	MW	CG	N
0.480	12.19	71611S	2.00	50.8	.332	8.4	47	8.2	.56	14	26	116	1.02	25.8	0.074	1.9	13.8	SST	CG	N
0.480	12.19	71626	2.00	50.8	.318	8.1	82	14	.61	16	50	224	1.12	28.5	0.081	2.1	13.9	MW	CG	N
0.480	12.19	71626S	2.00	50.8	.318	8.1	70	12	.48	12	34	150	1.12	28.5	0.081	2.1	13.9	SST	CG	N
0.480	12.19	71486	2.25	57.2	.404	10.3	4.2	.73	1.5	37	6.2	27	.39	9.9	0.038	1.0	10.3	MW	CG	N
0.480	12.19	71486S	2.25	57.2	.404	10.3	3.6	.62	1.2	30	4.2	19	.39	9.9	0.038	1.0	10.3	SST	CG	N
0.480	12.19	71500	2.25	57.2	.396	10.1	5.7	1.0	1.5	37	8.3	37	.48	12.1	0.042	1.1	11.4	MW	CG	N
0.480	12.19	71500S	2.25	57.2	.396	10.1	4.8	.85	1.2	29	5.6	25	.48	12.1	0.042	1.1	11.4	SST	CG	N
0.480	12.19	71514	2.25	57.2	.390	9.9	7.1	1.2	1.4	37	10	45	.55	13.9	0.045	1.1	12.1	MW	CG	N
0.480	12.19	71514S	2.25	57.2	.390	9.9	6.0	1.0	1.1	29	6.9	31	.55	13.9	0.045	1.1	12.1	SST	CG	N
0.480	12.19	71528	2.25	57.2	.378	9.6	11	1.9	1.3	32	14	61	.68	17.2	0.051	1.3	13.3	MW	CG	N
0.480	12.19	71528S	2.25	57.2	.378	9.6	9.3	1.6	1.0	25	9.3	41	.68	17.2	0.051	1.3	13.3	SST	CG	N
0.480	12.19	71542	2.25	57.2	.370	9.4	15	2.5	1.2	30	17	76	.76	19.2	0.055	1.4	13.8	MW	CG	N
0.480	12.19	71542S	2.25	57.2	.370	9.4	12	2.2	.94	24	12	52	.76	19.2	0.055	1.4	13.8	SST	CG	N
0.480	12.19	71556	2.25	57.2	.362	9.2	19	3.3	1.1	29	21	94	.86	21.7	0.059	1.5	14.5	MW	CG	N
0.480	12.19	71556S	2.25	57.2	.362	9.2	16	2.8	.90	23	14	63	.86	21.7	0.059	1.5	14.5	SST	CG	N
0.480	12.19	71571	2.25	57.2	.354	9.0	24	4.3	1.0	27	25	113	.94	23.8	0.063	1.6	14.9	MW	CG	N
0.480	12.19	71571S	2.25	57.2	.354	9.0	21	3.6	.84	21	17	77	.94	23.8	0.063	1.6	14.9	SST	CG	N
0.480	12.19	71584	2.25	57.2	.346	8.8	31	5.4	.98	25	30	136	1.02	26.0	0.067	1.7	15.3	MW	CG	N
0.480	12.19	71584S	2.25	57.2	.346	8.8	26	4.6	.78	20	21	92	1.02	26.0	0.067	1.7	15.3	SST	CG	N
0.480	12.19	71597	2.25	57.2	.336	8.5	43	7.6	.83	21	36	160	1.09	27.7	0.072	1.8	15.1	MW	CG	N
0.480	12.19	71597S	2.25	57.2	.336	8.5	37	6.4	.66	17	24	107	1.09	27.7	0.072	1.8	15.1	SST	CG	N
0.480	12.19	71612	2.25	57.2	.332	8.4	48	8.5	.80	20	39	173	1.13	28.7	0.074	1.9	15.3	MW	CG	N
0.480	12.19	71612S	2.25	57.2	.332	8.4	41	7.2	.63	16	26	116	1.13	28.7	0.074	1.9	15.3	SST	CG	N
0.480	12.19	71627	2.25	57.2	.318	8.1	72	13	.70	18	50	224	1.26	31.9	0.081	2.1	15.5	MW	CG	N
0.480	12.19	71627S	2.25	57.2	.318	8.1	61	11	.55	14	34	150	1.26	31.9	0.081	2.1	15.5	SST	CG	N
0.480	12.19	71474	2.50	63.5	.410	10.4	2.8	.49	1.7	44	4.8	21	.38	9.6	0.035	0.9	10.8	MW	CG	N
0.480	12.19	71474S	2.50	63.5	.410	10.4	2.4	.42	1.4	35	3.3	15	.38	9.6	0.035	0.9	10.8	SST	CG	N
0.480	12.19	71487	2.50	63.5	.404	10.3	3.8	.66	1.6	42	6.2	27	.43	10.9	0.038	1.0	11.3	MW	CG	N
0.480	12.19	71487S	2.50	63.5	.404	10.3	3.2	.56	1.3	33	4.2	19	.43	10.9	0.038	1.0	11.3	SST	CG	N
0.480	12.19	71501	2.50	63.5	.396	10.1	5.4	.94	1.5	39	8.3	37	.50	12.8	0.042	1.1	12.0	MW	CG	N
0.480	12.19	71501S	2.50	63.5	.396	10.1	4.5	.80	1.2	31	5.6	25	.50	12.8	0.042	1.1	12.0	SST	CG	N
0.480	12.19	71515	2.50	63.5	.390	9.9	6.4	1.1	1.6	40	10	45	.60	15.1	0.045	1.1	13.3	MW	CG	N
0.480	12.19	71515S	2.50	63.5	.390	9.9	5.4	.95	1.3	32	6.9	31	.60	15.1	0.045	1.1	13.3	SST	CG	N
0.480	12.19	71529	2.50	63.5	.378	9.6	9.9	1.7	1.4	35	14	61	.74	18.8	0.051	1.3	14.5	MW	CG	N
0.480	12.19	71529S	2.50	63.5	.378	9.6	8.4	1.5	1.1	28	9.3	41	.74	18.8	0.051	1.3	14.5	SST	CG	N
0.480	12.19	71543	2.50	63.5	.370	9.4	13	2.3	1.3	34	17	76	.84	21.3	0.055	1.4	15.3	MW	CG	N
0.480	12.19	71543S	2.50	63.5	.370	9.4	11	1.9	1.1	27	12	52	.84	21.3	0.055	1.4	15.3	SST	CG	N
0.480	12.19	71557	2.50	63.5	.362	9.2	17	2.9	1.3	32	21	94	.95	24.2	0.059	1.5	16.1	MW	CG	N
0.480	12.19	71557S	2.50	63.5	.362	9.2	14	2.5	1.0	26	14	63	.95	24.2	0.059	1.5	16.1	SST	CG	N
0.480	12.19	71572	2.50	63.5	.354	9.0	22	3.8	1.2	30	25	113	1.03	26.2	0.063	1.6	16.4	MW	CG	N
0.480	12.19	71572S	2.50	63.5	.354	9.0	18	3.2	.94	24	17	77	1.03	26.2	0.063	1.6	16.4	SST	CG	N
0.480	12.19	71585	2.50	63.5	.346	8.8	28	4.9	1.1	28	30	136	1.12	28.5	0.067	1.7	16.8	MW	CG	N
0.480	12.19	71585S	2.50	63.5	.346	8.8	24	4.1	.87	22	21	92	1.12	28.5	0.067	1.7	16.8	SST	CG	N
0.480	12.19	71598	2.50	63.5	.336	8.5	39	6.8	.93	24	36	160	1.21	30.6	0.072	1.8	16.8	MW	CG	N
0.480	12.19	71598S	2.50	63.5	.336	8.5	33	5.7	.73	19	24	107	1.21	30.6	0.072	1.8	16.8	SST	CG	N
0.480	12.19	71613	2.50	63.5	.332	8.4	43	7.6	.90	23	39	173	1.25	31.7	0.074	1.9	16.9	MW	CG	N
0.480	12.19	71613S	2.50	63.5	.332	8.4	37	6.4	.71	18	26	116	1.25	31.7	0.074	1.9	16.9	SST	CG	N
0.480	12.19	71628	2.50	63.5	.318	8.1	65	11	.78	20	50	224	1.39	35.2	0.081	2.1	17.1	MW	CG	N
0.480	12.19	71628S	2.50	63.5	.318	8.1	55	9.6	.62	16	34	150	1.39	35.2	0.081	2.1	17.1	SST	CG	N
0.480	12.19	71488	2.75	69.9	.404	10.3	3.4	.60	1.8	46	6.2	27	.47	11.8	0.038	1.0	12.3	MW	CG	N
0.480	12.19	71488S	2.75	69.9	.404	10.3	2.9	.51	1.4	37	4.2	19	.47	11.8	0.038	1.0	12.3	SST	CG	N
0.480	12.19	71502	2.75	69.9	.396	10.1	4.8	.84	1.7	44	8.3	37	.55	13.9	0.042	1.1	13.0	MW	CG	N
0.480	12.19	71502S	2.75	69.9	.396	10.1	4.1	.72	1.4	35	5.6	25	.55	13.9	0.042	1.1	13.0	SST	CG	N
0.480	12.19	71516	2.75	69.9	.390	9.9	5.8	1.0	1.7	44	10	45	.65	16.4	0.045	1.1	14.4	MW	CG	N
0.480	12.19	71516S	2.75	69.9	.390	9.9	4.9	.86	1.4	35	6.9	31	.65	16.4	0.045	1.1	14.4	SST	CG	N
0.480	12.19	71530	2.75	69.9	.378	9.6	8.8	1.5	1.6	40	14	61	.82	20.7	0.051	1.3	16.0	MW	CG	N
0.480	12.19	71530S	2.75	69.9	.378	9.6	7.4	1.3	1.2	32	9.3	41	.82	20.7	0.051	1.3	16.0	SST	CG	N
0.480	12.19	71544	2.75	69.9	.370	9.4	12	2.1	1.5	37	17	76	.91	23.2	0.055	1.4	16.6	MW	CG	N
0.480	12.19	71544S	2.75	69.9	.370	9.4	10	1.7	1.2	30	12	52	.91	23.2	0.055	1.4	16.6	SST	CG	N
0.480	12.19	71558	2.75	69.9	.362	9.2	15	2.7	1.4	35	21	94	1.03	26.0	0.059	1.5	17.4	MW	CG	N
0.480	12.19	71558S	2.75	69.9	.362	9.2	13	2.3	1.1	28	14	63	1.03	26.0	0.059	1.5	17.4	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.480	12.19	71573	2.75	69.9	.354	9.0	20	3.5	1.3	33	25	113	1.12	28.4	0.063	1.6	17.8	MW	CG	N
0.480	12.19	71573S	2.75	69.9	.354	9.0	17	3.0	1.0	26	17	77	1.12	28.4	0.063	1.6	17.8	SST	CG	N
0.480	12.19	71586	2.75	69.9	.346	8.8	25	4.4	1.2	31	30	136	1.23	31.3	0.067	1.7	18.4	MW	CG	N
0.480	12.19	71586S	2.75	69.9	.346	8.8	21	3.7	.97	25	21	92	1.23	31.3	0.067	1.7	18.4	SST	CG	N
0.480	12.19	71599	2.75	69.9	.336	8.5	35	6.1	1.0	26	36	160	1.31	33.4	0.072	1.8	18.3	MW	CG	N
0.480	12.19	71599S	2.75	69.9	.336	8.5	30	5.2	.81	21	24	107	1.31	33.4	0.072	1.8	18.3	SST	CG	N
0.480	12.19	71614	2.75	69.9	.332	8.4	39	6.8	.99	25	39	173	1.37	34.8	0.074	1.9	18.5	MW	CG	N
0.480	12.19	71614S	2.75	69.9	.332	8.4	33	5.8	.78	20	26	116	1.37	34.8	0.074	1.9	18.5	SST	CG	N
0.480	12.19	71629	2.75	69.9	.318	8.1	58	10	.87	22	50	224	1.52	38.6	0.081	2.1	18.8	MW	CG	N
0.480	12.19	71629S	2.75	69.9	.318	8.1	50	8.7	.68	17	34	150	1.52	38.6	0.081	2.1	18.8	SST	CG	N
0.480	12.19	71475	3.00	76.2	.410	10.4	2.3	.40	2.1	53	4.8	21	.44	11.2	0.035	0.9	12.6	MW	CG	N
0.480	12.19	71475S	3.00	76.2	.410	10.4	2.0	.34	1.7	42	3.3	15	.44	11.2	0.035	0.9	12.6	SST	CG	N
0.480	12.19	71489	3.00	76.2	.404	10.3	3.1	.55	2.0	50	6.2	27	.50	12.7	0.038	1.0	13.1	MW	CG	N
0.480	12.19	71489S	3.00	76.2	.404	10.3	2.6	.46	1.6	40	4.2	19	.50	12.7	0.038	1.0	13.1	SST	CG	N
0.480	12.19	71503	3.00	76.2	.396	10.1	4.4	.77	1.9	48	8.3	37	.59	14.9	0.042	1.1	14.0	MW	CG	N
0.480	12.19	71503S	3.00	76.2	.396	10.1	3.8	.66	1.5	38	5.6	25	.59	14.9	0.042	1.1	14.0	SST	CG	N
0.480	12.19	12726	3.00	76.2	.390	9.9	5.1	.89	1.3	34	6.9	31	.64	16.3	0.045	1.1	14.3	SST	CG	N
0.480	12.19	71517	3.00	76.2	.390	9.9	5.3	.93	1.9	49	10	45	.70	17.7	0.045	1.1	15.5	MW	CG	N
0.480	12.19	71517S	3.00	76.2	.390	9.9	4.5	.79	1.5	39	6.9	31	.70	17.7	0.045	1.1	15.5	SST	CG	N
0.480	12.19	71531	3.00	76.2	.378	9.6	8.0	1.4	1.7	44	14	61	.89	22.5	0.051	1.3	17.4	MW	CG	N
0.480	12.19	71531S	3.00	76.2	.378	9.6	6.8	1.2	1.4	35	9.3	41	.89	22.5	0.051	1.3	17.4	SST	CG	N
0.480	12.19	71545	3.00	76.2	.370	9.4	11	1.9	1.6	41	17	76	.99	25.1	0.055	1.4	18.0	MW	CG	N
0.480	12.19	71545S	3.00	76.2	.370	9.4	9.1	1.6	1.3	32	12	52	.99	25.1	0.055	1.4	18.0	SST	CG	N
0.480	12.19	71559	3.00	76.2	.362	9.2	14	2.4	1.5	39	21	94	1.11	28.3	0.059	1.5	18.9	MW	CG	N
0.480	12.19	71559S	3.00	76.2	.362	9.2	12	2.1	1.2	31	14	63	1.11	28.3	0.059	1.5	18.9	SST	CG	N
0.480	12.19	71574	3.00	76.2	.354	9.0	18	3.1	1.4	37	25	113	1.24	31.6	0.063	1.6	19.8	MW	CG	N
0.480	12.19	71574S	3.00	76.2	.354	9.0	15	2.6	1.2	29	17	77	1.24	31.6	0.063	1.6	19.8	SST	CG	N
0.480	12.19	71587	3.00	76.2	.346	8.8	23	4.0	1.3	34	30	136	1.33	33.8	0.067	1.7	19.9	MW	CG	N
0.480	12.19	71587S	3.00	76.2	.346	8.8	20	3.4	1.1	27	21	92	1.33	33.8	0.067	1.7	19.9	SST	CG	N
0.480	12.19	71600	3.00	76.2	.336	8.5	32	5.6	1.1	29	36	160	1.43	36.3	0.072	1.8	19.9	MW	CG	N
0.480	12.19	71600S	3.00	76.2	.336	8.5	27	4.7	.89	23	24	107	1.43	36.3	0.072	1.8	19.9	SST	CG	N
0.480	12.19	71615	3.00	76.2	.332	8.4	36	6.3	1.1	28	39	173	1.48	37.6	0.074	1.9	20.0	MW	CG	N
0.480	12.19	71615S	3.00	76.2	.332	8.4	30	5.3	.86	22	26	116	1.48	37.6	0.074	1.9	20.0	SST	CG	N
0.480	12.19	71630	3.00	76.2	.318	8.1	53	9.3	.95	24	50	224	1.64	41.7	0.081	2.1	20.3	MW	CG	N
0.480	12.19	71630S	3.00	76.2	.318	8.1	45	7.9	.75	19	34	150	1.64	41.7	0.081	2.1	20.3	SST	CG	N
0.480	12.19	71601	3.25	82.6	.336	8.5	29	5.1	1.2	31	36	160	1.54	39.1	0.072	1.8	21.4	MW	CG	N
0.480	12.19	71601S	3.25	82.6	.336	8.5	25	4.4	.97	25	24	107	1.54	39.1	0.072	1.8	21.4	SST	CG	N
0.480	12.19	71616	3.25	82.6	.332	8.4	33	5.7	1.2	30	39	173	1.60	40.6	0.074	1.9	21.6	MW	CG	N
0.480	12.19	71616S	3.25	82.6	.332	8.4	28	4.9	.93	24	26	116	1.60	40.6	0.074	1.9	21.6	SST	CG	N
0.480	12.19	71631	3.25	82.6	.318	8.1	49	8.6	1.0	26	50	224	1.77	45.0	0.081	2.1	21.9	MW	CG	N
0.480	12.19	71631S	3.25	82.6	.318	8.1	42	7.3	.81	21	34	150	1.77	45.0	0.081	2.1	21.9	SST	CG	N
0.480	12.19	71602	3.50	88.9	.336	8.5	27	4.7	1.3	34	36	160	1.66	42.1	0.072	1.8	23.0	MW	CG	N
0.480	12.19	71602S	3.50	88.9	.336	8.5	23	4.0	1.0	27	24	107	1.66	42.1	0.072	1.8	23.0	SST	CG	N
0.480	12.19	71617	3.50	88.9	.332	8.4	30	5.3	1.3	32	39	173	1.72	43.7	0.074	1.9	23.3	MW	CG	N
0.480	12.19	71617S	3.50	88.9	.332	8.4	26	4.5	1.0	26	26	116	1.72	43.7	0.074	1.9	23.3	SST	CG	N
0.480	12.19	71632	3.50	88.9	.318	8.1	45	7.9	1.1	28	50	224	1.90	48.3	0.081	2.1	23.5	MW	CG	N
0.480	12.19	71632S	3.50	88.9	.318	8.1	38	6.7	.88	22	34	150	1.90	48.3	0.081	2.1	23.5	SST	CG	N
0.484	12.29	H-35	.25	6.4	.388	9.9	92	16	.10	2.4	8.8	39	.14	3.7	0.048	1.2	3.00	SPR	CG	Z
0.484	12.29	AA-63	.25	6.4	.384	9.8	97	17	.09	2.3	8.7	39	.15	3.8	0.050	1.3	3.00	SST	CG	N
0.484	12.29	UU-69	.25	6.4	.376	9.6	134	23	.08	2.1	11	49	.16	4.1	0.054	1.4	3.00	SST	CG	N
0.484	12.29	A10-50	.31	7.9	.424	10.8	12	2.2	.22	5.6	2.8	12	.09	2.3	0.030	0.8	3.00	MW	CG	GI
0.484	12.29	S-1575	.34	8.7	.404	10.3	37	6.5	.13	3.3	4.8	21	.16	4.1	0.040	1.0	3.00	SST	C	N
0.484	12.29	L-6	.34	8.7	.390	9.9	84	15	.10	2.5	8.3	37	.14	3.6	0.047	1.2	3.00	SPR	CG	Z
0.484	12.29	S-1042	.34	8.7	.360	9.1	167	29	.10	2.5	16	73	.22	5.5	0.062	1.6	3.50	SST	CG	N
0.484	12.29	00-86	.38	9.5	.414	10.5	10	1.8	.24	6.0	2.4	11	.14	3.6	0.035	0.9	4.00	SST	CG	N
0.484	12.29	GG-88	.38	9.5	.394	10.0	61	11	.11	2.9	6.8	30	.18	4.6	0.045	1.1	3.00	SST	C	N
0.484	12.29	S-45	.41	10.3	.402	10.2	16	2.8	.18	4.6	2.9	13	.23	5.7	0.041	1.0	4.50	SST	C	N
0.484	12.29	DD-83	.41	10.3	.384	9.8	97	17	.09	2.3	8.7	39	.15	3.8	0.050	1.3	3.00	SST	CG	N
0.484	12.29	N-87	.41	10.3	.376	9.6	102	18	.11	2.9	12	52	.19	4.8	0.054	1.4	3.50	SPR	CG	N
0.484	12.29	A-77	.41	10.3	.374	9.5	67	12	.16	4.0	11	47	.25	6.3	0.055	1.4	4.50	HD	CG	N
0.484	12.29	U-34	.41	10.3	.364	9.2	163	29	.10	2.5	16	70	.21	5.3	0.060	1.5	3.50	SPR	CG	N
0.484	12.29	3868	.47	11.9	.404	10.3	17	2.9	.25	6.3	4.2	19	.22	5.6	0.040	1.0	4.50	SPR	C	Z
0.484	12.29	KK-57	.47	11.9	.404	10.3	18	3.2	.26	6.7	4.8	21	.16	4.1	0.040	1.0	4.00	SST	CG	N
0.484	12.29	3807	.47	11.9	.372	9.4	72	13	.18	4.5	13	57	.25	6.4	0.056	1.4	4.50	SPR	CG	Z
0.484	12.29	A9-55	.47	11.9	.348	8.8	189	33	.11	2.9	21	95	.27	6.9	0.068	1.7	4.00	SST	CG	N
0.484	12.29	N-112	.48	12.3	.416	10.6	9.2	1.6	.34	8.6	3.1	14	.14	3.5	0.034	0.9	4.00	SST	CG	N
0.484	12.29	GG-1	.50	12.7	.444	11.3	1.0	.18	.40	10	.41	1.8	.10	2.5	0.020	0.5	4.00	SST	C	N
0.484	12.29	BB-93	.50	12.7	.434	11.0	2.2	.39	.37	9.4	.83	3.7	.13	3.3	0.025	0.6	4.25	SST	C	N
0.484	12.29	10847	.50	12.7	.428	10.9	6.2	1.1	.40	10	2.5	11	.10	2.5	0.028	0.7	3.50	MW	CG	Z
0.484	12.29	H-28	.50	12.7	.402	10.2	14	2.4	.30	7.5	4.1	18	.21	5.2	0.041	1.0	5.00	SST	CG	N
0.484	12.29	Y-18	.50	12.7	.394	10.0	20	3.5	.28	7.0	5.6	25	.23	5.7	0.045	1.1	5.00	SST	CG	N
0.484	12.29	2660	.50	12.7	.382	9.7	40	7.0	.25	6.2	9.8	44	.26	6.5	0.051	1.3	5.00	SPR	CG	Z
0.484	12.29	12236	.50	12.7	.376	9.6	61	11	.19	4.8	12	52	.24	6.2	0.054	1.4	4.50	SPR	CG	N
0.484	12.29	11384	.50	12.7	.374	9.5	67	12	.25	6.4	17	75	.25	6.3	0.055	1.4	4.50	MW	CG	Z
0.484	12.29	CC-84	.53	13.5	.384	9.8	32	5.7	.27	6.8	8.7	39	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.484	12.29	A11-68	.53	13.5	.338	8.6	174	30	.14	3.6	25	111	.37	9.3	0.073	1.9	5.00	SST	CG	N
0.484	12.29	1757	.56	14.3	.410	10.4	15	2.6	.37	9.5	5.6	25	.19	4.7	0.037	0.9	4.00	MW	C	Z
0.484	12.29	AA-81	.56	14.3	.410	10.4	4.8	.84	.28	7.2	1.4	6.0	.28	7.0	0.037	0.9	7.50	SST	CG	N
0.484	12.29	S-1009	.56	14.3	.404	10.3	16	2.8	.30	7.5	4.8	21	.21	5.3	0.040	1.0	4.25	SST	C	N
0.484	12.29	FF-58	.56	14.3	.394	10.0	21	3.6	.33	8.4	6.8	30	.23	5.7	0.045	1.1	5.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.484	12.29	XX-37	.56	14.3	.390	9.9	28	4.9	.28	7.1	7.8	35	.28	7.2	0.047	1.2	5.00	SPR	C	Z
0.484	12.29	10993	.56	14.3	.372	9.4	90	16	.14	3.6	13	57	.28	7.1	0.056	1.4	4.00	HD	C	Z
0.484	12.29	N-134	.59	15.1	.420	10.7	3.3	.57	.37	9.4	1.2	5.4	.22	5.7	0.032	0.8	7.00	SPR	CG	N
0.484	12.29	W-35	.59	15.1	.414	10.5	5.2	.91	.35	8.8	1.8	8.0	.25	6.2	0.035	0.9	6.00	SST	C	N
0.484	12.29	11197	.63	15.9	.420	10.7	3.9	.68	.41	10	1.6	7.0	.22	5.5	0.032	0.8	5.75	SST	C	N
0.484	12.29	10781	.63	15.9	.384	9.8	44	7.7	.21	5.3	9.3	41	.23	5.7	0.050	1.3	4.50	SPR	CG	N
0.484	12.29	PP-87	.63	15.9	.384	9.8	31	5.5	.29	7.5	9.3	41	.28	7.0	0.050	1.3	5.50	SPR	CG	Z
0.484	12.29	2625	.63	15.9	.372	9.4	72	13	.25	6.3	18	80	.25	6.4	0.056	1.4	4.50	MW	CG	Z
0.484	12.29	B9-12	.69	17.4	.436	11.1	3.7	.64	.47	12	1.7	7.7	.10	2.6	0.024	0.6	3.33	MW	C	Z
0.484	12.29	S-866	.72	18.2	.414	10.5	5.2	.91	.51	13	2.6	12	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.484	12.29	S-1401	.72	18.2	.360	9.1	82	14	.20	5.1	16	73	.31	7.9	0.062	1.6	5.00	SST	CG	N
0.484	12.29	S-1560	.72	18.2	.304	7.7	383	67	.11	2.9	43	192	.50	12.6	0.090	2.3	5.50	SST	CG	N
0.484	12.29	W-60	.75	19.1	.448	11.4	.14	.02	.53	13	.07	.33	.22	5.6	0.018	0.5	11.3	SST	C	N
0.484	12.29	N-85	.75	19.1	.436	11.1	1.4	.25	.61	15	.86	3.8	.14	3.7	0.024	0.6	5.00	SST	C	N
0.484	12.29	FF-35	.75	19.1	.432	11.0	2.0	.35	.59	15	1.2	5.2	.16	4.0	0.026	0.7	5.00	SST	C	N
0.484	12.29	II-75	.75	19.1	.404	10.3	9.3	1.6	.47	12	4.4	19	.28	7.1	0.040	1.0	6.00	SST	C	N
0.484	12.29	JJ-97	.75	19.1	.376	9.6	38	6.7	.30	7.7	12	52	.32	8.2	0.054	1.4	6.00	SPR	CG	GI
0.484	12.29	10934	.75	19.1	.358	9.1	71	13	.26	6.5	18	81	.39	10.0	0.063	1.6	6.25	SPR	CG	Z
0.484	12.29	3594	.75	19.1	.340	8.6	138	24	.26	6.6	36	159	.43	11.0	0.072	1.8	6.00	MW	CG	GI
0.484	12.29	S-1539	.78	19.8	.426	10.8	2.0	.35	.59	15	1.2	5.1	.20	5.0	0.029	0.7	6.75	SST	CG	N
0.484	12.29	10899	.78	19.8	.334	8.5	285	50	.10	2.6	29	128	.33	8.3	0.075	1.9	4.33	SPR	CG	N
0.484	12.29	12425	.81	20.6	.430	10.9	3.2	.56	.66	17	2.1	9.4	.15	3.8	0.027	0.7	4.50	MW	C	N
0.484	12.29	1653	.81	20.6	.350	8.9	80	14	.27	6.9	22	97	.47	11.9	0.067	1.7	7.00	HD	CG	Z
0.484	12.29	12215	.84	21.4	.424	10.8	3.1	.54	.63	16	2.0	8.8	.21	5.3	0.030	0.8	6.00	MW	C	Z
0.484	12.29	W-64	.84	21.4	.416	10.6	6.2	1.1	.50	13	3.1	14	.20	5.2	0.034	0.9	5.00	SST	C	N
0.484	12.29	10557	.84	21.4	.346	8.8	107	19	.22	5.6	24	106	.43	10.9	0.069	1.8	6.25	SPR	CG	Z
0.484	12.29	I-31	.88	22.2	.446	11.3	.31	.05	.70	18	.22	.97	.17	4.3	0.019	0.5	8.00	MW	C	N
0.484	12.29	H-90	.88	22.2	.440	11.2	.31	.05	.59	15	.18	.82	.28	7.1	0.022	0.6	11.8	SST	C	N
0.484	12.29	4285	.88	22.2	.360	9.1	47	8.2	.37	9.4	17	77	.50	12.6	0.062	1.6	8.00	SPR	CG	Z
0.484	12.29	CC-1	.88	22.2	.300	7.6	270	47	.17	4.3	46	204	.69	17.5	0.092	2.3	7.50	SST	CG	N
0.484	12.29	G-75	.88	22.2	.266	6.8	641	112	.003	.08	1.9	8.6	.87	22.1	0.109	2.8	8.00	HD	CG	N
0.484	12.29	PP-80	.91	23.0	.418	10.6	4.1	.72	.66	17	2.7	12	.25	6.3	0.033	0.8	6.50	SPR	C	N
0.484	12.29	B12-21	.94	23.8	.402	10.2	12	2.0	.47	12	5.5	25	.25	6.2	0.041	1.0	6.00	SPR	CG	N
0.484	12.29	YY-53	.94	23.8	.394	10.0	15	2.7	.45	11	6.8	30	.32	8.0	0.045	1.1	6.00	SST	C	N
0.484	12.29	TT-40	.94	23.8	.392	10.0	18	3.1	.41	10	7.3	32	.26	6.7	0.046	1.2	5.75	SST	CG	N
0.484	12.29	S-399	.94	23.8	.358	9.1	48	8.4	.36	9.1	17	76	.47	12.0	0.063	1.6	7.50	SST	CG	N
0.484	12.29	II-90	.94	23.8	.350	8.9	67	12	.33	8.3	22	97	.54	13.6	0.067	1.7	8.00	SPR	CG	N
0.484	12.29	1525	1.00	25.4	.418	10.6	2.1	.36	.60	15	1.2	5.5	.40	10.1	0.033	0.8	11.0	SPR	C	Z
0.484	12.29	S-3135	1.00	25.4	.410	10.4	6.6	1.1	.58	15	3.8	17	.22	5.6	0.037	0.9	6.00	SST	CG	N
0.484	12.29	10491	1.00	25.4	.394	10.0	14	2.4	.52	13	7.3	32	.32	8.0	0.045	1.1	7.00	SPR	CG	Z
0.484	12.29	1885	1.00	25.4	.394	10.0	17	3.1	.58	15	10	45	.27	6.9	0.045	1.1	6.00	MW	CG	Z
0.484	12.29	11815	1.00	25.4	.388	9.9	15	2.7	.57	15	8.8	39	.38	9.8	0.048	1.2	8.00	SPR	CG	Z
0.484	12.29	3088	1.00	25.4	.384	9.8	17	3.0	.55	14	9.3	41	.43	10.8	0.050	1.3	8.50	SPR	CG	Z
0.484	12.29	OO-66	1.00	25.4	.384	9.8	27	4.8	.34	8.6	9.3	41	.30	7.6	0.050	1.3	6.00	SPR	CG	N
0.484	12.29	DD-94	1.00	25.4	.384	9.8	24	4.3	.38	9.6	9.3	41	.33	8.3	0.050	1.3	6.50	SPR	CG	N
0.484	12.29	12304	1.00	25.4	.374	9.5	33	5.8	.37	9.3	12	54	.44	11.2	0.055	1.4	7.00	SPR	C	Z
0.484	12.29	TT-42	1.00	25.4	.360	9.1	41	7.2	.40	10	16	73	.50	12.6	0.062	1.6	8.00	SST	CG	N
0.484	12.29	YY-31	1.00	25.4	.360	9.1	94	16	.18	4.7	17	77	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.484	12.29	10598	1.00	25.4	.356	9.0	54	9.5	.35	8.9	19	85	.51	13.0	0.064	1.6	8.00	SPR	CG	Z
0.484	12.29	Z-47	1.00	25.4	.294	7.5	332	58	.16	4.2	54	241	.76	19.3	0.095	2.4	8.00	SPR	CG	N
0.484	12.29	RR-60	1.03	26.2	.274	7.0	535	94	.13	3.4	72	319	.84	21.3	0.105	2.7	8.00	SPR	CG	Z
0.484	12.29	A-94	1.06	27.0	.300	7.6	270	47	.17	4.3	46	204	.69	17.5	0.092	2.3	7.50	SST	CG	N
0.484	12.29	B5-35	1.09	27.8	.400	10.2	10	1.8	.57	15	5.9	26	.34	8.5	0.042	1.1	7.00	SPR	C	N
0.484	12.29	L-21	1.09	27.8	.390	9.9	16	2.8	.48	12	7.7	34	.31	7.8	0.047	1.2	6.50	SST	CG	N
0.484	12.29	S-1092	1.13	28.6	.434	11.0	1.0	.18	.93	23	.93	4.2	.20	5.1	0.025	0.6	7.00	SST	C	N
0.484	12.29	A-35	1.13	28.6	.420	10.7	1.8	.32	.74	19	1.3	6.0	.38	9.8	0.032	0.8	11.0	SPR	C	N
0.484	12.29	H-47	1.13	28.6	.386	9.8	14	2.5	.65	16	9.3	42	.44	11.2	0.049	1.2	9.00	SPR	CG	Z
0.484	12.29	XX-68	1.13	28.6	.382	9.7	22	3.8	.45	11	9.8	44	.43	11.0	0.051	1.3	7.50	SPR	C	Z
0.484	12.29	10351	1.16	29.4	.360	9.1	35	6.2	.47	12	17	74	.68	17.3	0.062	1.6	10.0	SPR	C	Z
0.484	12.29	S-1126	1.19	30.2	.426	10.8	1.7	.30	.94	24	1.6	7.1	.25	6.3	0.029	0.7	7.50	SST	C	N
0.484	12.29	H-39	1.19	30.2	.340	8.6	60	11	.40	10	24	106	.72	18.3	0.072	1.8	10.0	SST	CG	N
0.484	12.29	A-39	1.22	31.0	.420	10.7	2.9	.51	.89	23	2.6	11	.26	6.5	0.032	0.8	7.00	SST	C	N
0.484	12.29	S-822	1.22	31.0	.390	9.9	6.8	1.2	.62	16	4.2	19	.60	15.2	0.047	1.2	12.8	SST	CG	N
0.484	12.29	10558	1.22	31.0	.356	9.0	42	7.4	.45	12	19	85	.69	17.5	0.064	1.6	9.75	SPR	C	Z
0.484	12.29	S-294	1.25	31.8	.416	10.6	4.6	.80	.67	17	3.1	14	.24	6.0	0.034	0.9	6.00	SST	C	N
0.484	12.29	10695	1.25	31.8	.376	9.6	28	4.9	.42	11	12	52	.41	10.3	0.054	1.4	7.50	SPR	CG	Z
0.484	12.29	11403	1.25	31.8	.376	9.6	21	3.7	.52	13	11	49	.51	13.0	0.054	1.4	8.50	SST	C	N
0.484	12.29	A11-31	1.28	32.5	.392	10.0	13	2.3	.55	14	7.3	32	.33	8.3	0.046	1.2	7.00	SST	CG	N
0.484	12.29	A15-60	1.28	32.5	.350	8.9	55	9.5	.38	9.6	21	91	.57	14.5	0.067	1.7	8.50	SST	CG	N
0.484	12.29	A9-37	1.28	32.5	.340	8.6	65	11	.39	10	26	113	.76	19.2	0.072	1.8	10.5	SPR	CG	N
0.484	12.29	A13-67	1.31	33.3	.354	9.0	47	8.1	.43	11	20	89	.62	15.7	0.065	1.7	9.50	SPR	CG	N
0.484	12.29	S-802	1.34	34.1	.392	10.0	10	1.8	.71	18	7.3	32	.39	9.9	0.046	1.2	8.50	SST	CG	N
0.484	12.29	1871	1.34	34.1	.340	8.6	79	14	.32	8.2	26	113	.65	16.5	0.072	1.8	9.00	HD	CG	Z
0.484	12.29	B10-61	1.35	34.3	.376	9.6	26	4.5	.45	12	12	52	.43	11.0	0.054	1.4	8.00	SPR	CG	Z
0.484	12.29	11983	1.38	34.9	.400	10.2	10	1.8	.57	15	5.9	26	.34	8.5	0.042	1.1	7.00	SPR	C	Z
0.484	12.29	CC-9	1.38	34.9	.394	10.0	7.6	1.3	.90	23	6.8	30	.45	11.4	0.045	1.1	10.0	SST	CG	N
0.484	12.29	S-945	1.38	34.9	.384	9.8	13	2.4	.65	16	8.7	39	.46	11.7	0.050	1.3	9.25	SST	CG	N
0.484	12.29	3832	1.38	34.9	.340	8.6	55	9.7	.46	12	26	113	.86	21.9	0.072	1.8	12.0	HD	CG	Z
0.484	12.29	12226	1.38	34.9	.334	8.5	66	12	.43	11	29	128	.90	22.9	0.075	1.9	12.0	SPR	CG	N
0.484	12.29	3903	1.38	34.9	.264	6.7	503	88	.16	4.0	79	351	1.10	27.9	0.110	2.8	10.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.484	12.29	B14-47	1.41	35.7	.418	10.6	2.9	.50	1.1	27	3.0	14	.28	7.1	0.033	0.8	8.50	SPR	CG	N
0.484	12.29	B9-8	1.44	36.5	.396	10.1	14	2.5	.48	12	6.8	30	.29	7.3	0.044	1.1	6.50	SPR	CG	Z
0.484	12.29	YY-60	1.44	36.5	.392	10.0	13	2.2	.61	15	7.8	34	.41	10.5	0.046	1.2	8.00	SPR	C	Z
0.484	12.29	A15-66	1.47	37.3	.364	9.2	29	5.1	.51	13	15	66	.57	14.5	0.060	1.5	9.50	SST	CG	N
0.484	12.29	2620	1.47	37.3	.356	9.0	33	5.7	.59	15	19	85	.77	19.5	0.064	1.6	12.0	HD	CG	Z
0.484	12.29	S-1376	1.50	38.1	.414	10.5	1.3	.23	.84	21	1.1	4.9	.66	16.7	0.035	0.9	17.8	SST	C	N
0.484	12.29	3570	1.50	38.1	.408	10.4	4.2	.74	1.0	27	4.4	20	.42	10.6	0.038	1.0	10.0	SPR	C	Z
0.484	12.29	12219	1.50	38.1	.408	10.4	6.8	1.2	.65	17	4.4	20	.27	6.8	0.038	1.0	7.00	SPR	CG	Z
0.484	12.29	3665	1.50	38.1	.404	10.3	6.7	1.2	.76	19	5.1	23	.37	9.4	0.040	1.0	8.25	SPR	C	Z
0.484	12.29	S-1490	1.50	38.1	.402	10.2	6.5	1.1	.80	20	5.2	23	.34	8.6	0.041	1.0	8.25	SST	CG	N
0.484	12.29	A13-40	1.50	38.1	.390	9.9	14	2.5	.59	15	8.3	37	.38	9.6	0.047	1.2	8.00	SPR	CG	GI
0.484	12.29	S-1413	1.50	38.1	.382	9.7	10	1.8	.84	21	8.7	39	.66	16.8	0.051	1.3	12.0	SST	C	N
0.484	12.29	2729	1.50	38.1	.376	9.6	17	3.0	.68	17	12	52	.59	15.1	0.054	1.4	11.0	HD	CG	Z
0.484	12.29	H-42	1.50	38.1	.370	9.4	22	3.8	.63	16	14	60	.68	17.4	0.057	1.4	11.0	SPR	C	Z
0.484	12.29	PP-56	1.50	38.1	.364	9.2	31	5.4	.52	13	16	70	.60	15.2	0.060	1.5	10.0	SPR	CG	GI
0.484	12.29	B9-69	1.50	38.1	.364	9.2	20	3.6	.66	17	13	60	.84	21.3	0.060	1.5	14.0	SPR	CG	N
0.484	12.29	F-48	1.50	38.1	.360	9.1	35	6.2	.49	12	17	77	.62	15.7	0.062	1.6	10.0	SPR	CG	Z
0.484	12.29	3153	1.50	38.1	.340	8.6	63	11	.40	10	26	113	.77	19.7	0.072	1.8	10.8	SPR	CG	Z
0.484	12.29	Q-75	1.50	38.1	.260	6.6	628	110	.13	3.4	83	369	1.01	25.6	0.112	2.8	9.00	SPR	CG	Z
0.484	12.29	O-96	1.53	38.9	.432	11.0	.49	.09	1.1	28	.53	2.4	.44	11.2	0.026	0.7	16.0	MW	C	N
0.484	12.29	B15-36	1.53	38.9	.388	9.9	6.8	1.2	.86	22	5.8	26	.67	17.1	0.048	1.2	14.0	SST	CG	N
0.484	12.29	S-223	1.56	39.7	.412	10.5	2.9	.51	1.2	31	3.5	16	.36	9.1	0.036	0.9	10.0	SST	CG	N
0.484	12.29	4286	1.56	39.7	.374	9.5	16	2.8	.77	20	12	54	.69	17.5	0.055	1.4	12.5	SPR	CG	Z
0.484	12.29	10039	1.59	40.5	.372	9.4	17	3.0	.75	19	13	57	.70	17.8	0.056	1.4	12.5	SPR	CG	N
0.484	12.29	10833	1.63	41.3	.404	10.3	8.0	1.4	.64	16	5.1	23	.29	7.4	0.040	1.0	7.25	SPR	CG	Z
0.484	12.29	J-40	1.63	41.3	.384	9.8	16	2.8	.55	14	8.7	39	.40	10.2	0.050	1.3	8.00	SST	CG	N
0.484	12.29	11244	1.63	41.3	.360	9.1	33	5.8	.52	13	17	77	.65	16.5	0.062	1.6	10.5	SPR	CG	Z
0.484	12.29	S-1268	1.63	41.3	.340	8.6	51	8.9	.47	12	24	106	.83	21.0	0.072	1.8	11.5	SST	CG	N
0.484	12.29	4226	1.63	41.3	.324	8.2	85	15	.41	10	35	154	1.00	25.4	0.080	2.0	12.5	SPR	CG	GI
0.484	12.29	10356	1.69	42.8	.408	10.4	6.8	1.2	.65	17	4.4	20	.30	7.7	0.038	1.0	7.00	SPR	C	Z
0.484	12.29	10320	1.69	42.8	.360	9.1	29	5.1	.60	15	17	77	.79	20.1	0.062	1.6	11.8	SPR	C	Z
0.484	12.29	S-843	1.69	42.8	.340	8.6	47	8.2	.51	13	24	106	.90	22.9	0.072	1.8	12.5	SST	CG	N
0.484	12.29	II-40	1.69	42.8	.264	6.7	366	64	.22	5.5	79	351	1.43	36.3	0.110	2.8	13.0	SPR	CG	N
0.484	12.29	11270	1.72	43.6	.288	7.3	210	37	.28	7.2	59	263	1.27	32.4	0.098	2.5	13.0	SPR	CG	Z
0.484	12.29	2888	1.75	44.5	.360	9.1	24	4.1	.74	19	17	77	.93	23.6	0.062	1.6	14.0	SPR	C	Z
0.484	12.29	3240	1.75	44.5	.324	8.2	112	20	.31	7.9	35	154	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
0.484	12.29	10493	1.81	46.0	.388	9.9	8.4	1.5	1.1	27	8.8	39	.62	15.8	0.048	1.2	13.0	SPR	CG	GI
0.484	12.29	10282	1.81	46.0	.376	9.6	19	3.4	.60	15	12	52	.59	15.1	0.054	1.4	10.0	SPR	C	Z
0.484	12.29	XX-66	1.81	46.0	.360	9.1	28	4.9	.62	16	17	77	.74	18.9	0.062	1.6	12.0	SPR	CG	Z
0.484	12.29	H-46	1.81	46.0	.360	9.1	19	3.3	.87	22	16	73	.93	23.6	0.062	1.6	15.0	SST	CG	N
0.484	12.29	2790	1.84	46.8	.356	9.0	33	5.7	.59	15	19	85	.83	21.1	0.064	1.6	12.0	SPR	C	Z
0.484	12.29	10413	1.88	47.6	.376	9.6	15	2.7	.75	19	12	52	.65	16.5	0.054	1.4	12.0	SPR	CG	Z
0.484	12.29	10723	1.88	47.6	.360	9.1	28	4.9	.62	16	17	77	.74	18.9	0.062	1.6	12.0	SPR	C	Z
0.484	12.29	N-82	1.91	48.4	.424	10.8	1.2	.21	1.6	40	1.9	8.6	.33	8.4	0.030	0.8	11.0	SST	CG	N
0.484	12.29	10853	1.94	49.2	.324	8.2	59	10	.55	14	32	144	1.24	31.5	0.080	2.0	15.5	SST	CG	N
0.484	12.29	A-29	2.00	50.8	.434	11.0	.46	.08	1.7	43	.77	3.4	.33	8.3	0.025	0.6	13.0	SST	C	N
0.484	12.29	S-323	2.00	50.8	.390	9.9	5.6	.98	1.3	33	7.3	32	.71	17.9	0.047	1.2	15.0	SST	CG	N
0.484	12.29	10949	2.00	50.8	.348	8.8	30	5.3	.75	19	23	101	1.09	27.6	0.068	1.7	16.0	SPR	CG	Z
0.484	12.29	VV-29	2.00	50.8	.340	8.6	46	8.1	.55	14	26	113	1.01	25.6	0.072	1.8	14.0	HD	CG	Z
0.484	12.29	B9-68	2.06	52.4	.360	9.1	24	4.2	.72	18	17	77	.85	21.7	0.062	1.6	13.8	SPR	CG	Z
0.484	12.29	4369	2.19	55.6	.390	9.9	5.7	1.0	1.4	36	8.0	36	.79	20.0	0.047	1.2	16.8	SPR	CG	Z
0.484	12.29	11484	2.25	57.2	.400	10.2	5.8	1.0	1.0	26	5.9	26	.50	12.8	0.042	1.1	11.0	SPR	CG	Z
0.484	12.29	10417	2.25	57.2	.394	10.0	6.6	1.2	1.1	28	7.3	32	.56	14.3	0.045	1.1	12.5	SPR	CG	Z
0.484	12.29	B10-60	2.25	57.2	.384	9.8	9.5	1.7	.92	23	8.7	39	.61	15.6	0.050	1.3	12.3	SST	CG	N
0.484	12.29	10773	2.38	60.3	.452	11.5	.06	.01	2.1	53	.12	.54	.27	6.9	0.016	0.4	16.0	SST	C	N
0.484	12.29	2646	2.44	61.9	.388	9.9	9.7	1.7	1.3	32	12	54	.60	15.2	0.048	1.2	11.5	MW	C	Z
0.484	12.29	10694	2.44	61.9	.360	9.1	22	3.8	.80	20	17	77	.93	23.6	0.062	1.6	15.0	SPR	CG	GI
0.484	12.29	S-1565	2.50	63.5	.410	10.4	3.3	.59	1.1	29	3.8	17	.37	9.4	0.037	0.9	10.0	SST	CG	N
0.484	12.29	2784	2.50	63.5	.376	9.6	9.2	1.6	1.3	32	12	52	1.07	27.1	0.054	1.4	18.8	SPR	C	GI
0.484	12.29	10244	2.50	63.5	.360	9.1	19	3.4	.89	23	17	77	1.09	27.6	0.062	1.6	16.5	SPR	C	BO
0.484	12.29	11633	2.50	63.5	.322	8.2	59	10	.61	15	36	159	1.46	37.0	0.081	2.1	18.0	SPR	CG	Z
0.484	12.29	10713	2.81	71.4	.388	9.9	6.8	1.2	1.3	33	8.8	39	.74	18.9	0.048	1.2	15.5	SPR	CG	Z
0.484	12.29	B17-196	3.00	76.2	.360	9.1	25	4.4	.69	18	17	77	.88	22.4	0.062	1.6	13.3	SPR	C	Z
0.484	12.29	12489	3.00	76.2	.350	8.9	23	4.0	1.3	34	30	135	1.37	34.9	0.067	1.7	19.5	MW	C	N
0.484	12.29	12706	3.00	76.2	.350	8.9	22	3.9	1.4	35	30	135	1.34	34.0	0.067	1.7	20.0	MW	CG	N
0.484	12.29	11658	3.03	77.0	.324	8.2	45	7.8	.77	20	35	154	1.76	44.7	0.080	2.0	22.0	SPR	CG	Z
0.484	12.29	12071	3.06	77.8	.364	9.2	9.4	1.6	1.4	35	13	58	1.68	42.7	0.060	1.5	28.0	SPR	CG	Z
0.484	12.29	12316	3.38	85.7	.386	9.8	4.6	.80	2.0	52	9.3	42	1.23	31.1	0.049	1.2	24.0	SPR	C	Z
0.484	12.29	2685	3.50	88.9	.384	9.8	5.0	.87	1.9	47	9.3	41	1.25	31.8	0.050	1.3	24.0	HD	C	Z
0.484	12.29	N-42	4.44	112.7	.360	9.1	10	1.8	1.7	44	17	77	1.86	47.2	0.062	1.6	30.0	SPR	CG	Z
0.484	12.29	1693	4.63	117.5	.374	9.5	6.9	1.2	1.8	45	12	54	1.49	37.7	0.055	1.4	26.0	SPR	C	Z
0.484	12.29	12206	5.25	133.4	.388	9.9	2.6	.45	3.4	86	8.6	38	1.87	47.5	0.048	1.2	38.0	SPR	C	Z
0.484	12.29	12308	5.63	142.9	.384	9.8	3.4	.59	2.7	70	9.3	41	1.78	45.1	0.050	1.3	34.5	SPR	C	Z
0.484	12.29	S-3182	12.0	304.8	.422	10.7	.10	.02	8.1	206	.82	3.6	3.91	99.2	0.031	0.8	125.0	SST	C	N
0.485	12.32	12693	1.00	25.4	.277	7.0	441	77	.15	3.7	65	288	.83	21.1	0.104	2.6	8.00	SST	CG	N
0.492	12.50	12715	.97	24.6	.402	10.2	13	2.3	.65	17	8.6	38	.32	8.0	0.045	1.1	7.00	MW	CG	Z
0.500	12.70	B8-11	.25	6.4	.402	10.2	90	16	.10	2.5	9.1	40	.15	3.7	0.049	1.2	3.00	SPR	CG	GI
0.500	12.70	G-100	.38	9.5	.464	11.8	.45	.08	.27	6.8	.12	.53	.11	2.7	0.018	0.5	5.00	MW	C	N
0.500	12.70	G-19	.38	9.5	.450	11.4	5.2	.92	.28	7.0	1.4	6.4	.10	2.5	0.025	0.6	3.00	MW	C	Z
0.500	12.70	S-1097	.38	9.5	.448	11.4	1.8	.31	.22	5.6	.39	1.7	.16	4.0	0.026	0.7	5.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.500	12.70	L-4	.38	9.5	.402	10.2	90	16	.10	2.5	9.1	40	.20	5.0	0.049	1.2	3.00	SPR	C	Z
0.500	12.70	LL-83	.38	9.5	.356	9.0	493	86	.05	1.3	25	110	.29	7.3	0.072	1.8	3.00	SPR	C	Z
0.500	12.70	BB-92	.41	10.3	.432	11.0	8.3	1.4	.27	6.9	2.2	9.9	.14	3.5	0.034	0.9	4.00	SST	CG	N
0.500	12.70	10884	.44	11.1	.468	11.9	.17	.03	.31	7.9	.05	.23	.13	3.3	0.016	0.4	7.00	MW	C	Z
0.500	12.70	H-54	.44	11.1	.448	11.4	6.2	1.1	.33	8.3	2.0	9.0	.08	2.0	0.026	0.7	3.00	MW	CG	Z
0.500	12.70	S-351	.44	11.1	.422	10.7	7.5	1.3	.20	5.2	1.5	6.8	.23	5.9	0.039	1.0	6.00	SST	CG	N
0.500	12.70	3751	.44	11.1	.386	9.8	87	15	.15	3.8	13	59	.23	5.8	0.057	1.4	4.00	SPR	CG	Z
0.500	12.70	4179	.50	12.7	.462	11.7	.56	.10	.39	9.8	.22	.96	.11	2.9	0.019	0.5	5.00	MW	C	BO
0.500	12.70	S-108	.50	12.7	.460	11.7	.60	.11	.38	9.7	.23	1.0	.12	3.0	0.020	0.5	5.00	SST	C	N
0.500	12.70	2931	.50	12.7	.456	11.6	1.0	.18	.37	9.3	.38	1.7	.13	3.4	0.022	0.6	5.00	MW	C	Z
0.500	12.70	S-905	.50	12.7	.444	11.3	3.4	.60	.36	9.1	1.2	5.5	.14	3.6	0.028	0.7	4.00	SST	C	N
0.500	12.70	4118	.50	12.7	.432	11.0	19	3.3	.17	4.3	3.2	14	.14	3.5	0.034	0.9	3.00	SPR	C	Z
0.500	12.70	Y-41	.50	12.7	.430	10.9	11	1.9	.31	7.9	3.3	15	.14	3.6	0.035	0.9	4.00	SPR	CG	Z
0.500	12.70	S-118	.50	12.7	.406	10.3	33	5.7	.23	5.8	7.5	33	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.500	12.70	NN-4	.50	12.7	.400	10.2	39	6.9	.23	5.8	9.0	40	.23	5.7	0.050	1.3	4.50	SPR	CG	N
0.500	12.70	B1-33	.50	12.7	.388	9.9	72	13	.16	4.2	12	52	.22	5.7	0.056	1.4	4.00	SST	CG	N
0.500	12.70	3215	.53	13.5	.460	11.7	.69	.12	.43	11	.30	1.3	.10	2.5	0.020	0.5	5.00	MW	CG	Z
0.500	12.70	G-11	.53	13.5	.398	10.1	36	6.3	.23	5.7	8.1	36	.31	7.8	0.051	1.3	5.00	SPR	C	N
0.500	12.70	O-52	.53	13.5	.310	7.9	766	134	.06	1.6	49	218	.38	9.7	0.095	2.4	4.00	SST	CG	N
0.500	12.70	L-52	.55	13.9	.300	7.6	1123	197	.05	1.4	61	271	.40	10.2	0.100	2.5	4.00	SPR	CG	Z
0.500	12.70	F-78	.56	14.3	.456	11.6	1.0	.18	.43	11	.44	2.0	.13	3.4	0.022	0.6	5.00	MW	C	Z
0.500	12.70	EE-22	.56	14.3	.420	10.7	8.2	1.4	.32	8.2	2.6	12	.24	6.1	0.040	1.0	6.00	SST	CG	N
0.500	12.70	LL-26	.56	14.3	.420	10.7	17	2.9	.30	7.5	5.0	22	.17	4.3	0.040	1.0	4.25	SPR	CG	GI
0.500	12.70	VV-37	.56	14.3	.416	10.6	23	4.1	.25	6.3	5.7	26	.21	5.3	0.042	1.1	4.00	SPR	C	GI
0.500	12.70	S-1304	.56	14.3	.392	10.0	48	8.4	.22	5.6	11	47	.24	6.2	0.054	1.4	4.50	SST	CG	N
0.500	12.70	JJ-37	.56	14.3	.380	9.7	55	9.6	.20	5.1	11	49	.36	9.1	0.060	1.5	6.00	SPR	CG	N
0.500	12.70	XX-62	.56	14.3	.316	8.0	607	106	.08	2.0	48	214	.41	10.5	0.092	2.3	4.50	SPR	CG	Z
0.500	12.70	S-1398	.56	14.3	.310	7.9	681	119	.07	1.8	49	218	.40	10.3	0.095	2.4	4.25	SST	CG	N
0.500	12.70	3611	.59	15.1	.430	10.9	11	1.9	.42	11	4.5	20	.18	4.4	0.035	0.9	4.00	MW	C	Z
0.500	12.70	12673	.59	15.1	.426	10.8	14	2.4	.40	10	5.5	24	.19	4.7	0.037	0.9	4.00	MW	C	Z
0.500	12.70	O-79	.59	15.1	.412	10.5	19	3.3	.35	8.8	6.6	29	.22	5.6	0.044	1.1	5.00	SPR	CG	Z
0.500	12.70	A14-55	.61	15.5	.420	10.7	19	3.3	.26	6.7	5.0	22	.16	4.1	0.040	1.0	4.00	SPR	CG	GI
0.500	12.70	Q-12	.63	15.9	.436	11.1	4.3	.75	.43	11	1.8	8.2	.19	4.9	0.032	0.8	5.00	SST	C	N
0.500	12.70	A14-46	.63	15.9	.424	10.8	13	2.4	.30	7.5	4.0	18	.15	3.9	0.038	1.0	4.00	SST	CG	N
0.500	12.70	PP-94	.63	15.9	.424	10.8	12	2.1	.35	8.9	4.3	19	.17	4.3	0.038	1.0	4.50	SPR	CG	GI
0.500	12.70	A11-35	.63	15.9	.422	10.7	15	2.6	.29	7.3	4.3	19	.16	4.0	0.039	1.0	4.00	SST	CG	N
0.500	12.70	AA-74	.63	15.9	.420	10.7	13	2.2	.39	9.8	4.9	22	.24	6.1	0.040	1.0	5.00	SPR	C	N
0.500	12.70	OO-8	.63	15.9	.420	10.7	15	2.6	.33	8.4	5.0	22	.18	4.6	0.040	1.0	4.50	SPR	CG	N
0.500	12.70	3831	.63	15.9	.416	10.6	16	2.7	.37	9.4	5.7	26	.25	6.4	0.042	1.1	5.00	SPR	C	Z
0.500	12.70	S-1302	.63	15.9	.412	10.5	20	3.5	.31	7.9	6.2	27	.20	5.0	0.044	1.1	4.50	SST	CG	N
0.500	12.70	3905	.63	15.9	.410	10.4	31	5.5	.23	5.7	7.0	31	.18	4.6	0.045	1.1	4.00	SPR	CG	Z
0.500	12.70	A15-4	.63	15.9	.404	10.3	20	3.4	.35	8.9	6.8	30	.28	7.0	0.048	1.2	5.75	SST	CG	N
0.500	12.70	B14-37	.63	15.9	.394	10.0	45	7.9	.22	5.7	10	45	.24	6.1	0.053	1.3	4.50	SST	CG	N
0.500	12.70	10976	.63	15.9	.392	10.0	55	9.7	.20	5.2	11	50	.30	7.5	0.054	1.4	4.50	HD	C	Z
0.500	12.70	10102	.63	15.9	.376	9.6	126	22	.13	3.4	17	75	.25	6.3	0.062	1.6	4.00	HD	CG	Z
0.500	12.70	2606	.63	15.9	.370	9.4	125	22	.16	3.9	19	86	.29	7.4	0.065	1.7	4.50	SPR	CG	Z
0.500	12.70	CC-8	.63	15.9	.356	9.0	143	25	.16	4.1	23	103	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.500	12.70	B-22	.66	16.7	.394	10.0	56	9.9	.19	4.8	11	47	.28	7.1	0.053	1.3	4.25	HD	C	N
0.500	12.70	S-99	.69	17.4	.410	10.4	14	2.4	.42	11	5.8	26	.27	6.9	0.045	1.1	6.00	SST	CG	N
0.500	12.70	11444	.69	17.4	.410	10.4	12	2.2	.39	10	4.9	22	.29	7.4	0.045	1.1	6.50	SST	CG	N
0.500	12.70	S-1457	.69	17.4	.408	10.4	24	4.2	.29	7.5	7.0	31	.21	5.3	0.046	1.2	4.50	SST	CG	N
0.500	12.70	3825	.69	17.4	.372	9.4	129	23	.14	3.6	19	82	.27	6.9	0.064	1.6	4.25	SPR	CG	N
0.500	12.70	LL-4	.69	17.4	.320	8.1	342	60	.13	3.4	45	201	.54	13.7	0.090	2.3	6.00	SPR	CG	GI
0.500	12.70	B5-9	.72	18.2	.424	10.8	12	2.1	.35	8.9	4.3	19	.17	4.3	0.038	1.0	4.50	SPR	CG	N
0.500	12.70	EE-78	.72	18.2	.416	10.6	21	3.6	.28	7.1	5.7	26	.18	4.5	0.042	1.1	4.25	SPR	CG	N
0.500	12.70	1881	.72	18.2	.376	9.6	101	18	.23	5.9	23	104	.28	7.1	0.062	1.6	4.50	MW	CG	Z
0.500	12.70	1932	.72	18.2	.376	9.6	84	15	.20	5.1	17	75	.37	9.4	0.062	1.6	5.00	SPR	C	Z
0.500	12.70	G-85	.72	18.2	.296	7.5	897	157	.07	1.8	64	287	.48	12.3	0.102	2.6	4.75	SPR	CG	N
0.500	12.70	B14-6	.72	18.2	.278	7.1	1236	216	.06	1.6	79	351	.56	14.1	0.111	2.8	5.00	SPR	CG	N
0.500	12.70	3967	.75	19.1	.438	11.1	4.0	.69	.56	14	2.2	9.8	.19	4.9	0.031	0.8	5.25	MW	C	Z
0.500	12.70	PP-89	.75	19.1	.432	11.0	6.0	1.1	.50	13	3.0	13	.20	5.0	0.034	0.9	4.75	SST	C	N
0.500	12.70	B3-68	.75	19.1	.426	10.8	9.0	1.6	.53	13	4.8	21	.22	5.6	0.037	0.9	5.00	MW	C	Z
0.500	12.70	S-754	.75	19.1	.416	10.6	15	2.6	.37	9.3	5.4	24	.24	6.1	0.042	1.1	4.75	SST	C	N
0.500	12.70	3545	.75	19.1	.410	10.4	31	5.5	.31	7.9	9.8	43	.18	4.6	0.045	1.1	4.00	MW	CG	Z
0.500	12.70	GG-27	.75	19.1	.410	10.4	23	4.0	.31	7.9	7.0	31	.21	5.4	0.045	1.1	4.75	SPR	CG	N
0.500	12.70	S-1211	.75	19.1	.410	10.4	18	3.2	.36	9.2	6.6	29	.27	6.9	0.045	1.1	5.00	SST	C	N
0.500	12.70	10133	.75	19.1	.406	10.3	25	4.4	.32	8.1	8.0	36	.24	6.0	0.047	1.2	5.00	SPR	CG	Z
0.500	12.70	3572	.75	19.1	.398	10.1	23	4.0	.41	10	9.2	41	.34	8.7	0.051	1.3	6.75	HD	CG	Z
0.500	12.70	10141	.75	19.1	.392	10.0	46	8.0	.25	6.2	11	50	.27	6.9	0.054	1.4	5.00	SPR	CG	Z
0.500	12.70	10283	.75	19.1	.392	10.0	34	6.0	.33	8.3	11	50	.38	9.6	0.054	1.4	6.00	SPR	C	Z
0.500	12.70	B1-34	.75	19.1	.392	10.0	35	6.1	.30	7.7	11	47	.30	7.5	0.054	1.4	5.50	SST	CG	N
0.500	12.70	B18-161	.75	19.1	.388	9.9	54	9.4	.23	5.9	13	56	.28	7.1	0.056	1.4	5.00	SPR	CG	GI
0.500	12.70	B10-40	.75	19.1	.370	9.4	83	15	.23	5.9	19	86	.37	9.5	0.065	1.7	5.75	SPR	CG	Z
0.500	12.70	B14-41	.75	19.1	.344	8.7	140	24	.21	5.3	29	130	.51	12.9	0.078	2.0	6.50	SST	CG	N
0.500	12.70	12583	.75	19.1	.340	8.6	199	35	.17	4.3	34	149	.48	12.2	0.080	2.0	6.00	SPR	CG	N
0.500	12.70	K-62	.75	19.1	.316	8.0	433	76	.11	2.8	48	214	.51	12.9	0.092	2.3	5.50	SPR	CG	Z
0.500	12.70	S-341	.78	19.8	.448	11.4	1.5	.26	.63	16	.92	4.1	.15	3.8	0.026	0.7	5.75	SST	CG	N
0.500	12.70	10466	.78	19.8	.418	10.6	14	2.5	.38	9.7	5.4	24	.21	5.2	0.041	1.0	5.00	SPR	CG	GI
0.500	12.70	3599	.78	19.8	.352	8.9	139	24	.27	6.8	37	167	.44	11.3	0.074	1.9	6.00	MW	CG	GI
0.500	12.70	12728	.81	20.6	.444	11.3	1.9	.33	.60	15	1.1	5.0	.21	5.3	0.028	0.7	6.50	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.500	12.70	S-167	.81	20.6	.442	11.2	2.0	.35	.60	15	1.2	5.3	.21	5.3	0.029	0.7	6.25	SST	C	N
0.500	12.70	H-51	.81	20.6	.432	11.0	5.5	.96	.54	14	3.0	13	.20	5.2	0.034	0.9	5.00	SST	C	N
0.500	12.70	A11-33	.81	20.6	.424	10.8	9.0	1.6	.45	11	4.0	18	.19	4.8	0.038	1.0	5.00	SST	CG	N
0.500	12.70	YY-34	.81	20.6	.412	10.5	16	2.9	.37	9.5	6.2	27	.26	6.7	0.044	1.1	5.00	SST	C	N
0.500	12.70	S-1572	.81	20.6	.412	10.5	17	2.9	.37	9.3	6.2	27	.22	5.6	0.044	1.1	5.00	SST	CG	N
0.500	12.70	JJ-88	.81	20.6	.408	10.4	8.9	1.6	.41	10	3.6	16	.40	10.2	0.046	1.2	8.75	SST	CG	N
0.500	12.70	B14-29	.81	20.6	.394	10.0	42	7.4	.25	6.4	11	47	.27	6.7	0.053	1.3	5.00	SPR	CG	Z
0.500	12.70	12325	.81	20.6	.392	10.0	34	6.0	.33	8.3	11	50	.32	8.2	0.054	1.4	6.00	SPR	CG	Z
0.500	12.70	K-47	.81	20.6	.340	8.6	138	24	.23	5.8	31	140	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.500	12.70	10323	.81	20.6	.316	8.0	337	59	.14	3.6	48	214	.60	15.2	0.092	2.3	6.50	SPR	CG	Z
0.500	12.70	A15-40	.84	21.4	.432	11.0	3.7	.66	.62	16	2.3	10	.22	5.6	0.034	0.9	6.50	SST	CG	N
0.500	12.70	J-62	.84	21.4	.372	9.4	86	15	.21	5.5	19	82	.41	10.4	0.064	1.6	5.25	SPR	C	Z
0.500	12.70	10836	.88	22.2	.464	11.8	.16	.03	.69	17	.11	.49	.19	4.8	0.018	0.5	9.50	SST	C	N
0.500	12.70	B14-52	.88	22.2	.414	10.5	13	2.3	.44	11	5.8	26	.28	7.1	0.043	1.1	5.50	SST	C	N
0.500	12.70	S-1411	.88	22.2	.410	10.4	9.1	1.6	.47	12	4.3	19	.41	10.3	0.045	1.1	8.00	SST	C	N
0.500	12.70	N-135	.88	22.2	.400	10.2	25	4.3	.36	9.2	9.0	40	.30	7.6	0.050	1.3	6.00	SPR	CG	Z
0.500	12.70	S-757	.88	22.2	.390	9.9	32	5.7	.34	8.7	11	50	.39	9.8	0.055	1.4	6.00	SST	C	N
0.500	12.70	A11-40	.88	22.2	.386	9.8	44	7.6	.30	7.7	13	59	.34	8.7	0.057	1.4	6.00	SPR	CG	GI
0.500	12.70	3810	.88	22.2	.380	9.7	44	7.7	.35	8.9	15	68	.42	10.7	0.060	1.5	7.00	SPR	CG	GI
0.500	12.70	S-761	.88	22.2	.374	9.5	56	9.7	.30	7.6	17	74	.46	11.6	0.063	1.6	6.25	SST	C	N
0.500	12.70	MM-40	.88	22.2	.372	9.4	73	13	.25	6.5	19	82	.38	9.8	0.064	1.6	6.00	SPR	CG	N
0.500	12.70	L-48	.88	22.2	.340	8.6	159	28	.21	5.4	34	149	.64	16.3	0.080	2.0	7.00	SPR	CG	Z
0.500	12.70	Z-63	.88	22.2	.300	7.6	488	86	.12	2.9	57	252	.60	15.2	0.100	2.5	6.00	SST	CG	N
0.500	12.70	GG-39	.88	22.2	.280	7.1	887	155	.09	2.2	77	343	.66	16.8	0.110	2.8	6.00	SPR	CG	Z
0.500	12.70	2819	.88	22.2	.230	5.8	2455	430	.05	1.3	130	579	.81	20.6	0.135	3.4	6.00	SPR	CG	Z
0.500	12.70	A10-49	.89	22.6	.372	9.4	36	6.4	.25	6.4	9.1	40	.64	16.3	0.064	1.6	10.0	SPR	CG	Z
0.500	12.70	A9-31	.91	23.0	.460	11.7	.26	.05	.71	18	.19	.83	.20	5.1	0.020	0.5	9.00	SST	C	N
0.500	12.70	S-390	.91	23.0	.428	10.9	5.4	.94	.64	16	3.4	15	.22	5.5	0.036	0.9	6.00	SST	CG	N
0.500	12.70	S-1482	.91	23.0	.398	10.1	19	3.3	.48	12	9.0	40	.36	9.1	0.051	1.3	7.00	SST	CG	N
0.500	12.70	A15-30	.92	23.4	.420	10.7	10	1.8	.45	11	4.7	21	.21	5.3	0.040	1.0	5.25	SST	CG	N
0.500	12.70	A14-40	.94	23.8	.416	10.6	12	2.1	.46	12	5.4	24	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.500	12.70	A14-61	.94	23.8	.406	10.3	21	3.6	.39	9.9	8.0	36	.27	6.8	0.047	1.2	5.75	SPR	CG	Z
0.500	12.70	S-1510	.94	23.8	.392	10.0	20	3.5	.45	11	9.0	40	.49	12.3	0.054	1.4	8.00	SST	C	N
0.500	12.70	10669	.94	23.8	.318	8.1	360	63	.13	3.3	47	208	.64	16.2	0.091	2.3	6.00	SPR	C	Z
0.500	12.70	L-31	.94	23.8	.300	7.6	372	65	.15	3.9	57	252	.73	18.4	0.100	2.5	7.25	SST	CG	N
0.500	12.70	A14-37	.97	24.6	.412	10.5	15	2.7	.44	11	6.6	29	.25	6.4	0.044	1.1	5.75	SPR	CG	N
0.500	12.70	O-38	.97	24.6	.380	9.7	24	4.2	.37	9.3	8.7	39	.60	15.2	0.060	1.5	10.0	SST	CG	N
0.500	12.70	NN-83	.97	24.6	.340	8.6	144	25	.23	5.9	34	149	.60	15.2	0.080	2.0	7.50	SPR	CG	Z
0.500	12.70	3953	1.00	25.4	.444	11.3	1.4	.25	.78	20	1.1	4.8	.22	5.7	0.028	0.7	8.00	MW	CG	Z
0.500	12.70	GG-95	1.00	25.4	.432	11.0	4.7	.83	.63	16	3.0	13	.22	5.6	0.034	0.9	5.50	SST	C	N
0.500	12.70	YY-35	1.00	25.4	.426	10.8	6.7	1.2	.55	14	3.7	16	.20	5.2	0.037	0.9	5.50	SST	CG	N
0.500	12.70	MM-89	1.00	25.4	.424	10.8	8.7	1.5	.68	17	5.9	26	.25	6.3	0.038	1.0	5.50	MW	C	N
0.500	12.70	WW-35	1.00	25.4	.424	10.8	7.6	1.3	.56	14	4.3	19	.27	6.8	0.038	1.0	6.00	SPR	C	Z
0.500	12.70	10056	1.00	25.4	.422	10.7	9.7	1.7	.48	12	4.6	21	.25	6.5	0.039	1.0	5.50	SPR	CG	GI
0.500	12.70	10326	1.00	25.4	.422	10.7	9.7	1.7	.66	17	6.4	28	.25	6.5	0.039	1.0	5.50	MW	C	GI
0.500	12.70	Z-45	1.00	25.4	.418	10.6	6.5	1.1	.61	16	3.9	18	.39	9.9	0.041	1.0	8.50	SPR	C	Z
0.500	12.70	S-755	1.00	25.4	.416	10.6	10	1.8	.53	14	5.4	24	.29	7.5	0.042	1.1	6.00	SST	C	N
0.500	12.70	A11-44	1.00	25.4	.416	10.6	13	2.3	.43	11	5.7	26	.23	5.9	0.042	1.1	5.50	SPR	CG	GI
0.500	12.70	10020	1.00	25.4	.414	10.5	15	2.6	.42	11	6.2	27	.24	6.0	0.043	1.1	5.50	SPR	CG	Z
0.500	12.70	A13-7	1.00	25.4	.408	10.4	17	3.0	.44	11	7.5	33	.28	7.0	0.046	1.2	6.00	SPR	CG	N
0.500	12.70	3635	1.00	25.4	.406	10.3	13	2.2	.62	16	7.8	35	.38	9.6	0.047	1.2	8.00	HD	CG	Z
0.500	12.70	S-1479	1.00	25.4	.406	10.3	15	2.6	.51	13	7.5	33	.35	9.0	0.047	1.2	6.50	SST	C	N
0.500	12.70	10069	1.00	25.4	.404	10.3	18	3.2	.46	12	8.5	38	.36	9.1	0.048	1.2	6.50	SPR	C	Z
0.500	12.70	Q-10	1.00	25.4	.400	10.2	22	3.8	.41	10	9.0	40	.38	9.5	0.050	1.3	6.50	SPR	C	Z
0.500	12.70	10041	1.00	25.4	.398	10.1	13	2.4	.44	11	5.9	26	.56	14.2	0.051	1.3	10.0	SPR	C	Z
0.500	12.70	2976	1.00	25.4	.392	10.0	23	4.0	.49	12	11	50	.43	11.0	0.054	1.4	8.00	SPR	CG	Z
0.500	12.70	10146	1.00	25.4	.390	9.9	31	5.5	.38	9.6	12	53	.37	9.4	0.055	1.4	6.75	SPR	CG	Z
0.500	12.70	S-758	1.00	25.4	.390	9.9	27	4.8	.41	10	11	50	.43	10.8	0.055	1.4	6.75	SST	C	N
0.500	12.70	510	1.00	25.4	.376	9.6	45	7.8	.38	9.6	17	75	.54	13.6	0.062	1.6	7.75	HD	C	Z
0.500	12.70	S-762	1.00	25.4	.374	9.5	47	8.3	.35	9.0	17	74	.50	12.8	0.063	1.6	7.00	SST	C	N
0.500	12.70	3821	1.00	25.4	.366	9.3	55	9.6	.39	9.8	21	94	.57	14.5	0.067	1.7	8.50	SPR	CG	Z
0.500	12.70	3897	1.00	25.4	.356	9.0	82	14	.30	7.7	25	110	.58	14.6	0.072	1.8	8.00	HD	CG	Z
0.500	12.70	2994	1.00	25.4	.350	8.9	118	21	.24	6.0	28	124	.53	13.3	0.075	1.9	7.00	SPR	CG	Z
0.500	12.70	3834	1.00	25.4	.336	8.5	148	26	.24	6.2	36	160	.66	16.7	0.082	2.1	8.00	SPR	CG	GI
0.500	12.70	S-498	1.03	26.2	.420	10.7	8.2	1.4	.57	14	4.7	21	.28	7.1	0.040	1.0	6.00	SST	C	N
0.500	12.70	10093	1.03	26.2	.250	6.4	1331	233	.08	2.1	109	486	.88	22.2	0.125	3.2	7.00	SPR	CG	Z
0.500	12.70	12170	1.06	27.0	.436	11.1	2.9	.52	.84	21	2.5	11	.22	5.7	0.032	0.8	7.00	SPR	CG	N
0.500	12.70	1725	1.06	27.0	.398	10.1	13	2.4	.55	14	7.4	33	.51	13.0	0.051	1.3	10.0	SPR	CG	Z
0.500	12.70	3809	1.06	27.0	.380	9.7	27	4.8	.46	12	13	56	.60	15.2	0.060	1.5	10.0	SPR	CG	Z
0.500	12.70	NN-97	1.09	27.8	.422	10.7	8.5	1.5	.54	14	4.6	21	.23	5.9	0.039	1.0	6.00	SPR	CG	Z
0.500	12.70	M-101	1.09	27.8	.410	10.4	4.9	.87	.51	13	2.5	11	.59	14.9	0.045	1.1	13.0	SST	CG	N
0.500	12.70	A14-8	1.09	27.8	.408	10.4	14	2.4	.52	13	7.0	31	.30	7.6	0.046	1.2	6.50	SST	CG	N
0.500	12.70	2961	1.13	28.6	.440	11.2	.94	.17	.68	17	.64	2.9	.45	11.3	0.030	0.8	14.0	MW	C	Z
0.500	12.70	S-1392	1.13	28.6	.422	10.7	6.9	1.2	.62	16	4.3	19	.24	6.2	0.039	1.0	6.25	SST	CG	N
0.500	12.70	S-3154	1.13	28.6	.412	10.5	16	2.9	.37	9.5	6.2	27	.26	6.7	0.044	1.1	5.00	SST	C	N
0.500	12.70	S-90	1.13	28.6	.410	10.4	19	3.2	.36	9.1	6.6	29	.27	6.9	0.045	1.1	5.00	SST	C	N
0.500	12.70	12472	1.13	28.6	.400	10.2	16	2.9	.55	14	9.0	40	.45	11.4	0.050	1.3	8.00	SPR	C	Z
0.500	12.70	S-803	1.13	28.6	.378	9.6	30	5.3	.50	13	15	67	.53	13.6	0.061	1.5	8.75	SST	CG	N
0.500	12.70	11395	1.13	28.6	.376	9.6	33	5.7	.52	13	17	75	.60	15.4	0.062	1.6	9.75	HD	CG	Z
0.500	12.70	B7-66	1.13	28.6	.340	8.6	159	28	.21	5.4	34	149	.64	16.3	0.080	2.0	7.00	SPR	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.500	12.70	3748	1.13	28.6	.290	7.4	420	74	.17	4.2	70	311	.92	23.3	0.105	2.7	8.75	SPR	CG	Z
0.500	12.70	S-112	1.13	28.6	.230	5.8	1708	299	.07	1.7	117	521	.95	24.0	0.135	3.4	7.00	SST	CG	N
0.500	12.70	12650	1.14	29.0	.410	10.4	10	1.8	.68	17	7.0	31	.36	9.1	0.045	1.1	8.00	SPR	CG	N
0.500	12.70	S-328	1.16	29.4	.438	11.1	1.6	.28	.84	21	1.3	5.9	.32	8.1	0.031	0.8	9.25	SST	C	N
0.500	12.70	S-499	1.16	29.4	.422	10.7	7.4	1.3	.59	15	4.3	19	.23	5.9	0.039	1.0	6.00	SST	CG	N
0.500	12.70	12632	1.17	29.7	.406	10.3	13	2.2	.79	20	10	44	.38	9.6	0.047	1.2	8.00	MW	CG	N
0.500	12.70	3491	1.19	30.2	.446	11.3	1.4	.25	.97	25	1.4	6.2	.22	5.5	0.027	0.7	7.00	MW	C	Z
0.500	12.70	W-100	1.19	30.2	.430	10.9	4.1	.73	.76	19	3.1	14	.26	6.7	0.035	0.9	6.50	SST	C	N
0.500	12.70	10774	1.19	30.2	.412	10.5	11	2.0	.58	15	6.6	29	.31	7.8	0.044	1.1	7.00	SPR	CG	Z
0.500	12.70	S-1	1.19	30.2	.406	10.3	9.6	1.7	.77	19	7.3	33	.42	10.7	0.047	1.2	9.00	SST	CG	N
0.500	12.70	S-922	1.19	30.2	.374	9.5	30	5.3	.50	13	15	66	.69	17.6	0.063	1.6	10.0	SST	C	N
0.500	12.70	FF-97	1.19	30.2	.260	6.6	836	146	.12	3.0	98	435	1.02	25.9	0.120	3.0	8.50	SPR	CG	Z
0.500	12.70	II-91	1.22	31.0	.440	11.2	1.4	.25	.92	23	1.3	5.7	.30	7.6	0.030	0.8	10.0	MW	CG	N
0.500	12.70	LL-28	1.22	31.0	.360	9.1	47	8.2	.46	12	21	95	.72	18.2	0.070	1.8	10.3	SST	CG	N
0.500	12.70	A14-59	1.23	31.3	.420	10.7	8.7	1.5	.57	14	5.0	22	.25	6.4	0.040	1.0	6.25	SPR	CG	Z
0.500	12.70	3619	1.25	31.8	.442	11.2	.97	.17	.87	22	.85	3.8	.38	9.6	0.029	0.7	12.0	MW	C	Z
0.500	12.70	3755	1.25	31.8	.440	11.2	3.2	.56	.96	24	3.1	14	.20	5.0	0.030	0.8	5.50	MW	C	Z
0.500	12.70	S-756	1.25	31.8	.416	10.6	8.1	1.4	.66	17	5.4	24	.34	8.5	0.042	1.1	7.00	SST	C	N
0.500	12.70	3787	1.25	31.8	.410	10.4	13	2.2	.56	14	7.0	31	.36	9.1	0.045	1.1	7.00	SPR	C	Z
0.500	12.70	RR-70	1.25	31.8	.402	10.2	9.8	1.7	.76	19	7.5	33	.49	12.4	0.049	1.2	10.0	SST	CG	N
0.500	12.70	S-759	1.25	31.8	.390	9.9	21	3.6	.54	14	11	50	.51	12.9	0.055	1.4	8.25	SST	C	N
0.500	12.70	3512	1.25	31.8	.374	9.5	39	6.8	.62	16	24	107	.63	16.0	0.063	1.6	9.00	MW	C	Z
0.500	12.70	S-763	1.25	31.8	.374	9.5	35	6.1	.48	12	17	74	.61	15.6	0.063	1.6	8.75	SST	C	N
0.500	12.70	12197	1.25	31.8	.352	8.9	93	16	.29	7.3	27	119	.67	16.9	0.074	1.9	8.00	SPR	C	Z
0.500	12.70	EE-79	1.25	31.8	.340	8.6	93	16	.36	9.1	34	149	.84	21.3	0.080	2.0	10.5	SPR	CG	Z
0.500	12.70	Y-36	1.31	33.3	.440	11.2	1.4	.25	1.0	26	1.4	6.3	.30	7.6	0.030	0.8	10.0	MW	CG	Z
0.500	12.70	3863	1.31	33.3	.422	10.7	5.7	.99	.82	21	4.6	21	.35	8.9	0.039	1.0	8.00	SPR	C	Z
0.500	12.70	FF-82	1.31	33.3	.400	10.2	9.9	1.7	.66	17	6.5	29	.65	16.5	0.050	1.3	12.0	SPR	C	Z
0.500	12.70	L-62	1.31	33.3	.372	9.4	29	5.1	.54	14	16	70	.77	19.5	0.064	1.6	12.0	SPR	CG	Z
0.500	12.70	H-87	1.31	33.3	.340	8.6	77	13	.41	10	31	140	.88	22.4	0.080	2.0	11.0	SST	CG	N
0.500	12.70	1605	1.38	34.9	.454	11.5	.44	.08	1.1	28	.48	2.2	.27	6.7	0.023	0.6	10.5	MW	C	Z
0.500	12.70	10181	1.38	34.9	.446	11.3	.90	.16	1.1	27	.97	4.3	.30	7.5	0.027	0.7	10.0	MW	C	N
0.500	12.70	11347	1.38	34.9	.444	11.3	1.2	.22	1.1	29	1.4	6.2	.25	6.4	0.028	0.7	8.00	SST	C	N
0.500	12.70	I-34	1.38	34.9	.436	11.1	.95	.17	.85	22	.80	3.6	.53	13.4	0.032	0.8	15.5	SST	C	N
0.500	12.70	S-1399	1.38	34.9	.426	10.8	4.7	.83	.78	20	3.7	16	.26	6.6	0.037	0.9	7.00	SST	C	N
0.500	12.70	A15-32	1.38	34.9	.416	10.6	7.5	1.3	.72	18	5.4	24	.36	9.1	0.042	1.1	7.50	SST	C	N
0.500	12.70	YY-29	1.38	34.9	.402	10.2	9.0	1.6	.74	19	6.7	30	.64	16.2	0.049	1.2	12.0	SPR	C	Z
0.500	12.70	XX-70	1.38	34.9	.400	10.2	12	2.2	.73	18	9.0	40	.50	12.7	0.050	1.3	10.0	SPR	CG	Z
0.500	12.70	4161	1.38	34.9	.398	10.1	13	2.4	.71	18	9.5	42	.51	13.0	0.051	1.3	10.0	SPR	CG	Z
0.500	12.70	3242	1.38	34.9	.396	10.1	12	2.0	.75	19	8.8	39	.62	15.8	0.052	1.3	12.0	SPR	CG	Z
0.500	12.70	503	1.38	34.9	.356	9.0	58	10	.43	11	25	110	.83	21.0	0.072	1.8	10.5	HD	C	Z
0.500	12.70	A15-50	1.41	35.7	.406	10.3	14	2.4	.58	15	8.0	36	.35	9.0	0.047	1.2	7.50	SPR	CG	GI
0.500	12.70	K-49	1.44	36.5	.450	11.4	.87	.15	1.2	31	1.1	4.7	.23	5.7	0.025	0.6	8.00	MW	C	N
0.500	12.70	S-1292	1.44	36.5	.406	10.3	12	2.1	.63	16	7.5	33	.40	10.1	0.047	1.2	7.50	SST	C	N
0.500	12.70	10135	1.50	38.1	.424	10.8	5.5	.97	.77	20	4.3	19	.32	8.2	0.038	1.0	7.50	SPR	C	Z
0.500	12.70	S-1293	1.50	38.1	.424	10.8	5.0	.88	.79	20	4.0	18	.28	7.0	0.038	1.0	7.25	SST	CG	N
0.500	12.70	11745	1.50	38.1	.424	10.8	6.1	1.1	.70	18	4.3	19	.27	6.8	0.038	1.0	7.00	SPR	CG	Z
0.500	12.70	3878	1.50	38.1	.420	10.7	7.6	1.3	.66	17	5.0	22	.32	8.1	0.040	1.0	7.00	SPR	C	Z
0.500	12.70	521	1.50	38.1	.418	10.6	5.3	.92	1.0	26	5.4	24	.45	11.5	0.041	1.0	10.0	HD	C	Z
0.500	12.70	B6-1	1.50	38.1	.418	10.6	6.8	1.2	.74	19	5.0	22	.35	8.9	0.041	1.0	7.50	SST	C	N
0.500	12.70	S-1290	1.50	38.1	.418	10.6	6.4	1.1	.79	20	5.0	22	.32	8.1	0.041	1.0	7.75	SST	CG	N
0.500	12.70	S-1296	1.50	38.1	.418	10.6	4.1	.71	1.0	27	4.3	19	.45	11.5	0.041	1.0	11.0	SST	CG	N
0.500	12.70	S-806	1.50	38.1	.418	10.6	4.1	.72	1.0	27	4.3	19	.45	11.5	0.041	1.0	11.0	SST	CG	N
0.500	12.70	10081	1.50	38.1	.418	10.6	7.3	1.3	.73	19	5.4	24	.32	8.1	0.041	1.0	7.75	SPR	CG	GI
0.500	12.70	S-122	1.50	38.1	.406	10.3	8.2	1.4	.91	23	7.5	33	.47	11.9	0.047	1.2	10.0	SST	CG	N
0.500	12.70	S-247	1.50	38.1	.396	10.1	14	2.4	.70	18	9.5	42	.49	12.5	0.052	1.3	9.50	SST	CG	N
0.500	12.70	11421	1.50	38.1	.396	10.1	11	1.9	.85	22	9.5	42	.65	16.5	0.052	1.3	12.5	HD	CG	Z
0.500	12.70	S-243	1.50	38.1	.392	10.0	17	3.0	.62	16	11	47	.49	12.3	0.054	1.4	9.00	SST	CG	N
0.500	12.70	10059	1.50	38.1	.390	9.9	20	3.5	.60	15	12	53	.52	13.3	0.055	1.4	9.50	SPR	CG	GI
0.500	12.70	S-760	1.50	38.1	.390	9.9	17	2.9	.67	17	11	50	.59	15.0	0.055	1.4	9.75	SST	C	N
0.500	12.70	2536	1.50	38.1	.374	9.5	34	5.9	.52	13	18	79	.63	16.0	0.063	1.6	10.0	SPR	CG	Z
0.500	12.70	3944	1.50	38.1	.374	9.5	29	5.1	.60	15	18	79	.71	18.0	0.063	1.6	11.3	SPR	CG	Z
0.500	12.70	S-764	1.50	38.1	.374	9.5	29	5.0	.58	15	17	74	.71	18.0	0.063	1.6	10.3	SST	C	N
0.500	12.70	K-56	1.50	38.1	.356	9.0	55	9.6	.45	11	25	110	.79	20.1	0.072	1.8	11.0	SPR	CG	Z
0.500	12.70	3080	1.50	38.1	.332	8.4	114	20	.34	8.6	39	172	.90	22.9	0.084	2.1	10.8	SPR	CG	Z
0.500	12.70	J-30	1.50	38.1	.332	8.4	153	27	.25	6.4	39	172	.71	18.1	0.084	2.1	8.50	SPR	CG	Z
0.500	12.70	4229	1.50	38.1	.212	5.4	1957	343	.08	2.0	154	683	1.30	32.9	0.144	3.7	9.00	SPR	CG	N
0.500	12.70	S-384	1.56	39.7	.452	11.5	.39	.07	1.3	32	.49	2.2	.31	7.8	0.024	0.6	12.0	SST	C	N
0.500	12.70	12252	1.56	39.7	.390	9.9	19	3.3	.64	16	12	53	.55	14.0	0.055	1.4	10.0	SPR	CG	Z
0.500	12.70	3040	1.56	39.7	.380	9.7	25	4.3	.62	16	15	68	.65	16.6	0.060	1.5	11.0	SPR	CG	Z
0.500	12.70	4201	1.56	39.7	.318	8.1	175	31	.27	6.8	47	208	.93	23.7	0.091	2.3	10.3	SPR	CG	BO
0.500	12.70	S-193	1.59	40.5	.434	11.0	3.0	.52	.92	23	2.7	12	.26	6.7	0.033	0.8	7.00	SST	C	N
0.500	12.70	BB-58	1.63	41.3	.440	11.2	1.9	.33	1.4	35	2.6	12	.24	6.1	0.030	0.8	8.00	MW	CG	Z
0.500	12.70	S-3100	1.63	41.3	.436	11.1	2.3	.41	1.1	27	2.5	11	.27	6.9	0.032	0.8	7.50	SST	C	N
0.500	12.70	F-53	1.63	41.3	.426	10.8	1.8	.32	1.0	25	1.8	8.0	.63	16.0	0.037	0.9	17.0	SPR	CG	Z
0.500	12.70	HH-56	1.63	41.3	.416	10.6	6.2	1.1	.93	24	5.7	26	.44	11.2	0.042	1.1	9.50	SPR	C	Z
0.500	12.70	4124	1.63	41.3	.392	10.0	20	3.4	.57	15	11	50	.54	13.7	0.054	1.4	9.00	SPR	C	Z
0.500	12.70	12189	1.63	41.3	.386	9.8	17	3.0	.78	20	13	59	.70	17.9	0.057	1.4	12.3	SPR	CG	Z
0.500	12.70	S-1365	1.63	41.3	.384	9.8	13	2.2	.70	18	8.8	39	.93	23.6	0.058	1.5	15.0	SST	C	N
0.500	12.70	3364	1.63	41.3	.366	9.3	40	6.9	.53	14	21	94	.80	20.4	0.067	1.7	11.0	SPR	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.500	12.70	11159	1.66	42.1	.330	8.4	100	18	.40	10	40	178	1.06	27.0	0.085	2.2	12.5	SPR	CG	Z
0.500	12.70	B14-55	1.69	42.8	.410	10.4	6.3	1.1	1.1	29	7.0	31	.54	13.7	0.045	1.1	12.0	SPR	CG	N
0.500	12.70	A10-58	1.72	43.6	.394	10.0	13	2.2	.84	21	11	47	.64	16.2	0.053	1.3	12.0	SPR	CG	N
0.500	12.70	QQ-58	1.75	44.5	.420	10.7	3.4	.60	1.2	30	4.1	18	.56	14.2	0.040	1.0	13.0	MW	C	Z
0.500	12.70	511	1.75	44.5	.376	9.6	24	4.1	.72	18	17	75	.85	21.7	0.062	1.6	12.8	HD	C	Z
0.500	12.70	JJ-89	1.75	44.5	.368	9.3	34	6.0	.59	15	20	90	.84	21.4	0.066	1.7	11.8	SPR	C	N
0.500	12.70	359	1.75	44.5	.356	9.0	43	7.6	.57	14	25	110	1.03	26.2	0.072	1.8	13.3	HD	C	Z
0.500	12.70	11582	1.75	44.5	.354	9.0	48	8.3	.54	14	26	115	1.02	26.0	0.073	1.9	13.0	SPR	CG	N
0.500	12.70	10311	1.81	46.0	.384	9.8	13	2.2	.84	21	11	48	.97	24.7	0.058	1.5	16.8	SPR	CG	Z
0.500	12.70	K-99	1.81	46.0	.356	9.0	35	6.2	.66	17	23	103	1.15	29.3	0.072	1.8	16.0	SPR	CG	GI
0.500	12.70	B14-69	1.84	46.8	.322	8.2	144	25	.32	8.0	46	203	.98	24.9	0.089	2.3	11.0	SPR	CG	Z
0.500	12.70	QQ-53	1.88	47.6	.406	10.3	6.3	1.1	1.2	30	7.4	33	.71	17.9	0.047	1.2	14.0	HD	C	Z
0.500	12.70	3580	1.88	47.6	.396	10.1	8.9	1.6	1.1	28	9.7	43	.79	20.0	0.052	1.3	15.0	HD	CG	Z
0.500	12.70	A12-40	1.88	47.6	.394	10.0	11	1.8	.95	24	10	45	.66	16.8	0.053	1.3	12.5	SST	CG	N
0.500	12.70	3608	1.88	47.6	.392	10.0	9.2	1.6	.90	23	8.3	37	.97	24.7	0.054	1.4	17.0	SPR	C	Z
0.500	12.70	10384	1.88	47.6	.380	9.7	15	2.6	.80	20	12	52	1.08	27.4	0.060	1.5	17.0	SPR	C	Z
0.500	12.70	11772	1.91	48.4	.440	11.2	1.4	.25	1.6	41	2.3	10	.30	7.6	0.030	0.8	10.0	MW	CG	GI
0.500	12.70	10603	1.91	48.4	.392	10.0	14	2.4	.82	21	11	50	.65	16.5	0.054	1.4	12.0	SPR	CG	Z
0.500	12.70	12317	1.91	48.4	.374	9.5	32	5.6	.55	14	18	79	.72	18.4	0.063	1.6	10.5	SPR	C	Z
0.500	12.70	12724	1.92	48.8	.438	11.1	1.6	.28	1.6	41	2.6	12	.31	7.9	0.031	0.8	10.0	MW	CG	GI
0.500	12.70	4232	1.94	49.2	.356	9.0	55	9.6	.45	11	25	110	.86	21.9	0.072	1.8	11.0	SPR	C	Z
0.500	12.70	K-53	1.97	50.0	.406	10.3	5.6	.98	1.2	31	6.9	31	.73	18.5	0.047	1.2	15.5	SPR	CG	Z
0.500	12.70	FF-55	2.00	50.8	.424	10.8	2.6	.46	1.5	38	4.0	18	.49	12.5	0.038	1.0	12.0	SST	C	N
0.500	12.70	B10-63	2.00	50.8	.420	10.7	4.7	.83	1.1	27	5.0	22	.44	11.2	0.040	1.0	10.0	SPR	C	Z
0.500	12.70	3994	2.00	50.8	.418	10.6	3.0	.53	1.3	33	3.9	17	.70	17.7	0.041	1.0	16.0	SPR	C	Z
0.500	12.70	O-95	2.00	50.8	.408	10.4	5.1	.89	1.3	33	6.6	29	.71	18.1	0.046	1.2	15.5	SPR	CG	Z
0.500	12.70	15	2.00	50.8	.406	10.3	7.2	1.3	1.1	28	8.0	36	.64	16.1	0.047	1.2	12.5	HD	C	Z
0.500	12.70	2721	2.00	50.8	.406	10.3	5.8	1.0	1.2	32	7.2	32	.75	19.1	0.047	1.2	15.0	HD	C	Z
0.500	12.70	AA-87	2.00	50.8	.400	10.2	5.9	1.0	1.2	30	6.9	31	.83	21.0	0.050	1.3	16.5	SST	CG	N
0.500	12.70	12233	2.00	50.8	.388	9.9	13	2.3	.97	25	13	56	.81	20.6	0.056	1.4	14.5	SPR	CG	GI
0.500	12.70	3004	2.00	50.8	.376	9.6	24	4.2	.70	18	17	75	.78	19.7	0.062	1.6	12.5	SPR	CG	Z
0.500	12.70	S-765	2.00	50.8	.374	9.5	21	3.6	.81	21	17	74	.91	23.2	0.063	1.6	13.5	SST	C	N
0.500	12.70	4215	2.00	50.8	.372	9.4	34	6.0	.54	14	19	82	.74	18.7	0.064	1.6	10.5	SPR	C	Z
0.500	12.70	504	2.00	50.8	.356	9.0	38	6.6	.65	17	25	110	1.15	29.3	0.072	1.8	15.0	HD	C	Z
0.500	12.70	2652	2.03	51.6	.462	11.7	.14	.02	1.7	44	.24	1.1	.29	7.4	0.019	0.5	14.3	MW	C	Z
0.500	12.70	3160	2.03	51.6	.362	9.2	28	4.9	.82	21	23	103	1.14	28.9	0.069	1.8	16.5	SPR	CG	Z
0.500	12.70	12684	2.06	52.4	.330	8.4	91	16	.61	16	56	249	1.15	29.2	0.085	2.2	13.5	MW	CG	Z
0.500	12.70	S-39	2.13	54.0	.406	10.3	3.1	.53	1.0	26	3.1	14	1.10	28.1	0.047	1.2	23.5	SST	CG	N
0.500	12.70	3558	2.13	54.0	.402	10.2	11	2.0	1.1	28	13	56	.49	12.4	0.049	1.2	10.0	MW	CG	Z
0.500	12.70	Q-61-A	2.13	54.0	.388	9.9	10	1.8	1.1	29	12	52	.87	22.0	0.056	1.4	15.5	SST	CG	N
0.500	12.70	10033	2.19	55.6	.312	7.9	124	22	.41	10	51	228	1.46	37.0	0.094	2.4	15.5	SPR	CG	Z
0.500	12.70	YY-62	2.25	57.2	.460	11.7	.23	.04	2.0	52	.46	2.0	.22	5.6	0.020	0.5	10.0	SST	C	N
0.500	12.70	4322	2.25	57.2	.340	8.6	69	12	.49	12	34	149	1.08	27.4	0.080	2.0	13.5	SPR	CG	Z
0.500	12.70	12020	2.31	58.7	.398	10.1	13	2.4	.71	18	9.5	42	.51	13.0	0.051	1.3	10.0	SPR	CG	Z
0.500	12.70	3776	2.31	58.7	.356	9.0	32	5.6	.78	20	25	110	1.26	32.0	0.072	1.8	17.5	HD	CG	GI
0.500	12.70	J-34	2.31	58.7	.356	9.0	58	10	.43	11	25	110	.76	19.2	0.072	1.8	10.5	HD	CG	Z
0.500	12.70	3159	2.38	60.3	.372	9.4	20	3.6	.91	23	19	82	1.04	26.4	0.064	1.6	16.3	SPR	CG	Z
0.500	12.70	10042	2.38	60.3	.366	9.3	34	6.0	.62	16	21	94	.90	23.0	0.067	1.7	12.5	SPR	C	Z
0.500	12.70	4266	2.44	61.9	.376	9.6	17	3.0	.98	25	17	75	1.04	26.4	0.062	1.6	16.8	SPR	CG	Z
0.500	12.70	12599	2.50	63.5	.424	10.8	3.0	.53	1.9	49	5.9	26	.49	12.5	0.038	1.0	12.0	MW	C	Z
0.500	12.70	EE-59	2.50	63.5	.400	10.2	13	2.3	.68	17	9.0	40	.48	12.1	0.050	1.3	9.50	SPR	CG	N
0.500	12.70	24	2.50	63.5	.376	9.6	16	2.8	1.1	27	17	75	1.18	29.9	0.062	1.6	18.0	HD	C	Z
0.500	12.70	3035	2.50	63.5	.376	9.6	21	3.7	.80	20	17	75	.87	22.0	0.062	1.6	14.0	SPR	CG	Z
0.500	12.70	S-1133	2.50	63.5	.376	9.6	13	2.3	1.2	31	16	71	1.24	31.5	0.062	1.6	19.0	SST	C	N
0.500	12.70	11928	2.50	63.5	.356	9.0	38	6.6	.65	17	25	110	1.08	27.4	0.072	1.8	15.0	SPR	CG	Z
0.500	12.70	12287	2.53	64.3	.376	9.6	17	3.0	1.0	25	17	75	1.12	28.3	0.062	1.6	17.0	SPR	C	Z
0.500	12.70	12302	2.59	65.9	.424	10.8	2.1	.37	2.0	50	4.1	18	.63	15.9	0.038	1.0	16.5	SPR	CG	Z
0.500	12.70	11843	2.63	66.7	.426	10.8	1.5	.26	2.0	50	2.9	13	.67	16.9	0.037	0.9	18.0	SST	CG	N
0.500	12.70	2601	2.63	66.7	.416	10.6	3.6	.63	2.0	51	7.1	32	.63	16.0	0.042	1.1	15.0	MW	CG	Z
0.500	12.70	1645	2.63	66.7	.406	10.3	4.9	.85	1.6	42	8.0	36	.82	20.9	0.047	1.2	17.5	SPR	CG	Z
0.500	12.70	3256	2.63	66.7	.376	9.6	14	2.5	1.2	31	17	75	1.30	33.1	0.062	1.6	20.0	HD	C	Z
0.500	12.70	3741	2.63	66.7	.376	9.6	14	2.4	1.2	31	17	75	1.32	33.5	0.062	1.6	20.3	HD	C	GI
0.500	12.70	1793	2.75	69.9	.376	9.6	19	3.3	.90	23	17	75	.96	24.4	0.062	1.6	15.5	HD	CG	Z
0.500	12.70	11	2.75	69.9	.356	9.0	28	4.9	.88	22	25	110	1.48	37.5	0.072	1.8	19.5	HD	C	Z
0.500	12.70	M-77	2.81	71.4	.300	7.6	102	18	.41	10	42	187	2.40	61.0	0.100	2.5	24.0	SPR	CG	Z
0.500	12.70	4110	2.88	73.0	.374	9.5	15	2.6	1.2	30	18	79	1.32	33.6	0.063	1.6	20.0	SPR	C	Z
0.500	12.70	11033	2.88	73.0	.340	8.6	50	8.8	.67	17	34	149	1.50	38.1	0.080	2.0	17.8	HD	CG	Z
0.500	12.70	2918	2.97	75.4	.372	9.4	20	3.6	.91	23	19	82	1.11	28.2	0.064	1.6	16.3	SPR	C	Z
0.500	12.70	11876	3.00	76.2	.410	10.4	3.1	.55	2.0	51	6.3	28	.99	25.1	0.045	1.1	22.0	SPR	CG	N
0.500	12.70	10	3.00	76.2	.406	10.3	4.6	.80	1.7	43	7.8	35	.90	22.9	0.047	1.2	18.3	HD	C	Z
0.500	12.70	2751	3.00	76.2	.404	10.3	6.4	1.1	1.3	34	8.5	38	.77	19.5	0.048	1.2	15.0	HD	C	Z
0.500	12.70	3231	3.00	76.2	.404	10.3	3.8	.67	1.8	46	7.0	31	1.18	29.9	0.048	1.2	23.5	SPR	C	Z
0.500	12.70	3819	3.00	76.2	.366	9.3	21	3.7	1.0	26	21	94	1.27	32.3	0.067	1.7	19.0	SPR	CG	Z
0.500	12.70	HH-82	3.25	82.6	.400	10.2	5.5	.96	1.6	42	9.0	40	1.00	25.4	0.050	1.3	20.0	SPR	CG	GI
0.500	12.70	12123	3.28	83.3	.372	9.4	15	2.5	1.3	32	19	82	1.41	35.8	0.064	1.6	22.0	SPR	CG	GI
0.500	12.70	S-1238	3.69	93.6	.372	9.4	10	1.8	1.7	43	17	77	1.70	43.1	0.064	1.6	26.5	SST	CG	N
0.500	12.70	11766	3.81	96.8	.354	9.0	24	4.2	1.1	27	26	115	1.75	44.5	0.073	1.9	24.0	SPR	CG	Z
0.500	12.70	WW-60	3.88	98.4	.420	10.7	2.0	.35	2.3	59	4.7	21	.78	19.8	0.040	1.0	18.5	SST	C	N
0.500	12.70	10693	4.00	101.6	.398	10.1	2.8	.83	2.3	58	11	48	1.26	32.1	0.051	1.3	24.8	BC	C	N
0.500	12.70	10290	4.13	104.8	.356	9.0	26	4.5	.97	25	25	110	1.53	38.9	0.072	1.8	21.3	SPR	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.500	12.70	12139	4.19	106.4	.424	10.8	1.4	.25	3.0	75	4.3	19	.87	22.2	0.038	1.0	23.0	SPR	CG	Z
0.500	12.70	3476	4.50	114.3	.356	9.0	29	5.1	.85	22	25	110	1.44	36.6	0.072	1.8	19.0	HD	C	Z
0.500	12.70	11651	4.75	120.7	.408	10.4	1.8	.32	2.9	74	5.3	23	1.84	46.7	0.046	1.2	40.0	SPR	CG	Z
0.500	12.70	K-37	4.75	120.7	.318	8.1	40	7.0	1.2	30	47	208	3.46	87.8	0.091	2.3	38.0	SPR	CG	GI
0.500	12.70	12690	5.50	139.7	.406	10.3	2.4	.43	3.3	84	8.0	36	1.60	40.6	0.047	1.2	33.0	HD	C	BO
0.500	12.70	B15-55	5.50	139.7	.406	10.3	2.6	.46	3.1	78	8.0	36	1.46	37.0	0.047	1.2	31.0	SPR	CG	Z
0.500	12.70	3251	5.50	139.7	.364	9.2	8.9	1.6	2.4	62	22	96	3.06	77.7	0.068	1.7	45.0	SPR	CG	Z
0.500	12.70	12218	5.94	150.8	.336	8.5	42	7.4	.85	22	36	160	1.89	47.9	0.082	2.1	23.0	SPR	CG	Z
0.500	12.70	S-1277	6.50	165.1	.392	10.0	3.2	.55	3.4	85	11	47	2.16	54.9	0.054	1.4	40.0	SST	CG	N
0.500	12.70	12688	9.00	228.6	.376	9.6	4.2	.74	4.0	102	17	75	3.91	99.2	0.062	1.6	62.0	SPR	C	Z
0.500	12.70	3998	10.5	266.7	.356	9.0	7.4	1.3	3.3	85	25	110	4.93	125.3	0.072	1.8	68.5	SPR	CG	Z
0.500	12.70	880	12.0	304.8	.376	9.6	3.1	.54	5.4	138	17	75	5.24	133.1	0.062	1.6	83.5	HD	C	Z
0.500	12.70	886	12.0	304.8	.340	8.6	9.0	1.6	3.8	95	34	149	7.34	186.4	0.080	2.0	90.8	HD	C	Z
0.500	12.70	3155	14.0	355.6	.392	10.0	1.9	.34	5.9	149	11	50	4.03	102.4	0.054	1.4	74.0	SPR	C	Z
0.500	12.70	514	16.0	406.4	.392	10.0	1.4	.24	8.2	209	11	50	5.59	142.0	0.054	1.4	102.0	HD	C	Z
0.515	13.08	V-21	.50	12.7	.371	9.4	296	52	.08	2.1	24	107	.25	6.4	0.072	1.8	3.50	SPR	CG	GI
0.515	13.08	O-115	.56	14.3	.437	11.1	8.9	1.6	.33	8.3	2.9	13	.23	5.9	0.039	1.0	5.00	SST	C	N
0.515	13.08	A14-4	.56	14.3	.401	10.2	74	13	.17	4.4	13	57	.24	6.0	0.057	1.4	4.13	SPR	CG	GI
0.515	13.08	B15-16	.56	14.3	.355	9.0	318	56	.10	2.6	33	146	.34	8.6	0.080	2.0	4.25	SPR	CG	N
0.515	13.08	B15-65	.63	15.9	.481	12.2	.78	.14	.55	14	.43	1.9	.07	1.8	0.017	0.4	3.25	MW	C	Z
0.515	13.08	B2-41	.63	15.9	.443	11.3	2.4	.42	.27	6.7	.63	2.8	.36	9.1	0.036	0.9	10.0	SST	CG	N
0.515	13.08	3258	.63	15.9	.345	8.8	629	110	.06	1.6	39	173	.38	9.7	0.085	2.2	3.50	SPR	C	Z
0.515	13.08	2657	.69	17.4	.345	8.8	290	51	.13	3.4	39	173	.45	11.3	0.085	2.2	5.25	SPR	CG	Z
0.515	13.08	3136	.75	19.1	.407	10.3	36	6.2	.31	7.8	11	49	.30	7.5	0.054	1.4	5.50	SPR	CG	Z
0.515	13.08	W-37	.75	19.1	.407	10.3	25	4.4	.37	9.4	9.3	41	.38	9.6	0.054	1.4	7.00	SPR	CG	Z
0.515	13.08	2640	.78	19.8	.391	9.9	87	15	.26	6.7	23	101	.29	7.3	0.062	1.6	4.75	MW	CG	Z
0.515	13.08	A15-70	.81	20.6	.411	10.4	19	3.3	.45	11	8.4	37	.36	9.2	0.052	1.3	7.00	SST	CG	N
0.515	13.08	3389	.81	20.6	.391	9.9	57	10	.29	7.3	16	73	.37	9.4	0.062	1.6	6.00	SPR	CG	Z
0.515	13.08	DD-96	.81	20.6	.355	9.0	131	23	.23	5.9	31	136	.54	13.7	0.080	2.0	6.75	SST	CG	N
0.515	13.08	FF-20	.88	22.2	.455	11.6	3.1	.55	.69	17	2.2	9.6	.19	4.8	0.030	0.8	5.25	MW	C	Z
0.515	13.08	Y-23	.88	22.2	.415	10.5	22	3.9	.39	9.9	8.7	39	.30	7.6	0.050	1.3	6.00	SPR	CG	N
0.515	13.08	S-1060	.88	22.2	.405	10.3	20	3.4	.44	11	8.5	38	.44	11.2	0.055	1.4	8.00	SST	CG	N
0.515	13.08	3841	.94	23.8	.331	8.4	272	48	.17	4.4	47	209	.64	16.4	0.092	2.3	7.00	HD	CG	GI
0.515	13.08	00-79	.97	24.6	.435	11.0	4.6	.80	.63	16	2.9	13	.34	8.6	0.040	1.0	8.50	SST	CG	N
0.515	13.08	KK-48	1.00	25.4	.455	11.6	3.4	.60	.85	22	2.9	13	.15	3.8	0.030	0.8	5.00	MW	CG	N
0.515	13.08	B3-36	1.00	25.4	.443	11.3	6.8	1.2	.72	18	4.9	22	.23	5.7	0.036	0.9	5.25	MW	C	N
0.515	13.08	K-29	1.00	25.4	.419	10.6	10	1.8	.60	15	6.3	28	.40	10.1	0.048	1.2	8.25	SST	CG	N
0.515	13.08	WW-43	1.00	25.4	.379	9.6	63	11	.34	8.7	22	96	.58	14.7	0.068	1.7	7.50	SPR	C	Z
0.515	13.08	S-1171	1.00	25.4	.355	9.0	124	22	.25	6.3	31	136	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.515	13.08	Y-30	1.06	27.0	.453	11.5	2.0	.34	.81	21	1.6	7.1	.25	6.3	0.031	0.8	8.00	MW	CG	Z
0.515	13.08	10838	1.06	27.0	.447	11.4	2.4	.42	.75	19	1.8	7.9	.32	8.0	0.034	0.9	9.25	SPR	CG	Z
0.515	13.08	12481	1.06	27.0	.425	10.8	7.6	1.3	.59	15	4.5	20	.47	12.0	0.045	1.1	9.50	MW	C	N
0.515	13.08	11107	1.13	28.6	.457	11.6	1.5	.26	.86	22	1.3	5.7	.26	6.6	0.029	0.7	8.00	MW	C	Z
0.515	13.08	S-235	1.13	28.6	.453	11.5	1.4	.25	.81	21	1.1	5.0	.32	8.1	0.031	0.8	9.25	SST	C	N
0.515	13.08	2715	1.13	28.6	.387	9.8	48	8.4	.52	13	25	111	.48	12.2	0.064	1.6	7.50	MW	CG	Z
0.515	13.08	S-1051	1.13	28.6	.305	7.7	367	64	.17	4.4	63	282	.84	21.3	0.105	2.7	8.00	SST	CG	N
0.515	13.08	B10-64	1.16	29.4	.379	9.6	53	9.3	.41	10	22	96	.58	14.7	0.068	1.7	8.50	SPR	CG	Z
0.515	13.08	S-1613	1.19	30.2	.407	10.3	14	2.4	.65	16	9.0	40	.54	13.7	0.054	1.4	10.0	SST	CG	N
0.515	13.08	11338	1.19	30.2	.341	8.7	175	31	.24	6.0	42	185	.78	19.9	0.087	2.2	8.00	SPR	C	Z
0.515	13.08	S-1032	1.25	31.8	.459	11.7	.42	.07	.75	19	.31	1.4	.50	12.8	0.028	0.7	18.0	SST	CG	N
0.515	13.08	3972	1.25	31.8	.391	9.9	48	8.4	.34	8.7	16	73	.42	10.6	0.062	1.6	6.75	SPR	CG	Z
0.515	13.08	10460	1.30	32.9	.397	10.1	27	4.8	.49	12	13	59	.47	12.0	0.059	1.5	8.00	SST	CG	N
0.515	13.08	2526	1.38	34.9	.427	10.8	9.4	1.6	.68	17	6.4	29	.37	9.5	0.044	1.1	7.50	SPR	C	Z
0.515	13.08	3535	1.41	35.7	.421	10.7	12	2.2	.87	22	11	48	.35	9.0	0.047	1.2	7.50	MW	CG	Z
0.515	13.08	10809	1.50	38.1	.485	12.3	.08	.01	1.4	34	.11	.50	.15	3.8	0.015	0.4	9.00	MW	C	N
0.515	13.08	2560	1.50	38.1	.451	11.5	1.7	.29	1.2	30	2.0	8.8	.32	8.1	0.032	0.8	10.0	HD	CG	Z
0.515	13.08	Z-24	1.50	38.1	.451	11.5	2.7	.47	.98	25	2.6	12	.26	6.5	0.032	0.8	7.00	SPR	C	Z
0.515	13.08	10718	1.50	38.1	.433	11.0	5.7	.99	.92	23	5.2	23	.40	10.2	0.041	1.0	8.75	SPR	C	Z
0.515	13.08	S-1139	1.50	38.1	.411	10.4	9.2	1.6	.82	21	7.6	34	.68	17.2	0.052	1.3	12.0	SST	C	N
0.515	13.08	2709	1.53	38.9	.361	9.2	69	12	.43	11	29	130	.83	21.0	0.077	2.0	10.8	SPR	CG	Z
0.515	13.08	10178	1.56	39.7	.433	11.0	3.2	.56	.99	25	3.1	14	.57	14.6	0.041	1.0	14.0	SPR	CG	Z
0.515	13.08	S-407	1.56	39.7	.433	11.0	4.2	.74	1.1	28	4.7	21	.45	11.5	0.041	1.0	10.0	SST	C	N
0.515	13.08	2513	1.56	39.7	.395	10.0	22	3.8	.90	23	20	88	.66	16.8	0.060	1.5	11.0	MW	CG	Z
0.515	13.08	O-69	1.56	39.7	.395	10.0	19	3.4	.72	18	14	62	.66	16.8	0.060	1.5	11.0	SST	CG	N
0.515	13.08	3046	1.56	39.7	.355	9.0	79	14	.41	10	33	146	.88	22.4	0.080	2.0	11.0	SPR	CG	Z
0.515	13.08	S-1162	1.63	41.3	.439	11.2	2.5	.44	1.2	29	2.9	13	.48	12.1	0.038	1.0	11.5	SST	C	N
0.515	13.08	3924	1.63	41.3	.391	9.9	25	4.4	.65	16	16	73	.74	18.9	0.062	1.6	11.0	HD	C	Z
0.515	13.08	2696	1.63	41.3	.381	9.7	36	6.3	.80	20	29	127	.74	18.7	0.067	1.7	11.0	MW	CG	Z
0.515	13.08	12292	1.66	42.1	.399	10.1	17	3.0	.79	20	14	60	.70	17.7	0.058	1.5	12.0	SPR	CG	N
0.515	13.08	S-1501	1.81	46.0	.459	11.7	1.1	.19	1.5	37	1.6	7.3	.22	5.7	0.028	0.7	8.00	SST	CG	N
0.515	13.08	11621	1.88	47.6	.411	10.4	7.6	1.3	1.0	26	7.9	35	.83	21.1	0.052	1.3	16.0	SPR	CG	Z
0.515	13.08	11753	1.97	50.0	.433	11.0	6.4	1.1	.82	21	5.2	23	.37	9.4	0.041	1.0	8.00	SPR	C	Z
0.515	13.08	4357	2.00	50.8	.453	11.5	1.5	.26	1.7	43	2.5	11	.31	7.9	0.031	0.8	10.0	MW	CG	Z
0.515	13.08	12748	2.00	50.8	.421	10.7	6.8	1.2	1.1	29	7.8	35	.61	15.5	0.047	1.2	12.0	SPR	C	N
0.515	13.08	10926	2.00	50.8	.399	10.1	16	2.8	.83	21	14	60	.78	19.9	0.058	1.5	12.5	SPR	C	Z
0.515	13.08	K-35	2.13	54.0	.409	10.4	9.1	1.6	1.1	27	9.7	43	.69	17.5	0.053	1.3	13.0	SST	CG	N
0.515	13.08	S-397	2.16	54.8	.329	8.4	101	18	.45	11	45	200	1.33	33.9	0.093	2.4	14.3	SST	CG	N
0.515	13.08	3689	2.22	56.4	.439	11.2	1.8	.32	1.5	39	2.8	13	.68	17.4	0.038	1.0	17.0	SPR	C	Z
0.515	13.08	3475	2.25	57.2	.355	9.0	64	11	.51	13	33	146	1.06	26.9	0.080	2.0	13.3	SPR	CG	Z
0.515	13.08	12603	2.33	59.1	.379	9.6	30	5.2	1.0	25	30	133	.99	25.0	0.068	1.7	13.5	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.515	13.08	S-278	2.50	63.5	.411	10.4	6.1	1.1	1.5	38	9.2	41	.94	23.8	0.052	1.3	17.0	SST	C	N
0.515	13.08	3429	2.63	66.7	.265	6.7	438	77	.24	6.2	107	476	1.94	49.2	0.125	3.2	15.5	SPR	CG	Z
0.515	13.08	A13-37	2.66	67.5	.369	9.4	25	4.3	.95	24	24	105	1.46	37.1	0.073	1.9	19.0	SST	C	N
0.515	13.08	11635	2.69	68.2	.415	10.5	5.6	.98	1.6	40	8.7	39	.90	22.9	0.050	1.3	18.0	SPR	CG	Z
0.515	13.08	3838	2.69	68.2	.387	9.8	11	2.0	1.1	28	12	55	1.60	40.6	0.064	1.6	25.0	SPR	CG	Z
0.515	13.08	2558	2.69	68.2	.265	6.7	382	67	.39	9.9	150	665	2.19	55.6	0.125	3.2	17.5	MW	CG	Z
0.515	13.08	3140	2.75	69.9	.437	11.1	4.2	.74	1.1	27	4.5	20	.40	10.2	0.039	1.0	9.25	SPR	C	Z
0.515	13.08	12300	3.00	76.2	.395	10.0	11	1.9	1.4	34	15	66	1.20	30.5	0.060	1.5	20.0	SPR	CG	Z
0.515	13.08	2510	3.25	82.6	.399	10.1	12	2.1	1.6	41	19	83	.96	24.3	0.058	1.5	16.5	MW	CG	Z
0.515	13.08	B-26	3.28	83.3	.433	11.0	3.8	.67	1.4	35	5.2	23	.53	13.5	0.041	1.0	12.0	HD	C	N
0.515	13.08	11557	3.59	91.3	.387	9.8	12	2.1	1.5	38	18	80	1.60	40.6	0.064	1.6	24.0	SPR	CG	N
0.515	13.08	10928	4.00	101.6	.347	8.8	40	7.0	.95	24	38	168	2.14	54.4	0.084	2.1	24.5	SPR	C	Z
0.515	13.08	10705	5.31	134.9	.315	8.0	54	9.5	1.1	28	60	265	3.90	99.1	0.100	2.5	39.0	SPR	CG	Z
0.515	13.08	11517	5.50	139.7	.421	10.7	2.4	.41	3.3	84	7.8	35	1.50	38.2	0.047	1.2	31.0	SPR	CG	Z
0.515	13.08	12298	6.00	152.4	.421	10.7	3.6	.63	2.2	55	7.8	35	.99	25.1	0.047	1.2	21.0	SPR	CG	Z
0.515	13.08	11431	7.63	193.7	.411	10.4	1.8	.31	4.3	110	7.6	34	3.30	83.9	0.052	1.3	62.5	HD	C	Z
0.515	13.08	1609	8.50	215.9	.391	9.9	5.3	.93	3.1	78	16	73	2.79	70.9	0.062	1.6	45.0	SPR	CG	Z
0.515	13.08	S-188	8.75	222.3	.391	9.9	4.6	.81	3.3	85	15	69	2.79	70.9	0.062	1.6	45.0	SST	CG	N
0.515	13.08	1809	12.0	304.8	.391	9.9	2.9	.51	7.0	177	20	91	5.02	127.6	0.062	1.6	80.0	MW	C	Z
0.531	13.49	N-81	.28	7.1	.437	11.1	62	11	.12	3.1	7.6	34	.14	3.6	0.047	1.2	3.00	SPR	CG	N
0.531	13.49	3050	.31	7.9	.467	11.9	12	2.1	.21	5.3	2.5	11	.10	2.4	0.032	0.8	3.00	SPR	CG	Z
0.531	13.49	2851	.44	11.1	.485	12.3	1.5	.27	.32	8.2	.50	2.2	.12	2.9	0.023	0.6	4.00	MW	C	Z
0.531	13.49	B10-36	.44	11.1	.441	11.2	19	3.3	.22	5.7	4.2	19	.21	5.4	0.045	1.1	4.75	SPR	CG	Z
0.531	13.49	I-14	.50	12.7	.441	11.2	30	5.2	.21	5.3	6.2	28	.16	4.0	0.045	1.1	3.50	SST	CG	N
0.531	13.49	S-17	.50	12.7	.437	11.1	27	4.7	.26	6.7	7.1	32	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.531	13.49	PP-32	.56	14.3	.387	9.8	107	19	.15	3.8	16	70	.41	10.5	0.072	1.8	5.75	SPR	CG	Z
0.531	13.49	G-57	.56	14.3	.371	9.4	186	33	.16	4.1	30	133	.40	10.2	0.080	2.0	5.00	SST	CG	N
0.531	13.49	S-823	.63	15.9	.481	12.2	.75	.13	.43	11	.32	1.4	.20	5.1	0.025	0.6	7.00	SST	C	N
0.531	13.49	2670	.63	15.9	.465	11.8	6.9	1.2	.40	10	2.8	12	.17	4.2	0.033	0.8	4.00	SPR	C	Z
0.531	13.49	M-131	.63	15.9	.459	11.7	5.9	1.0	.45	11	2.6	12	.18	4.6	0.036	0.9	5.00	SST	CG	N
0.531	13.49	L-35	.63	15.9	.407	10.3	73	13	.21	5.2	15	67	.28	7.1	0.062	1.6	4.50	SST	CG	N
0.531	13.49	F-54	.66	16.7	.405	10.3	88	15	.19	4.8	17	74	.28	7.2	0.063	1.6	4.50	HD	CG	Z
0.531	13.49	YY-58	.69	17.4	.463	11.8	7.8	1.4	.39	9.9	3.0	13	.17	4.3	0.034	0.9	4.00	SPR	C	GI
0.531	13.49	N-132	.69	17.4	.407	10.3	69	12	.23	5.9	16	71	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.531	13.49	3906	.72	18.2	.451	11.5	7.8	1.4	.44	11	3.4	15	.28	7.1	0.040	1.0	6.00	SPR	C	Z
0.531	13.49	CC-53	.75	19.1	.467	11.9	4.0	.71	.56	14	2.3	10	.19	4.9	0.032	0.8	5.00	MW	C	Z
0.531	13.49	2586	.75	19.1	.449	11.4	14	2.4	.51	13	7.0	31	.18	4.7	0.041	1.0	4.50	MW	CG	Z
0.531	13.49	4269	.75	19.1	.437	11.1	15	2.7	.42	11	6.5	29	.33	8.4	0.047	1.2	6.00	SPR	C	Z
0.531	13.49	B11-51	.75	19.1	.403	10.2	53	9.2	.31	8.0	16	73	.38	9.8	0.064	1.6	6.00	SST	CG	N
0.531	13.49	10260	.75	19.1	.349	8.9	386	68	.11	2.9	44	197	.46	11.6	0.091	2.3	5.00	SPR	CG	Z
0.531	13.49	1953	.78	19.8	.487	12.4	.68	.12	.63	16	.43	1.9	.15	3.8	0.022	0.6	5.75	MW	C	Z
0.531	13.49	S-919	.78	19.8	.387	9.8	99	17	.22	5.6	22	98	.40	10.1	0.072	1.8	5.50	SST	CG	N
0.531	13.49	2592	.78	19.8	.321	8.2	646	113	.10	2.6	67	296	.58	14.7	0.105	2.7	5.50	SPR	CG	Z
0.531	13.49	B11-37	.81	20.6	.467	11.9	4.0	.71	.63	16	2.5	11	.16	4.1	0.032	0.8	5.00	SPR	CG	N
0.531	13.49	S-446	.81	20.6	.407	10.3	72	13	.21	5.3	15	67	.28	7.1	0.062	1.6	4.50	SST	CG	N
0.531	13.49	2787	.81	20.6	.345	8.8	320	56	.15	3.7	47	210	.56	14.2	0.093	2.4	6.00	SPR	CG	Z
0.531	13.49	2559	.84	21.4	.423	10.7	23	3.9	.47	12	10	47	.38	9.6	0.054	1.4	7.00	HD	CG	Z
0.531	13.49	V-29	.84	21.4	.407	10.3	45	7.8	.34	8.5	15	67	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.531	13.49	S-895	.88	22.2	.467	11.9	3.5	.62	.67	17	2.4	10	.16	4.1	0.032	0.8	5.00	SST	CG	N
0.531	13.49	10734	.88	22.2	.449	11.4	8.6	1.5	.59	15	5.1	22	.25	6.2	0.041	1.0	6.00	SPR	CG	Z
0.531	13.49	3836	.88	22.2	.427	10.8	32	5.6	.30	7.6	9.5	42	.31	7.9	0.052	1.3	5.00	SPR	C	Z
0.531	13.49	2636	.91	23.0	.417	10.6	28	5.0	.44	11	12	55	.40	10.1	0.057	1.4	7.00	HD	CG	Z
0.531	13.49	JJ-17	.94	23.8	.471	12.0	1.9	.32	.70	18	1.3	5.7	.24	6.1	0.030	0.8	7.00	MW	C	Z
0.531	13.49	S-1412	.94	23.8	.449	11.4	8.6	1.5	.55	14	4.7	21	.23	5.7	0.041	1.0	5.50	SST	CG	N
0.531	13.49	2896	.94	23.8	.429	10.9	22	3.8	.41	10	9.0	40	.36	9.1	0.051	1.3	6.00	SPR	C	Z
0.531	13.49	I-47	.94	23.8	.407	10.3	21	3.6	.19	4.9	4.0	18	.74	18.9	0.062	1.6	12.0	HD	CG	N
0.531	13.49	A12-12	1.00	25.4	.471	12.0	1.6	.28	.74	19	1.2	5.3	.26	6.7	0.030	0.8	7.75	MW	C	N
0.531	13.49	A12-30	1.00	25.4	.471	12.0	1.5	.27	.73	19	1.1	5.0	.27	6.9	0.030	0.8	8.00	MW	C	Z
0.531	13.49	11204	1.00	25.4	.467	11.9	1.7	.30	.70	18	1.2	5.4	.30	7.5	0.032	0.8	8.25	SST	C	N
0.531	13.49	S-81	1.00	25.4	.443	11.3	10	1.8	.57	15	5.8	26	.31	7.8	0.044	1.1	6.00	SST	C	N
0.531	13.49	11208	1.00	25.4	.407	10.3	33	5.8	.45	11	15	67	.47	11.8	0.062	1.6	7.50	SST	CG	N
0.531	13.49	S-916	1.00	25.4	.405	10.3	64	11	.25	6.2	16	70	.32	8.0	0.063	1.6	5.00	SST	CG	N
0.531	13.49	10034	1.00	25.4	.381	9.7	120	21	.22	5.6	26	117	.45	11.4	0.075	1.9	6.00	SPR	CG	Z
0.531	13.49	11200	1.03	26.2	.469	11.9	1.6	.27	.75	19	1.2	5.3	.28	7.1	0.031	0.8	8.00	SST	C	N
0.531	13.49	B10-39	1.03	26.2	.441	11.2	8.9	1.6	.68	17	6.1	27	.35	8.9	0.045	1.1	7.75	SPR	CG	N
0.531	13.49	12401	1.03	26.2	.321	8.2	432	76	.15	3.9	67	296	.73	18.5	0.105	2.7	7.00	SPR	CG	N
0.531	13.49	12497	1.06	27.0	.473	12.0	1.4	.24	.81	21	1.1	5.0	.25	6.5	0.029	0.7	7.75	MW	C	N
0.531	13.49	10691	1.06	27.0	.463	11.8	2.0	.34	.72	18	1.4	6.3	.34	8.6	0.034	0.9	10.0	SPR	CG	Z
0.531	13.49	12313	1.06	27.0	.435	11.0	11	1.9	.62	16	6.7	30	.44	11.3	0.048	1.2	8.25	HD	C	Z
0.531	13.49	B7-10	1.08	27.4	.469	11.9	2.7	.47	.80	20	2.1	9.5	.20	5.1	0.031	0.8	5.50	SST	C	N
0.531	13.49	10585	1.13	28.6	.407	10.3	51	9.0	.31	7.9	16	71	.43	11.0	0.062	1.6	6.00	SPR	C	Z
0.531	13.49	B12-47	1.13	28.6	.405	10.3	47	8.1	.36	9.1	17	74	.43	10.8	0.063	1.6	6.75	SPR	CG	N
0.531	13.49	1751	1.13	28.6	.281	7.1	1234	216	.08	2.2	105	466	.78	19.8	0.125	3.2	6.25	SPR	CG	Z
0.531	13.49	S-57	1.19	30.2	.437	11.1	7.8	1.4	.72	18	5.6	25	.47	11.9	0.047	1.2	9.00	SST	C	N
0.531	13.49	2616	1.19	30.2	.385	9.8	61	11	.40	10	24	109	.66	16.7	0.073	1.9	9.00	HD	CG	Z
0.531	13.49	S-1449	1.22	31.0	.423	10.7	14	2.4	.72	18	9.7	43	.50	12.7	0.054	1.4	9.25	SST	CG	N
0.531	13.49	2689	1.22	31.0	.407	10.3	26	4.5	.60	15	15	69	.62	15.7	0.062	1.6	10.0	HD	CG	Z
0.531	13.49	S-1348	1.22	31.0	.321	8.2	314	55	.20	5.0	62	275	.87	22.0	0.105	2.7	8.25	SST	CG	N
0.531	13.49	S-136	1.25	31.8	.461	11.7	4.4	.77	.67	17	3.0	13	.23	5.8	0.035	0.9	5.50	SST	C	N
0.531	13.49	S-18	1.25	31.8	.387	9.8	45	7.8	.49	12	22	98	.70	17.8	0.072	1.8	9.75	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.531	13.49	S-847	1.28	32.5	.467	11.9	.69	.12	.72	18	.49	2.2	.57	14.4	0.032	0.8	17.8	SST	CG	N
0.531	13.49	S-990	1.28	32.5	.441	11.2	12	2.1	.52	13	6.2	28	.26	6.6	0.045	1.1	5.75	SST	CG	N
0.531	13.49	A13-63	1.31	33.3	.453	11.5	7.0	1.2	.62	16	4.4	19	.23	5.9	0.039	1.0	6.00	SPR	CG	N
0.531	13.49	B1-68	1.31	33.3	.415	10.5	26	4.5	.51	13	13	58	.46	11.8	0.058	1.5	8.00	SPR	CG	Z
0.531	13.49	OO-20	1.31	33.3	.311	7.9	353	62	.21	5.3	73	327	1.10	27.9	0.110	2.8	10.0	SPR	CG	GI
0.531	13.49	Z-26	1.34	34.1	.471	12.0	1.6	.29	1.1	28	1.8	8.1	.24	6.1	0.030	0.8	7.00	SST	C	N
0.531	13.49	S-1493	1.38	34.9	.473	12.0	1.4	.24	1.2	30	1.6	7.3	.20	5.2	0.029	0.7	7.00	SST	CG	N
0.531	13.49	3191	1.38	34.9	.403	10.2	30	5.2	.59	15	18	78	.64	16.3	0.064	1.6	10.0	SPR	CG	GI
0.531	13.49	3685	1.41	35.7	.387	9.8	57	10	.41	10	23	104	.65	16.5	0.072	1.8	9.00	SPR	CG	Z
0.531	13.49	B18-192	1.41	35.7	.321	8.2	301	53	.22	5.6	67	296	1.00	25.3	0.105	2.7	9.50	SPR	CG	Z
0.531	13.49	2572	1.44	36.5	.435	11.0	12	2.2	.90	23	11	50	.36	9.1	0.048	1.2	7.50	MW	CG	Z
0.531	13.49	10700	1.44	36.5	.423	10.7	10	1.8	.74	19	7.5	34	.70	17.8	0.054	1.4	13.0	SPR	CG	GI
0.531	13.49	B12-56	1.44	36.5	.385	9.8	71	12	.34	8.8	24	109	.58	14.8	0.073	1.9	8.00	SPR	CG	Z
0.531	13.49	3956	1.44	36.5	.321	8.2	301	53	.22	5.6	67	296	1.00	25.3	0.105	2.7	9.50	SPR	CG	Z
0.531	13.49	S-1487	1.50	38.1	.477	12.1	1.2	.20	1.2	31	1.4	6.3	.20	5.1	0.027	0.7	6.50	SST	C	N
0.531	13.49	10137	1.50	38.1	.461	11.7	3.5	.62	.89	23	3.2	14	.28	7.1	0.035	0.9	7.00	SPR	C	Z
0.531	13.49	S-1509	1.50	38.1	.461	11.7	1.7	.30	1.1	27	1.8	8.2	.42	10.7	0.035	0.9	11.0	SST	C	N
0.531	13.49	B5-46	1.50	38.1	.443	11.3	8.9	1.6	.70	18	6.2	28	.32	8.1	0.044	1.1	7.25	SPR	CG	N
0.531	13.49	3477	1.50	38.1	.421	10.7	14	2.4	.83	21	11	50	.61	15.4	0.055	1.4	11.0	SPR	CG	Z
0.531	13.49	4390	1.50	38.1	.327	8.3	282	49	.22	5.5	61	273	.92	23.3	0.102	2.6	9.00	SPR	CG	Z
0.531	13.49	10803	1.53	38.9	.453	11.5	3.5	.62	1.2	29	4.1	18	.35	8.9	0.039	1.0	9.00	SST	CG	N
0.531	13.49	2904	1.56	39.7	.361	9.2	107	19	.35	9.0	38	169	.84	21.3	0.085	2.2	10.0	SPR	CG	Z
0.531	13.49	QQ-30	1.63	41.3	.483	12.3	.49	.09	1.4	35	.68	3.0	.23	5.8	0.024	0.6	8.50	SST	C	N
0.531	13.49	3415	1.63	41.3	.467	11.9	2.0	.35	1.3	32	2.5	11	.29	7.3	0.032	0.8	8.00	HD	C	Z
0.531	13.49	3478	1.63	41.3	.445	11.3	3.5	.62	1.0	26	3.6	16	.60	15.3	0.043	1.1	14.0	SPR	CG	Z
0.531	13.49	I-58	1.63	41.3	.411	10.4	19	3.4	.70	18	14	61	.60	15.2	0.060	1.5	10.0	SST	CG	N
0.531	13.49	11390	1.63	41.3	.401	10.2	28	4.9	.65	17	18	82	.72	18.2	0.065	1.7	11.0	SPR	CG	Z
0.531	13.49	10303	1.63	41.3	.371	9.4	61	11	.52	13	32	142	1.00	25.4	0.080	2.0	12.5	SPR	CG	Z
0.531	13.49	11246	1.66	42.1	.407	10.3	21	3.6	.77	20	16	71	.74	18.9	0.062	1.6	12.0	SPR	CG	Z
0.531	13.49	11134	1.69	42.8	.431	10.9	8.1	1.4	1.0	27	8.5	38	.60	15.2	0.050	1.3	12.0	SPR	CG	GI
0.531	13.49	FF-32	1.75	44.5	.471	12.0	1.3	.23	1.5	37	1.9	8.5	.30	7.6	0.030	0.8	9.00	MW	C	N
0.531	13.49	10629	1.78	45.2	.403	10.2	22	3.8	.81	21	18	78	.83	21.1	0.064	1.6	13.0	SPR	CG	Z
0.531	13.49	12519	1.88	47.6	.467	11.9	2.1	.37	1.6	41	3.4	15	.28	7.1	0.032	0.8	7.75	MW	C	GI
0.531	13.49	2901	1.88	47.6	.391	9.9	31	5.4	.71	18	22	96	.95	24.0	0.070	1.8	13.5	SPR	CG	Z
0.531	13.49	3974	1.88	47.6	.347	8.8	119	21	.39	9.8	46	203	1.22	31.0	0.092	2.3	12.3	SPR	C	Z
0.531	13.49	U-46	2.00	50.8	.449	11.4	2.5	.44	1.4	36	3.6	16	.57	14.6	0.041	1.0	14.0	SST	CG	N
0.531	13.49	3671	2.03	51.6	.385	9.8	42	7.4	.57	15	24	109	.95	24.1	0.073	1.9	12.0	SPR	C	Z
0.531	13.49	11938	2.09	53.2	.367	9.3	53	9.3	.64	16	34	152	1.27	32.3	0.082	2.1	15.5	SPR	CG	Z
0.531	13.49	S-3129	2.13	54.0	.466	11.8	1.1	.18	1.7	44	1.8	8.0	.40	10.2	0.033	0.8	12.0	SST	C	N
0.531	13.49	11761	2.19	55.6	.413	10.5	14	2.5	.96	24	14	61	.80	20.2	0.059	1.5	13.5	SPR	CG	Z
0.531	13.49	10532	2.22	56.4	.383	9.7	30	5.2	.86	22	25	113	1.28	32.4	0.074	1.9	17.3	SPR	CG	Z
0.531	13.49	S-968	2.25	57.2	.405	10.3	9.6	1.7	.80	20	7.7	34	1.45	36.8	0.063	1.6	22.0	SST	C	N
0.531	13.49	4364	2.38	60.3	.407	10.3	15	2.7	1.0	27	16	71	.96	24.4	0.062	1.6	15.5	SPR	CG	Z
0.531	13.49	S-1367	2.44	61.9	.407	10.3	16	2.7	.96	24	15	67	.84	21.3	0.062	1.6	13.5	SST	CG	N
0.531	13.49	10743	2.50	63.5	.469	11.9	1.9	.34	1.7	42	3.2	14	.26	6.7	0.031	0.8	7.50	MW	C	GI
0.531	13.49	2967	2.50	63.5	.449	11.4	4.1	.71	1.2	32	5.1	22	.47	12.0	0.041	1.0	10.5	SPR	C	Z
0.531	13.49	11818	2.50	63.5	.407	10.3	16	2.8	1.0	26	16	71	.93	23.6	0.062	1.6	15.0	SPR	CG	Z
0.531	13.49	11560	2.78	70.6	.403	10.2	12	2.1	1.3	34	16	72	1.44	36.6	0.064	1.6	21.5	SPR	CG	Z
0.531	13.49	11547	2.81	71.4	.401	10.2	13	2.3	1.4	35	18	82	1.38	35.1	0.065	1.7	21.3	SPR	CG	Z
0.531	13.49	S-3089	2.88	73.0	.407	10.3	6.8	1.2	1.1	27	7.2	32	1.81	46.1	0.062	1.6	28.3	SST	C	N
0.531	13.49	12067	3.38	85.7	.359	9.1	64	11	.62	16	39	175	1.38	35.0	0.086	2.2	16.0	SPR	CG	Z
0.531	13.49	3676	3.44	87.3	.395	10.0	14	2.5	1.5	38	21	93	1.63	41.5	0.068	1.7	24.0	SPR	CG	Z
0.531	13.49	3699	4.06	103.2	.405	10.3	9.5	1.7	1.8	45	17	74	1.59	40.4	0.063	1.6	25.3	SPR	CG	GI
0.531	13.49	11234	4.13	104.8	.437	11.1	3.3	.59	2.3	57	7.6	34	.96	24.5	0.047	1.2	20.5	SPR	CG	Z
0.531	13.49	11243	4.19	106.4	.407	10.3	14	2.4	1.2	30	16	71	1.05	26.8	0.062	1.6	17.0	HD	CG	Z
0.531	13.49	S-1566	4.81	122.2	.333	8.5	74	13	.71	18	52	233	2.23	56.6	0.099	2.5	22.5	SST	CG	N
0.531	13.49	2770	5.75	146.1	.337	8.6	43	7.5	1.2	32	53	237	3.72	94.4	0.097	2.5	38.0	SPR	CG	Z
0.531	13.49	10824	6.25	158.8	.403	10.2	5.8	1.0	3.0	76	18	78	2.72	69.1	0.064	1.6	42.5	SPR	CG	Z
0.531	13.49	12273	6.50	165.1	.437	11.1	3.3	.57	2.3	59	7.6	34	.99	25.1	0.047	1.2	21.0	SPR	CG	Z
0.540	13.72	71633	.50	12.7	.458	11.6	21	3.7	.33	8.3	6.9	31	.14	3.6	0.041	1.0	3.50	MW	CG	N
0.540	13.72	71633S	.50	12.7	.458	11.6	18	3.1	.26	6.6	4.7	21	.14	3.6	0.041	1.0	3.50	SST	CG	N
0.540	13.72	71646	.50	12.7	.448	11.4	31	5.4	.31	7.9	9.7	43	.17	4.4	0.046	1.2	3.75	MW	CG	N
0.540	13.72	71646S	.50	12.7	.448	11.4	26	4.6	.25	6.3	6.5	29	.17	4.4	0.046	1.2	3.75	SST	CG	N
0.540	13.72	71659	.50	12.7	.432	11.0	57	10	.25	6.4	15	65	.21	5.3	0.054	1.4	3.88	MW	CG	N
0.540	13.72	71659S	.50	12.7	.432	11.0	49	8.5	.20	5.1	9.8	44	.21	5.3	0.054	1.4	3.88	SST	CG	N
0.540	13.72	71672	.50	12.7	.424	10.8	76	13	.24	6.0	18	80	.22	5.7	0.058	1.5	3.88	MW	CG	N
0.540	13.72	71672S	.50	12.7	.424	10.8	64	11	.19	4.8	12	54	.22	5.7	0.058	1.5	3.88	SST	CG	N
0.540	13.72	71685	.50	12.7	.414	10.5	105	18	.22	5.5	23	102	.25	6.4	0.063	1.6	4.00	MW	CG	N
0.540	13.72	71685S	.50	12.7	.414	10.5	90	16	.17	4.4	15	69	.25	6.4	0.063	1.6	4.00	SST	CG	N
0.540	13.72	71698	.50	12.7	.406	10.3	137	24	.20	5.1	27	122	.27	6.8	0.067	1.7	4.00	MW	CG	N
0.540	13.72	71698S	.50	12.7	.406	10.3	116	20	.16	4.0	19	83	.27	6.8	0.067	1.7	4.00	SST	CG	N
0.540	13.72	71634	.63	16.0	.458	11.6	16	2.9	.42	11	6.9	31	.16	4.2	0.041	1.0	4.00	MW	CG	N
0.540	13.72	71634S	.63	16.0	.458	11.6	14	2.4	.34	8.5	4.7	21	.16	4.2	0.041	1.0	4.00	SST	CG	N
0.540	13.72	71647	.63	16.0	.448	11.4	24	4.2	.40	10	9.7	43	.20	5.0	0.046	1.2	4.25	MW	CG	N
0.540	13.72	71647S	.63	16.0	.448	11.4	20	3.6	.32	8.1	6.5	29	.20	5.0	0.046	1.2	4.25	SST	CG	N
0.540	13.72	71660	.63	16.0	.432	11.0	43	7.6	.33	8.5	15	65	.24	6.2	0.054	1.4	4.50	MW	CG	N
0.540	13.72	71660S	.63	16.0	.432	11.0	37	6.5	.27	6.8	9.8	44	.24	6.2	0.054	1.4	4.50	SST	CG	N
0.540	13.72	71673	.63	16.0	.424	10.8	57	10	.31	8.0	18	80	.26	6.6	0.058	1.5	4.50	MW	CG	N
0.540	13.72	71673S	.63	16.0	.424	10.8	49	8.5	.25	6.3	12	54	.26	6.6	0.058	1.5	4.50	SST	CG	N
0.540	13.72	71686	.63	16.0	.414	10.5	79	14	.29	7.4	23	102	.29	7.4	0.063	1.6	4.63	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.540	13.72	71686S	.63	16.0	.414	10.5	67	12	.23	5.9	15	69	.29	7.4	0.063	1.6	4.63	SST	CG	N
0.540	13.72	71699	.63	16.0	.406	10.3	102	18	.27	6.8	27	122	.31	7.9	0.067	1.7	4.63	MW	CG	N
0.540	13.72	71699S	.63	16.0	.406	10.3	87	15	.21	5.4	19	83	.31	7.9	0.067	1.7	4.63	SST	CG	N
0.540	13.72	71635	.75	19.1	.458	11.6	13	2.3	.52	13	6.9	31	.18	4.7	0.041	1.0	4.50	MW	CG	N
0.540	13.72	71635S	.75	19.1	.458	11.6	11	2.0	.41	10	4.7	21	.18	4.7	0.041	1.0	4.50	SST	CG	N
0.540	13.72	71648	.75	19.1	.448	11.4	20	3.4	.50	13	9.7	43	.22	5.5	0.046	1.2	4.75	MW	CG	N
0.540	13.72	71648S	.75	19.1	.448	11.4	17	2.9	.39	10	6.5	29	.22	5.5	0.046	1.2	4.75	SST	CG	N
0.540	13.72	71661	.75	19.1	.432	11.0	35	6.1	.42	11	15	65	.27	6.9	0.054	1.4	5.00	MW	CG	N
0.540	13.72	71661S	.75	19.1	.432	11.0	30	5.2	.33	8.4	9.8	44	.27	6.9	0.054	1.4	5.00	SST	CG	N
0.540	13.72	71674	.75	19.1	.424	10.8	46	8.0	.39	9.9	18	80	.30	7.6	0.058	1.5	5.13	MW	CG	N
0.540	13.72	71674S	.75	19.1	.424	10.8	39	6.8	.31	7.9	12	54	.30	7.6	0.058	1.5	5.13	SST	CG	N
0.540	13.72	71687	.75	19.1	.414	10.5	63	11	.36	9.2	23	102	.33	8.4	0.063	1.6	5.25	MW	CG	N
0.540	13.72	71687S	.75	19.1	.414	10.5	54	9.4	.29	7.3	15	69	.33	8.4	0.063	1.6	5.25	SST	CG	N
0.540	13.72	71700	.75	19.1	.406	10.3	81	14	.34	8.6	27	122	.36	9.1	0.067	1.7	5.38	MW	CG	N
0.540	13.72	71700S	.75	19.1	.406	10.3	69	12	.27	6.8	19	83	.36	9.1	0.067	1.7	5.38	SST	CG	N
0.540	13.72	71636	.88	22.4	.458	11.6	11	2.0	.61	16	6.9	31	.20	5.1	0.041	1.0	4.88	MW	CG	N
0.540	13.72	71636S	.88	22.4	.458	11.6	9.5	1.7	.49	12	4.7	21	.20	5.1	0.041	1.0	4.88	SST	CG	N
0.540	13.72	71649	.88	22.4	.448	11.4	16	2.9	.59	15	9.7	43	.24	6.1	0.046	1.2	5.25	MW	CG	N
0.540	13.72	71649S	.88	22.4	.448	11.4	14	2.4	.47	12	6.5	29	.24	6.1	0.046	1.2	5.25	SST	CG	N
0.540	13.72	71662	.88	22.4	.432	11.0	29	5.1	.50	13	15	65	.30	7.7	0.054	1.4	5.63	MW	CG	N
0.540	13.72	71662S	.88	22.4	.432	11.0	25	4.4	.40	10	9.8	44	.30	7.7	0.054	1.4	5.63	SST	CG	N
0.540	13.72	71675	.88	22.4	.424	10.8	38	6.7	.47	12	18	80	.33	8.5	0.058	1.5	5.75	MW	CG	N
0.540	13.72	71675S	.88	22.4	.424	10.8	33	5.7	.37	9.5	12	54	.33	8.5	0.058	1.5	5.75	SST	CG	N
0.540	13.72	71688	.88	22.4	.414	10.5	53	9.2	.43	11	23	102	.38	9.6	0.063	1.6	6.00	MW	CG	N
0.540	13.72	71688S	.88	22.4	.414	10.5	45	7.8	.35	8.8	15	69	.38	9.6	0.063	1.6	6.00	SST	CG	N
0.540	13.72	71701	.88	22.4	.406	10.3	68	12	.41	10	27	122	.40	10.2	0.067	1.7	6.00	MW	CG	N
0.540	13.72	71701S	.88	22.4	.406	10.3	57	10	.32	8.2	19	83	.40	10.2	0.067	1.7	6.00	SST	CG	N
0.540	13.72	71637	1.00	25.4	.458	11.6	9.7	1.7	.71	18	6.9	31	.22	5.6	0.041	1.0	5.38	MW	CG	N
0.540	13.72	71637S	1.00	25.4	.458	11.6	8.2	1.4	.57	14	4.7	21	.22	5.6	0.041	1.0	5.38	SST	CG	N
0.540	13.72	71650	1.00	25.4	.448	11.4	14	2.5	.69	17	9.7	43	.26	6.7	0.046	1.2	5.75	MW	CG	N
0.540	13.72	71650S	1.00	25.4	.448	11.4	12	2.1	.55	14	6.5	29	.26	6.7	0.046	1.2	5.75	SST	CG	N
0.540	13.72	71663	1.00	25.4	.432	11.0	25	4.4	.58	15	15	65	.34	8.6	0.054	1.4	6.25	MW	CG	N
0.540	13.72	71663S	1.00	25.4	.432	11.0	21	3.8	.46	12	9.8	44	.34	8.6	0.054	1.4	6.25	SST	CG	N
0.540	13.72	71676	1.00	25.4	.424	10.8	33	5.8	.54	14	18	80	.37	9.4	0.058	1.5	6.38	MW	CG	N
0.540	13.72	71676S	1.00	25.4	.424	10.8	28	4.9	.43	11	12	54	.37	9.4	0.058	1.5	6.38	SST	CG	N
0.540	13.72	71689	1.00	25.4	.414	10.5	45	7.9	.51	13	23	102	.42	10.6	0.063	1.6	6.63	MW	CG	N
0.540	13.72	71689S	1.00	25.4	.414	10.5	38	6.7	.40	10	15	69	.42	10.6	0.063	1.6	6.63	SST	CG	N
0.540	13.72	71702	1.00	25.4	.406	10.3	58	10	.47	12	27	122	.45	11.5	0.067	1.7	6.75	MW	CG	N
0.540	13.72	71702S	1.00	25.4	.406	10.3	49	8.6	.38	9.6	19	83	.45	11.5	0.067	1.7	6.75	SST	CG	N
0.540	13.72	71638	1.25	31.8	.458	11.6	7.6	1.3	.91	23	6.9	31	.26	6.5	0.041	1.0	6.25	MW	CG	N
0.540	13.72	71638S	1.25	31.8	.458	11.6	6.5	1.1	.72	18	4.7	21	.26	6.5	0.041	1.0	6.25	SST	CG	N
0.540	13.72	71652	1.25	31.8	.448	11.4	11	1.9	.87	22	9.7	43	.32	8.0	0.046	1.2	6.88	MW	CG	N
0.540	13.72	71652S	1.25	31.8	.448	11.4	9.4	1.6	.70	18	6.5	29	.32	8.0	0.046	1.2	6.88	SST	CG	N
0.540	13.72	71664	1.25	31.8	.432	11.0	20	3.4	.74	19	15	65	.40	10.1	0.054	1.4	7.38	MW	CG	N
0.540	13.72	71664S	1.25	31.8	.432	11.0	17	2.9	.59	15	9.8	44	.40	10.1	0.054	1.4	7.38	SST	CG	N
0.540	13.72	71677	1.25	31.8	.424	10.8	26	4.5	.70	18	18	80	.44	11.2	0.058	1.5	7.63	MW	CG	N
0.540	13.72	71677S	1.25	31.8	.424	10.8	22	3.8	.56	14	12	54	.44	11.2	0.058	1.5	7.63	SST	CG	N
0.540	13.72	71690	1.25	31.8	.414	10.5	35	6.1	.65	17	23	102	.50	12.8	0.063	1.6	8.00	MW	CG	N
0.540	13.72	71690S	1.25	31.8	.414	10.5	30	5.2	.52	13	15	69	.50	12.8	0.063	1.6	8.00	SST	CG	N
0.540	13.72	71703	1.25	31.8	.406	10.3	45	7.8	.61	16	27	122	.54	13.8	0.067	1.7	8.13	MW	CG	N
0.540	13.72	71703S	1.25	31.8	.406	10.3	38	6.7	.49	12	19	83	.54	13.8	0.067	1.7	8.13	SST	CG	N
0.540	13.72	71639	1.50	38.1	.458	11.6	6.3	1.1	1.1	28	6.9	31	.30	7.6	0.041	1.0	7.25	MW	CG	N
0.540	13.72	71639S	1.50	38.1	.458	11.6	5.3	.93	.88	22	4.7	21	.30	7.6	0.041	1.0	7.25	SST	CG	N
0.540	13.72	71651	1.50	38.1	.448	11.4	9.1	1.6	1.1	27	9.7	43	.36	9.2	0.046	1.2	7.88	MW	CG	N
0.540	13.72	71651S	1.50	38.1	.448	11.4	7.7	1.4	.85	21	6.5	29	.36	9.2	0.046	1.2	7.88	SST	CG	N
0.540	13.72	71665	1.50	38.1	.432	11.0	16	2.8	.90	23	15	65	.47	11.8	0.054	1.4	8.63	MW	CG	N
0.540	13.72	71665S	1.50	38.1	.432	11.0	14	2.4	.72	18	9.8	44	.47	11.8	0.054	1.4	8.63	SST	CG	N
0.540	13.72	71678	1.50	38.1	.424	10.8	21	3.7	.85	22	18	80	.51	13.1	0.058	1.5	8.88	MW	CG	N
0.540	13.72	71678S	1.50	38.1	.424	10.8	18	3.1	.68	17	12	54	.51	13.1	0.058	1.5	8.88	SST	CG	N
0.540	13.72	71691	1.50	38.1	.414	10.5	29	5.0	.80	20	23	102	.58	14.8	0.063	1.6	9.25	MW	CG	N
0.540	13.72	71691S	1.50	38.1	.414	10.5	24	4.3	.63	16	15	69	.58	14.8	0.063	1.6	9.25	SST	CG	N
0.540	13.72	71704	1.50	38.1	.406	10.3	37	6.4	.75	19	27	122	.64	16.2	0.067	1.7	9.50	MW	CG	N
0.540	13.72	71704S	1.50	38.1	.406	10.3	31	5.4	.60	15	19	83	.64	16.2	0.067	1.7	9.50	SST	CG	N
0.540	13.72	71640	1.75	44.5	.458	11.6	5.3	.93	1.3	33	6.9	31	.33	8.5	0.041	1.0	8.13	MW	CG	N
0.540	13.72	71640S	1.75	44.5	.458	11.6	4.5	.79	1.0	26	4.7	21	.33	8.5	0.041	1.0	8.13	SST	CG	N
0.540	13.72	71653	1.75	44.5	.448	11.4	7.7	1.4	1.3	32	9.7	43	.41	10.4	0.046	1.2	8.88	MW	CG	N
0.540	13.72	71653S	1.75	44.5	.448	11.4	6.6	1.2	1.0	25	6.5	29	.41	10.4	0.046	1.2	8.88	SST	CG	N
0.540	13.72	71666	1.75	44.5	.432	11.0	14	2.4	1.1	27	15	65	.53	13.4	0.054	1.4	9.75	MW	CG	N
0.540	13.72	71666S	1.75	44.5	.432	11.0	12	2.0	.85	21	9.8	44	.53	13.4	0.054	1.4	9.75	SST	CG	N
0.540	13.72	71679	1.75	44.5	.424	10.8	18	3.1	1.0	26	18	80	.59	14.9	0.058	1.5	10.1	MW	CG	N
0.540	13.72	71679S	1.75	44.5	.424	10.8	15	2.6	.80	20	12	54	.59	14.9	0.058	1.5	10.1	SST	CG	N
0.540	13.72	71692	1.75	44.5	.414	10.5	24	4.3	.94	24	23	102	.67	17.0	0.063	1.6	10.6	MW	CG	N
0.540	13.72	71692S	1.75	44.5	.414	10.5	21	3.6	.75	19	15	69	.67	17.0	0.063	1.6	10.6	SST	CG	N
0.540	13.72	71705	1.75	44.5	.406	10.3	31	5.4	.88	22	27	122	.73	18.5	0.067	1.7	10.9	MW	CG	N
0.540	13.72	71705S	1.75	44.5	.406	10.3	26	4.6	.70	18	19	83	.73	18.5	0.067	1.7	10.9	SST	CG	N
0.540	13.72	71641	2.00	50.8	.458	11.6	4.6	.81	1.5	38	6.9	31	.37	9.5	0.041	1.0	9.13	MW	CG	N
0.540	13.72	71641S	2.00	50.8	.458	11.6	3.9	.69	1.2	30	4.7	21	.37	9.5	0.041	1.0	9.13	SST	CG	N
0.540	13.72	71654	2.00	50.8	.448	11.4	6.7	1.2	1.4	37	9.7	43	.46	11.7	0.046	1.2	10.0	MW	CG	N
0.540	13.72	71654S	2.00	50.8	.448	11.4	5.7	1.0	1.1	29	6.5	29	.46	11.7	0.046	1.2	10.0	SST	CG	N
0.540	13.72	71667	2.00	50.8	.432	11.0	12	2.1	1.2	31	15	65	.59	15.1	0.054	1.4	11.0	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.540	13.72	71667S	2.00	50.8	.432	11.0	10	1.8	.97	25	9.8	44	.59	15.1	0.054	1.4	11.0	SST	CG	N
0.540	13.72	71680	2.00	50.8	.424	10.8	16	2.7	1.2	29	18	80	.66	16.8	0.058	1.5	11.4	MW	CG	N
0.540	13.72	71680S	2.00	50.8	.424	10.8	13	2.3	.92	23	12	54	.66	16.8	0.058	1.5	11.4	SST	CG	N
0.540	13.72	71693	2.00	50.8	.414	10.5	21	3.7	1.1	28	23	102	.75	19.0	0.063	1.6	11.9	MW	CG	N
0.540	13.72	71693S	2.00	50.8	.414	10.5	18	3.1	.87	22	15	69	.75	19.0	0.063	1.6	11.9	SST	CG	N
0.540	13.72	71706	2.00	50.8	.406	10.3	27	4.7	1.0	26	27	122	.82	20.8	0.067	1.7	12.3	MW	CG	N
0.540	13.72	71706S	2.00	50.8	.406	10.3	23	4.0	.81	21	19	83	.82	20.8	0.067	1.7	12.3	SST	CG	N
0.540	13.72	71642	2.25	57.2	.458	11.6	4.1	.72	1.7	43	6.9	31	.41	10.4	0.041	1.0	10.0	MW	CG	N
0.540	13.72	71642S	2.25	57.2	.458	11.6	3.5	.61	1.3	34	4.7	21	.41	10.4	0.041	1.0	10.0	SST	CG	N
0.540	13.72	71655	2.25	57.2	.448	11.4	5.9	1.0	1.6	41	9.7	43	.51	12.9	0.046	1.2	11.0	MW	CG	N
0.540	13.72	71655S	2.25	57.2	.448	11.4	5.0	.88	1.3	33	6.5	29	.51	12.9	0.046	1.2	11.0	SST	CG	N
0.540	13.72	71668	2.25	57.2	.432	11.0	11	1.8	1.4	35	15	65	.65	16.6	0.054	1.4	12.1	MW	CG	N
0.540	13.72	71668S	2.25	57.2	.432	11.0	8.9	1.6	1.1	28	9.8	44	.65	16.6	0.054	1.4	12.1	SST	CG	N
0.540	13.72	71681	2.25	57.2	.424	10.8	14	2.4	1.3	33	18	80	.73	18.6	0.058	1.5	12.6	MW	CG	N
0.540	13.72	71681S	2.25	57.2	.424	10.8	12	2.0	1.0	27	12	54	.73	18.6	0.058	1.5	12.6	SST	CG	N
0.540	13.72	71694	2.25	57.2	.414	10.5	19	3.3	1.2	31	23	102	.83	21.2	0.063	1.6	13.3	MW	CG	N
0.540	13.72	71694S	2.25	57.2	.414	10.5	16	2.8	.98	25	15	69	.83	21.2	0.063	1.6	13.3	SST	CG	N
0.540	13.72	71707	2.25	57.2	.406	10.3	24	4.1	1.2	29	27	122	.91	23.2	0.067	1.7	13.6	MW	CG	N
0.540	13.72	71707S	2.25	57.2	.406	10.3	20	3.5	.92	23	19	83	.91	23.2	0.067	1.7	13.6	SST	CG	N
0.540	13.72	71643	2.50	63.5	.458	11.6	3.7	.64	1.9	48	6.9	31	.45	11.3	0.041	1.0	10.9	MW	CG	N
0.540	13.72	71643S	2.50	63.5	.458	11.6	3.1	.55	1.5	38	4.7	21	.45	11.3	0.041	1.0	10.9	SST	CG	N
0.540	13.72	71656	2.50	63.5	.448	11.4	5.3	.93	1.8	46	9.7	43	.55	14.0	0.046	1.2	12.0	MW	CG	N
0.540	13.72	71656S	2.50	63.5	.448	11.4	4.5	.79	1.4	37	6.5	29	.55	14.0	0.046	1.2	12.0	SST	CG	N
0.540	13.72	71669	2.50	63.5	.432	11.0	9.4	1.6	1.5	39	15	65	.72	18.3	0.054	1.4	13.4	MW	CG	N
0.540	13.72	71669S	2.50	63.5	.432	11.0	8.0	1.4	1.2	31	9.8	44	.72	18.3	0.054	1.4	13.4	SST	CG	N
0.540	13.72	71682	2.50	63.5	.424	10.8	12	2.1	1.5	37	18	80	.80	20.4	0.058	1.5	13.9	MW	CG	N
0.540	13.72	71682S	2.50	63.5	.424	10.8	10	1.8	1.2	30	12	54	.80	20.4	0.058	1.5	13.9	SST	CG	N
0.540	13.72	71695	2.50	63.5	.414	10.5	17	2.9	1.4	35	23	102	.92	23.4	0.063	1.6	14.6	MW	CG	N
0.540	13.72	71695S	2.50	63.5	.414	10.5	14	2.5	1.1	28	15	69	.92	23.4	0.063	1.6	14.6	SST	CG	N
0.540	13.72	71708	2.50	63.5	.406	10.3	21	3.7	1.3	33	27	122	1.01	25.5	0.067	1.7	15.0	MW	CG	N
0.540	13.72	71708S	2.50	63.5	.406	10.3	18	3.1	1.0	26	19	83	1.01	25.5	0.067	1.7	15.0	SST	CG	N
0.540	13.72	71644	2.75	69.9	.458	11.6	3.3	.58	2.1	53	6.9	31	.49	12.4	0.041	1.0	11.9	MW	CG	N
0.540	13.72	71644S	2.75	69.9	.458	11.6	2.8	.49	1.6	42	4.7	21	.49	12.4	0.041	1.0	11.9	SST	CG	N
0.540	13.72	71657	2.75	69.9	.448	11.4	4.8	.84	2.0	51	9.7	43	.60	15.3	0.046	1.2	13.1	MW	CG	N
0.540	13.72	71657S	2.75	69.9	.448	11.4	4.1	.72	1.6	41	6.5	29	.60	15.3	0.046	1.2	13.1	SST	CG	N
0.540	13.72	71670	2.75	69.9	.432	11.0	8.5	1.5	1.7	43	15	65	.78	19.9	0.054	1.4	14.5	MW	CG	N
0.540	13.72	71670S	2.75	69.9	.432	11.0	7.2	1.3	1.4	35	9.8	44	.78	19.9	0.054	1.4	14.5	SST	CG	N
0.540	13.72	71683	2.75	69.9	.424	10.8	11	1.9	1.6	41	18	80	.88	22.5	0.058	1.5	15.3	MW	CG	N
0.540	13.72	71683S	2.75	69.9	.424	10.8	9.4	1.6	1.3	33	12	54	.88	22.5	0.058	1.5	15.3	SST	CG	N
0.540	13.72	71696	2.75	69.9	.414	10.5	15	2.6	1.5	39	23	102	1.00	25.4	0.063	1.6	15.9	MW	CG	N
0.540	13.72	71696S	2.75	69.9	.414	10.5	13	2.2	1.2	31	15	69	1.00	25.4	0.063	1.6	15.9	SST	CG	N
0.540	13.72	71709	2.75	69.9	.406	10.3	19	3.3	1.4	36	27	122	1.10	27.9	0.067	1.7	16.4	MW	CG	N
0.540	13.72	71709S	2.75	69.9	.406	10.3	16	2.8	1.1	29	19	83	1.10	27.9	0.067	1.7	16.4	SST	CG	N
0.540	13.72	71645	3.00	76.2	.458	11.6	3.0	.53	2.3	57	6.9	31	.52	13.3	0.041	1.0	12.8	MW	CG	N
0.540	13.72	71645S	3.00	76.2	.458	11.6	2.6	.45	1.8	46	4.7	21	.52	13.3	0.041	1.0	12.8	SST	CG	N
0.540	13.72	71658	3.00	76.2	.448	11.4	4.4	.77	2.2	56	9.7	43	.65	16.5	0.046	1.2	14.1	MW	CG	N
0.540	13.72	71658S	3.00	76.2	.448	11.4	3.7	.66	1.7	44	6.5	29	.65	16.5	0.046	1.2	14.1	SST	CG	N
0.540	13.72	71671	3.00	76.2	.432	11.0	7.8	1.4	1.9	48	15	65	.85	21.6	0.054	1.4	15.8	MW	CG	N
0.540	13.72	71671S	3.00	76.2	.432	11.0	6.6	1.2	1.5	38	9.8	44	.85	21.6	0.054	1.4	15.8	SST	CG	N
0.540	13.72	71684	3.00	76.2	.424	10.8	10	1.8	1.8	45	18	80	.95	24.1	0.058	1.5	16.4	MW	CG	N
0.540	13.72	71684S	3.00	76.2	.424	10.8	8.6	1.5	1.4	36	12	54	.95	24.1	0.058	1.5	16.4	SST	CG	N
0.540	13.72	71697	3.00	76.2	.414	10.5	14	2.4	1.7	42	23	102	1.09	27.6	0.063	1.6	17.3	MW	CG	N
0.540	13.72	71697S	3.00	76.2	.414	10.5	12	2.0	1.3	34	15	69	1.09	27.6	0.063	1.6	17.3	SST	CG	N
0.540	13.72	71710	3.00	76.2	.406	10.3	18	3.1	1.6	40	27	122	1.18	30.0	0.067	1.7	17.6	MW	CG	N
0.540	13.72	71710S	3.00	76.2	.406	10.3	15	2.6	1.2	32	19	83	1.18	30.0	0.067	1.7	17.6	SST	CG	N
0.546	13.87	S-56	.28	7.1	.484	12.3	4.3	.75	.13	3.2	.54	2.4	.16	3.9	0.031	0.8	4.00	SST	C	N
0.546	13.87	A9-48	.31	7.9	.454	11.5	23	4.0	.13	3.3	2.9	13	.18	4.7	0.046	1.2	4.00	SST	CG	N
0.546	13.87	YY-68	.31	7.9	.422	10.7	187	33	.08	2.1	16	69	.19	4.7	0.062	1.6	3.00	SPR	CG	Z
0.546	13.87	S-830	.34	8.7	.436	11.1	49	8.6	.12	3.1	6.1	27	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.546	13.87	K-27	.38	9.5	.452	11.5	49	8.6	.14	3.6	6.9	31	.14	3.6	0.047	1.2	3.00	SST	CG	N
0.546	13.87	MM-60	.41	10.3	.446	11.3	44	7.6	.18	4.5	7.8	35	.18	4.4	0.050	1.3	3.50	SST	CG	N
0.546	13.87	G-91	.41	10.3	.414	10.5	123	21	.14	3.6	18	78	.25	6.3	0.066	1.7	3.75	SST	CG	N
0.546	13.87	12194	.41	10.3	.346	8.8	1080	189	.05	1.3	57	252	.35	8.9	0.100	2.5	3.50	SPR	CG	Z
0.546	13.87	B6-8	.44	11.1	.500	12.7	1.1	.20	.33	8.5	.38	1.7	.10	2.6	0.023	0.6	4.50	MW	CG	N
0.546	13.87	B1-21	.44	11.1	.450	11.4	55	9.6	.13	3.4	7.3	33	.19	4.9	0.048	1.2	3.00	SST	C	N
0.546	13.87	S-1114	.44	11.1	.446	11.3	64	11	.12	3.1	7.8	35	.15	3.8	0.050	1.3	3.00	SST	CG	N
0.546	13.87	B7-8	.47	11.9	.456	11.6	24	4.2	.26	6.5	6.1	27	.17	4.3	0.045	1.1	3.75	SST	CG	N
0.546	13.87	S-1579	.50	12.7	.452	11.5	33	5.8	.21	5.2	6.9	31	.16	4.2	0.047	1.2	3.50	SST	CG	N
0.546	13.87	A14-34	.53	13.5	.436	11.1	49	8.6	.21	5.3	10	46	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.546	13.87	O-98	.53	13.5	.418	10.6	72	13	.21	5.4	15	67	.32	8.1	0.064	1.6	5.00	SPR	CG	Z
0.546	13.87	A11-8	.53	13.5	.376	9.6	383	67	.10	2.5	37	165	.43	10.8	0.085	2.2	4.00	SPR	C	N
0.546	13.87	GG-80	.53	13.5	.346	8.8	1080	189	.05	1.3	57	252	.35	8.9	0.100	2.5	3.50	SPR	CG	N
0.546	13.87	S-1370	.56	14.3	.506	12.9	.34	.06	.42	11	.14	.64	.14	3.6	0.020	0.5	6.00	SST	C	N
0.546	13.87	O-151	.56	14.3	.478	12.1	8.3	1.5	.33	8.4	2.7	12	.15	3.9	0.034	0.9	3.50	SST	C	N
0.546	13.87	3178	.56	14.3	.462	11.7	14	2.4	.37	9.5	5.2	23	.19	4.8	0.042	1.1	4.50	SPR	CG	Z
0.546	13.87	10051	.56	14.3	.422	10.7	83	15	.19	4.7	16	69	.26	6.7	0.062	1.6	4.25	SPR	CG	Z
0.546	13.87	U-29	.59	15.1	.460	11.7	19	3.4	.29	7.4	5.7	25	.17	4.4	0.043	1.1	4.00	SPR	CG	N
0.546	13.87	A11-26	.59	15.1	.446	11.3	22	3.8	.29	7.4	6.4	28	.30	7.6	0.050	1.3	5.00	SST	C	N
0.546	13.87	B11-3	.63	15.9	.438	11.1	40	7.1	.24	6.1	9.7	43	.23	5.8	0.054	1.4	4.25	SST	CG	N
0.546	13.87	M-109	.66	16.7	.480	12.2	2.8	.49	.44	11	1.2	5.5	.21	5.4	0.033	0.8	6.50	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.546	13.87	2953	.69	17.4	.498	12.6	.79	.14	.54	14	.42	1.9	.15	3.8	0.024	0.6	6.25	MW	CG	Z
0.546	13.87	BB-69	.69	17.4	.486	12.3	1.9	.33	.49	12	.93	4.1	.20	5.0	0.030	0.8	6.50	MW	CG	BO
0.546	13.87	G-92	.69	17.4	.470	11.9	7.2	1.3	.51	13	3.7	16	.18	4.6	0.038	1.0	4.75	SST	CG	N
0.546	13.87	A9-68	.69	17.4	.452	11.5	14	2.5	.41	10	5.7	25	.28	7.2	0.047	1.2	6.00	SPR	CG	N
0.546	13.87	A13-24	.69	17.4	.434	11.0	39	6.8	.28	7.1	11	48	.27	6.8	0.056	1.4	4.75	SST	CG	N
0.546	13.87	B6-68	.72	18.2	.476	12.1	8.1	1.4	.38	9.7	3.1	14	.14	3.6	0.035	0.9	4.00	SPR	CG	N
0.546	13.87	A13-48	.72	18.2	.468	11.9	11	2.0	.35	8.9	4.0	18	.16	4.0	0.039	1.0	4.00	SST	CG	N
0.546	13.87	JJ-93	.75	19.1	.466	11.8	14	2.5	.32	8.2	4.6	20	.20	5.1	0.040	1.0	4.00	SPR	C	N
0.546	13.87	10054	.75	19.1	.456	11.6	19	3.3	.35	8.8	6.5	29	.20	5.1	0.045	1.1	4.50	SPR	CG	GI
0.546	13.87	B14-34	.75	19.1	.454	11.5	6.4	1.1	.24	6.2	1.6	7.0	.51	12.9	0.046	1.2	10.0	SPR	C	Z
0.546	13.87	S-1408	.75	19.1	.434	11.0	42	7.3	.26	6.6	11	48	.31	7.8	0.056	1.4	4.50	SST	C	N
0.546	13.87	K-61	.75	19.1	.422	10.7	36	6.3	.35	8.8	13	56	.40	10.2	0.062	1.6	6.50	SST	CG	N
0.546	13.87	3597	.75	19.1	.420	10.7	67	12	.34	8.6	23	101	.32	8.0	0.063	1.6	5.00	MW	CG	Z
0.546	13.87	WW-64	.75	19.1	.402	10.2	121	21	.19	4.8	23	102	.36	9.1	0.072	1.8	5.00	HD	CG	Z
0.546	13.87	A14-57	.78	19.8	.434	11.0	36	6.2	.31	7.8	11	48	.28	7.1	0.056	1.4	5.00	SST	CG	N
0.546	13.87	10662	.81	20.6	.504	12.8	.55	.10	.68	17	.37	1.7	.14	3.5	0.021	0.5	5.50	MW	C	Z
0.546	13.87	A11-59	.81	20.6	.464	11.8	7.9	1.4	.57	14	4.5	20	.25	6.2	0.041	1.0	6.00	SPR	CG	Z
0.546	13.87	A15-57	.81	20.6	.456	11.6	14	2.4	.44	11	6.1	27	.23	5.7	0.045	1.1	5.00	SST	CG	N
0.546	13.87	S-1194	.81	20.6	.422	10.7	65	11	.22	5.7	15	65	.28	7.1	0.062	1.6	4.50	SST	CG	N
0.546	13.87	B1-30	.81	20.6	.418	10.6	55	9.6	.29	7.5	16	71	.35	8.9	0.064	1.6	5.50	SST	CG	N
0.546	13.87	A-60	.81	20.6	.356	9.0	319	56	.15	3.9	49	218	.57	14.5	0.095	2.4	6.00	SPR	CG	Z
0.546	13.87	G-81	.84	21.4	.482	12.2	1.9	.34	.60	15	1.1	5.1	.25	6.3	0.032	0.8	7.75	HD	CG	N
0.546	13.87	S-1633	.84	21.4	.464	11.8	10	1.8	.45	11	4.6	20	.19	4.9	0.041	1.0	4.75	SST	CG	N
0.546	13.87	S-1049	.88	22.2	.422	10.7	47	8.2	.31	8.0	15	65	.34	8.7	0.062	1.6	5.50	SST	CG	N
0.546	13.87	G-50	.88	22.2	.402	10.2	90	16	.24	6.0	21	95	.40	10.1	0.072	1.8	5.50	SST	CG	N
0.546	13.87	L-26	.88	22.2	.402	10.2	84	15	.25	6.5	21	95	.41	10.5	0.072	1.8	5.75	SST	CG	N
0.546	13.87	A13-61	.91	23.0	.416	10.6	61	11	.29	7.4	18	79	.37	9.5	0.065	1.7	5.75	SPR	CG	GI
0.546	13.87	S-869	.94	23.8	.484	12.3	2.1	.37	.75	19	1.6	7.1	.19	4.7	0.031	0.8	6.00	SST	CG	N
0.546	13.87	10176	.94	23.8	.452	11.5	7.5	1.3	.44	11	3.3	15	.49	12.5	0.047	1.2	9.50	SPR	C	Z
0.546	13.87	S-1061	1.00	25.4	.472	12.0	5.9	1.0	.57	15	3.4	15	.22	5.6	0.037	0.9	5.00	SST	C	N
0.546	13.87	A15-27	1.00	25.4	.456	11.6	12	2.1	.51	13	6.1	27	.25	6.3	0.045	1.1	5.50	SST	CG	N
0.546	13.87	S-271	1.00	25.4	.438	11.1	18	3.1	.55	14	9.7	43	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.546	13.87	B1-55	1.00	25.4	.434	11.0	29	5.1	.40	10	12	51	.34	8.7	0.056	1.4	6.00	SPR	CG	GI
0.546	13.87	YY-70	1.00	25.4	.412	10.5	59	10	.33	8.5	20	87	.44	11.1	0.067	1.7	6.50	SPR	CG	Z
0.546	13.87	12327	1.09	27.8	.426	10.8	32	5.7	.44	11	14	63	.42	10.7	0.060	1.5	7.00	SPR	CG	GI
0.546	13.87	B9-32	1.13	28.6	.468	11.9	5.7	.99	.75	19	4.2	19	.25	6.4	0.039	1.0	6.50	SPR	CG	Z
0.546	13.87	VV-65	1.13	28.6	.422	10.7	37	6.6	.41	11	16	69	.43	11.0	0.062	1.6	7.00	SPR	CG	N
0.546	13.87	AA-86	1.13	28.6	.366	9.3	126	22	.31	7.8	39	173	.81	20.6	0.090	2.3	9.00	SST	CG	N
0.546	13.87	10630	1.16	29.4	.488	12.4	1.3	.23	.92	23	1.2	5.4	.23	5.9	0.029	0.7	7.00	SST	C	N
0.546	13.87	H-36	1.19	30.2	.484	12.3	.62	.11	.64	16	.39	1.8	.55	14.0	0.031	0.8	17.8	MW	CG	N
0.546	13.87	A15-68	1.19	30.2	.470	11.9	4.8	.84	.77	20	3.7	16	.24	6.0	0.038	1.0	6.25	SST	CG	N
0.546	13.87	A9-57	1.19	30.2	.470	11.9	4.1	.71	.91	23	3.7	16	.27	6.8	0.038	1.0	7.00	SST	CG	N
0.546	13.87	K-55	1.19	30.2	.452	11.5	7.0	1.2	.72	18	5.0	22	.47	11.9	0.047	1.2	9.00	SST	C	N
0.546	13.87	11706	1.19	30.2	.434	11.0	20	3.5	.58	15	12	51	.45	11.4	0.056	1.4	8.00	SPR	CG	Z
0.546	13.87	W-56	1.19	30.2	.422	10.7	28	5.0	.52	13	15	65	.48	12.2	0.062	1.6	7.75	SST	CG	N
0.546	13.87	10465	1.22	31.0	.476	12.1	2.0	.34	.86	22	1.7	7.5	.36	9.1	0.035	0.9	10.3	SPR	CG	Z
0.546	13.87	I-94	1.25	31.8	.490	12.4	.52	.09	.87	22	.45	2.0	.39	9.8	0.028	0.7	12.8	SST	C	N
0.546	13.87	YY-49	1.25	31.8	.456	11.6	12	2.1	.55	14	6.5	29	.27	6.9	0.045	1.1	6.00	SPR	CG	N
0.546	13.87	RR-50	1.25	31.8	.454	11.5	11	2.0	.58	15	6.5	29	.32	8.2	0.046	1.2	6.00	SST	C	N
0.546	13.87	S-932	1.25	31.8	.452	11.5	6.9	1.2	.77	20	5.3	24	.48	12.1	0.047	1.2	9.00	SST	C	N
0.546	13.87	S-1137	1.25	31.8	.452	11.5	11	1.9	.63	16	6.9	31	.35	9.0	0.047	1.2	6.50	SST	C	N
0.546	13.87	S-2	1.25	31.8	.438	11.1	15	2.6	.66	17	9.7	43	.43	11.0	0.054	1.4	8.00	SST	CG	N
0.546	13.87	OO-99	1.25	31.8	.362	9.2	96	17	.15	3.7	14	62	1.10	28.0	0.092	2.3	12.0	SST	CG	N
0.546	13.87	S-3208	1.31	33.3	.458	11.6	8.0	1.4	.71	18	5.7	25	.34	8.7	0.044	1.1	6.75	SST	C	N
0.546	13.87	S-1593	1.34	34.1	.436	11.1	14	2.5	.73	19	10	46	.55	14.0	0.055	1.4	9.00	SST	C	N
0.546	13.87	1897	1.38	34.9	.498	12.6	.52	.09	1.1	29	.59	2.6	.23	5.8	0.024	0.6	8.50	MW	C	Z
0.546	13.87	FF-92	1.38	34.9	.472	12.0	2.0	.36	.93	24	1.9	8.5	.44	11.3	0.037	0.9	12.0	SPR	CG	N
0.546	13.87	XX-48	1.38	34.9	.472	12.0	3.9	.69	.86	22	3.4	15	.28	7.0	0.037	0.9	6.50	SST	C	N
0.546	13.87	2707	1.38	34.9	.422	10.7	30	5.2	.52	13	16	69	.51	13.0	0.062	1.6	8.25	HD	CG	Z
0.546	13.87	S-1160	1.38	34.9	.422	10.7	25	4.4	.58	15	15	65	.53	13.4	0.062	1.6	8.50	SST	CG	N
0.546	13.87	A15-26	1.38	34.9	.418	10.6	48	8.4	.36	9.1	17	76	.42	10.6	0.064	1.6	6.50	SPR	CG	GI
0.546	13.87	10142	1.38	34.9	.418	10.6	33	5.8	.52	13	17	76	.54	13.8	0.064	1.6	8.50	SPR	CG	Z
0.546	13.87	A-33	1.38	34.9	.418	10.6	27	4.7	.63	16	17	76	.64	16.3	0.064	1.6	10.0	SPR	CG	Z
0.546	13.87	QQ-45	1.38	34.9	.402	10.2	48	8.5	.47	12	23	102	.76	19.2	0.072	1.8	9.50	HD	C	Z
0.546	13.87	3627	1.38	34.9	.376	9.6	96	17	.39	9.8	37	165	.85	21.6	0.085	2.2	10.0	HD	CG	Z
0.546	13.87	I-4	1.41	35.7	.482	12.2	1.2	.22	1.0	26	1.3	5.6	.38	9.8	0.032	0.8	11.0	SPR	C	N
0.546	13.87	S-1074	1.44	36.5	.466	11.8	2.9	.51	.98	25	2.8	13	.46	11.7	0.040	1.0	10.5	SST	C	N
0.546	13.87	10759	1.44	36.5	.452	11.5	5.4	.94	.80	20	4.3	19	.63	16.1	0.047	1.2	12.5	SPR	C	Z
0.546	13.87	A14-62	1.47	37.3	.418	10.6	31	5.4	.55	14	17	76	.58	14.6	0.064	1.6	9.00	SPR	CG	GI
0.546	13.87	BB-94	1.50	38.1	.488	12.4	1.5	.25	1.2	30	1.7	7.6	.22	5.5	0.029	0.7	6.50	SST	C	N
0.546	13.87	DD-55	1.50	38.1	.486	12.3	.94	.16	1.1	29	1.1	4.8	.36	9.1	0.030	0.8	11.0	MW	C	N
0.546	13.87	S-1435	1.50	38.1	.470	11.9	4.4	.77	.83	21	3.7	16	.25	6.3	0.038	1.0	6.50	SST	CG	N
0.546	13.87	B1-62	1.50	38.1	.466	11.8	6.3	1.1	.72	18	4.6	20	.26	6.6	0.040	1.0	6.50	SPR	CG	Z
0.546	13.87	W-50	1.50	38.1	.464	11.8	3.4	.60	1.1	28	3.7	17	.41	10.4	0.041	1.0	10.0	SST	CG	N
0.546	13.87	S-1066	1.50	38.1	.438	11.1	5.9	1.0	.58	15	3.5	15	.92	23.3	0.054	1.4	17.0	SST	CG	N
0.546	13.87	10138	1.50	38.1	.422	10.7	27	4.7	.58	15	16	69	.62	15.7	0.062	1.6	9.00	HD	C	Z
0.546	13.87	H-52	1.50	38.1	.386	9.8	51	8.9	.54	14	27	122	.96	24.4	0.080	2.0	12.0	SST	CG	N
0.546	13.87	10210	1.63	41.3	.402	10.2	40	7.1	.57	14	23	102	.79	20.1	0.072	1.8	11.0	SPR	CG	Z
0.546	13.87	1591	1.63	41.3	.398	10.1	61	11	.41	10	25	110	.65	16.5	0.074	1.9	8.75	SPR	CG	Z
0.546	13.87	MM-53	1.66	42.1	.426	10.8	23	4.0	.58	15	13	59	.50	12.6	0.060	1.5	8.25	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FINISH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.546	13.87	10587	1.69	42.8	.456	11.6	4.6	.81	1.2	30	5.5	24	.50	12.6	0.045	1.1	11.0	SST	CG	N
0.546	13.87	12238	1.69	42.8	.446	11.3	9.2	1.6	.90	23	8.3	37	.50	12.7	0.050	1.3	10.0	SPR	CG	Z
0.546	13.87	S-972	1.69	42.8	.388	9.9	43	7.6	.65	16	28	125	1.03	26.1	0.079	2.0	13.0	SST	CG	N
0.546	13.87	G-46	1.75	44.5	.464	11.8	1.6	.28	.93	24	1.5	6.7	.82	20.8	0.041	1.0	19.0	SST	C	N
0.546	13.87	S-78	1.75	44.5	.412	10.5	25	4.3	.74	19	18	82	.82	20.8	0.067	1.7	11.3	SST	C	N
0.546	13.87	12280	1.78	45.2	.494	12.5	.36	.06	1.4	35	.49	2.2	.42	10.6	0.026	0.7	15.0	MW	C	Z
0.546	13.87	11474	1.78	45.2	.446	11.3	9.2	1.6	.90	23	8.3	37	.55	14.0	0.050	1.3	10.0	SPR	C	Z
0.546	13.87	N-118	1.81	46.0	.376	9.6	81	14	.46	12	37	165	.98	24.8	0.085	2.2	11.5	SPR	CG	Z
0.546	13.87	12217	1.84	46.8	.472	12.0	2.6	.45	1.4	36	3.6	16	.41	10.3	0.037	0.9	10.0	SPR	C	Z
0.546	13.87	3817	1.88	47.6	.362	9.2	110	19	.41	10	45	199	1.10	28.0	0.092	2.3	12.0	HD	CG	Z
0.546	13.87	S-325	1.94	49.2	.452	11.5	3.9	.67	1.2	31	4.7	21	.71	17.9	0.047	1.2	15.0	SST	CG	N
0.546	13.87	Q-44	2.00	50.8	.466	11.8	1.7	.29	1.2	31	2.1	9.2	.76	19.3	0.040	1.0	19.0	SPR	CG	N
0.546	13.87	11650	2.00	50.8	.352	8.9	108	19	.48	12	52	231	1.46	37.0	0.097	2.5	15.0	SPR	CG	Z
0.546	13.87	12309	2.09	53.2	.354	9.0	103	18	.49	12	50	224	1.44	36.6	0.096	2.4	15.0	SPR	CG	Z
0.546	13.87	S-200	2.13	54.0	.402	10.2	40	7.0	.53	14	21	95	.79	20.1	0.072	1.8	10.0	SST	C	N
0.546	13.87	J-35	2.22	56.4	.364	9.2	73	13	.59	15	43	192	1.48	37.6	0.091	2.3	16.3	SPR	CG	N
0.546	13.87	WW-37	2.50	63.5	.470	11.9	4.6	.80	.86	22	3.9	17	.30	7.7	0.038	1.0	7.00	SPR	C	N
0.546	13.87	12049	2.56	65.1	.452	11.5	5.4	.94	1.4	35	7.4	33	.59	14.9	0.047	1.2	12.5	SPR	CG	N
0.546	13.87	UU-57	2.63	66.7	.446	11.3	5.9	1.0	1.4	36	8.3	37	.73	18.4	0.050	1.3	14.5	SPR	CG	Z
0.546	13.87	11593	2.81	71.4	.386	9.8	36	6.4	.85	22	31	138	1.52	38.6	0.080	2.0	18.0	SPR	CG	GI
0.546	13.87	2595	2.94	74.6	.434	11.0	8.0	1.4	1.4	37	12	51	.95	24.2	0.056	1.4	17.0	SPR	CG	GI
0.546	13.87	12291	3.19	81.0	.446	11.3	4.1	.72	2.0	51	8.3	37	1.05	26.7	0.050	1.3	20.0	SPR	C	N
0.546	13.87	B17-197	4.06	103.2	.412	10.5	14	2.5	1.4	34	20	87	1.36	34.5	0.067	1.7	20.3	SPR	CG	Z
0.546	13.87	A14-70	4.50	114.3	.420	10.7	8.6	1.5	1.8	45	15	68	1.43	36.4	0.063	1.6	22.8	SST	CG	N
0.546	13.87	11626	5.25	133.4	.456	11.6	1.7	.30	3.7	95	6.5	29	1.31	33.1	0.045	1.1	29.0	SPR	CG	Z
0.546	13.87	4003	19.0	482.6	.422	10.7	1.8	.31	8.8	222	16	69	6.73	170.9	0.062	1.6	107.0	HD	C	Z
0.551	14.00	B3-62	3.44	87.3	.301	7.6	245	43	.42	11	102	453	2.56	65.1	0.125	3.2	20.5	SPR	CG	N
0.562	14.27	S-209	.31	7.9	.472	12.0	25	4.4	.11	2.8	2.8	12	.20	5.1	0.045	1.1	3.50	SST	C	N
0.562	14.27	A9-35	.31	7.9	.460	11.7	58	10	.15	3.7	8.5	38	.17	4.2	0.051	1.3	3.25	SPR	CG	Z
0.562	14.27	S-221	.31	7.9	.452	11.5	72	13	.13	3.4	9.5	42	.18	4.5	0.055	1.4	3.25	SST	CG	N
0.562	14.27	2956	.34	8.7	.512	13.0	1.0	.18	.18	4.6	.19	.83	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.562	14.27	JJ-38	.41	10.3	.468	11.9	36	6.4	.18	4.7	6.7	30	.20	5.1	0.047	1.2	3.25	SST	C	N
0.562	14.27	II-20	.41	10.3	.402	10.2	263	46	.09	2.2	23	101	.32	8.1	0.080	2.0	4.00	SPR	CG	N
0.562	14.27	3253	.47	11.9	.452	11.5	58	10	.18	4.7	11	47	.21	5.2	0.055	1.4	3.75	SPR	CG	Z
0.562	14.27	S-1459	.50	12.7	.518	13.2	.68	.12	.37	9.5	.25	1.1	.13	3.2	0.022	0.6	4.75	SST	C	N
0.562	14.27	JJ-8	.50	12.7	.502	12.8	3.0	.53	.34	8.7	1.0	4.6	.16	4.0	0.030	0.8	4.25	SST	C	N
0.562	14.27	K-19	.50	12.7	.478	12.1	16	2.8	.29	7.4	4.6	21	.21	5.3	0.042	1.1	4.00	SPR	C	GI
0.562	14.27	DD-89	.50	12.7	.438	11.1	99	17	.14	3.7	14	63	.22	5.5	0.062	1.6	3.50	SST	CG	N
0.562	14.27	A15-43	.53	13.5	.458	11.6	23	4.1	.27	6.9	6.3	28	.26	6.6	0.052	1.3	5.00	SST	CG	N
0.562	14.27	S-1529	.53	13.5	.446	11.3	40	7.0	.26	6.5	10	46	.28	7.0	0.058	1.5	4.75	SST	CG	N
0.562	14.27	U-61	.53	13.5	.442	11.2	75	13	.17	4.4	13	58	.23	5.7	0.060	1.5	3.75	SST	CG	N
0.562	14.27	S-436	.53	13.5	.434	11.0	113	20	.14	3.5	16	70	.22	5.7	0.064	1.6	3.50	SST	CG	N
0.562	14.27	B1-32	.59	15.1	.448	11.4	59	10	.20	5.1	12	53	.23	5.8	0.057	1.4	4.00	SPR	CG	N
0.562	14.27	S-1350	.63	15.9	.530	13.5	.17	.03	.53	13	.09	.39	.10	2.4	0.016	0.4	5.00	SST	C	N
0.562	14.27	Q-48	.63	15.9	.512	13.0	1.6	.28	.50	13	.79	3.5	.13	3.2	0.025	0.6	4.00	SST	C	N
0.562	14.27	B15-33	.63	15.9	.502	12.8	2.7	.48	.46	12	1.3	5.6	.17	4.2	0.030	0.8	4.50	SST	C	N
0.562	14.27	12685	.63	15.9	.500	12.7	3.9	.68	.47	12	1.8	8.1	.16	3.9	0.031	0.8	4.00	SST	C	N
0.562	14.27	3990	.63	15.9	.446	11.3	39	6.8	.32	8.1	12	55	.30	7.7	0.058	1.5	5.25	SPR	CG	Z
0.562	14.27	S-219	.63	15.9	.438	11.1	74	13	.19	4.9	14	63	.25	6.3	0.062	1.6	4.00	SST	CG	N
0.562	14.27	12750	.63	15.9	.438	11.1	74	13	.19	4.9	14	63	.31	7.9	0.062	1.6	4.00	SST	C	N
0.562	14.27	S-33	.66	16.7	.468	11.9	18	3.2	.37	9.4	6.7	30	.21	5.4	0.047	1.2	4.50	SST	CG	N
0.562	14.27	U-32	.66	16.7	.460	11.7	22	3.8	.37	9.4	8.0	36	.26	6.5	0.051	1.3	5.00	SST	CG	N
0.562	14.27	B-6	.66	16.7	.418	10.6	119	21	.19	4.7	22	99	.34	8.7	0.072	1.8	4.75	SPR	CG	N
0.562	14.27	S-921	.66	16.7	.376	9.6	308	54	.14	3.4	42	185	.47	11.8	0.093	2.4	5.00	SST	CG	N
0.562	14.27	S-1548	.69	17.4	.434	11.0	62	11	.25	6.4	16	70	.30	7.7	0.064	1.6	4.75	SST	CG	N
0.562	14.27	3197	.72	18.2	.498	12.6	2.2	.39	.51	13	1.1	5.1	.21	5.3	0.032	0.8	6.50	SPR	CG	Z
0.562	14.27	4189	.72	18.2	.438	11.1	49	8.5	.31	7.9	15	67	.34	8.7	0.062	1.6	5.50	HD	CG	Z
0.562	14.27	BB-68	.75	19.1	.520	13.2	.51	.09	.62	16	.32	1.4	.13	3.2	0.021	0.5	5.00	SST	C	N
0.562	14.27	S-1138	.75	19.1	.506	12.9	1.8	.32	.59	15	1.1	4.8	.16	4.1	0.028	0.7	4.75	SST	C	N
0.562	14.27	LL-84	.75	19.1	.504	12.8	.99	.17	.47	12	.46	2.1	.28	7.2	0.029	0.7	8.75	MW	C	N
0.562	14.27	S-3121	.75	19.1	.502	12.8	1.7	.29	.54	14	.91	4.0	.21	5.3	0.030	0.8	6.00	SST	C	N
0.562	14.27	S-32	.75	19.1	.478	12.1	10	1.8	.46	12	4.8	21	.20	5.0	0.042	1.1	4.67	SST	CG	N
0.562	14.27	XX-40	.75	19.1	.470	11.9	9.1	1.6	.45	11	4.1	18	.30	7.6	0.046	1.2	6.50	SST	CG	N
0.562	14.27	S-22	.75	19.1	.418	10.6	58	10	.25	6.2	14	64	.50	12.8	0.072	1.8	7.00	SST	CG	N
0.562	14.27	3975	.75	19.1	.402	10.2	175	31	.17	4.4	30	135	.40	10.2	0.080	2.0	5.00	SPR	CG	Z
0.562	14.27	B11-58	.81	20.6	.516	13.1	.64	.11	.65	17	.42	1.9	.16	4.1	0.023	0.6	6.00	MW	C	Z
0.562	14.27	Z-30	.81	20.6	.514	13.1	.56	.10	.63	16	.35	1.6	.19	4.7	0.024	0.6	6.75	SST	C	N
0.562	14.27	10649	.81	20.6	.462	11.7	17	2.9	.48	12	8.0	36	.30	7.6	0.050	1.3	6.00	SPR	CG	Z
0.562	14.27	S-87	.81	20.6	.460	11.7	21	3.7	.38	9.6	8.0	36	.31	7.8	0.051	1.3	5.00	SST	C	N
0.562	14.27	10128	.88	22.2	.454	11.5	13	2.3	.39	9.9	5.2	23	.49	12.3	0.054	1.4	9.00	SPR	CG	N
0.562	14.27	H-49	.88	22.2	.438	11.1	42	7.4	.36	9.0	15	67	.37	9.4	0.062	1.6	6.00	SPR	CG	GI
0.562	14.27	J-37	.88	22.2	.428	10.9	60	10	.32	8.1	19	85	.47	11.9	0.067	1.7	6.00	SPR	C	Z
0.562	14.27	TT-66	.88	22.2	.352	8.9	398	70	.15	3.8	59	262	.63	16.0	0.105	2.7	6.00	SST	CG	N
0.562	14.27	N-136	.91	23.0	.502	12.8	.79	.14	.56	14	.44	2.0	.35	8.8	0.030	0.8	10.5	SST	C	N
0.562	14.27	2535	.91	23.0	.428	10.9	68	12	.39	9.8	26	117	.37	9.4	0.067	1.7	5.50	MW	CG	GI
0.562	14.27	10352	.94	23.8	.494	12.5	2.6	.46	.67	17	1.7	7.7	.27	6.9	0.034	0.9	7.00	SPR	C	Z
0.562	14.27	10820	.94	23.8	.482	12.2	3.3	.57	.58	15	1.9	8.4	.36	9.1	0.040	1.0	9.00	SST	CG	N
0.562	14.27	3799	.94	23.8	.478	12.1	4.0	.70	.52	13	2.1	9.2	.42	10.7	0.042	1.1	10.0	SPR	CG	Z
0.562	14.27	3315	.94	23.8	.448	11.4	17	2.9	.43	11	7.2	32	.51	13.0	0.057	1.4	9.00	SPR	CG	Z
0.562	14.27	JJ-75	.94	23.8	.442	11.2	37	6.4	.37	9.5	14	61	.36	9.1	0.060	1.5	6.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.562	14.27	10217	.94	23.8	.428	10.9	60	10	.32	8.1	19	85	.40	10.2	0.067	1.7	6.00	SPR	CG	Z
0.562	14.27	3222	.97	24.6	.510	13.0	1.2	.21	.80	20	.97	4.3	.17	4.3	0.026	0.7	5.50	MW	C	Z
0.562	14.27	12660	.98	25.0	.510	13.0	1.1	.20	.81	21	.92	4.1	.18	4.5	0.026	0.7	5.75	MW	C	GI
0.562	14.27	L-19	1.00	25.4	.502	12.8	1.9	.34	.79	20	1.5	6.8	.21	5.3	0.030	0.8	6.00	MW	C	Z
0.562	14.27	10343	1.00	25.4	.494	12.5	2.6	.46	.73	18	1.9	8.5	.27	6.9	0.034	0.9	7.00	SPR	C	Z
0.562	14.27	S-1141	1.00	25.4	.494	12.5	3.0	.53	.77	20	2.3	10	.23	5.8	0.034	0.9	5.75	SST	C	N
0.562	14.27	S-1028	1.00	25.4	.492	12.5	3.2	.56	.79	20	2.5	11	.21	5.3	0.035	0.9	6.00	SST	CG	N
0.562	14.27	S-1305	1.00	25.4	.488	12.4	5.4	.95	.61	16	3.3	15	.19	4.7	0.037	0.9	5.00	SST	CG	N
0.562	14.27	Y-27	1.00	25.4	.482	12.2	7.4	1.3	.60	15	4.4	20	.22	5.6	0.040	1.0	5.50	SPR	CG	Z
0.562	14.27	S-1027	1.00	25.4	.468	11.9	11	1.9	.63	16	6.7	30	.29	7.5	0.047	1.2	6.25	SST	CG	N
0.562	14.27	3881	1.00	25.4	.466	11.8	14	2.5	.54	14	7.6	34	.29	7.3	0.048	1.2	6.00	SPR	CG	GI
0.562	14.27	S-358	1.00	25.4	.464	11.8	15	2.7	.50	13	7.6	34	.27	6.8	0.049	1.2	5.50	SST	CG	N
0.562	14.27	12294	1.00	25.4	.458	11.6	20	3.5	.46	12	9.0	40	.31	7.9	0.052	1.3	6.00	SPR	CG	Z
0.562	14.27	11747	1.00	25.4	.456	11.6	14	2.5	.58	15	8.3	37	.42	10.8	0.053	1.3	8.00	SPR	CG	Z
0.562	14.27	515	1.00	25.4	.454	11.5	22	3.8	.47	12	10	45	.40	10.1	0.054	1.4	6.33	HD	C	Z
0.562	14.27	S-3128	1.00	25.4	.454	11.5	16	2.8	.58	15	9.5	42	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.562	14.27	3578	1.00	25.4	.452	11.5	22	3.9	.64	16	14	64	.36	9.1	0.055	1.4	6.50	MW	CG	Z
0.562	14.27	A14-33	1.00	25.4	.452	11.5	21	3.6	.48	12	10	45	.35	8.8	0.055	1.4	6.33	SST	CG	N
0.562	14.27	11544	1.00	25.4	.426	10.8	57	9.9	.35	8.9	20	88	.51	13.0	0.068	1.7	6.50	SPR	CG	N
0.562	14.27	S-1242	1.00	25.4	.418	10.6	71	13	.29	7.4	21	93	.43	11.0	0.072	1.8	6.00	SST	CG	N
0.562	14.27	2750	1.00	25.4	.402	10.2	78	14	.38	9.6	29	131	.62	15.8	0.080	2.0	8.00	HD	CG	Z
0.562	14.27	10950	1.00	25.4	.400	10.2	110	19	.27	6.8	29	131	.53	13.4	0.081	2.1	6.50	SST	CG	N
0.562	14.27	S-801	1.03	26.2	.438	11.1	26	4.6	.54	14	14	63	.48	12.2	0.062	1.6	7.75	SST	CG	N
0.562	14.27	A11-50	1.06	27.0	.492	12.5	2.9	.52	.78	20	2.3	10	.28	7.1	0.035	0.9	7.00	SPR	C	Z
0.562	14.27	830	1.06	27.0	.352	8.9	318	56	.20	5.1	64	283	.81	20.7	0.105	2.7	7.75	HD	CG	Z
0.562	14.27	B14-68	1.13	28.6	.518	13.2	.43	.07	.95	24	.41	1.8	.18	4.5	0.022	0.6	7.00	MW	C	Z
0.562	14.27	O-89	1.13	28.6	.516	13.1	.51	.09	.94	24	.48	2.2	.18	4.7	0.023	0.6	7.00	MW	C	N
0.562	14.27	10047	1.13	28.6	.512	13.0	.73	.13	.93	23	.68	3.0	.20	5.1	0.025	0.6	7.00	MW	C	Z
0.562	14.27	B9-34	1.13	28.6	.478	12.1	4.5	.80	.75	19	3.4	15	.38	9.6	0.042	1.1	9.00	SPR	CG	Z
0.562	14.27	12561	1.13	28.6	.462	11.7	11	2.0	.68	17	7.5	33	.45	11.4	0.050	1.3	8.00	SPR	C	N
0.562	14.27	WW-40	1.13	28.6	.410	10.4	70	12	.37	9.5	26	116	.61	15.4	0.076	1.9	8.00	SPR	CG	Z
0.562	14.27	3871	1.13	28.6	.402	10.2	88	15	.35	8.8	30	135	.64	16.3	0.080	2.0	8.00	HD	CG	Z
0.562	14.27	DD-87	1.13	28.6	.402	10.2	131	23	.23	5.8	30	135	.48	12.2	0.080	2.0	6.00	SPR	CG	N
0.562	14.27	S-1534	1.22	31.0	.388	9.9	134	23	.27	6.9	36	161	.61	15.5	0.087	2.2	7.00	SST	CG	N
0.562	14.27	S-1369	1.25	31.8	.522	13.3	.31	.05	1.1	28	.35	1.6	.14	3.6	0.020	0.5	6.00	SST	C	N
0.562	14.27	3563	1.25	31.8	.512	13.0	.40	.07	.95	24	.38	1.7	.30	7.7	0.025	0.6	11.0	MW	C	GI
0.562	14.27	S-925	1.25	31.8	.478	12.1	4.9	.86	.88	22	4.3	19	.37	9.3	0.042	1.1	7.75	SST	C	N
0.562	14.27	S-1303	1.25	31.8	.474	12.0	7.9	1.4	.70	18	5.5	25	.28	7.0	0.044	1.1	6.25	SST	CG	N
0.562	14.27	3822	1.25	31.8	.466	11.8	10	1.8	.75	19	7.6	34	.36	9.1	0.048	1.2	7.50	SPR	CG	Z
0.562	14.27	10103	1.25	31.8	.460	11.7	12	2.1	.70	18	8.5	38	.41	10.4	0.051	1.3	8.00	SPR	CG	Z
0.562	14.27	3019	1.31	33.3	.402	10.2	70	12	.43	11	30	135	.76	19.3	0.080	2.0	9.50	SPR	CG	Z
0.562	14.27	12403	1.34	34.1	.512	13.0	.56	.10	1.1	28	.62	2.7	.24	6.0	0.025	0.6	8.50	MW	C	N
0.562	14.27	12026	1.34	34.1	.398	10.1	78	14	.41	11	33	145	.78	19.8	0.082	2.1	9.50	SPR	CG	N
0.562	14.27	Y-19	1.34	34.1	.352	8.9	262	46	.24	6.2	64	283	.95	24.0	0.105	2.7	9.00	SPR	CG	Z
0.562	14.27	1943	1.38	34.9	.512	13.0	.56	.10	1.1	29	.63	2.8	.24	6.0	0.025	0.6	8.50	MW	C	Z
0.562	14.27	10246	1.38	34.9	.510	13.0	.34	.06	.97	25	.32	1.4	.41	10.4	0.026	0.7	14.8	MW	C	Z
0.562	14.27	S-861	1.38	34.9	.460	11.7	7.9	1.4	.87	22	6.9	30	.51	13.0	0.051	1.3	10.0	SST	CG	N
0.562	14.27	3886	1.38	34.9	.452	11.5	13	2.2	.77	20	9.7	43	.61	15.4	0.055	1.4	10.0	SPR	C	Z
0.562	14.27	S-421	1.38	34.9	.436	11.1	25	4.4	.59	15	15	66	.52	13.2	0.063	1.6	8.25	SST	CG	N
0.562	14.27	29	1.38	34.9	.418	10.6	45	7.9	.49	12	22	99	.74	18.7	0.072	1.8	9.25	HD	C	Z
0.562	14.27	Q-29	1.38	34.9	.378	9.6	108	19	.37	9.5	40	180	.92	23.4	0.092	2.3	10.0	SST	CG	N
0.562	14.27	S-1691	1.41	35.7	.526	13.4	.03	.01	.87	22	.03	.12	.54	13.6	0.018	0.5	28.8	SST	C	N
0.562	14.27	Y-22	1.41	35.7	.512	13.0	.63	.11	1.2	31	.76	3.4	.20	5.1	0.025	0.6	7.00	MW	C	N
0.562	14.27	S-819	1.41	35.7	.418	10.6	38	6.6	.56	14	21	93	.70	17.8	0.072	1.8	9.75	SST	CG	N
0.562	14.27	3204	1.44	36.5	.504	12.8	.53	.09	.98	25	.52	2.3	.46	11.6	0.029	0.7	14.8	MW	C	Z
0.562	14.27	A9-29	1.44	36.5	.400	10.2	68	12	.43	11	29	131	.75	19.0	0.081	2.1	9.25	SST	CG	N
0.562	14.27	G-44	1.50	38.1	.506	12.9	.45	.08	1.1	27	.47	2.1	.45	11.4	0.028	0.7	15.0	MW	C	N
0.562	14.27	11365	1.50	38.1	.480	12.2	2.2	.38	.90	23	1.9	8.6	.60	15.4	0.041	1.0	13.8	SST	C	N
0.562	14.27	2800	1.50	38.1	.456	11.6	7.2	1.3	.76	19	5.4	24	.74	18.8	0.053	1.3	14.0	MW	CG	Z
0.562	14.27	S-1129	1.50	38.1	.442	11.2	15	2.6	.86	22	13	58	.63	16.0	0.060	1.5	10.5	SST	CG	N
0.562	14.27	3851	1.50	38.1	.438	11.1	23	4.0	.67	17	15	67	.59	15.0	0.062	1.6	9.50	HD	CG	Z
0.562	14.27	2925	1.50	38.1	.402	10.2	58	10	.52	13	30	135	.88	22.4	0.080	2.0	11.0	SPR	CG	Z
0.562	14.27	B14-62	1.56	39.7	.502	12.8	1.9	.34	1.4	34	2.6	12	.21	5.3	0.030	0.8	6.00	MW	C	N
0.562	14.27	3731	1.63	41.3	.512	13.0	.48	.08	1.4	35	.66	2.9	.26	6.7	0.025	0.6	9.50	MW	C	Z
0.562	14.27	2941	1.63	41.3	.510	13.0	.33	.06	1.2	31	.40	1.8	.41	10.5	0.026	0.7	15.0	MW	C	Z
0.562	14.27	TT-53	1.63	41.3	.460	11.7	5.3	.92	.91	23	4.8	21	.71	18.1	0.051	1.3	14.0	SST	CG	N
0.562	14.27	3983	1.63	41.3	.438	11.1	17	3.0	.88	22	15	67	.74	18.9	0.062	1.6	12.0	SPR	CG	Z
0.562	14.27	2722	1.66	42.1	.492	12.5	1.9	.33	1.3	33	2.5	11	.34	8.7	0.035	0.9	9.75	MW	CG	Z
0.562	14.27	S-115	1.66	42.1	.428	10.9	23	4.0	.77	20	18	80	.74	18.7	0.067	1.7	11.0	SST	CG	N
0.562	14.27	12593	1.69	42.8	.422	10.7	31	5.3	.67	17	21	91	.88	22.2	0.070	1.8	11.5	SPR	C	N
0.562	14.27	12333	1.72	43.6	.458	11.6	13	2.3	.68	17	9.0	40	.42	10.6	0.052	1.3	8.00	SPR	CG	Z
0.562	14.27	2873	1.75	44.5	.502	12.8	.61	.11	1.3	32	.77	3.4	.47	12.0	0.030	0.8	14.8	MW	C	Z
0.562	14.27	A13-44	1.75	44.5	.478	12.1	3.4	.60	1.3	34	4.5	20	.43	10.9	0.042	1.1	10.3	SST	CG	N
0.562	14.27	B18-168	1.75	44.5	.404	10.3	52	9.1	.53	13	27	122	.83	21.1	0.079	2.0	10.5	SST	CG	N
0.562	14.27	2639	1.75	44.5	.380	9.7	94	17	.63	16	59	262	1.09	27.7	0.091	2.3	12.0	MW	CG	Z
0.562	14.27	S-170	1.78	45.2	.428	10.9	23	4.0	.77	20	18	80	.80	20.4	0.067	1.7	11.0	SST	C	N
0.562	14.27	3716	1.81	46.0	.508	12.9	.39	.07	1.4	35	.54	2.4	.43	10.9	0.027	0.7	15.0	MW	C	Z
0.562	14.27	12659	1.81	46.0	.480	12.2	1.7	.30	1.0	26	1.7	7.8	.78	19.8	0.041	1.0	19.0	SPR	CG	Z
0.562	14.27	3218	1.81	46.0	.478	12.1	3.9	.69	1.3	33	5.1	23	.47	11.9	0.042	1.1	10.0	SPR	C	Z
0.562	14.27	VV-60	1.88	47.6	.502	12.8	1.1	.19	1.6	40	1.7	7.7	.30	7.6	0.030	0.8	9.00	MW	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.562	14.27	S-1172	1.88	47.6	.462	11.7	7.3	1.3	1.0	26	7.6	34	.50	12.7	0.050	1.3	10.0	SST	CG	N
0.562	14.27	10927	1.88	47.6	.432	11.0	21	3.8	.81	21	17	77	.83	21.1	0.065	1.7	11.8	SPR	C	Z
0.562	14.27	B2-55	1.88	47.6	.422	10.7	48	8.5	.42	11	21	91	.56	14.2	0.070	1.8	8.00	SPR	CG	N
0.562	14.27	B14-19	1.88	47.6	.384	9.8	85	15	.48	12	41	183	1.16	29.4	0.089	2.3	12.0	SPR	C	Z
0.562	14.27	12607	2.00	50.8	.490	12.4	2.1	.36	1.6	41	3.3	15	.40	10.1	0.036	0.9	10.0	MW	C	Z
0.562	14.27	11748	2.00	50.8	.460	11.7	6.1	1.1	1.3	33	7.8	35	.71	18.1	0.051	1.3	14.0	SPR	CG	Z
0.562	14.27	11440	2.00	50.8	.438	11.1	15	2.6	.94	24	14	63	.74	18.9	0.062	1.6	12.0	SST	CG	N
0.562	14.27	10066	2.00	50.8	.412	10.5	39	6.9	.64	16	25	112	.90	22.9	0.075	1.9	12.0	SPR	CG	Z
0.562	14.27	B11-46	2.00	50.8	.412	10.5	33	5.8	.71	18	23	105	.94	23.8	0.075	1.9	12.5	SST	CG	N
0.562	14.27	2898	2.06	52.4	.502	12.8	.61	.11	1.6	40	.96	4.3	.47	12.0	0.030	0.8	14.8	MW	C	Z
0.562	14.27	11874	2.09	53.2	.452	11.5	7.2	1.3	1.2	31	8.8	39	.88	22.4	0.055	1.4	16.0	SPR	CG	N
0.562	14.27	B8-48	2.16	54.8	.362	9.2	112	20	.49	13	55	246	1.50	38.1	0.100	2.5	15.0	SPR	CG	N
0.562	14.27	11568	2.22	56.4	.458	11.6	7.2	1.3	1.3	32	9.0	40	.73	18.5	0.052	1.3	13.0	SPR	CG	N
0.562	14.27	3556	2.25	57.2	.426	10.8	20	3.5	1.2	32	25	111	1.00	25.5	0.068	1.7	14.8	MW	CG	Z
0.562	14.27	10337	2.31	58.7	.428	10.9	22	3.8	.88	22	19	85	.87	22.1	0.067	1.7	13.0	SPR	CG	Z
0.562	14.27	4368	2.31	58.7	.394	10.0	56	9.8	.63	16	35	155	1.16	29.3	0.084	2.1	13.8	SPR	CG	Z
0.562	14.27	S-1219	2.38	60.3	.482	12.2	1.3	.23	1.6	40	2.1	9.3	.80	20.3	0.040	1.0	19.0	SST	C	N
0.562	14.27	3969	2.38	60.3	.472	12.0	5.3	.93	1.2	30	6.3	28	.50	12.6	0.045	1.1	10.0	SPR	C	Z
0.562	14.27	887	2.38	60.3	.402	10.2	38	6.6	.81	20	30	135	1.36	34.5	0.080	2.0	16.0	HD	C	Z
0.562	14.27	10563	2.44	61.9	.388	9.9	50	8.7	.78	20	39	172	1.52	38.7	0.087	2.2	17.5	SPR	CG	Z
0.562	14.27	4372	2.44	61.9	.336	8.5	192	34	.39	10	76	337	1.75	44.5	0.113	2.9	15.5	SPR	CG	Z
0.562	14.27	11209	2.63	66.7	.502	12.8	.61	.11	2.2	55	1.3	5.8	.47	12.0	0.030	0.8	14.8	MW	C	Z
0.562	14.27	12597	2.70	68.6	.338	8.6	177	31	.42	11	74	328	1.90	48.4	0.112	2.8	16.0	HD	C	N
0.562	14.27	10308	2.75	69.9	.418	10.6	23	4.1	.95	24	22	99	1.15	29.3	0.072	1.8	16.0	SPR	CG	Z
0.562	14.27	11279	2.75	69.9	.366	9.3	74	13	.71	18	52	232	1.96	49.8	0.098	2.5	20.0	SPR	CG	Z
0.562	14.27	2987	2.94	74.6	.278	7.1	563	99	.24	6.2	138	614	2.27	57.7	0.142	3.6	16.0	SPR	CG	Z
0.562	14.27	20	3.00	76.2	.454	11.5	6.3	1.1	1.6	40	10	45	.96	24.4	0.054	1.4	16.8	HD	C	Z
0.562	14.27	11580	3.09	78.6	.448	11.4	9.1	1.6	1.3	33	12	53	.91	23.2	0.057	1.4	15.0	SPR	CG	N
0.562	14.27	S-1107	3.13	79.4	.434	11.0	9.4	1.7	1.7	42	16	70	1.28	32.5	0.064	1.6	20.0	SST	CG	N
0.562	14.27	3695	3.16	80.2	.462	11.7	3.7	.65	2.1	53	7.8	35	1.05	26.7	0.050	1.3	20.0	SPR	C	Z
0.562	14.27	12601	3.50	88.9	.384	9.8	41	7.1	1.4	35	55	246	2.14	54.3	0.089	2.3	23.0	MW	C	N
0.562	14.27	1813	3.50	88.9	.302	7.7	272	48	.40	10	109	483	2.70	68.5	0.130	3.3	20.8	SPR	CG	Z
0.562	14.27	2737	3.75	95.3	.418	10.6	14	2.4	1.6	41	22	99	1.87	47.5	0.072	1.8	26.0	SPR	CG	Z
0.562	14.27	1887	3.75	95.3	.352	8.9	109	19	.81	21	89	395	1.97	50.0	0.105	2.7	18.8	MW	CG	Z
0.562	14.27	3438	4.00	101.6	.368	9.3	58	10	.88	22	51	225	2.33	59.1	0.097	2.5	24.0	SPR	CG	Z
0.562	14.27	S-1176	4.44	112.7	.374	9.5	48	8.3	.90	23	43	191	2.07	52.5	0.094	2.4	22.0	SST	CG	N
0.562	14.27	11287	4.50	114.3	.448	11.4	4.8	.84	2.5	62	12	53	1.57	39.8	0.057	1.4	26.5	SPR	C	Z
0.562	14.27	10342	4.88	123.8	.402	10.2	18	3.1	1.7	44	30	135	2.64	67.1	0.080	2.0	32.0	SPR	C	Z
0.562	14.27	10234	5.25	133.4	.322	8.2	113	20	.79	20	90	398	3.90	99.1	0.120	3.0	32.5	SPR	CG	Z
0.562	14.27	10786	5.50	139.7	.422	10.7	7.8	1.4	2.6	67	21	91	2.73	69.3	0.070	1.8	39.0	SPR	CG	N
0.562	14.27	10385	10.0	254.0	.438	11.1	3.9	.68	3.9	100	15	67	2.91	74.0	0.062	1.6	46.0	SPR	C	Z
0.562	14.27	10296	10.0	254.0	.432	11.0	4.8	.83	3.7	93	17	77	2.99	75.9	0.065	1.7	46.0	SPR	CG	Z
0.562	14.27	4166	12.8	323.9	.460	11.7	1.3	.24	6.3	160	8.5	38	2.91	73.8	0.051	1.3	56.0	SPR	C	Z
0.562	14.27	4392	15.0	381.0	.460	11.7	1.3	.24	6.3	160	8.5	38	2.91	73.8	0.051	1.3	56.0	SPR	C	Z
0.578	14.68	L-20	.47	11.9	.494	12.5	25	4.4	.19	4.7	4.7	21	.17	4.3	0.042	1.1	3.00	SST	C	N
0.578	14.68	WW-69	.50	12.7	.516	13.1	2.0	.36	.28	7.2	.57	2.6	.22	5.5	0.031	0.8	6.00	MW	C	Z
0.578	14.68	S-1103	.50	12.7	.502	12.8	9.5	1.7	.32	8.1	3.0	13	.18	4.6	0.038	1.0	3.75	SST	C	N
0.578	14.68	BB-80	.59	15.1	.418	10.6	138	24	.19	4.9	27	119	.40	10.2	0.080	2.0	5.00	SST	CG	N
0.578	14.68	Z-99	.63	15.9	.538	13.7	.15	.03	.41	10	.06	.26	.22	5.6	0.020	0.5	11.0	MW	CG	Z
0.578	14.68	10394	.66	16.7	.410	10.4	237	42	.14	3.6	34	151	.38	9.6	0.084	2.1	4.50	SPR	CG	Z
0.578	14.68	I-41	.69	17.4	.388	9.9	320	56	.15	3.7	47	207	.50	12.7	0.095	2.4	5.25	SPR	CG	N
0.578	14.68	G-32	.75	19.1	.524	13.3	.65	.11	.48	12	.31	1.4	.27	6.9	0.027	0.7	9.00	MW	C	Z
0.578	14.68	2718	.75	19.1	.518	13.2	2.4	.41	.57	14	1.3	6.0	.18	4.6	0.030	0.8	5.00	MW	C	Z
0.578	14.68	B14-2	.75	19.1	.484	12.3	16	2.7	.45	11	7.0	31	.24	6.0	0.047	1.2	5.00	SPR	CG	N
0.578	14.68	3659	.75	19.1	.474	12.0	29	5.1	.30	7.7	8.8	39	.23	5.9	0.052	1.3	4.50	SPR	CG	GI
0.578	14.68	J-15	.81	20.6	.454	11.5	52	9.0	.29	7.3	15	66	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.578	14.68	A-45	.81	20.6	.418	10.6	104	18	.27	6.8	28	123	.48	12.2	0.080	2.0	6.00	SST	CG	N
0.578	14.68	12200	.88	22.2	.514	13.1	3.1	.54	.72	18	2.2	9.8	.16	4.1	0.032	0.8	5.00	SPR	CG	Z
0.578	14.68	12329	.88	22.2	.430	10.9	84	15	.28	7.1	24	105	.44	11.3	0.074	1.9	6.00	SPR	CG	Z
0.578	14.68	3513	.91	23.0	.460	11.7	42	7.3	.43	11	18	79	.35	9.0	0.059	1.5	5.00	MW	C	Z
0.578	14.68	A9-49	.91	23.0	.428	10.9	71	13	.34	8.7	24	109	.53	13.3	0.075	1.9	7.00	SPR	CG	Z
0.578	14.68	10929	.97	24.6	.526	13.4	1.2	.20	.81	21	.94	4.2	.16	4.0	0.026	0.7	5.00	SST	C	N
0.578	14.68	2960	1.00	25.4	.520	13.2	1.0	.18	.74	19	.76	3.4	.26	6.6	0.029	0.7	8.00	MW	C	Z
0.578	14.68	S-1064	1.00	25.4	.520	13.2	1.8	.31	.83	21	1.5	6.5	.17	4.4	0.029	0.7	5.00	SST	C	N
0.578	14.68	Y-38	1.00	25.4	.510	13.0	2.6	.46	.80	20	2.1	9.4	.20	5.2	0.034	0.9	6.00	SST	CG	N
0.578	14.68	S-1330	1.00	25.4	.508	12.9	3.3	.59	.77	20	2.6	12	.23	5.8	0.035	0.9	5.50	SST	C	N
0.578	14.68	12662	1.00	25.4	.508	12.9	4.5	.79	.79	20	3.5	16	.21	5.3	0.035	0.9	5.00	MW	C	GI
0.578	14.68	RR-63	1.00	25.4	.506	12.9	5.1	.89	.63	16	3.2	14	.22	5.5	0.036	0.9	5.00	SPR	C	Z
0.578	14.68	10826	1.00	25.4	.504	12.8	4.5	.79	.75	19	3.4	15	.25	6.4	0.037	0.9	5.75	SPR	C	Z
0.578	14.68	12740	1.00	25.4	.502	12.8	5.4	.95	.68	17	3.7	17	.25	6.3	0.038	1.0	5.50	SPR	C	Z
0.578	14.68	B3-45	1.00	25.4	.448	11.4	35	6.1	.45	11	15	69	.55	14.0	0.065	1.7	7.50	MW	C	N
0.578	14.68	Q-34	1.03	26.2	.458	11.6	24	4.2	.53	13	13	56	.42	10.7	0.060	1.5	7.00	SST	CG	N
0.578	14.68	S-1656	1.03	26.2	.456	11.6	26	4.5	.52	13	13	59	.43	10.8	0.061	1.5	7.00	SST	CG	N
0.578	14.68	11373	1.13	28.6	.496	12.6	3.3	.58	.76	19	2.5	11	.37	9.4	0.041	1.0	9.00	SST	CG	N
0.578	14.68	S-818	1.13	28.6	.428	10.9	63	11	.36	9.2	23	102	.53	13.3	0.075	1.9	7.00	SST	CG	N
0.578	14.68	10881	1.19	30.2	.398	10.1	130	23	.31	7.8	40	177	.74	18.9	0.090	2.3	8.25	SPR	CG	N
0.578	14.68	I-43	1.25	31.8	.512	13.0	2.3	.40	1.0	26	2.3	10	.23	5.9	0.033	0.8	6.00	SST	C	N
0.578	14.68	S-1041	1.25	31.8	.482	12.2	4.2	.74	.65	17	2.8	12	.60	15.2	0.048	1.2	12.5	SST	CG	N
0.578	14.68	B9-67	1.25	31.8	.444	11.3	24	4.2	.51	13	12	55	.74	18.7	0.067	1.7	10.0	SST	C	N
0.578	14.68	00-55	1.28	32.5	.478	12.1	6.8	1.2	.78	20	5.3	24	.50	12.7	0.050	1.3	10.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.578	14.68	S-1498	1.31	33.3	.478	12.1	7.6	1.3	.86	22	6.5	29	.45	11.4	0.050	1.3	9.00	SST	CG	N
0.578	14.68	3112	1.31	33.3	.468	11.9	18	3.2	.56	14	10	46	.39	9.8	0.055	1.4	7.00	SPR	CG	Z
0.578	14.68	S-139	1.34	34.1	.526	13.4	.97	.17	1.2	30	1.1	5.1	.17	4.3	0.026	0.7	5.50	SST	C	N
0.578	14.68	GG-89	1.38	34.9	.450	11.4	29	5.0	.53	14	15	68	.48	12.2	0.064	1.6	7.50	SST	CG	N
0.578	14.68	WW-30	1.38	34.9	.328	8.3	539	94	.18	4.6	98	437	1.13	28.6	0.125	3.2	9.00	SPR	CG	Z
0.578	14.68	A-97	1.41	35.7	.338	8.6	443	78	.20	5.0	88	390	1.08	27.4	0.120	3.0	9.00	HD	CG	Z
0.578	14.68	10672	1.44	36.5	.438	11.1	34	5.9	.59	15	20	89	.68	17.3	0.070	1.8	9.75	SPR	CG	Z
0.578	14.68	B12-59	1.44	36.5	.396	10.1	131	23	.31	8.0	41	183	.86	22.0	0.091	2.3	8.50	SPR	C	Z
0.578	14.68	4116	1.50	38.1	.470	11.9	12	2.1	.81	21	9.8	44	.54	13.7	0.054	1.4	9.00	SPR	C	Z
0.578	14.68	S-887	1.53	38.9	.398	10.1	94	16	.39	10	37	164	.86	21.7	0.090	2.3	9.50	SST	CG	N
0.578	14.68	S-199	1.56	39.7	.488	12.4	6.2	1.1	.93	24	5.7	26	.38	9.7	0.045	1.1	7.50	SST	C	N
0.578	14.68	4321	1.63	41.3	.470	11.9	11	1.9	.92	23	9.8	44	.54	13.7	0.054	1.4	10.0	SPR	CG	Z
0.578	14.68	12209	1.63	41.3	.434	11.0	37	6.5	.58	15	22	97	.72	18.3	0.072	1.8	10.0	SPR	CG	Z
0.578	14.68	NN-56	1.69	42.8	.398	10.1	80	14	.46	12	37	164	.99	25.1	0.090	2.3	11.0	SST	CG	N
0.578	14.68	2797	1.75	44.5	.338	8.6	443	78	.20	5.0	88	390	1.08	27.4	0.120	3.0	9.00	SPR	CG	Z
0.578	14.68	3870	1.81	46.0	.488	12.4	4.1	.72	1.3	33	5.3	24	.52	13.1	0.045	1.1	11.5	SPR	CG	Z
0.578	14.68	10858	1.81	46.0	.448	11.4	17	3.0	.92	23	16	71	.76	19.4	0.065	1.7	11.8	SST	CG	N
0.578	14.68	4230	1.88	47.6	.474	12.0	8.3	1.4	1.1	27	8.8	39	.61	15.5	0.052	1.3	10.8	SPR	C	Z
0.578	14.68	12634	1.97	50.0	.506	12.9	1.9	.33	1.6	40	3.0	13	.40	10.1	0.036	0.9	10.0	MW	C	Z
0.578	14.68	12249	2.00	50.8	.484	12.3	4.3	.75	1.4	35	5.9	26	.61	15.5	0.047	1.2	13.0	SPR	CG	Z
0.578	14.68	3317	2.00	50.8	.428	10.9	36	6.3	.68	17	24	109	.90	22.9	0.075	1.9	12.0	SPR	CG	Z
0.578	14.68	M-92	2.00	50.8	.266	6.8	1259	220	.13	3.4	170	754	1.72	43.6	0.156	4.0	11.0	SPR	CG	N
0.578	14.68	11888	2.03	51.6	.430	10.9	34	5.9	.70	18	24	105	.89	22.6	0.074	1.9	12.0	SPR	CG	N
0.578	14.68	12231	2.03	51.6	.428	10.9	40	7.0	.62	16	24	109	.83	21.0	0.075	1.9	11.0	SPR	CG	Z
0.578	14.68	11317	2.13	54.0	.378	9.6	110	19	.49	13	54	240	1.40	35.6	0.100	2.5	14.0	SPR	CG	Z
0.578	14.68	10382	2.25	57.2	.496	12.6	3.5	.61	1.3	34	4.7	21	.43	10.9	0.041	1.0	9.50	SPR	C	Z
0.578	14.68	12299	2.28	57.9	.418	10.6	37	6.4	.80	20	30	131	1.20	30.5	0.080	2.0	15.0	SPR	CG	Z
0.578	14.68	12214	2.34	59.5	.478	12.1	6.1	1.1	1.3	33	7.8	35	.60	15.2	0.050	1.3	12.0	SPR	CG	Z
0.578	14.68	3200	2.38	60.3	.518	13.2	.55	.10	1.9	48	1.1	4.7	.47	12.0	0.030	0.8	14.8	MW	C	Z
0.578	14.68	10419	2.38	60.3	.444	11.3	21	3.6	.90	23	19	82	.91	23.0	0.067	1.7	12.5	SPR	C	Z
0.578	14.68	S-49	2.50	63.5	.396	10.1	53	9.3	.72	18	38	170	1.55	39.3	0.091	2.3	16.0	SST	C	N
0.578	14.68	10473	2.56	65.1	.454	11.5	9.7	1.7	1.4	37	14	62	1.12	28.3	0.062	1.6	18.0	SPR	CG	Z
0.578	14.68	12063	2.59	65.9	.482	12.2	5.1	.90	1.4	37	7.4	33	.58	14.6	0.048	1.2	12.0	SPR	CG	GI
0.578	14.68	S-1453	2.63	66.7	.434	11.0	22	3.9	.92	23	20	90	.99	25.1	0.072	1.8	13.8	SST	CG	N
0.578	14.68	11313	2.66	67.5	.434	11.0	23	4.1	.93	24	22	97	1.06	27.0	0.072	1.8	14.8	SPR	CG	Z
0.578	14.68	S-472	3.13	79.4	.516	13.1	.61	.11	2.7	68	1.6	7.3	.45	11.4	0.031	0.8	13.5	SST	C	N
0.578	14.68	2829	3.13	79.4	.484	12.3	1.6	.28	1.6	40	2.5	11	1.54	39.1	0.047	1.2	31.8	HD	C	Z
0.578	14.68	10490	3.16	80.2	.422	10.7	28	5.0	.97	25	27	122	1.33	33.7	0.078	2.0	17.0	SPR	CG	BO
0.578	14.68	10306	3.31	84.1	.368	9.3	86	15	.72	18	62	276	2.23	56.7	0.105	2.7	21.3	SPR	CG	Z
0.578	14.68	10987	3.75	95.3	.368	9.3	90	16	.69	17	62	276	2.13	54.0	0.105	2.7	20.3	HD	CG	Z
0.578	14.68	10965	3.75	95.3	.358	9.1	124	22	.55	14	69	305	2.03	51.6	0.110	2.8	18.5	HD	CG	Z
0.578	14.68	S-3041	4.75	120.7	.454	11.5	4.6	.78	2.7	69	12	54	2.05	52.0	0.062	1.6	32.0	SST	C	N
0.578	14.68	3345	5.00	127.0	.438	11.1	11	1.9	1.8	46	20	89	1.82	46.2	0.070	1.8	26.0	SPR	CG	Z
0.578	14.68	12296	5.38	136.5	.462	11.7	5.4	.94	2.3	57	12	54	1.42	36.1	0.058	1.5	23.5	SPR	C	Z
0.578	14.68	10087	5.38	136.5	.454	11.5	7.0	1.2	2.1	53	15	66	1.55	39.4	0.062	1.6	24.0	HD	C	N
0.578	14.68	12081	5.50	139.7	.454	11.5	6.2	1.1	2.4	61	15	66	1.67	42.5	0.062	1.6	27.0	SPR	CG	Z
0.578	14.68	4187	7.50	190.5	.458	11.6	4.2	.73	3.2	81	13	60	2.10	53.3	0.060	1.5	34.0	SPR	C	BO
0.578	14.68	S-3043	7.63	193.7	.454	11.5	4.2	.74	3.3	84	14	62	2.17	55.1	0.062	1.6	34.0	SST	C	N
0.578	14.68	4016	23.5	596.9	.408	10.4	5.7	1.0	6.2	156	35	157	9.56	242.9	0.085	2.2	111.5	SPR	C	Z
0.590	14.99	12524	1.50	38.1	.386	9.8	255	45	.22	5.6	56	250	.74	18.8	0.102	2.6	7.25	SPR	CG	N
0.593	15.06	3789	.44	11.1	.497	12.6	13	2.4	.17	4.4	2.3	10	.26	6.7	0.048	1.2	5.50	SPR	CG	Z
0.593	15.06	N-51	.47	11.9	.499	12.7	12	2.2	.21	5.3	2.6	11	.26	6.6	0.047	1.2	5.50	SPR	CG	N
0.593	15.06	10334	.50	12.7	.459	11.7	199	35	.09	2.3	18	80	.27	6.8	0.067	1.7	3.00	SPR	C	Z
0.593	15.06	A-47	.53	13.5	.393	10.0	800	140	.07	1.7	53	235	.35	8.9	0.100	2.5	3.50	SPR	CG	GI
0.593	15.06	NN-92	.56	14.3	.523	13.3	2.4	.42	.30	7.6	.72	3.2	.26	6.7	0.035	0.9	6.50	SST	C	N
0.593	15.06	11341	.56	14.3	.503	12.8	14	2.5	.37	9.4	5.2	23	.19	4.9	0.045	1.1	4.25	SST	CG	N
0.593	15.06	I-79	.56	14.3	.483	12.3	42	7.4	.24	6.1	10	45	.22	5.6	0.055	1.4	4.00	SPR	CG	GI
0.593	15.06	3540	.59	15.1	.503	12.8	14	2.5	.35	8.8	5.0	22	.25	6.3	0.045	1.1	4.50	HD	C	Z
0.593	15.06	3586	.59	15.1	.491	12.5	20	3.6	.34	8.6	6.9	31	.26	6.5	0.051	1.3	5.00	HD	CG	Z
0.593	15.06	10784	.59	15.1	.473	12.0	41	7.2	.29	7.4	12	53	.30	7.6	0.060	1.5	5.00	SPR	CG	N
0.593	15.06	2540	.59	15.1	.449	11.4	109	19	.19	4.9	21	94	.32	8.2	0.072	1.8	4.50	SPR	CG	Z
0.593	15.06	3502	.63	15.9	.529	13.4	2.4	.43	.42	11	1.0	4.5	.21	5.3	0.032	0.8	5.50	HD	C	Z
0.593	15.06	10280	.63	15.9	.503	12.8	20	3.6	.29	7.4	6.0	27	.17	4.3	0.045	1.1	3.75	SPR	CG	Z
0.593	15.06	Y-66	.63	15.9	.503	12.8	18	3.2	.31	7.8	5.6	25	.17	4.3	0.045	1.1	3.75	SST	CG	N
0.593	15.06	G-29	.63	15.9	.485	12.3	14	2.4	.25	6.3	3.4	15	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.593	15.06	3843	.63	15.9	.483	12.3	42	7.4	.24	6.1	10	45	.22	5.6	0.055	1.4	4.00	SPR	CG	GI
0.593	15.06	11309	.63	15.9	.465	11.8	65	11	.24	6.2	16	70	.35	8.9	0.064	1.6	4.50	SPR	C	N
0.593	15.06	10538	.66	16.7	.419	10.6	231	40	.16	4.0	37	164	.41	10.5	0.087	2.2	4.75	SPR	CG	Z
0.593	15.06	S-906	.69	17.4	.453	11.5	70	12	.26	6.6	18	81	.35	8.9	0.070	1.8	5.00	SST	CG	N
0.593	15.06	N-130	.75	19.1	.517	13.1	5.2	.91	.56	14	2.9	13	.19	4.8	0.038	1.0	5.00	SST	CG	N
0.593	15.06	N-120	.75	19.1	.515	13.1	5.7	.99	.56	14	3.1	14	.20	5.0	0.039	1.0	5.00	SST	CG	N
0.593	15.06	S-828	.75	19.1	.513	13.0	8.9	1.6	.44	11	4.0	18	.21	5.2	0.040	1.0	4.00	SST	C	N
0.593	15.06	S-872	.75	19.1	.499	12.7	11	2.0	.50	13	5.7	26	.25	6.4	0.047	1.2	5.33	SST	CG	N
0.593	15.06	M-134	.75	19.1	.453	11.5	143	25	.13	3.3	18	81	.32	8.0	0.070	1.8	3.50	SST	C	N
0.593	15.06	3541	.75	19.1	.433	11.0	145	25	.28	7.0	40	179	.40	10.2	0.080	2.0	5.00	MW	CG	Z
0.593	15.06	B15-19	.78	19.8	.509	12.9	11	1.9	.46	12	4.9	22	.19	4.8	0.042	1.1	4.50	SPR	CG	N
0.593	15.06	S-943	.78	19.8	.485	12.3	17	2.9	.45	11	7.5	34	.33	8.4	0.054	1.4	6.00	SST	CG	N
0.593	15.06	S-928	.78	19.8	.465	11.8	53	9.3	.28	7.1	15	66	.30	7.6	0.064	1.6	4.67	SST	CG	N
0.593	15.06	10252	.78	19.8	.423	10.7	229	40	.15	3.8	34	153	.47	11.9	0.085	2.2	4.50	SPR	C	Z
0.593	15.06	S-62	.78	19.8	.409	10.4	484	85	.08	2.0	39	171	.32	8.2	0.092	2.3	3.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.593	15.06	I-46	.81	20.6	.531	13.5	2.4	.41	.63	16	1.5	6.7	.18	4.5	0.031	0.8	4.75	SST	C	N
0.593	15.06	3547	.84	21.4	.463	11.8	44	7.6	.38	9.6	17	74	.39	9.9	0.065	1.7	6.00	HD	CG	GI
0.593	15.06	2940	.84	21.4	.459	11.7	57	10	.32	8.1	18	80	.37	9.4	0.067	1.7	5.50	SPR	CG	Z
0.593	15.06	3840	.84	21.4	.449	11.4	78	14	.27	6.9	21	94	.40	10.1	0.072	1.8	5.50	SPR	CG	Z
0.593	15.06	12277	.88	22.2	.513	13.0	4.4	.76	.60	15	2.6	12	.28	7.1	0.040	1.0	7.00	SPR	CG	Z
0.593	15.06	S-1393	.88	22.2	.469	11.9	35	6.2	.38	9.8	14	60	.34	8.7	0.062	1.6	5.50	SST	CG	N
0.593	15.06	B-98	.88	22.2	.467	11.9	51	8.9	.30	7.6	15	67	.32	8.0	0.063	1.6	5.00	SPR	CG	Z
0.593	15.06	3918	.88	22.2	.449	11.4	84	15	.25	6.4	21	94	.38	9.6	0.072	1.8	5.25	HD	CG	Z
0.593	15.06	11196	.91	23.0	.463	11.8	48	8.3	.33	8.3	16	69	.34	8.7	0.065	1.7	5.25	SST	CG	N
0.593	15.06	12689	.92	23.4	.451	11.5	73	13	.39	9.8	28	126	.39	9.9	0.071	1.8	5.50	MW	CG	Z
0.593	15.06	S-3096	.94	23.8	.473	12.0	31	5.4	.40	10	12	55	.39	9.9	0.060	1.5	5.50	SST	C	N
0.593	15.06	3091	.94	23.8	.469	11.9	28	4.8	.50	13	14	61	.44	11.2	0.062	1.6	7.00	SPR	CG	Z
0.593	15.06	1923	.97	24.6	.289	7.3	2982	522	.05	1.3	156	693	.76	19.3	0.152	3.9	5.00	SPR	CG	Z
0.593	15.06	A13-58	1.00	25.4	.531	13.5	1.9	.33	.83	21	1.6	7.0	.17	4.3	0.031	0.8	5.50	SST	CG	N
0.593	15.06	10366	1.00	25.4	.519	13.2	4.5	.78	.75	19	3.3	15	.24	6.1	0.037	0.9	5.50	SPR	C	Z
0.593	15.06	GG-42	1.00	25.4	.453	11.5	61	11	.30	7.6	18	81	.39	9.8	0.070	1.8	5.50	SST	CG	N
0.593	15.06	BB-65	1.00	25.4	.443	11.3	93	16	.26	6.5	24	106	.41	10.5	0.075	1.9	5.50	SPR	CG	Z
0.593	15.06	A11-66	1.03	26.2	.531	13.5	1.9	.33	.86	22	1.6	7.3	.17	4.3	0.031	0.8	5.50	SST	CG	N
0.593	15.06	S-375	1.03	26.2	.469	11.9	25	4.3	.55	14	14	60	.43	11.0	0.062	1.6	7.00	SST	CG	N
0.593	15.06	K-46	1.13	28.6	.469	11.9	25	4.3	.55	14	14	60	.43	11.0	0.062	1.6	7.00	SST	CG	N
0.593	15.06	3536	1.13	28.6	.467	11.9	30	5.3	.68	17	21	93	.44	11.2	0.063	1.6	7.00	MW	CG	Z
0.593	15.06	3320	1.13	28.6	.449	11.4	43	7.6	.49	12	21	94	.60	15.2	0.072	1.8	8.25	HD	CG	Z
0.593	15.06	S-1362	1.13	28.6	.433	11.0	63	11	.43	11	27	120	.64	16.3	0.080	2.0	8.00	SST	CG	N
0.593	15.06	4297	1.13	28.6	.411	10.4	148	26	.27	6.9	40	179	.75	19.1	0.091	2.3	7.25	SPR	C	Z
0.593	15.06	S-1356	1.16	29.4	.433	11.0	76	13	.36	9.0	27	120	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.593	15.06	10174	1.19	30.2	.499	12.7	8.6	1.5	.79	20	6.8	30	.38	9.6	0.047	1.2	7.00	SPR	C	Z
0.593	15.06	B12-65	1.19	30.2	.457	11.6	30	5.3	.58	15	17	78	.61	15.5	0.068	1.7	9.00	SPR	CG	Z
0.593	15.06	G-60A	1.19	30.2	.433	11.0	47	8.3	.39	9.9	18	82	.80	20.3	0.080	2.0	10.0	SST	CG	N
0.593	15.06	S-295	1.19	30.2	.427	10.8	65	11	.44	11	29	128	.75	19.0	0.083	2.1	9.00	SST	CG	N
0.593	15.06	11226	1.19	30.2	.411	10.4	111	19	.36	9.2	40	179	.82	20.8	0.091	2.3	9.00	SPR	CG	Z
0.593	15.06	Q-35	1.22	31.0	.357	9.1	355	62	.21	5.3	75	332	1.00	25.5	0.118	3.0	8.50	SST	CG	N
0.593	15.06	12560	1.25	31.8	.531	13.5	1.6	.28	1.0	26	1.7	7.5	.22	5.5	0.031	0.8	6.00	SST	C	N
0.593	15.06	2719	1.25	31.8	.517	13.1	3.9	.68	.97	25	3.8	17	.29	7.2	0.038	1.0	6.50	MW	C	Z
0.593	15.06	4247	1.25	31.8	.505	12.8	6.5	1.1	.86	22	5.6	25	.35	8.9	0.044	1.1	7.00	SPR	C	Z
0.593	15.06	V-28	1.25	31.8	.449	11.4	68	12	.29	7.4	20	88	.40	10.1	0.072	1.8	5.50	SST	CG	N
0.593	15.06	KK-53	1.25	31.8	.433	11.0	62	11	.46	12	29	128	.72	18.3	0.080	2.0	9.00	SPR	CG	Z
0.593	15.06	2890	1.28	32.5	.423	10.7	95	17	.36	9.2	34	153	.68	17.3	0.085	2.2	8.00	SPR	CG	Z
0.593	15.06	10531	1.34	34.1	.469	11.9	19	3.3	.75	19	14	63	.59	15.0	0.062	1.6	9.50	SPR	CG	Z
0.593	15.06	S-237	1.38	34.9	.459	11.7	23	4.0	.74	19	17	76	.64	16.2	0.067	1.7	9.50	SST	CG	N
0.593	15.06	2686	1.41	35.7	.383	9.7	200	35	.30	7.7	61	270	1.00	25.3	0.105	2.7	9.50	HD	CG	Z
0.593	15.06	3228	1.44	36.5	.433	11.0	67	12	.43	11	29	128	.76	19.3	0.080	2.0	8.50	SPR	C	Z
0.593	15.06	10608	1.47	37.3	.463	11.8	25	4.4	.66	17	17	74	.59	14.9	0.065	1.7	9.00	SPR	CG	N
0.593	15.06	I-88	1.50	38.1	.449	11.4	34	6.0	.62	16	21	94	.72	18.3	0.072	1.8	10.0	HD	CG	Z
0.593	15.06	1691	1.50	38.1	.413	10.5	93	16	.42	11	39	173	.90	22.9	0.090	2.3	10.0	SPR	CG	Z
0.593	15.06	S-428	1.56	39.7	.501	12.7	6.1	1.1	.98	25	6.0	27	.35	8.9	0.046	1.2	7.50	SST	CG	N
0.593	15.06	S-412	1.56	39.7	.483	12.3	10	1.8	.91	23	9.5	42	.50	12.6	0.055	1.4	9.00	SST	CG	N
0.593	15.06	Q-58	1.56	39.7	.465	11.8	22	3.8	.73	18	16	70	.67	17.1	0.064	1.6	9.50	SPR	C	N
0.593	15.06	10113	1.56	39.7	.323	8.2	710	124	.16	4.1	116	515	1.22	30.9	0.135	3.4	9.00	SPR	CG	Z
0.593	15.06	3060	1.63	41.3	.513	13.0	2.4	.42	1.2	30	2.9	13	.44	11.2	0.040	1.0	11.0	SPR	CG	Z
0.593	15.06	S-856	1.63	41.3	.485	12.3	6.0	1.1	.90	23	5.4	24	.73	18.5	0.054	1.4	13.5	SST	CG	N
0.593	15.06	3268	1.63	41.3	.459	11.7	23	4.1	.77	20	18	80	.70	17.9	0.067	1.7	10.5	SPR	CG	Z
0.593	15.06	10030	1.63	41.3	.449	11.4	34	6.0	.62	16	21	94	.72	18.3	0.072	1.8	10.0	HD	CG	Z
0.593	15.06	10717	1.63	41.3	.433	11.0	47	8.3	.61	16	29	128	.90	22.9	0.080	2.0	11.3	SPR	CG	GI
0.593	15.06	3057	1.63	41.3	.383	9.7	215	38	.28	7.2	61	270	.95	24.0	0.105	2.7	9.00	SPR	CG	Z
0.593	15.06	A11-49	1.72	43.6	.457	11.6	28	4.9	.68	17	19	84	.66	16.7	0.068	1.7	9.75	SPR	CG	GI
0.593	15.06	JJ-83	1.75	44.5	.501	12.7	2.4	.43	.97	25	2.4	11	.78	19.9	0.046	1.2	16.0	SST	C	N
0.593	15.06	3500	1.75	44.5	.469	11.9	18	3.1	.81	21	14	64	.62	15.7	0.062	1.6	10.0	SPR	CG	Z
0.593	15.06	12186	1.78	45.2	.493	12.5	6.1	1.1	1.2	30	7.1	32	.61	15.6	0.050	1.3	11.3	SPR	C	Z
0.593	15.06	H-81	1.81	46.0	.517	13.1	1.6	.27	1.4	34	2.1	9.4	.46	11.6	0.038	1.0	12.0	SST	CG	N
0.593	15.06	12078	1.84	46.8	.459	11.7	27	4.6	.68	17	18	80	.64	16.2	0.067	1.7	9.50	SPR	CG	Z
0.593	15.06	3539	1.88	47.6	.529	13.4	.85	.15	1.5	37	1.2	5.5	.42	10.6	0.032	0.8	12.0	MW	C	Z
0.593	15.06	LL-68	1.94	49.2	.533	13.5	.96	.17	1.7	42	1.6	7.2	.27	6.9	0.030	0.8	8.00	SST	C	N
0.593	15.06	M-146	1.97	50.0	.489	12.4	5.8	1.0	1.3	32	7.3	33	.70	17.8	0.052	1.3	13.5	SPR	CG	N
0.593	15.06	10506	2.00	50.8	.413	10.5	76	13	.51	13	39	173	1.15	29.2	0.090	2.3	11.8	SPR	C	Z
0.593	15.06	MM-91	2.00	50.8	.413	10.5	55	9.6	.66	17	36	161	1.26	32.0	0.090	2.3	14.0	SST	CG	N
0.593	15.06	NN-87	2.00	50.8	.313	8.0	502	88	.23	5.8	115	512	1.75	44.5	0.140	3.6	12.5	SST	CG	N
0.593	15.06	S-820	2.06	52.4	.465	11.8	11	2.0	1.1	29	13	57	.93	23.6	0.064	1.6	14.5	SST	CG	N
0.593	15.06	12446	2.09	53.2	.511	13.0	3.7	.65	1.2	31	4.5	20	.39	9.9	0.041	1.0	8.50	SPR	C	N
0.593	15.06	12739	2.13	54.0	.547	13.9	.48	.08	2.0	50	.94	4.2	.17	4.4	0.023	0.6	6.50	MW	C	Z
0.593	15.06	S-1488	2.25	57.2	.531	13.5	.93	.16	1.9	49	1.8	8.0	.31	7.9	0.031	0.8	9.00	SST	C	N
0.593	15.06	WW-62	2.25	57.2	.449	11.4	26	4.6	.75	19	20	88	.79	20.1	0.072	1.8	11.0	SST	CG	N
0.593	15.06	12467	2.44	61.9	.453	11.5	24	4.2	.81	21	20	87	.84	21.3	0.070	1.8	12.0	SPR	CG	Z
0.593	15.06	3326	2.50	63.5	.449	11.4	27	4.8	.78	20	21	94	.86	21.9	0.072	1.8	12.0	HD	CG	Z
0.593	15.06	11614	2.53	64.3	.449	11.4	27	4.7	.80	20	21	94	.95	24.2	0.072	1.8	12.3	SPR	CG	GI
0.593	15.06	10783	2.56	65.1	.343	8.7	275	48	.35	8.9	96	428	1.74	44.1	0.125	3.2	14.0	SPR	CG	Z
0.593	15.06	11136	2.75	69.9	.469	11.9	9.2	1.6	1.6	40	14	64	1.15	29.1	0.062	1.6	17.5	SPR	C	Z
0.593	15.06	1695	2.75	69.9	.457	11.6	17	2.9	1.6	40	26	117	1.00	25.5	0.068	1.7	14.8	MW	CG	Z
0.593	15.06	237	2.75	69.9	.449	11.4	25	4.3	.85	22	21	94	.94	23.8	0.072	1.8	13.0	SPR	CG	Z
0.593	15.06	K-38	3.00	76.2	.499	12.7	1.5	.25	1.5	37	2.1	9.5	1.54	39.0	0.047	1.2	31.7	SPR	C	Z
0.593	15.06	S-432	3.00	76.2	.449	11.4	15	2.7	1.3	33	20	88	1.27	32.2	0.072	1.8	17.5	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.593	15.06	11729	3.00	76.2	.433	11.0	27	4.8	1.1	27	29	128	1.44	36.6	0.080	2.0	18.0	SPR	CG	GI
0.593	15.06	3090	3.00	76.2	.383	9.7	90	16	.68	17	61	270	1.97	50.0	0.105	2.7	18.8	SPR	CG	Z
0.593	15.06	11795	3.03	77.0	.451	11.5	15	2.6	1.3	34	20	90	1.35	34.3	0.071	1.8	19.0	SPR	CG	Z
0.593	15.06	2772	3.13	79.4	.499	12.7	2.0	.34	2.0	51	3.9	17	1.13	28.7	0.047	1.2	24.0	HD	CG	Z
0.593	15.06	3950	3.50	88.9	.449	11.4	27	4.8	.78	20	21	94	.86	21.9	0.072	1.8	12.0	SPR	CG	Z
0.593	15.06	11663	3.50	88.9	.445	11.3	21	3.6	1.1	28	23	102	1.26	32.0	0.074	1.9	17.0	SPR	CG	Z
0.593	15.06	10560	3.50	88.9	.393	10.0	58	10	.91	23	53	235	2.28	57.8	0.100	2.5	22.8	SPR	CG	Z
0.593	15.06	10228	4.00	101.6	.527	13.4	.49	.08	3.2	82	1.6	7.0	.76	19.3	0.033	0.8	22.0	SPR	C	Z
0.593	15.06	1611	4.00	101.6	.383	9.7	88	15	.69	17	61	270	2.00	50.7	0.105	2.7	19.0	SPR	CG	Z
0.593	15.06	10636	4.00	101.6	.367	9.3	88	15	.82	21	72	322	2.94	74.6	0.113	2.9	26.0	SPR	CG	Z
0.593	15.06	11769	4.31	109.5	.433	11.0	22	3.8	1.3	34	29	128	1.76	44.7	0.080	2.0	22.0	SPR	CG	Z
0.593	15.06	1815	5.38	136.5	.411	10.4	33	5.8	1.7	43	56	250	2.32	59.0	0.091	2.3	25.5	MW	CG	Z
0.593	15.06	1521	5.50	139.7	.411	10.4	31	5.5	1.3	33	40	179	2.46	62.4	0.091	2.3	27.0	HD	CG	Z
0.593	15.06	12178	5.75	146.1	.413	10.5	24	4.2	1.6	41	39	173	2.97	75.4	0.090	2.3	33.0	SPR	CG	Z
0.593	15.06	10681	6.00	152.4	.411	10.4	19	3.3	2.1	53	40	176	3.91	99.4	0.091	2.3	43.0	SPR	CG	Z
0.593	15.06	2902	6.25	158.8	.423	10.7	19	3.3	1.8	46	34	153	2.72	69.1	0.085	2.2	32.0	SPR	CG	Z
0.600	15.24	71711	.50	12.7	.510	13.0	23	4.1	.34	8.7	7.9	35	.16	4.0	0.045	1.1	3.50	MW	CG	N
0.600	15.24	71711S	.50	12.7	.510	13.0	20	3.5	.28	7.1	5.5	25	.16	4.0	0.045	1.1	3.50	SST	CG	N
0.600	15.24	71712	.63	16.0	.510	13.0	18	3.2	.45	12	8.2	36	.17	4.4	0.045	1.1	3.88	MW	CG	N
0.600	15.24	71712S	.63	16.0	.510	13.0	15	2.7	.36	9.2	5.5	25	.17	4.4	0.045	1.1	3.88	SST	CG	N
0.600	15.24	71729	.63	16.0	.502	12.8	28	4.9	.38	9.6	11	47	.18	4.7	0.049	1.2	3.75	MW	CG	N
0.600	15.24	71729S	.63	16.0	.502	12.8	24	4.2	.30	7.6	7.1	32	.18	4.7	0.049	1.2	3.75	SST	CG	N
0.600	15.24	71741	.63	16.0	.490	12.4	40	7.0	.35	8.8	14	62	.22	5.6	0.055	1.4	4.00	MW	CG	N
0.600	15.24	71741S	.63	16.0	.490	12.4	34	6.0	.28	7.0	9.4	42	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.600	15.24	71753	.63	16.0	.482	12.2	53	9.3	.32	8.1	17	76	.24	6.2	0.059	1.5	4.13	MW	CG	N
0.600	15.24	71753S	.63	16.0	.482	12.2	45	7.9	.26	6.5	12	51	.24	6.2	0.059	1.5	4.13	SST	CG	N
0.600	15.24	71765	.63	16.0	.474	12.0	63	11	.33	8.4	21	92	.28	7.0	0.063	1.6	4.38	MW	CG	N
0.600	15.24	71765S	.63	16.0	.474	12.0	54	9.4	.26	6.7	14	62	.28	7.0	0.063	1.6	4.38	SST	CG	N
0.600	15.24	71779	.63	16.0	.466	11.8	80	14	.31	7.9	25	110	.29	7.4	0.067	1.7	4.38	MW	CG	N
0.600	15.24	71779S	.63	16.0	.466	11.8	68	12	.25	6.3	17	75	.29	7.4	0.067	1.7	4.38	SST	CG	N
0.600	15.24	71791	.63	16.0	.456	11.6	109	19	.27	6.8	29	130	.32	8.0	0.072	1.8	4.38	MW	CG	N
0.600	15.24	71791S	.63	16.0	.456	11.6	92	16	.21	5.4	20	87	.32	8.0	0.072	1.8	4.38	SST	CG	N
0.600	15.24	71803	.63	16.0	.438	11.1	203	36	.20	5.2	41	184	.33	8.5	0.081	2.1	4.13	MW	CG	N
0.600	15.24	71803S	.63	16.0	.438	11.1	173	30	.16	4.1	28	123	.33	8.5	0.081	2.1	4.13	SST	CG	N
0.600	15.24	71819	.63	16.0	.430	10.9	263	46	.18	4.6	48	211	.35	8.9	0.085	2.2	4.13	MW	CG	N
0.600	15.24	71819S	.63	16.0	.430	10.9	223	39	.14	3.6	32	142	.35	8.9	0.085	2.2	4.13	SST	CG	N
0.600	15.24	71713	.75	19.1	.510	13.0	15	2.5	.55	14	8.0	36	.20	5.0	0.045	1.1	4.38	MW	CG	N
0.600	15.24	71713S	.75	19.1	.510	13.0	12	2.2	.45	11	5.5	25	.20	5.0	0.045	1.1	4.38	SST	CG	N
0.600	15.24	71730	.75	19.1	.502	12.8	23	4.0	.46	12	11	47	.20	5.1	0.049	1.2	4.13	MW	CG	N
0.600	15.24	71730S	.75	19.1	.502	12.8	19	3.4	.37	9.4	7.1	32	.20	5.1	0.049	1.2	4.13	SST	CG	N
0.600	15.24	71742	.75	19.1	.490	12.4	33	5.8	.42	11	14	62	.25	6.3	0.055	1.4	4.50	MW	CG	N
0.600	15.24	71742S	.75	19.1	.490	12.4	28	4.9	.34	8.5	9.4	42	.25	6.3	0.055	1.4	4.50	SST	CG	N
0.600	15.24	71754	.75	19.1	.482	12.2	42	7.4	.40	10	17	76	.27	6.9	0.059	1.5	4.63	MW	CG	N
0.600	15.24	71754S	.75	19.1	.482	12.2	36	6.3	.32	8.2	12	51	.27	6.9	0.059	1.5	4.63	SST	CG	N
0.600	15.24	71766	.75	19.1	.474	12.0	52	9.1	.40	10	21	92	.31	7.8	0.063	1.6	4.88	MW	CG	N
0.600	15.24	71766S	.75	19.1	.474	12.0	44	7.7	.32	8.1	14	62	.31	7.8	0.063	1.6	4.88	SST	CG	N
0.600	15.24	71780	.75	19.1	.466	11.8	65	11	.38	9.8	25	110	.34	8.5	0.067	1.7	5.00	MW	CG	N
0.600	15.24	71780S	.75	19.1	.466	11.8	55	9.6	.31	7.8	17	75	.34	8.5	0.067	1.7	5.00	SST	CG	N
0.600	15.24	71792	.75	19.1	.456	11.6	78	14	.36	9.2	28	126	.39	9.8	0.072	1.8	5.38	MW	CG	N
0.600	15.24	71792S	.75	19.1	.456	11.6	66	12	.30	7.5	20	87	.39	9.8	0.072	1.8	5.38	SST	CG	N
0.600	15.24	71804	.75	19.1	.438	11.1	159	28	.26	6.6	41	184	.38	9.8	0.081	2.1	4.75	MW	CG	N
0.600	15.24	71804S	.75	19.1	.438	11.1	135	24	.20	5.2	28	123	.38	9.8	0.081	2.1	4.75	SST	CG	N
0.600	15.24	71820	.75	19.1	.430	10.9	204	36	.23	5.9	48	211	.40	10.3	0.085	2.2	4.75	MW	CG	N
0.600	15.24	71820S	.75	19.1	.430	10.9	173	30	.18	4.7	32	142	.40	10.3	0.085	2.2	4.75	SST	CG	N
0.600	15.24	71835	.75	19.1	.416	10.6	292	51	.20	5.0	57	256	.44	11.1	0.092	2.3	4.75	MW	CG	N
0.600	15.24	71835S	.75	19.1	.416	10.6	248	43	.15	3.9	38	169	.44	11.1	0.092	2.3	4.75	SST	CG	N
0.600	15.24	71850	.75	19.1	.404	10.3	388	68	.18	4.5	69	307	.47	11.8	0.098	2.5	4.75	MW	CG	N
0.600	15.24	71850S	.75	19.1	.404	10.3	330	58	.14	3.5	46	203	.47	11.8	0.098	2.5	4.75	SST	CG	N
0.600	15.24	71714	.88	22.4	.510	13.0	12	2.1	.66	17	7.9	35	.22	5.6	0.045	1.1	4.88	MW	CG	N
0.600	15.24	71714S	.88	22.4	.510	13.0	10	1.8	.54	14	5.5	25	.22	5.6	0.045	1.1	4.88	SST	CG	N
0.600	15.24	71731	.88	22.4	.502	12.8	19	3.3	.55	14	11	47	.23	5.8	0.049	1.2	4.63	MW	CG	N
0.600	15.24	71731S	.88	22.4	.502	12.8	16	2.8	.44	11	7.1	32	.23	5.8	0.049	1.2	4.63	SST	CG	N
0.600	15.24	71743	.88	22.4	.490	12.4	28	4.8	.50	13	14	62	.28	7.0	0.055	1.4	5.00	MW	CG	N
0.600	15.24	71743S	.88	22.4	.490	12.4	23	4.1	.40	10	9.4	42	.28	7.0	0.055	1.4	5.00	SST	CG	N
0.600	15.24	71755	.88	22.4	.482	12.2	35	6.2	.49	12	17	76	.30	7.7	0.059	1.5	5.13	MW	CG	N
0.600	15.24	71755S	.88	22.4	.482	12.2	30	5.2	.39	9.8	12	51	.30	7.7	0.059	1.5	5.13	SST	CG	N
0.600	15.24	71767	.88	22.4	.474	12.0	45	7.8	.47	12	21	92	.33	8.4	0.063	1.6	5.25	MW	CG	N
0.600	15.24	71767S	.88	22.4	.474	12.0	38	6.6	.37	9.4	14	62	.33	8.4	0.063	1.6	5.25	SST	CG	N
0.600	15.24	71781	.88	22.4	.466	11.8	50	8.8	.49	12	24	108	.39	10.0	0.067	1.7	5.88	MW	CG	N
0.600	15.24	71781S	.88	22.4	.466	11.8	43	7.4	.40	10	17	75	.39	10.0	0.067	1.7	5.88	SST	CG	N
0.600	15.24	71793	.88	22.4	.456	11.6	68	12	.43	11	29	130	.42	10.7	0.072	1.8	5.88	MW	CG	N
0.600	15.24	71793S	.88	22.4	.456	11.6	58	10	.34	8.6	20	87	.42	10.7	0.072	1.8	5.88	SST	CG	N
0.600	15.24	71805	.88	22.4	.438	11.1	131	23	.32	8.0	41	184	.44	11.1	0.081	2.1	5.38	MW	CG	N
0.600	15.24	71805S	.88	22.4	.438	11.1	111	19	.25	6.3	28	123	.44	11.1	0.081	2.1	5.38	SST	CG	N
0.600	15.24	71821	.88	22.4	.430	10.9	166	29	.29	7.3	48	211	.45	11.3	0.085	2.2	5.25	MW	CG	N
0.600	15.24	71821S	.88	22.4	.430	10.9	141	25	.23	5.7	32	142	.45	11.3	0.085	2.2	5.25	SST	CG	N
0.600	15.24	71836	.88	22.4	.416	10.6	237	42	.24	6.2	57	256	.49	12.6	0.092	2.3	5.38	MW	CG	N
0.600	15.24	71836S	.88	22.4	.416	10.6	201	35	.19	4.8	38	169	.49	12.6	0.092	2.3	5.38	SST	CG	N
0.600	15.24	71851	.88	22.4	.404	10.3	314	55	.22	5.6	69	307	.53	13.4	0.098	2.5	5.38	MW	CG	N
0.600	15.24	71851S	.88	22.4	.404	10.3	267	47	.17	4.3	46	203	.53	13.4	0.098	2.5	5.38	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.600	15.24	71715	1.00	25.4	.510	13.0	9.9	1.7	.75	19	7.4	33	.25	6.3	0.045	1.1	5.50	MW	CG	Z
0.600	15.24	71715S	1.00	25.4	.510	13.0	8.7	1.5	.64	16	5.5	25	.24	6.1	0.045	1.1	5.38	SST	CG	N
0.600	15.24	71732	1.00	25.4	.502	12.8	16	2.8	.65	17	11	47	.25	6.4	0.049	1.2	5.13	MW	CG	N
0.600	15.24	71732S	1.00	25.4	.502	12.8	14	2.4	.52	13	7.1	32	.25	6.4	0.049	1.2	5.13	SST	CG	N
0.600	15.24	71744	1.00	25.4	.490	12.4	24	4.2	.58	15	14	62	.30	7.5	0.055	1.4	5.38	MW	CG	N
0.600	15.24	71744S	1.00	25.4	.490	12.4	20	3.6	.46	12	9.4	42	.30	7.5	0.055	1.4	5.38	SST	CG	N
0.600	15.24	71756	1.00	25.4	.482	12.2	30	5.3	.56	14	17	76	.33	8.4	0.059	1.5	5.63	MW	CG	N
0.600	15.24	71756S	1.00	25.4	.482	12.2	26	4.5	.45	11	12	51	.33	8.4	0.059	1.5	5.63	SST	CG	N
0.600	15.24	71768	1.00	25.4	.474	12.0	38	6.7	.55	14	21	92	.37	9.4	0.063	1.6	5.88	MW	CG	N
0.600	15.24	71768S	1.00	25.4	.474	12.0	32	5.7	.43	11	14	62	.37	9.4	0.063	1.6	5.88	SST	CG	N
0.600	15.24	71782	1.00	25.4	.466	11.8	45	7.9	.55	14	25	110	.42	10.6	0.067	1.7	6.25	MW	CG	N
0.600	15.24	71782S	1.00	25.4	.466	11.8	38	6.7	.44	11	17	75	.42	10.6	0.067	1.7	6.25	SST	CG	N
0.600	15.24	71794	1.00	25.4	.456	11.6	55	9.6	.51	13	28	126	.49	12.3	0.072	1.8	6.75	MW	CG	N
0.600	15.24	71794S	1.00	25.4	.456	11.6	47	8.2	.42	11	20	87	.49	12.3	0.072	1.8	6.75	SST	CG	N
0.600	15.24	71806	1.00	25.4	.438	11.1	112	20	.37	9.4	41	184	.49	12.3	0.081	2.1	6.00	MW	CG	N
0.600	15.24	71806S	1.00	25.4	.438	11.1	95	17	.29	7.4	28	123	.49	12.3	0.081	2.1	6.00	SST	CG	N
0.600	15.24	71822	1.00	25.4	.430	10.9	142	25	.33	8.5	48	211	.50	12.7	0.085	2.2	5.88	MW	CG	N
0.600	15.24	71822S	1.00	25.4	.430	10.9	121	21	.26	6.7	32	142	.50	12.7	0.085	2.2	5.88	SST	CG	N
0.600	15.24	71837	1.00	25.4	.416	10.6	202	35	.28	7.2	57	256	.54	13.7	0.092	2.3	5.88	MW	CG	N
0.600	15.24	71837S	1.00	25.4	.416	10.6	172	30	.22	5.6	38	169	.54	13.7	0.092	2.3	5.88	SST	CG	N
0.600	15.24	71852	1.00	25.4	.404	10.3	267	47	.26	6.6	69	307	.58	14.6	0.098	2.5	5.88	MW	CG	N
0.600	15.24	71852S	1.00	25.4	.404	10.3	227	40	.20	5.1	46	203	.58	14.6	0.098	2.5	5.88	SST	CG	N
0.600	15.24	71716	1.25	31.8	.510	13.0	8.0	1.4	.97	25	7.8	34	.28	7.1	0.045	1.1	6.25	MW	CG	N
0.600	15.24	71716S	1.25	31.8	.510	13.0	6.8	1.2	.81	21	5.5	25	.28	7.1	0.045	1.1	6.25	SST	CG	N
0.600	15.24	71733	1.25	31.8	.502	12.8	13	2.3	.82	21	11	47	.29	7.3	0.049	1.2	5.88	MW	CG	N
0.600	15.24	71733S	1.25	31.8	.502	12.8	11	1.9	.65	17	7.1	32	.29	7.3	0.049	1.2	5.88	SST	CG	N
0.600	15.24	71745	1.25	31.8	.490	12.4	19	3.2	.75	19	14	62	.35	8.9	0.055	1.4	6.38	MW	CG	N
0.600	15.24	71745S	1.25	31.8	.490	12.4	16	2.8	.60	15	9.4	42	.35	8.9	0.055	1.4	6.38	SST	CG	N
0.600	15.24	71757	1.25	31.8	.482	12.2	24	4.2	.71	18	17	76	.39	9.9	0.059	1.5	6.63	MW	CG	N
0.600	15.24	71757S	1.25	31.8	.482	12.2	20	3.6	.57	14	12	51	.39	9.9	0.059	1.5	6.63	SST	CG	N
0.600	15.24	71769	1.25	31.8	.474	12.0	31	5.3	.68	17	21	92	.43	10.8	0.063	1.6	6.75	MW	CG	N
0.600	15.24	71769S	1.25	31.8	.474	12.0	26	4.5	.54	14	14	62	.43	10.8	0.063	1.6	6.75	SST	CG	N
0.600	15.24	71783	1.25	31.8	.466	11.8	35	6.1	.71	18	25	110	.50	12.8	0.067	1.7	7.50	MW	CG	N
0.600	15.24	71783S	1.25	31.8	.466	11.8	30	5.2	.57	14	17	75	.50	12.8	0.067	1.7	7.50	SST	CG	N
0.600	15.24	71795	1.25	31.8	.456	11.6	45	7.9	.65	17	29	130	.57	14.4	0.072	1.8	7.88	MW	CG	N
0.600	15.24	71795S	1.25	31.8	.456	11.6	38	6.7	.51	13	20	87	.57	14.4	0.072	1.8	7.88	SST	CG	N
0.600	15.24	71807	1.25	31.8	.438	11.1	86	15	.48	12	41	184	.58	14.7	0.081	2.1	7.13	MW	CG	N
0.600	15.24	71807S	1.25	31.8	.438	11.1	73	13	.38	9.6	28	123	.58	14.7	0.081	2.1	7.13	SST	CG	N
0.600	15.24	71823	1.25	31.8	.430	10.9	109	19	.43	11	48	211	.60	15.1	0.085	2.2	7.00	MW	CG	N
0.600	15.24	71823S	1.25	31.8	.430	10.9	93	16	.34	8.7	32	142	.60	15.1	0.085	2.2	7.00	SST	CG	N
0.600	15.24	71838	1.25	31.8	.416	10.6	155	27	.37	9.4	57	256	.66	16.6	0.092	2.3	7.13	MW	CG	N
0.600	15.24	71838S	1.25	31.8	.416	10.6	131	23	.29	7.4	38	169	.66	16.6	0.092	2.3	7.13	SST	CG	N
0.600	15.24	71853	1.25	31.8	.404	10.3	204	36	.34	8.6	69	307	.70	17.7	0.098	2.5	7.13	MW	CG	N
0.600	15.24	71853S	1.25	31.8	.404	10.3	173	30	.26	6.7	46	203	.70	17.7	0.098	2.5	7.13	SST	CG	N
0.600	15.24	71717	1.38	35.1	.510	13.0	7.1	1.2	1.1	27	7.6	34	.31	7.9	0.045	1.1	6.88	MW	CG	N
0.600	15.24	71717S	1.38	35.1	.510	13.0	6.0	1.1	.92	23	5.5	25	.31	7.9	0.045	1.1	6.88	SST	CG	N
0.600	15.24	71718	1.50	38.1	.510	13.0	6.5	1.1	1.2	30	7.6	34	.33	8.3	0.045	1.1	7.25	MW	CG	N
0.600	15.24	71718S	1.50	38.1	.510	13.0	5.5	.97	1.0	25	5.5	25	.33	8.3	0.045	1.1	7.25	SST	CG	N
0.600	15.24	71719	1.50	38.1	.510	13.0	7.5	1.3	1.1	28	8.2	36	.30	7.6	0.045	1.1	6.63	MW	CG	N
0.600	15.24	71719S	1.50	38.1	.510	13.0	6.4	1.1	.87	22	5.5	25	.30	7.6	0.045	1.1	6.63	SST	CG	N
0.600	15.24	71734	1.50	38.1	.502	12.8	10	1.8	1.0	26	11	47	.34	8.6	0.049	1.2	6.88	MW	CG	N
0.600	15.24	71734S	1.50	38.1	.502	12.8	8.7	1.5	.82	21	7.1	32	.34	8.6	0.049	1.2	6.88	SST	CG	N
0.600	15.24	71746	1.50	38.1	.490	12.4	15	2.6	.93	24	14	62	.41	10.3	0.055	1.4	7.38	MW	CG	N
0.600	15.24	71746S	1.50	38.1	.490	12.4	13	2.2	.74	19	9.4	42	.41	10.3	0.055	1.4	7.38	SST	CG	N
0.600	15.24	71758	1.50	38.1	.482	12.2	19	3.4	.89	23	17	76	.46	11.6	0.059	1.5	7.75	MW	CG	N
0.600	15.24	71758S	1.50	38.1	.482	12.2	16	2.9	.71	18	12	51	.46	11.6	0.059	1.5	7.75	SST	CG	N
0.600	15.24	71770	1.50	38.1	.474	12.0	24	4.2	.86	22	21	92	.51	13.0	0.063	1.6	8.13	MW	CG	N
0.600	15.24	71770S	1.50	38.1	.474	12.0	20	3.6	.69	17	14	62	.51	13.0	0.063	1.6	8.13	SST	CG	N
0.600	15.24	71784	1.50	38.1	.466	11.8	29	5.1	.86	22	25	110	.58	14.7	0.067	1.7	8.63	MW	CG	N
0.600	15.24	71784S	1.50	38.1	.466	11.8	25	4.3	.68	17	17	75	.58	14.7	0.067	1.7	8.63	SST	CG	N
0.600	15.24	71796	1.50	38.1	.456	11.6	36	6.3	.81	21	29	130	.67	16.9	0.072	1.8	9.25	MW	CG	N
0.600	15.24	71796S	1.50	38.1	.456	11.6	31	5.4	.64	16	20	87	.67	16.9	0.072	1.8	9.25	SST	CG	N
0.600	15.24	71808	1.50	38.1	.438	11.1	70	12	.59	15	41	184	.68	17.2	0.081	2.1	8.38	MW	CG	N
0.600	15.24	71808S	1.50	38.1	.438	11.1	59	10	.47	12	28	123	.68	17.2	0.081	2.1	8.38	SST	CG	N
0.600	15.24	71824	1.50	38.1	.430	10.9	89	16	.54	14	48	211	.70	17.8	0.085	2.2	8.25	MW	CG	N
0.600	15.24	71824S	1.50	38.1	.430	10.9	75	13	.42	11	32	142	.70	17.8	0.085	2.2	8.25	SST	CG	N
0.600	15.24	71839	1.50	38.1	.416	10.6	125	22	.46	12	57	256	.76	19.3	0.092	2.3	8.25	MW	CG	N
0.600	15.24	71839S	1.50	38.1	.416	10.6	107	19	.36	9.1	38	169	.76	19.3	0.092	2.3	8.25	SST	CG	N
0.600	15.24	71854	1.50	38.1	.404	10.3	165	29	.42	11	69	307	.82	20.8	0.098	2.5	8.38	MW	CG	N
0.600	15.24	71854S	1.50	38.1	.404	10.3	140	25	.33	8.3	46	203	.82	20.8	0.098	2.5	8.38	SST	CG	N
0.600	15.24	71720	1.75	44.5	.510	13.0	5.5	.96	1.4	35	7.6	34	.37	9.4	0.045	1.1	8.25	MW	CG	N
0.600	15.24	71720S	1.75	44.5	.510	13.0	4.7	.82	1.2	30	5.5	25	.37	9.4	0.045	1.1	8.25	SST	CG	N
0.600	15.24	71735	1.75	44.5	.502	12.8	8.7	1.5	1.2	31	11	47	.38	9.6	0.049	1.2	7.75	MW	CG	N
0.600	15.24	71735S	1.75	44.5	.502	12.8	7.4	1.3	.97	25	7.1	32	.38	9.6	0.049	1.2	7.75	SST	CG	N
0.600	15.24	71747	1.75	44.5	.490	12.4	13	2.3	1.1	27	14	62	.45	11.5	0.055	1.4	8.25	MW	CG	N
0.600	15.24	71747S	1.75	44.5	.490	12.4	11	1.9	.86	22	9.4	42	.45	11.5	0.055	1.4	8.25	SST	CG	N
0.600	15.24	71759	1.75	44.5	.482	12.2	16	2.8	1.1	27	17	76	.52	13.1	0.059	1.5	8.75	MW	CG	N
0.600	15.24	71759S	1.75	44.5	.482	12.2	14	2.4	.84	21	12	51	.52	13.1	0.059	1.5	8.75	SST	CG	N
0.600	15.24	71771	1.75	44.5	.474	12.0	20	3.6	1.0	26	21	92	.57	14.6	0.063	1.6	9.13	MW	CG	N
0.600	15.24	71771S	1.75	44.5	.474	12.0	17	3.0	.81	21	14	62	.57	14.6	0.063	1.6	9.13	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.600	15.24	71785	1.75	44.5	.466	11.8	24	4.1	1.1	27	25	110	.68	17.2	0.067	1.7	10.1	MW	CG	N
0.600	15.24	71785S	1.75	44.5	.466	11.8	20	3.5	.84	21	17	75	.68	17.2	0.067	1.7	10.1	SST	CG	N
0.600	15.24	71797	1.75	44.5	.456	11.6	30	5.3	.98	25	29	130	.77	19.7	0.072	1.8	10.8	MW	CG	N
0.600	15.24	71797S	1.75	44.5	.456	11.6	26	4.5	.77	20	20	87	.77	19.7	0.072	1.8	10.8	SST	CG	N
0.600	15.24	71809	1.75	44.5	.438	11.1	59	10	.70	18	41	184	.77	19.5	0.081	2.1	9.50	MW	CG	N
0.600	15.24	71809S	1.75	44.5	.438	11.1	50	8.8	.55	14	28	123	.77	19.5	0.081	2.1	9.50	SST	CG	N
0.600	15.24	71825	1.75	44.5	.430	10.9	75	13	.64	16	48	211	.80	20.2	0.085	2.2	9.38	MW	CG	N
0.600	15.24	71825S	1.75	44.5	.430	10.9	64	11	.50	13	32	142	.80	20.2	0.085	2.2	9.38	SST	CG	N
0.600	15.24	71840	1.75	44.5	.416	10.6	105	18	.55	14	57	256	.87	22.2	0.092	2.3	9.50	MW	CG	N
0.600	15.24	71840S	1.75	44.5	.416	10.6	90	16	.43	11	38	169	.87	22.2	0.092	2.3	9.50	SST	CG	N
0.600	15.24	71855	1.75	44.5	.404	10.3	138	24	.50	13	69	307	.94	24.0	0.098	2.5	9.63	MW	CG	N
0.600	15.24	71855S	1.75	44.5	.404	10.3	118	21	.39	9.9	46	203	.94	24.0	0.098	2.5	9.63	SST	CG	N
0.600	15.24	71721	2.00	50.8	.510	13.0	5.3	.92	1.6	39	8.2	36	.38	9.7	0.045	1.1	8.50	MW	CG	N
0.600	15.24	71721S	2.00	50.8	.510	13.0	4.5	.79	1.2	31	5.5	25	.38	9.7	0.045	1.1	8.50	SST	CG	N
0.600	15.24	71736	2.00	50.8	.502	12.8	7.6	1.3	1.4	35	11	47	.42	10.6	0.049	1.2	8.50	MW	CG	N
0.600	15.24	71736S	2.00	50.8	.502	12.8	6.5	1.1	1.1	28	7.1	32	.42	10.6	0.049	1.2	8.50	SST	CG	N
0.600	15.24	71748	2.00	50.8	.490	12.4	11	2.0	1.2	32	14	62	.51	12.9	0.055	1.4	9.25	MW	CG	N
0.600	15.24	71748S	2.00	50.8	.490	12.4	9.5	1.7	.99	25	9.4	42	.51	12.9	0.055	1.4	9.25	SST	CG	N
0.600	15.24	71760	2.00	50.8	.482	12.2	14	2.5	1.2	31	17	76	.58	14.6	0.059	1.5	9.75	MW	CG	N
0.600	15.24	71760S	2.00	50.8	.482	12.2	12	2.1	.96	24	12	51	.58	14.6	0.059	1.5	9.75	SST	CG	N
0.600	15.24	71772	2.00	50.8	.474	12.0	18	3.1	1.2	30	21	92	.65	16.4	0.063	1.6	10.3	MW	CG	N
0.600	15.24	71772S	2.00	50.8	.474	12.0	15	2.6	.93	24	14	62	.65	16.4	0.063	1.6	10.3	SST	CG	N
0.600	15.24	71786	2.00	50.8	.466	11.8	21	3.7	1.2	30	25	110	.75	18.9	0.067	1.7	11.1	MW	CG	N
0.600	15.24	71786S	2.00	50.8	.466	11.8	18	3.1	.94	24	17	75	.75	18.9	0.067	1.7	11.1	SST	CG	N
0.600	15.24	71798	2.00	50.8	.456	11.6	27	4.7	1.1	28	29	130	.85	21.5	0.072	1.8	11.8	MW	CG	N
0.600	15.24	71798S	2.00	50.8	.456	11.6	23	4.0	.86	22	20	87	.85	21.5	0.072	1.8	11.8	SST	CG	N
0.600	15.24	71810	2.00	50.8	.438	11.1	51	8.9	.81	21	41	184	.87	22.1	0.081	2.1	10.8	MW	CG	N
0.600	15.24	71810S	2.00	50.8	.438	11.1	43	7.6	.64	16	28	123	.87	22.1	0.081	2.1	10.8	SST	CG	N
0.600	15.24	71826	2.00	50.8	.430	10.9	65	11	.74	19	48	211	.89	22.7	0.085	2.2	10.5	MW	CG	N
0.600	15.24	71826S	2.00	50.8	.430	10.9	55	9.6	.58	15	32	142	.89	22.7	0.085	2.2	10.5	SST	CG	N
0.600	15.24	71841	2.00	50.8	.416	10.6	91	16	.63	16	57	256	.98	24.8	0.092	2.3	10.6	MW	CG	N
0.600	15.24	71841S	2.00	50.8	.416	10.6	77	14	.49	13	38	169	.98	24.8	0.092	2.3	10.6	SST	CG	N
0.600	15.24	71856	2.00	50.8	.404	10.3	119	21	.58	15	69	307	1.05	26.8	0.098	2.5	10.8	MW	CG	N
0.600	15.24	71856S	2.00	50.8	.404	10.3	101	18	.45	11	46	203	1.05	26.8	0.098	2.5	10.8	SST	CG	N
0.600	15.24	71722	2.25	57.2	.510	13.0	4.7	.82	1.7	44	8.2	36	.42	10.7	0.045	1.1	9.38	MW	CG	N
0.600	15.24	71722S	2.25	57.2	.510	13.0	4.0	.70	1.4	35	5.5	25	.42	10.7	0.045	1.1	9.38	SST	CG	N
0.600	15.24	71737	2.25	57.2	.502	12.8	6.7	1.2	1.6	40	11	47	.47	11.8	0.049	1.2	9.50	MW	CG	N
0.600	15.24	71737S	2.25	57.2	.502	12.8	5.7	.99	1.3	32	7.1	32	.47	11.8	0.049	1.2	9.50	SST	CG	N
0.600	15.24	71749	2.25	57.2	.490	12.4	9.9	1.7	1.4	36	14	62	.56	14.3	0.055	1.4	10.3	MW	CG	N
0.600	15.24	71749S	2.25	57.2	.490	12.4	8.4	1.5	1.1	28	9.4	42	.56	14.3	0.055	1.4	10.3	SST	CG	N
0.600	15.24	71761	2.25	57.2	.482	12.2	13	2.2	1.4	35	17	76	.63	16.1	0.059	1.5	10.8	MW	CG	N
0.600	15.24	71761S	2.25	57.2	.482	12.2	11	1.9	1.1	28	12	51	.63	16.1	0.059	1.5	10.8	SST	CG	N
0.600	15.24	71773	2.25	57.2	.474	12.0	16	2.7	1.3	34	21	92	.72	18.2	0.063	1.6	11.4	MW	CG	N
0.600	15.24	71773S	2.25	57.2	.474	12.0	13	2.3	1.1	27	14	62	.72	18.2	0.063	1.6	11.4	SST	CG	N
0.600	15.24	71787	2.25	57.2	.466	11.8	18	3.2	1.3	34	25	110	.83	21.1	0.067	1.7	12.4	MW	CG	N
0.600	15.24	71787S	2.25	57.2	.466	11.8	16	2.7	1.1	27	17	75	.83	21.1	0.067	1.7	12.4	SST	CG	N
0.600	15.24	71799	2.25	57.2	.456	11.6	25	4.3	1.2	30	29	130	.91	23.1	0.072	1.8	12.6	MW	CG	N
0.600	15.24	71799S	2.25	57.2	.456	11.6	21	3.7	.94	24	20	87	.91	23.1	0.072	1.8	12.6	SST	CG	N
0.600	15.24	71811	2.25	57.2	.438	11.1	45	7.8	.92	23	41	184	.96	24.4	0.081	2.1	11.9	MW	CG	N
0.600	15.24	71811S	2.25	57.2	.438	11.1	38	6.7	.73	18	28	123	.96	24.4	0.081	2.1	11.9	SST	CG	N
0.600	15.24	71827	2.25	57.2	.430	10.9	57	9.9	.84	21	48	211	.99	25.1	0.085	2.2	11.6	MW	CG	N
0.600	15.24	71827S	2.25	57.2	.430	10.9	48	8.5	.66	17	32	142	.99	25.1	0.085	2.2	11.6	SST	CG	N
0.600	15.24	71842	2.25	57.2	.416	10.6	80	14	.72	18	57	256	1.09	27.7	0.092	2.3	11.9	MW	CG	N
0.600	15.24	71842S	2.25	57.2	.416	10.6	68	12	.56	14	38	169	1.09	27.7	0.092	2.3	11.9	SST	CG	N
0.600	15.24	71857	2.25	57.2	.404	10.3	105	18	.66	17	69	307	1.18	29.9	0.098	2.5	12.0	MW	CG	N
0.600	15.24	71857S	2.25	57.2	.404	10.3	89	16	.51	13	46	203	1.18	29.9	0.098	2.5	12.0	SST	CG	N
0.600	15.24	71723	2.50	63.5	.510	13.0	4.2	.73	2.0	50	8.2	36	.46	11.7	0.045	1.1	10.3	MW	CG	N
0.600	15.24	71723S	2.50	63.5	.510	13.0	3.5	.62	1.6	40	5.5	25	.46	11.7	0.045	1.1	10.3	SST	CG	N
0.600	15.24	71738	2.50	63.5	.502	12.8	5.9	1.0	1.8	45	11	47	.51	12.9	0.049	1.2	10.4	MW	CG	N
0.600	15.24	71738S	2.50	63.5	.502	12.8	5.0	.88	1.4	36	7.1	32	.51	12.9	0.049	1.2	10.4	SST	CG	N
0.600	15.24	71750	2.50	63.5	.490	12.4	8.9	1.6	1.6	40	14	62	.61	15.5	0.055	1.4	11.1	MW	CG	N
0.600	15.24	71750S	2.50	63.5	.490	12.4	7.6	1.3	1.2	32	9.4	42	.61	15.5	0.055	1.4	11.1	SST	CG	N
0.600	15.24	71762	2.50	63.5	.482	12.2	11	2.0	1.5	38	17	76	.69	17.6	0.059	1.5	11.8	MW	CG	N
0.600	15.24	71762S	2.50	63.5	.482	12.2	9.6	1.7	1.2	31	12	51	.69	17.6	0.059	1.5	11.8	SST	CG	N
0.600	15.24	71774	2.50	63.5	.474	12.0	14	2.5	1.5	37	21	92	.78	19.8	0.063	1.6	12.4	MW	CG	N
0.600	15.24	71774S	2.50	63.5	.474	12.0	12	2.1	1.2	30	14	62	.78	19.8	0.063	1.6	12.4	SST	CG	N
0.600	15.24	71788	2.50	63.5	.466	11.8	16	2.9	1.5	39	25	110	.92	23.4	0.067	1.7	13.8	MW	CG	N
0.600	15.24	71788S	2.50	63.5	.466	11.8	14	2.4	1.2	31	17	75	.92	23.4	0.067	1.7	13.8	SST	CG	N
0.600	15.24	71800	2.50	63.5	.456	11.6	22	3.9	1.3	34	29	130	1.00	25.4	0.072	1.8	13.9	MW	CG	N
0.600	15.24	71800S	2.50	63.5	.456	11.6	19	3.3	1.0	27	20	87	1.00	25.4	0.072	1.8	13.9	SST	CG	N
0.600	15.24	71812	2.50	63.5	.438	11.1	40	7.0	1.0	26	41	184	1.05	26.7	0.081	2.1	13.0	MW	CG	N
0.600	15.24	71812S	2.50	63.5	.438	11.1	34	6.0	.81	21	28	123	1.05	26.7	0.081	2.1	13.0	SST	CG	N
0.600	15.24	71828	2.50	63.5	.430	10.9	51	8.9	.94	24	48	211	1.09	27.8	0.085	2.2	12.9	MW	CG	N
0.600	15.24	71828S	2.50	63.5	.430	10.9	43	7.5	.74	19	32	142	1.09	27.8	0.085	2.2	12.9	SST	CG	N
0.600	15.24	71843	2.50	63.5	.416	10.6	71	12	.81	21	57	256	1.20	30.4	0.092	2.3	13.0	MW	CG	N
0.600	15.24	71843S	2.50	63.5	.416	10.6	61	11	.63	16	38	169	1.20	30.4	0.092	2.3	13.0	SST	CG	N
0.600	15.24	71858	2.50	63.5	.404	10.3	93	16	.74	19	69	307	1.30	33.0	0.098	2.5	13.3	MW	CG	N
0.600	15.24	71858S	2.50	63.5	.404	10.3	79	14	.58	15	46	203	1.30	33.0	0.098	2.5	13.3	SST	CG	N
0.600	15.24	71724	2.75	69.9	.510	13.0	3.6	.63	2.2	57	8.0	36	.52	13.3	0.045	1.1	11.6	MW	CG	N
0.600	15.24	71724S	2.75	69.9	.510	13.0	3.1	.54	1.8	46	5.5	25	.52	13.3	0.045	1.1	11.6	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.600	15.24	71739	2.75	69.9	.502	12.8	5.3	.93	2.0	51	11	47	.56	14.2	0.049	1.2	11.4	MW	CG	N
0.600	15.24	71739S	2.75	69.9	.502	12.8	4.5	.79	1.6	40	7.1	32	.56	14.2	0.049	1.2	11.4	SST	CG	N
0.600	15.24	71751	2.75	69.9	.490	12.4	8.0	1.4	1.7	44	14	62	.67	16.9	0.055	1.4	12.1	MW	CG	N
0.600	15.24	71751S	2.75	69.9	.490	12.4	6.8	1.2	1.4	35	9.4	42	.67	16.9	0.055	1.4	12.1	SST	CG	N
0.600	15.24	71763	2.75	69.9	.482	12.2	9.8	1.7	1.8	44	17	76	.78	19.9	0.059	1.5	13.3	MW	CG	N
0.600	15.24	71763S	2.75	69.9	.482	12.2	8.3	1.5	1.4	35	12	51	.78	19.9	0.059	1.5	13.3	SST	CG	N
0.600	15.24	71775	2.75	69.9	.474	12.0	13	2.3	1.6	41	21	92	.83	21.2	0.063	1.6	13.3	MW	CG	N
0.600	15.24	71775S	2.75	69.9	.474	12.0	11	1.9	1.3	32	14	62	.83	21.2	0.063	1.6	13.3	SST	CG	N
0.600	15.24	71789	2.75	69.9	.466	11.8	15	2.6	1.6	42	25	110	.99	25.1	0.067	1.7	14.8	MW	CG	N
0.600	15.24	71789S	2.75	69.9	.466	11.8	13	2.2	1.3	33	17	75	.99	25.1	0.067	1.7	14.8	SST	CG	N
0.600	15.24	71801	2.75	69.9	.456	11.6	20	3.5	1.5	37	29	130	1.09	27.7	0.072	1.8	15.1	MW	CG	N
0.600	15.24	71801S	2.75	69.9	.456	11.6	17	3.0	1.2	29	20	87	1.09	27.7	0.072	1.8	15.1	SST	CG	N
0.600	15.24	71813	2.75	69.9	.438	11.1	36	6.3	1.1	29	41	184	1.15	29.3	0.081	2.1	14.3	MW	CG	N
0.600	15.24	71813S	2.75	69.9	.438	11.1	31	5.4	.90	23	28	123	1.15	29.3	0.081	2.1	14.3	SST	CG	N
0.600	15.24	71829	2.75	69.9	.430	10.9	46	8.0	1.0	26	48	211	1.19	30.2	0.085	2.2	14.0	MW	CG	N
0.600	15.24	71829S	2.75	69.9	.430	10.9	39	6.8	.82	21	32	142	1.19	30.2	0.085	2.2	14.0	SST	CG	N
0.600	15.24	71844	2.75	69.9	.416	10.6	64	11	.89	23	57	256	1.31	33.3	0.092	2.3	14.3	MW	CG	N
0.600	15.24	71844S	2.75	69.9	.416	10.6	55	9.6	.70	18	38	169	1.31	33.3	0.092	2.3	14.3	SST	CG	N
0.600	15.24	71859	2.75	69.9	.404	10.3	84	15	.82	21	69	307	1.42	36.1	0.098	2.5	14.5	MW	CG	N
0.600	15.24	71859S	2.75	69.9	.404	10.3	71	13	.64	16	46	203	1.42	36.1	0.098	2.5	14.5	SST	CG	N
0.600	15.24	71725	3.00	76.2	.510	13.0	3.3	.58	2.4	62	8.0	36	.56	14.3	0.045	1.1	12.5	MW	CG	N
0.600	15.24	71725S	3.00	76.2	.510	13.0	2.8	.49	2.0	50	5.5	25	.56	14.3	0.045	1.1	12.5	SST	CG	N
0.600	15.24	71740	3.00	76.2	.502	12.8	4.8	.84	2.2	56	11	47	.60	15.2	0.049	1.2	12.3	MW	CG	N
0.600	15.24	71740S	3.00	76.2	.502	12.8	4.1	.72	1.7	44	7.1	32	.60	15.2	0.049	1.2	12.3	SST	CG	N
0.600	15.24	71752	3.00	76.2	.490	12.4	7.3	1.3	1.9	48	14	62	.72	18.3	0.055	1.4	13.1	MW	CG	N
0.600	15.24	71752S	3.00	76.2	.490	12.4	6.2	1.1	1.5	38	9.4	42	.72	18.3	0.055	1.4	13.1	SST	CG	N
0.600	15.24	71764	3.00	76.2	.482	12.2	9.0	1.6	1.9	48	17	76	.84	21.4	0.059	1.5	14.3	MW	CG	N
0.600	15.24	71764S	3.00	76.2	.482	12.2	7.6	1.3	1.5	39	12	51	.84	21.4	0.059	1.5	14.3	SST	CG	N
0.600	15.24	71776	3.00	76.2	.474	12.0	12	2.1	1.8	45	21	92	.91	23.0	0.063	1.6	14.4	MW	CG	N
0.600	15.24	71776S	3.00	76.2	.474	12.0	10	1.8	1.4	36	14	62	.91	23.0	0.063	1.6	14.4	SST	CG	N
0.600	15.24	71790	3.00	76.2	.466	11.8	14	2.4	1.8	46	25	110	1.06	27.0	0.067	1.7	15.9	MW	CG	N
0.600	15.24	71790S	3.00	76.2	.466	11.8	12	2.0	1.4	37	17	75	1.06	27.0	0.067	1.7	15.9	SST	CG	N
0.600	15.24	71802	3.00	76.2	.456	11.6	18	3.2	1.6	41	29	130	1.19	30.2	0.072	1.8	16.5	MW	CG	N
0.600	15.24	71802S	3.00	76.2	.456	11.6	15	2.7	1.3	33	20	87	1.19	30.2	0.072	1.8	16.5	SST	CG	N
0.600	15.24	71814	3.00	76.2	.438	11.1	33	5.8	1.3	32	41	184	1.25	31.6	0.081	2.1	15.4	MW	CG	N
0.600	15.24	71814S	3.00	76.2	.438	11.1	28	4.9	.99	25	28	123	1.25	31.6	0.081	2.1	15.4	SST	CG	N
0.600	15.24	71830	3.00	76.2	.430	10.9	42	7.3	1.1	29	48	211	1.29	32.7	0.085	2.2	15.1	MW	CG	N
0.600	15.24	71830S	3.00	76.2	.430	10.9	35	6.2	.90	23	32	142	1.29	32.7	0.085	2.2	15.1	SST	CG	N
0.600	15.24	71845	3.00	76.2	.416	10.6	59	10	.98	25	57	256	1.41	35.9	0.092	2.3	15.4	MW	CG	N
0.600	15.24	71845S	3.00	76.2	.416	10.6	50	8.7	.76	19	38	169	1.41	35.9	0.092	2.3	15.4	SST	CG	N
0.600	15.24	71860	3.00	76.2	.404	10.3	77	13	.90	23	69	307	1.53	38.9	0.098	2.5	15.6	MW	CG	N
0.600	15.24	71860S	3.00	76.2	.404	10.3	65	11	.70	18	46	203	1.53	38.9	0.098	2.5	15.6	SST	CG	N
0.600	15.24	71726	3.25	82.6	.510	13.0	2.9	.50	2.6	67	7.5	33	.63	16.0	0.045	1.1	14.0	MW	CG	N
0.600	15.24	71726S	3.25	82.6	.510	13.0	2.4	.43	2.3	58	5.5	25	.63	16.0	0.045	1.1	14.0	SST	CG	N
0.600	15.24	71727	3.25	82.6	.510	13.0	3.3	.58	2.5	63	8.2	36	.56	14.3	0.045	1.1	12.5	MW	CG	N
0.600	15.24	71727S	3.25	82.6	.510	13.0	2.8	.49	2.0	50	5.5	25	.56	14.3	0.045	1.1	12.5	SST	CG	N
0.600	15.24	71777	3.25	82.6	.474	12.0	10	1.8	2.0	52	21	92	1.03	26.2	0.063	1.6	16.4	MW	CG	N
0.600	15.24	71777S	3.25	82.6	.474	12.0	8.7	1.5	1.6	41	14	62	1.03	26.2	0.063	1.6	16.4	SST	CG	N
0.600	15.24	71815	3.25	82.6	.438	11.1	32	5.5	1.3	33	41	184	1.30	32.9	0.081	2.1	16.0	MW	CG	N
0.600	15.24	71815S	3.25	82.6	.438	11.1	27	4.7	1.0	26	28	123	1.30	32.9	0.081	2.1	16.0	SST	CG	N
0.600	15.24	71831	3.25	82.6	.430	10.9	38	6.7	1.2	32	48	211	1.39	35.4	0.085	2.2	16.4	MW	CG	N
0.600	15.24	71831S	3.25	82.6	.430	10.9	33	5.7	.98	25	32	142	1.39	35.4	0.085	2.2	16.4	SST	CG	N
0.600	15.24	71846	3.25	82.6	.416	10.6	54	9.4	1.1	27	57	256	1.53	38.8	0.092	2.3	16.6	MW	CG	N
0.600	15.24	71846S	3.25	82.6	.416	10.6	46	8.0	.83	21	38	169	1.53	38.8	0.092	2.3	16.6	SST	CG	N
0.600	15.24	71861	3.25	82.6	.404	10.3	70	12	.98	25	69	307	1.65	42.0	0.098	2.5	16.9	MW	CG	N
0.600	15.24	71861S	3.25	82.6	.404	10.3	60	10	.76	19	46	203	1.65	42.0	0.098	2.5	16.9	SST	CG	N
0.600	15.24	12675	3.50	88.9	.510	13.0	2.2	.39	2.5	63	5.5	25	.69	17.6	0.045	1.1	15.4	SST	CG	N
0.600	15.24	71728	3.50	88.9	.510	13.0	2.8	.49	2.9	73	8.1	36	.64	16.3	0.045	1.1	14.3	MW	CG	N
0.600	15.24	71728S	3.50	88.9	.510	13.0	2.4	.42	2.3	59	5.5	25	.64	16.3	0.045	1.1	14.3	SST	CG	N
0.600	15.24	71778	3.50	88.9	.474	12.0	10	1.8	2.1	52	21	92	1.04	26.4	0.063	1.6	16.5	MW	CG	N
0.600	15.24	71778S	3.50	88.9	.474	12.0	8.5	1.5	1.6	42	14	62	1.04	26.4	0.063	1.6	16.5	SST	CG	N
0.600	15.24	71816	3.50	88.9	.438	11.1	29	5.1	1.4	36	41	184	1.39	35.2	0.081	2.1	17.1	MW	CG	N
0.600	15.24	71816S	3.50	88.9	.438	11.1	25	4.3	1.1	28	28	123	1.39	35.2	0.081	2.1	17.1	SST	CG	N
0.600	15.24	71832	3.50	88.9	.430	10.9	36	6.2	1.3	34	48	211	1.49	37.8	0.085	2.2	17.5	MW	CG	N
0.600	15.24	71832S	3.50	88.9	.430	10.9	30	5.3	1.1	27	32	142	1.49	37.8	0.085	2.2	17.5	SST	CG	N
0.600	15.24	71847	3.50	88.9	.416	10.6	50	8.7	1.2	29	57	256	1.63	41.5	0.092	2.3	17.8	MW	CG	N
0.600	15.24	71847S	3.50	88.9	.416	10.6	42	7.4	.90	23	38	169	1.63	41.5	0.092	2.3	17.8	SST	CG	N
0.600	15.24	71862	3.50	88.9	.404	10.3	65	11	1.1	27	69	307	1.78	45.1	0.098	2.5	18.1	MW	CG	N
0.600	15.24	71862S	3.50	88.9	.404	10.3	55	9.7	.83	21	46	203	1.78	45.1	0.098	2.5	18.1	SST	CG	N
0.600	15.24	71817	3.75	95.3	.438	11.1	27	4.7	1.5	39	41	184	1.49	37.8	0.081	2.1	18.4	MW	CG	N
0.600	15.24	71817S	3.75	95.3	.438	11.1	23	4.0	1.2	31	28	123	1.49	37.8	0.081	2.1	18.4	SST	CG	N
0.600	15.24	71833	3.75	95.3	.430	10.9	33	5.8	1.4	37	48	211	1.58	40.2	0.085	2.2	18.6	MW	CG	N
0.600	15.24	71833S	3.75	95.3	.430	10.9	28	4.9	1.1	29	32	142	1.58	40.2	0.085	2.2	18.6	SST	CG	N
0.600	15.24	71848	3.75	95.3	.416	10.6	46	8.1	1.2	32	57	256	1.75	44.4	0.092	2.3	19.0	MW	CG	N
0.600	15.24	71848S	3.75	95.3	.416	10.6	39	6.9	.97	25	38	169	1.75	44.4	0.092	2.3	19.0	SST	CG	N
0.600	15.24	71863	3.75	95.3	.404	10.3	61	11	1.1	29	69	307	1.90	48.2	0.098	2.5	19.4	MW	CG	N
0.600	15.24	71863S	3.75	95.3	.404	10.3	51	9.0	.89	23	46	203	1.90	48.2	0.098	2.5	19.4	SST	CG	N
0.600	15.24	71818	4.00	101.6	.438	11.1	25	4.4	1.6	41	41	184	1.57	39.9	0.081	2.1	19.4	MW	CG	N
0.600	15.24	71818S	4.00	101.6	.438	11.1	22	3.8	1.3	33	28	123	1.57	39.9	0.081	2.1	19.4	SST	CG	N
0.600	15.24	71834	4.00	101.6	.430	10.9	31	5.4	1.5	39	48	211	1.69	42.9	0.085	2.2	19.9	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.600	15.24	71834S	4.00	101.6	.430	10.9	26	4.6	1.2	31	32	142	1.69	42.9	0.085	2.2	19.9	SST	CG	N
0.600	15.24	71849	4.00	101.6	.416	10.6	43	7.6	1.3	34	57	256	1.85	47.0	0.092	2.3	20.1	MW	CG	N
0.600	15.24	71849S	4.00	101.6	.416	10.6	37	6.4	1.0	26	38	169	1.85	47.0	0.092	2.3	20.1	SST	CG	N
0.600	15.24	71864	4.00	101.6	.404	10.3	57	9.9	1.2	31	69	307	2.01	51.0	0.098	2.5	20.5	MW	CG	N
0.600	15.24	71864S	4.00	101.6	.404	10.3	48	8.4	.95	24	46	203	2.01	51.0	0.098	2.5	20.5	SST	CG	N
0.609	15.47	2574	.31	7.9	.569	14.5	.56	.10	.21	5.4	.12	.53	.10	2.5	0.020	0.5	4.00	MW	C	Z
0.609	15.47	EE-76	.38	9.5	.485	12.3	130	23	.11	2.7	14	62	.25	6.3	0.062	1.6	3.00	SPR	C	Z
0.609	15.47	AA-52	.41	10.3	.549	13.9	2.4	.42	.24	6.1	.58	2.6	.17	4.2	0.030	0.8	4.50	MW	C	N
0.609	15.47	J-53	.41	10.3	.465	11.8	221	39	.09	2.2	19	86	.22	5.5	0.072	1.8	3.00	SST	CG	N
0.609	15.47	NN-100	.44	11.1	.521	13.2	18	3.1	.24	6.1	4.2	19	.20	5.0	0.044	1.1	3.50	SST	C	N
0.609	15.47	O-73	.44	11.1	.501	12.7	31	5.4	.22	5.6	6.9	31	.22	5.5	0.054	1.4	4.00	SST	CG	N
0.609	15.47	Q-37	.44	11.1	.459	11.7	130	23	.14	3.5	18	80	.30	7.6	0.075	1.9	4.00	SST	CG	N
0.609	15.47	I-100	.44	11.1	.409	10.4	1090	191	.05	1.2	52	229	.30	7.6	0.100	2.5	3.00	SPR	CG	Z
0.609	15.47	J-32	.47	11.9	.569	14.5	1.1	.20	.39	9.9	.44	1.9	.08	2.0	0.020	0.5	3.00	MW	C	N
0.609	15.47	K-41	.50	12.7	.539	13.7	5.7	1.0	.36	9.1	2.1	9.1	.14	3.6	0.035	0.9	4.00	SPR	CG	GI
0.609	15.47	WW-36	.50	12.7	.501	12.7	31	5.4	.23	5.8	7.1	32	.27	6.9	0.054	1.4	4.00	SST	C	N
0.609	15.47	UU-65	.50	12.7	.489	12.4	113	20	.11	2.9	13	57	.18	4.6	0.060	1.5	3.00	SPR	CG	Z
0.609	15.47	B15-26	.56	14.3	.509	12.9	26	4.5	.29	7.3	7.4	33	.20	5.1	0.050	1.3	4.00	SPR	CG	Z
0.609	15.47	10758	.56	14.3	.507	12.9	28	4.9	.28	7.2	7.9	35	.26	6.5	0.051	1.3	4.00	SPR	C	BO
0.609	15.47	B10-58	.63	15.9	.521	13.2	15	2.7	.34	8.6	5.1	23	.17	4.2	0.044	1.1	3.75	SST	CG	N
0.609	15.47	QQ-60	.63	15.9	.475	12.1	73	13	.24	6.2	18	78	.30	7.7	0.067	1.7	4.50	SPR	CG	Z
0.609	15.47	B17-120	.63	15.9	.385	9.8	801	140	.08	2.0	63	280	.45	11.4	0.112	2.8	4.00	SST	CG	N
0.609	15.47	Q-56	.66	16.7	.503	12.8	12	2.0	.29	7.2	3.3	15	.37	9.4	0.053	1.3	7.00	SST	CG	N
0.609	15.47	BB-98	.69	17.4	.545	13.8	1.6	.27	.46	12	.73	3.2	.22	5.7	0.032	0.8	7.00	SPR	CG	N
0.609	15.47	10618	.69	17.4	.537	13.6	6.4	1.1	.47	12	3.0	13	.18	4.6	0.036	0.9	4.00	SPR	C	Z
0.609	15.47	S-1108	.69	17.4	.489	12.4	24	4.3	.33	8.3	8.0	36	.36	9.1	0.060	1.5	6.00	SST	CG	N
0.609	15.47	10009	.69	17.5	.469	11.9	73	13	.26	6.6	19	85	.35	8.9	0.070	1.8	5.00	SPR	CG	Z
0.609	15.47	10953	.72	18.2	.523	13.3	6.8	1.2	.42	11	2.8	13	.30	7.6	0.043	1.1	6.00	SPR	C	N
0.609	15.47	2780	.75	19.1	.539	13.7	3.3	.57	.52	13	1.7	7.6	.23	5.8	0.035	0.9	5.50	HD	C	Z
0.609	15.47	N-30	.75	19.1	.525	13.3	6.2	1.1	.52	13	3.2	14	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.609	15.47	PP-43	.75	19.1	.449	11.4	133	23	.21	5.4	28	125	.40	10.2	0.080	2.0	5.00	SPR	CG	Z
0.609	15.47	12258	.75	19.1	.445	11.3	127	22	.24	6.1	30	134	.45	11.5	0.082	2.1	5.50	SPR	CG	Z
0.609	15.47	2682	.75	19.1	.427	10.8	236	41	.23	5.9	55	244	.46	11.6	0.091	2.3	5.00	MW	CG	Z
0.609	15.47	S-1690	.80	20.3	.469	11.9	64	11	.28	7.1	18	79	.35	8.9	0.070	1.8	5.00	SST	CG	N
0.609	15.47	1769	.81	20.6	.549	13.9	2.4	.42	.65	16	1.6	6.9	.17	4.2	0.030	0.8	4.50	HD	C	Z
0.609	15.47	4146	.81	20.6	.439	11.2	130	23	.26	6.5	34	149	.51	13.0	0.085	2.2	6.00	SPR	CG	Z
0.609	15.47	S-1700	.82	20.9	.465	11.8	72	13	.27	6.8	19	86	.43	11.0	0.072	1.8	5.00	SST	C	N
0.609	15.47	12778	.88	22.2	.509	12.9	18	3.1	.39	9.9	7.0	31	.28	7.0	0.050	1.3	4.50	SST	C	N
0.609	15.47	J-63	.88	22.2	.499	12.7	26	4.5	.38	9.7	9.9	44	.28	7.0	0.055	1.4	5.00	SPR	C	Z
0.609	15.47	11032	.88	22.2	.463	11.8	64	11	.31	8.0	20	90	.41	10.5	0.073	1.9	5.67	SST	CG	N
0.609	15.47	S-266	.91	23.0	.499	12.7	23	4.0	.41	10	9.3	41	.33	8.4	0.055	1.4	5.00	SST	C	N
0.609	15.47	2785	.91	23.0	.497	12.6	28	4.9	.37	9.5	10	46	.34	8.5	0.056	1.4	5.00	SPR	C	Z
0.609	15.47	N-67	.94	23.8	.469	11.9	55	9.6	.35	8.8	19	85	.49	12.4	0.070	1.8	6.00	SPR	C	Z
0.609	15.47	2779	.94	23.8	.427	10.8	164	29	.34	8.5	55	244	.58	14.6	0.091	2.3	6.33	MW	CG	Z
0.609	15.47	11449	1.00	25.4	.563	14.3	.24	.04	.74	19	.17	.77	.26	6.7	0.023	0.6	10.5	MW	C	N
0.609	15.47	L-37	1.00	25.4	.539	13.7	3.8	.67	.73	18	2.8	12	.21	5.3	0.035	0.9	5.00	SPR	C	Z
0.609	15.47	3889	1.00	25.4	.519	13.2	6.6	1.2	.64	16	4.2	19	.36	9.1	0.045	1.1	7.00	SPR	C	Z
0.609	15.47	S-926	1.00	25.4	.519	13.2	7.1	1.3	.73	19	5.2	23	.27	6.9	0.045	1.1	6.00	SST	CG	N
0.609	15.47	Q-33	1.00	25.4	.475	12.1	29	5.0	.50	13	14	64	.50	12.8	0.067	1.7	7.50	SST	CG	N
0.609	15.47	B15-64	1.00	25.4	.467	11.9	59	10	.31	7.9	19	83	.39	9.9	0.071	1.8	5.50	SST	CG	N
0.609	15.47	G-48	1.00	25.4	.465	11.8	55	9.7	.37	9.5	21	92	.47	11.9	0.072	1.8	6.50	HD	CG	N
0.609	15.47	11245	1.03	26.2	.485	12.3	37	6.5	.53	13	19	87	.34	8.7	0.062	1.6	5.50	MW	CG	N
0.609	15.47	S-3209	1.06	27.0	.531	13.5	5.3	.93	.67	17	3.6	16	.23	5.9	0.039	1.0	5.00	SST	C	N
0.609	15.47	12594	1.08	27.4	.301	7.6	2020	354	.08	2.0	158	705	.96	24.5	0.154	3.9	6.25	SPR	CG	GI
0.609	15.47	10611	1.09	27.8	.535	13.6	4.1	.72	.79	20	3.3	15	.24	6.1	0.037	0.9	5.50	SPR	C	Z
0.609	15.47	S-1564	1.11	28.2	.449	11.4	53	9.3	.43	11	23	102	.68	17.3	0.080	2.0	8.50	SST	CG	N
0.609	15.47	S-259	1.13	28.6	.545	13.8	1.4	.24	.87	22	1.2	5.3	.26	6.5	0.032	0.8	7.00	SST	C	N
0.609	15.47	3107	1.13	28.6	.527	13.4	5.9	1.0	.75	19	4.4	20	.28	7.0	0.041	1.0	5.75	SPR	C	Z
0.609	15.47	B-63	1.13	28.6	.513	13.0	6.2	1.1	.69	18	4.3	19	.43	11.0	0.048	1.2	9.00	SPR	CG	Z
0.609	15.47	A12-21	1.13	28.6	.507	12.9	16	2.8	.68	17	11	49	.28	7.1	0.051	1.3	5.50	MW	CG	N
0.609	15.47	S-1332	1.13	28.6	.389	9.9	421	74	.14	3.6	60	266	.61	15.4	0.110	2.8	5.50	SST	CG	N
0.609	15.47	2803	1.16	29.4	.533	13.5	1.8	.32	.70	18	1.3	5.7	.45	11.5	0.038	1.0	11.0	HD	C	Z
0.609	15.47	NN-95	1.16	29.4	.449	11.4	88	15	.32	8.1	28	125	.52	13.2	0.080	2.0	6.50	SPR	CG	GI
0.609	15.47	XX-57	1.19	30.2	.549	13.9	1.5	.26	.99	25	1.5	6.6	.20	5.0	0.030	0.8	5.50	SST	C	N
0.609	15.47	A10-64	1.19	30.2	.509	12.9	7.3	1.3	.74	19	5.4	24	.45	11.4	0.050	1.3	9.00	SPR	CG	Z
0.609	15.47	YY-39	1.19	30.2	.465	11.8	42	7.3	.50	13	21	92	.58	14.6	0.072	1.8	8.00	SPR	CG	Z
0.609	15.47	N-77	1.22	31.0	.485	12.3	28	4.9	.47	12	13	59	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.609	15.47	12508	1.25	31.8	.513	13.0	8.6	1.5	.82	21	7.1	31	.38	9.8	0.048	1.2	7.00	SPR	C	Z
0.609	15.47	11230	1.25	31.8	.513	13.0	9.1	1.61	.68	17.3	6.19	27.5	.37	9.5	0.048	1.2	6.75	SPR	C	Z
0.609	15.47	11583	1.25	31.8	.511	13.0	12	2.1	.64	16	7.5	33	.34	8.7	0.049	1.2	6.00	SPR	CG	N
0.609	15.47	3833	1.25	31.8	.475	12.1	24	4.2	.55	14	13	59	.70	17.9	0.067	1.7	9.50	SPR	C	Z
0.609	15.47	3003	1.25	31.8	.429	10.9	123	21	.31	7.9	38	169	.68	17.1	0.090	2.3	7.50	SPR	CG	Z
0.609	15.47	12134	1.25	31.8	.339	8.6	815	143	.14	3.5	113	504	1.01	25.7	0.135	3.4	7.50	SPR	CG	Z
0.609	15.47	B8-49	1.28	32.5	.553	14.0	.80	.14	1.1	28	.87	3.9	.20	5.0	0.028	0.7	7.00	SST	CG	N
0.609	15.47	3537	1.28	32.5	.399	10.1	271	47	.22	5.6	59	264	.80	20.4	0.105	2.7	7.50	SPR	CG	Z
0.609	15.47	B10-19	1.31	33.3	.501	12.7	15	2.6	.62	16	9.3	42	.42	10.6	0.054	1.4	6.75	SPR	C	N
0.609	15.47	3322	1.31	33.3	.459	11.7	37	6.5	.56	14	21	93	.75	19.1	0.075	1.9	10.0	SPR	CG	Z
0.609	15.47	B8-44	1.38	34.9	.469	11.9	44	7.7	.43	11	19	85	.49	12.4	0.070	1.8	7.00	SPR	CG	N
0.609	15.47	RR-48	1.38	34.9	.465	11.8	39	6.9	.49	12	19	86	.54	13.7	0.072	1.8	7.50	SST	CG	N
0.609	15.47	B14-64	1.44	36.5	.501	12.7	14	2.5	.65	17	9.3	42	.38	9.6	0.054	1.4	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.609	15.47	S-1192	1.44	36.5	.425	10.8	118	21	.32	8.1	38	167	.69	17.5	0.092	2.3	7.50	SST	CG	N
0.609	15.47	LL-92	1.50	38.1	.527	13.4	3.9	.68	1.1	29	4.4	20	.36	9.1	0.041	1.0	7.75	SPR	C	GI
0.609	15.47	S-1406	1.50	38.1	.521	13.2	3.2	.57	1.1	27	3.4	15	.44	11.2	0.044	1.1	10.0	SST	CG	N
0.609	15.47	S-1311	1.50	38.1	.501	12.7	11	2.0	.78	20	8.8	39	.41	10.3	0.054	1.4	7.50	SST	CG	N
0.609	15.47	S-938	1.50	38.1	.501	12.7	9.6	1.7	.92	23	8.8	39	.46	11.7	0.054	1.4	8.50	SST	CG	N
0.609	15.47	11310	1.50	38.1	.489	12.4	13	2.3	.87	22	12	51	.63	16.0	0.060	1.5	10.5	SPR	CG	Z
0.609	15.47	Q-60	1.50	38.1	.451	11.5	32	5.6	.51	13	16	72	.99	25.1	0.079	2.0	12.5	SST	CG	N
0.609	15.47	S-485	1.53	38.9	.519	13.2	5.2	.91	1.1	27	5.5	24	.34	8.6	0.045	1.1	7.50	SST	CG	N
0.609	15.47	11653	1.53	38.9	.449	11.4	33	5.8	.41	10	14	61	1.12	28.4	0.080	2.0	14.0	SPR	CG	Z
0.609	15.47	YY-30	1.56	39.7	.503	12.8	11	1.9	.80	20	8.8	39	.48	12.1	0.053	1.3	8.00	SPR	C	Z
0.609	15.47	A15-67	1.56	39.7	.403	10.2	147	26	.38	9.7	56	250	1.08	27.5	0.103	2.6	10.5	SPR	CG	Z
0.609	15.47	S-1143	1.63	41.3	.501	12.7	8.3	1.5	1.1	27	8.8	39	.51	13.0	0.054	1.4	9.50	SST	CG	N
0.609	15.47	11511	1.63	41.3	.467	11.9	29	5.1	.68	17	20	88	.78	19.8	0.071	1.8	10.0	SPR	CG	Z
0.609	15.47	10189	1.63	41.3	.427	10.8	71	12	.53	14	38	168	1.09	27.7	0.091	2.3	12.0	SPR	CG	GI
0.609	15.47	10846	1.63	41.3	.369	9.4	323	57	.24	6.0	77	341	1.08	27.4	0.120	3.0	9.00	SST	CG	N
0.609	15.47	S-1213	1.63	41.3	.297	7.6	1293	226	.12	3.1	156	693	1.41	35.7	0.156	3.9	9.00	SST	CG	N
0.609	15.47	B10-15	1.66	42.1	.499	12.7	9.7	1.7	1.0	26	9.9	44	.61	15.4	0.055	1.4	10.0	SPR	C	Z
0.609	15.47	2537	1.69	42.8	.513	13.0	3.9	.69	1.1	27	4.2	19	.62	15.8	0.048	1.2	13.0	SPR	CG	GI
0.609	15.47	S-885	1.69	42.8	.365	9.3	355	62	.23	5.7	80	357	1.07	27.1	0.122	3.1	8.75	SST	CG	N
0.609	15.47	11581	1.75	44.5	.489	12.4	14	2.5	.91	23	13	57	.66	16.8	0.060	1.5	10.0	SPR	CG	N
0.609	15.47	S-494	1.75	44.5	.465	11.8	24	4.2	.80	20	19	86	.79	20.1	0.072	1.8	11.0	SST	CG	N
0.609	15.47	1517	1.75	44.5	.413	10.5	114	20	.43	11	49	216	1.05	26.8	0.098	2.5	10.8	SPR	CG	Z
0.609	15.47	JJ-78	1.81	46.0	.545	13.8	.98	.17	1.5	37	1.4	6.4	.35	8.9	0.032	0.8	10.0	SPR	C	Z
0.609	15.47	11886	1.84	46.8	.445	11.3	49	8.6	.61	16	30	134	.90	22.9	0.082	2.1	11.0	SPR	CG	N
0.609	15.47	11939	1.84	46.8	.409	10.4	91	16	.44	11	40	179	1.40	35.6	0.100	2.5	14.0	SPR	CG	Z
0.609	15.47	12510	1.84	46.8	.483	12.3	16	2.8	1.1	28	18	78	.74	18.8	0.063	1.6	10.8	MW	C	N
0.609	15.47	12256	1.88	47.6	.419	10.6	108	19	.41	10	44	198	.95	24.1	0.095	2.4	10.0	SPR	CG	Z
0.609	15.47	S-24	2.00	50.8	.519	13.2	3.6	.63	1.5	38	5.4	24	.50	12.6	0.045	1.1	10.0	SST	C	N
0.609	15.47	S-277	2.00	50.8	.439	11.2	57	9.9	.55	14	31	140	.85	21.6	0.085	2.2	10.0	SST	CG	N
0.609	15.47	11792	2.00	50.8	.421	10.7	82	14	.53	13	43	192	1.13	28.7	0.094	2.4	12.0	SPR	CG	Z
0.609	15.47	10564	2.03	51.6	.505	12.8	6.2	1.1	1.3	34	8.4	37	.61	15.5	0.052	1.3	11.8	SPR	CG	Z
0.609	15.47	10961	2.13	54.0	.561	14.2	.50	.09	1.9	49	.97	4.3	.19	4.7	0.024	0.6	6.75	MW	C	Z
0.609	15.47	11689	2.25	57.2	.501	12.7	7.9	1.4	1.2	30	9.3	42	.59	15.1	0.054	1.4	11.0	SPR	CG	Z
0.609	15.47	11487	2.25	57.2	.399	10.1	105	18	.57	14	59	264	1.68	42.7	0.105	2.7	15.0	SPR	CG	Z
0.609	15.47	10501	2.28	57.9	.463	11.8	27	4.6	.81	21	22	96	.88	22.3	0.073	1.9	12.0	SPR	CG	Z
0.609	15.47	B14-45	2.34	59.5	.409	10.4	91	16	.57	14	52	229	1.40	35.6	0.100	2.5	14.0	SPR	CG	Z
0.609	15.47	S-74	2.38	60.3	.339	8.6	487	85	.21	5.3	102	454	1.35	34.3	0.135	3.4	10.0	SST	CG	N
0.609	15.47	S-3255	2.41	61.1	.519	13.2	3.9	.68	1.4	36	5.5	24	.43	10.9	0.045	1.1	9.50	SST	CG	N
0.609	15.47	10711	2.41	61.1	.373	9.5	235	41	.34	8.6	80	356	1.42	36.0	0.118	3.0	12.0	SPR	CG	Z
0.609	15.47	VV-56	2.50	63.5	.525	13.3	1.9	.34	1.9	49	3.7	16	.59	14.9	0.042	1.1	13.0	SST	C	N
0.609	15.47	11622	2.50	63.5	.519	13.2	3.3	.58	1.8	45	5.8	26	.54	13.7	0.045	1.1	12.0	SPR	CG	GI
0.609	15.47	B2-63	2.50	63.5	.485	12.3	12	2.1	1.6	41	19	86	.87	22.0	0.062	1.6	13.0	MW	C	Z
0.609	15.47	11249	2.50	63.5	.413	10.5	71	12	.69	17	49	216	1.57	39.8	0.098	2.5	16.0	SPR	CG	Z
0.609	15.47	11657	2.53	64.3	.399	10.1	171	30	.35	8.8	59	264	1.05	26.7	0.105	2.7	10.0	SPR	CG	Z
0.609	15.47	11958	2.59	65.9	.531	13.5	1.0	.17	1.8	45	1.8	7.9	.82	20.8	0.039	1.0	20.0	SPR	C	Z
0.609	15.47	11790	2.59	65.9	.461	11.7	28	4.9	.80	20	22	100	.89	22.6	0.074	1.9	12.0	SPR	CG	Z
0.609	15.47	WW-50	2.75	69.9	.529	13.4	2.2	.38	1.8	45	3.9	17	.44	11.2	0.040	1.0	10.0	SST	C	N
0.609	15.47	4105	2.75	69.9	.527	13.4	1.8	.32	2.1	54	3.9	18	.62	15.6	0.041	1.0	14.0	SPR	C	Z
0.609	15.47	2867	2.75	69.9	.471	12.0	16	2.8	1.7	42	27	119	1.03	26.1	0.069	1.8	15.0	MW	CG	Z
0.609	15.47	11840	2.78	70.6	.467	11.9	21	3.7	.93	24	20	88	.92	23.4	0.071	1.8	13.0	SPR	CG	Z
0.609	15.47	12142	2.88	73.0	.525	13.3	1.1	.19	1.8	45	1.9	8.5	1.09	27.7	0.042	1.1	25.0	SPR	C	Z
0.609	15.47	3660	3.25	82.6	.525	13.3	2.5	.44	1.9	48	4.8	21	.49	12.5	0.042	1.1	11.8	SPR	CG	Z
0.609	15.47	10769	3.25	82.6	.485	12.3	11	1.9	1.3	32	14	62	.85	21.7	0.062	1.6	13.8	SPR	CG	GI
0.609	15.47	11556	3.38	85.7	.559	14.2	.28	.05	3.1	77	.86	3.8	.33	8.3	0.025	0.6	12.0	MW	C	Z
0.609	15.47	2710	3.50	88.9	.513	13.0	2.7	.47	2.6	66	7.0	31	.91	23.2	0.048	1.2	18.0	HD	C	Z
0.609	15.47	S-215	3.50	88.9	.485	12.3	7.1	1.2	1.9	48	13	59	1.12	28.3	0.062	1.6	18.0	SST	CG	N
0.609	15.47	10863	3.50	88.9	.427	10.8	43	7.5	.91	23	39	175	1.68	42.8	0.091	2.3	18.5	SPR	CG	N
0.609	15.47	3199	3.53	89.7	.513	13.0	2.5	.45	2.6	65	6.5	29	.96	24.4	0.048	1.2	19.0	SPR	C	Z
0.609	15.47	3280	3.75	95.3	.465	11.8	11	1.9	1.9	49	20	90	1.84	46.6	0.072	1.8	25.5	HD	CG	GI
0.609	15.47	TT-65	3.75	95.3	.427	10.8	28	4.9	1.3	33	36	162	2.18	55.5	0.091	2.3	24.0	SST	CG	N
0.609	15.47	3311	4.13	104.8	.399	10.1	80	14	.74	19	59	264	2.10	53.3	0.105	2.7	19.0	SPR	CG	Z
0.609	15.47	S-61	4.38	111.1	.439	11.2	15	2.6	1.6	41	24	107	2.76	70.2	0.085	2.2	32.5	SST	CG	N
0.609	15.47	2796	4.50	114.3	.415	10.5	36	6.4	1.8	45	65	289	2.72	69.0	0.097	2.5	28.0	MW	CG	Z
0.609	15.47	3162	4.50	114.3	.415	10.5	40	6.9	1.2	30	47	210	2.52	64.1	0.097	2.5	26.0	SPR	CG	Z
0.609	15.47	11585	4.53	115.1	.421	10.7	34	6.0	1.3	32	43	192	2.54	64.5	0.094	2.4	26.0	SPR	CG	N
0.609	15.47	1811	4.88	123.8	.427	10.8	28	4.8	2.0	51	55	244	2.62	66.4	0.091	2.3	27.8	MW	C	Z
0.609	15.47	3805	5.00	127.0	.485	12.3	4.3	.76	3.0	75	13	57	2.05	52.0	0.062	1.6	32.0	HD	C	Z
0.609	15.47	12323	7.34	186.5	.467	11.9	4.6	.81	3.6	91	16	73	3.76	95.6	0.071	1.8	53.0	SPR	CG	Z
0.609	15.47	S-228	8.50	215.9	.497	12.6	1.7	.30	5.8	147	9.8	44	2.58	65.4	0.056	1.4	45.0	SST	C	N
0.625	15.88	S-175	.28	7.1	.501	12.7	106	18	.10	2.4	10	45	.19	4.7	0.062	1.6	3.00	SST	CG	N
0.625	15.88	S-391	.38	9.5	.567	14.4	3.3	.59	.25	6.4	.84	3.7	.12	3.1	0.029	0.7	3.25	SST	C	N
0.625	15.88	H-24	.41	10.3	.515	13.1	62	11	.15	3.7	9.0	40	.17	4.2	0.055	1.4	3.00	SST	CG	N
0.625	15.88	K-31	.44	11.1	.529	13.4	12	2.0	.20	5.0	2.3	10	.24	6.1	0.048	1.2	5.00	SST	CG	N
0.625	15.88	PP-47	.44	11.1	.465	11.8	364	64	.08	1.9	27	122	.24	6.1	0.080	2.0	3.00	SPR	CG	Z
0.625	15.88	3506	.53	13.5	.569	14.5	4.2	.73	.42	11	1.7	7.7	.11	2.8	0.028	0.7	3.00	MW	C	Z
0.625	15.88	2511	.53	13.5	.517	13.1	33	5.7	.26	6.6	8.6	38	.27	6.9	0.054	1.4	4.00	HD	C	GI
0.625	15.88	B-97	.53	13.5	.481	12.2	131	23	.15	3.9	20	90	.27	6.9	0.072	1.8	3.75	HD	CG	N
0.625	15.88	11369	.59	15.1	.571	14.5	.67	.12	.38	9.7	.26	1.1	.21	5.3	0.027	0.7	6.75	SST	C	N
0.625	15.88	4320	.63	15.9	.563	14.3	4.2	.74	.49	12	2.1	9.1	.14	3.5	0.031	0.8	3.50	MW	C	Z
0.625	15.88	10123	.63	15.9	.497	12.6	39	6.8	.27	6.9	11	47	.35	8.9	0.064	1.6	5.50	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.625	15.88	B9-39	.66	16.7	.521	13.2	19	3.3	.40	10	7.4	33	.26	6.6	0.052	1.3	5.00	SPR	CG	N
0.625	15.88	XX-56	.69	17.4	.545	13.8	8.0	1.4	.47	12	3.8	17	.20	5.1	0.040	1.0	4.00	SST	C	N
0.625	15.88	A9-66	.72	18.2	.561	14.2	2.3	.41	.57	14	1.3	5.9	.15	3.8	0.032	0.8	4.75	SST	CG	N
0.625	15.88	522	.75	19.1	.543	13.8	10	1.8	.42	11	4.3	19	.21	5.2	0.041	1.0	4.00	HD	C	Z
0.625	15.88	918	.75	19.1	.543	13.8	6.8	1.2	.50	13	3.4	15	.25	6.2	0.041	1.0	5.00	HD	C	Z
0.625	15.88	CC-24	.75	19.1	.525	13.3	16	2.8	.46	12	7.3	32	.25	6.4	0.050	1.3	5.00	SPR	CG	Z
0.625	15.88	S-766	.75	19.1	.515	13.1	27	4.8	.33	8.4	9.0	40	.29	7.3	0.055	1.4	4.25	SST	C	N
0.625	15.88	S-286	.75	19.1	.481	12.2	50	8.7	.32	8.1	16	70	.43	11.0	0.072	1.8	6.00	SST	CG	N
0.625	15.88	10279	.75	19.1	.465	11.8	182	32	.15	3.8	27	122	.32	8.1	0.080	2.0	4.00	SPR	CG	Z
0.625	15.88	4205	.75	19.1	.415	10.5	414	73	.14	3.6	58	258	.53	13.3	0.105	2.7	5.00	SPR	CG	Z
0.625	15.88	S-58	.78	19.8	.501	12.7	69	12	.19	4.7	13	57	.22	5.5	0.062	1.6	3.50	SST	CG	N
0.625	15.88	K-59	.78	19.8	.445	11.3	154	27	.24	6.1	37	165	.54	13.7	0.090	2.3	6.00	SPR	CG	N
0.625	15.88	A11-43	.81	20.6	.519	13.2	23	4.0	.35	8.9	8.1	36	.23	5.8	0.053	1.3	4.33	SST	CG	N
0.625	15.88	S-826	.81	20.6	.425	10.8	247	43	.19	4.8	47	208	.55	14.0	0.100	2.5	5.50	SST	CG	N
0.625	15.88	10888	.84	21.4	.589	15.0	.17	.03	.73	18	.12	.55	.12	3.0	0.018	0.5	5.50	SST	C	N
0.625	15.88	S-68	.88	22.2	.549	13.9	4.7	.82	.69	17	3.2	14	.18	4.6	0.038	1.0	4.75	SST	CG	N
0.625	15.88	2831	.88	22.2	.531	13.5	7.3	1.3	.50	13	3.6	16	.38	9.6	0.047	1.2	7.00	HD	C	Z
0.625	15.88	B12-58	.88	22.2	.515	13.1	14	2.5	.49	12	7.0	31	.39	9.8	0.055	1.4	7.00	SPR	CG	Z
0.625	15.88	3911	.88	22.2	.501	12.7	30	5.2	.46	12	14	61	.37	9.4	0.062	1.6	6.00	HD	CG	Z
0.625	15.88	3192	.88	22.2	.439	11.2	238	42	.17	4.4	41	182	.47	11.8	0.093	2.4	5.00	SPR	CG	Z
0.625	15.88	10982	.88	22.2	.431	10.9	219	38	.20	5.0	43	190	.53	13.6	0.097	2.5	5.50	SST	CG	N
0.625	15.88	A9-69	.91	23.0	.543	13.8	7.4	1.3	.58	15	4.3	19	.19	4.9	0.041	1.0	4.75	SPR	CG	Z
0.625	15.88	W-30	.94	23.8	.551	14.0	1.5	.26	.49	13	.73	3.2	.44	11.3	0.037	0.9	11.0	SPR	C	Z
0.625	15.88	AA-75	.94	23.8	.505	12.8	28	4.8	.45	11	12	55	.35	8.8	0.060	1.5	5.75	SPR	CG	N
0.625	15.88	3129	.97	24.6	.563	14.3	2.1	.37	.78	20	1.7	7.3	.19	4.7	0.031	0.8	5.00	MW	C	Z
0.625	15.88	3031	1.00	25.4	.539	13.7	5.5	.97	.68	17	3.8	17	.32	8.2	0.043	1.1	6.50	SPR	C	Z
0.625	15.88	2799	1.00	25.4	.533	13.5	13	2.3	.46	12	6.1	27	.21	5.3	0.046	1.2	4.50	SPR	CG	GI
0.625	15.88	B11-59	1.00	25.4	.529	13.4	11	2.0	.61	15	6.9	31	.26	6.7	0.048	1.2	5.50	SPR	CG	N
0.625	15.88	11456	1.00	25.4	.521	13.2	14	2.4	.58	15	8.1	36	.36	9.2	0.052	1.3	6.00	SPR	C	Z
0.625	15.88	N-53	1.00	25.4	.517	13.1	13	2.3	.62	16	8.2	36	.38	9.6	0.054	1.4	7.00	SPR	CG	GI
0.625	15.88	S-767	1.00	25.4	.515	13.1	19	3.3	.48	12	9.0	40	.34	8.7	0.055	1.4	5.25	SST	C	N
0.625	15.88	12121	1.00	25.4	.509	12.9	11	2.0	.36	9.2	4.0	18	.64	16.2	0.058	1.5	10.0	SPR	C	Z
0.625	15.88	S-770	1.00	25.4	.499	12.7	32	5.6	.43	11	14	60	.41	10.4	0.063	1.6	5.50	SST	C	N
0.625	15.88	EE-40	1.00	25.4	.485	12.3	50	8.8	.37	9.4	19	83	.42	10.7	0.070	1.8	6.00	SPR	CG	N
0.625	15.88	S-367	1.00	25.4	.481	12.2	50	8.7	.38	9.7	19	84	.43	11.0	0.072	1.8	6.00	SST	CG	N
0.625	15.88	944	1.00	25.4	.465	11.8	121	21	.23	5.8	27	122	.48	12.2	0.080	2.0	5.00	HD	C	Z
0.625	15.88	2745	1.00	25.4	.455	11.6	159	28	.29	7.3	46	204	.43	10.8	0.085	2.2	5.00	MW	CG	Z
0.625	15.88	10354	1.03	26.2	.471	12.0	51	9.0	.42	11	21	94	.62	15.6	0.077	2.0	8.00	SPR	CG	Z
0.625	15.88	BB-88	1.06	27.0	.547	13.9	3.3	.58	.79	20	2.6	12	.27	6.9	0.039	1.0	7.00	SPR	CG	Z
0.625	15.88	B15-24	1.06	27.0	.535	13.6	10	1.8	.56	14	5.7	25	.23	5.7	0.045	1.1	5.00	SPR	CG	N
0.625	15.88	S-1451	1.06	27.0	.509	12.9	14	2.5	.63	16	8.8	39	.44	11.0	0.058	1.5	7.50	SST	CG	N
0.625	15.88	L-64	1.06	27.0	.491	12.5	28	4.9	.53	13	15	65	.54	13.6	0.067	1.7	8.00	SPR	CG	N
0.625	15.88	12289	1.06	27.0	.435	11.0	157	28	.28	7.0	43	193	.67	16.9	0.095	2.4	7.00	SPR	CG	GI
0.625	15.88	3856	1.06	27.0	.371	9.4	757	133	.13	3.2	96	429	.76	19.4	0.127	3.2	6.00	SPR	CG	Z
0.625	15.88	12469	1.09	27.8	.495	12.6	27	4.7	.59	15	16	70	.49	12.4	0.065	1.7	7.50	SPR	CG	Z
0.625	15.88	10747	1.09	27.8	.415	10.5	220	39	.24	6.2	54	239	.74	18.7	0.105	2.7	7.00	SST	CG	N
0.625	15.88	4317	1.13	28.6	.575	14.6	.58	.10	.94	24	.54	2.4	.19	4.8	0.025	0.6	6.50	MW	C	Z
0.625	15.88	S-1588	1.13	28.6	.507	12.9	14	2.5	.65	17	9.3	41	.47	12.0	0.059	1.5	8.00	SST	CG	N
0.625	15.88	S-890	1.13	28.6	.491	12.5	26	4.6	.61	16	16	72	.50	12.8	0.067	1.7	7.50	SST	CG	N
0.625	15.88	S-1423	1.13	28.6	.481	12.2	33	5.8	.55	14	18	81	.58	14.6	0.072	1.8	8.00	SST	CG	N
0.625	15.88	12190	1.13	28.6	.425	10.8	136	24	.28	7.0	37	166	.85	21.6	0.100	2.5	8.50	SPR	CG	Z
0.625	15.88	L-50	1.13	28.6	.415	10.5	355	62	.16	4.2	58	258	.58	14.7	0.105	2.7	5.50	SPR	CG	Z
0.625	15.88	2972	1.16	29.4	.551	14.0	1.4	.24	.73	19	1.0	4.5	.43	10.8	0.037	0.9	11.5	SPR	CG	Z
0.625	15.88	12137	1.16	29.4	.525	13.3	12	2.1	.61	16	7.3	32	.30	7.6	0.050	1.3	6.00	SPR	CG	Z
0.625	15.88	3980	1.16	29.4	.329	8.4	1338	234	.11	2.7	143	637	1.00	25.4	0.148	3.8	6.75	SPR	CG	N
0.625	15.88	S-117	1.19	30.2	.561	14.2	1.3	.22	.93	24	1.2	5.3	.26	6.5	0.032	0.8	7.00	SST	C	N
0.625	15.88	10750	1.19	30.2	.537	13.6	5.5	.96	.88	22	4.8	22	.31	7.8	0.044	1.1	7.00	SPR	CG	Z
0.625	15.88	B15-58	1.19	30.2	.537	13.6	4.2	.74	.81	21	3.4	15	.37	9.5	0.044	1.1	8.50	SPR	CG	Z
0.625	15.88	NN-52	1.19	30.2	.485	12.3	45	7.8	.39	9.9	17	77	.42	10.7	0.070	1.8	6.00	SST	CG	N
0.625	15.88	S-1055	1.19	30.2	.481	12.2	29	5.2	.56	14	16	73	.63	16.0	0.072	1.8	8.75	SST	CG	N
0.625	15.88	B11-60	1.22	31.0	.501	12.7	30	5.2	.46	12	14	61	.37	9.4	0.062	1.6	6.00	SPR	CG	Z
0.625	15.88	12267	1.25	31.8	.545	13.8	6.1	1.1	.65	17	4.0	18	.20	5.1	0.040	1.0	5.00	SPR	CG	Z
0.625	15.88	2757	1.25	31.8	.523	13.3	10	1.8	.84	21	8.7	39	.41	10.4	0.051	1.3	7.00	MW	C	Z
0.625	15.88	10050	1.25	31.8	.515	13.1	14	2.4	.71	18	9.6	43	.40	10.1	0.055	1.4	7.25	SPR	CG	Z
0.625	15.88	S-768	1.25	31.8	.515	13.1	15	2.5	.62	16	9.0	40	.40	10.1	0.055	1.4	6.25	SST	C	N
0.625	15.88	1915	1.25	31.8	.511	13.0	19	3.4	.55	14	11	48	.41	10.5	0.057	1.4	6.25	SPR	C	Z
0.625	15.88	1909	1.25	31.8	.501	12.7	24	4.2	.58	15	14	61	.43	11.0	0.062	1.6	7.00	SPR	CG	Z
0.625	15.88	S-771	1.25	31.8	.499	12.7	23	4.1	.58	15	14	60	.49	12.4	0.063	1.6	6.75	SST	C	N
0.625	15.88	10121	1.25	31.8	.497	12.6	27	4.8	.55	14	15	67	.51	13.0	0.064	1.6	7.00	HD	C	Z
0.625	15.88	12768	1.25	31.8	.475	12.1	61	11	.52	13	32	141	.56	14.3	0.075	1.9	6.50	MW	C	Z
0.625	15.88	10620	1.25	31.8	.443	11.3	118	21	.33	8.3	38	171	.68	17.3	0.091	2.3	7.50	SPR	CG	Z
0.625	15.88	3137	1.25	31.8	.431	10.9	173	30	.27	6.8	46	205	.68	17.2	0.097	2.5	7.00	SPR	CG	Z
0.625	15.88	A10-41	1.25	31.8	.349	8.9	860	151	.14	3.5	118	525	1.00	25.4	0.138	3.5	7.25	SPR	CG	Z
0.625	15.88	B6-14	1.28	32.5	.487	12.4	38	6.6	.49	13	19	83	.48	12.3	0.069	1.8	7.00	SPR	CG	N
0.625	15.88	B18-146	1.28	32.5	.437	11.1	150	26	.28	7.1	42	188	.66	16.7	0.094	2.4	7.00	SPR	CG	GI
0.625	15.88	B11-64	1.31	33.3	.501	12.7	40	6.9	.35	8.8	14	61	.31	7.9	0.062	1.6	5.00	SPR	CG	N
0.625	15.88	11838	1.34	34.1	.517	13.1	11	1.9	.83	21	9.1	41	.43	11.0	0.054	1.4	8.00	SPR	CG	Z
0.625	15.88	10632	1.38	34.9	.481	12.2	29	5.2	.67	17	20	88	.70	17.8	0.072	1.8	9.75	SPR	CG	Z
0.625	15.88	3818	1.38	34.9	.431	10.9	133	23	.35	8.8	46	205	.82	20.9	0.097	2.5	8.50	SPR	CG	Z
0.625	15.88	G-41	1.38	34.9	.415	10.5	178	31	.33	8.3	58	258	.95	24.0	0.105	2.7	9.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.625	15.88	3879	1.44	36.5	.551	14.0	1.5	.26	.99	25	1.5	6.5	.44	11.3	0.037	0.9	11.0	SPR	C	Z
0.625	15.88	A10-59	1.44	36.5	.481	12.2	29	5.0	.71	18	20	90	.72	18.3	0.072	1.8	10.0	SPR	CG	Z
0.625	15.88	S-1225	1.44	36.5	.455	11.6	64	11	.48	12	31	137	.72	18.4	0.085	2.2	8.50	SST	CG	N
0.625	15.88	10452	1.47	37.3	.477	12.1	32	5.6	.68	17	22	97	.74	18.8	0.074	1.9	10.0	SPR	CG	Z
0.625	15.88	11473	1.50	38.1	.555	14.1	1.4	.25	1.1	29	1.7	7.4	.36	9.1	0.035	0.9	9.25	MW	C	Z
0.625	15.88	523	1.50	38.1	.543	13.8	3.4	.60	1.1	29	3.8	17	.37	9.4	0.041	1.0	8.00	HD	C	Z
0.625	15.88	S-1186	1.50	38.1	.531	13.5	5.3	.92	1.1	27	5.7	25	.42	10.7	0.047	1.2	8.00	SST	C	N
0.625	15.88	4213	1.50	38.1	.529	13.4	6.9	1.2	1.0	25	6.9	31	.42	10.7	0.048	1.2	7.75	SPR	C	Z
0.625	15.88	S-769	1.50	38.1	.515	13.1	12	2.1	.77	20	9.0	40	.45	11.5	0.055	1.4	7.25	SST	C	N
0.625	15.88	S-772	1.50	38.1	.499	12.7	19	3.4	.70	18	14	60	.55	14.0	0.063	1.6	7.75	SST	C	N
0.625	15.88	S-773	1.50	38.1	.481	12.2	32	5.6	.59	15	19	84	.67	16.9	0.072	1.8	8.25	SST	C	N
0.625	15.88	XX-58	1.50	38.1	.481	12.2	28	5.0	.67	17	19	84	.65	16.5	0.072	1.8	9.00	SST	CG	N
0.625	15.88	11304	1.50	38.1	.451	11.5	82	14	.40	10	33	146	.76	19.3	0.087	2.2	7.75	SST	C	N
0.625	15.88	11445	1.50	38.1	.435	11.0	157	28	.39	9.8	61	270	.67	16.9	0.095	2.4	7.00	MW	CG	Z
0.625	15.88	3917	1.63	41.3	.529	13.4	3.6	.63	.95	24	3.4	15	.67	17.1	0.048	1.2	13.0	HD	C	Z
0.625	15.88	3252	1.63	41.3	.465	11.8	40	7.1	.68	17	27	122	.88	22.4	0.080	2.0	11.0	HD	CG	Z
0.625	15.88	11688	1.69	42.8	.531	13.5	3.5	.61	1.1	28	3.8	17	.59	14.9	0.047	1.2	12.5	SPR	CG	Z
0.625	15.88	4128	1.69	42.8	.445	11.3	103	18	.36	9.2	37	165	.81	20.6	0.090	2.3	8.00	SPR	C	Z
0.625	15.88	3887	1.69	42.8	.355	9.0	541	95	.21	5.2	111	494	1.28	32.6	0.135	3.4	9.50	SPR	CG	Z
0.625	15.88	4125	1.75	44.5	.481	12.2	33	5.7	.62	16	20	90	.72	18.3	0.072	1.8	9.00	SPR	C	Z
0.625	15.88	S-774	1.75	44.5	.481	12.2	26	4.6	.71	18	19	84	.76	19.2	0.072	1.8	9.50	SST	C	N
0.625	15.88	882	1.75	44.5	.443	11.3	72	13	.53	14	38	171	1.09	27.7	0.091	2.3	11.0	HD	C	Z
0.625	15.88	S-3259	1.78	45.2	.565	14.4	1.2	.21	1.4	34	1.7	7.4	.18	4.6	0.030	0.8	6.00	SST	CG	N
0.625	15.88	B18-134	1.78	45.2	.329	8.4	794	139	.15	3.9	122	541	1.63	41.4	0.148	3.8	10.0	SPR	CG	N
0.625	15.88	S-1568	1.81	46.0	.497	12.6	15	2.7	.93	24	14	63	.64	16.3	0.064	1.6	10.0	SST	CG	N
0.625	15.88	11124	1.81	46.0	.443	11.3	66	12	.58	15	38	171	1.16	29.5	0.091	2.3	11.8	HD	C	Z
0.625	15.88	3209	1.84	46.8	.443	11.3	65	11	.59	15	38	171	1.09	27.7	0.091	2.3	12.0	SPR	CG	Z
0.625	15.88	4295	1.88	47.6	.531	13.5	8.1	1.4	.80	20	6.5	29	.31	7.8	0.047	1.2	6.50	SPR	CG	Z
0.625	15.88	B32-32	1.91	48.4	.483	12.3	19	3.3	.95	24	18	81	.85	21.6	0.071	1.8	12.0	SST	CG	N
0.625	15.88	11852	2.00	50.8	.567	14.4	.87	.15	1.8	45	1.6	6.9	.22	5.5	0.029	0.7	7.50	MW	CG	N
0.625	15.88	S-775	2.00	50.8	.481	12.2	23	4.0	.83	21	19	84	.85	21.5	0.072	1.8	10.8	SST	C	N
0.625	15.88	B8-28	2.00	50.8	.475	12.1	29	5.0	.79	20	23	101	.86	21.9	0.075	1.9	11.5	SPR	CG	N
0.625	15.88	12272	2.09	53.2	.501	12.7	13	2.3	1.0	26	14	61	.68	17.3	0.062	1.6	11.0	SPR	CG	Z
0.625	15.88	11767	2.09	53.2	.465	11.8	33	5.8	.83	21	27	122	1.04	26.4	0.080	2.0	13.0	SPR	CG	Z
0.625	15.88	11295	2.19	55.6	.459	11.7	37	6.5	.82	21	31	136	1.12	28.5	0.083	2.1	13.5	SPR	CG	Z
0.625	15.88	B18-153	2.22	56.4	.425	10.8	81	14	.62	16	50	224	1.43	36.2	0.100	2.5	14.3	SPR	CG	Z
0.625	15.88	S-1470	2.25	57.2	.559	14.2	1.4	.25	1.5	39	2.2	9.8	.23	5.9	0.033	0.8	7.00	SST	CG	N
0.625	15.88	4260	2.25	57.2	.501	12.7	13	2.3	1.0	26	14	61	.74	18.9	0.062	1.6	11.0	SPR	C	Z
0.625	15.88	916	2.25	57.2	.481	12.2	20	3.5	1.0	26	20	90	1.04	26.5	0.072	1.8	13.5	HD	C	Z
0.625	15.88	2672	2.25	57.2	.415	10.5	113	20	.51	13	58	258	1.37	34.7	0.105	2.7	13.0	SPR	CG	Z
0.625	15.88	11438	2.25	57.2	.401	10.2	134	23	.50	13	68	300	1.62	41.2	0.112	2.8	14.5	SPR	CG	Z
0.625	15.88	S-809	2.31	58.7	.355	9.0	483	85	.21	5.3	100	445	1.37	34.8	0.135	3.4	10.0	SST	CG	N
0.625	15.88	47	2.38	60.3	.415	10.5	104	18	.56	14	58	258	1.47	37.3	0.105	2.7	14.0	HD	CG	Z
0.625	15.88	Q-42	2.44	61.9	.483	12.3	16	2.8	1.2	31	19	86	1.17	29.8	0.071	1.8	15.5	SPR	C	N
0.625	15.88	2512	2.44	61.9	.415	10.5	124	22	.65	17	81	361	1.37	34.7	0.105	2.7	12.0	MW	C	Z
0.625	15.88	2838	2.44	61.9	.385	9.8	209	37	.58	15	120	535	1.60	40.5	0.120	3.1	13.0	MW	CG	Z
0.625	15.88	S-776	2.50	63.5	.481	12.2	18	3.1	1.1	27	19	84	1.03	26.1	0.072	1.8	13.3	SST	C	N
0.625	15.88	1787	2.50	63.5	.465	11.8	29	5.1	.94	24	27	122	1.24	31.5	0.080	2.0	14.5	SPR	C	Z
0.625	15.88	23	2.50	63.5	.465	11.8	32	5.7	.85	22	27	122	1.14	29.0	0.080	2.0	13.3	HD	C	Z
0.625	15.88	12279	2.50	63.5	.453	11.5	36	6.3	.95	24	34	151	1.38	35.0	0.086	2.2	16.0	SPR	CG	Z
0.625	15.88	S-1371	2.50	63.5	.329	8.4	460	81	.28	7.1	129	574	2.07	52.6	0.148	3.8	14.0	SST	CG	N
0.625	15.88	S-871	2.53	64.3	.463	11.8	32	5.6	.84	21	27	119	1.01	25.7	0.081	2.1	12.5	SST	CG	N
0.625	15.88	1791	2.53	64.3	.329	8.4	508	89	.39	9.8	196	871	2.15	54.5	0.148	3.8	14.5	MW	CG	Z
0.625	15.88	11654	2.56	65.1	.495	12.6	12	2.1	1.3	33	16	70	.98	24.8	0.065	1.7	14.0	SPR	C	Z
0.625	15.88	S-91	2.63	66.7	.375	9.5	212	37	.40	10	84	374	1.69	42.9	0.125	3.2	13.5	SST	CG	N
0.625	15.88	21	2.75	69.9	.517	13.1	5.8	1.0	1.6	40	9.1	41	.77	19.6	0.054	1.4	13.3	HD	C	Z
0.625	15.88	1607	2.75	69.9	.515	13.1	4.4	.78	1.7	43	7.6	34	1.05	26.5	0.055	1.4	18.0	SPR	C	Z
0.625	15.88	3246	2.75	69.9	.481	12.2	18	3.1	1.1	29	20	90	1.08	27.4	0.072	1.8	15.0	SPR	CG	Z
0.625	15.88	51	2.75	69.9	.385	9.8	162	28	.51	13	82	366	1.95	49.5	0.120	3.0	16.3	HD	CG	Z
0.625	15.88	B9-65	2.81	71.4	.415	10.5	72	13	.74	19	54	239	1.81	46.0	0.105	2.7	17.3	SST	CG	N
0.625	15.88	11181	2.88	73.0	.529	13.4	3.6	.63	1.9	48	6.9	31	.62	15.8	0.048	1.2	13.0	SPR	CG	Z
0.625	15.88	12135	2.88	73.0	.475	12.1	20	3.4	1.2	30	23	101	1.20	30.5	0.075	1.9	16.0	SPR	CG	Z
0.625	15.88	S-1681	3.00	76.2	.565	14.4	.80	.14	2.1	53	1.7	7.4	.24	6.1	0.030	0.8	8.00	SST	CG	N
0.625	15.88	1906	3.00	76.2	.531	13.5	4.0	.71	1.6	41	6.5	29	.56	14.3	0.047	1.2	11.0	SPR	C	Z
0.625	15.88	11340	3.00	76.2	.501	12.7	9.2	1.6	1.5	38	14	61	.99	25.2	0.062	1.6	15.0	HD	C	Z
0.625	15.88	19	3.00	76.2	.465	11.8	26	4.6	1.0	26	27	122	1.34	34.0	0.080	2.0	15.8	HD	C	Z
0.625	15.88	3499	3.00	76.2	.465	11.8	24	4.2	1.1	29	27	122	1.44	36.6	0.080	2.0	17.0	HD	C	Z
0.625	15.88	3694	3.13	79.4	.513	13.0	5.9	1.0	1.7	44	10	45	.84	21.3	0.056	1.4	15.0	SPR	CG	Z
0.625	15.88	3797	3.13	79.4	.395	10.0	118	21	.61	16	73	324	2.07	52.6	0.115	2.9	18.0	SPR	CG	Z
0.625	15.88	2528	3.19	81.0	.461	11.7	29	5.1	1.4	36	41	184	1.31	33.3	0.082	2.1	16.0	MW	CG	Z
0.625	15.88	S-3132	3.25	82.6	.415	10.5	64	11	.85	21	54	239	2.00	50.7	0.105	2.7	19.0	SST	CG	N
0.625	15.88	2596	3.50	88.9	.573	14.6	.31	.05	3.2	80	.97	4.3	.34	8.6	0.026	0.7	12.0	MW	C	Z
0.625	15.88	4156	3.50	88.9	.531	13.5	3.8	.67	1.7	43	6.5	29	.59	14.9	0.047	1.2	11.5	HD	C	GI
0.625	15.88	2820	3.50	88.9	.399	10.1	97	17	1.0	25	97	430	2.26	57.4	0.113	2.9	20.0	MW	CG	Z
0.625	15.88	12107	3.50	88.9	.389	9.9	122	21	.64	16	78	349	2.30	58.4	0.118	3.0	19.5	SPR	CG	Z
0.625	15.88	S-1037	3.75	95.3	.375	9.5	122	21	.69	18	84	374	2.75	69.9	0.125	3.2	22.0	SST	CG	N
0.625	15.88	12314	4.00	101.6	.515	13.1	5.9	1.0	1.6	41	9.6	43	.83	21.0	0.055	1.4	14.0	HD	C	Z
0.625	15.88	S-364	4.19	106.4	.465	11.8	18	3.1	1.5	37	26	114	1.60	40.6	0.080	2.0	20.0	SST	CG	N
0.625	15.88	S-419	4.50	114.3	.449	11.4	16	2.8	1.6	42	26	116	2.86	72.6	0.088	2.2	32.5	SST	CG	N
0.625	15.88	925	4.50	114.3	.415	10.5	65	11	.89	23	58	258	2.31	58.7	0.105	2.7	21.0	HD	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.625	15.88	1899	4.81	122.2	.449	11.4	24	4.3	2.1	53	51	225	2.18	55.3	0.088	2.2	24.8	MW	CG	Z
0.625	15.88	12419	4.84	123.0	.443	11.3	27	4.7	1.4	36	38	171	2.37	60.1	0.091	2.3	26.0	SPR	CG	N
0.625	15.88	12441	4.94	125.4	.441	11.2	27	4.7	1.5	38	40	176	2.62	66.6	0.092	2.3	27.5	SPR	C	N
0.625	15.88	874	5.00	127.0	.443	11.3	24	4.2	1.6	41	38	171	2.64	67.0	0.091	2.3	29.0	HD	CG	Z
0.625	15.88	3803	5.00	127.0	.441	11.2	25	4.4	1.6	40	40	176	2.76	70.1	0.092	2.3	29.0	SPR	CG	Z
0.625	15.88	870	5.00	127.0	.415	10.5	41	7.1	1.4	36	58	258	3.43	87.1	0.105	2.7	32.7	HD	CG	Z
0.625	15.88	1657	6.00	152.4	.517	13.1	2.8	.49	3.2	82	9.1	41	1.42	36.0	0.054	1.4	25.3	SPR	C	Z
0.625	15.88	3334	6.00	152.4	.481	12.2	5.8	1.0	3.0	77	17	77	2.99	75.9	0.072	1.8	41.5	HD	CG	GI
0.625	15.88	1944	7.00	177.8	.455	11.6	15	2.6	2.2	56	33	146	2.98	75.6	0.085	2.2	34.0	SPR	C	Z
0.625	15.88	888	9.00	228.6	.465	11.8	8.4	1.5	3.3	83	27	122	3.72	94.5	0.080	2.0	45.5	HD	C	Z
0.625	15.88	10542	9.50	241.3	.477	12.1	6.1	1.1	3.6	91	22	97	3.33	84.6	0.074	1.9	44.0	SPR	C	Z
0.625	15.88	10150	9.75	247.7	.443	11.3	15	2.5	2.6	67	38	171	4.32	109.8	0.091	2.3	46.5	SPR	C	Z
0.625	15.88	4143	11.9	301.6	.481	12.2	4.0	.70	5.0	128	20	90	4.32	109.7	0.072	1.8	59.0	HD	C	Z
0.625	15.88	881	12.0	304.8	.501	12.7	2.1	.36	6.7	169	14	61	3.78	96.1	0.062	1.6	60.0	HD	C	Z
0.625	15.88	878	12.0	304.8	.481	12.2	3.5	.62	5.7	145	20	90	4.86	123.4	0.072	1.8	66.0	HD	C	Z
0.625	15.88	876	12.0	304.8	.465	11.8	6.2	1.1	4.4	112	27	122	4.92	125.0	0.080	2.0	60.0	HD	C	Z
0.625	15.88	S-3045	15.0	381.0	.491	12.5	1.9	.34	8.4	214	16	72	5.19	131.9	0.067	1.7	77.0	SST	CG	N
0.640	16.26	S-105	.34	8.7	.582	14.8	3.1	.54	.22	5.6	.68	3.0	.12	3.1	0.029	0.7	3.25	SST	C	N
0.640	16.26	B10-13	.38	9.5	.508	12.9	57	10	.09	2.4	5.4	24	.28	7.1	0.066	1.7	4.25	SST	CG	N
0.640	16.26	0-70	.41	10.3	.516	13.1	110	19	.12	3.1	13	60	.19	4.7	0.062	1.6	3.00	SPR	CG	Z
0.640	16.26	S-1187	.41	10.3	.506	12.9	134	23	.12	3.0	16	70	.20	5.1	0.067	1.7	3.00	SST	CG	N
0.640	16.26	3181	.44	11.1	.512	13.0	126	22	.12	3.0	15	65	.19	4.9	0.064	1.6	3.00	SPR	CG	GI
0.640	16.26	10124	.50	12.7	.516	13.1	55	9.6	.19	4.8	10	46	.31	7.9	0.062	1.6	4.00	HD	C	Z
0.640	16.26	B15-27	.50	12.7	.500	12.7	110	19	.15	3.9	17	76	.25	6.2	0.070	1.8	3.50	SST	CG	N
0.640	16.26	3248	.63	15.9	.564	14.3	9.2	1.6	.37	9.3	3.4	15	.17	4.3	0.038	1.0	3.50	SPR	C	Z
0.640	16.26	S-1106	.63	15.9	.560	14.2	3.7	.65	.35	8.8	1.3	5.7	.28	7.1	0.040	1.0	6.00	SST	C	N
0.640	16.26	QQ-61	.69	17.4	.522	13.3	44	7.8	.26	6.6	12	51	.30	7.5	0.059	1.5	4.00	SPR	C	GI
0.640	16.26	3221	.69	17.4	.518	13.2	51	9.0	.25	6.3	13	57	.24	6.2	0.061	1.5	4.00	SPR	CG	GI
0.640	16.26	10595	.69	17.4	.430	10.9	368	64	.14	3.6	53	234	.50	12.7	0.105	2.7	4.75	SST	CG	N
0.640	16.26	S-889	.75	19.1	.542	13.8	9.2	1.6	.46	12	4.2	19	.29	7.3	0.049	1.2	6.00	SST	CG	N
0.640	16.26	KK-30	.75	19.1	.540	13.7	22	3.8	.32	8.2	7.1	32	.20	5.1	0.050	1.3	4.00	SPR	CG	Z
0.640	16.26	S-1428	.75	19.1	.430	10.9	397	70	.13	3.4	53	234	.47	12.0	0.105	2.7	4.50	SST	CG	N
0.640	16.26	BB-96	.84	21.4	.490	12.4	37	6.4	.24	6.2	8.9	40	.60	15.2	0.075	1.9	8.00	SST	CG	N
0.640	16.26	10134	.88	22.2	.512	13.0	42	7.4	.35	8.9	15	65	.32	8.1	0.064	1.6	5.00	SPR	CG	Z
0.640	16.26	10789	.88	22.2	.470	11.9	111	19	.27	6.9	30	134	.47	11.9	0.085	2.2	5.50	SST	CG	N
0.640	16.26	GG-94	.94	23.8	.532	13.5	13	2.3	.61	16	8.1	36	.32	8.2	0.054	1.4	6.00	SST	CG	N
0.640	16.26	MM-52	.94	23.8	.520	13.2	32	5.6	.38	9.7	12	54	.30	7.6	0.060	1.5	5.00	SPR	CG	Z
0.640	16.26	S-3197	.94	23.8	.468	11.9	117	21	.27	6.7	31	138	.47	12.0	0.086	2.2	5.50	SST	CG	N
0.640	16.26	10787	.97	24.6	.470	11.9	110	19	.29	7.4	32	143	.51	13.0	0.085	2.2	6.00	SPR	CG	N
0.640	16.26	UU-53	1.00	25.4	.550	14.0	7.0	1.2	.69	17	4.8	21	.32	8.0	0.045	1.1	6.00	SPR	C	Z
0.640	16.26	3144	1.00	25.4	.546	13.9	5.2	.91	.55	14	2.9	13	.45	11.3	0.047	1.2	8.50	SPR	C	Z
0.640	16.26	H-30	1.00	25.4	.528	13.4	18	3.1	.56	14	9.9	44	.34	8.5	0.056	1.4	6.00	SPR	CG	Z
0.640	16.26	2763	1.00	25.4	.474	12.0	175	31	.24	6.1	42	186	.44	11.1	0.083	2.1	4.25	MW	C	Z
0.640	16.26	S-1571	1.00	25.4	.468	11.9	126	22	.25	6.3	31	138	.45	11.5	0.086	2.2	5.25	SST	CG	N
0.640	16.26	A15-35	1.03	26.2	.548	13.9	11	1.9	.51	13	5.6	25	.21	5.3	0.046	1.2	4.50	SST	CG	N
0.640	16.26	GG-48	1.03	26.2	.520	13.2	19	3.3	.61	16	12	52	.42	10.7	0.060	1.5	7.00	SPR	CG	BO
0.640	16.26	2669	1.13	28.6	.396	10.1	688	120	.12	3.1	84	376	.77	19.6	0.122	3.1	5.33	SPR	C	Z
0.640	16.26	B7-58	1.16	29.4	.558	14.2	6.9	1.2	.61	16	4.2	19	.24	6.0	0.041	1.0	4.75	SPR	C	N
0.640	16.26	11901	1.16	29.4	.552	14.0	7.8	1.4	.66	17	5.2	23	.23	5.9	0.044	1.1	5.25	SPR	CG	N
0.640	16.26	A14-68	1.19	30.2	.548	13.9	8.4	1.5	.66	17	5.6	25	.29	7.3	0.046	1.2	5.25	SST	C	N
0.640	16.26	A14-69	1.19	30.2	.530	13.5	19	3.4	.46	12	8.8	39	.28	7.0	0.055	1.4	5.00	SST	CG	N
0.640	16.26	S-1248	1.19	30.2	.506	12.9	27	4.7	.59	15	16	70	.47	11.9	0.067	1.7	7.00	SST	CG	N
0.640	16.26	10240	1.25	31.8	.538	13.7	24	4.2	.32	8.0	7.5	33	.26	6.5	0.051	1.3	4.00	SPR	C	Z
0.640	16.26	11158	1.25	31.8	.528	13.4	18	3.1	.56	14	9.9	44	.34	8.5	0.056	1.4	6.00	SPR	CG	Z
0.640	16.26	10408	1.25	31.8	.516	13.1	31	5.5	.43	11	13	60	.34	8.7	0.062	1.6	5.50	SPR	CG	Z
0.640	16.26	3387	1.25	31.8	.480	12.2	56	9.8	.48	12	27	120	.64	16.3	0.080	2.0	8.00	SPR	CG	Z
0.640	16.26	A14-41	1.28	32.5	.530	13.5	18	3.1	.54	14	9.4	42	.32	8.0	0.055	1.4	5.75	SPR	CG	N
0.640	16.26	10559	1.31	33.3	.536	13.6	15	2.6	.54	14	8.0	35	.29	7.3	0.052	1.3	5.50	SPR	CG	Z
0.640	16.26	2705	1.36	34.5	.440	11.2	228	40	.22	5.5	49	220	.60	15.2	0.100	2.5	6.00	SPR	CG	Z
0.640	16.26	S-411	1.38	34.9	.530	13.5	9.1	1.6	.92	23	8.4	37	.45	11.5	0.055	1.4	8.25	SST	CG	N
0.640	16.26	G-59	1.38	34.9	.480	12.2	42	7.3	.60	15	25	112	.72	18.3	0.080	2.0	9.00	SST	CG	N
0.640	16.26	A13-47	1.44	36.5	.528	13.4	13	2.3	.70	18	9.3	41	.43	11.0	0.056	1.4	6.75	SST	C	N
0.640	16.26	B6-67	1.47	37.3	.560	14.2	4.9	.85	.81	20	3.9	17	.26	6.6	0.040	1.0	5.50	SPR	C	N
0.640	16.26	10082	1.50	38.1	.516	13.1	20	3.5	.67	17	13	60	.47	11.8	0.062	1.6	7.50	HD	CG	GI
0.640	16.26	10418	1.50	38.1	.480	12.2	42	7.3	.64	16	27	120	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
0.640	16.26	3894	1.50	38.1	.480	12.2	48	8.4	.56	14	27	120	.72	18.3	0.080	2.0	9.00	HD	CG	Z
0.640	16.26	Q-50	1.50	38.1	.452	11.5	73	13	.42	11	30	135	1.08	27.5	0.094	2.4	11.5	SPR	CG	N
0.640	16.26	3738	1.50	38.1	.450	11.4	80	14	.46	12	37	163	1.05	26.5	0.095	2.4	11.0	SPR	CG	Z
0.640	16.26	Q-9	1.53	38.9	.572	14.5	2.0	.36	1.2	32	2.5	11	.21	5.4	0.034	0.9	6.25	SPR	CG	Z
0.640	16.26	B11-45	1.56	39.7	.390	9.9	321	56	.28	7.2	90	402	1.25	31.8	0.125	3.2	10.0	SPR	CG	Z
0.640	16.26	11732	1.59	40.5	.574	14.6	1.5	.27	1.4	35	2.1	9.2	.23	5.9	0.033	0.8	7.00	SPR	CG	Z
0.640	16.26	3001	1.63	41.3	.560	14.2	2.9	.51	1.3	33	3.8	17	.32	8.0	0.040	1.0	7.88	SPR	C	Z
0.640	16.26	A15-47	1.63	41.3	.556	14.1	3.7	.65	1.1	29	4.2	19	.34	8.5	0.042	1.1	7.00	SST	C	N
0.640	16.26	1553	1.75	44.5	.590	15.0	.44	.08	1.5	39	.67	3.0	.21	5.4	0.025	0.6	7.50	MW	C	Z
0.640	16.26	B17-157	1.75	44.5	.514	13.1	18	3.2	.77	20	14	62	.54	13.6	0.063	1.6	8.50	SPR	CG	N
0.640	16.26	10617	1.81	46.0	.530	13.5	5.3	.92	.96	24	5.0	22	.85	21.7	0.055	1.4	14.5	SPR	C	Z
0.640	16.26	MM-85	1.81	46.0	.380	9.7	344	60	.29	7.2	98	437	1.43	36.3	0.130	3.3	11.0	SPR	CG	Z
0.640	16.26	11797	1.84	46.8	.540	13.7	5.5	.96	1.3	33	7.1	32	.50	12.7	0.050	1.3	10.0	SPR	CG	Z
0.640	16.26	S-1206	1.88	47.6	.558	14.2	1.6	.29	1.3	34	2.2	9.8	.53	13.5	0.041	1.0	12.0	SST	C	N
0.640	16.26	A15-65	2.00	50.8	.558	14.2	2.1	.37	1.6	40	3.3	15	.41	10.4	0.041	1.0	10.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.640	16.26	10335	2.00	50.8	.546	13.9	3.2	.56	1.4	36	4.5	20	.59	14.9	0.047	1.2	12.5	SPR	CG	Z
0.640	16.26	11750	2.00	50.8	.516	13.1	12	2.1	1.1	28	13	60	.68	17.3	0.062	1.6	11.0	SPR	CG	Z
0.640	16.26	12580	2.00	50.8	.480	12.2	36	6.3	.74	19	27	120	.98	24.9	0.080	2.0	11.3	SPR	C	N
0.640	16.26	4316	2.13	54.0	.530	13.5	8.2	1.4	1.1	29	9.4	42	.55	14.0	0.055	1.4	10.0	SPR	CG	Z
0.640	16.26	S-321	2.19	55.6	.316	8.0	956	167	.16	4.1	156	693	1.66	42.2	0.162	4.1	10.3	SST	CG	N
0.640	16.26	3808	2.25	57.2	.430	10.9	104	18	.55	14	57	253	1.61	40.8	0.105	2.7	14.0	SPR	C	Z
0.640	16.26	LL-96	2.38	60.3	.480	12.2	30	5.2	.85	22	25	112	.96	24.4	0.080	2.0	12.0	SST	CG	N
0.640	16.26	2926	2.47	62.7	.532	13.5	6.1	1.1	1.5	37	8.9	40	.65	16.5	0.054	1.4	12.0	SPR	CG	Z
0.640	16.26	RR-11	2.50	63.5	.568	14.4	1.3	.23	2.1	53	2.7	12	.41	10.5	0.036	0.9	10.5	SPR	C	Z
0.640	16.26	10522	2.63	66.7	.516	13.1	10	1.8	1.3	34	13	60	.81	20.5	0.062	1.6	13.0	SPR	CG	Z
0.640	16.26	11374	2.63	66.7	.496	12.6	20	3.5	.91	23	18	82	.81	20.6	0.072	1.8	11.3	SST	CG	N
0.640	16.26	11596	2.69	68.2	.370	9.4	278	49	.39	10	109	485	2.20	56.0	0.135	3.4	15.3	SPR	CG	Z
0.640	16.26	2624	2.91	73.8	.430	10.9	71	12	.80	20	57	253	2.00	50.7	0.105	2.7	18.0	HD	C	Z
0.640	16.26	S-805	2.94	74.6	.558	14.2	1.6	.27	2.4	61	3.7	17	.55	14.1	0.041	1.0	12.5	SST	C	N
0.640	16.26	12455	3.00	76.2	.480	12.2	24	4.2	1.1	29	27	120	1.36	34.5	0.080	2.0	16.0	SPR	C	Z
0.640	16.26	S-3037	3.25	82.6	.430	10.9	58	10	.90	23	53	234	2.10	53.3	0.105	2.7	19.0	SST	C	N
0.640	16.26	10414	3.31	84.1	.430	10.9	67	12	.85	22	57	253	2.00	50.7	0.105	2.7	19.0	SPR	CG	Z
0.640	16.26	11800	3.50	88.9	.526	13.4	7.7	1.3	1.4	35	10	46	.74	18.8	0.057	1.4	12.0	SPR	C	Z
0.640	16.26	10771	4.00	101.6	.478	12.1	18	3.1	1.6	40	28	124	1.78	45.3	0.081	2.1	22.0	SPR	CG	GI
0.640	16.26	3437	4.50	114.3	.530	13.5	3.9	.68	2.4	62	9.4	42	1.10	27.9	0.055	1.4	19.0	SPR	C	Z
0.640	16.26	3154	4.50	114.3	.480	12.2	19	3.3	1.4	36	27	120	1.57	40.0	0.080	2.0	19.8	SPR	CG	Z
0.640	16.26	1593	4.88	123.8	.400	10.2	92	16	.87	22	81	358	3.00	76.2	0.120	3.0	25.0	SPR	CG	Z
0.640	16.26	3332	6.00	152.4	.496	12.6	5.2	.91	2.9	73	15	66	3.13	79.6	0.072	1.8	42.5	HD	C	Z
0.640	16.26	1531	8.00	203.2	.500	12.7	5.6	.98	3.2	82	18	81	2.54	64.5	0.070	1.8	35.3	SPR	C	Z
0.640	16.26	11691	9.75	247.7	.458	11.6	13	2.3	2.8	71	38	167	4.23	107.5	0.091	2.3	46.5	SPR	CG	GI
0.640	16.26	10152	11.0	279.4	.570	14.5	.28	.05	9.5	241	2.6	12	1.33	33.8	0.035	0.9	37.0	SPR	C	Z
0.653	16.59	12682	.69	17.4	.527	13.4	32	5.6	.31	7.8	9.9	44	.38	9.6	0.063	1.6	5.00	SST	C	N
0.656	16.66	10241	.34	8.7	.496	12.6	411	72	.06	1.6	26	117	.22	5.6	0.080	2.0	2.75	SPR	CG	Z
0.656	16.66	B4-70	.38	9.5	.600	15.2	3.1	.54	.26	6.7	.82	3.6	.11	2.8	0.028	0.7	3.00	SST	C	N
0.656	16.66	3645	.38	9.5	.574	14.6	17	3.1	.21	5.4	3.7	16	.16	4.2	0.041	1.0	3.00	HD	C	Z
0.656	16.66	II-97	.44	11.1	.574	14.6	15	2.7	.25	6.4	3.9	17	.16	4.2	0.041	1.0	3.00	SST	C	N
0.656	16.66	1763	.47	11.9	.562	14.3	18	3.1	.25	6.2	4.3	19	.22	5.7	0.047	1.2	3.75	HD	C	Z
0.656	16.66	S-883	.53	13.5	.546	13.9	28	4.9	.31	7.8	8.6	38	.21	5.4	0.055	1.4	4.00	SST	CG	N
0.656	16.66	12266	.56	14.3	.556	14.1	17	3.0	.35	8.8	6.0	27	.22	5.5	0.050	1.3	4.25	SPR	CG	Z
0.656	16.66	A-48	.66	16.7	.296	7.5	13992	2450	.02	.40	218	968	.54	13.7	0.180	4.6	3.00	HD	CG	Z
0.656	16.66	OO-48	.69	17.4	.576	14.6	5.2	.92	.45	11	2.3	10	.24	6.1	0.040	1.0	5.00	SPR	C	GI
0.656	16.66	A11-28	.69	17.4	.560	14.2	15	2.6	.41	10	6.2	27	.19	4.9	0.048	1.2	4.00	SST	CG	N
0.656	16.66	S-1264	.69	17.4	.474	12.0	136	24	.19	4.7	25	113	.50	12.7	0.091	2.3	5.50	SST	CG	N
0.656	16.66	S-1210	.75	19.1	.574	14.6	7.6	1.3	.51	13	3.9	17	.21	5.2	0.041	1.0	4.00	SST	C	N
0.656	16.66	I-59	.75	19.1	.564	14.3	8.2	1.4	.52	13	4.3	19	.23	5.8	0.046	1.2	5.00	SST	CG	N
0.656	16.66	S-1403	.75	19.1	.532	13.5	44	7.7	.28	7.1	12	55	.25	6.3	0.062	1.6	4.00	SST	CG	N
0.656	16.66	A15-69	.75	19.1	.504	12.8	67	12	.32	8.0	21	94	.40	10.1	0.076	1.9	5.25	SST	CG	N
0.656	16.66	S-1135	.81	20.6	.592	15.0	2.4	.42	.64	16	1.5	6.9	.17	4.3	0.032	0.8	4.25	SST	C	N
0.656	16.66	S-479	.81	20.6	.544	13.8	24	4.3	.37	9.5	9.1	41	.24	6.2	0.056	1.4	4.25	SST	CG	N
0.656	16.66	B11-57	.84	21.4	.520	13.2	60	11	.28	7.2	17	76	.31	7.8	0.068	1.7	4.50	SPR	CG	Z
0.656	16.66	A14-64	1.00	25.4	.568	14.4	8.3	1.5	.57	14	4.8	21	.20	5.0	0.044	1.1	4.50	SST	CG	N
0.656	16.66	A14-52	1.00	25.4	.542	13.8	26	4.5	.40	10	10	45	.27	6.9	0.057	1.4	4.75	SPR	CG	GI
0.656	16.66	S-135	1.00	25.4	.512	13.0	42	7.4	.43	11	18	80	.50	12.8	0.072	1.8	6.00	SST	C	N
0.656	16.66	A14-63	1.03	26.2	.562	14.3	12	2.2	.50	13	6.2	27	.21	5.4	0.047	1.2	4.50	SPR	CG	GI
0.656	16.66	S-1391	1.03	26.2	.474	12.0	106	18	.32	8.2	34	152	.59	15.0	0.091	2.3	6.50	SST	CG	N
0.656	16.66	S-1102	1.06	27.0	.576	14.6	4.2	.74	.81	21	3.4	15	.25	6.4	0.040	1.0	5.25	SST	C	N
0.656	16.66	B9-57	1.06	27.0	.572	14.5	4.3	.75	.79	20	3.4	15	.27	6.9	0.042	1.1	6.50	SPR	CG	N
0.656	16.66	H-9	1.13	28.6	.562	14.3	10	1.8	.60	15	6.2	27	.24	6.0	0.047	1.2	5.00	SPR	CG	GI
0.656	16.66	10327	1.13	28.6	.548	13.9	12	2.2	.70	18	8.7	39	.41	10.3	0.054	1.4	6.50	SPR	C	Z
0.656	16.66	S-269	1.13	28.6	.548	13.9	13	2.3	.63	16	8.2	36	.36	9.3	0.054	1.4	5.75	SST	C	N
0.656	16.66	11228	1.13	28.6	.526	13.4	33	5.8	.45	12	15	67	.37	9.5	0.065	1.7	5.75	SPR	CG	Z
0.656	16.66	1601	1.13	28.6	.476	12.1	87	15	.41	10	35	156	.72	18.3	0.090	2.3	8.00	SPR	CG	Z
0.656	16.66	Y-26	1.13	28.6	.406	10.3	1172	205	.08	1.9	89	394	.50	12.7	0.125	3.2	4.00	SPR	CG	Z
0.656	16.66	10453	1.19	30.2	.522	13.3	30	5.2	.55	14	16	73	.45	11.5	0.067	1.7	6.75	SPR	CG	Z
0.656	16.66	B12-5	1.25	31.8	.548	13.9	14	2.5	.62	16	8.7	39	.32	8.2	0.054	1.4	6.00	SPR	CG	N
0.656	16.66	S-425	1.28	32.5	.548	13.9	13	2.4	.61	15	8.2	36	.30	7.7	0.054	1.4	5.75	SST	CG	N
0.656	16.66	B1-64	1.28	32.5	.540	13.7	19	3.3	.56	14	11	48	.41	10.3	0.058	1.5	6.00	SPR	C	Z
0.656	16.66	10794	1.31	33.3	.564	14.3	7.2	1.3	.76	19	5.4	24	.25	6.4	0.046	1.2	5.50	SST	CG	N
0.656	16.66	4330	1.31	33.3	.536	13.6	12	2.1	.74	19	8.7	39	.57	14.5	0.060	1.5	9.50	SPR	CG	Z
0.656	16.66	11566	1.34	34.1	.496	12.6	56	9.8	.47	12	26	117	.68	17.3	0.080	2.0	7.50	SPR	CG	N
0.656	16.66	11420	1.38	34.9	.512	13.0	43	7.5	.45	11	19	86	.54	13.7	0.072	1.8	6.50	SPR	C	Z
0.656	16.66	10264	1.38	34.9	.466	11.8	111	19	.38	9.6	42	185	.86	21.7	0.095	2.4	8.00	SPR	C	Z
0.656	16.66	10712	1.41	35.7	.612	15.5	.29	.05	1.2	32	.36	1.6	.17	4.2	0.022	0.6	6.50	MW	C	Z
0.656	16.66	11129	1.41	35.7	.592	15.0	2.1	.36	1.0	25	2.1	9.2	.19	4.9	0.032	0.8	5.00	HD	C	Z
0.656	16.66	10960	1.41	35.7	.590	15.0	1.7	.29	1.2	30	1.9	8.6	.24	6.1	0.033	0.8	6.25	SPR	C	N
0.656	16.66	A15-56	1.47	37.3	.572	14.5	4.9	.86	.85	21	4.1	18	.23	5.9	0.042	1.1	5.50	SST	CG	N
0.656	16.66	10807	1.47	37.3	.564	14.3	4.2	.73	1.1	28	4.6	21	.37	9.3	0.046	1.2	8.00	SST	CG	N
0.656	16.66	B15-42	1.50	38.1	.532	13.5	10	1.8	.76	19	7.7	34	.74	18.9	0.062	1.6	12.0	SPR	CG	Z
0.656	16.66	S-171	1.50	38.1	.446	11.3	121	21	.43	11	52	229	1.00	25.3	0.105	2.7	9.50	SST	CG	N
0.656	16.66	S-1402	1.50	38.1	.430	10.9	318	56	.19	4.8	61	270	.68	17.2	0.113	2.9	6.00	SST	CG	N
0.656	16.66	B8-36	1.53	38.9	.456	11.6	99	17	.45	12	45	199	.95	24.1	0.100	2.5	9.50	SST	CG	N
0.656	16.66	2608	1.53	38.9	.432	11.0	201	35	.32	8.2	65	288	1.01	25.6	0.112	2.8	9.00	SPR	CG	Z
0.656	16.66	12305	1.63	41.3	.446	11.3	116	20	.47	12	55	243	1.16	29.3	0.105	2.7	11.0	SPR	CG	Z
0.656	16.66	10196	1.69	42.8	.612	15.5	.20	.03	1.5	37	.29	1.3	.22	5.5	0.022	0.6	8.75	MW	C	Z
0.656	16.66	10663	1.69	42.8	.606	15.4	.34	.06	1.4	37	.50	2.2	.24	6.0	0.025	0.6	8.50	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.656	16.66	1715	1.75	44.5	.600	15.2	.55	.10	1.5	38	.81	3.6	.27	6.8	0.028	0.7	8.50	MW	C	Z
0.656	16.66	4186	1.75	44.5	.562	14.3	5.2	.91	1.2	30	6.2	27	.42	10.7	0.047	1.2	8.00	SPR	C	Z
0.656	16.66	A14-12	1.75	44.5	.396	10.1	316	55	.27	7.0	87	385	1.27	32.2	0.130	3.3	9.75	SST	CG	N
0.656	16.66	10157	1.78	45.2	.354	9.0	967	169	.15	3.7	142	634	1.21	30.7	0.151	3.8	8.00	SPR	CG	GI
0.656	16.66	S-1148	1.88	47.6	.432	11.0	122	21	.48	12	59	263	1.34	34.1	0.112	2.8	12.0	SST	CG	N
0.656	16.66	11882	1.91	48.4	.560	14.2	6.8	1.2	.97	25	6.6	29	.34	8.5	0.048	1.2	7.00	SPR	CG	N
0.656	16.66	11723	1.97	50.0	.552	14.0	7.9	1.4	.98	25	7.8	35	.42	10.6	0.052	1.3	8.00	SPR	CG	Z
0.656	16.66	B18-179	2.00	50.8	.576	14.6	1.7	.31	1.6	41	2.8	12	.40	10.2	0.040	1.0	10.0	SST	CG	N
0.656	16.66	4256	2.00	50.8	.560	14.2	6.5	1.1	1.0	26	6.6	29	.40	10.1	0.048	1.2	7.25	SPR	C	Z
0.656	16.66	11682	2.03	51.6	.530	13.5	12	2.1	1.1	29	14	61	.69	17.6	0.063	1.6	11.0	SPR	CG	Z
0.656	16.66	3130	2.06	52.4	.530	13.5	12	2.1	1.1	28	14	61	.69	17.4	0.063	1.6	11.0	SPR	CG	Z
0.656	16.66	2656	2.25	57.2	.546	13.9	6.2	1.1	1.5	38	9.2	41	.65	16.4	0.055	1.4	11.8	SPR	CG	Z
0.656	16.66	N-124	2.50	63.5	.574	14.6	1.9	.33	2.0	52	3.9	17	.45	11.5	0.041	1.0	10.0	SST	C	N
0.656	16.66	2514	2.53	64.3	.548	13.9	6.8	1.2	1.8	45	12	54	.55	14.1	0.054	1.4	10.3	MW	CG	Z
0.656	16.66	S-1121	2.63	66.7	.574	14.6	1.9	.33	2.0	52	3.9	17	.45	11.5	0.041	1.0	10.0	SST	C	N
0.656	16.66	11616	2.84	72.2	.414	10.5	161	28	.50	13	81	359	1.88	47.6	0.121	3.1	14.5	SPR	CG	Z
0.656	16.66	1635	2.88	73.0	.496	12.6	32	5.7	.81	21	26	117	1.00	25.4	0.080	2.0	11.5	SPR	C	Z
0.656	16.66	10997	3.06	77.8	.446	11.3	87	15	.64	16	56	247	1.47	37.3	0.105	2.7	14.0	HD	CG	Z
0.656	16.66	S-3179	3.31	84.1	.446	11.3	50	8.8	1.0	26	52	229	2.10	53.3	0.105	2.7	20.0	SST	CG	N
0.656	16.66	S-1525	3.50	88.9	.594	15.1	.29	.05	2.9	74	.83	3.7	.60	15.4	0.031	0.8	18.5	SST	C	N
0.656	16.66	11393	3.50	88.9	.562	14.3	2.3	.40	2.7	69	6.1	27	.79	20.0	0.047	1.2	15.8	HD	C	GI
0.656	16.66	11811	3.59	91.3	.428	10.9	85	15	.80	20	68	303	2.28	57.9	0.114	2.9	20.0	SPR	CG	Z
0.656	16.66	3337	4.00	101.6	.542	13.8	6.4	1.1	1.6	40	10	45	.80	20.3	0.057	1.4	13.0	SPR	C	Z
0.656	16.66	2684	4.94	125.4	.532	13.5	4.6	.80	2.9	73	13	58	1.57	39.8	0.062	1.6	24.3	HD	C	Z
0.656	16.66	4265	6.00	152.4	.532	13.5	2.7	.47	3.5	88	9.2	41	2.54	64.6	0.062	1.6	40.0	SPR	C	Z
0.656	16.66	1883	6.50	165.1	.532	13.5	3.4	.59	3.9	98	13	58	2.05	52.0	0.062	1.6	32.0	HD	C	Z
0.656	16.66	2805	6.63	168.3	.340	8.6	227	40	.71	18	161	717	5.37	136.4	0.158	4.0	34.0	HD	CG	Z
0.656	16.66	1825	7.75	196.9	.332	8.4	261	46	.66	17	172	767	5.43	137.8	0.162	4.1	33.5	HD	CG	Z
0.656	16.66	10289	9.50	241.3	.512	13.0	4.9	.86	3.9	100	19	86	3.06	77.7	0.072	1.8	41.5	SPR	C	Z
0.656	16.66	12116	11.1	281.8	.474	12.0	9.6	1.7	3.8	97	37	163	5.37	136.4	0.091	2.3	59.0	SPR	CG	Z
0.656	16.66	4019	18.5	469.9	.522	13.3	2.0	.35	8.2	209	16	73	4.96	125.9	0.067	1.7	73.0	HD	C	BO
0.660	16.76	71865	.63	16.0	.562	14.3	23	4.1	.41	10	9.6	43	.17	4.4	0.049	1.2	3.50	MW	CG	N
0.660	16.76	71865S	.63	16.0	.562	14.3	20	3.5	.33	8.3	6.5	29	.17	4.4	0.049	1.2	3.50	SST	CG	N
0.660	16.76	71877	.63	16.0	.550	14.0	36	6.3	.35	8.9	13	56	.20	5.1	0.055	1.4	3.63	MW	CG	N
0.660	16.76	71877S	.63	16.0	.550	14.0	31	5.4	.28	7.1	8.6	38	.20	5.1	0.055	1.4	3.63	SST	CG	N
0.660	16.76	71889	.63	16.0	.534	13.6	56	9.7	.34	8.6	19	84	.24	6.2	0.063	1.6	3.88	MW	CG	N
0.660	16.76	71889S	.63	16.0	.534	13.6	47	8.3	.27	6.9	13	57	.24	6.2	0.063	1.6	3.88	SST	CG	N
0.660	16.76	71901	.63	16.0	.526	13.4	71	12	.32	8.2	23	101	.27	6.8	0.067	1.7	4.00	MW	CG	N
0.660	16.76	71901S	.63	16.0	.526	13.4	60	11	.26	6.5	15	68	.27	6.8	0.067	1.7	4.00	SST	CG	N
0.660	16.76	71913	.63	16.0	.516	13.1	94	16	.28	7.2	27	119	.29	7.3	0.072	1.8	4.00	MW	CG	N
0.660	16.76	71913S	.63	16.0	.516	13.1	80	14	.22	5.7	18	80	.29	7.3	0.072	1.8	4.00	SST	CG	N
0.660	16.76	71866	.75	19.1	.562	14.3	18	3.2	.53	13	9.6	43	.20	5.0	0.049	1.2	4.00	MW	CG	N
0.660	16.76	71866S	.75	19.1	.562	14.3	15	2.7	.42	11	6.5	29	.20	5.0	0.049	1.2	4.00	SST	CG	N
0.660	16.76	71878	.75	19.1	.550	14.0	29	5.1	.44	11	13	56	.22	5.6	0.055	1.4	4.00	MW	CG	N
0.660	16.76	71878S	.75	19.1	.550	14.0	25	4.3	.35	8.9	8.6	38	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.660	16.76	71890	.75	19.1	.534	13.6	45	7.8	.43	11	19	84	.28	7.0	0.063	1.6	4.38	MW	CG	N
0.660	16.76	71890S	.75	19.1	.534	13.6	38	6.6	.34	8.6	13	57	.28	7.0	0.063	1.6	4.38	SST	CG	N
0.660	16.76	71902	.75	19.1	.526	13.4	56	9.9	.40	10	23	101	.30	7.7	0.067	1.7	4.50	MW	CG	N
0.660	16.76	71902S	.75	19.1	.526	13.4	48	8.4	.32	8.1	15	68	.30	7.7	0.067	1.7	4.50	SST	CG	N
0.660	16.76	71914	.75	19.1	.516	13.1	75	13	.36	9.1	27	119	.32	8.2	0.072	1.8	4.50	MW	CG	N
0.660	16.76	71914S	.75	19.1	.516	13.1	63	11	.28	7.2	18	80	.32	8.2	0.072	1.8	4.50	SST	CG	N
0.660	16.76	71867	.88	22.4	.562	14.3	15	2.7	.63	16	9.6	43	.21	5.4	0.049	1.2	4.38	MW	CG	N
0.660	16.76	71867S	.88	22.4	.562	14.3	13	2.3	.50	13	6.5	29	.21	5.4	0.049	1.2	4.38	SST	CG	N
0.660	16.76	71879	.88	22.4	.550	14.0	24	4.2	.53	13	13	56	.25	6.3	0.055	1.4	4.50	MW	CG	N
0.660	16.76	71879S	.88	22.4	.550	14.0	20	3.6	.42	11	8.6	38	.25	6.3	0.055	1.4	4.50	SST	CG	N
0.660	16.76	71891	.88	22.4	.534	13.6	37	6.5	.51	13	19	84	.31	7.8	0.063	1.6	4.88	MW	CG	N
0.660	16.76	71891S	.88	22.4	.534	13.6	32	5.5	.41	10	13	57	.31	7.8	0.063	1.6	4.88	SST	CG	N
0.660	16.76	71903	.88	22.4	.526	13.4	47	8.2	.48	12	23	101	.34	8.5	0.067	1.7	5.00	MW	CG	N
0.660	16.76	71903S	.88	22.4	.526	13.4	40	7.0	.39	9.8	15	68	.34	8.5	0.067	1.7	5.00	SST	CG	N
0.660	16.76	71915	.88	22.4	.516	13.1	62	11	.43	11	27	119	.37	9.4	0.072	1.8	5.13	MW	CG	N
0.660	16.76	71915S	.88	22.4	.516	13.1	53	9.2	.34	8.7	18	80	.37	9.4	0.072	1.8	5.13	SST	CG	N
0.660	16.76	71868	1.00	25.4	.562	14.3	13	2.3	.73	19	9.6	43	.23	5.9	0.049	1.2	4.75	MW	CG	N
0.660	16.76	71868S	1.00	25.4	.562	14.3	11	2.0	.58	15	6.5	29	.23	5.9	0.049	1.2	4.75	SST	CG	N
0.660	16.76	71880	1.00	25.4	.550	14.0	21	3.6	.61	15	13	56	.27	6.8	0.055	1.4	4.88	MW	CG	N
0.660	16.76	71880S	1.00	25.4	.550	14.0	18	3.1	.49	12	8.6	38	.27	6.8	0.055	1.4	4.88	SST	CG	N
0.660	16.76	71892	1.00	25.4	.534	13.6	32	5.6	.60	15	19	84	.34	8.6	0.063	1.6	5.38	MW	CG	N
0.660	16.76	71892S	1.00	25.4	.534	13.6	27	4.7	.47	12	13	57	.34	8.6	0.063	1.6	5.38	SST	CG	N
0.660	16.76	71904	1.00	25.4	.526	13.4	40	7.0	.57	14	23	101	.37	9.4	0.067	1.7	5.50	MW	CG	N
0.660	16.76	71904S	1.00	25.4	.526	13.4	34	6.0	.45	11	15	68	.37	9.4	0.067	1.7	5.50	SST	CG	N
0.660	16.76	71916	1.00	25.4	.516	13.1	53	9.3	.51	13	27	119	.41	10.3	0.072	1.8	5.63	MW	CG	N
0.660	16.76	71916S	1.00	25.4	.516	13.1	45	7.9	.40	10	18	80	.41	10.3	0.072	1.8	5.63	SST	CG	N
0.660	16.76	71869	1.25	31.8	.562	14.3	10	1.8	.93	24	9.6	43	.27	6.8	0.049	1.2	5.50	MW	CG	N
0.660	16.76	71869S	1.25	31.8	.562	14.3	8.8	1.5	.74	19	6.5	29	.27	6.8	0.049	1.2	5.50	SST	CG	N
0.660	16.76	71881	1.25	31.8	.550	14.0	16	2.8	.78	20	13	56	.31	7.9	0.055	1.4	5.63	MW	CG	N
0.660	16.76	71881S	1.25	31.8	.550	14.0	14	2.4	.62	16	8.6	38	.31	7.9	0.055	1.4	5.63	SST	CG	N
0.660	16.76	71893	1.25	31.8	.534	13.6	25	4.3	.77	19	19	84	.39	10.0	0.063	1.6	6.25	MW	CG	N
0.660	16.76	71893S	1.25	31.8	.534	13.6	21	3.7	.61	16	13	57	.39	10.0	0.063	1.6	6.25	SST	CG	N
0.660	16.76	71905	1.25	31.8	.526	13.4	31	5.4	.73	19	23	101	.44	11.1	0.067	1.7	6.50	MW	CG	N
0.660	16.76	71905S	1.25	31.8	.526	13.4	26	4.6	.58	15	15	68	.44	11.1	0.067	1.7	6.50	SST	CG	N
0.660	16.76	71917	1.25	31.8	.516	13.1	41	7.2	.65	17	27	119	.48	12.1	0.072	1.8	6.63	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.660	16.76	71917S	1.25	31.8	.516	13.1	35	6.1	.52	13	18	80	.48	12.1	0.072	1.8	6.63	SST	CG	N
0.660	16.76	71870	1.50	38.1	.562	14.3	8.5	1.5	1.1	29	9.6	43	.31	7.8	0.049	1.2	6.25	MW	CG	N
0.660	16.76	71870S	1.50	38.1	.562	14.3	7.2	1.3	.90	23	6.5	29	.31	7.8	0.049	1.2	6.25	SST	CG	N
0.660	16.76	71882	1.50	38.1	.550	14.0	13	2.3	.95	24	13	56	.36	9.1	0.055	1.4	6.50	MW	CG	N
0.660	16.76	71882S	1.50	38.1	.550	14.0	11	2.0	.76	19	8.6	38	.36	9.1	0.055	1.4	6.50	SST	CG	N
0.660	16.76	71894	1.50	38.1	.534	13.6	20	3.5	.94	24	19	84	.46	11.6	0.063	1.6	7.25	MW	CG	N
0.660	16.76	71894S	1.50	38.1	.534	13.6	17	3.0	.75	19	13	57	.46	11.6	0.063	1.6	7.25	SST	CG	N
0.660	16.76	71906	1.50	38.1	.526	13.4	26	4.5	.89	23	23	101	.50	12.8	0.067	1.7	7.50	MW	CG	N
0.660	16.76	71906S	1.50	38.1	.526	13.4	22	3.8	.71	18	15	68	.50	12.8	0.067	1.7	7.50	SST	CG	N
0.660	16.76	71918	1.50	38.1	.516	13.1	34	5.9	.80	20	27	119	.55	13.9	0.072	1.8	7.63	MW	CG	N
0.660	16.76	71918S	1.50	38.1	.516	13.1	28	5.0	.63	16	18	80	.55	13.9	0.072	1.8	7.63	SST	CG	N
0.660	16.76	71871	1.75	44.5	.562	14.3	7.2	1.3	1.3	34	9.6	43	.34	8.7	0.049	1.2	7.00	MW	CG	N
0.660	16.76	71871S	1.75	44.5	.562	14.3	6.1	1.1	1.1	27	6.5	29	.34	8.7	0.049	1.2	7.00	SST	CG	N
0.660	16.76	71883	1.75	44.5	.550	14.0	11	2.0	1.1	28	13	56	.40	10.1	0.055	1.4	7.25	MW	CG	N
0.660	16.76	71883S	1.75	44.5	.550	14.0	9.6	1.7	.89	23	8.6	38	.40	10.1	0.055	1.4	7.25	SST	CG	N
0.660	16.76	71895	1.75	44.5	.534	13.6	17	3.0	1.1	28	19	84	.52	13.2	0.063	1.6	8.25	MW	CG	N
0.660	16.76	71895S	1.75	44.5	.534	13.6	15	2.5	.88	22	13	57	.52	13.2	0.063	1.6	8.25	SST	CG	N
0.660	16.76	71907	1.75	44.5	.526	13.4	22	3.8	1.1	27	23	101	.57	14.5	0.067	1.7	8.50	MW	CG	N
0.660	16.76	71907S	1.75	44.5	.526	13.4	18	3.2	.84	21	15	68	.57	14.5	0.067	1.7	8.50	SST	CG	N
0.660	16.76	71919	1.75	44.5	.516	13.1	28	4.9	.95	24	27	119	.63	16.0	0.072	1.8	8.75	MW	CG	N
0.660	16.76	71919S	1.75	44.5	.516	13.1	24	4.2	.75	19	18	80	.63	16.0	0.072	1.8	8.75	SST	CG	N
0.660	16.76	71872	2.00	50.8	.562	14.3	6.3	1.1	1.5	39	9.6	43	.39	9.8	0.049	1.2	7.88	MW	CG	N
0.660	16.76	71872S	2.00	50.8	.562	14.3	5.3	.93	1.2	31	6.5	29	.39	9.8	0.049	1.2	7.88	SST	CG	N
0.660	16.76	71884	2.00	50.8	.550	14.0	9.8	1.7	1.3	33	13	56	.44	11.2	0.055	1.4	8.00	MW	CG	N
0.660	16.76	71884S	2.00	50.8	.550	14.0	8.3	1.5	1.0	26	8.6	38	.44	11.2	0.055	1.4	8.00	SST	CG	N
0.660	16.76	71896	2.00	50.8	.534	13.6	15	2.6	1.3	32	19	84	.58	14.8	0.063	1.6	9.25	MW	CG	N
0.660	16.76	71896S	2.00	50.8	.534	13.6	13	2.2	1.0	26	13	57	.58	14.8	0.063	1.6	9.25	SST	CG	N
0.660	16.76	71908	2.00	50.8	.526	13.4	19	3.3	1.2	31	23	101	.64	16.2	0.067	1.7	9.50	MW	CG	N
0.660	16.76	71908S	2.00	50.8	.526	13.4	16	2.8	.97	25	15	68	.64	16.2	0.067	1.7	9.50	SST	CG	N
0.660	16.76	71920	2.00	50.8	.516	13.1	25	4.3	1.1	28	27	119	.70	17.8	0.072	1.8	9.75	MW	CG	N
0.660	16.76	71920S	2.00	50.8	.516	13.1	21	3.6	.86	22	18	80	.70	17.8	0.072	1.8	9.75	SST	CG	N
0.660	16.76	71873	2.25	57.2	.562	14.3	5.5	.96	1.7	44	9.6	43	.42	10.7	0.049	1.2	8.63	MW	CG	N
0.660	16.76	71873S	2.25	57.2	.562	14.3	4.7	.82	1.4	35	6.5	29	.42	10.7	0.049	1.2	8.63	SST	CG	N
0.660	16.76	71885	2.25	57.2	.550	14.0	8.6	1.5	1.5	37	13	56	.49	12.4	0.055	1.4	8.88	MW	CG	N
0.660	16.76	71885S	2.25	57.2	.550	14.0	7.3	1.3	1.2	30	8.6	38	.49	12.4	0.055	1.4	8.88	SST	CG	N
0.660	16.76	71897	2.25	57.2	.534	13.6	13	2.3	1.4	37	19	84	.64	16.2	0.063	1.6	10.1	MW	CG	N
0.660	16.76	71897S	2.25	57.2	.534	13.6	11	1.9	1.2	29	13	57	.64	16.2	0.063	1.6	10.1	SST	CG	N
0.660	16.76	71909	2.25	57.2	.526	13.4	17	2.9	1.4	35	23	101	.70	17.7	0.067	1.7	10.4	MW	CG	N
0.660	16.76	71909S	2.25	57.2	.526	13.4	14	2.5	1.1	28	15	68	.70	17.7	0.067	1.7	10.4	SST	CG	N
0.660	16.76	71921	2.25	57.2	.516	13.1	22	3.8	1.2	32	27	119	.78	19.9	0.072	1.8	10.9	MW	CG	N
0.660	16.76	71921S	2.25	57.2	.516	13.1	18	3.2	.98	25	18	80	.78	19.9	0.072	1.8	10.9	SST	CG	N
0.660	16.76	71874	2.50	63.5	.562	14.3	5.0	.87	1.9	49	9.6	43	.46	11.7	0.049	1.2	9.38	MW	CG	N
0.660	16.76	71874S	2.50	63.5	.562	14.3	4.2	.74	1.5	39	6.5	29	.46	11.7	0.049	1.2	9.38	SST	CG	N
0.660	16.76	71886	2.50	63.5	.550	14.0	7.8	1.4	1.6	42	13	56	.53	13.4	0.055	1.4	9.63	MW	CG	N
0.660	16.76	71886S	2.50	63.5	.550	14.0	6.6	1.2	1.3	33	8.6	38	.53	13.4	0.055	1.4	9.63	SST	CG	N
0.660	16.76	71898	2.50	63.5	.534	13.6	12	2.0	1.6	41	19	84	.70	17.8	0.063	1.6	11.1	MW	CG	N
0.660	16.76	71898S	2.50	63.5	.534	13.6	9.9	1.7	1.3	33	13	57	.70	17.8	0.063	1.6	11.1	SST	CG	N
0.660	16.76	71910	2.50	63.5	.526	13.4	15	2.6	1.5	39	23	101	.77	19.6	0.067	1.7	11.5	MW	CG	N
0.660	16.76	71910S	2.50	63.5	.526	13.4	12	2.2	1.2	31	15	68	.77	19.6	0.067	1.7	11.5	SST	CG	N
0.660	16.76	71922	2.50	63.5	.516	13.1	19	3.4	1.4	35	27	119	.86	21.7	0.072	1.8	11.9	MW	CG	N
0.660	16.76	71922S	2.50	63.5	.516	13.1	16	2.9	1.1	28	18	80	.86	21.7	0.072	1.8	11.9	SST	CG	N
0.660	16.76	71875	2.75	69.9	.562	14.3	4.5	.79	2.1	54	9.6	43	.50	12.6	0.049	1.2	10.1	MW	CG	N
0.660	16.76	71875S	2.75	69.9	.562	14.3	3.8	.67	1.7	43	6.5	29	.50	12.6	0.049	1.2	10.1	SST	CG	N
0.660	16.76	71887	2.75	69.9	.550	14.0	7.0	1.2	1.8	46	13	56	.58	14.7	0.055	1.4	10.5	MW	CG	N
0.660	16.76	71887S	2.75	69.9	.550	14.0	6.0	1.0	1.4	37	8.6	38	.58	14.7	0.055	1.4	10.5	SST	CG	N
0.660	16.76	71899	2.75	69.9	.534	13.6	11	1.9	1.8	45	19	84	.76	19.2	0.063	1.6	12.0	MW	CG	N
0.660	16.76	71899S	2.75	69.9	.534	13.6	9.0	1.6	1.4	36	13	57	.76	19.2	0.063	1.6	12.0	SST	CG	N
0.660	16.76	71911	2.75	69.9	.526	13.4	13	2.3	1.7	43	23	101	.84	21.3	0.067	1.7	12.5	MW	CG	N
0.660	16.76	71911S	2.75	69.9	.526	13.4	11	2.0	1.4	35	15	68	.84	21.3	0.067	1.7	12.5	SST	CG	N
0.660	16.76	71923	2.75	69.9	.516	13.1	18	3.1	1.5	39	27	119	.93	23.5	0.072	1.8	12.9	MW	CG	N
0.660	16.76	71923S	2.75	69.9	.516	13.1	15	2.6	1.2	31	18	80	.93	23.5	0.072	1.8	12.9	SST	CG	N
0.660	16.76	71876	3.00	76.2	.562	14.3	4.1	.72	2.3	60	9.6	43	.53	13.5	0.049	1.2	10.9	MW	CG	N
0.660	16.76	71876S	3.00	76.2	.562	14.3	3.5	.61	1.9	47	6.5	29	.53	13.5	0.049	1.2	10.9	SST	CG	N
0.660	16.76	71888	3.00	76.2	.550	14.0	6.4	1.1	2.0	50	13	56	.62	15.7	0.055	1.4	11.3	MW	CG	N
0.660	16.76	71888S	3.00	76.2	.550	14.0	5.4	.95	1.6	40	8.6	38	.62	15.7	0.055	1.4	11.3	SST	CG	N
0.660	16.76	71900	3.00	76.2	.534	13.6	9.7	1.7	2.0	50	19	84	.82	20.8	0.063	1.6	13.0	MW	CG	N
0.660	16.76	71900S	3.00	76.2	.534	13.6	8.2	1.4	1.6	40	13	57	.82	20.8	0.063	1.6	13.0	SST	CG	N
0.660	16.76	71912	3.00	76.2	.526	13.4	12	2.1	1.9	48	23	101	.90	23.0	0.067	1.7	13.5	MW	CG	N
0.660	16.76	71912S	3.00	76.2	.526	13.4	10	1.8	1.5	38	15	68	.90	23.0	0.067	1.7	13.5	SST	CG	N
0.660	16.76	71924	3.00	76.2	.516	13.1	16	2.8	1.7	43	27	119	1.01	25.6	0.072	1.8	14.0	MW	CG	N
0.660	16.76	71924S	3.00	76.2	.516	13.1	14	2.4	1.3	34	18	80	1.01	25.6	0.072	1.8	14.0	SST	CG	N
0.671	17.04	B9-6	.38	9.5	.589	15.0	16	2.8	.21	5.4	3.4	15	.16	4.2	0.041	1.0	3.00	SPR	C	Z
0.671	17.04	10520	.38	9.5	.511	13.0	380	67	.07	1.7	26	114	.22	5.6	0.080	2.0	2.75	SPR	CG	Z
0.671	17.04	N-80	.41	10.3	.461	11.7	838	147	.06	1.5	51	225	.32	8.0	0.105	2.7	3.00	SST	CG	N
0.671	17.04	B10-21	.47	11.9	.575	14.6	28	4.9	.22	5.5	6.0	27	.19	4.9	0.048	1.2	3.00	SST	C	N
0.671	17.04	S-21	.59	15.1	.601	15.3	2.5	.43	.38	9.7	.95	4.2	.21	5.3	0.035	0.9	5.00	SST	C	N
0.671	17.04	1865	.59	15.1	.527	13.4	90	16	.23	5.9	21	93	.36	9.1	0.072	1.8	4.00	MW	C	Z
0.671	17.04	S-924	.75	19.1	.575	14.6	13	2.3	.47	12	6.0	27	.20	5.0	0.048	1.2	4.00	SST	CG	N
0.671	17.04	S-1452	.75	19.1	.527	13.4	52	9.1	.34	8.6	18	79	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.671	17.04	2911	.81	20.6	.489	12.4	238	42	.15	3.8	36	160	.38	9.5	0.091	2.3	4.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.671	17.04	K-59A	.88	22.2	.543	13.8	31	5.4	.46	12	14	63	.42	10.6	0.064	1.6	5.50	SPR	C	Z
0.671	17.04	N-127	.88	22.2	.487	12.4	134	24	.26	6.5	34	153	.51	12.9	0.092	2.3	5.50	SST	CG	N
0.671	17.04	XX-19	.94	23.8	.561	14.2	9.4	1.6	.44	11	4.2	18	.50	12.6	0.055	1.4	8.00	SPR	C	Z
0.671	17.04	10010	1.06	27.0	.527	13.4	42	7.4	.45	11	19	84	.52	13.3	0.072	1.8	6.25	HD	C	Z
0.671	17.04	B7-70	1.09	27.8	.603	15.3	1.5	.26	.86	22	1.3	5.7	.24	6.0	0.034	0.9	7.00	SPR	CG	N
0.671	17.04	10467	1.13	28.6	.611	15.5	1.0	.18	.91	23	.94	4.2	.22	5.5	0.030	0.8	6.25	MW	C	Z
0.671	17.04	RR-66	1.13	28.6	.563	14.3	9.1	1.6	.75	19	6.8	30	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.671	17.04	BB-66	1.13	28.6	.511	13.0	51	8.9	.48	12	24	107	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.671	17.04	3758	1.13	28.6	.451	11.5	207	36	.27	6.9	56	251	.85	21.7	0.110	2.8	7.75	SPR	CG	Z
0.671	17.04	10725	1.19	30.2	.537	13.6	33	5.8	.49	12	16	72	.40	10.2	0.067	1.7	6.00	SPR	CG	GI
0.671	17.04	11316	1.19	30.2	.511	13.0	63	11	.41	10	26	114	.52	13.2	0.080	2.0	6.50	SPR	CG	Z
0.671	17.04	S-784	1.25	31.8	.589	15.0	3.5	.62	1.0	26	3.5	16	.25	6.2	0.041	1.0	6.00	SST	CG	N
0.671	17.04	2999	1.25	31.8	.563	14.3	11	1.9	.78	20	8.5	38	.36	9.3	0.054	1.4	6.75	SPR	CG	Z
0.671	17.04	J-38	1.25	31.8	.563	14.3	9.5	1.7	.84	21	8.0	36	.36	9.3	0.054	1.4	6.75	SST	CG	N
0.671	17.04	4270	1.25	31.8	.555	14.1	8.6	1.5	.60	15	5.1	23	.65	16.6	0.058	1.5	10.3	SPR	C	Z
0.671	17.04	3275	1.25	31.8	.487	12.4	106	19	.35	8.9	37	165	.74	18.7	0.092	2.3	7.00	SPR	C	Z
0.671	17.04	12582	1.30	32.9	.475	12.1	141	25	.32	8.0	45	199	.78	19.9	0.098	2.5	7.00	SPR	C	N
0.671	17.04	10837	1.44	36.5	.607	15.4	1.3	.22	1.2	30	1.5	6.8	.24	6.1	0.032	0.8	6.50	SPR	C	Z
0.671	17.04	4262	1.44	36.5	.527	13.4	40	7.0	.47	12	19	84	.47	11.9	0.072	1.8	6.50	SPR	CG	Z
0.671	17.04	S-786	1.50	38.1	.563	14.3	9.1	1.6	.88	22	8.0	36	.43	11.0	0.054	1.4	7.00	SST	C	N
0.671	17.04	2577	1.50	38.1	.561	14.2	8.3	1.5	1.0	26	8.5	38	.48	12.2	0.055	1.4	8.75	MW	CG	GI
0.671	17.04	2858	1.50	38.1	.561	14.2	8.3	1.5	1.0	26	8.5	38	.48	12.2	0.055	1.4	8.75	MW	CG	GI
0.671	17.04	2693	1.50	38.1	.527	13.4	31	5.5	.84	21	26	117	.56	14.2	0.072	1.8	7.75	MW	CG	GI
0.671	17.04	S-1468	1.50	38.1	.511	13.0	41	7.2	.58	15	24	107	.64	16.3	0.080	2.0	8.00	SST	CG	N
0.671	17.04	10701	1.50	38.1	.489	12.4	72	13	.50	13	36	160	.82	20.8	0.091	2.3	9.00	SPR	CG	Z
0.671	17.04	B10-69	1.56	39.7	.601	15.3	1.3	.23	1.3	32	1.6	7.3	.30	7.6	0.035	0.9	8.50	SPR	CG	Z
0.671	17.04	O-116	1.56	39.7	.563	14.3	5.8	1.0	.91	23	5.3	24	.65	16.5	0.054	1.4	11.0	SPR	C	Z
0.671	17.04	10757	1.56	39.7	.467	11.9	109	19	.46	12	50	223	.99	25.3	0.102	2.6	9.75	SPR	CG	N
0.671	17.04	11703	1.59	40.5	.561	14.2	9.4	1.6	.96	24	9.0	40	.44	11.2	0.055	1.4	8.00	SPR	CG	Z
0.671	17.04	3319	1.63	41.3	.511	13.0	29	5.0	.67	17	19	84	.96	24.4	0.080	2.0	12.0	SPR	CG	Z
0.671	17.04	S-104	1.69	42.8	.431	10.9	226	40	.31	7.9	71	314	1.08	27.4	0.120	3.0	9.00	SST	CG	N
0.671	17.04	B2-61	1.73	43.9	.563	14.3	12	2.0	.74	19	8.5	38	.41	10.3	0.054	1.4	6.50	SPR	C	GI
0.671	17.04	S-13	1.75	44.5	.577	14.7	4.6	.80	1.2	31	5.7	25	.40	10.1	0.047	1.2	7.50	SST	C	N
0.671	17.04	3893	1.75	44.5	.543	13.8	13	2.4	1.0	26	14	63	.70	17.9	0.064	1.6	10.0	SPR	C	Z
0.671	17.04	3698	1.81	46.0	.559	14.2	7.6	1.3	1.2	30	9.1	40	.62	15.6	0.056	1.4	10.0	SPR	C	Z
0.671	17.04	10682	1.84	46.8	.447	11.4	167	29	.38	9.7	64	283	1.09	27.7	0.112	2.8	9.75	SPR	CG	Z
0.671	17.04	10545	1.84	46.8	.441	11.2	183	32	.37	9.5	69	305	1.15	29.2	0.115	2.9	10.0	SPR	CG	Z
0.671	17.04	25	1.88	47.6	.511	13.0	30	5.3	.86	22	26	114	1.00	25.4	0.080	2.0	11.5	HD	C	Z
0.671	17.04	10357	1.88	47.6	.431	10.9	210	37	.37	9.4	77	344	1.26	32.0	0.120	3.0	10.5	SPR	CG	Z
0.671	17.04	S-1541	1.91	48.4	.583	14.8	1.9	.33	1.4	35	2.6	12	.53	13.4	0.044	1.1	12.0	SST	CG	N
0.671	17.04	S-360	1.91	48.4	.511	13.0	31	5.4	.78	20	24	107	.80	20.3	0.080	2.0	10.0	SST	CG	N
0.671	17.04	12518	1.94	49.2	.447	11.4	162	28	.39	10	64	283	1.23	31.3	0.112	2.8	10.0	SPR	C	N
0.671	17.04	S-64	2.00	50.8	.577	14.7	3.3	.59	1.6	39	5.2	23	.45	11.3	0.047	1.2	9.50	SST	CG	N
0.671	17.04	12086	2.00	50.8	.541	13.7	8.0	1.4	.93	24	7.4	33	1.07	27.2	0.065	1.7	16.5	SPR	CG	Z
0.671	17.04	12183	2.03	51.6	.517	13.1	24	4.2	.95	24	23	102	.92	23.5	0.077	2.0	12.0	SPR	CG	GI
0.671	17.04	10235	2.13	54.0	.445	11.3	135	24	.48	12	65	290	1.36	34.4	0.113	2.9	12.0	SPR	CG	GI
0.671	17.04	3036	2.22	56.4	.547	13.9	9.4	1.6	1.4	35	13	57	.74	18.9	0.062	1.6	12.0	SPR	CG	Z
0.671	17.04	B-20	2.31	58.7	.581	14.8	2.5	.44	1.8	46	4.5	20	.52	13.1	0.045	1.1	11.5	HD	CG	Z
0.671	17.04	12598	2.50	63.5	.581	14.8	2.7	.47	2.0	51	5.4	24	.50	12.6	0.045	1.1	11.0	MW	CG	N
0.671	17.04	11662	2.53	64.3	.563	14.3	5.2	.91	1.6	42	8.5	38	.65	16.5	0.054	1.4	12.0	SPR	CG	Z
0.671	17.04	S-808	2.56	65.1	.419	10.6	166	29	.49	12	81	361	1.73	44.0	0.126	3.2	13.8	SST	CG	N
0.671	17.04	4209	2.58	65.5	.569	14.5	8.2	1.4	.88	22	7.2	32	.41	10.4	0.051	1.3	7.00	SPR	CG	N
0.671	17.04	10562	2.91	73.8	.483	12.3	44	7.7	.90	23	40	176	1.53	38.8	0.094	2.4	15.3	SPR	C	Z
0.671	17.04	11744	3.00	76.2	.551	14.0	7.1	1.2	1.6	42	12	52	.87	22.1	0.060	1.5	13.5	SPR	C	Z
0.671	17.04	S-1363	3.31	84.1	.589	15.0	1.3	.24	2.8	71	3.8	17	.51	13.0	0.041	1.0	12.5	SST	CG	N
0.671	17.04	2613	3.50	88.9	.541	13.7	7.4	1.3	2.0	51	15	65	1.15	29.1	0.065	1.7	17.5	HD	CG	Z
0.671	17.04	11351	4.25	108.0	.611	15.5	.24	.04	3.7	14	.89	3.9	.16	4.0	0.030	0.8	18	SST	C	N
0.671	17.04	12013	5.00	127.0	.577	14.7	1.3	.22	4.0	101	5.1	23	1.03	26.3	0.047	1.2	22.0	SST	CG	N
0.671	17.04	11988	6.13	155.6	.575	14.6	1.0	.18	4.5	115	4.7	21	1.61	40.8	0.048	1.2	32.5	SPR	C	GI
0.671	17.04	1709	7.00	177.8	.511	13.0	8.8	1.5	2.9	74	26	114	2.76	70.1	0.080	2.0	34.5	SPR	CG	Z
0.671	17.04	12065	8.41	213.5	.551	14.0	7.2	1.3	1.6	41	12	52	.86	21.8	0.060	1.5	13.3	SPR	C	Z
0.687	17.45	S-334	.47	11.9	.637	16.2	1.3	.24	.36	9.2	.49	2.2	.11	2.7	0.025	0.6	3.25	SST	C	N
0.687	17.45	S-3120	.56	14.3	.639	16.2	.25	.04	.35	8.9	.09	.39	.21	5.3	0.024	0.6	7.75	SST	C	N
0.687	17.45	QQ-43	.63	15.9	.527	13.4	132	23	.19	4.9	25	112	.32	8.1	0.080	2.0	4.00	SPR	CG	Z
0.687	17.45	A-12	.63	15.9	.521	13.2	155	27	.18	4.6	28	125	.33	8.4	0.083	2.1	4.00	HD	CG	Z
0.687	17.45	K-52	.69	17.4	.579	14.7	19	3.4	.43	11	8.3	37	.24	6.2	0.054	1.4	4.50	SPR	CG	N
0.687	17.45	W-48	.72	18.2	.611	15.5	3.9	.68	.51	13	2.0	8.8	.21	5.3	0.038	1.0	4.50	SST	C	N
0.687	17.45	S-168	.72	18.2	.585	14.9	17	2.9	.39	10	6.6	29	.20	5.2	0.051	1.3	4.00	SST	CG	N
0.687	17.45	Q-57	.75	19.1	.607	15.4	3.9	.69	.51	13	2.0	8.9	.24	6.1	0.040	1.0	5.00	SST	C	N
0.687	17.45	2975	.75	19.1	.593	15.1	8.9	1.6	.52	13	4.6	20	.24	6.0	0.047	1.2	5.00	SPR	CG	Z
0.687	17.45	3250	.75	19.1	.589	15.0	16	2.8	.42	11	6.7	30	.25	6.2	0.049	1.2	4.00	SPR	C	Z
0.687	17.45	I-52	.75	19.1	.503	12.8	163	29	.22	5.7	36	162	.46	11.7	0.092	2.3	5.00	SPR	CG	Z
0.687	17.45	S-1110	.81	20.6	.623	15.8	2.3	.41	.65	17	1.5	6.8	.16	4.1	0.032	0.8	4.00	SST	C	N
0.687	17.45	11348	.81	20.6	.579	14.7	11	2.0	.50	13	5.7	25	.31	7.9	0.054	1.4	5.75	SST	CG	N
0.687	17.45	2845	.81	20.6	.577	14.7	17	2.9	.53	13	8.8	39	.28	7.2	0.055	1.4	5.13	HD	CG	Z
0.687	17.45	S-1610	.81	20.6	.541	13.7	39	6.8	.37	9.5	15	65	.44	11.1	0.073	1.9	6.00	SST	CG	N
0.687	17.45	3849	.88	22.2	.571	14.5	20	3.5	.51	13	10	46	.36	9.2	0.058	1.5	5.25	SPR	C	Z
0.687	17.45	S-1299	.88	22.2	.553	14.0	38	6.7	.39	9.8	15	66	.32	8.1	0.067	1.7	4.75	SST	CG	N
0.687	17.45	Z-10	.91	23.0	.601	15.3	4.6	.81	.65	16	3.0	13	.26	6.6	0.043	1.1	6.00	SPR	CG	N
0.687	17.45	DD-40	.94	23.8	.627	15.9	1.0	.18	.73	18	.75	3.3	.21	5.3	0.030	0.8	6.00	MW	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.687	17.45	3949	.94	23.8	.563	14.3	18	3.2	.46	12	8.4	37	.48	12.2	0.062	1.6	6.75	SPR	C	Z
0.687	17.45	S-800	.97	24.6	.617	15.7	2.3	.40	.79	20	1.8	8.0	.18	4.4	0.035	0.9	5.00	SST	CG	N
0.687	17.45	12332	.97	24.6	.605	15.4	7.5	1.3	.52	13	3.9	18	.21	5.2	0.041	1.0	4.00	SPR	C	Z
0.687	17.45	11105	1.00	25.4	.617	15.7	3.1	.55	.81	21	2.5	11	.19	4.9	0.035	0.9	4.50	MW	C	Z
0.687	17.45	3654	1.00	25.4	.595	15.1	6.1	1.1	.72	18	4.4	20	.28	7.0	0.046	1.2	6.00	SPR	CG	Z
0.687	17.45	11345	1.00	25.4	.579	14.7	8.5	1.5	.62	16	5.3	24	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.687	17.45	3349	1.00	25.4	.573	14.6	14	2.5	.59	15	8.4	37	.41	10.5	0.057	1.4	6.25	HD	C	Z
0.687	17.45	3350	1.00	25.4	.571	14.5	15	2.5	.57	14	8.2	37	.44	11.0	0.058	1.5	6.50	SPR	C	Z
0.687	17.45	12148	1.00	25.4	.501	12.7	128	22	.29	7.4	38	167	.56	14.2	0.093	2.4	6.00	SPR	CG	Z
0.687	17.45	3943	1.00	25.4	.363	9.2	2281	399	.07	1.9	167	742	.81	20.6	0.162	4.1	5.00	SPR	CG	Z
0.687	17.45	MM-93	1.00	25.4	.307	7.8	5087	891	.05	1.2	244	1084	.95	24.1	0.190	4.8	5.00	SPR	CG	N
0.687	17.45	1950	1.03	26.2	.603	15.3	8.3	1.5	.51	13	4.2	19	.21	5.3	0.042	1.1	4.00	SPR	C	Z
0.687	17.45	AA-82	1.03	26.2	.547	13.9	43	7.6	.37	9.3	16	71	.42	10.7	0.070	1.8	5.00	SST	C	N
0.687	17.45	B5-38	1.09	27.8	.605	15.4	6.7	1.2	.59	15	3.9	18	.22	5.5	0.041	1.0	4.25	SPR	C	N
0.687	17.45	S-1291	1.13	28.6	.579	14.7	14	2.4	.56	14	7.8	35	.27	6.9	0.054	1.4	5.00	SST	CG	N
0.687	17.45	4117	1.13	28.6	.527	13.4	66	12	.38	9.7	25	112	.48	12.2	0.080	2.0	6.00	SPR	CG	Z
0.687	17.45	4221	1.13	28.6	.519	13.2	82	14	.36	9.0	29	129	.50	12.8	0.084	2.1	6.00	SPR	CG	Z
0.687	17.45	10079	1.13	28.6	.431	10.9	631	111	.14	3.7	91	406	.70	17.9	0.128	3.3	5.50	SPR	CG	Z
0.687	17.45	K-15	1.19	30.2	.579	14.7	7.1	1.2	.70	18	5.0	22	.49	12.3	0.054	1.4	8.00	SST	C	N
0.687	17.45	11312	1.19	30.2	.511	13.0	95	17	.33	8.3	31	139	.51	12.9	0.088	2.2	5.75	SST	CG	N
0.687	17.45	S-1624	1.22	31.0	.607	15.4	3.0	.53	.98	25	2.9	13	.24	6.1	0.040	1.0	6.00	SST	CG	N
0.687	17.45	11707	1.22	31.0	.569	14.5	13	2.2	.78	20	9.9	44	.44	11.2	0.059	1.5	7.50	SPR	CG	Z
0.687	17.45	S-961	1.22	31.0	.561	14.2	20	3.5	.61	15	12	55	.38	9.6	0.063	1.6	6.00	SST	CG	N
0.687	17.45	3114	1.25	31.8	.579	14.7	11	1.9	.75	19	8.3	37	.40	10.1	0.054	1.4	6.25	SPR	C	Z
0.687	17.45	Z-41	1.25	31.8	.579	14.7	8.4	1.5	.87	22	7.3	33	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.687	17.45	S-1471	1.25	31.8	.563	14.3	19	3.3	.62	16	12	52	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.687	17.45	I-32	1.25	31.8	.559	14.2	20	3.5	.69	18	14	61	.45	11.4	0.064	1.6	7.00	SPR	CG	Z
0.687	17.45	10295	1.25	31.8	.557	14.1	28	5.0	.51	13	14	64	.37	9.5	0.065	1.7	5.75	SPR	CG	Z
0.687	17.45	505	1.25	31.8	.543	13.8	39	6.8	.47	12	18	82	.52	13.3	0.072	1.8	6.25	HD	C	Z
0.687	17.45	B8-58	1.25	31.8	.537	13.6	35	6.2	.55	14	20	87	.53	13.3	0.075	1.9	7.00	SST	CG	N
0.687	17.45	28	1.25	31.8	.505	12.8	89	16	.40	10	35	157	.75	19.1	0.091	2.3	7.25	HD	C	Z
0.687	17.45	11192	1.31	33.3	.505	12.8	67	12	.49	13	33	146	.82	20.8	0.091	2.3	9.00	HD	CG	Z
0.687	17.45	11680	1.31	33.3	.461	11.7	248	43	.26	6.5	64	284	.79	20.1	0.113	2.9	7.00	SPR	CG	Z
0.687	17.45	12025	1.34	34.1	.481	12.2	162	28	.31	7.9	50	225	.82	20.9	0.103	2.6	7.00	SPR	C	Z
0.687	17.45	11367	1.38	34.9	.527	13.4	41	7.1	.58	15	24	105	.62	15.7	0.080	2.0	7.75	SST	CG	N
0.687	17.45	EE-94	1.38	34.9	.447	11.4	327	57	.23	5.9	76	337	.84	21.3	0.120	3.0	7.00	SPR	CG	Z
0.687	17.45	S-267	1.44	36.5	.623	15.8	.67	.12	1.2	29	.77	3.4	.29	7.3	0.032	0.8	9.00	SST	CG	N
0.687	17.45	S-950	1.44	36.5	.601	15.3	3.8	.66	1.1	29	4.2	19	.27	6.8	0.043	1.1	6.25	SST	CG	N
0.687	17.45	S-1004	1.50	38.1	.607	15.4	2.4	.41	1.2	31	2.9	13	.28	7.1	0.040	1.0	7.00	SST	CG	N
0.687	17.45	S-1357	1.50	38.1	.605	15.4	4.0	.71	.91	23	3.7	16	.22	5.5	0.041	1.0	5.25	SST	CG	N
0.687	17.45	S-1424	1.50	38.1	.585	14.9	8.2	1.4	.80	20	6.6	29	.36	9.1	0.051	1.3	6.00	SST	C	N
0.687	17.45	2734	1.50	38.1	.561	14.2	21	3.6	.88	22	18	81	.41	10.4	0.063	1.6	6.50	MW	CG	GI
0.687	17.45	S-1387	1.50	38.1	.553	14.0	21	3.7	.70	18	15	66	.47	11.9	0.067	1.7	7.00	SST	CG	N
0.687	17.45	B9-49	1.50	38.1	.551	14.0	26	4.5	.63	16	16	73	.48	12.1	0.068	1.7	7.00	SPR	CG	N
0.687	17.45	11537	1.50	38.1	.543	13.8	28	4.8	.67	17	18	82	.65	16.5	0.072	1.8	8.00	SPR	C	Z
0.687	17.45	11649	1.50	38.1	.537	13.6	33	5.8	.63	16	21	93	.60	15.2	0.075	1.9	8.00	SPR	CG	GI
0.687	17.45	11611	1.50	38.1	.517	13.1	69	12	.44	11	30	134	.68	17.3	0.085	2.2	7.00	SPR	CG	Z
0.687	17.45	A-64	1.50	38.1	.477	12.1	118	21	.45	11	53	237	1.00	25.3	0.105	2.7	9.50	SPR	CG	N
0.687	17.45	2910	1.50	38.1	.447	11.4	252	44	.30	7.7	76	337	1.02	25.9	0.120	3.0	8.50	SPR	CG	Z
0.687	17.45	S-276	1.50	38.1	.447	11.4	219	38	.32	8.0	69	308	1.02	25.9	0.120	3.0	8.50	SST	CG	N
0.687	17.45	KK-75	1.53	38.9	.507	12.9	42	7.3	.81	21	34	152	.70	17.7	0.090	2.3	7.75	PB	CG	N
0.687	17.45	1917	1.56	39.7	.497	12.6	87	15	.46	12	40	178	.81	20.5	0.095	2.4	8.50	SPR	CG	Z
0.687	17.45	12172	1.63	41.3	.567	14.4	7.6	1.3	.91	23	6.8	30	.72	18.3	0.060	1.5	12.0	SPR	CG	Z
0.687	17.45	B9-54	1.63	41.3	.545	13.8	31	5.5	.57	14	18	79	.57	14.4	0.071	1.8	7.00	SPR	C	N
0.687	17.45	S-3107	1.63	41.3	.503	12.8	61	11	.56	14	34	150	.92	23.4	0.092	2.3	9.00	SST	C	N
0.687	17.45	12099	1.63	41.3	.475	12.1	103	18	.46	12	47	210	1.17	29.6	0.106	2.7	11.0	SPR	CG	Z
0.687	17.45	AA-62	1.63	41.3	.427	10.8	380	67	.24	6.2	93	412	1.07	27.2	0.130	3.3	8.25	SPR	CG	N
0.687	17.45	11559	1.69	42.8	.565	14.4	12	2.0	1.0	26	12	53	.61	15.5	0.061	1.5	9.00	SPR	CG	Z
0.687	17.45	10872	1.75	44.5	.619	15.7	1.1	.20	1.4	37	1.7	7.4	.31	7.8	0.034	0.9	8.00	SPR	C	Z
0.687	17.45	11865	1.75	44.5	.571	14.5	8.0	1.4	1.2	29	9.2	41	.59	15.1	0.058	1.5	9.25	SST	C	N
0.687	17.45	S-71	1.81	46.0	.503	12.8	54	9.5	.62	16	34	150	.92	23.4	0.092	2.3	10.0	SST	CG	N
0.687	17.45	10416	1.81	46.0	.391	9.9	734	129	.18	4.6	133	593	1.18	30.1	0.148	3.8	8.00	SPR	CG	N
0.687	17.45	B2-65	1.84	46.7	.527	13.4	41	7.1	.62	16	25	112	.76	19.3	0.080	2.0	8.50	SPR	CL	N
0.687	17.45	11111	1.88	47.6	.505	12.8	36	6.3	.42	11	15	67	1.46	37.0	0.091	2.3	15.0	HD	C	Z
0.687	17.45	12596	1.91	48.4	.583	14.8	4.4	.78	1.3	32	5.6	25	.64	16.2	0.052	1.3	11.3	MW	C	N
0.687	17.45	S-1620	1.91	48.4	.521	13.2	34	6.0	.77	19	26	117	.83	21.1	0.083	2.1	10.0	SST	CG	N
0.687	17.45	I-60	1.94	49.2	.563	14.3	9.5	1.7	1.2	32	12	52	.62	15.7	0.062	1.6	10.0	SST	CG	N
0.687	17.45	10468	1.94	49.2	.503	12.8	49	8.6	.74	19	36	161	1.20	30.4	0.092	2.3	12.0	SPR	C	Z
0.687	17.45	12595	2.00	50.8	.593	15.1	2.7	.48	1.4	37	4.0	18	.55	14.0	0.047	1.2	11.8	MW	CG	N
0.687	17.45	2580	2.00	50.8	.579	14.7	6.9	1.2	1.5	38	10	46	.49	12.3	0.054	1.4	9.00	MW	CG	Z
0.687	17.45	GG-79	2.00	50.8	.547	13.9	10	1.8	.88	22	9.2	41	1.12	28.4	0.070	1.8	16.0	SPR	CG	Z
0.687	17.45	12220	2.00	50.8	.525	13.3	46	8.1	.56	14	26	116	.73	18.5	0.081	2.1	8.00	SPR	C	Z
0.687	17.45	3022	2.06	52.4	.477	12.1	104	18	.51	13	53	237	1.21	30.7	0.105	2.7	10.5	SPR	C	Z
0.687	17.45	3039	2.13	54.0	.567	14.4	9.4	1.7	1.2	31	11	51	.60	15.2	0.060	1.5	10.0	SPR	CG	Z
0.687	17.45	3097	2.13	54.0	.527	13.4	38	6.6	.67	17	25	112	.72	18.3	0.080	2.0	9.00	SPR	CG	Z
0.687	17.45	3964	2.19	55.6	.573	14.6	6.7	1.2	1.4	37	9.8	43	.63	15.9	0.057	1.4	11.0	SPR	CG	Z
0.687	17.45	S-3138	2.25	57.2	.567	14.4	8.2	1.4	1.3	33	11	48	.60	15.2	0.060	1.5	10.0	SST	CG	N
0.687	17.45	10012	2.25	57.2	.531	13.5	39	6.9	.60	15	23	104	.70	17.8	0.078	2.0	8.00	SPR	C	Z
0.687	17.45	S-59	2.28	57.9	.535	13.6	19	3.3	1.1	28	20	90	.91	23.2	0.076	1.9	12.0	SST	CG	N
0.687	17.45	10411	2.38	60.3	.579	14.7	9.6	1.7	.86	22	8.3	37	.38	9.6	0.054	1.4	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.687	17.45	B8-43	2.38	60.3	.569	14.5	4.5	.78	1.4	36	6.4	28	.94	24.0	0.059	1.5	16.0	SST	CG	N
0.687	17.45	11984	2.38	60.3	.511	13.0	43	7.5	.77	20	33	148	1.00	25.3	0.088	2.2	11.3	SPR	CG	Z
0.687	17.45	11972	2.41	61.1	.565	14.4	6.8	1.2	1.6	39	10	47	.85	21.7	0.061	1.5	14.0	SPR	CG	Z
0.687	17.45	11296	2.50	63.5	.611	15.5	.93	.16	1.9	49	1.8	8.1	.56	14.2	0.038	1.0	13.8	MW	C	Z
0.687	17.45	S-372	2.50	63.5	.575	14.6	4.6	.80	1.8	45	8.2	37	.71	18.0	0.056	1.4	12.7	SST	CG	N
0.687	17.45	S-1592	2.50	63.5	.573	14.6	4.9	.86	1.8	45	8.7	39	.73	18.5	0.057	1.4	12.8	SST	CG	N
0.687	17.45	11687	2.50	63.5	.569	14.5	8.3	1.4	1.3	33	11	48	.62	15.7	0.059	1.5	10.5	SPR	CG	Z
0.687	17.45	12022	2.50	63.5	.559	14.2	9.1	1.6	1.5	39	14	61	.83	21.1	0.064	1.6	13.0	SPR	CG	Z
0.687	17.45	2739	2.50	63.5	.417	10.6	270	47	.38	9.7	103	458	1.69	42.9	0.135	3.4	12.5	SPR	CG	Z
0.687	17.45	S-3250	2.53	64.3	.571	14.5	3.4	.60	1.4	36	4.9	22	1.10	28.0	0.058	1.5	19.0	SST	CG	N
0.687	17.45	B17-165	2.53	64.3	.543	13.8	12	2.1	1.4	35	16	72	1.15	29	0.072	1.8	16.0	HD	CG	N
0.687	17.45	10654	2.59	65.9	.569	14.5	4.5	.78	1.6	42	7.3	33	.94	24.0	0.059	1.5	16.0	SST	CG	N
0.687	17.45	2998	2.66	67.5	.623	15.8	.44	.08	2.2	55	.95	4.2	.49	12.4	0.032	0.8	14.3	MW	C	Z
0.687	17.45	12282	2.69	68.2	.603	15.3	2.8	.49	1.5	39	4.2	19	.38	9.6	0.042	1.1	8.00	SPR	C	Z
0.687	17.45	3674	2.69	68.2	.495	12.6	46	8.1	.89	23	41	183	1.42	36.0	0.096	2.4	14.8	SPR	CG	Z
0.687	17.45	10556	2.75	69.9	.601	15.3	1.9	.34	2.3	57	4.4	19	.50	12.6	0.043	1.1	11.5	SPR	CG	Z
0.687	17.45	DD-86	2.75	69.9	.547	13.9	11	1.9	1.5	37	16	71	.98	24.9	0.070	1.8	14.0	SST	CG	N
0.687	17.45	12221	2.78	70.6	.515	13.1	40	7.0	.77	20	31	138	.95	24.0	0.086	2.2	11.0	SPR	CG	Z
0.687	17.45	12416	2.91	73.8	.529	13.4	26	4.6	.93	23	24	108	.99	25.1	0.079	2.0	11.5	SPR	C	N
0.687	17.45	4375	2.97	75.4	.505	12.8	33	5.8	1.1	27	35	157	1.46	37.0	0.091	2.3	16.0	SPR	CG	Z
0.687	17.45	18	3.00	76.2	.593	15.1	3.0	.52	2.0	50	5.9	26	.56	14.3	0.047	1.2	11.0	HD	C	Z
0.687	17.45	3353	3.00	76.2	.543	13.8	12	2.2	1.5	38	18	82	1.19	30.2	0.072	1.8	15.5	HD	C	Z
0.687	17.45	12023	3.25	82.6	.555	14.1	8.4	1.5	1.8	45	15	67	1.02	26.0	0.066	1.7	15.5	SPR	CG	Z
0.687	17.45	3206	3.31	84.1	.613	15.6	.70	.12	2.7	68	1.9	8.4	.63	16.0	0.037	0.9	16.0	SPR	C	Z
0.687	17.45	3089	3.31	84.1	.593	15.1	1.8	.32	2.5	63	4.4	20	.84	21.3	0.047	1.2	17.0	SPR	C	Z
0.687	17.45	11416	3.38	85.7	.605	15.4	1.7	.30	2.3	58	3.9	18	.48	12.2	0.041	1.0	10.8	HD	C	Z
0.687	17.45	506	3.63	92.1	.543	13.8	10	1.8	1.8	45	18	82	1.37	34.7	0.072	1.8	18.0	HD	C	Z
0.687	17.45	35	4.00	101.6	.477	12.1	42	7.3	1.3	33	53	237	2.44	62.0	0.105	2.7	23.3	HD	CG	Z
0.687	17.45	12187	4.41	111.9	.527	13.4	16	2.9	1.5	39	25	112	1.44	36.6	0.080	2.0	18.0	SPR	CG	Z
0.687	17.45	3925	4.50	114.3	.577	14.7	4.7	.83	1.9	47	8.8	39	.77	19.6	0.055	1.4	13.0	SPR	C	Z
0.687	17.45	11529	4.63	117.5	.571	14.5	3.9	.68	2.6	67	10	46	1.15	29.1	0.058	1.5	18.8	SPR	CG	Z
0.687	17.45	10707	4.63	117.5	.543	13.8	7.2	1.3	2.6	65	18	82	1.80	45.7	0.072	1.8	25.0	SPR	CG	Z
0.687	17.45	11821	5.25	133.4	.507	12.9	15	2.6	2.3	59	34	152	2.88	73.2	0.090	2.3	32.0	SPR	CG	Z
0.687	17.45	358	5.75	146.1	.543	13.8	6.4	1.1	2.9	73	18	82	2.07	52.6	0.072	1.8	27.8	HD	C	Z
0.687	17.45	364	6.00	152.4	.543	13.8	6.2	1.1	3.0	76	18	82	2.16	54.9	0.072	1.8	29.0	HD	C	Z
0.687	17.45	2836	6.56	166.7	.537	13.6	6.0	1.1	3.9	100	24	105	2.63	66.7	0.075	1.9	35.0	MW	CG	GI
0.687	17.45	3961	9.50	241.3	.543	13.8	4.4	.78	4.2	106	18	82	2.92	74.1	0.072	1.8	39.5	SPR	C	Z
0.687	17.45	12592	12.1	308.0	.425	10.8	38	6.7	2.5	62	95	421	8.65	219.6	0.131	3.3	66.0	SPR	CG	Z
0.687	17.45	3384	16.0	406.4	.563	14.3	1.6	.28	7.7	196	13	56	3.50	89.0	0.062	1.6	55.5	HD	C	Z
0.687	17.45	512	16.0	406.4	.563	14.3	1.3	.23	9.5	241	13	56	4.28	108.7	0.062	1.6	68.0	HD	C	Z
0.690	17.53	71925	.69	17.5	.588	14.9	107	19	.09	2.3	9.7	43	.12	3.1	0.051	1.3	2.38	MW	CG	N
0.690	17.53	71925S	.69	17.5	.588	14.9	91	16	.07	1.8	6.6	29	.12	3.1	0.051	1.3	2.38	SST	CG	N
0.703	17.86	JJ-55	.50	12.7	.635	16.1	4.5	.78	.36	9.0	1.6	7.1	.14	3.7	0.034	0.9	3.25	SST	C	N
0.703	17.86	Q-53	.50	12.7	.635	16.1	2.5	.43	.32	8.2	.80	3.5	.18	4.5	0.034	0.9	4.25	SST	C	N
0.703	17.86	S-489	.50	12.7	.621	15.8	4.1	.71	.25	6.5	1.0	4.6	.25	6.2	0.041	1.0	5.00	SST	C	N
0.703	17.86	K-12	.50	12.7	.503	12.8	656	115	.07	1.8	45	202	.30	7.6	0.100	2.5	3.00	SPR	CG	N
0.703	17.86	MM-41	.53	13.5	.603	15.3	19	3.3	.32	8.1	6.1	27	.18	4.4	0.050	1.3	3.50	SST	CG	N
0.703	17.86	S-795	.59	15.1	.609	15.5	11	1.9	.41	10	4.4	19	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.703	17.86	4144	.63	15.9	.605	15.4	9.9	1.7	.33	8.4	3.3	15	.29	7.5	0.049	1.2	5.00	SPR	C	Z
0.703	17.86	I-62	.63	15.9	.595	15.1	19	3.4	.39	10	7.7	34	.22	5.5	0.054	1.4	4.00	SST	CG	N
0.703	17.86	OO-68	.66	16.7	.443	11.3	1091	191	.08	2.1	91	404	.52	13.2	0.130	3.3	4.00	SPR	CG	Z
0.703	17.86	QQ-42	.69	17.4	.643	16.3	.95	.17	.48	12	.46	2.0	.21	5.3	0.030	0.8	6.00	MW	C	Z
0.703	17.86	Q-64	.69	17.4	.621	15.8	5.0	.87	.46	12	2.3	10	.23	5.7	0.041	1.0	4.50	SST	C	N
0.703	17.86	PP-79	.69	17.4	.559	14.2	53	9.4	.32	8.0	17	75	.32	8.2	0.072	1.8	4.50	SST	CG	N
0.703	17.86	3846	.75	19.1	.645	16.4	.83	.15	.55	14	.45	2.0	.20	5.2	0.029	0.7	6.00	MW	C	Z
0.703	17.86	4224	.75	19.1	.623	15.8	4.2	.74	.55	14	2.3	10	.20	5.1	0.040	1.0	5.00	SPR	CG	Z
0.703	17.86	3880	.75	19.1	.579	14.7	40	7.1	.30	7.7	12	54	.31	7.9	0.062	1.6	4.00	HD	C	Z
0.703	17.86	2516	.75	19.1	.557	14.1	82	14	.32	8.2	26	117	.29	7.4	0.073	1.9	4.00	MW	CG	Z
0.703	17.86	EE-70	.75	19.1	.463	11.8	534	93	.13	3.2	68	302	.54	13.7	0.120	3.0	4.50	SST	CG	N
0.703	17.86	10427	.78	19.8	.653	16.6	.72	.13	.64	16	.46	2.1	.14	3.5	0.025	0.6	4.50	MW	C	Z
0.703	17.86	XX-53	.81	20.6	.579	14.7	18	3.1	.35	8.8	6.2	28	.47	11.8	0.062	1.6	6.50	SPR	C	Z
0.703	17.86	12216	.84	21.4	.621	15.8	7.0	1.2	.55	14	3.8	17	.21	5.2	0.041	1.0	4.00	SPR	C	Z
0.703	17.86	11429	.88	22.2	.503	12.8	166	29	.25	6.4	42	187	.55	14.0	0.100	2.5	5.50	SST	CG	N
0.703	17.86	H-32	1.00	25.4	.629	16.0	1.4	.25	.71	18	1.0	4.5	.29	7.3	0.037	0.9	7.75	SST	CG	N
0.703	17.86	K-21	1.00	25.4	.621	15.8	6.1	1.1	.59	15	3.6	16	.16	4.2	0.041	1.0	4.00	SST	CG	N
0.703	17.86	S-368	1.00	25.4	.559	14.2	27	4.7	.50	13	13	59	.50	12.8	0.072	1.8	7.00	SST	CG	N
0.703	17.86	3590	1.00	25.4	.521	13.2	108	19	.32	8.1	34	153	.55	13.9	0.091	2.3	6.00	HD	CG	Z
0.703	17.86	3916	1.00	25.4	.519	13.2	113	20	.32	8.0	36	158	.55	14.0	0.092	2.3	6.00	SPR	CG	Z
0.703	17.86	H-14	1.03	26.2	.541	13.7	38	6.7	.38	9.7	15	65	.65	16.5	0.081	2.1	8.00	SST	CG	N
0.703	17.86	11739	1.03	26.2	.519	13.2	150	26	.24	6.0	36	158	.55	14.0	0.092	2.3	5.00	SPR	C	Z
0.703	17.86	LL-62	1.03	26.2	.443	11.3	546	96	.17	4.2	91	404	.78	19.8	0.130	3.3	6.00	SPR	CG	Z
0.703	17.86	10471	1.06	27.0	.507	12.9	141	25	.30	7.7	43	190	.61	15.6	0.098	2.5	6.25	SPR	CG	Z
0.703	17.86	10526	1.06	27.0	.391	9.9	1300	228	.11	2.9	148	658	.94	23.8	0.156	4.0	6.00	SPR	CG	N
0.703	17.86	11760	1.09	27.8	.453	11.5	428	75	.20	5.0	84	372	.78	19.8	0.125	3.2	6.25	SPR	CG	Z
0.703	17.86	2575	1.09	27.8	.443	11.3	513	90	.25	6.3	127	565	.81	20.7	0.130	3.3	6.25	MW	CG	Z
0.703	17.86	B15-23	1.13	28.6	.575	14.6	26	4.6	.51	13	13	60	.35	8.9	0.064	1.6	5.50	SPR	CG	N
0.703	17.86	S-12	1.13	28.6	.573	14.6	14	2.5	.61	15	8.7	39	.52	13.2	0.065	1.7	8.00	SST	CG	N
0.703	17.86	S-1247	1.13	28.6	.533	13.5	65	11	.42	11	28	123	.53	13.5	0.085	2.2	6.25	SST	CG	N
0.703	17.86	2644	1.13	28.6	.453	11.5	485	85	.17	4.4	84	372	.72	18.3	0.125	3.2	5.75	SPR	CG	Z
0.703	17.86	A10-46	1.13	28.6	.427	10.8	680	119	.16	4.0	108	478	.86	21.9	0.138	3.5	6.25	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.703	17.86	2573	1.19	30.2	.639	16.2	1.2	.22	.96	24	1.2	5.3	.22	5.7	0.032	0.8	6.00	HD	C	Z
0.703	17.86	11878	1.19	30.2	.601	15.3	6.2	1.1	.83	21	5.2	23	.36	9.1	0.051	1.3	7.00	SST	CG	N
0.703	17.86	11293	1.19	30.2	.533	13.5	79	14	.37	9.4	29	131	.51	13.0	0.085	2.2	6.00	SPR	CG	Z
0.703	17.86	3951	1.25	31.8	.613	15.6	6.9	1.2	.74	19	5.1	23	.23	5.7	0.045	1.1	5.00	SPR	CG	Z
0.703	17.86	AA-69	1.25	31.8	.543	13.8	62	11	.37	9.5	23	103	.44	11.2	0.080	2.0	5.50	SST	CG	N
0.703	17.86	2676	1.25	31.8	.517	13.1	118	21	.43	11	51	229	.65	16.5	0.093	2.4	6.00	MW	C	Z
0.703	17.86	B11-66	1.25	31.8	.453	11.5	428	75	.20	5.0	84	372	.78	19.8	0.125	3.2	6.25	SPR	CG	Z
0.703	17.86	11943	1.28	32.5	.567	14.4	30	5.3	.54	14	16	72	.41	10.4	0.068	1.7	6.00	SPR	CG	Z
0.703	17.86	10139	1.31	33.3	.569	14.5	28	4.9	.55	14	15	68	.47	11.9	0.067	1.7	6.00	SPR	C	Z
0.703	17.86	10920	1.31	33.3	.513	13.0	83	15	.47	12	39	174	.78	19.9	0.095	2.4	8.25	SPR	CG	Z
0.703	17.86	3164	1.34	34.1	.575	14.6	15	2.7	.77	19	12	53	.58	14.6	0.064	1.6	8.00	SPR	C	Z
0.703	17.86	S-1680	1.41	35.7	.623	15.8	2.6	.46	1.1	28	2.9	13	.29	7.4	0.040	1.0	6.25	SST	C	N
0.703	17.86	10631	1.41	35.7	.619	15.7	2.7	.48	1.1	28	3.1	14	.29	7.5	0.042	1.1	7.00	SST	CG	N
0.703	17.86	11378	1.41	35.7	.559	14.2	24	4.2	.71	18	17	75	.56	14.2	0.072	1.8	7.75	SST	CG	N
0.703	17.86	3517	1.44	36.5	.559	14.2	24	4.1	.76	19	18	80	.61	15.5	0.072	1.8	8.50	HD	CG	Z
0.703	17.86	AA-76	1.44	36.5	.483	12.3	168	29	.34	8.7	58	258	.88	22.4	0.110	2.8	8.00	SPR	CG	N
0.703	17.86	A10-67	1.50	38.1	.631	16.0	1.8	.32	1.2	32	2.3	10	.25	6.4	0.036	0.9	6.00	SST	C	N
0.703	17.86	A15-62	1.50	38.1	.617	15.7	4.7	.82	.89	23	4.2	18	.23	5.7	0.043	1.1	5.25	SST	CG	N
0.703	17.86	11675	1.50	38.1	.583	14.8	14	2.5	.79	20	11	49	.42	10.7	0.060	1.5	7.00	SPR	CG	GI
0.703	17.86	S-1289	1.50	38.1	.579	14.7	16	2.7	.74	19	12	51	.40	10.2	0.062	1.6	6.50	SST	CG	N
0.703	17.86	B12-60	1.50	38.1	.571	14.5	22	3.9	.66	17	15	66	.51	13.0	0.066	1.7	6.75	SPR	C	Z
0.703	17.86	S-1309	1.50	38.1	.569	14.5	20	3.4	.74	19	14	64	.47	11.9	0.067	1.7	7.00	SST	CG	N
0.703	17.86	12141	1.50	38.1	.569	14.5	23	3.9	.68	17	15	68	.47	11.9	0.067	1.7	7.00	SPR	CG	Z
0.703	17.86	3581	1.50	38.1	.559	14.2	29	5.1	.86	22	25	112	.52	13.3	0.072	1.8	7.25	MW	CG	Z
0.703	17.86	GG-100	1.50	38.1	.553	14.0	17	2.9	.45	11	7.5	33	1.05	26.7	0.075	1.9	13.0	SPR	C	GI
0.703	17.86	1711	1.50	38.1	.521	13.2	123	22	.28	7.1	34	153	.50	12.7	0.091	2.3	5.50	SPR	CG	Z
0.703	17.86	3559	1.50	38.1	.507	12.9	92	16	.65	17	60	266	.83	21.2	0.098	2.5	8.50	MW	CG	Z
0.703	17.86	3813	1.63	41.3	.519	13.2	56	9.9	.63	16	36	158	.92	23.4	0.092	2.3	10.0	SPR	CG	Z
0.703	17.86	S-1000	1.66	42.1	.641	16.3	.67	.12	1.4	36	.96	4.2	.24	6.1	0.031	0.8	7.75	SST	CG	N
0.703	17.86	S-251	1.75	44.5	.519	13.2	49	8.6	.67	17	33	147	.92	23.4	0.092	2.3	10.0	SST	CG	N
0.703	17.86	S-280	1.78	45.2	.521	13.2	48	8.3	.67	17	32	142	.91	23.1	0.091	2.3	10.0	SST	CG	N
0.703	17.86	4263	1.81	46.0	.579	14.7	10	1.8	1.1	29	11	51	.68	17.3	0.062	1.6	10.0	SPR	C	Z
0.703	17.86	12501	1.86	47.2	.543	13.8	36	6.3	.68	17	25	110	.78	19.8	0.080	2.0	8.75	SPR	C	N
0.703	17.86	12557	1.91	48.4	.545	13.8	14	2.5	.39	9.8	5.5	24	1.52	38.6	0.079	2.0	18.3	MW	C	N
0.703	17.86	4348	1.94	49.2	.521	13.2	49	8.6	.70	18	34	153	.98	24.8	0.091	2.3	10.8	SPR	CG	Z
0.703	17.86	4373	1.94	49.2	.521	13.2	51	8.9	.68	17	34	153	.96	24.3	0.091	2.3	10.5	SPR	CG	Z
0.703	17.86	10573	1.97	50.0	.573	14.6	12	2.1	1.1	28	13	59	.60	15.3	0.065	1.7	9.25	SST	CG	N
0.703	17.86	NN-96	2.00	50.8	.503	12.8	105	18	.43	11	45	202	.83	21.0	0.100	2.5	8.25	SPR	CG	Z
0.703	17.86	3462	2.13	54.0	.543	13.8	35	6.1	.71	18	25	110	.80	20.3	0.080	2.0	9.00	HD	C	Z
0.703	17.86	3422	2.19	55.6	.463	11.8	201	35	.37	9.4	74	331	1.26	32.0	0.120	3.0	9.50	SPR	C	Z
0.703	17.86	3672	2.22	56.4	.557	14.1	18	3.2	1.0	26	19	84	.80	20.4	0.073	1.9	11.0	SPR	CG	Z
0.703	17.86	S-1495	2.38	60.3	.579	14.7	5.8	1.0	1.5	38	8.8	39	.87	22.0	0.062	1.6	14.0	SST	CG	N
0.703	17.86	12335	2.53	64.3	.583	14.8	7.0	1.2	1.6	40	11	49	.78	19.8	0.060	1.5	12.0	SPR	C	Z
0.703	17.86	10415	2.56	65.1	.477	12.1	114	20	.55	14	63	278	1.36	34.4	0.113	2.9	12.0	SPR	CG	Z
0.703	17.86	12274	2.69	68.2	.577	14.7	7.9	1.4	1.6	42	13	57	.82	20.8	0.063	1.6	13.0	SPR	CG	Z
0.703	17.86	3063	2.72	69.0	.513	13.0	41	7.2	.96	24	39	174	1.40	35.6	0.095	2.4	14.8	SPR	CG	Z
0.703	17.86	GG-43	2.75	69.9	.643	16.3	.34	.06	2.4	61	.81	3.6	.36	9.1	0.030	0.8	12.0	SST	CG	N
0.703	17.86	12039	2.84	72.2	.543	13.8	22	3.9	1.1	28	25	110	1.04	26.4	0.080	2.0	13.0	SPR	CG	Z
0.703	17.86	10523	3.06	77.8	.583	14.8	5.3	.93	2.1	53	11	49	.92	23.2	0.060	1.5	15.3	SPR	CG	GI
0.703	17.86	S-1200	3.38	85.7	.559	14.2	7.9	1.4	2.0	51	16	70	1.37	34.7	0.072	1.8	19.0	SST	CG	N
0.703	17.86	11274	3.50	88.9	.521	13.2	36	6.3	.96	24	34	153	1.27	32.4	0.091	2.3	14.0	SPR	CG	Z
0.703	17.86	11273	3.50	88.9	.507	12.9	33	5.8	1.3	33	43	190	1.96	49.8	0.098	2.5	20.0	SPR	CG	Z
0.703	17.86	11344	3.50	88.9	.407	10.3	336	59	.39	9.9	131	582	2.07	52.6	0.148	3.8	14.0	SPR	CG	Z
0.703	17.86	11725	4.13	104.8	.613	15.6	2.3	.40	2.2	56	5.1	23	.50	12.6	0.045	1.1	11.0	SPR	CG	GI
0.703	17.86	3052	4.13	104.8	.579	14.7	5.0	.88	2.4	62	12	54	1.12	28.3	0.062	1.6	18.0	SPR	CG	Z
0.703	17.86	12450	4.13	104.8	.493	12.5	50	8.7	1.1	27	52	233	1.94	49.3	0.105	2.7	18.5	SPR	CG	Z
0.703	17.86	10446	4.25	108.0	.463	11.8	66	12	1.1	29	74	331	2.97	75.4	0.120	3.0	24.8	SPR	CG	Z
0.703	17.86	12283	4.41	111.9	.553	14.0	9.2	1.6	2.2	56	20	91	1.65	41.9	0.075	1.9	22.0	SPR	CG	Z
0.703	17.86	S-3013	4.50	114.3	.563	14.3	7.6	1.3	2.0	52	16	69	1.23	31.1	0.070	1.8	17.5	SST	CG	N
0.703	17.86	3481	6.00	152.4	.583	14.8	3.9	.68	2.9	73	11	49	1.26	32.0	0.060	1.5	20.0	SPR	C	Z
0.703	17.86	10270	6.00	152.4	.391	9.9	198	35	.75	19	148	658	4.41	111.9	0.156	4.0	28.3	SPR	CG	Z
0.703	17.86	12171	8.13	206.4	.489	12.4	22	3.9	2.5	63	55	246	4.49	114.1	0.107	2.7	42.0	SPR	CG	Z
0.703	17.86	3705	8.75	222.3	.573	14.6	2.4	.43	5.8	147	14	63	2.83	71.8	0.065	1.7	42.5	SPR	C	Z
0.710	18.03	12806	.63	15.9	.526	13.4	218	38	.16	4.1	35	157	.37	9.3	0.092	2.3	4.00	SPR	C	Z
0.718	18.24	B2-48	.41	10.3	.666	16.9	3.4	.60	.27	7.0	.95	4.2	.09	2.3	0.026	0.7	2.50	SST	C	N
0.718	18.24	S-1381	.44	11.1	.616	15.6	14	2.5	.23	5.9	3.3	15	.20	5.2	0.051	1.3	4.00	SST	CG	N
0.718	18.24	S-20	.50	12.7	.592	15.0	70	12	.17	4.3	12	53	.25	6.4	0.063	1.6	3.00	SST	C	N
0.718	18.24	S-216	.50	12.7	.532	13.5	192	34	.13	3.3	25	109	.37	9.4	0.093	2.4	4.00	SST	CG	N
0.718	18.24	HH-91	.59	15.1	.612	15.5	17	3.0	.38	9.7	6.5	29	.21	5.4	0.053	1.3	4.00	SST	CG	N
0.718	18.24	KK-80	.59	15.1	.606	15.4	32	5.7	.27	6.9	8.9	40	.20	5.0	0.056	1.4	3.50	SPR	CG	Z
0.718	18.24	MM-79	.63	15.9	.638	16.2	4.2	.73	.45	11	1.9	8.3	.18	4.6	0.040	1.0	4.50	SST	CG	N
0.718	18.24	MM-71	.63	15.9	.578	14.7	75	13	.20	5.2	15	68	.25	6.2	0.070	1.8	3.50	SST	CG	N
0.718	18.24	1945	.66	16.7	.612	15.5	19	3.4	.39	9.9	7.5	34	.27	6.7	0.053	1.3	4.00	SPR	C	Z
0.718	18.24	12261	.66	16.7	.612	15.5	17	3.0	.39	9.9	6.7	30	.27	6.7	0.053	1.3	4.00	SST	C	N
0.718	18.24	S-125	.66	16.7	.532	13.5	120	21	.17	4.3	20	90	.49	12.4	0.093	2.4	5.25	SST	CG	N
0.718	18.24	3750	.69	17.4	.590	15.0	25	4.3	.27	6.9	6.7	30	.42	10.6	0.064	1.6	5.50	HD	C	Z
0.718	18.24	S-3142	.69	17.4	.536	13.6	199	35	.16	4.0	31	140	.43	11.0	0.091	2.3	3.75	SST	C	N
0.718	18.24	S-3180	.75	19.1	.636	16.2	5.7	1.0	.59	15	3.3	15	.16	4.2	0.041	1.0	4.00	SST	CG	N
0.718	18.24	W-38	.75	19.1	.634	16.1	4.2	.73	.54	14	2.3	10	.21	5.3	0.042	1.1	5.00	SST	CG	N
0.718	18.24	QQ-31	.75	19.1	.616	15.6	5.7	1.0	.34	8.7	1.9	8.7	.41	10.4	0.051	1.3	7.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.718	18.24	11458	.75	19.1	.574	14.6	51	8.9	.33	8.3	17	74	.40	10.1	0.072	1.8	4.50	SST	C	N
0.718	18.24	A9-38	.81	20.6	.634	16.1	6.4	1.1	.59	15	3.8	17	.21	5.3	0.042	1.1	4.00	SST	C	N
0.718	18.24	A14-47	.81	20.6	.478	12.1	612	107	.11	2.8	67	296	.48	12.2	0.120	3.0	4.00	SST	CG	N
0.718	18.24	12729	.87	22.0	.638	16.2	4.1	.72	.67	17	2.8	12	.20	5.0	0.040	1.0	4.88	MW	CG	BO
0.718	18.24	S-1364	.88	22.2	.594	15.1	24	4.2	.47	12	11	50	.29	7.5	0.062	1.6	4.75	SST	CG	N
0.718	18.24	10233	.88	22.2	.574	14.6	25	4.4	.32	8.1	7.9	35	.56	14.2	0.072	1.8	7.75	SPR	CG	Z
0.718	18.24	S-1082	1.00	25.4	.638	16.2	2.9	.51	.74	19	2.2	9.7	.26	6.6	0.040	1.0	5.50	SST	C	N
0.718	18.24	A12-41	1.00	25.4	.628	16.0	6.4	1.1	.73	19	4.7	21	.27	6.9	0.045	1.1	5.00	MW	C	Z
0.718	18.24	RR-33	1.00	25.4	.618	15.7	7.5	1.3	.65	17	4.9	22	.35	8.9	0.050	1.3	6.00	SPR	C	Z
0.718	18.24	S-878	1.00	25.4	.610	15.5	11	2.0	.67	17	7.5	33	.28	7.2	0.054	1.4	5.25	SST	CG	N
0.718	18.24	3973	1.00	25.4	.574	14.6	48	8.4	.37	9.4	18	79	.43	11.0	0.072	1.8	5.00	SPR	C	Z
0.718	18.24	CC-80	1.00	25.4	.546	13.9	98	17	.28	7.2	28	124	.41	10.4	0.086	2.2	4.75	SST	CG	N
0.718	18.24	S-1260	1.03	26.2	.636	16.2	3.3	.57	.81	20	2.6	12	.23	5.7	0.041	1.0	5.50	SST	CG	N
0.718	18.24	S-3077	1.13	28.6	.614	15.6	7.7	1.4	.81	21	6.3	28	.31	7.9	0.052	1.3	6.00	SST	CG	N
0.718	18.24	10907	1.16	29.4	.628	16.0	3.4	.60	.84	21	2.9	13	.32	8.0	0.045	1.1	7.00	SST	CG	N
0.718	18.24	S-246	1.22	31.0	.624	15.8	5.0	.88	.89	23	4.5	20	.33	8.4	0.047	1.2	6.00	SST	C	N
0.718	18.24	S-430	1.22	31.0	.608	15.4	6.9	1.2	.80	20	5.5	25	.42	10.7	0.055	1.4	7.67	SST	CG	N
0.718	18.24	QQ-44	1.25	31.8	.534	13.6	56	9.8	.38	9.6	21	94	.87	22.2	0.092	2.3	9.50	SPR	CG	Z
0.718	18.24	S-1034	1.31	33.3	.634	16.1	4.2	.73	.90	23	3.8	17	.25	6.4	0.042	1.1	5.00	SST	C	N
0.718	18.24	3792	1.31	33.3	.614	15.6	7.9	1.4	.90	23	7.1	32	.34	8.6	0.052	1.3	6.50	SPR	CG	GI
0.718	18.24	B11-4	1.31	33.3	.594	15.1	11	1.9	.75	19	8.1	36	.56	14.2	0.062	1.6	9.00	SPR	CG	N
0.718	18.24	M-145	1.31	33.3	.572	14.5	43	7.6	.42	11	18	82	.47	12.1	0.073	1.9	5.50	SPR	C	GI
0.718	18.24	S-69	1.34	34.1	.610	15.5	14	2.4	.55	14	7.5	33	.25	6.4	0.054	1.4	4.67	SST	CG	N
0.718	18.24	B10-56	1.38	34.9	.618	15.7	7.5	1.3	.84	21	6.3	28	.30	7.6	0.050	1.3	6.00	SPR	CG	N
0.718	18.24	KK-56	1.38	34.9	.578	14.7	23	4.0	.71	18	16	73	.53	13.3	0.070	1.8	7.50	SPR	CG	N
0.718	18.24	3993	1.38	34.9	.478	12.1	199	35	.30	7.5	59	261	1.08	27.4	0.120	3.0	9.00	SPR	CG	Z
0.718	18.24	Q-51	1.41	35.7	.568	14.4	31	5.4	.64	16	20	89	.56	14.3	0.075	1.9	7.50	SPR	CG	N
0.718	18.24	B9-62	1.50	38.1	.622	15.8	6.3	1.1	.95	24	6.0	27	.34	8.5	0.048	1.2	6.00	SPR	C	N
0.718	18.24	S-48	1.50	38.1	.594	15.1	11	1.9	1.0	26	11	49	.50	12.6	0.062	1.6	8.00	SST	CG	N
0.718	18.24	S-3252	1.50	38.1	.446	11.3	443	77	.21	5.2	91	406	.95	24.2	0.136	3.5	7.00	SST	CG	N
0.718	18.24	B6-54	1.59	40.5	.654	16.6	.93	.16	1.4	35	1.3	5.7	.22	5.7	0.032	0.8	7.00	SPR	CG	Z
0.718	18.24	10565	1.59	40.5	.488	12.4	118	21	.24	6.1	28	127	1.35	34.3	0.115	2.9	11.8	SPR	CG	Z
0.718	18.24	S-1431	1.63	41.3	.636	16.2	2.4	.42	1.3	34	3.2	14	.28	7.0	0.041	1.0	6.75	SST	CG	N
0.718	18.24	11252	1.63	41.3	.528	13.4	59	10	.65	16	38	171	.88	22.3	0.095	2.4	9.25	SPR	CG	N
0.718	18.24	3829	1.63	41.3	.508	12.9	101	18	.51	13	51	228	1.00	25.3	0.105	2.7	9.50	SPR	CG	Z
0.718	18.24	11612	1.63	41.3	.458	11.6	274	48	.25	6.5	70	311	1.37	34.8	0.130	3.3	9.50	SPR	CG	Z
0.718	18.24	10633	1.69	42.8	.622	15.8	3.6	.63	1.2	31	4.4	19	.48	12.2	0.048	1.2	9.00	SPR	C	Z
0.718	18.24	10070	1.69	42.8	.394	10.0	1047	183	.15	3.9	161	718	1.22	30.9	0.162	4.1	7.50	SPR	CG	Z
0.718	18.24	S-370	1.75	44.5	.654	16.6	.90	.16	1.5	38	1.4	6.1	.24	6.1	0.032	0.8	6.50	SST	C	N
0.718	18.24	S-285	1.75	44.5	.636	16.2	1.1	.20	1.3	32	1.4	6.4	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.718	18.24	S-849	1.81	46.0	.574	14.6	12	2.2	.95	24	12	53	.86	21.9	0.072	1.8	12.0	SST	CG	N
0.718	18.24	10209	1.81	46.0	.354	9.0	1517	266	.14	3.5	212	941	1.59	40.5	0.182	4.6	8.75	SPR	CG	Z
0.718	18.24	11588	1.88	47.6	.598	15.2	10	1.8	1.1	28	11	48	.57	14.5	0.060	1.5	8.50	SPR	CG	Z
0.718	18.24	2946	1.88	47.6	.584	14.8	17	3.1	.86	22	15	67	.60	15.3	0.067	1.7	8.00	SPR	C	Z
0.718	18.24	11756	1.91	48.4	.524	13.3	71	12	.58	15	41	181	.92	23.4	0.097	2.5	9.50	SPR	CG	Z
0.718	18.24	10599	1.94	49.2	.530	13.5	54	9.5	.68	17	37	165	.99	25.1	0.094	2.4	10.5	SPR	CG	Z
0.718	18.24	YY-33	2.00	50.8	.628	16.0	2.4	.42	1.6	39	3.7	17	.45	11.4	0.045	1.1	9.00	SST	C	N
0.718	18.24	S-1440	2.00	50.8	.584	14.8	13	2.3	1.1	28	14	63	.60	15.3	0.067	1.7	9.00	SST	CG	N
0.718	18.24	10257	2.00	50.8	.536	13.6	53	9.3	.63	16	34	150	.96	24.3	0.091	2.3	9.50	SPR	C	Z
0.718	18.24	A15-53	2.00	50.8	.528	13.4	57	10	.62	16	36	158	.90	22.9	0.095	2.4	9.50	SST	CG	N
0.718	18.24	A13-33	2.03	51.6	.582	14.8	15	2.6	1.0	26	15	66	.60	15.1	0.068	1.7	8.75	SST	CG	N
0.718	18.24	2778	2.06	52.4	.568	14.4	25	4.4	1.1	28	28	124	.73	18.6	0.075	1.9	8.75	MW	C	Z
0.718	18.24	10867	2.13	54.0	.594	15.1	13	2.2	.96	24	12	53	.50	12.6	0.062	1.6	8.00	SPR	CG	GI
0.718	18.24	4367	2.13	54.0	.584	14.8	11	1.9	1.4	34	15	67	.77	19.6	0.067	1.7	11.5	SPR	CG	Z
0.718	18.24	B9-56	2.13	54.0	.556	14.1	27	4.8	.86	22	23	104	.79	20.1	0.081	2.1	9.75	SST	CG	N
0.718	18.24	2651	2.19	55.6	.488	12.4	104	18	.62	16	65	287	1.50	38.0	0.115	2.9	13.0	SPR	CG	Z
0.718	18.24	S-1630	2.22	56.4	.636	16.2	1.5	.27	1.8	46	2.8	13	.39	9.9	0.041	1.0	9.50	SST	CG	N
0.718	18.24	12625	2.22	56.4	.494	12.5	92	16	.65	16	60	266	1.46	37.0	0.112	2.8	13.0	SPR	CG	Z
0.718	18.24	B11-53	2.31	58.7	.588	14.9	12	2.2	1.1	29	14	61	.62	15.7	0.065	1.7	9.50	SPR	CG	N
0.718	18.24	3386	2.38	60.3	.574	14.6	14	2.5	1.2	31	18	79	.86	21.9	0.072	1.8	12.0	SPR	CG	Z
0.718	18.24	11575	2.50	63.5	.526	13.4	39	6.8	.96	24	38	167	1.54	39.0	0.096	2.4	15.0	SPR	CG	N
0.718	18.24	N-121	2.53	64.3	.572	14.5	17	3.0	1.1	28	18	82	.80	20.4	0.073	1.9	11.0	SPR	CG	N
0.718	18.24	3739	2.56	65.1	.558	14.2	23	4.0	1.1	27	24	107	.96	24.4	0.080	2.0	12.0	SPR	CG	Z
0.718	18.24	S-3164	2.63	66.7	.628	16.0	1.1	.18	1.8	45	1.9	8.3	.86	21.7	0.045	1.1	18.0	SST	C	N
0.718	18.24	1707	2.63	66.7	.570	14.5	18	3.1	1.1	27	19	85	.81	20.7	0.074	1.9	11.0	SPR	CG	Z
0.718	18.24	S-1469	2.75	69.9	.594	15.1	7.5	1.3	1.5	38	11	50	.67	16.9	0.062	1.6	10.8	SST	CG	N
0.718	18.24	10721	3.00	76.2	.478	12.1	100	17	.73	19	73	325	1.92	48.8	0.120	3.0	16.0	SPR	CG	Z
0.718	18.24	B9-51	3.25	82.6	.578	14.7	12	2.1	1.3	34	16	73	.88	22.2	0.070	1.8	12.5	SPR	CG	N
0.718	18.24	2509	3.38	85.7	.534	13.6	23	4.1	1.5	38	35	155	1.84	46.7	0.092	2.3	20.0	HD	CG	Z
0.718	18.24	10396	3.41	86.5	.536	13.6	32	5.6	1.1	27	34	150	1.32	33.5	0.091	2.3	14.5	SPR	CG	Z
0.718	18.24	313	3.50	88.9	.636	16.2	1.5	.27	2.4	62	3.8	17	.47	12.0	0.041	1.0	10.5	HD	C	Z
0.718	18.24	4277	3.50	88.9	.578	14.7	11	1.9	1.5	38	16	73	.95	24.0	0.070	1.8	13.5	SPR	CG	Z
0.718	18.24	11660	3.53	89.7	.512	13.0	56	9.7	.87	22	49	216	1.49	37.9	0.103	2.6	14.5	SPR	CG	Z
0.718	18.24	S-3243	3.84	97.6	.576	14.6	9.2	1.6	1.7	44	16	71	1.07	27.1	0.071	1.8	15.0	SST	CG	N
0.718	18.24	2894	4.50	114.3	.574	14.6	7.7	1.4	2.3	58	18	79	1.48	37.5	0.072	1.8	20.5	SPR	CG	Z
0.718	18.24	S-3026	4.50	114.3	.562	14.3	13	2.2	1.7	42	21	93	1.33	33.7	0.078	2.0	16.0	SST	C	N
0.718	18.24	12637	4.81	122.2	.656	16.7	.30	.05	4.3	110	1.3	5.7	.47	11.8	0.031	0.8	14.0	SST	C	N
0.718	18.24	B8-66	5.13	130.2	.562	14.3	11	1.9	2.1	53	22	100	1.72	43.6	0.078	2.0	21.0	SPR	C	N
0.718	18.24	S-997	5.75	146.1	.640	16.3	.42	.07	4.8	121	2.0	8.8	.98	25.0	0.039	1.0	24.3	SST	C	N
0.718	18.24	10698	6.25	158.8	.432	11.0	99	17	1.2	30	117	520	4.86	123.5	0.143	3.6	34.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.719	18.26	U-84	.61	15.5	.637	16.2	2.5	.44	.34	8.7	.86	3.8	.27	6.8	0.041	1.0	6.50	SST		
0.720	18.29	71926	.63	16.0	.610	15.5	31	5.4	.38	9.7	12	52	.19	4.9	0.055	1.4	3.50	MW	CG	N
0.720	18.29	71926S	.63	16.0	.610	15.5	26	4.6	.30	7.7	7.9	35	.19	4.9	0.055	1.4	3.50	SST	CG	N
0.720	18.29	71951	.63	16.0	.594	15.1	47	8.2	.37	9.5	17	78	.24	6.0	0.063	1.6	3.75	MW	CG	N
0.720	18.29	71951S	.63	16.0	.594	15.1	40	7.0	.30	7.5	12	53	.24	6.0	0.063	1.6	3.75	SST	CG	N
0.720	18.29	71927	.75	19.1	.610	15.5	23	4.0	.51	13	12	52	.22	5.6	0.055	1.4	4.00	MW	CG	N
0.720	18.29	71927S	.75	19.1	.610	15.5	20	3.4	.40	10	7.9	35	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.720	18.29	71938	.75	19.1	.602	15.3	33	5.8	.44	11	14	64	.23	5.8	0.059	1.5	3.88	MW	CG	N
0.720	18.29	71938S	.75	19.1	.602	15.3	28	4.9	.35	8.8	9.7	43	.23	5.8	0.059	1.5	3.88	SST	CG	N
0.720	18.29	71952	.75	19.1	.594	15.1	33	5.8	.47	12	16	70	.28	7.0	0.063	1.6	4.38	MW	CG	N
0.720	18.29	71952S	.75	19.1	.594	15.1	28	4.9	.42	11	12	53	.28	7.0	0.063	1.6	4.38	SST	CG	N
0.720	18.29	71963	.75	19.1	.590	15.0	44	7.6	.44	11	19	85	.27	6.8	0.065	1.7	4.13	MW	CG	N
0.720	18.29	71963S	.75	19.1	.590	15.0	37	6.5	.35	8.9	13	58	.27	6.8	0.065	1.7	4.13	SST	CG	N
0.720	18.29	71976	.75	19.1	.586	14.9	50	8.8	.42	11	21	93	.28	7.0	0.067	1.7	4.13	MW	CG	N
0.720	18.29	71976S	.75	19.1	.586	14.9	43	7.4	.33	8.5	14	63	.28	7.0	0.067	1.7	4.13	SST	CG	N
0.720	18.29	71991	.75	19.1	.584	14.8	50	8.7	.44	11	22	97	.29	7.3	0.068	1.7	4.25	MW	CG	N
0.720	18.29	71991S	.75	19.1	.584	14.8	42	7.4	.35	8.9	15	66	.29	7.3	0.068	1.7	4.25	SST	CG	N
0.720	18.29	72014	.75	19.1	.576	14.6	67	12	.37	9.3	25	110	.30	7.5	0.072	1.8	4.13	MW	CG	N
0.720	18.29	72014S	.75	19.1	.576	14.6	57	10	.29	7.4	17	74	.30	7.5	0.072	1.8	4.13	SST	CG	N
0.720	18.29	72029	.75	19.1	.560	14.2	92	16	.37	9.3	34	150	.36	9.1	0.080	2.0	4.50	MW	CG	N
0.720	18.29	72029S	.75	19.1	.560	14.2	78	14	.29	7.3	23	100	.36	9.1	0.080	2.0	4.50	SST	CG	N
0.720	18.29	72057	.75	19.1	.558	14.2	104	18	.34	8.6	35	155	.34	8.7	0.081	2.1	4.25	MW	CG	N
0.720	18.29	72057S	.75	19.1	.558	14.2	88	15	.27	6.8	23	104	.34	8.7	0.081	2.1	4.25	SST	CG	N
0.720	18.29	72070	.75	19.1	.550	14.0	139	24	.29	7.3	40	179	.35	8.9	0.085	2.2	4.13	MW	CG	N
0.720	18.29	72070S	.75	19.1	.550	14.0	118	21	.23	5.8	27	120	.35	8.9	0.085	2.2	4.13	SST	CG	N
0.720	18.29	72097	.75	19.1	.528	13.4	239	42	.23	5.9	55	245	.40	10.1	0.096	2.4	4.13	MW	CG	N
0.720	18.29	72097S	.75	19.1	.528	13.4	203	36	.18	4.6	37	163	.40	10.1	0.096	2.4	4.13	SST	CG	N
0.720	18.29	72110	.75	19.1	.510	13.0	355	62	.20	5.1	72	318	.43	11.0	0.105	2.7	4.13	MW	CG	N
0.720	18.29	72110S	.75	19.1	.510	13.0	301	53	.16	4.0	47	211	.43	11.0	0.105	2.7	4.13	SST	CG	N
0.720	18.29	72123	.75	19.1	.496	12.6	469	82	.18	4.5	83	371	.46	11.7	0.112	2.8	4.13	MW	CG	N
0.720	18.29	72123S	.75	19.1	.496	12.6	398	70	.14	3.5	54	242	.46	11.7	0.112	2.8	4.13	SST	CG	N
0.720	18.29	71928	.88	22.4	.610	15.5	20	3.5	.58	15	12	52	.23	5.9	0.055	1.4	4.25	MW	CG	N
0.720	18.29	71928S	.88	22.4	.610	15.5	17	3.0	.46	12	7.9	35	.23	5.9	0.055	1.4	4.25	SST	CG	N
0.720	18.29	71939	.88	22.4	.602	15.3	27	4.8	.53	13	14	64	.25	6.4	0.059	1.5	4.25	MW	CG	N
0.720	18.29	71939S	.88	22.4	.602	15.3	23	4.1	.42	11	9.7	43	.25	6.4	0.059	1.5	4.25	SST	CG	N
0.720	18.29	71953	.88	22.4	.594	15.1	28	4.9	.57	15	16	71	.31	7.8	0.063	1.6	4.88	MW	CG	N
0.720	18.29	71953S	.88	22.4	.594	15.1	24	4.2	.50	13	12	53	.31	7.8	0.063	1.6	4.88	SST	CG	N
0.720	18.29	71964	.88	22.4	.590	15.0	37	6.4	.52	13	19	85	.29	7.4	0.065	1.7	4.50	MW	CG	N
0.720	18.29	71964S	.88	22.4	.590	15.0	31	5.4	.42	11	13	58	.29	7.4	0.065	1.7	4.50	SST	CG	N
0.720	18.29	71977	.88	22.4	.586	14.9	40	7.0	.52	13	21	93	.31	7.9	0.067	1.7	4.63	MW	CG	N
0.720	18.29	71977S	.88	22.4	.586	14.9	34	6.0	.42	11	14	63	.31	7.9	0.067	1.7	4.63	SST	CG	N
0.720	18.29	71993	.88	22.4	.584	14.8	41	7.2	.53	13	22	97	.31	8.0	0.068	1.7	4.63	MW	CG	N
0.720	18.29	71993S	.88	22.4	.584	14.8	35	6.2	.42	11	15	66	.31	8.0	0.068	1.7	4.63	SST	CG	N
0.720	18.29	72015	.88	22.4	.576	14.6	48	8.4	.51	13	25	110	.36	9.1	0.072	1.8	5.00	MW	CG	N
0.720	18.29	72015S	.88	22.4	.576	14.6	41	7.1	.41	10	17	74	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.720	18.29	72031	.88	22.4	.560	14.2	76	13	.44	11	34	150	.40	10.2	0.080	2.0	5.00	MW	CG	N
0.720	18.29	72031S	.88	22.4	.560	14.2	65	11	.35	8.9	23	100	.40	10.2	0.080	2.0	5.00	SST	CG	N
0.720	18.29	72058	.88	22.4	.558	14.2	82	14	.42	11	35	155	.39	10.0	0.081	2.1	4.88	MW	CG	N
0.720	18.29	72058S	.88	22.4	.558	14.2	70	12	.33	8.5	23	104	.39	10.0	0.081	2.1	4.88	SST	CG	N
0.720	18.29	72071	.88	22.4	.550	14.0	114	20	.35	9.0	40	179	.39	10.0	0.085	2.2	4.63	MW	CG	N
0.720	18.29	72071S	.88	22.4	.550	14.0	97	17	.28	7.1	27	120	.39	10.0	0.085	2.2	4.63	SST	CG	N
0.720	18.29	72098	.88	22.4	.528	13.4	194	34	.28	7.2	55	245	.44	11.3	0.096	2.4	4.63	MW	CG	N
0.720	18.29	72098S	.88	22.4	.528	13.4	165	29	.22	5.6	37	163	.44	11.3	0.096	2.4	4.63	SST	CG	N
0.720	18.29	72111	.88	22.4	.510	13.0	286	50	.25	6.4	72	318	.49	12.3	0.105	2.7	4.63	MW	CG	N
0.720	18.29	72111S	.88	22.4	.510	13.0	243	43	.20	5.0	47	211	.49	12.3	0.105	2.7	4.63	SST	CG	N
0.720	18.29	72124	.88	22.4	.496	12.6	374	66	.22	5.7	83	371	.53	13.5	0.112	2.8	4.75	MW	CG	N
0.720	18.29	72124S	.88	22.4	.496	12.6	318	56	.17	4.3	54	242	.53	13.5	0.112	2.8	4.75	SST	CG	N
0.720	18.29	71929	1.00	25.4	.610	15.5	19	3.2	.63	16	12	52	.24	6.1	0.055	1.4	4.38	MW	CG	N
0.720	18.29	71929S	1.00	25.4	.610	15.5	16	2.8	.50	13	7.9	35	.24	6.1	0.055	1.4	4.38	SST	CG	N
0.720	18.29	71940	1.00	25.4	.602	15.3	24	4.1	.61	16	14	64	.27	6.9	0.059	1.5	4.63	MW	CG	N
0.720	18.29	71940S	1.00	25.4	.602	15.3	20	3.5	.49	12	9.7	43	.27	6.9	0.059	1.5	4.63	SST	CG	N
0.720	18.29	71954	1.00	25.4	.594	15.1	24	4.2	.66	17	16	71	.34	8.6	0.063	1.6	5.38	MW	CG	N
0.720	18.29	71954S	1.00	25.4	.594	15.1	20	3.6	.58	15	12	53	.34	8.6	0.063	1.6	5.38	SST	CG	N
0.720	18.29	71965	1.00	25.4	.590	15.0	31	5.4	.62	16	19	85	.33	8.3	0.065	1.7	5.00	MW	CG	N
0.720	18.29	71965S	1.00	25.4	.590	15.0	26	4.6	.49	13	13	58	.33	8.3	0.065	1.7	5.00	SST	CG	N
0.720	18.29	71978	1.00	25.4	.586	14.9	33	5.8	.63	16	21	93	.34	8.7	0.067	1.7	5.13	MW	CG	N
0.720	18.29	71978S	1.00	25.4	.586	14.9	28	4.9	.50	13	14	63	.34	8.7	0.067	1.7	5.13	SST	CG	N
0.720	18.29	71995	1.00	25.4	.584	14.8	35	6.2	.62	16	22	97	.35	8.9	0.068	1.7	5.13	MW	CG	N
0.720	18.29	71995S	1.00	25.4	.584	14.8	30	5.3	.49	12	15	66	.35	8.9	0.068	1.7	5.13	SST	CG	N
0.720	18.29	72016	1.00	25.4	.576	14.6	42	7.4	.59	15	25	110	.39	9.8	0.072	1.8	5.38	MW	CG	N
0.720	18.29	72016S	1.00	25.4	.576	14.6	36	6.3	.46	12	17	74	.39	9.8	0.072	1.8	5.38	SST	CG	N
0.720	18.29	72033	1.00	25.4	.560	14.2	65	11	.52	13	34	150	.44	11.2	0.080	2.0	5.50	MW	CG	N
0.720	18.29	72033S	1.00	25.4	.560	14.2	55	9.6	.41	10	23	100	.44	11.2	0.080	2.0	5.50	SST	CG	N
0.720	18.29	72034	1.00	25.4	.560	14.2	108	19	.31	7.9	34	150	.33	8.4	0.080	2.0	4.13	MW	CG	N
0.720	18.29	72034S	1.00	25.4	.560	14.2	92	16	.25	6.3	23	100	.33	8.4	0.080	2.0	4.13	SST	CG	N
0.720	18.29	72059	1.00	25.4	.558	14.2	71	12	.49	13	35	155	.44	11.1	0.081	2.1	5.38	MW	CG	N
0.720	18.29	72059S	1.00	25.4	.558	14.2	60	11	.39	9.9	23	104	.44	11.1	0.081	2.1	5.38	SST	CG	N
0.720	18.29	72072	1.00	25.4	.550	14.0	97	17	.41	11	40	179	.43	10.8	0.085	2.2	5.00	MW	CG	N
0.720	18.29	72072S	1.00	25.4	.550	14.0	82	14	.33	8.3	27	120	.43	10.8	0.085	2.2	5.00	SST	CG	N
0.720	18.29	72099	1.00	25.4	.528	13.4	165	29	.33	8.5	55	245	.48	12.2	0.096	2.4	5.00	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.720	18.29	72099S	1.00	25.4	.528	13.4	140	25	.26	6.6	37	163	.48	12.2	0.096	2.4	5.00	SST	CG	N
0.720	18.29	72112	1.00	25.4	.510	13.0	243	42	.30	7.5	72	318	.54	13.7	0.105	2.7	5.13	MW	CG	N
0.720	18.29	72112S	1.00	25.4	.510	13.0	206	36	.23	5.8	47	211	.54	13.7	0.105	2.7	5.13	SST	CG	N
0.720	18.29	72125	1.00	25.4	.496	12.6	315	55	.26	6.7	83	371	.59	14.9	0.112	2.8	5.25	MW	CG	N
0.720	18.29	72125S	1.00	25.4	.496	12.6	268	47	.20	5.2	54	242	.59	14.9	0.112	2.8	5.25	SST	CG	N
0.720	18.29	71930	1.25	31.8	.610	15.5	15	2.5	.80	20	12	52	.28	7.2	0.055	1.4	5.13	MW	CG	N
0.720	18.29	71930S	1.25	31.8	.610	15.5	12	2.2	.64	16	7.9	35	.28	7.2	0.055	1.4	5.13	SST	CG	N
0.720	18.29	71941	1.25	31.8	.602	15.3	18	3.2	.78	20	14	64	.31	7.9	0.059	1.5	5.25	MW	CG	N
0.720	18.29	71941S	1.25	31.8	.602	15.3	16	2.7	.63	16	9.7	43	.31	7.9	0.059	1.5	5.25	SST	CG	N
0.720	18.29	71955	1.25	31.8	.594	15.1	19	3.3	.86	22	16	71	.39	10.0	0.063	1.6	6.25	MW	CG	N
0.720	18.29	71955S	1.25	31.8	.594	15.1	16	2.8	.74	19	12	53	.39	10.0	0.063	1.6	6.25	SST	CG	N
0.720	18.29	71966	1.25	31.8	.590	15.0	24	4.2	.79	20	19	85	.37	9.5	0.065	1.7	5.75	MW	CG	N
0.720	18.29	71966S	1.25	31.8	.590	15.0	21	3.6	.63	16	13	58	.37	9.5	0.065	1.7	5.75	SST	CG	N
0.720	18.29	71979	1.25	31.8	.586	14.9	27	4.7	.77	20	21	93	.39	10.0	0.067	1.7	5.88	MW	CG	N
0.720	18.29	71979S	1.25	31.8	.586	14.9	23	4.0	.62	16	14	63	.39	10.0	0.067	1.7	5.88	SST	CG	N
0.720	18.29	71997	1.25	31.8	.584	14.8	28	4.8	.79	20	22	97	.41	10.4	0.068	1.7	6.00	MW	CG	N
0.720	18.29	71997S	1.25	31.8	.584	14.8	23	4.1	.63	16	15	66	.41	10.4	0.068	1.7	6.00	SST	CG	N
0.720	18.29	72017	1.25	31.8	.576	14.6	34	6.0	.73	18	25	110	.44	11.2	0.072	1.8	6.13	MW	CG	N
0.720	18.29	72017S	1.25	31.8	.576	14.6	29	5.1	.57	15	17	74	.44	11.2	0.072	1.8	6.13	SST	CG	N
0.720	18.29	72036	1.25	31.8	.560	14.2	50	8.7	.68	17	34	150	.52	13.2	0.080	2.0	6.50	MW	CG	N
0.720	18.29	72036S	1.25	31.8	.560	14.2	42	7.4	.53	14	23	100	.52	13.2	0.080	2.0	6.50	SST	CG	N
0.720	18.29	72037	1.25	31.8	.560	14.2	83	14	.41	10	34	150	.38	9.7	0.080	2.0	4.75	MW	CG	N
0.720	18.29	72037S	1.25	31.8	.560	14.2	70	12	.32	8.2	23	100	.38	9.7	0.080	2.0	4.75	SST	CG	N
0.720	18.29	72060	1.25	31.8	.558	14.2	54	9.5	.64	16	35	155	.52	13.1	0.081	2.1	6.38	MW	CG	N
0.720	18.29	72060S	1.25	31.8	.558	14.2	46	8.1	.51	13	23	104	.52	13.1	0.081	2.1	6.38	SST	CG	N
0.720	18.29	72073	1.25	31.8	.550	14.0	75	13	.54	14	40	179	.50	12.7	0.085	2.2	5.88	MW	CG	N
0.720	18.29	72073S	1.25	31.8	.550	14.0	63	11	.43	11	27	120	.50	12.7	0.085	2.2	5.88	SST	CG	N
0.720	18.29	72100	1.25	31.8	.528	13.4	126	22	.44	11	55	245	.58	14.6	0.096	2.4	6.00	MW	CG	N
0.720	18.29	72100S	1.25	31.8	.528	13.4	107	19	.34	8.7	37	163	.58	14.6	0.096	2.4	6.00	SST	CG	N
0.720	18.29	72113	1.25	31.8	.510	13.0	184	32	.39	9.9	72	318	.64	16.3	0.105	2.7	6.13	MW	CG	N
0.720	18.29	72113S	1.25	31.8	.510	13.0	157	27	.30	7.7	47	211	.64	16.3	0.105	2.7	6.13	SST	CG	N
0.720	18.29	72126	1.25	31.8	.496	12.6	238	42	.35	8.9	83	371	.70	17.8	0.112	2.8	6.25	MW	CG	N
0.720	18.29	72126S	1.25	31.8	.496	12.6	203	35	.27	6.8	54	242	.70	17.8	0.112	2.8	6.25	SST	CG	N
0.720	18.29	71931	1.50	38.1	.610	15.5	12	2.0	1.0	26	12	52	.32	8.2	0.055	1.4	5.88	MW	CG	N
0.720	18.29	71931S	1.50	38.1	.610	15.5	9.8	1.7	.81	21	7.9	35	.32	8.2	0.055	1.4	5.88	SST	CG	N
0.720	18.29	71942	1.50	38.1	.602	15.3	15	2.6	.96	24	14	64	.35	9.0	0.059	1.5	6.00	MW	CG	N
0.720	18.29	71942S	1.50	38.1	.602	15.3	13	2.2	.76	19	9.7	43	.35	9.0	0.059	1.5	6.00	SST	CG	N
0.720	18.29	71956	1.50	38.1	.594	15.1	15	2.6	1.0	26	16	69	.46	11.8	0.063	1.6	7.38	MW	CG	N
0.720	18.29	71956S	1.50	38.1	.594	15.1	13	2.2	.93	24	12	53	.46	11.8	0.063	1.6	7.38	SST	CG	N
0.720	18.29	71967	1.50	38.1	.590	15.0	20	3.5	.96	24	19	85	.43	10.9	0.065	1.7	6.63	MW	CG	N
0.720	18.29	71967S	1.50	38.1	.590	15.0	17	3.0	.77	19	13	58	.43	10.9	0.065	1.7	6.63	SST	CG	N
0.720	18.29	71980	1.50	38.1	.586	14.9	22	3.9	.95	24	21	93	.45	11.5	0.067	1.7	6.75	MW	CG	N
0.720	18.29	71980S	1.50	38.1	.586	14.9	19	3.3	.76	19	14	63	.45	11.5	0.067	1.7	6.75	SST	CG	N
0.720	18.29	71999	1.50	38.1	.584	14.8	22	3.9	.97	25	22	97	.48	12.1	0.068	1.7	7.00	MW	CG	N
0.720	18.29	71999S	1.50	38.1	.584	14.8	19	3.3	.78	20	15	66	.48	12.1	0.068	1.7	7.00	SST	CG	N
0.720	18.29	72018	1.50	38.1	.576	14.6	26	4.6	.95	24	25	110	.54	13.7	0.072	1.8	7.50	MW	CG	N
0.720	18.29	72018S	1.50	38.1	.576	14.6	22	3.9	.75	19	17	74	.54	13.7	0.072	1.8	7.50	SST	CG	N
0.720	18.29	72039	1.50	38.1	.560	14.2	41	7.1	.83	21	34	150	.60	15.2	0.080	2.0	7.50	MW	CG	N
0.720	18.29	72039S	1.50	38.1	.560	14.2	34	6.0	.66	17	23	100	.60	15.2	0.080	2.0	7.50	SST	CG	N
0.720	18.29	72040	1.50	38.1	.560	14.2	67	12	.50	13	34	150	.43	10.9	0.080	2.0	5.38	MW	CG	N
0.720	18.29	72040S	1.50	38.1	.560	14.2	57	10	.40	10	23	100	.43	10.9	0.080	2.0	5.38	SST	CG	N
0.720	18.29	72061	1.50	38.1	.558	14.2	44	7.7	.79	20	35	155	.60	15.2	0.081	2.1	7.38	MW	CG	N
0.720	18.29	72061S	1.50	38.1	.558	14.2	38	6.6	.62	16	23	104	.60	15.2	0.081	2.1	7.38	SST	CG	N
0.720	18.29	72074	1.50	38.1	.550	14.0	61	11	.66	17	40	179	.58	14.8	0.085	2.2	6.88	MW	CG	N
0.720	18.29	72074S	1.50	38.1	.550	14.0	51	9.0	.52	13	27	120	.58	14.8	0.085	2.2	6.88	SST	CG	N
0.720	18.29	72101	1.50	38.1	.528	13.4	102	18	.54	14	55	245	.66	16.8	0.096	2.4	6.88	MW	CG	N
0.720	18.29	72101S	1.50	38.1	.528	13.4	87	15	.42	11	37	163	.66	16.8	0.096	2.4	6.88	SST	CG	N
0.720	18.29	72114	1.50	38.1	.510	13.0	149	26	.48	12	72	318	.74	18.7	0.105	2.7	7.00	MW	CG	N
0.720	18.29	72114S	1.50	38.1	.510	13.0	126	22	.38	9.5	47	211	.74	18.7	0.105	2.7	7.00	SST	CG	N
0.720	18.29	72127	1.50	38.1	.496	12.6	192	34	.44	11	83	371	.81	20.6	0.112	2.8	7.25	MW	CG	N
0.720	18.29	72127S	1.50	38.1	.496	12.6	163	29	.33	8.5	54	242	.81	20.6	0.112	2.8	7.25	SST	CG	N
0.720	18.29	71932	1.75	44.5	.610	15.5	9.1	1.6	1.3	33	12	52	.38	9.6	0.055	1.4	6.88	MW	CG	N
0.720	18.29	71932S	1.75	44.5	.610	15.5	7.7	1.4	1.0	26	7.9	35	.38	9.6	0.055	1.4	6.88	SST	CG	N
0.720	18.29	71943	1.75	44.5	.602	15.3	13	2.2	1.1	29	14	64	.40	10.1	0.059	1.5	6.75	MW	CG	N
0.720	18.29	71943S	1.75	44.5	.602	15.3	11	1.9	.90	23	9.7	43	.40	10.1	0.059	1.5	6.75	SST	CG	N
0.720	18.29	71957	1.75	44.5	.594	15.1	13	2.3	1.2	31	16	72	.51	13.0	0.063	1.6	8.13	MW	CG	N
0.720	18.29	71957S	1.75	44.5	.594	15.1	11	1.9	1.1	27	12	53	.51	13.0	0.063	1.6	8.13	SST	CG	N
0.720	18.29	71968	1.75	44.5	.590	15.0	17	2.9	1.2	29	19	85	.49	12.4	0.065	1.7	7.50	MW	CG	N
0.720	18.29	71968S	1.75	44.5	.590	15.0	14	2.5	.92	23	13	58	.49	12.4	0.065	1.7	7.50	SST	CG	N
0.720	18.29	71981	1.75	44.5	.586	14.9	18	3.2	1.2	29	21	93	.52	13.2	0.067	1.7	7.75	MW	CG	N
0.720	18.29	71981S	1.75	44.5	.586	14.9	15	2.7	.93	24	14	63	.52	13.2	0.067	1.7	7.75	SST	CG	N
0.720	18.29	72001	1.75	44.5	.584	14.8	19	3.3	1.1	29	22	97	.54	13.6	0.068	1.7	7.88	MW	CG	N
0.720	18.29	72001S	1.75	44.5	.584	14.8	16	2.8	.92	23	15	66	.54	13.6	0.068	1.7	7.88	SST	CG	N
0.720	18.29	72019	1.75	44.5	.576	14.6	22	3.9	1.1	29	25	110	.61	15.5	0.072	1.8	8.50	MW	CG	N
0.720	18.29	72019S	1.75	44.5	.576	14.6	19	3.3	.89	22	17	74	.61	15.5	0.072	1.8	8.50	SST	CG	N
0.720	18.29	72042	1.75	44.5	.560	14.2	34	6.0	.98	25	34	150	.69	17.5	0.080	2.0	8.63	MW	CG	N
0.720	18.29	72042S	1.75	44.5	.560	14.2	29	5.1	.78	20	23	100	.69	17.5	0.080	2.0	8.63	SST	CG	N
0.720	18.29	72062	1.75	44.5	.558	14.2	37	6.5	.93	24	35	155	.68	17.2	0.081	2.1	8.38	MW	CG	N
0.720	18.29	72062S	1.75	44.5	.558	14.2	32	5.6	.74	19	23	104	.68	17.2	0.081	2.1	8.38	SST	CG	N
0.720	18.29	72075	1.75	44.5	.550	14.0	51	8.9	.79	20	40	179	.66	16.7	0.085	2.2	7.75	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.720	18.29	72075S	1.75	44.5	.550	14.0	43	7.6	.62	16	27	120	.66	16.7	0.085	2.2	7.75	SST	CG	N
0.720	18.29	72084	1.75	44.5	.538	13.7	56	9.8	.84	21	47	210	.82	20.8	0.091	2.3	9.00	MW	CG	N
0.720	18.29	72084S	1.75	44.5	.538	13.7	48	8.4	.65	17	31	139	.82	20.8	0.091	2.3	9.00	SST	CG	N
0.720	18.29	72102	1.75	44.5	.528	13.4	86	15	.65	16	55	245	.76	19.2	0.096	2.4	7.88	MW	CG	N
0.720	18.29	72102S	1.75	44.5	.528	13.4	73	13	.50	13	37	163	.76	19.2	0.096	2.4	7.88	SST	CG	N
0.720	18.29	72115	1.75	44.5	.510	13.0	124	22	.58	15	72	318	.84	21.3	0.105	2.7	8.00	MW	CG	N
0.720	18.29	72115S	1.75	44.5	.510	13.0	106	19	.45	11	47	211	.84	21.3	0.105	2.7	8.00	SST	CG	N
0.720	18.29	72128	1.75	44.5	.496	12.6	160	28	.52	13	83	371	.92	23.5	0.112	2.8	8.25	MW	CG	N
0.720	18.29	72128S	1.75	44.5	.496	12.6	136	24	.40	10	54	242	.92	23.5	0.112	2.8	8.25	SST	CG	N
0.720	18.29	71933	2.00	50.8	.610	15.5	8.5	1.5	1.4	35	12	52	.40	10.1	0.055	1.4	7.25	MW	CG	N
0.720	18.29	71933S	2.00	50.8	.610	15.5	7.2	1.3	1.1	28	7.9	35	.40	10.1	0.055	1.4	7.25	SST	CG	N
0.720	18.29	71944	2.00	50.8	.602	15.3	11	1.9	1.3	33	14	64	.44	11.2	0.059	1.5	7.50	MW	CG	N
0.720	18.29	71944S	2.00	50.8	.602	15.3	9.4	1.6	1.0	26	9.7	43	.44	11.2	0.059	1.5	7.50	SST	CG	N
0.720	18.29	71958	2.00	50.8	.594	15.1	11	1.9	1.4	36	16	69	.58	14.8	0.063	1.6	9.25	MW	CG	N
0.720	18.29	71958S	2.00	50.8	.594	15.1	9.4	1.6	1.3	32	12	53	.58	14.8	0.063	1.6	9.25	SST	CG	N
0.720	18.29	71969	2.00	50.8	.590	15.0	14	2.5	1.3	34	19	85	.54	13.8	0.065	1.7	8.38	MW	CG	N
0.720	18.29	71969S	2.00	50.8	.590	15.0	12	2.1	1.1	27	13	58	.54	13.8	0.065	1.7	8.38	SST	CG	N
0.720	18.29	71982	2.00	50.8	.586	14.9	16	2.7	1.3	34	21	93	.59	14.9	0.067	1.7	8.75	MW	CG	N
0.720	18.29	71982S	2.00	50.8	.586	14.9	13	2.3	1.1	27	14	63	.59	14.9	0.067	1.7	8.75	SST	CG	N
0.720	18.29	72003	2.00	50.8	.584	14.8	16	2.9	1.3	34	22	97	.60	15.1	0.068	1.7	8.75	MW	CG	N
0.720	18.29	72003S	2.00	50.8	.584	14.8	14	2.4	1.1	27	15	66	.60	15.1	0.068	1.7	8.75	SST	CG	N
0.720	18.29	72020	2.00	50.8	.576	14.6	20	3.5	1.2	31	25	110	.66	16.7	0.072	1.8	9.13	MW	CG	N
0.720	18.29	72020S	2.00	50.8	.576	14.6	17	3.0	.97	25	17	74	.66	16.7	0.072	1.8	9.13	SST	CG	N
0.720	18.29	72044	2.00	50.8	.560	14.2	30	5.2	1.1	29	34	150	.77	19.6	0.080	2.0	9.63	MW	CG	N
0.720	18.29	72044S	2.00	50.8	.560	14.2	25	4.4	.90	23	23	100	.77	19.6	0.080	2.0	9.63	SST	CG	N
0.720	18.29	72063	2.00	50.8	.558	14.2	32	5.6	1.1	28	35	155	.76	19.3	0.081	2.1	9.38	MW	CG	N
0.720	18.29	72063S	2.00	50.8	.558	14.2	27	4.8	.86	22	23	104	.76	19.3	0.081	2.1	9.38	SST	CG	N
0.720	18.29	72076	2.00	50.8	.550	14.0	44	7.7	.91	23	40	179	.73	18.6	0.085	2.2	8.63	MW	CG	N
0.720	18.29	72076S	2.00	50.8	.550	14.0	37	6.5	.72	18	27	120	.73	18.6	0.085	2.2	8.63	SST	CG	N
0.720	18.29	72086	2.00	50.8	.538	13.7	49	8.5	.97	25	47	210	.92	23.4	0.091	2.3	10.1	MW	CG	N
0.720	18.29	72086S	2.00	50.8	.538	13.7	41	7.2	.76	19	31	139	.92	23.4	0.091	2.3	10.1	SST	CG	N
0.720	18.29	72103	2.00	50.8	.528	13.4	74	13	.75	19	55	245	.85	21.6	0.096	2.4	8.88	MW	CG	N
0.720	18.29	72103S	2.00	50.8	.528	13.4	63	11	.58	15	37	163	.85	21.6	0.096	2.4	8.88	SST	CG	N
0.720	18.29	72116	2.00	50.8	.510	13.0	107	19	.67	17	72	318	.95	24.0	0.105	2.7	9.00	MW	CG	N
0.720	18.29	72116S	2.00	50.8	.510	13.0	91	16	.52	13	47	211	.95	24.0	0.105	2.7	9.00	SST	CG	N
0.720	18.29	72129	2.00	50.8	.496	12.6	138	24	.61	15	83	371	1.04	26.3	0.112	2.8	9.25	MW	CG	N
0.720	18.29	72129S	2.00	50.8	.496	12.6	117	21	.47	12	54	242	1.04	26.3	0.112	2.8	9.25	SST	CG	N
0.720	18.29	71934	2.25	57.2	.610	15.5	7.5	1.3	1.5	39	12	52	.44	11.2	0.055	1.4	8.00	MW	CG	N
0.720	18.29	71934S	2.25	57.2	.610	15.5	6.4	1.1	1.2	31	7.9	35	.44	11.2	0.055	1.4	8.00	SST	CG	N
0.720	18.29	71945	2.25	57.2	.602	15.3	9.7	1.7	1.5	38	14	64	.49	12.4	0.059	1.5	8.25	MW	CG	N
0.720	18.29	71945S	2.25	57.2	.602	15.3	8.2	1.4	1.2	30	9.7	43	.49	12.4	0.059	1.5	8.25	SST	CG	N
0.720	18.29	71959	2.25	57.2	.594	15.1	11	1.9	1.6	40	17	78	.58	14.8	0.063	1.6	9.25	MW	CG	N
0.720	18.29	71959S	2.25	57.2	.594	15.1	9.4	1.6	1.3	32	12	53	.58	14.8	0.063	1.6	9.25	SST	CG	N
0.720	18.29	71970	2.25	57.2	.590	15.0	13	2.2	1.5	38	19	85	.60	15.3	0.065	1.7	9.25	MW	CG	N
0.720	18.29	71970S	2.25	57.2	.590	15.0	11	1.9	1.2	30	13	58	.60	15.3	0.065	1.7	9.25	SST	CG	N
0.720	18.29	71983	2.25	57.2	.586	14.9	14	2.5	1.4	37	21	93	.62	15.7	0.067	1.7	9.25	MW	CG	N
0.720	18.29	71983S	2.25	57.2	.586	14.9	12	2.2	1.2	29	14	63	.62	15.7	0.067	1.7	9.25	SST	CG	N
0.720	18.29	72005	2.25	57.2	.584	14.8	15	2.5	1.5	38	22	97	.65	16.6	0.068	1.7	9.63	MW	CG	N
0.720	18.29	72005S	2.25	57.2	.584	14.8	12	2.2	1.2	30	15	66	.65	16.6	0.068	1.7	9.63	SST	CG	N
0.720	18.29	72021	2.25	57.2	.576	14.6	18	3.2	1.4	35	25	110	.71	18.1	0.072	1.8	9.88	MW	CG	N
0.720	18.29	72021S	2.25	57.2	.576	14.6	15	2.7	1.1	27	17	74	.71	18.1	0.072	1.8	9.88	SST	CG	N
0.720	18.29	72046	2.25	57.2	.560	14.2	26	4.6	1.3	33	34	150	.85	21.6	0.080	2.0	10.6	MW	CG	N
0.720	18.29	72046S	2.25	57.2	.560	14.2	22	3.9	1.0	26	23	100	.85	21.6	0.080	2.0	10.6	SST	CG	N
0.720	18.29	72064	2.25	57.2	.558	14.2	28	5.0	1.2	31	35	155	.84	21.3	0.081	2.1	10.4	MW	CG	N
0.720	18.29	72064S	2.25	57.2	.558	14.2	24	4.2	.97	25	23	104	.84	21.3	0.081	2.1	10.4	SST	CG	N
0.720	18.29	72077	2.25	57.2	.550	14.0	39	6.8	1.0	26	40	179	.82	20.8	0.085	2.2	9.63	MW	CG	N
0.720	18.29	72077S	2.25	57.2	.550	14.0	33	5.8	.82	21	27	120	.82	20.8	0.085	2.2	9.63	SST	CG	N
0.720	18.29	72088	2.25	57.2	.538	13.7	43	7.5	1.1	28	47	210	1.02	26.0	0.091	2.3	11.3	MW	CG	N
0.720	18.29	72088S	2.25	57.2	.538	13.7	36	6.3	.86	22	31	139	1.02	26.0	0.091	2.3	11.3	SST	CG	N
0.720	18.29	72104	2.25	57.2	.528	13.4	65	11	.85	22	55	245	.94	23.8	0.096	2.4	9.75	MW	CG	N
0.720	18.29	72104S	2.25	57.2	.528	13.4	55	9.6	.66	17	37	163	.94	23.8	0.096	2.4	9.75	SST	CG	N
0.720	18.29	72117	2.25	57.2	.510	13.0	94	16	.76	19	72	318	1.05	26.7	0.105	2.7	10.0	MW	CG	N
0.720	18.29	72117S	2.25	57.2	.510	13.0	80	14	.59	15	47	211	1.05	26.7	0.105	2.7	10.0	SST	CG	N
0.720	18.29	72130	2.25	57.2	.496	12.6	121	21	.69	18	83	371	1.16	29.5	0.112	2.8	10.4	MW	CG	N
0.720	18.29	72130S	2.25	57.2	.496	12.6	103	18	.53	13	54	242	1.16	29.5	0.112	2.8	10.4	SST	CG	N
0.720	18.29	71935	2.50	63.5	.610	15.5	6.8	1.2	1.7	44	12	52	.47	12.0	0.055	1.4	8.63	MW	CG	N
0.720	18.29	71935S	2.50	63.5	.610	15.5	5.7	1.0	1.4	35	7.9	35	.47	12.0	0.055	1.4	8.63	SST	CG	N
0.720	18.29	71946	2.50	63.5	.602	15.3	8.7	1.5	1.6	42	14	64	.52	13.3	0.059	1.5	8.88	MW	CG	N
0.720	18.29	71946S	2.50	63.5	.602	15.3	7.4	1.3	1.3	33	9.7	43	.52	13.3	0.059	1.5	8.88	SST	CG	N
0.720	18.29	71960	2.50	63.5	.594	15.1	9.9	1.7	1.8	45	17	78	.64	16.2	0.063	1.6	10.1	MW	CG	N
0.720	18.29	71960S	2.50	63.5	.594	15.1	8.4	1.5	1.4	36	12	53	.64	16.2	0.063	1.6	10.1	SST	CG	N
0.720	18.29	71971	2.50	63.5	.590	15.0	11	2.0	1.7	43	19	85	.66	16.7	0.065	1.7	10.1	MW	CG	N
0.720	18.29	71971S	2.50	63.5	.590	15.0	9.6	1.7	1.4	34	13	58	.66	16.7	0.065	1.7	10.1	SST	CG	N
0.720	18.29	71984	2.50	63.5	.586	14.9	14	2.4	1.5	39	21	93	.65	16.6	0.067	1.7	9.75	MW	CG	N
0.720	18.29	71984S	2.50	63.5	.586	14.9	11	2.0	1.2	31	14	63	.65	16.6	0.067	1.7	9.75	SST	CG	N
0.720	18.29	72007	2.50	63.5	.584	14.8	13	2.3	1.7	43	22	97	.71	18.1	0.068	1.7	10.5	MW	CG	N
0.720	18.29	72007S	2.50	63.5	.584	14.8	11	1.9	1.3	34	15	66	.71	18.1	0.068	1.7	10.5	SST	CG	N
0.720	18.29	72022	2.50	63.5	.576	14.6	16	2.8	1.5	39	25	110	.78	19.9	0.072	1.8	10.9	MW	CG	N
0.720	18.29	72022S	2.50	63.5	.576	14.6	14	2.4	1.2	31	17	74	.78	19.9	0.072	1.8	10.9	SST	CG	N
0.720	18.29	72048	2.50	63.5	.560	14.2	23	4.1	1.5	37	34	150	.93	23.6	0.080	2.0	11.6	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.720	18.29	72048S	2.50	63.5	.560	14.2	20	3.5	1.1	29	23	100	.93	23.6	0.080	2.0	11.6	SST	CG	N
0.720	18.29	72065	2.50	63.5	.558	14.2	25	4.4	1.4	35	35	155	.92	23.4	0.081	2.1	11.4	MW	CG	N
0.720	18.29	72065S	2.50	63.5	.558	14.2	21	3.8	1.1	28	23	104	.92	23.4	0.081	2.1	11.4	SST	CG	N
0.720	18.29	72078	2.50	63.5	.550	14.0	35	6.1	1.2	30	40	179	.89	22.7	0.085	2.2	10.5	MW	CG	N
0.720	18.29	72078S	2.50	63.5	.550	14.0	29	5.1	.92	23	27	120	.89	22.7	0.085	2.2	10.5	SST	CG	N
0.720	18.29	72090	2.50	63.5	.538	13.7	38	6.7	1.2	32	47	210	1.13	28.6	0.091	2.3	12.4	MW	CG	N
0.720	18.29	72090S	2.50	63.5	.538	13.7	32	5.7	.97	25	31	139	1.13	28.6	0.091	2.3	12.4	SST	CG	N
0.720	18.29	72105	2.50	63.5	.528	13.4	58	10	.96	24	55	245	1.03	26.2	0.096	2.4	10.8	MW	CG	N
0.720	18.29	72105S	2.50	63.5	.528	13.4	49	8.6	.75	19	37	163	1.03	26.2	0.096	2.4	10.8	SST	CG	N
0.720	18.29	72118	2.50	63.5	.510	13.0	84	15	.86	22	72	318	1.16	29.3	0.105	2.7	11.0	MW	CG	N
0.720	18.29	72118S	2.50	63.5	.510	13.0	71	12	.67	17	47	211	1.16	29.3	0.105	2.7	11.0	SST	CG	N
0.720	18.29	72131	2.50	63.5	.496	12.6	107	19	.78	20	83	371	1.27	32.4	0.112	2.8	11.4	MW	CG	N
0.720	18.29	72131S	2.50	63.5	.496	12.6	91	16	.60	15	54	242	1.27	32.4	0.112	2.8	11.4	SST	CG	N
0.720	18.29	71936	2.75	69.9	.610	15.5	6.2	1.1	1.9	48	12	52	.51	12.9	0.055	1.4	9.25	MW	CG	N
0.720	18.29	71936S	2.75	69.9	.610	15.5	5.2	.92	1.5	38	7.9	35	.51	12.9	0.055	1.4	9.25	SST	CG	N
0.720	18.29	71948	2.75	69.9	.602	15.3	7.2	1.3	2.0	51	14	64	.61	15.5	0.059	1.5	10.4	MW	CG	N
0.720	18.29	71948S	2.75	69.9	.602	15.3	6.1	1.1	1.6	40	9.7	43	.61	15.5	0.059	1.5	10.4	SST	CG	N
0.720	18.29	71961	2.75	69.9	.594	15.1	8.9	1.6	2.0	50	17	78	.69	17.6	0.063	1.6	11.0	MW	CG	N
0.720	18.29	71961S	2.75	69.9	.594	15.1	7.6	1.3	1.6	40	12	53	.69	17.6	0.063	1.6	11.0	SST	CG	N
0.720	18.29	71972	2.75	69.9	.590	15.0	10	1.8	1.9	48	19	85	.72	18.4	0.065	1.7	11.1	MW	CG	N
0.720	18.29	71972S	2.75	69.9	.590	15.0	8.5	1.5	1.5	39	13	58	.72	18.4	0.065	1.7	11.1	SST	CG	N
0.720	18.29	72009	2.75	69.9	.584	14.8	12	2.0	1.9	47	22	97	.78	19.9	0.068	1.7	11.5	MW	CG	N
0.720	18.29	72009S	2.75	69.9	.584	14.8	9.9	1.7	1.5	38	15	66	.78	19.9	0.068	1.7	11.5	SST	CG	N
0.720	18.29	72023	2.75	69.9	.576	14.6	15	2.6	1.7	43	25	110	.84	21.3	0.072	1.8	11.6	MW	CG	N
0.720	18.29	72023S	2.75	69.9	.576	14.6	12	2.2	1.3	34	17	74	.84	21.3	0.072	1.8	11.6	SST	CG	N
0.720	18.29	72050	2.75	69.9	.560	14.2	21	3.7	1.6	41	34	150	1.02	25.9	0.080	2.0	12.8	MW	CG	N
0.720	18.29	72050S	2.75	69.9	.560	14.2	18	3.1	1.3	32	23	100	1.02	25.9	0.080	2.0	12.8	SST	CG	N
0.720	18.29	72066	2.75	69.9	.558	14.2	23	4.0	1.5	39	35	155	1.00	25.5	0.081	2.1	12.4	MW	CG	N
0.720	18.29	72066S	2.75	69.9	.558	14.2	19	3.4	1.2	31	23	104	1.00	25.5	0.081	2.1	12.4	SST	CG	N
0.720	18.29	72079	2.75	69.9	.550	14.0	31	5.5	1.3	33	40	179	.97	24.6	0.085	2.2	11.4	MW	CG	N
0.720	18.29	72079S	2.75	69.9	.550	14.0	27	4.6	1.0	26	27	120	.97	24.6	0.085	2.2	11.4	SST	CG	N
0.720	18.29	72092	2.75	69.9	.538	13.7	34	6.0	1.4	35	47	210	1.23	31.2	0.091	2.3	13.5	MW	CG	N
0.720	18.29	72092S	2.75	69.9	.538	13.7	29	5.1	1.1	27	31	139	1.23	31.2	0.091	2.3	13.5	SST	CG	N
0.720	18.29	72106	2.75	69.9	.528	13.4	52	9.1	1.1	27	55	245	1.12	28.3	0.096	2.4	11.6	MW	CG	N
0.720	18.29	72106S	2.75	69.9	.528	13.4	44	7.8	.83	21	37	163	1.12	28.3	0.096	2.4	11.6	SST	CG	N
0.720	18.29	72119	2.75	69.9	.510	13.0	75	13	.95	24	72	318	1.26	32.0	0.105	2.7	12.0	MW	CG	N
0.720	18.29	72119S	2.75	69.9	.510	13.0	64	11	.74	19	47	211	1.26	32.0	0.105	2.7	12.0	SST	CG	N
0.720	18.29	72132	2.75	69.9	.496	12.6	97	17	.86	22	83	371	1.39	35.2	0.112	2.8	12.4	MW	CG	N
0.720	18.29	72132S	2.75	69.9	.496	12.6	82	14	.66	17	54	242	1.39	35.2	0.112	2.8	12.4	SST	CG	N
0.720	18.29	71937	3.00	76.2	.610	15.5	5.6	.98	2.1	53	12	52	.55	14.0	0.055	1.4	10.0	MW	CG	N
0.720	18.29	71937S	3.00	76.2	.610	15.5	4.8	.83	1.7	42	7.9	35	.55	14.0	0.055	1.4	10.0	SST	CG	N
0.720	18.29	71950	3.00	76.2	.602	15.3	6.6	1.2	2.2	55	14	64	.66	16.7	0.059	1.5	11.1	MW	CG	N
0.720	18.29	71950S	3.00	76.2	.602	15.3	5.6	.98	1.7	44	9.7	43	.66	16.7	0.059	1.5	11.1	SST	CG	N
0.720	18.29	71962	3.00	76.2	.594	15.1	8.1	1.4	2.2	55	17	78	.75	19.0	0.063	1.6	11.9	MW	CG	N
0.720	18.29	71962S	3.00	76.2	.594	15.1	6.9	1.2	1.7	44	12	53	.75	19.0	0.063	1.6	11.9	SST	CG	N
0.720	18.29	71973	3.00	76.2	.590	15.0	9.1	1.6	2.1	53	19	85	.78	19.8	0.065	1.7	12.0	MW	CG	N
0.720	18.29	71973S	3.00	76.2	.590	15.0	7.8	1.4	1.7	42	13	58	.78	19.8	0.065	1.7	12.0	SST	CG	N
0.720	18.29	71985	3.00	76.2	.586	14.9	11	1.8	2.0	51	21	93	.80	20.2	0.067	1.7	11.9	MW	CG	N
0.720	18.29	71985S	3.00	76.2	.586	14.9	8.9	1.6	1.6	40	14	63	.80	20.2	0.067	1.7	11.9	SST	CG	N
0.720	18.29	72011	3.00	76.2	.584	14.8	11	1.9	2.0	52	22	97	.84	21.4	0.068	1.7	12.4	MW	CG	N
0.720	18.29	72011S	3.00	76.2	.584	14.8	9.1	1.6	1.6	41	15	66	.84	21.4	0.068	1.7	12.4	SST	CG	N
0.720	18.29	72024	3.00	76.2	.576	14.6	13	2.3	1.9	47	25	110	.91	23.1	0.072	1.8	12.6	MW	CG	N
0.720	18.29	72024S	3.00	76.2	.576	14.6	11	2.0	1.5	37	17	74	.91	23.1	0.072	1.8	12.6	SST	CG	N
0.720	18.29	72052	3.00	76.2	.560	14.2	19	3.3	1.8	45	34	150	1.10	27.9	0.080	2.0	13.8	MW	CG	N
0.720	18.29	72052S	3.00	76.2	.560	14.2	16	2.8	1.4	35	23	100	1.10	27.9	0.080	2.0	13.8	SST	CG	N
0.720	18.29	72067	3.00	76.2	.558	14.2	21	3.6	1.7	43	35	155	1.08	27.5	0.081	2.1	13.4	MW	CG	N
0.720	18.29	72067S	3.00	76.2	.558	14.2	18	3.1	1.3	34	23	104	1.08	27.5	0.081	2.1	13.4	SST	CG	N
0.720	18.29	72080	3.00	76.2	.550	14.0	28	5.0	1.4	36	40	179	1.04	26.4	0.085	2.2	12.3	MW	CG	N
0.720	18.29	72080S	3.00	76.2	.550	14.0	24	4.2	1.1	28	27	120	1.04	26.4	0.085	2.2	12.3	SST	CG	N
0.720	18.29	72094	3.00	76.2	.538	13.7	31	5.5	1.5	38	47	210	1.33	33.8	0.091	2.3	14.6	MW	CG	N
0.720	18.29	72094S	3.00	76.2	.538	13.7	27	4.7	1.2	30	31	139	1.33	33.8	0.091	2.3	14.6	SST	CG	N
0.720	18.29	72107	3.00	76.2	.528	13.4	47	8.3	1.2	30	55	245	1.21	30.8	0.096	2.4	12.6	MW	CG	N
0.720	18.29	72107S	3.00	76.2	.528	13.4	40	7.1	.91	23	37	163	1.21	30.8	0.096	2.4	12.6	SST	CG	N
0.720	18.29	72120	3.00	76.2	.510	13.0	69	12	1.0	26	72	318	1.35	34.3	0.105	2.7	12.9	MW	CG	N
0.720	18.29	72120S	3.00	76.2	.510	13.0	58	10	.81	21	47	211	1.35	34.3	0.105	2.7	12.9	SST	CG	N
0.720	18.29	72133	3.00	76.2	.496	12.6	88	15	.95	24	83	371	1.50	38.0	0.112	2.8	13.4	MW	CG	N
0.720	18.29	72133S	3.00	76.2	.496	12.6	75	13	.73	18	54	242	1.50	38.0	0.112	2.8	13.4	SST	CG	N
0.720	18.29	71986	3.25	82.6	.586	14.9	9.2	1.6	2.3	58	21	93	.89	22.5	0.067	1.7	13.3	MW	CG	N
0.720	18.29	71986S	3.25	82.6	.586	14.9	7.8	1.4	1.8	46	14	63	.89	22.5	0.067	1.7	13.3	SST	CG	N
0.720	18.29	71988	3.25	82.6	.586	14.9	11	1.9	2.0	50	21	93	.79	20.0	0.067	1.7	11.8	MW	CG	N
0.720	18.29	71988S	3.25	82.6	.586	14.9	9.1	1.6	1.6	40	14	63	.79	20.0	0.067	1.7	11.8	SST	CG	N
0.720	18.29	72025	3.25	82.6	.576	14.6	13	2.3	1.9	48	25	110	.93	23.5	0.072	1.8	12.9	MW	CG	N
0.720	18.29	72025S	3.25	82.6	.576	14.6	11	1.9	1.5	38	17	74	.93	23.5	0.072	1.8	12.9	SST	CG	N
0.720	18.29	71975	3.50	88.9	.590	15.0	7.8	1.4	2.5	62	19	85	.89	22.7	0.065	1.7	13.8	MW	CG	N
0.720	18.29	71975S	3.50	88.9	.590	15.0	6.6	1.2	2.0	50	13	58	.89	22.7	0.065	1.7	13.8	SST	CG	N
0.720	18.29	71987	3.50	88.9	.586	14.9	8.5	1.5	2.5	62	21	93	.95	24.2	0.067	1.7	14.3	MW	CG	N
0.720	18.29	71987S	3.50	88.9	.586	14.9	7.2	1.3	2.0	50	14	63	.95	24.2	0.067	1.7	14.3	SST	CG	N
0.720	18.29	71989	3.50	88.9	.586	14.9	10	1.8	2.1	53	21	93	.83	21.1	0.067	1.7	12.4	MW	CG	N
0.720	18.29	71989S	3.50	88.9	.586	14.9	8.5	1.5	1.7	42	14	63	.83	21.1	0.067	1.7	12.4	SST	CG	N
0.720	18.29	72013	3.50	88.9	.584	14.8	9.1	1.6	2.4	61	22	97	.96	24.4	0.068	1.7	14.1	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.720	18.29	72013S	3.50	88.9	.584	14.8	7.7	1.4	1.9	49	15	66	.96	24.4	0.068	1.7	14.1	SST	CG	N
0.720	18.29	72026	3.50	88.9	.576	14.6	11	2.0	2.2	56	25	110	1.05	26.7	0.072	1.8	14.6	MW	CG	N
0.720	18.29	72026S	3.50	88.9	.576	14.6	9.6	1.7	1.7	44	17	74	1.05	26.7	0.072	1.8	14.6	SST	CG	N
0.720	18.29	72054	3.50	88.9	.560	14.2	16	2.9	2.1	52	34	150	1.26	32.0	0.080	2.0	15.8	MW	CG	N
0.720	18.29	72054S	3.50	88.9	.560	14.2	14	2.4	1.6	41	23	100	1.26	32.0	0.080	2.0	15.8	SST	CG	N
0.720	18.29	72068	3.50	88.9	.558	14.2	18	3.1	2.0	50	35	155	1.26	31.9	0.081	2.1	15.5	MW	CG	N
0.720	18.29	72068S	3.50	88.9	.558	14.2	15	2.6	1.6	40	23	104	1.26	31.9	0.081	2.1	15.5	SST	CG	N
0.720	18.29	72081	3.50	88.9	.550	14.0	24	4.2	1.7	42	40	179	1.20	30.5	0.085	2.2	14.1	MW	CG	N
0.720	18.29	72081S	3.50	88.9	.550	14.0	21	3.6	1.3	33	27	120	1.20	30.5	0.085	2.2	14.1	SST	CG	N
0.720	18.29	72096	3.50	88.9	.538	13.7	27	4.7	1.8	45	47	210	1.54	39.0	0.091	2.3	16.9	MW	CG	N
0.720	18.29	72096S	3.50	88.9	.538	13.7	23	4.0	1.4	35	31	139	1.54	39.0	0.091	2.3	16.9	SST	CG	N
0.720	18.29	72108	3.50	88.9	.528	13.4	40	7.1	1.4	35	55	245	1.39	35.4	0.096	2.4	14.5	MW	CG	N
0.720	18.29	72108S	3.50	88.9	.528	13.4	34	6.0	1.1	27	37	163	1.39	35.4	0.096	2.4	14.5	SST	CG	N
0.720	18.29	72121	3.50	88.9	.510	13.0	58	10	1.2	31	72	318	1.56	39.7	0.105	2.7	14.9	MW	CG	N
0.720	18.29	72121S	3.50	88.9	.510	13.0	49	8.7	.96	24	47	211	1.56	39.7	0.105	2.7	14.9	SST	CG	N
0.720	18.29	72134	3.50	88.9	.496	12.6	75	13	1.1	28	83	371	1.74	44.1	0.112	2.8	15.5	MW	CG	N
0.720	18.29	72134S	3.50	88.9	.496	12.6	63	11	.86	22	54	242	1.74	44.1	0.112	2.8	15.5	SST	CG	N
0.720	18.29	72027	4.00	101.6	.576	14.6	9.9	1.7	2.5	64	25	110	1.18	29.9	0.072	1.8	16.4	MW	CG	N
0.720	18.29	72027S	4.00	101.6	.576	14.6	8.4	1.5	2.0	50	17	74	1.18	29.9	0.072	1.8	16.4	SST	CG	N
0.720	18.29	72056	4.00	101.6	.560	14.2	14	2.5	2.4	61	34	150	1.43	36.3	0.080	2.0	17.9	MW	CG	N
0.720	18.29	72056S	4.00	101.6	.560	14.2	12	2.1	1.9	48	23	100	1.43	36.3	0.080	2.0	17.9	SST	CG	N
0.720	18.29	72069	4.00	101.6	.558	14.2	15	2.7	2.3	58	35	155	1.42	36.0	0.081	2.1	17.5	MW	CG	N
0.720	18.29	72069S	4.00	101.6	.558	14.2	13	2.3	1.8	46	23	104	1.42	36.0	0.081	2.1	17.5	SST	CG	N
0.720	18.29	72082	4.00	101.6	.550	14.0	21	3.7	1.9	49	40	179	1.36	34.5	0.085	2.2	16.0	MW	CG	N
0.720	18.29	72082S	4.00	101.6	.550	14.0	18	3.1	1.5	38	27	120	1.36	34.5	0.085	2.2	16.0	SST	CG	N
0.720	18.29	72109	4.00	101.6	.528	13.4	35	6.1	1.6	40	55	245	1.57	39.9	0.096	2.4	16.4	MW	CG	N
0.720	18.29	72109S	4.00	101.6	.528	13.4	32	5.2	1.2	31	37	163	1.57	39.9	0.097	2.4	16.4	SST	CG	N
0.720	18.29	72122	4.00	101.6	.510	13.0	51	8.8	1.4	36	72	318	1.77	45.0	0.105	2.7	16.9	MW	CG	N
0.720	18.29	72122S	4.00	101.6	.510	13.0	43	7.5	1.1	28	47	211	1.77	45.0	0.105	2.7	16.9	SST	CG	N
0.720	18.29	72135	4.00	101.6	.496	12.6	65	11	1.3	33	83	371	1.96	49.8	0.112	2.8	17.5	MW	CG	N
0.720	18.29	72135S	4.00	101.6	.496	12.6	55	9.6	.99	25	54	242	1.96	49.8	0.112	2.8	17.5	SST	CG	N
0.734	18.64	XX-36	.50	12.7	.626	15.9	19	3.4	.28	7.2	5.5	25	.22	5.5	0.054	1.4	4.00	SPR	CG	Z
0.734	18.64	S-3203	.56	14.3	.544	13.8	265	46	.13	3.3	35	155	.33	8.4	0.095	2.4	3.50	SST	CG	N
0.734	18.64	B-64	.63	15.9	.664	16.9	5.5	.96	.39	10	2.2	9.6	.14	3.6	0.035	0.9	3.00	SST	C	N
0.734	18.64	AA-54	.63	15.9	.574	14.6	107	19	.21	5.3	22	99	.30	7.6	0.080	2.0	3.75	SST	CG	N
0.734	18.64	II-67	.66	16.7	.614	15.6	18	3.2	.30	7.5	5.3	24	.36	9.1	0.060	1.5	5.00	SST	C	N
0.734	18.64	S-1220	.69	17.4	.524	13.3	305	53	.15	3.9	47	207	.42	10.7	0.105	2.7	4.00	SST	CG	N
0.734	18.64	S-1319	.69	17.4	.494	12.5	640	112	.10	2.6	65	291	.45	11.4	0.120	3.0	3.75	SST	CG	N
0.734	18.64	NN-98	.72	18.2	.614	15.6	15	2.7	.36	9.1	5.4	24	.36	9.1	0.060	1.5	6.00	SPR	CG	N
0.734	18.64	S-164	.72	18.2	.574	14.6	93	16	.24	6.0	22	99	.40	10.2	0.080	2.0	4.00	SST	C	N
0.734	18.64	CC-99	.75	19.1	.694	17.6	.08	.01	.56	14	.05	.21	.19	4.8	0.020	0.5	8.50	SST	C	N
0.734	18.64	BB-75	.75	19.1	.656	16.7	2.9	.50	.52	13	1.5	6.6	.23	5.9	0.039	1.0	5.00	SST	C	N
0.734	18.64	A10-62	.75	19.1	.654	16.6	3.3	.58	.55	14	1.8	8.1	.20	5.1	0.040	1.0	5.00	SST	CG	N
0.734	18.64	S-1475	.75	19.1	.646	16.4	3.6	.62	.44	11	1.6	7.0	.31	7.8	0.044	1.1	6.00	SST	C	N
0.734	18.64	11176	.75	19.1	.638	16.2	14	2.4	.40	10	5.5	25	.22	5.5	0.048	1.2	3.50	SST	C	N
0.734	18.64	3867	.75	19.1	.630	16.0	17	2.9	.42	11	7.0	31	.26	6.6	0.052	1.3	4.00	SPR	C	Z
0.734	18.64	B12-38	.75	19.1	.606	15.4	29	5.1	.38	9.7	11	50	.37	9.3	0.064	1.6	4.75	SPR	C	Z
0.734	18.64	S-3085	.88	22.2	.600	15.2	34	5.9	.41	10	14	62	.30	7.7	0.067	1.7	4.50	SST	CG	N
0.734	18.64	S-1343	.88	22.2	.574	14.6	46	8.0	.40	10	18	80	.48	12.2	0.080	2.0	6.00	SST	CG	N
0.734	18.64	V-26	.94	23.8	.650	16.5	4.5	.79	.69	17	3.1	14	.25	6.4	0.042	1.1	5.00	SPR	C	GI
0.734	18.64	S-310	1.00	25.4	.600	15.2	28	5.0	.49	12	14	62	.34	8.5	0.067	1.7	5.00	SST	CG	N
0.734	18.64	3796	1.00	25.4	.590	15.0	44	7.8	.39	9.9	17	77	.36	9.1	0.072	1.8	5.00	HD	CG	GI
0.734	18.64	S-340	1.09	27.8	.380	9.7	2069	362	.09	2.2	180	800	.97	24.7	0.177	4.5	5.50	SST	CG	N
0.734	18.64	S-1373	1.13	28.6	.508	12.9	213	37	.26	6.6	55	244	.79	20.1	0.113	2.9	6.00	SST	CG	N
0.734	18.64	S-403	1.16	29.4	.636	16.2	4.4	.77	.81	20	3.5	16	.35	8.9	0.049	1.2	7.00	SST	CG	N
0.734	18.64	11820	1.19	30.2	.562	14.3	72	13	.40	10	29	130	.52	13.1	0.086	2.2	6.00	SPR	CG	Z
0.734	18.64	S-263	1.19	30.2	.494	12.5	228	40	.29	7.3	65	291	.84	21.3	0.120	3.0	7.00	SST	CG	N
0.734	18.64	11704	1.22	31.0	.654	16.6	3.1	.55	.96	24	3.0	13	.26	6.6	0.040	1.0	5.50	SPR	C	Z
0.734	18.64	11549	1.31	33.3	.634	16.1	5.6	.98	.91	23	5.1	23	.40	10.2	0.050	1.3	7.00	SPR	C	Z
0.734	18.64	A11-55	1.31	33.3	.604	15.3	8.4	1.5	.60	15	5.0	22	.72	18.2	0.065	1.7	11.0	SST	CG	N
0.734	18.64	3740	1.31	33.3	.534	13.6	107	19	.41	10	44	194	.73	18.4	0.100	2.5	7.25	SPR	CG	Z
0.734	18.64	10517	1.38	34.9	.642	16.3	6.6	1.2	1.1	28	7.2	32	.23	5.8	0.046	1.2	5.00	MW	CG	N
0.734	18.64	11186	1.38	34.9	.570	14.5	41	7.1	.62	16	25	113	.64	16.1	0.082	2.1	7.75	SPR	CG	Z
0.734	18.64	2668	1.41	35.7	.626	15.9	8.4	1.5	.93	24	7.8	35	.41	10.5	0.054	1.4	7.00	SPR	C	Z
0.734	18.64	10671	1.47	37.3	.656	16.7	1.4	.24	1.1	27	1.5	6.5	.40	10.2	0.039	1.0	9.25	SPR	C	N
0.734	18.64	S-51	1.50	38.1	.646	16.4	3.2	.55	1.2	30	3.7	16	.33	8.4	0.044	1.1	6.50	SST	C	N
0.734	18.64	10080	1.50	38.1	.624	15.8	12	2.1	.69	17	8.2	37	.30	7.7	0.055	1.4	5.50	SPR	CG	GI
0.734	18.64	S-330	1.50	38.1	.622	15.8	8.8	1.5	.93	24	8.2	36	.42	10.7	0.056	1.4	6.50	SST	C	N
0.734	18.64	B14-53	1.50	38.1	.614	15.6	13	2.4	.74	19	10	45	.36	9.1	0.060	1.5	6.00	SST	CG	N
0.734	18.64	11554	1.50	38.1	.574	14.6	35	6.1	.67	17	24	105	.72	18.3	0.080	2.0	8.00	SPR	CG	Z
0.734	18.64	4351	1.50	38.1	.570	14.5	39	6.8	.65	17	25	113	.66	16.7	0.082	2.1	8.00	SPR	CG	Z
0.734	18.64	3436	1.50	38.1	.410	10.4	1058	185	.15	3.8	159	706	1.13	28.8	0.162	4.1	7.00	SPR	CG	Z
0.734	18.64	12046	1.59	40.5	.524	13.3	83	14	.49	12	41	180	1.10	28.0	0.105	2.7	10.5	SPR	CG	Z
0.734	18.64	S-96	1.63	41.3	.652	16.6	2.2	.39	1.3	33	2.9	13	.32	8.1	0.041	1.0	6.75	SST	C	N
0.734	18.64	O-67	1.63	41.3	.652	16.6	1.1	.19	1.1	29	1.2	5.3	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.734	18.64	12102	1.66	42.1	.652	16.6	2.4	.42	1.4	35	3.3	15	.27	6.8	0.041	1.0	6.50	SST	CG	N
0.734	18.64	10810	1.66	42.1	.548	13.9	54	9.5	.65	16	35	157	.88	22.5	0.093	2.4	9.50	SPR	CG	N
0.734	18.64	S-1636	1.72	43.6	.652	16.6	1.1	.19	1.2	31	1.3	5.9	.49	12.5	0.041	1.0	12.0	SST	CG	N
0.734	18.64	4237	1.75	44.5	.646	16.4	3.3	.57	1.4	35	4.6	20	.35	8.9	0.044	1.1	7.00	SPR	C	N
0.734	18.64	2893	1.75	44.5	.606	15.4	11	2.0	1.1	29	13	57	.58	14.6	0.064	1.6	9.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.734	18.64	A-42	1.75	44.5	.584	14.8	26	4.6	.74	19	20	87	.60	15.2	0.075	1.9	8.00	SPR	CG	N
0.734	18.64	3347	1.88	47.6	.594	15.1	18	3.2	.88	22	16	71	.60	15.1	0.070	1.8	8.50	SPR	CG	Z
0.734	18.64	S-248	1.91	48.4	.550	14.0	35	6.0	.80	20	28	123	1.10	28.0	0.092	2.3	12.0	SST	CG	N
0.734	18.64	S-417	2.00	50.8	.552	14.0	33	5.9	.92	23	31	137	1.06	26.9	0.091	2.3	11.8	SST	CG	N
0.734	18.64	10530	2.06	52.4	.590	15.0	16	2.7	1.1	28	17	77	.83	21.0	0.072	1.8	10.5	SPR	C	Z
0.734	18.64	11693	2.09	53.2	.610	15.5	7.6	1.3	1.4	35	11	47	.70	17.7	0.062	1.6	11.3	SPR	CG	Z
0.734	18.64	10981	2.19	55.6	.590	15.0	15	2.6	1.1	28	16	72	.72	18.3	0.072	1.8	10.0	SST	CG	N
0.734	18.64	S-493	2.34	59.5	.532	13.5	53	9.3	.79	20	42	185	1.18	29.9	0.101	2.6	11.7	SST	CG	N
0.734	18.64	10871	2.44	61.9	.558	14.2	36	6.2	.88	22	31	139	.97	24.6	0.088	2.2	11.0	SPR	CG	N
0.734	18.64	10886	2.50	63.5	.614	15.6	6.1	1.1	1.8	45	11	47	.72	18.3	0.060	1.5	12.0	SPR	CG	Z
0.734	18.64	1663	2.63	66.7	.574	14.6	16	2.8	1.3	34	22	97	1.28	32.5	0.080	2.0	15.0	SPR	C	Z
0.734	18.64	S-1224	2.69	68.2	.626	15.9	2.8	.49	1.9	49	5.4	24	.76	19.2	0.054	1.4	14.0	SST	CG	N
0.734	18.64	3365	2.75	69.9	.610	15.5	7.0	1.2	1.7	43	12	52	.81	20.5	0.062	1.6	12.0	SPR	C	GI
0.734	18.64	S-1503	2.94	74.6	.646	16.4	.85	.15	2.1	54	1.8	8.0	.83	21.0	0.044	1.1	18.8	SST	CG	N
0.734	18.64	2747	2.94	74.6	.464	11.8	185	32	.53	13	97	434	1.89	48.0	0.135	3.4	14.0	SPR	CG	Z
0.734	18.64	11333	3.00	76.2	.578	14.7	18	3.2	1.2	30	22	98	1.03	26.3	0.078	2.0	12.3	HD	C	Z
0.734	18.64	B18-181	3.00	76.2	.554	14.1	17	3.0	1.2	30	21	93	1.80	45.7	0.090	2.3	20.0	SST	CG	N
0.734	18.64	B11-44	3.25	82.6	.622	15.8	6.5	1.1	1.3	34	8.7	39	.56	14.2	0.056	1.4	9.00	SPR	C	N
0.734	18.64	3753	3.50	88.9	.650	16.5	1.6	.28	2.5	63	4.0	18	.48	12.3	0.042	1.1	10.5	SPR	C	Z
0.734	18.64	4126	3.50	88.9	.640	16.3	1.6	.28	2.7	69	4.4	19	.78	19.7	0.047	1.2	15.5	HD	C	Z
0.734	18.64	12723	3.50	88.9	.616	15.6	4.0	.71	2.6	65	10	46	.94	24.0	0.059	1.5	16.0	MW	CG	GI
0.734	18.64	4190	3.50	88.9	.604	15.3	9.5	1.7	1.4	36	14	60	.72	18.2	0.065	1.7	11.0	SPR	CG	Z
0.734	18.64	1555	3.50	88.9	.590	15.0	10	1.8	1.7	43	17	77	1.15	29.3	0.072	1.8	15.0	SPR	C	Z
0.734	18.64	S-1430	3.56	90.5	.574	14.6	8.3	1.5	1.6	40	13	58	2.00	50.8	0.080	2.0	24.0	SST	C	N
0.734	18.64	3876	3.69	93.6	.584	14.8	11	1.9	1.8	47	20	87	1.28	32.4	0.075	1.9	17.0	SPR	CG	Z
0.734	18.64	11937	4.63	117.5	.538	13.7	25	4.3	1.7	43	41	183	2.25	57.3	0.098	2.5	23.0	SPR	CG	Z
0.734	18.64	11540	5.00	127.0	.614	15.6	3.6	.63	3.0	76	11	47	1.20	30.5	0.060	1.5	19.0	SPR	C	Z
0.734	18.64	11392	6.13	155.6	.484	12.3	55	9.7	1.5	37	81	358	3.75	95.3	0.125	3.2	30.0	SPR	CG	Z
0.734	18.64	11885	6.31	160.3	.528	13.4	23	4.1	2.0	52	48	212	3.04	77.2	0.103	2.6	29.5	SPR	CG	N
0.734	18.64	12609	6.38	161.9	.708	18.0	.55	9.7	2.0	51	112	497	3.75	95	0.013	0.3	30	MW	C	N
0.734	18.64	4158	11.5	292.1	.534	13.6	13	2.3	3.3	85	44	194	4.60	116.8	0.100	2.5	45.0	SPR	C	Z
0.750	19.05	B4-20	.50	12.7	.650	16.5	21	3.7	.29	7.4	6.1	27	.16	4.1	0.050	1.3	3.25	SPR	CG	N
0.750	19.05	2518	.50	12.7	.642	16.3	24	4.2	.31	7.9	7.5	33	.19	4.8	0.054	1.4	3.50	HD	CG	Z
0.750	19.05	B2-57	.56	14.3	.688	17.5	2.9	.50	.43	11	1.2	5.5	.13	3.4	0.031	0.8	3.25	MW	C	Z
0.750	19.05	S-1345	.56	14.3	.674	17.1	2.9	.51	.39	9.9	1.1	5.0	.17	4.3	0.038	1.0	4.50	SST	CG	N
0.750	19.05	00-84	.56	14.3	.650	16.5	9.5	1.7	.27	7.0	2.6	12	.29	7.3	0.050	1.3	4.75	SPR	C	Z
0.750	19.05	CC-79	.56	14.3	.590	15.0	98	17	.24	6.0	23	103	.32	8.1	0.080	2.0	4.00	SPR	CG	N
0.750	19.05	B15-66	.59	15.1	.670	17.0	4.1	.72	.41	10	1.7	7.6	.18	4.6	0.040	1.0	4.50	SPR	CG	N
0.750	19.05	2665	.59	15.1	.586	14.9	193	34	.13	3.3	25	111	.26	6.5	0.082	2.1	3.25	SPR	CG	Z
0.750	19.05	S-238	.63	15.9	.550	14.0	182	32	.18	4.4	32	142	.45	11.4	0.100	2.5	4.50	SST	CG	N
0.750	19.05	12559	.70	17.9	.610	15.5	40	7.0	.37	9.4	15	66	.33	8.5	0.070	1.8	4.75	SPR	CG	N
0.750	19.05	S-1321	.75	19.1	.656	16.7	8.8	1.5	.52	13	4.5	20	.24	6.0	0.047	1.2	4.00	SST	C	N
0.750	19.05	12581	.75	19.1	.650	16.5	13	2.3	.46	12	6.1	27	.25	6.4	0.050	1.3	4.00	SPR	C	N
0.750	19.05	KK-93	.75	19.1	.636	16.2	13	2.3	.44	11	5.7	25	.31	8.0	0.057	1.4	5.50	SPR	CG	N
0.750	19.05	GG-64	.75	19.1	.430	10.9	2294	402	.07	1.7	151	671	.64	16.3	0.160	4.1	4.00	SPR	CG	N
0.750	19.05	10140	.81	20.6	.616	15.6	45	8.0	.32	8.1	14	64	.27	6.8	0.067	1.7	4.00	SPR	CG	Z
0.750	19.05	S-1301	.88	22.2	.642	16.3	16	2.8	.46	12	7.2	32	.22	5.5	0.054	1.4	4.00	SST	C	N
0.750	19.05	A14-67	.88	22.2	.636	16.2	23	4.0	.39	10	9.0	40	.23	5.8	0.057	1.4	4.00	SPR	CG	GI
0.750	19.05	10448	.88	22.2	.606	15.4	41	7.2	.41	10	17	76	.36	9.1	0.072	1.8	5.00	SPR	CG	Z
0.750	19.05	2590	.89	22.6	.590	15.0	39	6.9	.33	8.4	13	57	.56	14.2	0.080	2.0	7.00	HD	CG	Z
0.750	19.05	12584	.91	23.0	.510	13.0	397	70	.18	4.5	70	313	.60	15.2	0.120	3.0	5.00	SPR	CG	N
0.750	19.05	N-137	.94	23.8	.672	17.1	2.3	.41	.70	18	1.6	7.2	.23	5.9	0.039	1.0	6.00	SPR	C	N
0.750	19.05	B15-40	.94	23.8	.658	16.7	6.7	1.2	.72	18	4.8	21	.22	5.5	0.046	1.2	4.75	SPR	CG	Z
0.750	19.05	B1-65	.94	23.8	.624	15.8	25	4.3	.46	12	11	51	.35	8.8	0.063	1.6	4.50	SST	CG	N
0.750	19.05	3033	.94	23.8	.540	13.7	326	57	.15	3.8	49	219	.42	10.7	0.105	2.7	4.00	SPR	CG	Z
0.750	19.05	2602	.97	24.6	.646	16.4	7.3	1.3	.64	16	4.7	21	.33	8.3	0.052	1.3	6.25	HD	CG	Z
0.750	19.05	S-3115	1.00	25.4	.668	17.0	5.0	.87	.68	17	3.4	15	.21	5.2	0.041	1.0	4.00	SST	C	N
0.750	19.05	11493	1.00	25.4	.642	16.3	18	3.2	.42	11	7.6	34	.27	6.9	0.054	1.4	4.00	SPR	CG	Z
0.750	19.05	WW-70	1.00	25.4	.638	16.2	21	3.7	.40	10	8.5	38	.28	7.1	0.056	1.4	4.00	SPR	C	Z
0.750	19.05	3957	1.00	25.4	.626	15.9	14	2.4	.58	15	8.0	36	.42	10.6	0.062	1.6	6.75	SPR	CG	Z
0.750	19.05	S-976	1.00	25.4	.624	15.8	27	4.7	.42	11	11	51	.27	6.8	0.063	1.6	4.25	SST	CG	N
0.750	19.05	10577	1.00	25.4	.608	15.4	39	6.8	.42	11	16	73	.43	10.8	0.071	1.8	5.00	SPR	C	Z
0.750	19.05	889	1.00	25.4	.590	15.0	59	10	.39	10	23	103	.51	12.9	0.080	2.0	5.33	HD	C	Z
0.750	19.05	3318	1.00	25.4	.540	13.7	217	38	.23	5.8	49	219	.53	13.3	0.105	2.7	5.00	SPR	CG	Z
0.750	19.05	3827	1.00	25.4	.536	13.6	236	41	.22	5.6	52	232	.54	13.6	0.107	2.7	5.00	SPR	CG	N
0.750	19.05	KK-55	1.00	25.4	.530	13.5	203	36	.25	6.2	50	222	.61	15.4	0.110	2.8	5.50	SST	CG	N
0.750	19.05	S-344	1.00	25.4	.510	13.0	346	61	.19	4.7	64	285	.60	15.2	0.120	3.0	5.00	SST	CG	N
0.750	19.05	S-307	1.00	25.4	.500	12.7	357	63	.20	5.1	72	321	.69	17.5	0.125	3.2	5.50	SST	CG	N
0.750	19.05	B1-47	1.03	26.2	.640	16.3	15	2.6	.51	13	7.6	34	.29	7.5	0.055	1.4	4.33	SST	C	N
0.750	19.05	S-1259	1.03	26.2	.626	15.9	14	2.5	.66	17	9.3	42	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.750	19.05	S-884	1.03	26.2	.538	13.7	201	35	.23	5.9	47	209	.53	13.5	0.106	2.7	5.00	SST	CG	N
0.750	19.05	B1-67	1.09	27.8	.640	16.3	14	2.5	.57	14	8.1	36	.26	6.6	0.055	1.4	4.75	SPR	CG	N
0.750	19.05	B8-39	1.09	27.8	.570	14.5	94	16	.34	8.5	31	140	.50	12.6	0.090	2.3	5.50	SPR	CG	Z
0.750	19.05	B17-185	1.09	27.8	.400	10.2	2364	414	.08	2.1	193	860	.88	22.2	0.175	4.4	5.00	SPR	CG	N
0.750	19.05	S-948	1.11	28.2	.510	13.0	352	62	.18	4.6	64	285	.60	15.2	0.120	3.0	5.00	SST	CG	N
0.750	19.05	12248	1.13	28.6	.644	16.4	11	2.0	.65	16	7.2	32	.27	6.7	0.053	1.3	5.00	SPR	CG	Z
0.750	19.05	11371	1.13	28.6	.608	15.4	15	2.6	.49	12	7.2	32	.64	16.2	0.071	1.8	9.00	SST	CG	N
0.750	19.05	B17-183	1.13	28.6	.590	15.0	44	7.6	.53	14	23	103	.52	13.2	0.080	2.0	6.50	SPR	CG	Z
0.750	19.05	HH-72	1.13	28.6	.550	14.0	88	15	.40	10	35	157	.73	18.4	0.100	2.5	7.25	SST	CG	N
0.750	19.05	3479	1.13	28.6	.500	12.7	479	84	.16	4.2	79	352	.63	15.9	0.125	3.2	5.00	HD	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.750	19.05	11701	1.13	28.6	.496	12.6	387	68	.21	5.4	83	368	.76	19.4	0.127	3.2	6.00	SPR	CG	Z
0.750	19.05	S-1448	1.13	28.6	.480	12.2	446	78	.19	4.9	86	383	.81	20.6	0.135	3.4	6.00	SST	CG	N
0.750	19.05	B17-121	1.16	29.4	.620	15.7	23	4.0	.58	15	13	59	.36	9.1	0.065	1.7	5.50	SPR	CG	N
0.750	19.05	10933	1.19	30.2	.626	15.9	16	2.9	.71	18	12	51	.43	11.0	0.062	1.6	6.00	SPR	C	N
0.750	19.05	HH-7	1.19	30.2	.570	14.5	73	13	.40	10	29	130	.54	13.7	0.090	2.3	6.00	SST	CG	N
0.750	19.05	S-1537	1.19	30.2	.514	13.1	192	34	.32	8.1	61	272	.83	21.0	0.118	3.0	7.00	SST	CG	N
0.750	19.05	12198	1.22	31.0	.570	14.5	55	9.6	.50	13	27	121	.72	18.3	0.090	2.3	8.00	SPR	CG	Z
0.750	19.05	S-392	1.25	31.8	.626	15.9	16	2.8	.67	17	11	48	.40	10.2	0.062	1.6	5.50	SST	C	N
0.750	19.05	S-1287	1.25	31.8	.616	15.6	23	4.0	.60	15	14	61	.37	9.4	0.067	1.7	5.50	SST	CG	N
0.750	19.05	EE-73	1.25	31.8	.590	15.0	36	6.2	.65	17	23	103	.60	15.2	0.080	2.0	7.50	SPR	CG	Z
0.750	19.05	KK-72	1.25	31.8	.530	13.5	146	26	.37	9.5	55	243	.83	21.0	0.110	2.8	7.50	SPR	CG	N
0.750	19.05	B1-69	1.28	32.5	.614	15.6	28	4.8	.55	14	15	67	.37	9.5	0.068	1.7	5.50	SPR	CG	N
0.750	19.05	S-1634	1.31	33.3	.688	17.5	1.1	.18	1.2	29	1.2	5.4	.16	3.9	0.031	0.8	5.00	SST	CG	N
0.750	19.05	10637	1.31	33.3	.622	15.8	23	4.0	.55	14	13	56	.40	10.2	0.064	1.6	5.25	SPR	C	Z
0.750	19.05	4284	1.31	33.3	.616	15.6	19	3.4	.76	19	14	64	.45	11.5	0.067	1.7	6.75	SPR	CG	Z
0.750	19.05	12259	1.31	33.3	.616	15.6	18	3.2	.80	20	14	64	.47	11.9	0.067	1.7	7.00	SPR	CG	Z
0.750	19.05	11798	1.34	34.1	.652	16.6	6.0	1.1	1.0	25	6.0	27	.34	8.7	0.049	1.2	6.00	SPR	C	N
0.750	19.05	12230	1.34	34.1	.608	15.4	26	4.5	.63	16	16	73	.46	11.7	0.071	1.8	6.50	SPR	CG	Z
0.750	19.05	12224	1.38	34.9	.650	16.5	6.5	1.1	.93	24	6.1	27	.30	7.6	0.050	1.3	6.00	SPR	CG	N
0.750	19.05	S-439	1.38	34.9	.640	16.3	7.7	1.4	.98	25	7.6	34	.36	9.1	0.055	1.4	6.50	SST	CG	N
0.750	19.05	3064	1.38	34.9	.256	6.5	12936	2265	.03	.84	427	1901	1.30	32.9	0.247	6.3	5.25	SPR	CG	Z
0.750	19.05	A11-64	1.41	35.7	.648	16.5	6.3	1.1	.96	24	6.1	27	.31	7.8	0.051	1.3	6.00	SST	CG	N
0.750	19.05	B7-51	1.41	35.7	.640	16.3	10	1.8	.77	20	8.1	36	.32	8.0	0.055	1.4	5.75	SPR	CG	Z
0.750	19.05	B18-173	1.44	36.5	.630	16.0	13	2.2	.78	20	9.8	44	.36	9.1	0.060	1.5	6.00	SST	CG	N
0.750	19.05	3824	1.44	36.5	.626	15.9	16	2.9	.71	18	12	51	.37	9.4	0.062	1.6	6.00	HD	CG	Z
0.750	19.05	11516	1.50	38.1	.682	17.3	.87	.15	1.2	30	1.0	4.6	.31	7.8	0.034	0.9	8.00	SPR	C	Z
0.750	19.05	12551	1.50	38.1	.626	15.9	12	2.1	.97	25	12	51	.53	13.4	0.062	1.6	7.50	HD	C	N
0.750	19.05	S-777	1.50	38.1	.624	15.8	14	2.5	.79	20	11	51	.46	11.6	0.063	1.6	6.25	SST	C	N
0.750	19.05	S-868	1.50	38.1	.624	15.8	15	2.6	.77	20	11	51	.39	9.8	0.063	1.6	6.00	SST	CG	N
0.750	19.05	12269	1.50	38.1	.620	15.7	18	3.1	.70	18	12	55	.46	11.6	0.065	1.7	6.00	SST	C	N
0.750	19.05	S-780	1.50	38.1	.606	15.4	24	4.2	.66	17	16	71	.54	13.7	0.072	1.8	6.50	SST	C	N
0.750	19.05	M-104	1.50	38.1	.572	14.5	48	8.4	.66	17	32	141	.76	19.2	0.089	2.3	8.50	SPR	CG	Z
0.750	19.05	11504	1.50	38.1	.570	14.5	77	14	.41	10	31	140	.65	16.6	0.090	2.3	6.25	SPR	CG	Z
0.750	19.05	3165	1.50	38.1	.51	12.9	206	36	.34	8.6	70.0	311.4	.94	23.8	0.120	3.1	7.80	SPR	CG	Z
0.750	19.05	3352	1.63	41.3	.630	16.0	10	1.8	1.0	26	10	46	.51	13.0	0.060	1.5	7.50	SPR	C	Z
0.750	19.05	GG-78	1.63	41.3	.530	13.5	115	20	.48	12	55	243	.99	25.1	0.110	2.8	9.00	SPR	CG	Z
0.750	19.05	FF-30	1.63	41.3	.490	12.4	278	49	.28	7.1	77	344	.98	24.8	0.130	3.3	7.50	SST	CG	N
0.750	19.05	11946	1.72	43.6	.490	12.4	287	50	.30	7.6	86	382	1.04	26.4	0.130	3.3	8.00	SPR	CG	Z
0.750	19.05	2855	1.75	44.5	.684	17.4	.71	.12	1.4	36	1.0	4.5	.31	8.0	0.033	0.8	8.50	HD	C	GI
0.750	19.05	10199	1.75	44.5	.634	16.1	7.0	1.2	1.2	31	8.6	38	.52	13.3	0.058	1.5	9.00	SPR	CG	Z
0.750	19.05	2743	1.75	44.5	.630	16.0	11	2.0	.92	23	10	46	.48	12.2	0.060	1.5	7.00	SPR	C	Z
0.750	19.05	S-778	1.75	44.5	.624	15.8	12	2.1	.93	24	11	51	.50	12.8	0.063	1.6	7.00	SST	C	N
0.750	19.05	S-781	1.75	44.5	.606	15.4	20	3.4	.81	21	16	71	.61	15.5	0.072	1.8	7.50	SST	C	N
0.750	19.05	A11-37	1.81	46.0	.614	15.6	27	4.8	.52	13	14	63	.35	8.9	0.068	1.7	5.00	SST	CG	N
0.750	19.05	S-1325	1.81	46.0	.500	12.7	156	27	.46	12	72	321	1.25	31.8	0.125	3.2	10.0	SST	CG	N
0.750	19.05	12247	1.84	46.8	.624	15.8	11	1.9	1.1	29	12	54	.60	15.2	0.063	1.6	8.50	SPR	C	Z
0.750	19.05	DD-92	1.88	47.6	.650	16.5	3.5	.61	1.4	36	4.9	22	.48	12.1	0.050	1.3	9.50	SPR	CG	GI
0.750	19.05	EE-62	1.88	47.6	.610	15.5	17	3.0	.93	24	16	70	.60	15.1	0.070	1.8	8.50	SPR	CG	Z
0.750	19.05	B18-198	1.91	48.4	.590	15.0	25	4.4	.92	23	23	103	.86	21.8	0.080	2.0	9.75	SPR	C	GI
0.750	19.05	11495	1.94	49.2	.568	14.4	57	10	.57	14	32	145	.82	20.8	0.091	2.3	8.00	SPR	CG	Z
0.750	19.05	11595	1.94	49.2	.538	13.7	80	14	.63	16	51	226	1.22	31.0	0.106	2.7	10.5	SPR	CG	Z
0.750	19.05	S-951	1.97	50.0	.642	16.3	4.0	.70	1.4	36	5.7	26	.53	13.5	0.054	1.4	10.0	SST	CG	N
0.750	19.05	1585	2.00	50.8	.692	17.6	.24	.04	1.6	40	.38	1.7	.41	10.5	0.029	0.7	13.3	MW	C	Z
0.750	19.05	3340	2.00	50.8	.686	17.4	.65	.11	1.7	43	1.1	4.9	.30	7.5	0.032	0.8	8.25	MW	C	Z
0.750	19.05	12228	2.00	50.8	.654	16.6	3.2	.55	1.5	39	4.8	21	.48	12.2	0.048	1.2	9.00	SPR	C	Z
0.750	19.05	10735	2.00	50.8	.640	16.3	4.9	.86	1.5	37	7.1	32	.55	14.0	0.055	1.4	10.0	SPR	CG	Z
0.750	19.05	10226	2.00	50.8	.626	15.9	10	1.8	1.1	29	12	51	.53	13.4	0.062	1.6	8.50	SPR	CG	Z
0.750	19.05	S-779	2.00	50.8	.624	15.8	11	1.8	1.1	27	11	51	.55	14.0	0.063	1.6	7.75	SST	C	N
0.750	19.05	S-782	2.00	50.8	.606	15.4	17	2.9	.96	24	16	71	.68	17.4	0.072	1.8	8.50	SST	C	N
0.750	19.05	66	2.00	50.8	.590	15.0	25	4.4	.92	23	23	103	.78	19.8	0.080	2.0	9.75	HD	CG	Z
0.750	19.05	11280	2.09	53.2	.540	13.7	72	13	.68	17	49	219	1.16	29.3	0.105	2.7	11.0	SPR	CG	Z
0.750	19.05	S-1353	2.13	54.0	.662	16.8	1.7	.29	1.6	42	2.7	12	.48	12.3	0.044	1.1	10.0	SST	C	N
0.750	19.05	11394	2.13	54.0	.606	15.4	12	2.2	1.3	32	16	70	.86	21.9	0.072	1.8	12.0	SPR	CG	Z
0.750	19.05	S-3228	2.13	54.0	.592	15.0	19	3.4	1.1	27	21	93	.83	21.1	0.079	2.0	10.5	SST	CG	N
0.750	19.05	12070	2.13	54.0	.582	14.8	81	14	.33	8.4	27	119	.42	10.7	0.084	2.1	5.00	SPR	CG	Z
0.750	19.05	S-1036	2.13	54.0	.558	14.2	40	7.0	.88	22	35	157	1.10	28.0	0.096	2.4	11.5	SST	CG	N
0.750	19.05	S-415	2.19	55.6	.624	15.8	9.2	1.6	1.2	31	11	51	.54	13.8	0.063	1.6	8.75	SST	CG	N
0.750	19.05	S-1583	2.19	55.6	.540	13.7	83	14	.55	14	46	203	.95	24.0	0.105	2.7	9.00	SST	CG	N
0.750	19.05	S-1418	2.25	57.2	.656	16.7	2.7	.47	1.9	47	5.0	22	.40	10.1	0.047	1.2	8.50	SST	CG	N
0.750	19.05	10344	2.31	58.7	.540	13.7	65	11	.76	19	49	219	1.26	32.0	0.105	2.7	12.0	SPR	CG	Z
0.750	19.05	B10-70	2.34	59.5	.642	16.3	6.0	1.1	1.3	32	7.6	34	.43	11.0	0.054	1.4	8.00	SPR	CG	N
0.750	19.05	A13-29	2.38	60.3	.640	16.3	5.8	1.0	1.3	33	7.6	34	.44	11.2	0.055	1.4	8.00	SST	CG	N
0.750	19.05	12254	2.38	60.3	.630	16.0	5.7	.99	1.7	42	9.4	42	.72	18.3	0.060	1.5	12.0	SPR	CG	Z
0.750	19.05	11920	2.41	61.1	.674	17.1	.74	.13	2.0	50	1.4	6.4	.46	11.6	0.038	1.0	12.0	SST	CG	N
0.750	19.05	S-490	2.50	63.5	.680	17.3	.29	.05	1.8	45	.50	2.2	.74	18.7	0.035	0.9	20.0	SST	C	N
0.750	19.05	11875	2.50	63.5	.672	17.1	.77	.14	2.0	50	1.5	6.7	.55	13.9	0.039	1.0	14.0	SPR	CG	N
0.750	19.05	RR-53	2.50	63.5	.670	17.0	.75	.13	1.9	48	1.4	6.3	.60	15.2	0.040	1.0	14.0	SST	C	N
0.750	19.05	S-1271	2.50	63.5	.626	15.9	7.6	1.3	1.4	36	11	48	.65	16.5	0.062	1.6	9.50	SST	C	N
0.750	19.05	S-783	2.50	63.5	.606	15.4	13	2.3	1.2	31	16	71	.81	20.6	0.072	1.8	10.3	SST	C	N
0.750	19.05	11758	2.50	63.5	.542	13.8	59	10	.81	21	48	213	1.40	35.7	0.104	2.6	12.5	SPR	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.750	19.05	48	2.50	63.5	.540	13.7	59	10	.83	21	49	219	1.37	34.7	0.105	2.7	13.0	HD	CG	Z
0.750	19.05	50	2.50	63.5	.480	12.2	195	34	.49	12	96	426	1.69	42.9	0.135	3.4	12.5	HD	CG	Z
0.750	19.05	12451	2.59	65.9	.536	13.6	81	14	.64	16	52	232	1.15	29.2	0.107	2.7	10.8	SPR	CG	N
0.750	19.05	3472	2.63	66.7	.550	14.0	50	8.7	.86	22	43	190	1.35	34.3	0.100	2.5	12.5	SPR	C	Z
0.750	19.05	1873	2.69	68.2	.590	15.0	15	2.6	1.4	36	21	94	1.28	32.5	0.080	2.0	15.0	HD	C	Z
0.750	19.05	4362	2.69	68.2	.540	13.7	55	9.7	.89	23	49	219	1.44	36.7	0.105	2.7	13.8	SPR	CG	Z
0.750	19.05	12199	2.75	69.9	.640	16.3	4.4	.76	1.9	47	8.1	36	.66	16.8	0.055	1.4	11.0	SPR	C	Z
0.750	19.05	3959	2.75	69.9	.580	14.7	26	4.5	1.1	28	28	123	1.02	25.9	0.085	2.2	12.0	SPR	CG	Z
0.750	19.05	12079	2.78	70.6	.616	15.6	8.3	1.4	1.8	44	14	64	.87	22.1	0.067	1.7	13.0	SPR	CG	GI
0.750	19.05	12696	2.81	71.4	.678	17.2	.72	.13	2.4	61	1.7	7.7	.40	10.1	0.036	0.9	10.0	SST	C	N
0.750	19.05	10602	3.00	76.2	.654	16.6	2.8	.48	2.1	53	5.8	26	.53	13.4	0.048	1.2	10.0	SPR	C	Z
0.750	19.05	S-316	3.00	76.2	.648	16.5	1.8	.31	2.1	54	3.8	17	.87	22.0	0.051	1.3	16.0	SST	C	N
0.750	19.05	S-888	3.00	76.2	.626	15.9	5.2	.90	2.1	53	11	48	.81	20.5	0.062	1.6	13.0	SST	CG	N
0.750	19.05	4219	3.00	76.2	.624	15.8	7.0	1.2	1.7	44	12	54	.82	20.8	0.063	1.6	12.0	SPR	C	Z
0.750	19.05	4255	3.00	76.2	.540	13.7	54	9.5	.91	23	49	219	1.58	40.0	0.105	2.7	14.0	SPR	C	Z
0.750	19.05	44	3.13	79.4	.568	14.4	25	4.4	1.3	33	32	145	1.52	38.7	0.091	2.3	15.8	HD	C	Z
0.750	19.05	11467	3.25	82.6	.580	14.7	16	2.7	1.7	43	27	119	1.55	39.4	0.085	2.2	18.3	SPR	CG	Z
0.750	19.05	831	3.25	82.6	.540	13.7	44	7.7	1.1	28	49	219	1.86	47.3	0.105	2.7	16.8	HD	C	Z
0.750	19.05	3869	3.25	82.6	.500	12.7	82	14	.81	21	67	297	2.44	61.9	0.125	3.2	19.5	SPR	CG	Z
0.750	19.05	10084	3.38	85.7	.638	16.2	3.3	.58	2.5	65	8.5	38	.83	21.0	0.056	1.4	14.8	SPR	CG	GI
0.750	19.05	11377	3.47	88.1	.626	15.9	5.5	.96	2.0	50	11	48	.84	21.3	0.062	1.6	12.5	SST	C	N
0.750	19.05	10061	3.50	88.9	.642	16.3	3.5	.60	2.2	56	7.6	34	.68	17.1	0.054	1.4	12.5	SPR	CG	GI
0.750	19.05	890	3.50	88.9	.590	15.0	14	2.4	1.7	43	23	103	1.38	35.1	0.080	2.0	16.3	HD	C	Z
0.750	19.05	11406	3.50	88.9	.590	15.0	12	2.1	1.8	46	22	97	1.40	35.6	0.080	2.0	16.5	SST	C	N
0.750	19.05	40	3.50	88.9	.568	14.4	22	3.9	1.5	37	32	145	1.68	42.8	0.091	2.3	17.5	HD	C	Z
0.750	19.05	1863	3.50	88.9	.554	14.1	31	5.4	1.3	33	40	179	1.81	46.1	0.098	2.5	17.5	SPR	C	Z
0.750	19.05	12306	3.50	88.9	.520	13.2	65	11	.95	24	62	276	1.96	49.7	0.115	2.9	17.0	SPR	CG	Z
0.750	19.05	41	3.50	88.9	.480	12.2	135	24	.71	18	96	426	2.33	59.1	0.135	3.4	17.3	HD	CG	Z
0.750	19.05	11169	3.56	90.5	.500	12.7	74	13	.87	22	64	287	2.69	68.3	0.125	3.2	21.5	SPR	CG	Z
0.750	19.05	4175	3.63	92.1	.634	16.1	4.1	.72	2.3	59	9.4	42	.87	22.1	0.058	1.5	14.0	SPR	C	Z
0.750	19.05	2781	3.69	93.6	.458	11.6	242	42	.49	13	120	532	2.08	52.8	0.146	3.7	14.3	SPR	CG	Z
0.750	19.05	12255	3.84	97.6	.678	17.2	.66	.12	3.4	87	2.3	10	.43	11.0	0.036	0.9	12.0	SPR	CG	Z
0.750	19.05	3700	3.88	98.4	.558	14.2	26	4.6	1.5	37	38	169	1.80	45.7	0.096	2.4	18.8	SPR	CG	GI
0.750	19.05	12553	4.06	103.1	.590	15.0	14	2.4	1.7	44	23	103	1.32	33.5	0.080	2.0	16.5	SPR	CG	N
0.750	19.05	12250	4.13	104.8	.678	17.2	.66	.12	3.7	94	2.4	11	.43	11.0	0.036	0.9	12.0	SPR	CG	Z
0.750	19.05	11737	4.25	108.0	.568	14.4	17	3.0	1.9	48	32	145	2.00	50.9	0.091	2.3	22.0	SPR	CG	Z
0.750	19.05	12193	4.34	110.3	.578	14.7	18	3.1	1.6	41	29	128	1.46	37.1	0.086	2.2	17.0	SPR	CG	GI
0.750	19.05	3932	4.50	114.3	.616	15.6	4.7	.82	3.1	78	14	63	1.44	36.6	0.067	1.7	21.5	SPR	CG	Z
0.750	19.05	11749	4.50	114.3	.608	15.4	6.5	1.1	2.5	64	16	73	1.49	37.9	0.071	1.8	20.0	SPR	C	Z
0.750	19.05	11782	4.59	116.7	.612	15.5	6.7	1.2	2.4	60	16	70	1.21	30.7	0.069	1.8	17.5	SPR	CG	N
0.750	19.05	10816	4.69	119.0	.654	16.6	1.9	.33	3.1	78	5.8	26	.66	16.8	0.048	1.2	13.8	SPR	CG	GI
0.750	19.05	10060	4.75	120.7	.626	15.9	5.6	.97	2.9	73	16	71	.85	21.7	0.062	1.6	13.8	MW	CG	Z
0.750	19.05	1773	4.75	120.7	.620	15.7	8.4	1.5	1.6	40	13	59	.81	20.7	0.065	1.7	11.5	SPR	C	Z
0.750	19.05	3971	4.88	123.8	.590	15.0	10	1.8	2.3	59	23	103	1.72	43.7	0.080	2.0	21.5	SPR	CG	Z
0.750	19.05	854	5.00	127.0	.480	12.2	93	16	1.0	26	96	426	3.24	82.3	0.135	3.4	24.0	HD	CG	Z
0.750	19.05	12064	5.13	130.2	.602	15.3	6.3	1.1	2.9	74	18	82	1.78	45.1	0.074	1.9	24.0	SPR	CG	Z
0.750	19.05	S-1174	5.25	133.4	.590	15.0	8.1	1.4	2.7	68	22	97	1.84	46.7	0.080	2.0	23.0	SST	CG	N
0.750	19.05	11816	6.00	152.4	.602	15.3	5.8	1.0	3.2	81	18	82	1.92	48.9	0.074	1.9	26.0	SPR	CG	GI
0.750	19.05	875	6.00	152.4	.568	14.4	13	2.2	2.6	66	32	145	2.78	70.5	0.091	2.3	29.5	HD	C	Z
0.750	19.05	871	6.00	152.4	.540	13.7	23	4.0	2.2	55	49	219	3.20	81.3	0.105	2.7	30.5	HD	CG	Z
0.750	19.05	827	6.00	152.4	.510	13.0	40	7.0	1.8	45	70	313	3.84	97.5	0.120	3.0	32.0	HD	CG	Z
0.750	19.05	3122	6.25	158.8	.606	15.4	5.3	.92	3.2	82	17	76	1.91	48.5	0.072	1.8	25.5	SPR	C	Z
0.750	19.05	11413	6.25	158.8	.568	14.4	12	2.2	2.6	66	32	145	2.80	71.1	0.091	2.3	29.8	HD	C	Z
0.750	19.05	3051	6.38	161.9	.540	13.7	25	4.3	2.0	51	49	219	2.97	75.3	0.105	2.7	28.3	SPR	CG	Z
0.750	19.05	11545	7.50	190.5	.568	14.4	8.8	1.5	3.7	93	32	144	3.82	97.1	0.091	2.3	41.0	SPR	CG	Z
0.750	19.05	2905	7.56	192.1	.558	14.2	15	2.6	2.5	64	38	169	2.98	75.6	0.096	2.4	31.0	SPR	CG	Z
0.750	19.05	11845	8.31	211.1	.506	12.9	31	5.4	2.2	55	67	299	4.76	120.9	0.122	3.1	39.0	SST	CG	N
0.750	19.05	11427	10.0	254.0	.540	13.7	11	1.9	4.2	106	45	200	5.83	148.0	0.105	2.7	55.5	SST	CG	N
0.750	19.05	11855	10.2	258.7	.540	13.7	12	2.1	4.1	104	49	219	5.88	149.4	0.105	2.7	56.0	SPR	CG	N
0.750	19.05	3126	11.4	288.9	.553	14.1	11	1.9	3.8	97	41	181	4.34	110.3	0.098	2.5	44.8	SPR	CG	Z
0.750	19.05	288	12.0	304.8	.626	15.9	1.5	.27	7.5	191	12	51	2.82	71.7	0.062	1.6	44.5	HD	C	Z
0.750	19.05	879	12.0	304.8	.606	15.4	2.6	.45	6.6	167	17	76	3.67	93.3	0.072	1.8	50.0	HD	C	Z
0.750	19.05	877	12.0	304.8	.590	15.0	3.8	.66	6.2	156	23	103	4.40	111.8	0.080	2.0	54.0	HD	C	Z
0.750	19.05	S-3035	13.4	339.7	.540	13.7	8.0	1.4	5.7	145	46	203	7.67	194.7	0.105	2.7	73.0	SST	CG	N
0.750	19.05	3042	13.8	349.3	.540	13.7	12	2.0	4.2	108	49	219	6.20	157.4	0.105	2.7	58.0	SPR	C	Z
0.765	19.43	12602	.56	14.3	.701	17.8	3.1	.54	.43	11	1.3	5.8	.14	3.5	0.032	0.8	3.25	MW	C	Z
0.765	19.43	10443	.63	15.9	.709	18.0	1.1	.19	.49	12	.54	2.4	.14	3.6	0.028	0.7	4.00	MW	C	Z
0.765	19.43	S-454	.63	15.9	.689	17.5	2.4	.41	.44	11	1.0	4.6	.19	4.7	0.038	1.0	5.00	SST	CG	N
0.765	19.43	10925	.63	15.9	.555	14.1	270	47	.17	4.2	45	200	.42	10.7	0.105	2.7	4.00	SST	CG	N
0.765	19.43	12244	.66	16.7	.701	17.8	1.3	.22	.46	12	.59	2.6	.19	4.9	0.032	0.8	5.00	SPR	C	Z
0.765	19.43	3812	.69	17.4	.605	15.4	73	13	.31	7.9	23	101	.36	9.1	0.080	2.0	4.50	SPR	CG	Z
0.765	19.43	S-873	.81	20.6	.703	17.9	1.6	.28	.69	18	1.1	4.9	.12	3.1	0.031	0.8	4.00	SST	CG	N
0.765	19.43	1589	.88	22.2	.681	17.3	4.3	.75	.63	16	2.7	12	.24	6.1	0.042	1.1	4.75	SPR	C	Z
0.765	19.43	UU-70	.88	22.2	.621	15.8	34	5.9	.46	12	16	70	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.765	19.43	12577	.91	23.0	.565	14.4	244	43	.24	6.1	59	261	.40	10.2	0.100	2.5	4.00	MW	CG	N
0.765	19.43	XX-61	1.00	25.4	.683	17.3	3.6	.62	.75	19	2.7	12	.25	6.2	0.041	1.0	5.00	SPR	C	Z
0.765	19.43	2848	1.00	25.4	.643	16.3	11	2.0	.57	15	6.5	29	.43	10.8	0.061	1.5	7.00	HD	CG	Z
0.765	19.43	S-30	1.00	25.4	.605	15.4	46	8.0	.47	12	21	95	.44	11.2	0.080	2.0	5.50	SST	CG	N
0.765	19.43	S-302	1.00	25.4	.525	13.3	276	48	.23	5.8	63	280	.66	16.8	0.120	3.0	5.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.765	19.43	HH-76	1.00	25.4	.485	12.3	502	88	.16	4.1	80	357	.84	21.3	0.140	3.6	6.00	SST	CG	N
0.765	19.43	S-3245	1.03	26.2	.685	17.4	4.3	.75	.72	18	3.1	14	.16	4.1	0.040	1.0	4.00	SST	CG	N
0.765	19.43	3682	1.06	27.0	.671	17.0	5.8	1.0	.82	21	4.8	21	.25	6.3	0.047	1.2	5.25	SPR	CG	Z
0.765	19.43	S-1150	1.13	28.6	.525	13.3	322	56	.20	5.0	63	280	.60	15.2	0.120	3.0	5.00	SST	CG	N
0.765	19.43	S-385	1.16	29.4	.695	17.7	1.3	.23	.96	24	1.3	5.7	.20	5.0	0.035	0.9	6.00	SST	C	N
0.765	19.43	3152	1.16	29.4	.551	14.0	165	29	.31	7.9	51	228	.64	16.3	0.107	2.7	6.00	SPR	CG	Z
0.765	19.43	S-187	1.25	31.8	.665	16.9	3.3	.58	.83	21	2.7	12	.43	10.8	0.050	1.3	8.50	SST	CG	N
0.765	19.43	S-1320	1.25	31.8	.641	16.3	7.9	1.4	.71	18	5.6	25	.54	13.8	0.062	1.6	8.75	SST	CG	N
0.765	19.43	B11-26	1.25	31.8	.635	16.1	23	4.0	.56	14	13	58	.34	8.7	0.065	1.7	5.25	SPR	CG	N
0.765	19.43	B12-20	1.25	31.8	.545	13.8	187	33	.29	7.3	54	239	.66	16.8	0.110	2.8	6.00	SPR	CG	Z
0.765	19.43	3771	1.25	31.8	.495	12.6	477	84	.20	5.0	94	419	.81	20.6	0.135	3.4	6.00	SPR	CG	Z
0.765	19.43	12146	1.31	33.3	.585	14.9	51	9.0	.59	15	30	135	.72	18.3	0.090	2.3	8.00	SPR	CG	Z
0.765	19.43	11599	1.41	35.7	.691	17.6	2.1	.37	1.2	30	2.5	11	.23	5.9	0.037	0.9	5.33	SPR	C	Z
0.765	19.43	12122	1.41	35.7	.603	15.3	39	6.8	.61	16	24	105	.57	14.4	0.081	2.1	7.00	SPR	CG	Z
0.765	19.43	S-423	1.41	35.7	.525	13.3	172	30	.37	9.3	63	280	.92	23.2	0.120	3.0	7.75	SST	CG	N
0.765	19.43	2853	1.44	36.5	.663	16.8	5.3	.94	1.1	27	5.8	26	.36	9.1	0.051	1.3	7.00	SPR	CG	Z
0.765	19.43	S-1623	1.47	37.3	.625	15.9	18	3.2	.79	20	14	64	.56	14.2	0.070	1.8	7.00	SST	CG	N
0.765	19.43	S-222	1.50	38.1	.695	17.7	1.2	.21	1.3	32	1.5	6.7	.25	6.2	0.035	0.9	6.00	SST	C	N
0.765	19.43	10915	1.50	38.1	.665	16.9	2.8	.49	.91	23	2.6	11	.59	14.9	0.050	1.3	10.8	SPR	C	N
0.765	19.43	S-1298	1.50	38.1	.629	16.0	18	3.1	.79	20	14	62	.44	11.1	0.068	1.7	6.50	SST	CG	N
0.765	19.43	S-438	1.50	38.1	.621	15.8	17	2.9	.92	23	16	69	.58	14.6	0.072	1.8	8.00	SST	CG	N
0.765	19.43	S-253	1.56	39.7	.525	13.3	164	29	.38	9.7	63	280	.96	24.4	0.120	3.0	8.00	SST	CG	N
0.765	19.43	4304	1.63	41.3	.583	14.8	61	11	.52	13	32	142	.66	16.8	0.091	2.3	7.25	SPR	CG	Z
0.765	19.43	3411	1.63	41.3	.555	14.1	111	19	.44	11	48	215	.79	20.0	0.105	2.7	7.50	SPR	CG	GI
0.765	19.43	NN-80	1.63	41.3	.505	12.8	211	37	.36	9.2	76	338	1.14	28.9	0.130	3.3	8.75	SST	CG	N
0.765	19.43	CC-70	1.75	44.5	.585	14.9	23	4.0	.49	12	11	49	1.26	32.0	0.090	2.3	14.0	SST	CG	N
0.765	19.43	11410	1.81	46.0	.525	13.3	153	27	.45	11	69	307	1.11	28.2	0.120	3.0	9.25	SPR	CG	Z
0.765	19.43	4148	2.00	50.8	.641	16.3	6.8	1.2	1.3	32	8.5	38	.74	18.9	0.062	1.6	11.0	HD	C	Z
0.765	19.43	12164	2.00	50.8	.601	15.3	27	4.8	.90	23	24	109	.86	21.9	0.082	2.1	9.50	SPR	C	Z
0.765	19.43	S-308	2.00	50.8	.515	13.1	212	37	.33	8.5	71	315	.94	23.8	0.125	3.2	7.50	SST	CG	N
0.765	19.43	11803	2.09	53.2	.579	14.7	59	10	.58	15	34	151	.74	18.9	0.093	2.4	8.00	SPR	CG	Z
0.765	19.43	S-433	2.19	55.6	.641	16.3	8.2	1.4	1.3	33	11	47	.60	15.2	0.062	1.6	8.75	SST	CG	N
0.765	19.43	S-909	2.44	61.9	.603	15.3	18	3.2	1.2	30	22	98	.90	22.9	0.081	2.1	11.0	SST	CG	N
0.765	19.43	11713	2.47	62.7	.523	13.3	105	18	.67	17	71	315	1.57	40.0	0.121	3.1	13.0	SPR	CG	Z
0.765	19.43	3439	2.69	68.2	.577	14.7	41	7.2	.85	22	35	156	1.13	28.7	0.094	2.4	11.0	SPR	C	Z
0.765	19.43	B8-53	2.72	69.0	.655	16.6	4.6	.80	1.7	44	7.9	35	.55	14.0	0.055	1.4	10.0	SPR	CG	N
0.765	19.43	11712	3.09	78.6	.553	14.0	79	14	.63	16	50	222	1.17	29.6	0.106	2.7	10.0	SPR	C	Z
0.765	19.43	10731	3.31	84.1	.669	17.0	1.2	.20	2.4	60	2.8	12	.95	24.1	0.048	1.2	19.8	SPR	CG	Z
0.765	19.43	11916	3.53	89.7	.555	14.1	34	6.0	1.3	33	45	200	1.86	47.3	0.105	2.7	17.8	SST	CG	N
0.765	19.43	3171	3.56	90.5	.635	16.1	6.4	1.1	2.0	52	13	58	.89	22.7	0.065	1.7	13.8	SPR	CG	Z
0.765	19.43	3929	3.75	95.3	.661	16.8	2.6	.46	2.5	65	6.7	30	.73	18.5	0.052	1.3	13.0	SPR	C	Z
0.765	19.43	10322	4.13	104.8	.425	10.8	326	57	.54	14	176	782	3.32	84.2	0.170	4.3	19.5	SPR	CG	Z
0.765	19.43	S-3220	4.50	114.3	.639	16.2	3.4	.60	3.3	83	11	50	1.20	30.4	0.063	1.6	19.0	SST	CG	N
0.765	19.43	S-457	4.63	117.5	.621	15.8	6.5	1.1	2.4	61	16	70	1.26	32.0	0.072	1.8	17.5	SST	CG	N
0.765	19.43	11859	4.69	119.0	.579	14.7	18	3.1	1.9	49	34	151	2.05	52.0	0.093	2.4	22.0	SPR	CG	N
0.765	19.43	3291	5.50	139.7	.601	15.3	15	2.6	1.7	43	24	109	1.31	33.3	0.082	2.1	16.0	SPR	CG	Z
0.765	19.43	12185	7.75	196.9	.549	13.9	22	3.8	2.4	62	53	234	3.67	93.3	0.108	2.7	34.0	SPR	CG	N
0.765	19.43	11828	8.00	203.2	.643	16.3	2.2	.38	4.7	118	10	45	1.54	39.1	0.061	1.5	25.3	SST	CG	N
0.765	19.43	3030	8.00	203.2	.615	15.6	6.2	1.1	3.1	78	19	84	1.84	46.7	0.075	1.9	24.5	SPR	CG	GI
0.781	19.84	Q-63	.44	11.1	.651	16.5	61	11	.20	5.0	12	53	.20	5.0	0.065	1.7	3.00	SST	CG	N
0.781	19.84	PP-8	.50	12.7	.541	13.7	1032	181	.07	1.7	68	302	.36	9.1	0.120	3.0	3.00	SPR	CG	N
0.781	19.84	2619	.69	17.4	.687	17.4	10	1.8	.51	13	5.2	23	.18	4.5	0.047	1.2	3.75	HD	CG	Z
0.781	19.84	12319	.72	18.2	.581	14.8	152	27	.22	5.5	33	147	.50	12.7	0.100	2.5	5.00	SPR	CG	Z
0.781	19.84	V-64	.75	19.1	.667	16.9	14	2.4	.49	13	6.9	31	.26	6.5	0.057	1.4	4.50	SST	CG	N
0.781	19.84	S-29	.75	19.1	.541	13.7	458	80	.14	3.4	62	275	.48	12.2	0.120	3.0	4.00	SST	CG	N
0.781	19.84	3743	.88	22.2	.699	17.8	3.3	.59	.63	16	2.1	9.3	.25	6.2	0.041	1.0	5.00	SPR	C	Z
0.781	19.84	11379	.88	22.2	.691	17.6	6.6	1.1	.65	17	4.3	19	.23	5.7	0.045	1.1	4.00	SST	C	N
0.781	19.84	LL-50	.88	22.2	.681	17.3	12	2.0	.51	13	5.9	26	.25	6.4	0.050	1.3	4.00	SPR	C	Z
0.781	19.84	S-971	.91	23.0	.705	17.9	2.1	.37	.72	18	1.5	6.7	.19	4.8	0.038	1.0	5.00	SST	CG	N
0.781	19.84	S-3254	.91	23.0	.541	13.7	458	80	.14	3.4	62	275	.48	12.2	0.120	3.0	4.00	SST	CG	N
0.781	19.84	I-61	.94	23.8	.657	16.7	12	2.2	.57	14	7.0	31	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.781	19.84	DD-81	1.00	25.4	.621	15.8	61	11	.34	8.8	21	93	.36	9.1	0.080	2.0	4.50	SST	CG	N
0.781	19.84	S-398	1.06	27.0	.531	13.5	315	55	.22	5.6	70	310	.69	17.5	0.125	3.2	5.50	SST	CG	N
0.781	19.84	3208	1.06	27.0	.399	10.1	3105	544	.07	1.9	227	1011	.96	24.3	0.191	4.9	5.00	SPR	CG	Z
0.781	19.84	S-357	1.09	27.8	.541	13.7	299	52	.21	5.3	62	275	.60	15.2	0.120	3.0	5.00	SST	CG	N
0.781	19.84	12558	1.13	28.6	.501	12.7	559	98	.18	4.7	103	456	.81	20.4	0.140	3.6	5.75	SPR	CG	N
0.781	19.84	10761	1.25	31.8	.661	16.8	9.9	1.7	.77	20	7.7	34	.48	12.2	0.060	1.5	7.00	SPR	C	Z
0.781	19.84	WW-38	1.25	31.8	.657	16.7	12	2.2	.84	21	10	46	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.781	19.84	XX-65	1.25	31.8	.531	13.5	249	44	.31	7.8	76	339	.88	22.2	0.125	3.2	7.00	SPR	CG	Z
0.781	19.84	B18-187	1.28	32.5	.673	17.1	7.5	1.3	.89	23	6.7	30	.39	9.9	0.054	1.4	6.25	SPR	C	Z
0.781	19.84	4282	1.31	33.3	.725	18.4	.32	.06	1.0	27	.33	1.5	.27	6.8	0.028	0.7	8.50	MW	C	Z
0.781	19.84	4225	1.31	33.3	.639	16.2	29	5.1	.54	14	16	70	.46	11.7	0.071	1.8	5.50	SPR	C	Z
0.781	19.84	2835	1.31	33.3	.511	13.0	443	78	.21	5.3	92	411	.81	20.6	0.135	3.4	6.00	SPR	CG	Z
0.781	19.84	KK-91	1.44	36.5	.661	16.8	6.2	1.1	.84	21	5.2	23	.60	15.2	0.060	1.5	10.0	SPR	CG	Z
0.781	19.84	2973	1.50	38.1	.679	17.2	2.6	.45	.91	23	2.4	10	.59	15.1	0.051	1.3	11.8	SPR	CG	Z
0.781	19.84	3498	1.50	38.1	.651	16.5	8.7	1.5	.79	20	6.9	31	.72	18.2	0.065	1.7	10.0	SPR	C	Z
0.781	19.84	11909	1.50	38.1	.639	16.2	18	3.2	.81	21	15	65	.50	12.6	0.071	1.8	7.00	SST	CG	N
0.781	19.84	10991	1.50	38.1	.531	13.5	207	36	.37	9.4	76	339	1.00	25.4	0.125	3.2	8.00	HD	CG	Z
0.781	19.84	11167	1.50	38.1	.531	13.5	216	38	.35	9.0	76	339	.97	24.6	0.125	3.2	7.75	SPR	CG	Z
0.781	19.84	B11-25	1.50	38.1	.409	10.4	2042	358	.10	2.6	212	941	1.12	28.3	0.186	4.7	6.00	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.781	19.84	3127	1.63	41.3	.641	16.3	19	3.4	.78	20	15	67	.49	12.4	0.070	1.8	7.00	SPR	CG	Z
0.781	19.84	64	1.63	41.3	.541	13.7	147	26	.46	12	68	302	1.08	27.4	0.120	3.0	9.00	HD	CG	Z
0.781	19.84	BB-55	1.63	41.3	.461	11.7	582	102	.22	5.7	130	577	1.28	32.5	0.162	4.1	8.00	SST	CG	N
0.781	19.84	S-300	1.88	47.6	.637	16.2	16	2.8	.98	25	15	68	.58	14.6	0.072	1.8	8.00	SST	CG	N
0.781	19.84	11950	2.00	50.8	.461	11.7	605	106	.24	6.1	146	650	1.36	34.5	0.160	4.1	8.50	SPR	CG	Z
0.781	19.84	387	2.25	57.2	.541	13.7	103	18	.66	17	68	302	1.44	36.6	0.120	3.0	12.0	HD	CG	Z
0.781	19.84	S-1198	2.38	60.3	.657	16.7	9.0	1.6	1.2	29	10	46	.47	11.8	0.062	1.6	7.50	SST	CG	N
0.781	19.84	S-1273	2.44	61.9	.673	17.1	4.6	.81	1.5	38	6.9	31	.43	11.0	0.054	1.4	8.00	SST	CG	N
0.781	19.84	4204	2.50	63.5	.699	17.8	2.0	.35	1.7	44	3.5	15	.29	7.3	0.041	1.0	7.00	SPR	CG	Z
0.781	19.84	4139	2.63	66.7	.515	13.1	154	27	.58	15	89	394	1.70	43.1	0.133	3.4	12.8	SPR	CG	Z
0.781	19.84	3361	2.69	68.2	.511	13.0	161	28	.57	15	92	411	1.76	44.6	0.135	3.4	13.0	SPR	CG	Z
0.781	19.84	3760	2.75	69.9	.691	17.6	2.6	.45	1.8	45	4.6	20	.39	10.0	0.045	1.1	7.75	SPR	C	Z
0.781	19.84	12322	2.78	70.6	.609	15.5	20	3.4	1.4	36	28	123	1.20	30.6	0.086	2.2	14.0	SPR	CG	GI
0.781	19.84	12275	2.84	72.2	.587	14.9	57	9.9	.66	17	38	168	.87	22.2	0.097	2.5	9.00	SPR	CG	Z
0.781	19.84	3484	2.88	73.0	.531	13.5	131	23	.58	15	76	339	1.44	36.5	0.125	3.2	11.5	HD	CG	Z
0.781	19.84	YY-38	3.38	85.7	.691	17.6	1.2	.20	2.7	70	3.2	14	.63	16.0	0.045	1.1	13.0	SST	C	N
0.781	19.84	10818	3.50	88.9	.731	18.6	.10	.02	3.1	79	.32	1.4	.39	10.0	0.025	0.6	14.8	MW	C	N
0.781	19.84	3293	3.50	88.9	.661	16.8	4.1	.73	2.4	62	10	45	.90	22.9	0.060	1.5	14.0	SPR	C	Z
0.781	19.84	3305	3.50	88.9	.597	15.2	29	5.0	1.1	29	32	144	1.20	30.4	0.092	2.3	13.0	SPR	CG	Z
0.781	19.84	3224	3.56	90.5	.585	14.9	28	4.9	1.4	36	39	173	1.67	42.3	0.098	2.5	17.0	SPR	CG	Z
0.781	19.84	3461	3.63	92.1	.657	16.7	5.7	1.0	1.9	49	11	49	.74	18.9	0.062	1.6	12.0	HD	CG	Z
0.781	19.84	4217	4.00	101.6	.689	17.5	1.5	.27	3.2	80	4.9	22	.62	15.8	0.046	1.2	12.5	SPR	C	Z
0.781	19.84	11533	4.00	101.6	.657	16.7	2.8	.47	2.5	63	6.6	29	1.52	38.6	0.062	1.6	23.5	SPR	CG	Z
0.781	19.84	B7-53	4.19	106.4	.637	16.2	6.1	1.1	2.5	64	15	68	1.28	32.5	0.072	1.8	17.8	SST	CG	N
0.781	19.84	12037	5.56	141.3	.589	15.0	17	3.0	2.1	54	37	163	2.30	58.5	0.096	2.4	24.0	SPR	CG	Z
0.785	19.94	12787	1.31	33.3	.709	18.0	1.9	.34	1.1	27	2.0	9.0	.26	6.5	0.038	1.0	5.75	MW	C	N
0.796	20.22	2740	.66	16.7	.652	16.6	34	5.9	.30	7.5	10	45	.36	9.1	0.072	1.8	5.00	MW	CG	Z
0.796	20.22	1647	.75	19.1	.688	17.5	9.0	1.6	.41	10	3.7	16	.34	8.7	0.054	1.4	5.33	SPR	C	Z
0.796	20.22	11810	.84	21.4	.674	17.1	17	2.9	.54	14	9.0	40	.31	7.7	0.061	1.5	5.00	SPR	CG	Z
0.796	20.22	PP-88	.97	24.6	.536	13.6	463	81	.18	4.5	82	363	.65	16.5	0.130	3.3	5.00	SPR	CG	N
0.796	20.22	B11-38	1.00	25.4	.708	18.0	3.6	.63	.76	19	2.7	12	.24	6.1	0.044	1.1	5.50	SPR	CG	N
0.796	20.22	MM-99	1.03	26.2	.536	13.6	352	62	.21	5.3	73	327	.72	18.2	0.130	3.3	5.50	SST	CG	N
0.796	20.22	A11-32	1.06	27.0	.612	15.5	87	15	.34	8.6	29	131	.46	11.7	0.092	2.3	5.00	SST	CG	N
0.796	20.22	S-491	1.06	27.0	.546	13.9	294	52	.23	5.9	68	304	.69	17.5	0.125	3.2	5.50	SST	CG	N
0.796	20.22	S-804	1.19	30.2	.688	17.5	6.5	1.1	.86	22	5.6	25	.32	8.2	0.054	1.4	6.00	SST	CG	N
0.796	20.22	2857	1.22	31.0	.666	16.9	16	2.9	.83	21	14	61	.39	9.9	0.065	1.7	6.00	MW	CG	Z
0.796	20.22	Y-28	1.28	32.5	.596	15.1	90	16	.45	11	41	180	.68	17.1	0.100	2.5	6.75	SPR	CG	Z
0.796	20.22	S-870	1.31	33.3	.702	17.8	5.3	.92	.91	23	4.8	21	.22	5.7	0.047	1.2	4.75	SST	CG	N
0.796	20.22	3759	1.31	33.3	.616	15.6	60	10	.50	13	30	132	.68	17.1	0.090	2.3	6.50	SPR	C	Z
0.796	20.22	S-441	1.31	33.3	.614	15.6	55	9.7	.51	13	29	127	.59	15.0	0.091	2.3	6.50	SST	CG	N
0.796	20.22	3116	1.34	34.1	.526	13.4	367	64	.25	6.3	91	404	.88	22.3	0.135	3.4	6.50	SPR	CG	Z
0.796	20.22	B8-51	1.38	34.9	.456	11.6	979	171	.17	4.4	170	758	1.19	30.2	0.170	4.3	7.00	SPR	CG	Z
0.796	20.22	S-1142	1.50	38.1	.716	18.2	1.3	.24	1.2	29	1.6	6.9	.34	8.6	0.040	1.0	7.50	SST	C	N
0.796	20.22	S-1207	1.50	38.1	.652	16.6	22	3.9	.68	17	15	67	.43	11.0	0.072	1.8	6.00	SST	CG	N
0.796	20.22	MM-51	1.50	38.1	.596	15.1	58	10	.65	16	38	167	.85	21.6	0.100	2.5	8.50	SST	CG	N
0.796	20.22	A13-66	1.50	38.1	.586	14.9	94	16	.46	12	43	193	.74	18.7	0.105	2.7	7.00	SST	CG	N
0.796	20.22	10668	1.50	38.1	.552	14.0	181	32	.39	9.8	70	311	.95	24.0	0.122	3.1	7.75	SPR	CG	Z
0.796	20.22	S-3156	1.56	39.7	.672	17.1	5.8	1.0	.94	24	5.5	24	.62	15.7	0.062	1.6	10.0	SST	CG	N
0.796	20.22	BB-28	1.63	41.3	.676	17.2	9.2	1.6	1.0	26	9.3	41	.39	9.9	0.060	1.5	6.50	SST	CG	N
0.796	20.22	S-234	1.69	42.8	.688	17.5	5.3	.93	1.3	33	6.8	30	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.796	20.22	S-1173	1.75	44.5	.586	14.9	46	8.1	.49	12	23	100	1.26	32.0	0.105	2.7	12.0	SST	CG	N
0.796	20.22	B8-52	1.91	48.4	.680	17.3	7.0	1.2	1.3	32	8.9	40	.45	11.4	0.058	1.5	7.75	SPR	CG	N
0.796	20.22	10628	2.00	50.8	.672	17.1	5.7	.99	1.3	33	7.3	32	.71	18.1	0.062	1.6	11.5	SPR	CG	Z
0.796	20.22	S-1029	2.00	50.8	.668	17.0	4.5	.78	1.1	28	4.9	22	.90	22.8	0.064	1.6	14.0	SST	CG	N
0.796	20.22	LL-48	2.00	50.8	.656	16.7	6.7	1.2	1.0	26	6.8	30	.98	24.9	0.070	1.8	14.0	SST	CG	N
0.796	20.22	2798	2.00	50.8	.612	15.5	42	7.4	.75	19	32	141	.83	21.0	0.092	2.3	9.00	SPR	CG	Z
0.796	20.22	10052	2.00	50.8	.484	12.3	481	84	.28	7.1	134	596	1.37	34.7	0.156	4.0	8.75	SPR	CG	Z
0.796	20.22	11594	2.03	51.6	.476	12.1	523	92	.27	7.0	144	640	1.60	40.6	0.160	4.1	9.00	SPR	CG	Z
0.796	20.22	CC-47	2.28	57.9	.636	16.2	21	3.7	1.0	26	22	98	.76	19.3	0.080	2.0	9.50	SPR	CG	Z
0.796	20.22	S-1132	2.31	58.7	.686	17.4	3.1	.55	1.7	42	5.2	23	.66	16.8	0.055	1.4	11.0	SST	C	N
0.796	20.22	M-95	2.50	63.5	.698	17.7	3.3	.58	1.7	44	5.8	26	.39	10.0	0.049	1.2	8.00	SPR	CG	N
0.796	20.22	1749	2.50	63.5	.586	14.9	59	10	1.1	28	65	291	1.26	32.0	0.105	2.7	11.0	MW	C	Z
0.796	20.22	12165	2.63	66.7	.636	16.2	20	3.5	1.1	28	22	98	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
0.796	20.22	4234	2.75	69.9	.636	16.2	16	2.8	1.4	35	22	98	.96	24.4	0.080	2.0	12.0	SPR	CG	Z
0.796	20.22	11141	2.78	70.6	.612	15.5	34	5.9	.94	24	32	141	.99	25.1	0.092	2.3	10.8	HD	CG	Z
0.796	20.22	10737	2.78	70.6	.566	14.4	60	11	.89	23	54	239	1.58	40.2	0.115	2.9	13.8	SST	CG	N
0.796	20.22	11647	2.88	73.0	.614	15.6	26	4.5	1.2	31	31	137	1.18	30.0	0.091	2.3	13.0	SPR	CG	Z
0.796	20.22	12161	2.94	74.6	.652	16.6	5.7	.99	1.5	38	8.5	38	1.44	36.6	0.072	1.8	20.0	SPR	CG	Z
0.796	20.22	10500	3.00	76.2	.668	17.0	6.0	1.1	2.0	51	12	53	.85	21.5	0.064	1.6	12.3	SPR	C	Z
0.796	20.22	10494	3.00	76.2	.664	16.9	8.8	1.5	1.5	38	13	58	.66	16.8	0.066	1.7	10.0	SPR	CG	Z
0.796	20.22	10667	3.13	79.4	.560	14.2	87	15	.73	18	63	282	1.45	36.7	0.118	3.0	12.3	SPR	CG	Z
0.796	20.22	S-232	3.25	82.6	.638	16.2	14	2.4	1.4	36	20	88	.91	23.1	0.079	2.0	11.5	SST	CG	N
0.796	20.22	3466	3.25	82.6	.586	14.9	38	6.6	1.2	31	47	208	1.79	45.3	0.105	2.7	16.0	HD	C	Z
0.796	20.22	B17-202	3.34	84.9	.652	16.6	11	2.0	1.4	36	16	71	.79	20.1	0.072	1.8	11.0	SPR	CG	N
0.796	20.22	12035	3.38	85.7	.598	15.2	27	4.8	1.4	37	39	175	1.68	42.7	0.099	2.5	17.0	SPR	CG	Z
0.796	20.22	1547	3.50	88.9	.642	16.3	13	2.2	1.5	39	20	87	1.06	26.9	0.077	2.0	12.8	SPR	C	Z
0.796	20.22	3099	3.50	88.9	.604	15.3	22	3.9	1.6	41	36	160	1.73	43.9	0.096	2.4	18.0	SPR	CG	Z
0.796	20.22	11778	4.25	108.0	.602	15.3	23	4.1	1.6	40	37	165	1.75	44.3	0.097	2.5	18.0	SPR	CG	N
0.796	20.22	12204	4.31	109.5	.636	16.2	11	1.9	2.0	50	22	98	1.32	33.5	0.080	2.0	16.5	SPR	CG	Z
0.796	20.22	S-1584	7.75	196.9	.636	16.2	14	2.5	1.4	37	21	91	.96	24.4	0.080	2.0	12.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.796	20.22	10848	8.25	209.6	.676	17.2	2.3	.41	4.2	107	9.9	44	1.38	35.1	0.060	1.5	22.0	SPR	C	GI
0.796	20.22	3054	9.00	228.6	.672	17.1	3.0	.52	3.6	93	11	48	1.30	33.1	0.062	1.6	20.0	SPR	C	Z
0.796	20.22	S-76	11.4	288.9	.466	11.8	88	15	1.6	40	139	619	7.26	184.4	0.165	4.2	44.0	SST	CG	N
0.812	20.62	DD-6	.38	9.5	.762	19.4	.33	.06	.21	5.4	.07	.31	.16	4.1	0.025	0.6	5.50	MW	C	Z
0.812	20.62	BB-77	.44	11.1	.698	17.7	18	3.1	.21	5.3	3.7	16	.23	5.8	0.057	1.4	4.00	SPR	CG	N
0.812	20.62	2856	.47	11.9	.704	17.9	11	2.0	.23	5.7	2.5	11	.24	6.2	0.054	1.4	4.50	HD	CG	Z
0.812	20.62	FF-36	.50	12.7	.692	17.6	18	3.1	.17	4.3	3.0	13	.33	8.4	0.060	1.5	4.50	SPR	C	N
0.812	20.62	S-939	.69	17.4	.668	17.0	56	9.9	.26	6.7	15	66	.25	6.4	0.072	1.8	3.50	SST	CG	N
0.812	20.62	3356	.69	17.4	.642	16.3	98	17	.26	6.7	26	114	.34	8.6	0.085	2.2	4.00	SPR	CG	Z
0.812	20.62	DD-84	.72	18.2	.722	18.3	3.2	.57	.47	12	1.5	6.8	.25	6.3	0.045	1.1	5.50	SST	CG	N
0.812	20.62	II-7	.78	19.8	.692	17.6	9.7	1.7	.42	11	4.1	18	.36	9.1	0.060	1.5	6.00	SST	CG	N
0.812	20.62	11432	.81	20.6	.662	16.8	28	5.0	.36	9.2	10	46	.45	11.4	0.075	1.9	6.00	SPR	CG	Z
0.812	20.62	H-21	.81	20.6	.602	15.3	195	34	.22	5.5	43	189	.45	11.3	0.105	2.7	4.25	SST	CG	N
0.812	20.62	12639	.88	22.2	.520	13.2	1474	258	.07	1.7	101	448	.51	13.0	0.146	3.7	3.50	SST	C	N
0.812	20.62	S-123	1.00	25.4	.704	17.9	11	1.9	.61	16	6.7	30	.23	5.8	0.054	1.4	4.25	SST	CG	N
0.812	20.62	10340	1.00	25.4	.686	17.4	18	3.1	.62	16	11	50	.38	9.6	0.063	1.6	5.00	SPR	C	Z
0.812	20.62	FF-68	1.00	25.4	.532	13.5	497	87	.18	4.6	89	397	.74	18.7	0.140	3.6	5.25	SST	CG	N
0.812	20.62	3038	1.03	26.2	.632	16.1	61	11	.48	12	29	129	.55	14.0	0.090	2.3	6.00	SPR	CG	GI
0.812	20.62	B10-52	1.13	28.6	.648	16.5	42	7.3	.55	14	23	103	.49	12.5	0.082	2.1	6.00	SPR	CG	Z
0.812	20.62	4160	1.19	30.2	.496	12.6	801	140	.17	4.3	137	607	.95	24.1	0.158	4.0	6.00	SPR	CG	Z
0.812	20.62	S-1609	1.22	31.0	.602	15.3	110	19	.39	9.9	43	189	.63	16.0	0.105	2.7	6.00	SST	CG	N
0.812	20.62	1918	1.22	31.0	.504	12.8	710	124	.18	4.5	127	565	.92	23.5	0.154	3.9	6.00	SPR	CG	Z
0.812	20.62	KK-6	1.25	31.8	.592	15.0	122	21	.42	11	51	226	.77	19.6	0.110	2.8	7.00	SPR	CG	N
0.812	20.62	S-933	1.28	32.5	.686	17.4	12	2.1	.84	21	10	45	.44	11.2	0.063	1.6	6.00	SST	C	N
0.812	20.62	K-48	1.38	34.9	.528	13.4	389	68	.27	6.8	103	460	.99	25.2	0.142	3.6	7.00	SPR	CG	Z
0.812	20.62	2680	1.38	34.9	.500	12.7	670	117	.28	7.0	184	821	1.01	25.8	0.156	4.0	6.50	MW	CG	Z
0.812	20.62	63	1.38	34.9	.488	12.4	721	126	.20	5.2	147	652	1.13	28.8	0.162	4.1	7.00	HD	CG	Z
0.812	20.62	S-25	1.50	38.1	.758	19.3	.34	.06	1.3	33	.45	2.0	.19	4.8	0.027	0.7	6.00	SST	C	N
0.812	20.62	10601	1.50	38.1	.728	18.5	1.4	.25	1.1	27	1.5	6.7	.42	10.7	0.042	1.1	9.00	SPR	C	Z
0.812	20.62	S-366	1.50	38.1	.718	18.2	3.4	.60	1.2	31	4.1	18	.28	7.2	0.047	1.2	6.00	SST	CG	N
0.812	20.62	12554	1.50	38.1	.652	16.6	26	4.6	.77	20	20	90	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.812	20.62	S-3207	1.53	38.9	.602	15.3	88	15	.48	12	43	189	.74	18.7	0.105	2.7	7.00	SST	CG	N
0.812	20.62	10788	1.63	41.3	.688	17.5	9.9	1.7	1.0	26	10	45	.47	11.8	0.062	1.6	6.50	SST	C	N
0.812	20.62	3960	1.63	41.3	.572	14.5	138	24	.47	12	65	291	1.02	25.9	0.120	3.0	8.50	SPR	CG	Z
0.812	20.62	S-799	1.66	42.1	.716	18.2	3.8	.66	1.3	34	5.0	22	.29	7.3	0.048	1.2	6.00	SST	CG	N
0.812	20.62	3801	1.69	42.8	.602	15.3	76	13	.60	15	46	204	.89	22.7	0.105	2.7	8.50	SPR	CG	GI
0.812	20.62	2645	1.75	44.5	.688	17.5	4.2	.73	.82	21	3.4	15	.93	23.6	0.062	1.6	14.0	HD	C	Z
0.812	20.62	12605	1.75	44.5	.652	16.6	27	4.8	1.1	27	29	130	.68	17.3	0.080	2.0	7.50	MW	C	N
0.812	20.62	3079	1.75	44.5	.572	14.5	124	22	.53	13	65	291	1.11	28.2	0.120	3.0	9.25	SPR	CG	Z
0.812	20.62	3354	1.75	44.5	.572	14.5	129	23	.51	13	65	291	1.20	30.5	0.120	3.0	9.00	SPR	C	Z
0.812	20.62	3139	1.78	45.2	.518	13.2	380	67	.30	7.6	114	507	1.18	29.9	0.147	3.7	8.00	SPR	CG	Z
0.812	20.62	12490	1.81	46.0	.706	17.9	3.8	.66	1.3	34	5.0	22	.48	12.1	0.053	1.3	8.00	SST	C	N
0.812	20.62	65	1.88	47.6	.572	14.5	116	20	.56	14	65	291	1.17	29.7	0.120	3.0	9.75	HD	CG	Z
0.812	20.62	2974	2.00	50.8	.730	18.5	1.1	.19	1.5	39	1.7	7.6	.45	11.5	0.041	1.0	10.0	SPR	C	Z
0.812	20.62	3282	2.00	50.8	.688	17.5	5.0	.88	1.3	32	6.3	28	.74	18.9	0.062	1.6	12.0	HD	CG	Z
0.812	20.62	12157	2.13	54.0	.650	16.5	26	4.6	.85	21	22	99	.65	16.5	0.081	2.1	8.00	SPR	CG	GI
0.812	20.62	S-1215	2.13	54.0	.612	15.5	35	6.1	.93	23	32	142	1.20	30.5	0.100	2.5	12.0	SST	CG	N
0.812	20.62	11959	2.16	54.8	.744	18.9	.52	.09	1.8	46	.94	4.2	.34	8.6	0.034	0.9	9.00	SST	C	N
0.812	20.62	3945	2.19	55.6	.704	17.9	3.1	.55	1.5	39	4.8	21	.65	16.5	0.054	1.4	11.0	SPR	C	Z
0.812	20.62	B8-35	2.25	57.2	.708	18.0	2.7	.46	1.7	44	4.6	20	.52	13.2	0.052	1.3	10.0	SST	CG	N
0.812	20.62	69	2.25	57.2	.602	15.3	55	9.6	.84	21	46	204	1.26	32.0	0.105	2.7	11.0	HD	CG	Z
0.812	20.62	70	2.25	57.2	.572	14.5	112	20	.58	15	65	291	1.32	33.5	0.120	3.0	10.0	HD	C	Z
0.812	20.62	11217	2.25	57.2	.562	14.3	117	20	.63	16	74	328	1.41	35.7	0.125	3.2	11.3	HD	CG	Z
0.812	20.62	12145	2.50	63.5	.684	17.4	5.2	.92	1.7	42	8.7	39	.83	21.1	0.064	1.6	13.0	SPR	CG	Z
0.812	20.62	S-1612	2.50	63.5	.682	17.3	4.6	.80	1.5	39	6.9	31	.98	24.8	0.065	1.7	14.0	SST	C	N
0.812	20.62	12061	2.50	63.5	.652	16.6	14	2.4	1.5	37	20	89	1.04	26.4	0.080	2.0	13.0	SPR	CG	Z
0.812	20.62	11188	2.50	63.5	.642	16.3	19	3.4	1.3	32	24	107	1.02	25.9	0.085	2.2	11.0	SST	C	N
0.812	20.62	S-3090	2.50	63.5	.612	15.5	41	7.1	.91	23	37	164	1.05	26.7	0.100	2.5	10.5	SST	CG	N
0.812	20.62	3459	2.50	63.5	.602	15.3	55	9.6	.84	21	46	204	1.16	29.3	0.105	2.7	11.0	HD	CG	Z
0.812	20.62	12606	2.66	67.5	.542	13.8	166	29	.75	19	125	556	1.65	42.0	0.135	3.4	11.3	MW	C	N
0.812	20.62	12163	2.75	69.9	.686	17.4	5.4	.94	2.0	51	11	48	.76	19.2	0.063	1.6	12.0	SPR	CG	GI
0.812	20.62	12543	2.75	69.9	.562	14.3	114	20	.73	18	83	369	1.56	39.7	0.125	3.2	11.5	OT	C	N
0.812	20.62	4173	2.88	73.0	.628	16.0	25	4.4	1.2	32	31	139	1.20	30.4	0.092	2.3	13.0	SPR	CG	N
0.812	20.62	1727	3.00	76.2	.708	18.0	3.4	.60	1.9	47	6.3	28	.52	13.2	0.052	1.3	9.00	SPR	C	Z
0.812	20.62	10709	3.00	76.2	.686	17.4	5.4	.94	2.1	53	11	50	.82	20.8	0.063	1.6	12.0	SPR	C	Z
0.812	20.62	3236	3.00	76.2	.648	16.5	18	3.1	1.3	33	23	103	1.01	25.7	0.082	2.1	11.3	SPR	C	Z
0.812	20.62	12492	3.00	76.2	.630	16.0	22	3.8	1.4	35	30	134	1.27	32.4	0.091	2.3	14.0	SPR	CG	N
0.812	20.62	11475	3.19	81.0	.672	17.1	8.4	1.5	1.7	44	15	65	.91	23.1	0.070	1.8	12.0	SPR	C	Z
0.812	20.62	3970	3.19	81.0	.668	17.0	9.1	1.6	1.7	44	16	70	.90	22.9	0.072	1.8	12.5	SPR	CG	Z
0.812	20.62	4102	3.38	85.7	.692	17.6	3.0	.52	2.3	59	6.9	31	1.07	27.1	0.060	1.5	16.8	SPR	C	Z
0.812	20.62	37	3.75	95.3	.542	13.8	91	16	.99	25	89	398	2.57	65.2	0.135	3.4	19.0	HD	CG	Z
0.812	20.62	S-1400	3.88	98.4	.668	17.0	6.6	1.2	2.2	57	15	66	1.12	28.3	0.072	1.8	14.5	SST	C	N
0.812	20.62	10687	3.88	98.4	.652	16.6	11	1.9	1.9	49	22	96	1.24	31.5	0.080	2.0	15.5	SPR	CG	Z
0.812	20.62	2837	4.25	108.0	.724	18.4	1.3	.23	3.1	79	4.1	18	.53	13.4	0.044	1.1	11.0	SPR	C	GI
0.812	20.62	12431	4.25	108.0	.724	18.4	1.3	.23	3.1	79	4.1	18	.53	13.4	0.044	1.1	11.0	SPR	C	GI
0.812	20.62	11248	4.50	114.3	.592	15.0	31	5.5	1.6	41	51	226	2.37	60.1	0.110	2.8	21.5	SPR	CG	Z
0.812	20.62	S-966	4.75	120.7	.652	16.6	7.7	1.4	2.6	66	20	90	1.51	38.4	0.080	2.0	19.0	SST	CG	N
0.812	20.62	2701	5.13	130.2	.626	15.9	15	2.7	2.9	74	45	200	2.02	51.4	0.093	2.4	20.8	MW	C	Z
0.812	20.62	11601	5.13	130.2	.536	13.6	71	12	1.3	34	95	423	3.73	94.6	0.138	3.5	26.0	SPR	C	Z
0.812	20.62	2589	5.19	131.8	.488	12.4	180	32	.81	21	147	652	3.56	90.5	0.162	4.1	22.0	HD	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.812	20.62	2738	5.50	139.7	.592	15.0	30	5.2	1.7	44	51	226	2.48	62.9	0.110	2.8	22.5	SPR	CG	Z
0.812	20.62	10214	7.00	177.8	.602	15.3	22	3.8	2.1	53	46	204	2.57	65.4	0.105	2.7	24.5	SPR	CG	Z
0.812	20.62	2997	9.19	233.4	.516	13.1	54	9.4	2.2	55	116	517	6.81	172.9	0.148	3.8	46.0	SPR	CG	Z
0.812	20.62	12741	10.0	254.0	.558	14.2	31	5.4	2.5	64	77	343	5.21	132.3	0.127	3.2	40.0	SPR	C	N
0.812	20.62	4244	15.5	393.7	.602	15.3	11	1.9	4.1	105	46	204	4.88	124.0	0.105	2.7	46.5	SPR	CG	Z
0.822	20.88	B2-66	2.63	66.7	.550	14.0	160	28	.65	16	105	466	1.70	43.2	0.136	3.5	11.5	OT	C	N
0.828	21.03	11483	.50	12.7	.728	18.5	19	3.3	.29	7.4	5.5	25	.20	5.1	0.050	1.3	3.00	SPR	CG	Z
0.828	21.03	B14-67	.50	12.7	.672	17.1	126	22	.16	3.9	20	87	.23	5.9	0.078	2.0	3.00	SPR	CG	Z
0.828	21.03	KK-62	.50	12.7	.588	14.9	745	130	.08	2.0	59	261	.36	9.1	0.120	3.0	3.00	SST	CG	N
0.828	21.03	S-349	.72	18.2	.642	16.3	320	56	.09	2.3	29	130	.26	6.5	0.093	2.4	2.75	SST	CG	N
0.828	21.03	S-416	.78	19.8	.704	17.9	10	1.8	.41	10	4.3	19	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.828	21.03	S-1111	.81	20.6	.764	19.4	1.0	.18	.64	16	.66	2.9	.18	4.5	0.032	0.8	4.50	SST	C	N
0.828	21.03	3872	.81	20.6	.732	18.6	11	1.9	.49	12	5.2	23	.22	5.5	0.048	1.2	3.50	SPR	C	Z
0.828	21.03	11361	.81	20.6	.668	17.0	71	12	.28	7.0	20	88	.30	7.6	0.080	2.0	3.75	SST	CG	N
0.828	21.03	11227	.84	21.4	.474	12.0	2922	512	.06	1.6	185	822	.66	16.9	0.177	4.5	3.75	SPR	CG	Z
0.828	21.03	CC-68	.88	22.2	.648	16.5	42	7.3	.25	6.2	10	45	.63	16.0	0.090	2.3	7.00	SST	CG	N
0.828	21.03	2958	.91	23.0	.734	18.6	3.7	.64	.62	16	2.3	10	.28	7.2	0.047	1.2	6.00	SPR	CG	Z
0.828	21.03	12430	.94	23.8	.742	18.8	9.0	1.6	.39	10	3.5	16	.17	4.4	0.043	1.1	3.00	SST	C	N
0.828	21.03	S-3206	.94	23.8	.732	18.6	8.1	1.4	.60	15	4.9	22	.18	4.6	0.048	1.2	3.75	SST	CG	N
0.828	21.03	12315	1.00	25.4	.764	19.4	.75	.13	.81	21	.60	2.7	.19	4.9	0.032	0.8	6.00	SPR	CG	Z
0.828	21.03	KK-58	1.00	25.4	.728	18.5	9.5	1.7	.58	15	5.5	25	.20	5.1	0.050	1.3	4.00	SPR	CG	Z
0.828	21.03	4333	1.00	25.4	.704	17.9	16	2.8	.63	16	9.9	44	.37	9.4	0.062	1.6	5.00	SPR	C	N
0.828	21.03	10792	1.00	25.4	.646	16.4	55	9.6	.45	12	25	110	.55	13.9	0.091	2.3	6.00	SST	CG	N
0.828	21.03	KK-97	1.00	25.4	.608	15.4	112	20	.29	7.2	32	142	.72	18.2	0.110	2.8	6.50	SST	CG	N
0.828	21.03	11478	1.03	26.2	.728	18.5	9.5	1.7	.58	15	5.5	25	.25	6.4	0.050	1.3	4.00	SPR	CG	Z
0.828	21.03	3852	1.06	27.0	.732	18.6	4.3	.75	.74	19	3.2	14	.32	8.2	0.048	1.2	5.75	SPR	C	Z
0.828	21.03	11696	1.06	27.0	.648	16.5	59	10	.49	12	29	128	.54	13.7	0.090	2.3	6.00	SPR	CG	GI
0.828	21.03	12176	1.22	31.0	.516	13.1	701	123	.18	4.7	130	576	.94	23.8	0.156	4.0	6.00	SPR	CG	Z
0.828	21.03	10702	1.38	34.9	.700	17.8	18	3.2	.64	16	12	51	.32	8.1	0.064	1.6	5.00	SPR	CG	Z
0.828	21.03	A13-64	1.38	34.9	.686	17.4	28	4.9	.53	13	15	66	.36	9.0	0.071	1.8	5.00	SPR	CG	GI
0.828	21.03	10944	1.50	38.1	.708	18.0	10	1.8	.92	23	9.5	42	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.828	21.03	S-3163	1.50	38.1	.708	18.0	29	5.1	.30	7.7	8.9	40	.48	12.2	0.060	1.5	6.00	SST	CG	N
0.828	21.03	3424	1.50	38.1	.418	10.6	2100	368	.07	1.7	136	607	1.44	36.4	0.205	5.2	7.00	SPR	CG	Z
0.828	21.03	S-292	1.63	41.3	.644	16.4	35	6.1	.82	21	28	126	.78	19.9	0.092	2.3	8.50	SST	CG	N
0.828	21.03	S-1080	1.75	44.5	.724	18.4	4.3	.76	1.3	34	5.8	26	.39	9.9	0.052	1.3	6.50	SST	C	N
0.828	21.03	11768	1.75	44.5	.648	16.5	39	6.8	.73	19	29	128	.72	18.3	0.090	2.3	8.00	SPR	CG	Z
0.828	21.03	KK-35	1.81	46.0	.608	15.4	53	9.3	.55	14	29	129	1.27	32.1	0.110	2.8	11.5	SST	CG	N
0.828	21.03	TT-59	1.88	47.6	.668	17.0	24	4.3	.81	21	20	88	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.828	21.03	NN-8	1.88	47.6	.588	14.9	115	20	.51	13	59	261	1.02	25.9	0.120	3.0	8.50	SST	CG	N
0.828	21.03	10527	1.91	48.4	.532	13.5	366	64	.31	7.9	114	509	1.18	30.1	0.148	3.8	8.00	SPR	CG	N
0.828	21.03	12211	1.94	49.2	.708	18.0	8.2	1.4	1.2	29	9.5	42	.42	10.7	0.060	1.5	7.00	SPR	CG	Z
0.828	21.03	S-339	2.00	50.8	.578	14.7	117	21	.56	14	66	294	1.19	30.2	0.125	3.2	9.50	SST	CG	N
0.828	21.03	3226	2.09	53.2	.638	16.2	42	7.4	.79	20	34	150	.95	24.1	0.095	2.4	9.00	SPR	C	Z
0.828	21.03	S-361	2.13	54.0	.668	17.0	17	3.1	1.1	29	20	88	.72	18.3	0.080	2.0	9.00	SST	CG	N
0.828	21.03	10591	2.13	54.0	.668	17.0	23	4.1	.90	23	21	94	.72	18.3	0.080	2.0	8.00	SPR	C	Z
0.828	21.03	11987	2.19	55.6	.716	18.2	2.9	.51	1.5	38	4.4	19	.70	17.8	0.056	1.4	12.5	SPR	CG	GI
0.828	21.03	DD-80	2.50	63.5	.668	17.0	15	2.7	1.4	35	21	94	.90	22.9	0.080	2.0	11.3	SPR	CG	GI
0.828	21.03	11354	2.50	63.5	.668	17.0	14	2.4	1.4	36	20	88	.96	24.4	0.080	2.0	11.0	SST	C	N
0.828	21.03	1903	2.50	63.5	.646	16.4	25	4.4	1.2	30	30	132	1.07	27.2	0.091	2.3	11.8	SPR	CG	Z
0.828	21.03	11258	2.50	63.5	.578	14.7	101	18	.72	18	72	322	1.50	38.1	0.125	3.2	12.0	SPR	CG	Z
0.828	21.03	11933	2.63	66.7	.738	18.7	1.8	.31	2.2	56	3.9	17	.41	10.3	0.045	1.1	9.00	SPR	CG	Z
0.828	21.03	10806	2.63	66.7	.658	16.7	18	3.2	1.3	33	24	105	1.02	25.9	0.085	2.2	11.0	SST	C	N
0.828	21.03	S-287	2.75	69.9	.742	18.8	.88	.15	2.2	57	2.0	8.8	.52	13.1	0.043	1.1	12.0	SST	CG	N
0.828	21.03	S-3038	2.88	73.0	.454	11.5	553	97	.32	8.1	177	788	2.34	59.4	0.187	4.7	12.5	SST	CG	N
0.828	21.03	S-3202	3.00	76.2	.762	19.4	.25	.04	2.5	64	.64	2.8	.46	11.7	0.033	0.8	14.0	SST	CG	N
0.828	21.03	S-63	3.00	76.2	.758	19.3	.31	.05	2.5	64	.79	3.5	.49	12.4	0.035	0.9	14.0	SST	CG	N
0.828	21.03	S-72	3.00	76.2	.618	15.7	50	8.8	.83	21	42	186	1.16	29.3	0.105	2.7	10.0	SST	C	N
0.828	21.03	B8-38	3.00	76.2	.576	14.6	77	14	.87	22	68	301	1.76	44.8	0.126	3.2	14.0	SST	CG	N
0.828	21.03	S-3011	3.13	79.4	.704	17.9	4.1	.72	2.4	60	9.8	44	.74	18.9	0.062	1.6	12.0	SST	CG	N
0.828	21.03	G-43	3.31	84.1	.746	18.9	.74	.13	2.8	71	2.1	9.1	.53	13.5	0.041	1.0	12.0	SST	C	N
0.828	21.03	B9-52	3.50	88.9	.620	15.7	28	4.8	1.6	40	44	195	1.87	47.5	0.104	2.6	18.0	SPR	CG	Z
0.828	21.03	3185	3.53	89.7	.744	18.9	.93	.16	3.0	77	2.8	13	.50	12.7	0.042	1.1	12.0	SPR	CG	Z
0.828	21.03	3679	3.66	92.9	.558	14.2	110	19	.80	20	88	391	2.03	51.4	0.135	3.4	15.0	SPR	CG	Z
0.828	21.03	11268	3.75	95.3	.672	17.1	9.7	1.7	2.0	51	20	87	1.25	31.7	0.078	2.0	15.0	SPR	C	Z
0.828	21.03	12062	3.78	96.0	.698	17.7	4.4	.76	2.8	70	12	54	.99	25.2	0.065	1.7	15.3	SPR	CG	Z
0.828	21.03	11103	3.81	96.8	.588	14.9	56	9.8	1.1	29	64	286	2.04	51.8	0.120	3.0	17.0	SPR	CG	Z
0.828	21.03	11620	3.88	98.4	.682	17.3	5.9	1.0	2.5	63	15	66	1.39	35.2	0.073	1.9	18.0	SPR	CG	Z
0.828	21.03	12113	3.88	98.4	.600	15.2	37	6.5	1.5	38	55	247	2.28	57.9	0.114	2.9	20.0	SPR	CG	Z
0.828	21.03	3100	5.00	127.0	.618	15.7	24	4.3	1.9	47	45	200	2.21	56.0	0.105	2.7	21.0	SPR	CG	Z
0.828	21.03	11801	5.22	132.6	.668	17.0	8.0	1.4	2.6	67	21	94	1.64	41.7	0.080	2.0	19.5	SPR	C	Z
0.828	21.03	S-3231	6.03	153.2	.474	12.0	197	35	.83	21	164	730	4.43	112.4	0.177	4.5	25.0	SST	CG	N
0.828	21.03	1940	6.75	171.5	.646	16.4	9.9	1.7	3.0	76	30	132	2.46	62.4	0.091	2.3	27.0	SPR	CG	Z
0.828	21.03	1705	9.00	228.6	.640	16.3	8.8	1.5	3.7	94	33	145	3.31	84.2	0.094	2.4	34.3	SPR	C	Z
0.828	21.03	12542	10.0	254.0	.702	17.8	.82	.14	6.4	164	5.3	24	3.56	90.4	0.063	1.6	55.5	SST	CL	N
0.828	21.03	10154	10.0	254.0	.646	16.4	8.2	1.4	3.6	92	30	132	2.91	74.0	0.091	2.3	32.0	SPR	CG	GI
0.843	21.41	U-43	.28	7.1	.805	20.4	.33	.06	.21	5.2	.07	.31	.08	1.9	0.019	0.5	3.00	MW	C	N
0.843	21.41	B4-15	.50	12.7	.743	18.9	12	2.1	.33	8.3	3.9	17	.18	4.4	0.050	1.3	3.50	SPR	CG	N
0.843	21.41	CC-40	.50	12.7	.723	18.4	39	6.8	.24	6.1	9.3	42	.24	6.1	0.060	1.5	3.00	SPR	C	Z
0.843	21.41	H-38	.69	17.4	.649	16.5	89	16	.20	5.1	18	80	.49	12.3	0.097	2.5	5.00	SST	CG	N
0.843	21.41	B2-56	.69	17.4	.649	16.5	102	18	.20	5.1	21	92	.49	12.3	0.097	2.5	5.00	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.843	21.41	11530	.69	17.4	.575	14.6	743	130	.05	1.3	38	167	.64	16.2	0.134	3.4	3.75	SPR	CG	Z
0.843	21.41	4310	.69	17.4	.573	14.6	1076	188	.08	2.0	86	385	.44	11.1	0.135	3.4	3.25	SPR	CG	Z
0.843	21.41	S-371	.75	19.1	.657	16.7	111	19	.26	6.6	29	128	.37	9.4	0.093	2.4	4.00	SST	CG	N
0.843	21.41	XX-54	.81	20.6	.683	17.3	77	13	.25	6.4	19	87	.28	7.1	0.080	2.0	3.50	SST	CG	N
0.843	21.41	S-226	.91	23.0	.665	16.9	37	6.4	.28	7.2	10	46	.62	15.8	0.089	2.3	7.00	SST	CG	N
0.843	21.41	PP-48	1.00	25.4	.783	19.9	.96	.17	.88	22	.85	3.8	.12	3.0	0.030	0.8	4.00	SST	CG	N
0.843	21.41	S-150	1.00	25.4	.749	19.0	4.0	.71	.72	18	2.9	13	.28	7.2	0.047	1.2	5.00	SST	C	N
0.843	21.41	S-1155	1.00	25.4	.719	18.3	19	3.4	.50	13	9.7	43	.25	6.3	0.062	1.6	4.00	SST	CG	N
0.843	21.41	10028	1.00	25.4	.703	17.9	37	6.5	.37	9.5	14	62	.28	7.1	0.070	1.8	4.00	SPR	CG	Z
0.843	21.41	S-255	1.00	25.4	.693	17.6	26	4.6	.60	15	16	70	.40	10.2	0.075	1.9	5.33	SST	CG	N
0.843	21.41	S-1627	1.00	25.4	.673	17.1	56	9.7	.42	11	23	103	.49	12.4	0.085	2.2	4.75	SST	C	N
0.843	21.41	12668	1.00	25.4	.659	16.7	81	14	.52	13	42	187	.46	11.7	0.092	2.3	5.00	MW	CG	N
0.843	21.41	12674	1.00	25.4	.659	16.7	108	19	.39	9.9	42	187	.39	9.9	0.092	2.3	4.25	MW	CG	N
0.843	21.41	B15-22	1.03	26.2	.723	18.4	17	3.0	.51	13	8.8	39	.24	6.1	0.060	1.5	4.00	SST	CG	N
0.843	21.41	B6-47	1.06	27.0	.723	18.4	19	3.4	.48	12	9.3	42	.30	7.6	0.060	1.5	4.00	SPR	C	N
0.843	21.41	MM-56	1.09	27.8	.723	18.4	9.1	1.6	.72	18	6.6	29	.38	9.5	0.060	1.5	6.25	SPR	CG	N
0.843	21.41	QQ-59	1.13	28.6	.699	17.8	18	3.2	.69	18	13	56	.43	11.0	0.072	1.8	6.00	SST	CG	N
0.843	21.41	11139	1.19	30.2	.661	16.8	77	14	.38	9.6	29	130	.55	13.9	0.091	2.3	5.00	SPR	C	Z
0.843	21.41	M-23	1.25	31.8	.775	19.7	1.2	.21	1.0	27	1.3	5.6	.20	5.2	0.034	0.9	5.00	SPR	C	N
0.843	21.41	S-882	1.25	31.8	.713	18.1	16	2.9	.68	17	11	50	.32	8.0	0.065	1.7	5.00	SST	CG	N
0.843	21.41	K-63	1.25	31.8	.707	18.0	17	2.9	.82	21	14	60	.41	10.4	0.068	1.7	6.00	SPR	CG	GI
0.843	21.41	3095	1.25	31.8	.693	17.6	27	4.7	.64	16	17	76	.43	11.0	0.075	1.9	5.75	SPR	CG	Z
0.843	21.41	2892	1.28	32.5	.683	17.3	27	4.8	.73	19	20	88	.55	14.0	0.080	2.0	7.00	SPR	CG	Z
0.843	21.41	MM-12	1.28	32.5	.663	16.8	44	7.6	.60	15	26	116	.59	14.9	0.090	2.3	6.50	SST	CG	N
0.843	21.41	S-77	1.38	34.9	.761	19.3	2.1	.37	1.1	28	2.4	10	.26	6.5	0.041	1.0	5.25	SST	C	N
0.843	21.41	11995	1.38	34.9	.715	18.2	7.3	1.3	.80	20	5.8	26	.58	14.6	0.064	1.6	9.00	SPR	CG	Z
0.843	21.41	S-807	1.41	35.7	.683	17.3	29	5.0	.67	17	19	87	.48	12.2	0.080	2.0	6.00	SST	CG	N
0.843	21.41	11784	1.41	35.7	.647	16.4	71	12	.51	13	36	161	.64	16.2	0.098	2.5	6.50	SPR	CG	N
0.843	21.41	10821	1.41	35.7	.583	14.8	227	40	.34	8.7	78	345	.91	23.1	0.130	3.3	7.00	SPR	CG	Z
0.843	21.41	3168	1.47	37.3	.735	18.7	5.0	.87	1.1	28	5.4	24	.38	9.6	0.054	1.4	7.00	SPR	CG	Z
0.843	21.41	1649	1.50	38.1	.731	18.6	7.3	1.3	1.0	27	7.6	34	.39	10.0	0.056	1.4	6.00	SPR	C	Z
0.843	21.41	3214	1.50	38.1	.715	18.2	17	3.0	.66	17	11	50	.38	9.8	0.064	1.6	5.00	SPR	CG	Z
0.843	21.41	B12-64	1.50	38.1	.713	18.1	12	2.1	.98	25	12	53	.49	12.4	0.065	1.7	6.50	SPR	C	N
0.843	21.41	12612	1.50	38.1	.683	17.3	33	5.8	.63	16	21	92	.48	12.2	0.080	2.0	6.00	SPR	CG	Z
0.843	21.41	S-54	1.50	38.1	.623	15.8	124	22	.36	9.2	45	199	.63	16.1	0.110	2.8	5.75	SST	CG	N
0.843	21.41	S-1483	1.56	39.7	.683	17.3	18	3.1	.88	22	16	70	.68	17.3	0.080	2.0	8.50	SST	CG	N
0.843	21.41	1775	1.59	40.5	.715	18.2	6.2	1.1	.94	24	5.8	26	.66	16.7	0.064	1.6	10.3	SPR	CG	Z
0.843	21.41	1569	1.63	41.3	.763	19.4	2.0	.36	1.4	35	2.8	12	.26	6.6	0.040	1.0	5.50	SPR	C	Z
0.843	21.41	S-1478	1.63	41.3	.727	18.5	5.8	1.0	1.2	31	7.1	32	.41	10.3	0.058	1.5	7.00	SST	CG	N
0.843	21.41	S-3001	1.63	41.3	.719	18.3	10	1.8	.94	24	9.7	43	.36	9.1	0.062	1.6	5.75	SST	CG	N
0.843	21.41	10703	1.75	44.5	.735	18.7	5.9	1.0	1.2	30	6.8	30	.39	10.0	0.054	1.4	6.25	SPR	C	Z
0.843	21.41	S-824	1.75	44.5	.683	17.3	14	2.5	.95	24	14	61	.80	20.3	0.080	2.0	10.0	SST	CG	N
0.843	21.41	B12-37	2.00	50.8	.661	16.8	39	6.8	.75	19	29	130	.82	20.8	0.091	2.3	8.00	SPR	C	N
0.843	21.41	12613	2.00	50.8	.643	16.3	58	10	.92	23	54	239	.90	22.9	0.100	2.5	8.00	MW	C	N
0.843	21.41	S-82	2.00	50.8	.603	15.3	110	19	.53	13	58	257	1.11	28.2	0.120	3.0	8.25	SST	C	N
0.843	21.41	JJ-54	2.00	50.8	.503	12.8	499	87	.29	7.4	145	643	1.53	38.9	0.170	4.3	9.00	SST	CG	N
0.843	21.41	MM-55	2.03	51.6	.603	15.3	93	16	.62	16	58	257	1.14	29.0	0.120	3.0	9.50	SST	CG	N
0.843	21.41	S-66	2.06	52.4	.603	15.3	112	20	.52	13	58	257	.99	25.1	0.120	3.0	8.25	SST	CG	N
0.843	21.41	11949	2.09	53.2	.517	13.1	409	72	.31	8.0	128	571	1.47	37.3	0.163	4.1	9.00	SST	CG	N
0.843	21.41	10239	2.19	55.6	.661	16.8	66	12	.44	11	29	130	.50	12.7	0.091	2.3	5.50	SPR	CG	Z
0.843	21.41	S-3258	2.25	57.2	.703	17.9	11	1.9	1.2	30	13	58	.56	14.2	0.070	1.8	8.00	SST	CG	N
0.843	21.41	11781	2.28	57.9	.525	13.3	364	64	.33	8.4	120	532	1.43	36.3	0.159	4.0	9.00	SST	CG	N
0.843	21.41	3501	2.44	61.9	.699	17.8	12	2.1	1.7	44	21	92	.72	18.3	0.072	1.8	9.00	MW	C	Z
0.843	21.41	11185	2.47	62.7	.633	16.1	62	11	.71	18	44	197	.95	24.0	0.105	2.7	9.00	HD	CG	Z
0.843	21.41	2842	2.50	63.5	.709	18.0	7.1	1.2	1.8	45	13	56	.72	18.3	0.067	1.7	10.8	HD	CG	Z
0.843	21.41	B10-9	2.50	63.5	.697	17.7	12	2.2	1.3	33	16	70	.68	17.2	0.073	1.9	9.25	SPR	CG	BO
0.843	21.41	3266	2.75	69.9	.633	16.1	51	9.0	.87	22	44	197	1.10	28.0	0.105	2.7	10.5	SPR	CG	Z
0.843	21.41	11902	2.81	71.4	.579	14.7	110	19	.73	19	81	361	1.72	43.6	0.132	3.4	13.0	SPR	CG	N
0.843	21.41	S-201	3.00	76.2	.717	18.2	5.2	.91	2.0	50	10	45	.69	17.6	0.063	1.6	10.0	SST	C	N
0.843	21.41	3388	3.00	76.2	.673	17.1	16	2.7	1.6	40	25	110	1.11	28.1	0.085	2.2	13.0	SPR	CG	Z
0.843	21.41	B17-191	3.00	76.2	.589	15.0	72	13	.94	24	68	303	1.84	46.8	0.127	3.2	14.5	SST	CG	N
0.843	21.41	12246	3.25	82.6	.731	18.6	3.9	.68	2.0	50	7.6	34	.53	13.5	0.056	1.4	9.50	SPR	CG	Z
0.843	21.41	1567	3.25	82.6	.699	17.8	9.4	1.6	1.6	41	15	68	.86	21.9	0.072	1.8	11.0	SPR	C	Z
0.843	21.41	S-1631	3.28	83.3	.649	16.5	26	4.5	1.3	32	33	145	1.21	30.8	0.097	2.5	12.5	SST	CG	N
0.843	21.41	11350	3.50	88.9	.709	18.0	5.5	.96	2.2	56	12	54	.80	20.4	0.067	1.7	12.0	SST	CG	N
0.843	21.41	12511	3.67	93.3	.727	18.5	4.1	.71	2.9	73	12	52	.60	15.1	0.058	1.5	10.3	MW	CG	T1
0.843	21.41	S-1136	3.75	95.3	.659	16.7	14	2.5	2.0	50	28	124	1.56	39.7	0.092	2.3	17.0	SST	CG	N
0.843	21.41	12101	4.56	115.9	.737	18.7	.85	.15	3.1	80	2.7	12	1.43	36.3	0.053	1.3	26.0	SST	C	N
0.843	21.41	10979	4.66	118.3	.593	15.1	49	8.5	1.5	37	71	317	2.69	68.3	0.125	3.2	21.5	HD	CG	Z
0.843	21.41	10541	4.69	119.0	.583	14.8	58	10	1.3	34	78	345	2.80	71.0	0.130	3.3	21.5	SPR	CG	Z
0.843	21.41	2752	4.88	123.8	.683	17.3	4.7	.82	2.5	62	12	51	2.42	61.5	0.080	2.0	30.3	HD	CG	Z
0.843	21.41	11967	4.91	124.6	.663	16.8	9.2	1.6	2.6	65	24	105	2.34	59.4	0.090	2.3	26.0	SPR	CG	Z
0.843	21.41	3131	5.13	130.2	.627	15.9	27	4.8	1.8	45	48	214	2.16	54.9	0.108	2.7	20.0	SPR	CG	Z
0.843	21.41	S-3212	7.13	181.0	.701	17.8	3.2	.56	4.3	108	14	61	1.70	43.3	0.071	1.8	24.0	SST	CG	N
0.843	21.41	3405	11.0	279.4	.679	17.2	4.1	.72	5.5	138	22	99	3.12	79.1	0.082	2.1	38.0	SPR	CG	Z
0.850	21.59	72136	.75	19.1	.750	19.1	13	2.3	.58	15	7.5	33	.17	4.3	0.050	1.3	3.38	MW	CG	N
0.850	21.59	72136S	.75	19.1	.750	19.1	11	1.9	.46	12	5.1	23	.17	4.3	0.050	1.3	3.38	SST	CG	N
0.850	21.59	72146	.75	19.1	.740	18.8	18	3.2	.55	14	9.9	44	.19	4.9	0.055	1.4	3.50	MW	CG	N
0.850	21.59	72146S	.75	19.1	.740	18.8	15	2.7	.44	11	6.7	30	.19	4.9	0.055	1.4	3.50	SST	CG	N
0.850	21.59	72162	.75	19.1	.716	18.2	34	6.0	.50	13	17	76	.25	6.4	0.067	1.7	3.75	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.850	21.59	72162S	.75	19.1	.716	18.2	29	5.1	.42	11	12	54	.25	6.4	0.067	1.7	3.75	SST	CG	N
0.850	21.59	72172	.75	19.1	.714	18.1	36	6.3	.50	13	18	79	.26	6.5	0.068	1.7	3.75	MW	CG	N
0.850	21.59	72172S	.75	19.1	.714	18.1	31	5.3	.41	11	13	56	.26	6.5	0.068	1.7	3.75	SST	CG	N
0.850	21.59	72210	.75	19.1	.690	17.5	67	12	.43	11	29	128	.31	7.9	0.080	2.0	3.88	MW	CG	N
0.850	21.59	72210S	.75	19.1	.690	17.5	57	9.9	.34	8.6	19	86	.31	7.9	0.080	2.0	3.88	SST	CG	N
0.850	21.59	72233	.75	19.1	.688	17.5	68	12	.43	11	29	128	.32	8.2	0.081	2.1	4.00	MW	CG	N
0.850	21.59	72233S	.75	19.1	.688	17.5	58	10	.35	8.8	20	89	.32	8.2	0.081	2.1	4.00	SST	CG	N
0.850	21.59	72246	.75	19.1	.680	17.3	84	15	.41	10	34	153	.34	8.6	0.085	2.2	4.00	MW	CG	N
0.850	21.59	72246S	.75	19.1	.680	17.3	71	12	.32	8.2	23	103	.34	8.6	0.085	2.2	4.00	SST	CG	N
0.850	21.59	72137	.88	22.4	.750	19.1	11	1.9	.69	17	7.5	33	.18	4.6	0.050	1.3	3.63	MW	CG	N
0.850	21.59	72137S	.88	22.4	.750	19.1	9.2	1.6	.55	14	5.1	23	.18	4.6	0.050	1.3	3.63	SST	CG	N
0.850	21.59	72147	.88	22.4	.740	18.8	15	2.6	.66	17	9.9	44	.21	5.2	0.055	1.4	3.75	MW	CG	N
0.850	21.59	72147S	.88	22.4	.740	18.8	13	2.2	.52	13	6.7	30	.21	5.2	0.055	1.4	3.75	SST	CG	N
0.850	21.59	72163	.88	22.4	.716	18.2	28	5.0	.60	15	17	76	.28	7.0	0.067	1.7	4.13	MW	CG	N
0.850	21.59	72163S	.88	22.4	.716	18.2	24	4.2	.50	13	12	54	.28	7.0	0.067	1.7	4.13	SST	CG	N
0.850	21.59	72173	.88	22.4	.714	18.1	30	5.2	.60	15	18	79	.28	7.1	0.068	1.7	4.13	MW	CG	N
0.850	21.59	72173S	.88	22.4	.714	18.1	25	4.4	.50	13	13	56	.28	7.1	0.068	1.7	4.13	SST	CG	N
0.850	21.59	72186	.88	22.4	.706	17.9	41	7.1	.52	13	21	94	.29	7.3	0.072	1.8	4.00	MW	CG	N
0.850	21.59	72186S	.88	22.4	.706	17.9	35	6.0	.41	10	14	63	.29	7.3	0.072	1.8	4.00	SST	CG	N
0.850	21.59	72195	.88	22.4	.702	17.8	40	7.0	.57	14	23	101	.31	8.0	0.074	1.9	4.25	MW	CG	N
0.850	21.59	72195S	.88	22.4	.702	17.8	34	6.0	.45	11	15	68	.31	8.0	0.074	1.9	4.25	SST	CG	N
0.850	21.59	72212	.88	22.4	.690	17.5	55	9.6	.52	13	29	128	.35	8.9	0.080	2.0	4.38	MW	CG	N
0.850	21.59	72212S	.88	22.4	.690	17.5	47	8.2	.41	10	19	86	.35	8.9	0.080	2.0	4.38	SST	CG	N
0.850	21.59	72234	.88	22.4	.688	17.5	57	9.9	.53	13	30	132	.35	9.0	0.081	2.1	4.38	MW	CG	N
0.850	21.59	72234S	.88	22.4	.688	17.5	48	8.4	.42	11	20	89	.35	9.0	0.081	2.1	4.38	SST	CG	N
0.850	21.59	72247	.88	22.4	.680	17.3	67	12	.50	13	33	148	.38	9.7	0.085	2.2	4.50	MW	CG	N
0.850	21.59	72247S	.88	22.4	.680	17.3	57	10	.41	10	23	103	.38	9.7	0.085	2.2	4.50	SST	CG	N
0.850	21.59	72262	.88	22.4	.668	17.0	90	16	.45	11	40	180	.41	10.4	0.091	2.3	4.50	MW	CG	N
0.850	21.59	72262S	.88	22.4	.668	17.0	76	13	.35	8.9	27	119	.41	10.4	0.091	2.3	4.50	SST	CG	N
0.850	21.59	72276	.88	22.4	.666	16.9	90	16	.45	12	41	182	.43	10.8	0.092	2.3	4.63	MW	CG	N
0.850	21.59	72276S	.88	22.4	.666	16.9	77	13	.36	9.2	28	123	.43	10.8	0.092	2.3	4.63	SST	CG	N
0.850	21.59	72138	1.00	25.4	.750	19.1	9.4	1.6	.80	20	7.5	33	.19	4.9	0.050	1.3	3.88	MW	CG	N
0.850	21.59	72138S	1.00	25.4	.750	19.1	8.0	1.4	.64	16	5.1	23	.19	4.9	0.050	1.3	3.88	SST	CG	N
0.850	21.59	72148	1.00	25.4	.740	18.8	13	2.3	.77	19	9.9	44	.22	5.6	0.055	1.4	4.00	MW	CG	N
0.850	21.59	72148S	1.00	25.4	.740	18.8	11	1.9	.61	15	6.7	30	.22	5.6	0.055	1.4	4.00	SST	CG	N
0.850	21.59	72164	1.00	25.4	.716	18.2	24	4.3	.70	18	17	76	.30	7.7	0.067	1.7	4.50	MW	CG	N
0.850	21.59	72164S	1.00	25.4	.716	18.2	21	3.6	.58	15	12	54	.30	7.7	0.067	1.7	4.50	SST	CG	N
0.850	21.59	72174	1.00	25.4	.714	18.1	26	4.5	.69	18	18	79	.31	7.8	0.068	1.7	4.50	MW	CG	N
0.850	21.59	72174S	1.00	25.4	.714	18.1	22	3.8	.58	15	13	56	.31	7.8	0.068	1.7	4.50	SST	CG	N
0.850	21.59	72187	1.00	25.4	.706	17.9	35	6.1	.60	15	21	94	.32	8.0	0.072	1.8	4.38	MW	CG	N
0.850	21.59	72187S	1.00	25.4	.706	17.9	30	5.2	.48	12	14	63	.32	8.0	0.072	1.8	4.38	SST	CG	N
0.850	21.59	72196	1.00	25.4	.702	17.8	34	6.0	.65	16	22	99	.35	8.9	0.074	1.9	4.75	MW	CG	N
0.850	21.59	72196S	1.00	25.4	.702	17.8	29	5.1	.53	13	15	68	.35	8.9	0.074	1.9	4.75	SST	CG	N
0.850	21.59	72214	1.00	25.4	.690	17.5	47	8.2	.62	16	29	128	.38	9.7	0.080	2.0	4.75	MW	CG	N
0.850	21.59	72214S	1.00	25.4	.690	17.5	40	7.0	.49	12	19	86	.38	9.7	0.080	2.0	4.75	SST	CG	N
0.850	21.59	72235	1.00	25.4	.688	17.5	48	8.4	.61	15	29	129	.39	10.0	0.081	2.1	4.88	MW	CG	N
0.850	21.59	72235S	1.00	25.4	.688	17.5	41	7.1	.49	12	20	89	.39	10.0	0.081	2.1	4.88	SST	CG	N
0.850	21.59	72248	1.00	25.4	.680	17.3	59	10	.58	15	34	153	.41	10.5	0.085	2.2	4.88	MW	CG	N
0.850	21.59	72248S	1.00	25.4	.680	17.3	50	8.8	.46	12	23	103	.41	10.5	0.085	2.2	4.88	SST	CG	N
0.850	21.59	72264	1.00	25.4	.668	17.0	76	13	.53	14	40	180	.46	11.6	0.091	2.3	5.00	MW	CG	N
0.850	21.59	72264S	1.00	25.4	.668	17.0	65	11	.41	11	27	119	.46	11.6	0.091	2.3	5.00	SST	CG	N
0.850	21.59	72277	1.00	25.4	.666	16.9	77	13	.53	13	41	181	.47	12.0	0.092	2.3	5.13	MW	CG	N
0.850	21.59	72277S	1.00	25.4	.666	16.9	65	11	.42	11	28	123	.47	12.0	0.092	2.3	5.13	SST	CG	N
0.850	21.59	72287	1.00	25.4	.654	16.6	100	18	.50	13	50	222	.50	12.8	0.098	2.5	5.13	MW	CG	N
0.850	21.59	72287S	1.00	25.4	.654	16.6	85	15	.39	9.9	33	148	.50	12.8	0.098	2.5	5.13	SST	CG	N
0.850	21.59	72297	1.00	25.4	.650	16.5	125	22	.43	11	53	237	.48	12.1	0.100	2.5	4.75	MW	CG	N
0.850	21.59	72297S	1.00	25.4	.650	16.5	106	19	.33	8.5	35	157	.48	12.1	0.100	2.5	4.75	SST	CG	N
0.850	21.59	72308	1.00	25.4	.640	16.3	135	24	.46	12	62	274	.54	13.7	0.105	2.7	5.13	MW	CG	N
0.850	21.59	72308S	1.00	25.4	.640	16.3	115	20	.36	9.0	41	181	.54	13.7	0.105	2.7	5.13	SST	CG	N
0.850	21.59	72139	1.25	31.8	.750	19.1	7.3	1.3	1.0	26	7.5	33	.22	5.6	0.050	1.3	4.38	MW	CG	N
0.850	21.59	72139S	1.25	31.8	.750	19.1	6.2	1.1	.81	21	5.1	23	.22	5.6	0.050	1.3	4.38	SST	CG	N
0.850	21.59	72149	1.25	31.8	.740	18.8	10	1.8	.98	25	9.9	44	.25	6.5	0.055	1.4	4.63	MW	CG	N
0.850	21.59	72149S	1.25	31.8	.740	18.8	8.6	1.5	.78	20	6.7	30	.25	6.5	0.055	1.4	4.63	SST	CG	N
0.850	21.59	72165	1.25	31.8	.716	18.2	19	3.3	.90	23	17	75	.35	8.9	0.067	1.7	5.25	MW	CG	N
0.850	21.59	72165S	1.25	31.8	.716	18.2	16	2.8	.75	19	12	54	.35	8.9	0.067	1.7	5.25	SST	CG	N
0.850	21.59	72175	1.25	31.8	.714	18.1	20	3.5	.89	23	18	79	.36	9.1	0.068	1.7	5.25	MW	CG	N
0.850	21.59	72175S	1.25	31.8	.714	18.1	17	2.9	.75	19	13	56	.36	9.1	0.068	1.7	5.25	SST	CG	N
0.850	21.59	72188	1.25	31.8	.706	17.9	27	4.7	.79	20	21	94	.36	9.1	0.072	1.8	5.00	MW	CG	N
0.850	21.59	72188S	1.25	31.8	.706	17.9	23	4.0	.62	16	14	63	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.850	21.59	72197	1.25	31.8	.702	17.8	27	4.6	.84	21	22	99	.41	10.3	0.074	1.9	5.50	MW	CG	N
0.850	21.59	72197S	1.25	31.8	.702	17.8	23	3.9	.68	17	15	68	.41	10.3	0.074	1.9	5.50	SST	CG	N
0.850	21.59	72216	1.25	31.8	.690	17.5	36	6.3	.80	20	29	128	.45	11.4	0.080	2.0	5.63	MW	CG	N
0.850	21.59	72216S	1.25	31.8	.690	17.5	31	5.4	.63	16	19	86	.45	11.4	0.080	2.0	5.63	SST	CG	N
0.850	21.59	72236	1.25	31.8	.688	17.5	37	6.5	.79	20	30	132	.46	11.6	0.081	2.1	5.63	MW	CG	N
0.850	21.59	72236S	1.25	31.8	.688	17.5	32	5.6	.63	16	20	89	.46	11.6	0.081	2.1	5.63	SST	CG	N
0.850	21.59	72249	1.25	31.8	.680	17.3	45	7.8	.76	19	34	152	.49	12.4	0.085	2.2	5.75	MW	CG	N
0.850	21.59	72249S	1.25	31.8	.680	17.3	38	6.7	.61	15	23	103	.49	12.4	0.085	2.2	5.75	SST	CG	N
0.850	21.59	72266	1.25	31.8	.668	17.0	58	10	.69	18	40	180	.53	13.6	0.091	2.3	5.88	MW	CG	N
0.850	21.59	72266S	1.25	31.8	.668	17.0	49	8.7	.54	14	27	119	.53	13.6	0.091	2.3	5.88	SST	CG	N
0.850	21.59	72278	1.25	31.8	.666	16.9	59	10	.70	18	41	183	.55	14.0	0.092	2.3	6.00	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.850	21.59	72278S	1.25	31.8	.666	16.9	50	8.8	.55	14	28	123	.55	14.0	0.092	2.3	6.00	SST	CG	N
0.850	21.59	72288	1.25	31.8	.654	16.6	77	13	.65	17	50	222	.60	15.2	0.098	2.5	6.13	MW	CG	N
0.850	21.59	72288S	1.25	31.8	.654	16.6	65	11	.51	13	33	148	.60	15.2	0.098	2.5	6.13	SST	CG	N
0.850	21.59	72298	1.25	31.8	.650	16.5	95	17	.56	14	53	237	.56	14.3	0.100	2.5	5.63	MW	CG	N
0.850	21.59	72298S	1.25	31.8	.650	16.5	81	14	.44	11	35	157	.56	14.3	0.100	2.5	5.63	SST	CG	N
0.850	21.59	72310	1.25	31.8	.640	16.3	103	18	.60	15	62	274	.64	16.3	0.105	2.7	6.13	MW	CG	N
0.850	21.59	72310S	1.25	31.8	.640	16.3	87	15	.47	12	41	181	.64	16.3	0.105	2.7	6.13	SST	CG	N
0.850	21.59	72237	1.38	35.1	.688	17.5	34	6.0	.88	22	30	133	.49	12.3	0.081	2.1	6.00	MW	CG	N
0.850	21.59	72237S	1.38	35.1	.688	17.5	29	5.1	.69	18	20	89	.49	12.3	0.081	2.1	6.00	SST	CG	N
0.850	21.59	72250	1.38	35.1	.680	17.3	42	7.4	.82	21	34	153	.51	13.0	0.085	2.2	6.00	MW	CG	N
0.850	21.59	72250S	1.38	35.1	.680	17.3	36	6.3	.65	16	23	103	.51	13.0	0.085	2.2	6.00	SST	CG	N
0.850	21.59	72140	1.50	38.1	.750	19.1	6.0	1.1	1.2	32	7.5	33	.24	6.2	0.050	1.3	4.88	MW	CG	N
0.850	21.59	72140S	1.50	38.1	.750	19.1	5.1	.90	.99	25	5.1	23	.24	6.2	0.050	1.3	4.88	SST	CG	N
0.850	21.59	72150	1.50	38.1	.740	18.8	8.3	1.5	1.2	30	9.9	44	.28	7.2	0.055	1.4	5.13	MW	CG	N
0.850	21.59	72150S	1.50	38.1	.740	18.8	7.1	1.2	.95	24	6.7	30	.28	7.2	0.055	1.4	5.13	SST	CG	N
0.850	21.59	72166	1.50	38.1	.716	18.2	15	2.7	1.1	28	17	76	.39	10.0	0.067	1.7	5.88	MW	CG	N
0.850	21.59	72166S	1.50	38.1	.716	18.2	13	2.3	.92	23	12	54	.39	10.0	0.067	1.7	5.88	SST	CG	N
0.850	21.59	72176	1.50	38.1	.714	18.1	16	2.8	1.1	28	18	78	.41	10.4	0.068	1.7	6.00	MW	CG	N
0.850	21.59	72176S	1.50	38.1	.714	18.1	14	2.4	.92	23	13	56	.41	10.4	0.068	1.7	6.00	SST	CG	N
0.850	21.59	72189	1.50	38.1	.706	17.9	22	3.8	.97	25	21	94	.41	10.5	0.072	1.8	5.75	MW	CG	N
0.850	21.59	72189S	1.50	38.1	.706	17.9	19	3.2	.76	19	14	63	.41	10.5	0.072	1.8	5.75	SST	CG	N
0.850	21.59	72198	1.50	38.1	.702	17.8	22	3.8	1.0	26	22	100	.46	11.7	0.074	1.9	6.25	MW	CG	N
0.850	21.59	72198S	1.50	38.1	.702	17.8	18	3.2	.83	21	15	68	.46	11.7	0.074	1.9	6.25	SST	CG	N
0.850	21.59	72218	1.50	38.1	.690	17.5	29	5.1	.98	25	29	128	.51	13.0	0.080	2.0	6.38	MW	CG	N
0.850	21.59	72218S	1.50	38.1	.690	17.5	25	4.4	.77	20	19	86	.51	13.0	0.080	2.0	6.38	SST	CG	N
0.850	21.59	72238	1.50	38.1	.688	17.5	30	5.3	.97	25	30	131	.53	13.4	0.081	2.1	6.50	MW	CG	N
0.850	21.59	72238S	1.50	38.1	.688	17.5	26	4.5	.78	20	20	89	.53	13.4	0.081	2.1	6.50	SST	CG	N
0.850	21.59	72251	1.50	38.1	.680	17.3	37	6.4	.94	24	34	153	.56	14.3	0.085	2.2	6.63	MW	CG	N
0.850	21.59	72251S	1.50	38.1	.680	17.3	31	5.5	.74	19	23	103	.56	14.3	0.085	2.2	6.63	SST	CG	N
0.850	21.59	72267	1.50	38.1	.668	17.0	49	8.6	.83	21	40	180	.60	15.3	0.091	2.3	6.63	MW	CG	N
0.850	21.59	72267S	1.50	38.1	.668	17.0	42	7.3	.64	16	27	119	.60	15.3	0.091	2.3	6.63	SST	CG	N
0.850	21.59	72279	1.50	38.1	.666	16.9	48	8.4	.86	22	41	182	.64	16.4	0.092	2.3	7.00	MW	CG	N
0.850	21.59	72279S	1.50	38.1	.666	16.9	41	7.1	.68	17	28	123	.64	16.4	0.092	2.3	7.00	SST	CG	N
0.850	21.59	72289	1.50	38.1	.654	16.6	63	11	.80	20	50	224	.69	17.4	0.098	2.5	7.00	MW	CG	N
0.850	21.59	72289S	1.50	38.1	.654	16.6	53	9.4	.62	16	33	148	.69	17.4	0.098	2.5	7.00	SST	CG	N
0.850	21.59	72299	1.50	38.1	.650	16.5	77	13	.69	18	53	237	.65	16.5	0.100	2.5	6.50	MW	CG	N
0.850	21.59	72299S	1.50	38.1	.650	16.5	65	11	.54	14	35	157	.65	16.5	0.100	2.5	6.50	SST	CG	N
0.850	21.59	72312	1.50	38.1	.640	16.3	83	14	.74	19	62	274	.75	19.0	0.105	2.7	7.13	MW	CG	N
0.850	21.59	72312S	1.50	38.1	.640	16.3	70	12	.58	15	41	181	.75	19.0	0.105	2.7	7.13	SST	CG	N
0.850	21.59	72152	1.75	44.5	.740	18.8	7.1	1.2	1.4	36	9.9	44	.32	8.0	0.055	1.4	5.75	MW	CG	N
0.850	21.59	72152S	1.75	44.5	.740	18.8	6.0	1.1	1.1	28	6.7	30	.32	8.0	0.055	1.4	5.75	SST	CG	N
0.850	21.59	72177	1.75	44.5	.714	18.1	14	2.4	1.3	33	18	78	.46	11.7	0.068	1.7	6.75	MW	CG	N
0.850	21.59	72177S	1.75	44.5	.714	18.1	12	2.0	1.1	28	13	56	.46	11.7	0.068	1.7	6.75	SST	CG	N
0.850	21.59	72190	1.75	44.5	.706	17.9	18	3.2	1.1	29	21	94	.47	11.9	0.072	1.8	6.50	MW	CG	N
0.850	21.59	72190S	1.75	44.5	.706	17.9	16	2.7	.91	23	14	63	.47	11.9	0.072	1.8	6.50	SST	CG	N
0.850	21.59	72200	1.75	44.5	.702	17.8	19	3.3	1.2	31	23	102	.51	12.9	0.074	1.9	6.88	MW	CG	N
0.850	21.59	72200S	1.75	44.5	.702	17.8	16	2.8	.95	24	15	68	.51	12.9	0.074	1.9	6.88	SST	CG	N
0.850	21.59	72220	1.75	44.5	.690	17.5	25	4.3	1.2	30	29	128	.58	14.7	0.080	2.0	7.25	MW	CG	N
0.850	21.59	72220S	1.75	44.5	.690	17.5	21	3.7	.92	23	19	86	.58	14.7	0.080	2.0	7.25	SST	CG	N
0.850	21.59	72239	1.75	44.5	.688	17.5	26	4.5	1.2	29	29	131	.60	15.2	0.081	2.1	7.38	MW	CG	N
0.850	21.59	72239S	1.75	44.5	.688	17.5	22	3.8	.92	23	20	89	.60	15.2	0.081	2.1	7.38	SST	CG	N
0.850	21.59	72252	1.75	44.5	.680	17.3	31	5.4	1.1	28	34	153	.63	15.9	0.085	2.2	7.38	MW	CG	N
0.850	21.59	72252S	1.75	44.5	.680	17.3	26	4.6	.88	22	23	103	.63	15.9	0.085	2.2	7.38	SST	CG	N
0.850	21.59	72268	1.75	44.5	.668	17.0	41	7.2	.99	25	40	180	.68	17.3	0.091	2.3	7.50	MW	CG	N
0.850	21.59	72268S	1.75	44.5	.668	17.0	35	6.1	.77	20	27	119	.68	17.3	0.091	2.3	7.50	SST	CG	N
0.850	21.59	72280	1.75	44.5	.666	16.9	40	7.0	1.0	26	41	182	.72	18.4	0.092	2.3	7.88	MW	CG	N
0.850	21.59	72280S	1.75	44.5	.666	16.9	34	6.0	.81	21	28	123	.72	18.4	0.092	2.3	7.88	SST	CG	N
0.850	21.59	72290	1.75	44.5	.654	16.6	53	9.2	.96	24	50	224	.77	19.6	0.098	2.5	7.88	MW	CG	N
0.850	21.59	72290S	1.75	44.5	.654	16.6	45	7.8	.75	19	33	148	.77	19.6	0.098	2.5	7.88	SST	CG	N
0.850	21.59	72300	1.75	44.5	.650	16.5	64	11	.83	21	53	237	.73	18.4	0.100	2.5	7.25	MW	CG	N
0.850	21.59	72300S	1.75	44.5	.650	16.5	55	9.6	.65	16	35	157	.73	18.4	0.100	2.5	7.25	SST	CG	N
0.850	21.59	72314	1.75	44.5	.640	16.3	69	12	.89	23	62	274	.85	21.7	0.105	2.7	8.13	MW	CG	N
0.850	21.59	72314S	1.75	44.5	.640	16.3	59	10	.69	18	41	181	.85	21.7	0.105	2.7	8.13	SST	CG	N
0.850	21.59	72141	2.00	50.8	.750	19.1	4.4	.78	1.7	43	7.5	33	.30	7.6	0.050	1.3	6.00	MW	CG	N
0.850	21.59	72141S	2.00	50.8	.750	19.1	3.8	.66	1.3	34	5.1	23	.30	7.6	0.050	1.3	6.00	SST	CG	N
0.850	21.59	72153	2.00	50.8	.740	18.8	6.1	1.1	1.6	41	9.9	44	.34	8.7	0.055	1.4	6.25	MW	CG	N
0.850	21.59	72153S	2.00	50.8	.740	18.8	5.2	.91	1.3	33	6.7	30	.34	8.7	0.055	1.4	6.25	SST	CG	N
0.850	21.59	72167	2.00	50.8	.716	18.2	11	2.0	1.5	38	17	75	.49	12.6	0.067	1.7	7.38	MW	CG	N
0.850	21.59	72167S	2.00	50.8	.716	18.2	9.6	1.7	1.3	32	12	54	.49	12.6	0.067	1.7	7.38	SST	CG	N
0.850	21.59	72178	2.00	50.8	.714	18.1	12	2.1	1.5	38	18	78	.51	13.0	0.068	1.7	7.50	MW	CG	N
0.850	21.59	72178S	2.00	50.8	.714	18.1	10	1.8	1.3	32	13	56	.51	13.0	0.068	1.7	7.50	SST	CG	N
0.850	21.59	72191	2.00	50.8	.706	17.9	16	2.8	1.3	33	21	94	.51	13.0	0.072	1.8	7.13	MW	CG	N
0.850	21.59	72191S	2.00	50.8	.706	17.9	14	2.4	1.0	26	14	63	.51	13.0	0.072	1.8	7.13	SST	CG	N
0.850	21.59	72201	2.00	50.8	.702	17.8	16	2.8	1.4	36	22	100	.58	14.8	0.074	1.9	7.88	MW	CG	N
0.850	21.59	72201S	2.00	50.8	.702	17.8	13	2.4	1.1	29	15	68	.58	14.8	0.074	1.9	7.88	SST	CG	N
0.850	21.59	72222	2.00	50.8	.690	17.5	21	3.7	1.3	34	29	128	.64	16.3	0.080	2.0	8.00	MW	CG	N
0.850	21.59	72222S	2.00	50.8	.690	17.5	18	3.2	1.1	27	19	86	.64	16.3	0.080	2.0	8.00	SST	CG	N
0.850	21.59	72240	2.00	50.8	.688	17.5	22	3.8	1.3	34	29	129	.67	17.0	0.081	2.1	8.25	MW	CG	N
0.850	21.59	72240S	2.00	50.8	.688	17.5	19	3.2	1.1	27	20	89	.67	17.0	0.081	2.1	8.25	SST	CG	N
0.850	21.59	72253	2.00	50.8	.680	17.3	26	4.6	1.3	33	34	151	.71	18.1	0.085	2.2	8.38	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.850	21.59	72253S	2.00	50.8	.680	17.3	22	3.9	1.0	26	23	103	.71	18.1	0.085	2.2	8.38	SST	CG	N
0.850	21.59	72269	2.00	50.8	.668	17.0	35	6.1	1.2	29	40	180	.77	19.6	0.091	2.3	8.50	MW	CG	N
0.850	21.59	72269S	2.00	50.8	.668	17.0	30	5.2	.90	23	27	119	.77	19.6	0.091	2.3	8.50	SST	CG	N
0.850	21.59	72281	2.00	50.8	.666	16.9	35	6.0	1.2	30	41	182	.82	20.7	0.092	2.3	8.88	MW	CG	N
0.850	21.59	72281S	2.00	50.8	.666	16.9	29	5.1	.94	24	28	123	.82	20.7	0.092	2.3	8.88	SST	CG	N
0.850	21.59	72291	2.00	50.8	.654	16.6	45	7.9	1.1	28	50	224	.87	22.1	0.098	2.5	8.88	MW	CG	N
0.850	21.59	72291S	2.00	50.8	.654	16.6	38	6.7	.87	22	33	148	.87	22.1	0.098	2.5	8.88	SST	CG	N
0.850	21.59	72301	2.00	50.8	.650	16.5	55	9.7	.96	24	53	237	.81	20.6	0.100	2.5	8.13	MW	CG	N
0.850	21.59	72301S	2.00	50.8	.650	16.5	47	8.2	.75	19	35	157	.81	20.6	0.100	2.5	8.13	SST	CG	N
0.850	21.59	72316	2.00	50.8	.640	16.3	60	10	1.0	26	62	274	.96	24.3	0.105	2.7	9.13	MW	CG	N
0.850	21.59	72316S	2.00	50.8	.640	16.3	51	8.9	.80	20	41	181	.96	24.3	0.105	2.7	9.13	SST	CG	N
0.850	21.59	72155	2.25	57.2	.740	18.8	5.4	.95	1.8	47	9.9	44	.38	9.6	0.055	1.4	6.88	MW	CG	N
0.850	21.59	72155S	2.25	57.2	.740	18.8	4.6	.80	1.5	37	6.7	30	.38	9.6	0.055	1.4	6.88	SST	CG	N
0.850	21.59	72179	2.25	57.2	.714	18.1	10	1.8	1.7	43	18	79	.55	14.0	0.068	1.7	8.13	MW	CG	N
0.850	21.59	72179S	2.25	57.2	.714	18.1	8.8	1.5	1.4	36	13	56	.55	14.0	0.068	1.7	8.13	SST	CG	N
0.850	21.59	72203	2.25	57.2	.702	17.8	14	2.5	1.6	40	23	102	.62	15.7	0.074	1.9	8.38	MW	CG	N
0.850	21.59	72203S	2.25	57.2	.702	17.8	12	2.1	1.3	32	15	68	.62	15.7	0.074	1.9	8.38	SST	CG	N
0.850	21.59	72224	2.25	57.2	.690	17.5	19	3.3	1.5	39	29	128	.71	18.0	0.080	2.0	8.88	MW	CG	N
0.850	21.59	72224S	2.25	57.2	.690	17.5	16	2.8	1.2	31	19	86	.71	18.0	0.080	2.0	8.88	SST	CG	N
0.850	21.59	72241	2.25	57.2	.688	17.5	19	3.4	1.5	39	29	131	.73	18.5	0.081	2.1	9.00	MW	CG	N
0.850	21.59	72241S	2.25	57.2	.688	17.5	16	2.9	1.2	31	20	89	.73	18.5	0.081	2.1	9.00	SST	CG	N
0.850	21.59	72254	2.25	57.2	.680	17.3	23	4.1	1.5	37	34	153	.78	19.7	0.085	2.2	9.13	MW	CG	N
0.850	21.59	72254S	2.25	57.2	.680	17.3	20	3.5	1.2	30	23	103	.78	19.7	0.085	2.2	9.13	SST	CG	N
0.850	21.59	72270	2.25	57.2	.668	17.0	31	5.4	1.3	33	40	180	.84	21.4	0.091	2.3	9.25	MW	CG	N
0.850	21.59	72270S	2.25	57.2	.668	17.0	26	4.6	1.0	26	27	119	.84	21.4	0.091	2.3	9.25	SST	CG	N
0.850	21.59	72282	2.25	57.2	.666	16.9	30	5.3	1.4	34	41	183	.90	22.8	0.092	2.3	9.75	MW	CG	N
0.850	21.59	72282S	2.25	57.2	.666	16.9	26	4.5	1.1	27	28	123	.90	22.8	0.092	2.3	9.75	SST	CG	N
0.850	21.59	72292	2.25	57.2	.654	16.6	39	6.9	1.3	32	50	224	.97	24.6	0.098	2.5	9.88	MW	CG	N
0.850	21.59	72292S	2.25	57.2	.654	16.6	33	5.8	1.0	25	33	148	.97	24.6	0.098	2.5	9.88	SST	CG	N
0.850	21.59	72302	2.25	57.2	.650	16.5	49	8.5	1.1	28	53	237	.90	22.9	0.100	2.5	9.00	MW	CG	N
0.850	21.59	72302S	2.25	57.2	.650	16.5	41	7.2	.85	22	35	157	.90	22.9	0.100	2.5	9.00	SST	CG	N
0.850	21.59	72318	2.25	57.2	.640	16.3	52	9.2	1.2	30	62	274	1.06	27.0	0.105	2.7	10.1	MW	CG	N
0.850	21.59	72318S	2.25	57.2	.640	16.3	44	7.8	.92	23	41	181	1.06	27.0	0.105	2.7	10.1	SST	CG	N
0.850	21.59	72142	2.50	63.5	.750	19.1	3.5	.61	2.1	54	7.5	33	.35	8.9	0.050	1.3	7.00	MW	CG	N
0.850	21.59	72142S	2.50	63.5	.750	19.1	3.0	.52	1.7	43	5.1	23	.35	8.9	0.050	1.3	7.00	SST	CG	N
0.850	21.59	72156	2.50	63.5	.740	18.8	4.8	.85	2.1	52	9.9	44	.41	10.3	0.055	1.4	7.38	MW	CG	N
0.850	21.59	72156S	2.50	63.5	.740	18.8	4.1	.72	1.6	42	6.7	30	.41	10.3	0.055	1.4	7.38	SST	CG	N
0.850	21.59	72168	2.50	63.5	.716	18.2	8.9	1.6	1.9	49	17	76	.59	14.9	0.067	1.7	8.75	MW	CG	N
0.850	21.59	72168S	2.50	63.5	.716	18.2	7.6	1.3	1.6	41	12	54	.59	14.9	0.067	1.7	8.75	SST	CG	N
0.850	21.59	72180	2.50	63.5	.714	18.1	9.3	1.6	1.9	48	18	78	.60	15.3	0.068	1.7	8.88	MW	CG	N
0.850	21.59	72180S	2.50	63.5	.714	18.1	7.9	1.4	1.6	41	13	56	.60	15.3	0.068	1.7	8.88	SST	CG	N
0.850	21.59	72192	2.50	63.5	.706	17.9	12	2.2	1.7	43	21	94	.62	15.8	0.072	1.8	8.63	MW	CG	N
0.850	21.59	72192S	2.50	63.5	.706	17.9	11	1.9	1.3	34	14	63	.62	15.8	0.072	1.8	8.63	SST	CG	N
0.850	21.59	72204	2.50	63.5	.702	17.8	12	2.2	1.8	46	22	99	.70	17.9	0.074	1.9	9.50	MW	CG	N
0.850	21.59	72204S	2.50	63.5	.702	17.8	11	1.8	1.5	37	15	68	.70	17.9	0.074	1.9	9.50	SST	CG	N
0.850	21.59	72226	2.50	63.5	.690	17.5	17	2.9	1.7	44	29	128	.77	19.6	0.080	2.0	9.63	MW	CG	N
0.850	21.59	72226S	2.50	63.5	.690	17.5	14	2.5	1.4	34	19	86	.77	19.6	0.080	2.0	9.63	SST	CG	N
0.850	21.59	72242	2.50	63.5	.688	17.5	17	3.0	1.7	43	29	130	.80	20.3	0.081	2.1	9.88	MW	CG	N
0.850	21.59	72242S	2.50	63.5	.688	17.5	15	2.6	1.4	35	20	89	.80	20.3	0.081	2.1	9.88	SST	CG	N
0.850	21.59	72255	2.50	63.5	.680	17.3	21	3.7	1.7	42	34	153	.85	21.6	0.085	2.2	10.0	MW	CG	N
0.850	21.59	72255S	2.50	63.5	.680	17.3	18	3.1	1.3	33	23	103	.85	21.6	0.085	2.2	10.0	SST	CG	N
0.850	21.59	72271	2.50	63.5	.668	17.0	28	4.9	1.4	37	40	180	.91	23.1	0.091	2.3	10.0	MW	CG	N
0.850	21.59	72271S	2.50	63.5	.668	17.0	24	4.2	1.1	29	27	119	.91	23.1	0.091	2.3	10.0	SST	CG	N
0.850	21.59	72283	2.50	63.5	.666	16.9	27	4.7	1.5	38	41	182	.99	25.1	0.092	2.3	10.8	MW	CG	N
0.850	21.59	72283S	2.50	63.5	.666	16.9	23	4.0	1.2	31	28	123	.99	25.1	0.092	2.3	10.8	SST	CG	N
0.850	21.59	72293	2.50	63.5	.654	16.6	35	6.2	1.4	36	50	224	1.07	27.1	0.098	2.5	10.9	MW	CG	N
0.850	21.59	72293S	2.50	63.5	.654	16.6	30	5.2	1.1	28	33	148	1.07	27.1	0.098	2.5	10.9	SST	CG	N
0.850	21.59	72303	2.50	63.5	.650	16.5	43	7.6	1.2	31	53	237	.99	25.1	0.100	2.5	9.88	MW	CG	N
0.850	21.59	72303S	2.50	63.5	.650	16.5	37	6.5	.96	24	35	157	.99	25.1	0.100	2.5	9.88	SST	CG	N
0.850	21.59	72320	2.50	63.5	.640	16.3	47	8.2	1.3	34	62	274	1.17	29.7	0.105	2.7	11.1	MW	CG	N
0.850	21.59	72320S	2.50	63.5	.640	16.3	40	6.9	1.0	26	41	181	1.17	29.7	0.105	2.7	11.1	SST	CG	N
0.850	21.59	72158	2.75	69.9	.740	18.8	4.4	.77	2.3	57	9.9	44	.44	11.2	0.055	1.4	8.00	MW	CG	N
0.850	21.59	72158S	2.75	69.9	.740	18.8	3.7	.65	1.8	46	6.7	30	.44	11.2	0.055	1.4	8.00	SST	CG	N
0.850	21.59	72182	2.75	69.9	.714	18.1	8.7	1.5	2.1	54	18	82	.64	16.2	0.068	1.7	9.38	MW	CG	N
0.850	21.59	72182S	2.75	69.9	.714	18.1	7.4	1.3	1.7	43	13	56	.64	16.2	0.068	1.7	9.38	SST	CG	N
0.850	21.59	72206	2.75	69.9	.702	17.8	12	2.0	2.0	50	23	102	.74	18.8	0.074	1.9	10.0	MW	CG	N
0.850	21.59	72206S	2.75	69.9	.702	17.8	9.9	1.7	1.6	39	15	68	.74	18.8	0.074	1.9	10.0	SST	CG	N
0.850	21.59	72228	2.75	69.9	.690	17.5	15	2.7	1.9	48	29	128	.84	21.3	0.080	2.0	10.5	MW	CG	N
0.850	21.59	72228S	2.75	69.9	.690	17.5	13	2.3	1.5	38	19	86	.84	21.3	0.080	2.0	10.5	SST	CG	N
0.850	21.59	72243	2.75	69.9	.688	17.5	15	2.7	1.9	48	29	129	.87	22.1	0.081	2.1	10.8	MW	CG	N
0.850	21.59	72243S	2.75	69.9	.688	17.5	13	2.3	1.5	39	20	89	.87	22.1	0.081	2.1	10.8	SST	CG	N
0.850	21.59	72256	2.75	69.9	.680	17.3	19	3.3	1.8	46	34	153	.92	23.5	0.085	2.2	10.9	MW	CG	N
0.850	21.59	72256S	2.75	69.9	.680	17.3	16	2.8	1.4	36	23	103	.92	23.5	0.085	2.2	10.9	SST	CG	N
0.850	21.59	72272	2.75	69.9	.668	17.0	25	4.4	1.6	41	40	180	1.00	25.4	0.091	2.3	11.0	MW	CG	N
0.850	21.59	72272S	2.75	69.9	.668	17.0	21	3.7	1.3	32	27	119	1.00	25.4	0.091	2.3	11.0	SST	CG	N
0.850	21.59	72284	2.75	69.9	.666	16.9	24	4.3	1.7	42	41	181	1.08	27.5	0.092	2.3	11.8	MW	CG	N
0.850	21.59	72284S	2.75	69.9	.666	16.9	21	3.6	1.3	34	28	123	1.08	27.5	0.092	2.3	11.8	SST	CG	N
0.850	21.59	72294	2.75	69.9	.654	16.6	32	5.6	1.6	40	50	224	1.15	29.2	0.098	2.5	11.8	MW	CG	N
0.850	21.59	72294S	2.75	69.9	.654	16.6	27	4.7	1.2	31	33	148	1.15	29.2	0.098	2.5	11.8	SST	CG	N
0.850	21.59	72304	2.75	69.9	.650	16.5	39	6.9	1.4	35	53	237	1.08	27.3	0.100	2.5	10.8	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.850	21.59	72304S	2.75	69.9	.650	16.5	33	5.8	1.1	27	35	157	1.08	27.3	0.100	2.5	10.8	SST	CG	N
0.850	21.59	72322	2.75	69.9	.640	16.3	42	7.4	1.5	37	62	274	1.26	32.0	0.105	2.7	12.0	MW	CG	N
0.850	21.59	72322S	2.75	69.9	.640	16.3	36	6.3	1.1	29	41	181	1.26	32.0	0.105	2.7	12.0	SST	CG	N
0.850	21.59	72143	3.00	76.2	.750	19.1	2.9	.51	2.6	65	7.5	33	.40	10.2	0.050	1.3	8.00	MW	CG	N
0.850	21.59	72143S	3.00	76.2	.750	19.1	2.5	.43	2.0	52	5.1	23	.40	10.2	0.050	1.3	8.00	SST	CG	N
0.850	21.59	72159	3.00	76.2	.740	18.8	4.0	.70	2.5	63	9.9	44	.47	11.9	0.055	1.4	8.50	MW	CG	N
0.850	21.59	72159S	3.00	76.2	.740	18.8	3.4	.60	2.0	50	6.7	30	.47	11.9	0.055	1.4	8.50	SST	CG	N
0.850	21.59	72169	3.00	76.2	.716	18.2	7.3	1.3	2.3	59	17	76	.69	17.4	0.067	1.7	10.3	MW	CG	N
0.850	21.59	72169S	3.00	76.2	.716	18.2	6.2	1.1	1.9	49	12	54	.69	17.4	0.067	1.7	10.3	SST	CG	N
0.850	21.59	72183	3.00	76.2	.714	18.1	7.7	1.3	2.3	58	18	79	.71	17.9	0.068	1.7	10.4	MW	CG	N
0.850	21.59	72183S	3.00	76.2	.714	18.1	6.5	1.1	1.9	49	13	56	.71	17.9	0.068	1.7	10.4	SST	CG	N
0.850	21.59	72193	3.00	76.2	.706	17.9	10	1.8	2.0	52	21	94	.71	18.1	0.072	1.8	9.88	MW	CG	N
0.850	21.59	72193S	3.00	76.2	.706	17.9	8.8	1.5	1.6	41	14	63	.71	18.1	0.072	1.8	9.88	SST	CG	N
0.850	21.59	72207	3.00	76.2	.702	17.8	10	1.8	2.2	56	22	99	.81	20.7	0.074	1.9	11.0	MW	CG	N
0.850	21.59	72207S	3.00	76.2	.702	17.8	8.7	1.5	1.8	45	15	68	.81	20.7	0.074	1.9	11.0	SST	CG	N
0.850	21.59	72230	3.00	76.2	.690	17.5	14	2.4	2.1	53	29	128	.90	22.9	0.080	2.0	11.3	MW	CG	N
0.850	21.59	72230S	3.00	76.2	.690	17.5	12	2.1	1.6	41	19	86	.90	22.9	0.080	2.0	11.3	SST	CG	N
0.850	21.59	72244	3.00	76.2	.688	17.5	14	2.5	2.1	53	29	131	.93	23.7	0.081	2.1	11.5	MW	CG	N
0.850	21.59	72244S	3.00	76.2	.688	17.5	12	2.1	1.7	42	20	89	.93	23.7	0.081	2.1	11.5	SST	CG	N
0.850	21.59	72257	3.00	76.2	.680	17.3	17	3.0	2.0	50	34	153	.99	25.1	0.085	2.2	11.6	MW	CG	N
0.850	21.59	72257S	3.00	76.2	.680	17.3	15	2.6	1.6	40	23	103	.99	25.1	0.085	2.2	11.6	SST	CG	N
0.850	21.59	72273	3.00	76.2	.668	17.0	23	4.0	1.8	45	40	180	1.07	27.2	0.091	2.3	11.8	MW	CG	N
0.850	21.59	72273S	3.00	76.2	.668	17.0	20	3.4	1.4	35	27	119	1.07	27.2	0.091	2.3	11.8	SST	CG	N
0.850	21.59	72285	3.00	76.2	.666	16.9	22	3.9	1.8	47	41	182	1.16	29.5	0.092	2.3	12.6	MW	CG	N
0.850	21.59	72285S	3.00	76.2	.666	16.9	19	3.3	1.5	37	28	123	1.16	29.5	0.092	2.3	12.6	SST	CG	N
0.850	21.59	72295	3.00	76.2	.654	16.6	29	5.1	1.7	44	50	224	1.25	31.7	0.098	2.5	12.8	MW	CG	N
0.850	21.59	72295S	3.00	76.2	.654	16.6	25	4.3	1.4	34	33	148	1.25	31.7	0.098	2.5	12.8	SST	CG	N
0.850	21.59	72305	3.00	76.2	.650	16.5	36	6.2	1.5	38	53	237	1.16	29.5	0.100	2.5	11.6	MW	CG	N
0.850	21.59	72305S	3.00	76.2	.650	16.5	30	5.3	1.2	30	35	157	1.16	29.5	0.100	2.5	11.6	SST	CG	N
0.850	21.59	72324	3.00	76.2	.640	16.3	38	6.7	1.6	41	62	274	1.38	35.0	0.105	2.7	13.1	MW	CG	N
0.850	21.59	72324S	3.00	76.2	.640	16.3	32	5.7	1.3	32	41	181	1.38	35.0	0.105	2.7	13.1	SST	CG	N
0.850	21.59	72258	3.25	82.6	.680	17.3	15	2.7	2.1	54	33	146	1.11	28.1	0.085	2.2	13.0	MW	CG	N
0.850	21.59	72258S	3.25	82.6	.680	17.3	13	2.3	1.8	45	23	103	1.11	28.1	0.085	2.2	13.0	SST	CG	N
0.850	21.59	72144	3.50	88.9	.750	19.1	2.5	.43	3.0	77	7.5	33	.46	11.6	0.050	1.3	9.13	MW	CG	N
0.850	21.59	72144S	3.50	88.9	.750	19.1	2.1	.37	2.4	61	5.1	23	.46	11.6	0.050	1.3	9.13	SST	CG	N
0.850	21.59	72160	3.50	88.9	.740	18.8	3.4	.60	2.9	74	9.9	44	.53	13.4	0.055	1.4	9.63	MW	CG	N
0.850	21.59	72160S	3.50	88.9	.740	18.8	2.9	.51	2.3	59	6.7	30	.53	13.4	0.055	1.4	9.63	SST	CG	N
0.850	21.59	72170	3.50	88.9	.716	18.2	6.3	1.1	2.7	69	17	76	.78	19.8	0.067	1.7	11.6	MW	CG	N
0.850	21.59	72170S	3.50	88.9	.716	18.2	5.3	.93	2.3	58	12	54	.78	19.8	0.067	1.7	11.6	SST	CG	N
0.850	21.59	72184	3.50	88.9	.714	18.1	6.5	1.1	2.7	68	18	78	.81	20.5	0.068	1.7	11.9	MW	CG	N
0.850	21.59	72184S	3.50	88.9	.714	18.1	5.5	.97	2.3	58	13	56	.81	20.5	0.068	1.7	11.9	SST	CG	N
0.850	21.59	72194	3.50	88.9	.706	17.9	8.8	1.5	2.4	61	21	94	.81	20.6	0.072	1.8	11.3	MW	CG	N
0.850	21.59	72194S	3.50	88.9	.706	17.9	7.5	1.3	1.9	48	14	63	.81	20.6	0.072	1.8	11.3	SST	CG	N
0.850	21.59	72208	3.50	88.9	.702	17.8	8.7	1.5	2.6	65	22	99	.93	23.7	0.074	1.9	12.6	MW	CG	N
0.850	21.59	72208S	3.50	88.9	.702	17.8	7.4	1.3	2.1	53	15	68	.93	23.7	0.074	1.9	12.6	SST	CG	N
0.850	21.59	72232	3.50	88.9	.690	17.5	12	2.1	2.4	62	29	128	1.03	26.2	0.080	2.0	12.9	MW	CG	N
0.850	21.59	72232S	3.50	88.9	.690	17.5	10	1.8	1.9	49	19	86	1.03	26.2	0.080	2.0	12.9	SST	CG	N
0.850	21.59	72245	3.50	88.9	.688	17.5	12	2.1	2.4	61	29	129	1.08	27.5	0.081	2.1	13.4	MW	CG	N
0.850	21.59	72245S	3.50	88.9	.688	17.5	10	1.8	2.0	50	20	89	1.08	27.5	0.081	2.1	13.4	SST	CG	N
0.850	21.59	72259	3.50	88.9	.680	17.3	15	2.6	2.4	60	34	153	1.15	29.1	0.085	2.2	13.5	MW	CG	N
0.850	21.59	72259S	3.50	88.9	.680	17.3	12	2.2	1.9	47	23	103	1.15	29.1	0.085	2.2	13.5	SST	CG	N
0.850	21.59	72275	3.50	88.9	.668	17.0	19	3.3	2.2	55	40	180	1.27	32.4	0.091	2.3	14.0	MW	CG	N
0.850	21.59	72275S	3.50	88.9	.668	17.0	16	2.8	1.7	43	27	119	1.27	32.4	0.091	2.3	14.0	SST	CG	N
0.850	21.59	72286	3.50	88.9	.666	16.9	19	3.3	2.2	55	41	182	1.33	33.9	0.092	2.3	14.5	MW	CG	N
0.850	21.59	72286S	3.50	88.9	.666	16.9	16	2.8	1.7	44	28	123	1.33	33.9	0.092	2.3	14.5	SST	CG	N
0.850	21.59	72296	3.50	88.9	.654	16.6	25	4.3	2.0	52	50	224	1.43	36.4	0.098	2.5	14.6	MW	CG	N
0.850	21.59	72296S	3.50	88.9	.654	16.6	21	3.7	1.6	40	33	148	1.43	36.4	0.098	2.5	14.6	SST	CG	N
0.850	21.59	72306	3.50	88.9	.650	16.5	30	5.3	1.8	45	53	237	1.33	33.7	0.100	2.5	13.3	MW	CG	N
0.850	21.59	72306S	3.50	88.9	.650	16.5	26	4.5	1.4	35	35	157	1.33	33.7	0.100	2.5	13.3	SST	CG	N
0.850	21.59	72326	3.50	88.9	.640	16.3	32	5.7	1.9	48	62	274	1.58	40.0	0.105	2.7	15.0	MW	CG	N
0.850	21.59	72326S	3.50	88.9	.640	16.3	28	4.8	1.5	38	41	181	1.58	40.0	0.105	2.7	15.0	SST	CG	N
0.850	21.59	72145	4.00	101.6	.750	19.1	2.2	.38	3.5	88	7.5	33	.51	12.9	0.050	1.3	10.1	MW	CG	N
0.850	21.59	72145S	4.00	101.6	.750	19.1	1.8	.32	2.8	70	5.1	23	.51	12.9	0.050	1.3	10.1	SST	CG	N
0.850	21.59	72161	4.00	101.6	.740	18.8	3.0	.52	3.3	85	9.9	44	.60	15.2	0.055	1.4	10.9	MW	CG	N
0.850	21.59	72161S	4.00	101.6	.740	18.8	2.5	.44	2.7	68	6.7	30	.60	15.2	0.055	1.4	10.9	SST	CG	N
0.850	21.59	72171	4.00	101.6	.716	18.2	5.5	.95	3.1	79	17	76	.88	22.3	0.067	1.7	13.1	MW	CG	N
0.850	21.59	72171S	4.00	101.6	.716	18.2	4.6	.81	2.6	66	12	54	.88	22.3	0.067	1.7	13.1	SST	CG	N
0.850	21.59	72185	4.00	101.6	.714	18.1	5.7	1.0	3.1	79	18	79	.90	22.9	0.068	1.7	13.3	MW	CG	N
0.850	21.59	72185S	4.00	101.6	.714	18.1	4.8	.85	2.6	66	13	56	.90	22.9	0.068	1.7	13.3	SST	CG	N
0.850	21.59	72260	4.00	101.6	.680	17.3	13	2.2	2.7	69	34	152	1.30	32.9	0.085	2.2	15.3	MW	CG	N
0.850	21.59	72260S	4.00	101.6	.680	17.3	11	1.9	2.1	54	23	103	1.30	32.9	0.085	2.2	15.3	SST	CG	N
0.859	21.82	12624	.31	7.9	.673	17.1	319	56	.06	1.4	18	81	.26	6.5	0.093	2.4	2.75	SST	CG	N
0.859	21.82	G-1	.41	10.3	.673	17.1	277	49	.10	2.6	28	126	.26	6.5	0.093	2.4	2.75	SST	CG	N
0.859	21.82	GG-83	.44	11.1	.675	17.1	318	56	.09	2.2	27	122	.24	6.1	0.092	2.3	2.75	SST	CG	N
0.859	21.82	3786	.50	12.7	.675	17.1	228	40	.13	3.3	30	131	.28	7.0	0.092	2.3	3.00	SPR	CG	Z
0.859	21.82	B4-22	.53	13.5	.759	19.3	11	2.0	.36	9.0	4.0	18	.18	4.4	0.050	1.3	3.50	SPR	CG	N
0.859	21.82	S-915	.56	14.3	.751	19.1	18	3.2	.34	8.6	6.2	28	.22	5.7	0.054	1.4	3.13	SST	C	N
0.859	21.82	II-85	.63	15.9	.715	18.2	34	6.0	.34	8.6	12	52	.29	7.3	0.072	1.8	4.00	SST	CG	N
0.859	21.82	1581	.63	15.9	.649	16.5	272	48	.15	3.9	41	184	.47	12.0	0.105	2.7	3.50	SPR	C	Z
0.859	21.82	AA-59	.63	15.9	.619	15.7	369	65	.15	3.7	54	238	.48	12.2	0.120	3.0	4.00	SPR	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.859	21.82	11710	.66	16.7	.743	18.9	21	3.7	.39	10	8.3	37	.20	5.2	0.058	1.5	3.50	SPR	CG	Z
0.859	21.82	11678	.72	18.2	.677	17.2	174	30	.16	4.2	29	127	.30	7.5	0.091	2.3	3.25	SPR	CG	Z
0.859	21.82	A13-35	.75	19.1	.793	20.1	1.3	.23	.59	15	.78	3.5	.17	4.2	0.033	0.8	4.00	SST	C	N
0.859	21.82	S-345	.75	19.1	.699	17.8	28	4.8	.27	6.9	7.5	33	.48	12.2	0.080	2.0	6.00	SST	CG	N
0.859	21.82	10793	.81	20.6	.639	16.2	162	28	.27	6.9	44	196	.52	13.3	0.110	2.8	4.75	SST	CG	N
0.859	21.82	S-3091	.88	22.2	.757	19.2	5.3	.94	.57	14	3.0	14	.31	7.8	0.051	1.3	5.00	SST	C	N
0.859	21.82	12284	.88	22.2	.695	17.7	69	12	.32	8.0	22	98	.33	8.3	0.082	2.1	4.00	SPR	CG	Z
0.859	21.82	KK-85	.88	22.2	.639	16.2	250	44	.19	4.9	48	215	.44	11.2	0.110	2.8	4.00	SPR	CG	N
0.859	21.82	12486	.91	23.0	.699	17.8	62	11	.33	8.3	20	91	.40	10.2	0.080	2.0	4.00	SPR	C	N
0.859	21.82	2951	.91	23.0	.669	17.0	131	23	.25	6.3	32	144	.38	9.7	0.095	2.4	4.00	SPR	CG	Z
0.859	21.82	B12-46	1.00	25.4	.765	19.4	4.0	.71	.71	18	2.8	13	.29	7.5	0.047	1.2	5.25	SPR	C	N
0.859	21.82	PP-92	1.00	25.4	.725	18.4	25	4.4	.47	12	12	53	.27	6.8	0.067	1.7	4.00	SST	CG	N
0.859	21.82	N-55	1.03	26.2	.739	18.8	9.1	1.6	.67	17	6.1	27	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.859	21.82	K-50	1.13	28.6	.735	18.7	21	3.7	.48	12	10	45	.25	6.3	0.062	1.6	4.00	SPR	CG	N
0.859	21.82	S-185	1.25	31.8	.769	19.5	1.2	.21	.76	19	.90	4.0	.50	12.6	0.045	1.1	10.0	SST	C	N
0.859	21.82	B11-69	1.25	31.8	.753	19.1	8.7	1.5	.73	19	6.3	28	.24	6.1	0.053	1.3	4.50	SPR	CG	Z
0.859	21.82	A15-52	1.25	31.8	.737	18.7	14	2.5	.63	16	9.1	40	.30	7.6	0.061	1.5	4.75	SST	CG	N
0.859	21.82	11512	1.25	31.8	.731	18.6	19	3.4	.58	15	11	49	.35	8.9	0.064	1.6	4.50	SPR	CG	Z
0.859	21.82	10148	1.25	31.8	.723	18.4	23	4.0	.59	15	13	59	.32	8.2	0.068	1.7	4.75	SPR	CG	Z
0.859	21.82	12138	1.25	31.8	.699	17.8	25	4.4	.69	18	17	76	.56	14.2	0.080	2.0	7.00	SPR	CG	Z
0.859	21.82	12225	1.28	32.5	.751	19.1	12	2.1	.57	15	6.7	30	.27	6.9	0.054	1.4	4.00	SPR	C	Z
0.859	21.82	12488	1.28	32.5	.699	17.8	42	7.3	.49	12	20	91	.48	12.2	0.080	2.0	5.00	SPR	C	N
0.859	21.82	2773	1.41	35.7	.645	16.4	111	19	.58	15	64	286	.64	16.3	0.107	2.7	6.00	MW	CG	Z
0.859	21.82	S-1307	1.44	36.5	.725	18.4	14	2.5	.83	21	12	53	.37	9.4	0.067	1.7	5.50	SST	CG	N
0.859	21.82	3864	1.44	36.5	.723	18.4	21	3.6	.64	16	13	59	.41	10.4	0.068	1.7	5.00	SPR	C	Z
0.859	21.82	B7-65	1.50	38.1	.735	18.7	14	2.4	.72	18	10	45	.31	7.9	0.062	1.6	5.00	SPR	CG	N
0.859	21.82	11776	1.50	38.1	.723	18.4	18	3.1	.75	19	13	59	.44	11.2	0.068	1.7	5.50	SPR	C	Z
0.859	21.82	10023	1.50	38.1	.719	18.3	22	3.8	.64	16	14	61	.37	9.3	0.070	1.8	5.25	SPR	CG	Z
0.859	21.82	00-53	1.50	38.1	.639	16.2	137	24	.32	8.2	44	196	.58	14.7	0.110	2.8	5.25	SST	CG	N
0.859	21.82	B15-1	1.53	38.9	.779	19.8	1.1	.19	1.2	30	1.3	5.7	.34	8.6	0.040	1.0	7.50	SST	C	N
0.859	21.82	MM-88	1.59	40.5	.519	13.2	667	117	.24	6.1	160	713	1.28	32.4	0.170	4.3	7.50	SPR	CG	Z
0.859	21.82	S-73	1.63	41.3	.751	19.1	3.3	.57	1.2	30	3.8	17	.45	11.3	0.054	1.4	8.25	SST	CG	N
0.859	21.82	TT-69	1.63	41.3	.649	16.5	79	14	.51	13	40	180	.68	17.3	0.105	2.7	6.50	SST	CG	N
0.859	21.82	11435	1.63	41.3	.609	15.5	127	22	.50	13	63	282	1.13	28.6	0.125	3.2	9.00	SPR	CG	Z
0.859	21.82	10646	1.63	41.3	.567	14.4	360	63	.30	7.5	107	474	1.02	26.0	0.146	3.7	7.00	SPR	CG	Z
0.859	21.82	S-1175	1.75	44.5	.505	12.8	774	135	.21	5.2	159	709	1.24	31.5	0.177	4.5	7.00	SST	CG	N
0.859	21.82	3321	1.88	47.6	.575	14.6	248	43	.40	10	98	438	1.12	28.4	0.142	3.6	8.00	SPR	CG	Z
0.859	21.82	B8-33	1.94	49.2	.651	16.5	78	14	.54	14	42	188	.73	18.5	0.104	2.6	7.00	SPR	CG	N
0.859	21.82	B17-195	1.97	50.0	.499	12.7	599	105	.26	6.6	155	689	1.62	41.1	0.180	4.6	9.00	SST	CG	N
0.859	21.82	2776	2.00	50.8	.673	17.1	55	9.6	.56	14	31	136	.69	17.4	0.093	2.4	6.33	SPR	C	Z
0.859	21.82	10502	2.00	50.8	.663	16.8	43	7.5	.83	21	36	158	.88	22.4	0.098	2.5	9.00	SPR	CG	Z
0.859	21.82	12465	2.00	50.8	.619	15.7	123	22	.51	13	62	277	.96	24.4	0.120	3.0	8.00	SPR	CG	Z
0.859	21.82	S-459	2.06	52.4	.675	17.1	25	4.3	1.1	28	27	122	.92	23.4	0.092	2.3	10.0	SST	CG	N
0.859	21.82	KK-81	2.25	57.2	.539	13.7	460	81	.29	7.5	135	601	1.28	32.5	0.160	4.1	8.00	SPR	CG	Z
0.859	21.82	A13-39	2.34	59.5	.697	17.7	15	2.6	1.4	35	20	88	.81	20.6	0.081	2.1	10.0	SST	CG	N
0.859	21.82	10370	2.38	60.3	.709	18.0	11	1.9	1.5	38	16	72	.88	22.4	0.075	1.9	10.8	SPR	C	Z
0.859	21.82	S-465	2.44	61.9	.649	16.5	48	8.5	.84	21	40	180	.98	24.9	0.105	2.7	9.33	SST	CG	N
0.859	21.82	10829	2.50	63.5	.699	17.8	17	3.0	1.2	31	20	91	.75	19.0	0.080	2.0	9.33	SPR	CG	Z
0.859	21.82	11430	2.50	63.5	.659	16.7	36	6.4	.96	24	35	156	1.00	25.4	0.100	2.5	10.0	SST	CG	N
0.859	21.82	11174	2.53	64.3	.641	16.3	53	9.3	.84	21	45	200	1.09	27.7	0.109	2.8	10.0	SST	CG	N
0.859	21.82	S-381	2.63	66.7	.765	19.4	1.8	.31	2.2	57	3.9	17	.40	10.1	0.047	1.2	8.50	SST	CG	N
0.859	21.82	11510	2.63	66.7	.563	14.3	202	35	.55	14	111	493	1.85	47.0	0.148	3.8	11.5	SPR	CG	Z
0.859	21.82	11953	2.69	68.2	.687	17.4	24	4.3	1.0	26	25	112	.77	19.7	0.086	2.2	9.00	SPR	CG	Z
0.859	21.82	2908	2.75	69.9	.669	17.0	26	4.6	1.2	31	32	144	1.14	29.0	0.095	2.4	12.0	SPR	CG	Z
0.859	21.82	4305	2.75	69.9	.609	15.5	83	14	.85	22	70	312	1.59	40.5	0.125	3.2	12.8	SPR	CG	Z
0.859	21.82	11591	2.78	70.6	.643	16.3	58	10	.82	21	47	210	1.19	30.2	0.108	2.7	10.0	SPR	CG	GI
0.859	21.82	10935	2.84	72.2	.777	19.7	.93	.16	2.4	61	2.2	9.9	.45	11.5	0.041	1.0	10.0	SPR	C	N
0.859	21.82	A13-43	3.00	76.2	.767	19.5	1.6	.29	2.6	65	4.2	19	.39	9.9	0.046	1.2	8.50	SST	CG	N
0.859	21.82	3770	3.00	76.2	.505	12.8	424	74	.42	11	180	799	2.21	56.2	0.177	4.5	12.5	SPR	CG	Z
0.859	21.82	2741	3.25	82.6	.707	18.0	10	1.7	1.8	45	18	78	.91	23.2	0.076	1.9	12.0	SPR	CG	Z
0.859	21.82	2593	3.41	86.5	.743	18.9	3.0	.53	2.7	68	8.1	36	.73	18.4	0.058	1.5	12.5	SPR	CG	GI
0.859	21.82	11947	3.56	90.5	.735	18.7	8.4	1.5	1.2	31	10	45	.43	11.0	0.062	1.6	7.00	SPR	CG	N
0.859	21.82	11829	3.63	92.1	.737	18.7	3.5	.61	2.6	66	9.1	40	.73	18.6	0.061	1.5	12.0	SST	CG	N
0.859	21.82	1561	3.75	95.3	.629	16.0	51	8.9	1.1	27	55	245	1.61	40.9	0.115	2.9	14.0	SPR	CG	Z
0.859	21.82	B18-189	4.00	101.6	.719	18.3	4.8	.85	2.8	72	14	61	1.16	29.3	0.070	1.8	16.5	SPR	CG	N
0.859	21.82	B17-186	4.19	106.4	.771	19.6	1.0	.18	3.5	89	3.7	16	.46	11.7	0.044	1.1	10.5	SST	CG	N
0.859	21.82	S-3067	4.63	117.5	.735	18.7	3.6	.64	2.6	66	9.5	42	.81	20.5	0.062	1.6	12.0	SST	C	N
0.859	21.82	3227	4.69	119.0	.609	15.5	45	7.9	1.6	40	70	312	2.72	69.1	0.125	3.2	21.8	SPR	CG	Z
0.859	21.82	10464	5.25	133.4	.649	16.5	23	4.0	1.9	49	44	194	2.10	53.3	0.105	2.7	20.0	SPR	CG	Z
0.859	21.82	12021	5.50	139.7	.785	19.9	.24	.04	4.7	119	1.1	5.1	.81	20.7	0.037	0.9	22.0	SPR	CG	Z
0.859	21.82	3101	6.75	171.5	.579	14.7	55	9.7	1.7	43	94	420	4.04	102.7	0.140	3.6	29.0	SPR	CG	Z
0.859	21.82	12153	8.56	217.5	.609	15.5	32	5.6	2.2	56	70	312	3.75	95.3	0.125	3.2	30.0	SPR	CG	Z
0.859	21.82	3075	9.00	228.6	.667	16.9	8.4	1.5	4.0	101	33	149	3.32	84.4	0.096	2.4	34.8	SPR	CG	Z
0.875	22.23	2726	.41	10.3	.765	19.4	24	4.2	.24	6.1	5.7	26	.17	4.2	0.055	1.4	3.00	HD	CG	Z
0.875	22.23	S-189	.41	10.3	.755	19.2	30	5.2	.23	5.7	6.8	30	.18	4.6	0.060	1.5	3.00	SST	CG	N
0.875	22.23	BB-86	.47	11.9	.725	18.4	89	16	.19	4.7	17	74	.23	5.7	0.075	1.9	3.00	SPR	CG	Z
0.875	22.23	3011	.56	14.3	.793	20.1	4.0	.70	.37	9.3	1.5	6.5	.19	4.9	0.041	1.0	3.75	SPR	C	Z
0.875	22.23	S-1022	.59	15.1	.779	19.8	6.0	1.0	.35	9.0	2.1	9.4	.24	6.1	0.048	1.2	4.00	SST	C	N
0.875	22.23	S-1414	.63	15.9	.773	19.6	5.0	.88	.32	8.1	1.6	7.1	.31	7.8	0.051	1.3	5.00	SST	C	N
0.875	22.23	3271	.66	16.7	.775	19.7	16	2.8	.33	8.3	5.2	23	.20	5.1	0.050	1.3	3.00	SPR	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.875	22.23	10469	.66	16.7	.751	19.1	40	6.9	.25	6.4	9.9	44	.25	6.3	0.062	1.6	3.00	SPR	C	Z
0.875	22.23	3702	.66	16.7	.635	16.1	346	61	.18	4.5	61	271	.48	12.2	0.120	3.0	4.00	SPR	CG	Z
0.875	22.23	10942	.69	17.4	.605	15.4	1178	206	.07	1.8	84	372	.41	10.3	0.135	3.4	3.00	SPR	CG	Z
0.875	22.23	11386	.75	19.1	.785	19.9	4.6	.80	.57	14	2.6	12	.18	4.6	0.045	1.1	4.00	SST	CG	N
0.875	22.23	S-3177	.75	19.1	.767	19.5	15	2.7	.40	10	6.2	28	.18	4.5	0.054	1.4	3.25	SST	CG	N
0.875	22.23	1733	.75	19.1	.751	19.1	14	2.5	.39	10	5.6	25	.36	9.1	0.062	1.6	4.75	HD	C	Z
0.875	22.23	S-1438	.81	20.6	.825	21.0	.27	.05	.66	17	.18	.78	.15	3.8	0.025	0.6	5.00	SST	C	N
0.875	22.23	LL-3	.88	22.2	.775	19.7	2.8	.50	.53	13	1.5	6.6	.35	8.9	0.050	1.3	7.00	SST	CG	N
0.875	22.23	S-1698	.88	22.2	.705	17.9	88	15	.25	6.5	22	100	.30	7.6	0.085	2.2	3.50	SST	CG	N
0.875	22.23	26	.88	22.2	.693	17.6	88	15	.32	8.2	28	125	.49	12.3	0.091	2.3	4.33	HD	C	Z
0.875	22.23	S-886	.94	23.8	.793	20.1	4.1	.71	.72	18	2.9	13	.18	4.7	0.041	1.0	3.50	SST	C	N
0.875	22.23	10315	.94	23.8	.751	19.1	26	4.6	.38	9.6	9.9	44	.28	7.1	0.062	1.6	3.50	SPR	C	Z
0.875	22.23	4184	1.00	25.4	.675	17.1	77	14	.40	10	31	137	.60	15.2	0.100	2.5	6.00	SPR	CG	Z
0.875	22.23	12133	1.03	26.2	.757	19.2	16	2.8	.53	14	8.6	38	.24	6.0	0.059	1.5	4.00	SPR	CG	Z
0.875	22.23	3686	1.06	27.0	.715	18.2	59	10	.34	8.7	20	89	.32	8.1	0.080	2.0	4.00	SPR	CG	Z
0.875	22.23	S-1437	1.09	27.8	.665	16.9	111	19	.36	9.1	40	177	.53	13.3	0.105	2.7	5.00	SST	CG	N
0.875	22.23	GG-53	1.13	28.6	.655	16.6	157	27	.30	7.7	47	211	.55	14.0	0.110	2.8	5.00	SPR	CG	Z
0.875	22.23	11118	1.16	29.4	.799	20.3	1.4	.24	.90	23	1.2	5.5	.26	6.5	0.038	1.0	5.75	MW	C	N
0.875	22.23	H-37	1.25	31.8	.785	19.9	1.2	.22	.74	19	.92	4.1	.51	13.0	0.045	1.1	10.3	MW	C	N
0.875	22.23	S-127	1.28	32.5	.775	19.7	2.5	.44	.90	22.8	2.28	10.1	.38	9.5	0.050	1.3	7.50	SST	CG	N
0.875	22.23	10307	1.31	33.3	.715	18.2	23	4.1	.75	19	18	78	.56	14.2	0.080	2.0	7.00	SPR	CG	Z
0.875	22.23	S-1446	1.38	34.9	.751	19.1	8.6	1.5	1.0	25	8.6	38	.37	9.4	0.062	1.6	6.00	SST	CG	N
0.875	22.23	11263	1.38	34.9	.693	17.6	32	5.5	.67	17	21	94	.71	17.9	0.091	2.3	7.75	SST	CG	N
0.875	22.23	914	1.38	34.9	.665	16.9	96	17	.45	11	43	190	.74	18.7	0.105	2.7	6.00	HD	C	Z
0.875	22.23	3167	1.44	36.5	.615	15.6	221	39	.34	8.6	75	334	.85	21.5	0.130	3.3	6.50	SPR	CG	Z
0.875	22.23	S-1359	1.50	38.1	.813	20.7	.96	.17	1.3	34	1.3	5.7	.16	3.9	0.031	0.8	4.00	SST	C	N
0.875	22.23	11550	1.50	38.1	.789	20.0	2.8	.50	1.2	32	3.5	16	.26	6.6	0.043	1.1	5.00	SPR	C	Z
0.875	22.23	10497	1.50	38.1	.731	18.6	12	2.1	.91	23	11	48	.59	15.1	0.072	1.8	8.25	SPR	CG	Z
0.875	22.23	10398	1.50	38.1	.715	18.2	18	3.2	.82	21	15	66	.68	17.3	0.080	2.0	8.50	SPR	CG	Z
0.875	22.23	4389	1.56	39.7	.731	18.6	10	1.8	.90	23	9.2	41	.67	16.9	0.072	1.8	9.25	SPR	CG	Z
0.875	22.23	S-1574	1.59	40.5	.775	19.7	3.5	.62	1.2	32	4.4	20	.35	8.9	0.050	1.3	6.00	SST	C	N
0.875	22.23	S-208	1.63	41.3	.751	19.1	6.9	1.2	1.2	30	8.2	36	.43	11.0	0.062	1.6	7.00	SST	CG	N
0.875	22.23	S-42	1.63	41.3	.727	18.5	15	2.6	1.0	25	15	66	.52	13.2	0.074	1.9	7.00	SST	CG	N
0.875	22.23	11584	1.75	44.5	.733	18.6	9.4	1.6	1.0	26	9.4	42	.75	18.9	0.071	1.8	9.50	SPR	CG	Z
0.875	22.23	11999	1.78	45.2	.665	16.9	70	12	.62	16	43	190	.79	20.0	0.105	2.7	7.50	SPR	CG	Z
0.875	22.23	S-1390	1.88	47.6	.715	18.2	17	3.0	1.1	28	19	83	.72	18.3	0.080	2.0	8.00	SST	C	N
0.875	22.23	3525	1.88	47.6	.491	12.5	943	165	.22	5.7	212	943	1.63	41.5	0.192	4.9	8.50	HD	CG	Z
0.875	22.23	B7-52	1.91	48.4	.643	16.3	64	11	.72	18	46	204	1.19	30.2	0.116	2.9	10.3	SST	CG	N
0.875	22.23	2588	1.94	49.2	.693	17.6	41	7.2	.69	17	28	125	.64	16.2	0.091	2.3	7.00	HD	CG	Z
0.875	22.23	A13-70	1.97	50.0	.731	18.6	15	2.6	.94	24	14	61	.54	13.7	0.072	1.8	6.50	SST	C	N
0.875	22.23	12264	2.00	50.8	.749	19.0	11	1.9	.98	25	10	46	.44	11.2	0.063	1.6	6.00	SPR	C	Z
0.875	22.23	1916	2.00	50.8	.731	18.6	16	2.8	.92	23	15	65	.55	14.0	0.072	1.8	6.67	SPR	C	Z
0.875	22.23	II-65	2.00	50.8	.695	17.7	32	5.7	.84	21	27	121	.81	20.6	0.090	2.3	8.00	SPR	C	Z
0.875	22.23	3308	2.00	50.8	.691	17.6	61	11	.47	12	29	129	.60	15.2	0.092	2.3	5.50	SPR	C	Z
0.875	22.23	3926	2.00	50.8	.665	16.9	77	13	.56	14	43	190	.84	21.3	0.105	2.7	7.00	SPR	C	Z
0.875	22.23	68	2.00	50.8	.635	16.1	99	17	.62	16	61	272	1.08	27.4	0.120	3.0	9.00	HD	CG	Z
0.875	22.23	808	2.00	50.8	.521	13.2	572	100	.31	7.9	177	787	1.64	41.6	0.177	4.5	9.25	HD	CG	Z
0.875	22.23	2825	2.03	51.6	.631	16.0	76	13	.58	15	44	196	1.45	36.8	0.122	3.1	12.0	SPR	CG	GI
0.875	22.23	10552	2.06	52.4	.765	19.4	4.3	.76	1.6	40	6.9	31	.47	11.9	0.055	1.4	7.50	SPR	C	Z
0.875	22.23	11841	2.06	52.4	.667	16.9	46	8.0	.91	23	42	185	1.04	26.4	0.104	2.6	10.0	SPR	CG	Z
0.875	22.23	12449	2.06	52.4	.633	16.1	120	21	.52	13	63	279	.97	24.6	0.121	3.1	8.00	SPR	CG	N
0.875	22.23	11205	2.13	54.0	.745	18.9	5.4	.94	1.4	36	7.5	34	.72	18.2	0.065	1.7	10.0	SST	C	N
0.875	22.23	3025	2.13	54.0	.625	15.9	139	24	.50	13	69	307	1.13	28.6	0.125	3.2	8.00	SPR	C	Z
0.875	22.23	A14-66	2.16	54.8	.741	18.8	12	2.1	.97	25	12	52	.40	10.2	0.067	1.7	6.00	SST	CG	N
0.875	22.23	2971	2.19	55.6	.691	17.6	48	8.3	.61	15	29	129	.69	17.5	0.092	2.3	6.50	SPR	C	Z
0.875	22.23	12005	2.19	55.6	.689	17.5	45	7.9	.67	17	30	133	.65	16.5	0.093	2.4	7.00	SPR	CG	Z
0.875	22.23	S-299	2.22	56.4	.795	20.2	.92	.16	1.9	47	1.7	7.6	.36	9.1	0.040	1.0	8.00	SST	C	N
0.875	22.23	11104	2.25	57.2	.761	19.3	5.0	.88	1.5	39	7.7	34	.48	12.3	0.057	1.4	7.50	SPR	C	N
0.875	22.23	3895	2.25	57.2	.725	18.4	11	1.9	1.5	38	17	74	.75	19.1	0.075	1.9	10.0	SPR	CG	Z
0.875	22.23	10119	2.25	57.2	.649	16.5	59	10	.87	22	51	228	1.24	31.6	0.113	2.9	11.0	SPR	CG	Z
0.875	22.23	2927	2.38	60.3	.767	19.5	2.2	.39	1.7	44	3.9	17	.64	16.3	0.054	1.4	12.0	SPR	CG	GI
0.875	22.23	3952	2.38	60.3	.731	18.6	11	1.9	1.4	35	15	65	.72	18.3	0.072	1.8	9.00	SPR	C	Z
0.875	22.23	S-1314	2.44	61.9	.665	16.9	35	6.1	1.1	29	40	177	1.21	30.7	0.105	2.7	11.5	SST	CG	N
0.875	22.23	11272	2.50	63.5	.665	16.9	59	10	.73	18	43	190	.89	22.7	0.105	2.7	8.50	SPR	CG	Z
0.875	22.23	864	2.50	63.5	.635	16.1	69	12	.88	22	61	272	1.44	36.6	0.120	3.0	12.0	HD	CG	Z
0.875	22.23	49	2.50	63.5	.605	15.4	118	21	.71	18	84	372	1.62	41.1	0.135	3.4	12.0	HD	CG	Z
0.875	22.23	4142	2.75	69.9	.663	16.8	47	8.2	.94	24	44	196	1.11	28.3	0.106	2.7	10.5	SPR	CG	Z
0.875	22.23	52	2.75	69.9	.579	14.7	163	29	.67	17	109	485	1.92	48.9	0.148	3.8	13.0	HD	CG	Z
0.875	22.23	2762	2.81	71.4	.761	19.3	3.7	.65	2.1	53	7.7	34	.60	15.2	0.057	1.4	9.50	SPR	C	GI
0.875	22.23	3096	2.88	73.0	.693	17.6	20	3.6	1.4	35	28	125	1.09	27.7	0.091	2.3	12.0	SPR	CG	Z
0.875	22.23	2906	2.94	74.6	.715	18.2	12	2.1	1.7	43	20	89	.95	24.1	0.080	2.0	12.0	SPR	CG	Z
0.875	22.23	55	3.00	76.2	.693	17.6	19	3.4	1.4	37	28	125	1.14	28.9	0.091	2.3	12.5	HD	CG	Z
0.875	22.23	56	3.00	76.2	.665	16.9	34	6.0	1.3	32	43	190	1.39	35.3	0.105	2.7	13.3	HD	CG	Z
0.875	22.23	12464	3.06	77.8	.691	17.6	21	3.7	1.4	35	29	129	1.13	28.6	0.092	2.3	12.3	SPR	CG	N
0.875	22.23	DD-78	3.25	82.6	.695	17.7	14	2.5	1.9	47	27	119	1.40	35.4	0.090	2.3	15.5	SPR	CG	Z
0.875	22.23	12166	3.38	85.7	.749	19.0	4.7	.82	2.2	56	10	46	.76	19.2	0.063	1.6	11.0	SPR	C	Z
0.875	22.23	3412	3.50	88.9	.723	18.4	13	2.4	1.3	33	17	77	.68	17.4	0.076	1.9	9.00	SPR	CG	Z
0.875	22.23	4293	3.50	88.9	.715	18.2	9.8	1.7	2.1	52	20	89	1.20	30.5	0.080	2.0	14.0	SPR	C	Z
0.875	22.23	3277	3.63	92.1	.551	14.0	282	49	.49	12	138	613	2.01	51.0	0.162	4.1	12.3	SPR	CG	Z
0.875	22.23	3860	3.75	95.3	.651	16.5	36	6.4	1.4	35	50	223	1.79	45.5	0.112	2.8	16.0	SPR	CG	GI

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.875	22.23	10808	4.00	101.6	.731	18.6	6.8	1.2	2.2	55	15	65	1.01	25.6	0.072	1.8	13.0	SPR	C	Z
0.875	22.23	2711	4.00	101.6	.715	18.2	8.4	1.5	2.4	61	20	89	1.52	38.5	0.080	2.0	17.5	SPR	C	Z
0.875	22.23	2808	4.00	101.6	.715	18.2	7.5	1.3	2.5	64	19	84	1.49	37.8	0.080	2.0	17.8	HD	C	Z
0.875	22.23	891	4.00	101.6	.715	18.2	9.0	1.6	2.2	56	20	89	1.28	32.5	0.080	2.0	15.0	HD	C	Z
0.875	22.23	S-460	4.00	101.6	.691	17.6	16	2.8	1.7	43	27	120	1.36	34.5	0.092	2.3	13.8	SST	C	N
0.875	22.23	3279	4.00	101.6	.685	17.4	18	3.1	1.8	46	32	142	1.62	41.0	0.095	2.4	16.0	SPR	C	Z
0.875	22.23	4253	4.00	101.6	.665	16.9	27	4.7	1.6	40	43	190	1.81	46.0	0.105	2.7	16.3	SPR	C	Z
0.875	22.23	12797	4.31	109.5	.625	15.9	50	8.8	1.9	49	96	428	2.33	59.1	0.125	3.2	18.6	MW	CG	N
0.875	22.23	11151	4.41	111.9	.625	15.9	58	10	1.2	30	69	307	2.16	54.8	0.125	3.2	16.0	HD	C	Z
0.875	22.23	2826	4.50	114.3	.675	17.1	17	3.0	2.5	64	43	193	1.99	50.5	0.100	2.5	20.0	MW	CG	GI
0.875	22.23	653	4.50	114.3	.521	13.2	227	40	.78	20	177	787	3.58	91.0	0.177	4.5	20.3	HD	CG	Z
0.875	22.23	2732	4.94	125.4	.691	17.6	15	2.6	2.0	50	29	129	1.52	38.6	0.092	2.3	16.5	SPR	CG	Z
0.875	22.23	3933	5.50	139.7	.693	17.6	12	2.1	2.3	59	28	125	1.73	43.9	0.091	2.3	19.0	SPR	CG	Z
0.875	22.23	11973	5.63	142.9	.675	17.1	16	2.8	3.2	81	52	231	2.10	53.3	0.100	2.5	21.0	MW	CG	Z
0.875	22.23	883	6.00	152.4	.693	17.6	9.3	1.6	3.0	77	28	125	2.18	55.5	0.091	2.3	24.0	HD	CG	Z
0.875	22.23	872	6.00	152.4	.665	16.9	16	2.8	2.7	67	43	190	2.81	71.3	0.105	2.7	25.8	HD	C	Z
0.875	22.23	865	6.00	152.4	.635	16.1	29	5.1	2.1	54	61	272	3.12	79.2	0.120	3.0	26.0	HD	CG	Z
0.875	22.23	855	6.00	152.4	.605	15.4	46	8.0	1.8	46	84	372	3.75	95.2	0.135	3.4	27.8	HD	CG	Z
0.875	22.23	818	6.00	152.4	.579	14.7	70	12	1.6	40	109	485	4.11	104.3	0.148	3.8	27.8	HD	CG	Z
0.875	22.23	1939	6.50	165.1	.689	17.5	7.6	1.3	3.5	88	27	118	3.02	76.8	0.093	2.4	31.5	SPR	C	Z
0.875	22.23	395	7.13	181.0	.647	16.4	20	3.5	2.7	68	53	234	3.41	86.7	0.114	2.9	30.0	SPR	CG	Z
0.875	22.23	892	7.75	196.9	.715	18.2	4.5	.79	4.4	113	20	89	2.32	58.9	0.080	2.0	28.0	HD	C	Z
0.875	22.23	11686	7.75	196.9	.661	16.8	13	2.2	3.6	92	45	201	3.88	98.5	0.107	2.7	35.3	SPR	C	Z
0.875	22.23	11982	8.22	208.8	.671	17.0	10	1.8	3.9	98	39	175	3.57	90.7	0.102	2.6	35.0	SPR	CG	Z
0.875	22.23	11525	8.28	210.3	.685	17.4	12	2.1	2.7	69	32	142	2.28	57.9	0.095	2.4	23.0	SPR	CG	Z
0.875	22.23	377	8.50	215.9	.731	18.6	3.7	.65	3.9	100	15	65	1.66	42.1	0.072	1.8	22.0	HD	C	Z
0.875	22.23	10004	8.88	225.4	.635	16.1	18	3.2	3.4	85	61	272	4.80	121.9	0.120	3.0	40.0	SPR	CG	Z
0.875	22.23	289	12.0	304.8	.751	19.1	1.2	.22	8.0	204	9.9	44	2.17	55.1	0.062	1.6	34.0	HD	C	Z
0.875	22.23	899	12.0	304.8	.731	18.6	2.1	.36	7.1	181	15	65	2.83	71.8	0.072	1.8	38.3	HD	C	Z
0.875	22.23	893	12.0	304.8	.715	18.2	2.9	.50	7.0	177	20	89	3.49	88.7	0.080	2.0	42.7	HD	C	Z
0.875	22.23	10677	12.3	311.2	.645	16.4	11	1.9	5.0	127	54	240	6.33	160.7	0.115	2.9	55.0	SPR	CG	Z
0.875	22.23	4015	18.5	469.9	.715	18.2	1.9	.33	11	272	20	89	5.24	133.1	0.080	2.0	64.5	HD	C	Z
0.875	22.23	4037	26.5	673.1	.605	15.4	10	1.8	8.2	207	84	372	15.8	401.2	0.135	3.4	117.0	SPR	CG	Z
0.890	22.61	2827	.63	15.9	.730	18.5	37	6.5	.23	5.7	8.3	37	.40	10.2	0.080	2.0	5.00	HD	CG	Z
0.890	22.61	AA-64	.63	15.9	.630	16.0	468	82	.11	2.7	49	218	.52	13.2	0.130	3.3	4.00	SPR	CG	Z
0.890	22.61	10584	.91	23.0	.650	16.5	261	46	.23	5.9	60	268	.54	13.7	0.120	3.0	4.50	SPR	CG	Z
0.890	22.61	10031	1.00	25.4	.796	20.2	2.9	.51	.67	17	2.0	8.7	.33	8.4	0.047	1.2	6.00	SPR	C	Z
0.890	22.61	1910	1.00	25.4	.780	19.8	11	2.0	.61	15	6.8	30	.22	5.6	0.055	1.4	4.00	SPR	CG	Z
0.890	22.61	11919	1.09	27.8	.682	17.3	102	18	.37	9.4	38	169	.52	13.2	0.104	2.6	5.00	SST	CG	N
0.890	22.61	PP-64	1.38	34.9	.770	19.6	8.1	1.4	1.0	26	8.3	37	.36	9.1	0.060	1.5	6.00	SPR	CG	N
0.890	22.61	11232	1.38	34.9	.748	19.0	11	1.9	.81	20	8.9	40	.57	14.4	0.071	1.8	8.00	SPR	CG	N
0.890	22.61	3383	1.38	34.9	.736	18.7	34	6.0	.52	13	18	78	.44	11.2	0.077	2.0	4.75	SPR	C	Z
0.890	22.61	11412	1.38	34.9	.680	17.3	90	16	.47	12	42	187	.63	16.0	0.105	2.7	6.00	SPR	CG	Z
0.890	22.61	S-324	1.38	34.9	.566	14.4	595	104	.20	5.1	121	536	.93	23.7	0.162	4.1	5.75	SST	CG	N
0.890	22.61	11863	1.41	35.7	.768	19.5	5.0	.87	.80	20	4.0	18	.61	15.5	0.061	1.5	9.00	SPR	C	N
0.890	22.61	10293	1.44	36.5	.746	18.9	14	2.5	.93	24	13	59	.50	12.8	0.072	1.8	7.00	SPR	CG	Z
0.890	22.61	10165	1.44	36.5	.578	14.7	431	75	.28	7.2	122	542	1.09	27.7	0.156	4.0	7.00	SPR	CG	Z
0.890	22.61	A14-54	1.50	38.1	.806	20.5	1.8	.32	1.2	32	2.3	10	.25	6.4	0.042	1.1	6.00	SPR	CG	N
0.890	22.61	11318	1.50	38.1	.748	19.0	13	2.2	.99	25	12	56	.51	13.1	0.071	1.8	7.25	SPR	CG	Z
0.890	22.61	10338	1.50	38.1	.730	18.5	18	3.1	.84	21	15	66	.66	16.8	0.080	2.0	8.25	SPR	CG	Z
0.890	22.61	11171	1.50	38.1	.730	18.5	20	3.5	.90	23	18	81	.60	15.2	0.080	2.0	7.50	SPR	CG	Z
0.890	22.61	WW-66	1.63	41.3	.786	20.0	2.2	.39	1.1	28	2.5	11	.52	13.2	0.052	1.3	9.00	SST	C	N
0.890	22.61	10656	1.63	41.3	.750	19.1	10	1.8	1.0	27	10	47	.58	14.7	0.070	1.8	8.25	SPR	CG	Z
0.890	22.61	10488	1.69	42.8	.626	15.9	154	27	.50	13	77	343	1.12	28.5	0.132	3.4	8.50	SPR	CG	Z
0.890	22.61	12175	1.78	45.2	.620	15.7	185	32	.45	11	82	367	1.08	27.4	0.135	3.4	8.00	SPR	CG	N
0.890	22.61	00-88	1.88	47.6	.658	16.7	57	10	.66	17	38	168	1.22	30.9	0.116	2.9	10.5	SST	CG	N
0.890	22.61	3254	1.88	47.6	.576	14.6	341	60	.36	9.2	124	552	1.33	33.9	0.157	4.0	8.50	SPR	CG	Z
0.890	22.61	S-1218	2.00	50.8	.720	18.3	17	2.9	1.2	30	20	88	.81	20.5	0.085	2.2	9.50	SST	CG	N
0.890	22.61	S-3103	2.00	50.8	.710	18.0	20	3.5	1.0	26	20	90	.99	25.1	0.090	2.3	10.0	SST	C	N
0.890	22.61	PP-76	2.00	50.8	.590	15.0	245	43	.39	10	97	430	1.28	32.4	0.150	3.8	8.50	SST	CG	N
0.890	22.61	11851	2.03	51.6	.722	18.3	17	3.0	1.2	31	21	95	.76	19.2	0.084	2.1	9.00	SST	CG	N
0.890	22.61	12027	2.03	51.6	.598	15.2	244	43	.42	11	103	460	1.24	31.5	0.146	3.7	8.50	SPR	CG	N
0.890	22.61	11523	2.22	56.4	.732	18.6	12	2.0	1.3	32	15	66	.95	24.1	0.079	2.0	11.0	SPR	C	Z
0.890	22.61	S-284	2.25	57.2	.810	20.6	.87	.15	1.9	48	1.6	7.3	.36	9.1	0.040	1.0	8.00	SST	C	N
0.890	22.61	3362	2.25	57.2	.766	19.5	6.2	1.1	1.6	40	9.8	43	.56	14.2	0.062	1.6	8.00	HD	C	Z
0.890	22.61	MM-32	2.25	57.2	.766	19.5	4.8	.84	1.8	45	8.5	38	.48	12.2	0.062	1.6	8.00	SST	CG	N
0.890	22.61	12173	2.25	57.2	.678	17.2	63	11	.69	18	43	193	.85	21.5	0.106	2.7	8.00	SPR	CG	Z
0.890	22.61	S-3015	2.31	58.7	.720	18.3	17	2.9	1.3	34	22	98	.81	20.5	0.085	2.2	9.50	SST	CG	N
0.890	22.61	10822	2.38	60.3	.640	16.3	90	16	.76	19	68	302	1.34	34.1	0.125	3.2	10.8	SPR	CG	Z
0.890	22.61	12698	2.50	63.5	.680	17.3	56	9.7	.76	19	42	187	.89	22.7	0.105	2.7	8.50	HD	CG	Z
0.890	22.61	10967	2.75	69.9	.640	16.3	87	15	.78	20	68	302	.00	0.0	0.125	3.2	11.0	HD	CG	Z
0.890	22.61	12055	2.88	73.0	.726	18.4	8.8	1.5	1.6	40	14	61	1.31	33.3	0.082	2.1	16.0	SPR	CG	Z
0.890	22.61	11411	2.88	73.0	.708	18.0	18	3.2	1.5	38	28	123	1.23	31.2	0.091	2.3	12.5	SPR	C	Z
0.890	22.61	3363	3.00	76.2	.620	15.7	106	19	.78	20	82	367	1.69	42.9	0.135	3.4	12.5	SPR	CG	Z
0.890	22.61	2995	3.13	79.4	.650	16.5	59	10	1.0	26	60	268	1.56	39.6	0.120	3.0	13.0	SPR	CG	GI
0.890	22.61	10715	3.25	82.6	.764	19.4	4.4	.78	2.3	58	10	46	.69	17.6	0.063	1.6	11.0	SPR	CG	GI
0.890	22.61	11891	3.38	85.7	.782	19.9	2.6	.46	2.5	63	6.5	29	.54	13.7	0.054	1.4	10.0	SPR	CG	N
0.890	22.61	3470	3.50	88.9	.730	18.5	6.7	1.2	1.9	49	13	58	1.56	39.6	0.080	2.0	18.5	HD	C	Z
0.890	22.61	3473	3.50	88.9	.726	18.4	10	1.8	2.1	52	21	94	1.23	31.2	0.082	2.1	14.0	SPR	C	Z
0.890	22.61	S-173	3.63	92.1	.650	16.5	41	7.1	1.4	34	55	245	1.92	48.8	0.120	3.0	16.0	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.890	22.61	11962	5.56	141.3	.688	17.5	16	2.8	2.3	60	38	167	2.12	53.9	0.101	2.6	21.0	SPR	CG	Z
0.890	22.61	11764	6.00	152.4	.620	15.7	43	7.5	1.9	49	82	367	3.75	95.2	0.135	3.4	27.8	SPR	CG	Z
0.890	22.61	12395	6.13	155.6	.650	16.5	27	4.8	2.2	56	60	268	3.24	82.3	0.120	3.0	26.0	SPR	C	Z
0.890	22.61	12604	6.88	174.6	.578	14.7	82	14	2.1	53	171	759	4.56	115.9	0.156	4.0	28.3	MW	C	N
0.906	23.01	2766	.50	12.7	.686	17.4	417	73	.11	2.8	46	205	.33	8.4	0.110	2.8	3.00	SPR	CG	Z
0.906	23.01	1777	.59	15.1	.782	19.9	11	1.9	.21	5.2	2.2	9.9	.39	9.9	0.062	1.6	5.25	HD	C	Z
0.906	23.01	3542	.59	15.1	.780	19.8	19	3.3	.34	8.7	6.4	29	.25	6.4	0.063	1.6	4.00	HD	CG	Z
0.906	23.01	12410	.63	15.9	.798	20.3	20	3.5	.32	8.2	6.4	28	.22	5.5	0.054	1.4	3.00	SPR	C	N
0.906	23.01	10008	.63	15.9	.782	19.9	35	6.2	.27	6.9	9.6	43	.19	4.7	0.062	1.6	3.00	SPR	CG	Z
0.906	23.01	10118	.63	15.9	.782	19.9	18	3.1	.32	8.0	5.6	25	.31	7.9	0.062	1.6	4.00	HD	C	Z
0.906	23.01	2954	.75	19.1	.786	20.0	15	2.7	.51	13	7.8	35	.24	6.1	0.060	1.5	4.00	SPR	CG	Z
0.906	23.01	A11-51	.75	19.1	.664	16.9	340	59	.18	4.5	61	270	.47	11.9	0.121	3.1	4.00	SPR	CG	Z
0.906	23.01	10551	.81	20.6	.834	21.2	2.4	.43	.65	17	1.6	7.1	.16	4.1	0.036	0.9	3.50	SPR	C	Z
0.906	23.01	2538	.91	23.0	.656	16.7	368	65	.18	4.6	67	297	.50	12.7	0.125	3.2	4.00	SPR	CG	Z
0.906	23.01	11847	1.16	29.4	.812	20.6	4.9	.86	.86	22	4.2	19	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.906	23.01	11536	1.16	29.4	.760	19.3	24	4.1	.63	16	15	66	.44	11.1	0.073	1.9	5.00	SPR	CG	Z
0.906	23.01	10390	1.22	31.0	.736	18.7	27	4.7	.62	16	17	75	.60	15.1	0.085	2.2	7.00	SPR	CG	Z
0.906	23.01	1579	1.25	31.8	.746	18.9	42	7.3	.46	12	19	86	.44	11.2	0.080	2.0	4.50	SPR	C	Z
0.906	23.01	PP-72	1.25	31.8	.746	18.9	23	4.1	.73	19	17	75	.52	13.2	0.080	2.0	6.50	SPR	CG	BO
0.906	23.01	10463	1.25	31.8	.734	18.6	25	4.3	.58	15	14	64	.67	16.9	0.086	2.2	7.75	SPR	CG	Z
0.906	23.01	11121	1.25	31.8	.724	18.4	33	5.8	.57	14	19	84	.68	17.3	0.091	2.3	7.50	HD	CG	Z
0.906	23.01	PP-45	1.28	32.5	.846	21.5	.17	.03	.89	23	.15	.69	.39	9.9	0.030	0.8	12.0	MW	C	GI
0.906	23.01	2881	1.31	33.3	.782	19.9	12	2.1	.81	21	9.6	43	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.906	23.01	10567	1.38	34.9	.746	18.9	17	2.9	.72	18	12	53	.66	16.8	0.080	2.0	8.25	SPR	CG	Z
0.906	23.01	10397	1.47	37.3	.750	19.1	16	2.7	.84	21	13	59	.62	15.8	0.078	2.0	8.00	SPR	CG	Z
0.906	23.01	S-1546	1.50	38.1	.864	21.9	.03	.01	1.2	31	.04	.19	.28	7.1	0.021	0.5	12.3	SST	C	N
0.906	23.01	11319	1.50	38.1	.750	19.1	19	3.3	.88	22	16	73	.62	15.8	0.078	2.0	7.00	SPR	C	Z
0.906	23.01	10377	1.50	38.1	.746	18.9	16	2.8	.82	21	13	59	.68	17.3	0.080	2.0	8.50	SPR	CG	Z
0.906	23.01	10345	1.50	38.1	.736	18.7	23	4.0	.74	19	17	74	.77	19.4	0.085	2.2	8.00	SPR	C	Z
0.906	23.01	S-1196	1.50	38.1	.696	17.7	49	8.6	.66	17	33	145	.84	21.3	0.105	2.7	8.00	SST	CG	N
0.906	23.01	B17-187	1.53	38.9	.734	18.6	29	5.0	.84	21	24	107	.60	15.3	0.086	2.2	7.00	SPR	CG	Z
0.906	23.01	10674	1.56	39.7	.766	19.5	9.8	1.7	.93	24	9.2	41	.63	16.0	0.070	1.8	8.00	SPR	C	Z
0.906	23.01	10842	1.56	39.7	.746	18.9	20	3.5	.90	23	18	80	.66	16.8	0.080	2.0	7.25	SPR	C	N
0.906	23.01	3149	1.56	39.7	.666	16.9	112	20	.53	13	59	264	.90	22.9	0.120	3.0	7.50	SPR	CG	Z
0.906	23.01	3754	1.75	44.5	.696	17.7	68	12	.61	15	41	184	.74	18.7	0.105	2.7	7.00	HD	CG	Z
0.906	23.01	11941	1.75	44.5	.636	16.2	174	30	.47	12	81	361	1.08	27.4	0.135	3.4	8.00	SPR	CG	Z
0.906	23.01	1603	2.13	54.0	.810	20.6	1.1	.19	1.5	38	1.6	7.3	.62	15.8	0.048	1.2	13.0	MW	CG	Z
0.906	23.01	10739	2.25	57.2	.790	20.1	4.9	.85	1.6	41	7.9	35	.49	12.5	0.058	1.5	7.50	SPR	C	N
0.906	23.01	10614	2.31	58.7	.746	18.9	12	2.0	1.4	36	17	74	.88	22.4	0.080	2.0	11.0	SPR	CG	Z
0.906	23.01	11924	2.34	59.5	.746	18.9	16	2.8	1.2	31	19	86	.68	17.3	0.080	2.0	8.50	SPR	CG	Z
0.906	23.01	11853	2.38	60.3	.840	21.3	.65	.11	2.2	55	1.4	6.2	.21	5.4	0.033	0.8	5.50	SST	C	N
0.906	23.01	10378	2.38	60.3	.782	19.9	2.9	.52	1.5	38	4.4	20	.87	22.0	0.062	1.6	14.0	SPR	CG	Z
0.906	23.01	12104	2.47	62.7	.550	14.0	416	73	.42	11	175	777	1.96	49.7	0.178	4.5	11.0	SPR	CG	Z
0.906	23.01	53	2.75	69.9	.696	17.7	35	6.2	1.2	30	41	184	1.33	33.8	0.105	2.7	11.7	HD	C	Z
0.906	23.01	1665	3.13	79.4	.756	19.2	8.8	1.5	2.2	57	20	87	.90	22.9	0.075	1.9	11.0	MW	C	Z
0.906	23.01	1537	3.16	80.2	.762	19.4	7.2	1.3	2.0	50	14	63	.88	22.4	0.072	1.8	11.3	SPR	C	Z
0.906	23.01	2679	3.19	81.0	.724	18.4	14	2.4	1.7	43	23	104	1.48	37.6	0.091	2.3	15.3	MW	C	Z
0.906	23.01	3463	3.38	85.7	.722	18.3	20	3.5	1.4	36	28	125	1.15	29.2	0.092	2.3	11.5	HD	C	Z
0.906	23.01	B9-55	3.50	88.9	.826	21.0	.52	.09	3.0	76	1.5	6.8	.52	13.2	0.040	1.0	13.0	SPR	CG	N
0.906	23.01	3233	3.56	90.5	.714	18.1	19	3.3	1.7	43	32	142	1.46	37.2	0.096	2.4	14.3	SPR	C	Z
0.906	23.01	12109	3.59	91.3	.760	19.3	8.8	1.5	1.7	43	15	66	.73	18.5	0.073	1.9	10.0	SPR	CG	Z
0.906	23.01	S-3042	3.63	92.1	.610	15.5	115	20	.83	21	95	424	2.07	52.6	0.148	3.8	14.0	SST	CG	N
0.906	23.01	3342	4.00	101.6	.756	19.2	3.7	.65	2.2	57	8.2	37	1.76	44.8	0.075	1.9	23.5	SPR	CG	Z
0.906	23.01	3435	4.25	108.0	.806	20.5	1.4	.25	3.5	90	5.1	23	.65	16.5	0.050	1.3	12.0	SPR	C	Z
0.906	23.01	1689	5.00	127.0	.746	18.9	7.1	1.2	2.7	70	19	86	1.34	34.0	0.080	2.0	16.8	SPR	CG	Z
0.906	23.01	12677	5.38	136.5	.656	16.7	35	6.1	1.9	48	67	297	3.00	76.2	0.125	3.2	23.0	SPR	C	N
0.906	23.01	12158	8.75	222.3	.756	19.2	2.5	.43	6.2	157	15	68	2.55	64.8	0.075	1.9	34.0	SPR	CG	Z
0.906	23.01	3912	9.00	228.6	.696	17.7	13	2.3	3.2	81	41	184	2.94	74.7	0.105	2.7	28.0	SPR	CG	Z
0.906	23.01	3147	14.0	355.6	.724	18.4	4.0	.70	6.8	172	27	121	4.39	111.5	0.091	2.3	47.3	SPR	C	Z
0.906	23.01	3150	14.8	374.7	.696	17.7	5.7	1.0	7.3	185	41	184	6.48	164.7	0.105	2.7	61.8	SPR	CG	Z
0.921	23.39	2817	.50	12.7	.701	17.8	395	69	.16	4.1	63	281	.33	8.4	0.110	2.8	3.00	MW	CG	Z
0.921	23.39	10714	.63	15.9	.811	20.6	20	3.5	.33	8.3	6.6	29	.22	5.6	0.055	1.4	3.00	SPR	C	N
0.921	23.39	11195	.66	16.7	.813	20.7	17	2.9	.35	9.0	5.9	26	.22	5.5	0.054	1.4	3.00	SST	C	N
0.921	23.39	12711	.88	22.2	.775	19.7	33	5.9	.58	15	20	87	.29	7.4	0.073	1.9	4.00	MW	CG	N
0.921	23.39	2690	.88	22.2	.681	17.3	258	45	.32	8.0	82	363	.51	13.0	0.120	3.0	4.25	MW	CG	Z
0.921	23.39	3333	.94	23.8	.801	20.3	7.3	1.3	.58	15	4.2	19	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.921	23.39	10785	1.00	25.4	.775	19.7	30	5.2	.46	12	14	61	.37	9.3	0.073	1.9	4.00	SST	C	N
0.921	23.39	10766	1.13	28.6	.811	20.6	6.8	1.2	.80	20	5.4	24	.33	8.4	0.055	1.4	5.00	SPR	C	N
0.921	23.39	3828	1.13	28.6	.761	19.3	33	5.8	.58	15	19	85	.40	10.2	0.080	2.0	5.00	HD	CG	Z
0.921	23.39	S-3029	1.13	28.6	.721	18.3	90	16	.36	9.2	33	146	.45	11.4	0.100	2.5	4.50	SST	CG	N
0.921	23.39	B18-158	1.25	31.8	.817	20.8	2.8	.50	.89	23	2.5	11	.36	9.2	0.052	1.3	7.00	SST	CG	N
0.921	23.39	BB-43	1.25	31.8	.801	20.3	7.3	1.3	.89	23	6.5	29	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.921	23.39	10197	1.25	31.8	.749	19.0	27	4.7	.65	16	18	78	.60	15.3	0.086	2.2	7.00	SPR	CG	Z
0.921	23.39	11250	1.25	31.8	.731	18.6	59	10	.51	13	30	135	.52	13.3	0.095	2.4	5.50	SPR	CG	Z
0.921	23.39	11382	1.31	33.3	.813	20.7	3.3	.58	.93	24	3.1	14	.38	9.6	0.054	1.4	7.00	SST	CG	N
0.921	23.39	10716	1.31	33.3	.739	18.8	46	8.1	.58	15	27	119	.61	15.6	0.091	2.3	5.75	SPR	C	Z
0.921	23.39	10456	1.38	34.9	.749	19.0	23	4.1	.71	18	17	74	.67	16.9	0.086	2.2	7.75	SPR	CG	Z
0.921	23.39	10706	1.38	34.9	.739	18.8	31	5.5	.69	18	22	96	.68	17.3	0.091	2.3	7.50	SPR	CG	Z
0.921	23.39	11233	1.38	34.9	.739	18.8	38	6.7	.70	18	27	119	.59	15.0	0.091	2.3	6.50	SPR	CG	Z
0.921	23.39	S-474	1.50	38.1	.761	19.3	29	5.0	.62	16	18	80	.40	10.2	0.080	2.0	5.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.921	23.39	S-140	1.50	38.1	.547	13.9	1104	193	.15	3.7	163	725	1.03	26.1	0.187	4.7	5.50	SST	CG	N
0.921	23.39	10254	1.56	39.7	.771	19.6	33	5.8	.47	12	16	70	.32	8.1	0.075	1.9	4.25	SPR	CG	Z
0.921	23.39	10610	1.56	39.7	.703	17.9	79	14	.53	14	42	188	.68	17.3	0.109	2.8	6.25	SST	CG	N
0.921	23.39	3189	1.59	40.5	.761	19.3	15	2.7	.91	23	14	62	.68	17.3	0.080	2.0	8.50	SPR	CG	GI
0.921	23.39	11207	1.69	42.8	.721	18.3	58	10	.57	14	33	146	.60	15.2	0.100	2.5	6.00	SST	CG	N
0.921	23.39	3815	1.75	44.5	.661	16.8	166	29	.43	11	72	319	.91	23.1	0.130	3.3	7.00	SPR	CG	Z
0.921	23.39	PP-1	2.03	51.6	.621	15.8	244	43	.43	11	106	470	1.28	32.4	0.150	3.8	8.50	SPR	CG	Z
0.921	23.39	11637	2.06	52.4	.799	20.3	4.5	.78	1.5	38	6.8	30	.55	13.9	0.061	1.5	9.00	SPR	CG	Z
0.921	23.39	11236	2.38	60.3	.797	20.2	2.8	.49	1.5	38	4.2	19	.87	22.0	0.062	1.6	14.0	SPR	CG	Z
0.921	23.39	1737	2.75	69.9	.665	16.9	72	13	.98	25	70	313	1.63	41.5	0.128	3.3	12.8	HD	CG	Z
0.921	23.39	S-1611	2.78	70.6	.731	18.6	17	2.9	1.5	39	26	115	1.24	31.4	0.095	2.4	13.0	SST	CG	N
0.921	23.39	10597	3.00	76.2	.777	19.7	7.0	1.2	2.0	51	14	62	.86	21.9	0.072	1.8	11.0	SPR	C	Z
0.921	23.39	3351	3.00	76.2	.761	19.3	9.9	1.7	1.9	49	19	85	.96	24.4	0.080	2.0	12.0	HD	CG	Z
0.921	23.39	3070	3.00	76.2	.671	17.0	75	13	.87	22	66	293	1.41	35.7	0.125	3.2	11.3	SPR	CG	GI
0.921	23.39	MM-92	3.00	76.2	.541	13.7	505	88	.39	10	198	880	2.19	55.5	0.190	4.8	11.5	SPR	CG	N
0.921	23.39	12103	3.22	81.8	.821	20.9	1.5	.26	2.7	68	4.0	18	.55	14.0	0.050	1.3	11.0	SPR	CG	Z
0.921	23.39	1888	3.31	84.1	.777	19.7	7.0	1.2	2.0	51	14	62	.86	21.9	0.072	1.8	11.0	HD	C	Z
0.921	23.39	1685	4.50	114.3	.711	18.1	25	4.3	1.7	42	41	182	1.68	42.7	0.105	2.7	15.0	SPR	C	Z
0.921	23.39	12174	4.75	120.7	.711	18.1	21	3.8	1.9	48	41	182	1.79	45.3	0.105	2.7	17.0	SPR	CG	Z
0.921	23.39	12040	5.50	139.7	.791	20.1	2.0	.36	4.1	103	8.3	37	1.43	36.3	0.065	1.7	22.0	SPR	CG	Z
0.921	23.39	S-462	6.25	158.8	.777	19.7	3.7	.65	3.5	89	13	58	1.28	32.5	0.072	1.8	16.8	SST	C	N
0.921	23.39	3285	6.50	165.1	.701	17.8	19	3.3	2.4	61	45	201	2.53	64.3	0.110	2.8	23.0	SPR	CG	Z
0.921	23.39	4017	19.8	501.7	.631	16.0	20	3.5	5.0	126	98	437	10.2	259.7	0.145	3.7	70.5	SPR	CG	Z
0.938	23.83	3663	.44	11.1	.828	21.0	19	3.3	.27	6.9	5.2	23	.17	4.2	0.055	1.4	3.00	SPR	CG	Z
0.938	23.83	3687	.63	15.9	.828	21.0	19	3.3	.34	8.6	6.5	29	.22	5.6	0.055	1.4	3.00	SPR	C	Z
0.938	23.83	S-3040	.75	19.1	.678	17.2	451	79	.14	3.6	63	282	.46	11.6	0.130	3.3	3.50	SST	CG	N
0.938	23.83	4235	.75	19.1	.668	17.0	615	108	.13	3.2	79	350	.47	12.0	0.135	3.4	3.50	SPR	CG	Z
0.938	23.83	MM-75	.78	19.8	.758	19.3	46	8.0	.33	8.4	15	67	.45	11.4	0.090	2.3	5.00	SST	CG	N
0.938	23.83	1855	.94	23.8	.698	17.7	218	38	.37	9.4	80	357	.54	13.7	0.120	3.0	4.50	MW	CG	Z
0.938	23.83	S-902	.94	23.8	.694	17.6	260	46	.21	5.4	55	245	.49	12.4	0.122	3.1	4.00	SST	CG	N
0.938	23.83	924	1.13	28.6	.728	18.5	86	15	.44	11	38	170	.68	17.3	0.105	2.7	5.50	HD	C	Z
0.938	23.83	11762	1.16	29.4	.622	15.8	755	132	.16	4.1	121	537	.71	18.1	0.158	4.0	4.50	SPR	CG	Z
0.938	23.83	2609	1.19	30.2	.614	15.6	605	106	.21	5.4	130	577	.89	22.6	0.162	4.1	5.50	HD	CG	Z
0.938	23.83	GG-41	1.22	31.0	.758	19.3	46	8.0	.52	13	24	105	.45	11.4	0.090	2.3	5.00	SST	CG	N
0.938	23.83	1617	1.25	31.8	.826	21.0	5.2	.90	.86	22	4.4	20	.39	10.0	0.056	1.4	6.00	SPR	C	Z
0.938	23.83	10524	1.25	31.8	.734	18.6	71	12	.52	13	37	164	.59	14.9	0.102	2.6	5.75	SPR	CG	Z
0.938	23.83	B2-59	1.25	31.8	.668	17.0	284	50	.39	9.8	110	489	.71	18.0	0.135	3.4	5.25	MW	CG	N
0.938	23.83	10211	1.38	34.9	.814	20.7	9.0	1.6	1.0	26	9.3	41	.34	8.7	0.062	1.6	5.50	SPR	CG	Z
0.938	23.83	10268	1.38	34.9	.814	20.7	11	1.8	.88	22	9.3	41	.37	9.4	0.062	1.6	5.00	SPR	C	N
0.938	23.83	S-1123	1.38	34.9	.768	19.5	26	4.6	.78	20	21	91	.60	15.1	0.085	2.2	6.00	SST	C	N
0.938	23.83	11794	1.38	34.9	.700	17.8	105	18	.53	14	56	249	.83	21.2	0.119	3.0	7.00	SPR	CG	Z
0.938	23.83	11738	1.38	34.9	.666	16.9	318	56	.25	6.4	80	357	.68	17.3	0.136	3.5	5.00	SPR	CG	Z
0.938	23.83	11724	1.41	35.7	.754	19.2	43	7.4	.64	16	27	121	.55	14.0	0.092	2.3	6.00	SPR	CG	Z
0.938	23.83	10726	1.50	38.1	.848	21.5	.97	.17	.98	25	.96	4.3	.52	13.1	0.045	1.1	10.5	SPR	C	Z
0.938	23.83	3885	1.50	38.1	.738	18.7	54	9.5	.64	16	35	155	.65	16.5	0.100	2.5	6.50	SPR	CG	GI
0.938	23.83	10977	1.50	38.1	.728	18.5	76	13	.53	13	40	179	.63	16.0	0.105	2.7	6.00	HD	CG	Z
0.938	23.83	PP-62	1.50	38.1	.718	18.2	93	16	.48	12	45	198	.66	16.8	0.110	2.8	6.00	SPR	CG	Z
0.938	23.83	3625	1.50	38.1	.688	17.5	137	24	.66	17	90	401	.84	21.4	0.125	3.2	6.75	MW	CG	Z
0.938	23.83	CC-34	1.50	38.1	.618	15.7	355	62	.31	8.0	111	495	1.12	28.4	0.160	4.1	7.00	SST	CG	N
0.938	23.83	11149	1.59	40.5	.698	17.7	121	21	.47	12	57	255	.78	19.8	0.120	3.0	6.50	SPR	CG	Z
0.938	23.83	S-443	1.66	42.1	.838	21.3	3.8	.66	1.2	31	4.6	20	.25	6.4	0.050	1.3	5.00	SST	CG	N
0.938	23.83	828	1.75	44.5	.698	17.7	99	17	.58	15	57	255	1.02	25.9	0.120	3.0	7.50	HD	C	Z
0.938	23.83	S-940	1.78	45.2	.794	20.2	13	2.3	.98	25	13	57	.50	12.8	0.072	1.8	6.00	SST	C	N
0.938	23.83	10622	1.78	45.2	.728	18.5	54	9.4	.69	18	37	166	.74	18.7	0.105	2.7	7.00	SST	CG	N
0.938	23.83	11719	1.84	46.8	.666	16.9	191	33	.42	11	80	357	1.09	27.6	0.136	3.5	7.00	SPR	C	Z
0.938	23.83	3683	1.94	49.2	.810	20.6	5.8	1.0	1.4	36	8.1	36	.53	13.4	0.064	1.6	8.25	SPR	CG	Z
0.938	23.83	67	2.00	50.8	.778	19.8	17	3.1	1.1	27	19	83	.67	16.9	0.080	2.0	7.33	HD	C	Z
0.938	23.83	S-1361	2.00	50.8	.770	19.6	15	2.7	1.3	33	20	88	.71	18.1	0.084	2.1	8.50	SST	CG	N
0.938	23.83	S-463	2.03	51.6	.698	17.7	76	13	.69	18	52	233	.99	25.1	0.120	3.0	8.25	SST	CG	N
0.938	23.83	12448	2.06	52.4	.778	19.8	16	2.8	1.2	29	19	83	.62	15.7	0.080	2.0	7.75	SPR	CG	N
0.938	23.83	10514	2.13	54.0	.766	19.5	23	4.0	1.0	26	23	103	.65	16.4	0.086	2.2	7.50	SPR	CG	Z
0.938	23.83	11598	2.13	54.0	.549	13.9	834	146	.25	6.3	208	926	1.75	44.5	0.195	4.9	8.00	SPR	CG	Z
0.938	23.83	3922	2.25	57.2	.738	18.7	31	5.3	1.1	29	35	155	1.00	25.4	0.100	2.5	10.0	SPR	CG	Z
0.938	23.83	3458	2.25	57.2	.688	17.5	109	19	.59	15	65	288	1.00	25.4	0.125	3.2	8.00	HD	CG	Z
0.938	23.83	12227	2.41	61.1	.784	19.9	16	2.8	1.1	27	17	75	.62	15.6	0.077	2.0	7.00	SPR	C	Z
0.938	23.83	10046	2.50	63.5	.836	21.2	2.8	.49	1.9	47	5.2	23	.41	10.4	0.051	1.3	7.00	SPR	C	Z
0.938	23.83	3295	2.63	66.7	.624	15.8	193	34	.61	16	119	528	1.81	45.9	0.157	4.0	11.5	SPR	CG	Z
0.938	23.83	10660	2.66	67.5	.782	19.9	10	1.8	1.7	43	17	77	.53	13.5	0.078	2.0	7.50	PB	CG	N
0.938	23.83	11936	2.78	70.6	.780	19.8	11	1.9	1.6	42	18	80	.79	20.1	0.079	2.0	10.0	SPR	CG	Z
0.938	23.83	12084	2.84	72.2	.578	14.7	408	71	.41	10	167	744	1.89	48.0	0.180	4.6	10.5	SPR	CG	Z
0.938	23.83	1701	3.00	76.2	.794	20.2	6.6	1.2	2.1	53	14	61	.86	21.9	0.072	1.8	11.0	SPR	C	Z
0.938	23.83	832	3.00	76.2	.728	18.5	30	5.3	1.3	34	40	179	1.26	32.0	0.105	2.7	12.0	HD	CG	Z
0.938	23.83	3939	3.00	76.2	.688	17.5	54	9.5	1.2	30	65	288	1.75	44.5	0.125	3.2	14.0	SPR	CG	Z
0.938	23.83	S-3162	3.25	82.6	.752	19.1	19	3.4	1.3	34	26	116	1.02	26.0	0.093	2.4	10.0	SST	C	N
0.938	23.83	42	3.25	82.6	.524	13.3	588	103	.42	11	248	1101	2.79	71.0	0.207	5.3	13.5	HD	CG	Z
0.938	23.83	11494	3.38	85.7	.740	18.8	20	3.4	1.7	44	34	150	1.49	37.7	0.1	2.5	14.0	SPR	C	Z
0.938	23.83	4287	3.63	92.1	.794	20.2	7.9	1.4	1.7	44	14	61	.68	17.4	0.072	1.8	9.50	SPR	CG	Z
0.938	23.83	1541	3.75	95.3	.698	17.7	52	9.1	1.1	28	57	255	1.62	41.1	0.120	3.0	12.5	SPR	C	Z
0.938	23.83	36	4.00	101.6	.642	16.3	89	16	1.2	29	103	456	2.63	66.7	0.148	3.8	17.8	HD	CG	Z
0.938	23.83	10650	4.19	106.4	.804	20.4	4.9	.85	2.4	61	12	52	.74	18.7	0.067	1.7	11.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.938	23.83	3125	4.31	109.5	.798	20.3	5.3	.92	2.4	61	13	56	.84	21.3	0.070	1.8	12.0	SPR	CG	Z
0.938	23.83	S-1407	4.38	111.1	.814	20.7	1.8	.32	3.3	84	6.1	27	1.05	26.8	0.062	1.6	17.0	SST	CG	N
0.938	23.83	3931	4.50	114.3	.626	15.9	122	21	.95	24	116	518	2.43	61.6	0.156	4.0	15.8	SPR	CG	Z
0.938	23.83	4342	5.00	127.0	.742	18.8	15	2.7	2.2	55	33	146	1.64	41.7	0.098	2.5	16.8	SPR	CG	Z
0.938	23.83	332	5.00	127.0	.584	14.8	175	31	.96	24	167	743	3.60	91.4	0.177	4.5	20.3	HD	CG	Z
0.938	23.83	2843	5.13	130.2	.764	19.4	10	1.8	2.3	59	24	107	1.31	33.1	0.087	2.2	15.0	SPR	CG	GI
0.938	23.83	S-154	5.25	133.4	.642	16.3	55	9.7	1.7	42	92	411	3.55	90.2	0.148	3.8	24.0	SST	CG	N
0.938	23.83	11627	5.25	133.4	.642	16.3	67	12	1.5	39	103	456	3.37	85.5	0.148	3.8	22.8	SPR	CG	Z
0.938	23.83	4149	6.00	152.4	.754	19.2	9.0	1.6	3.0	77	27	121	2.02	51.4	0.092	2.3	21.0	SPR	C	Z
0.938	23.83	3113	6.38	161.9	.794	20.2	4.1	.72	3.3	85	14	61	1.19	30.2	0.072	1.8	16.5	SPR	CG	Z
0.938	23.83	2569	7.25	184.2	.728	18.5	15	2.6	2.7	67	40	179	2.42	61.3	0.105	2.7	22.0	SPR	C	Z
0.938	23.83	11945	8.75	222.3	.810	20.6	1.1	.19	6.5	165	7.1	32	2.24	56.9	0.064	1.6	35.0	SPR	CG	Z
0.938	23.83	4233	9.75	247.7	.698	17.7	23	4.0	2.5	64	57	255	3.24	82.3	0.120	3.0	26.0	SPR	C	Z
0.938	23.83	3076	10.5	266.7	.756	19.2	6.8	1.2	3.9	98	26	117	2.34	59.5	0.091	2.3	25.8	SPR	CG	Z
0.938	23.83	1938	11.1	282.6	.664	16.9	29	5.0	2.9	73	82	365	5.00	127.0	0.137	3.5	36.5	SPR	CG	Z
0.953	24.21	NN-24	.69	17.4	.633	16.1	1511	265	.08	2.1	124	549	.52	13.2	0.160	4.1	3.25	SPR	CG	GI
0.953	24.21	11915	.88	22.2	.771	19.6	68	12	.35	9.0	24	107	.36	9.2	0.091	2.3	4.00	SST	CG	N
0.953	24.21	KK-68	.94	23.8	.833	21.2	6.5	1.1	.58	15	3.8	17	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.953	24.21	3343	.94	23.8	.823	20.9	9.2	1.6	.55	14	5.0	22	.39	9.9	0.065	1.7	6.00	SPR	CG	Z
0.953	24.21	3010	.97	24.6	.771	19.6	77	13	.34	8.6	26	115	.36	9.2	0.091	2.3	4.00	SPR	CG	GI
0.953	24.21	S-1559	.98	25.0	.849	21.6	5.0	.88	.70	18	3.5	16	.29	7.3	0.052	1.3	4.50	SST	C	N
0.953	24.21	12699	1.00	25.4	.873	22.2	2.8	.49	.82	21	2.3	10	.18	4.6	0.040	1.0	3.50	SST	C	N
0.953	24.21	10683	1.00	25.4	.849	21.6	5.7	.99	.73	18	4.1	18	.27	6.9	0.052	1.3	4.25	SST	C	N
0.953	24.21	CC-72	1.00	25.4	.833	21.2	13	2.3	.63	16	8.3	37	.30	7.6	0.060	1.5	4.00	SPR	C	Z
0.953	24.21	3396	1.13	28.6	.825	21.0	12	2.2	.76	19	9.4	42	.37	9.3	0.064	1.6	4.75	SPR	C	Z
0.953	24.21	1907	1.25	31.8	.845	21.5	4.2	.74	.93	24	3.9	17	.32	8.2	0.054	1.4	6.00	SPR	CG	Z
0.953	24.21	4271	1.25	31.8	.829	21.1	7.5	1.3	.82	21	6.1	27	.43	11.0	0.062	1.6	6.00	SPR	C	Z
0.953	24.21	N-126	1.25	31.8	.797	20.2	14	2.5	.70	18	9.9	44	.55	13.9	0.078	2.0	7.00	SST	CG	N
0.953	24.21	2761	1.25	31.8	.639	16.2	433	76	.31	7.8	133	593	.94	23.9	0.157	4.0	6.00	MW	CG	Z
0.953	24.21	S-1254	1.28	32.5	.793	20.1	15	2.7	.72	18	11	49	.56	14.2	0.080	2.0	7.00	SST	CG	N
0.953	24.21	12213	1.31	33.3	.599	15.2	863	151	.19	4.9	165	733	.97	24.7	0.177	4.5	5.50	SPR	CG	GI
0.953	24.21	11385	1.41	35.7	.743	18.9	64	11	.62	16	39	175	.79	20.0	0.105	2.7	6.50	SPR	C	Z
0.953	24.21	11541	1.47	37.3	.721	18.3	137	24	.38	9.5	51	228	.73	18.4	0.116	2.9	5.25	SPR	CG	GI
0.953	24.21	S-94	1.50	38.1	.703	17.9	90	16	.50	13	45	199	1.00	25.4	0.125	3.2	8.00	SST	CG	N
0.953	24.21	B18-140	1.50	38.1	.619	15.7	430	75	.29	7.3	124	552	1.13	28.6	0.167	4.2	6.75	SST	CG	N
0.953	24.21	11856	1.63	41.3	.805	20.4	11	2.0	1.1	28	12	55	.52	13.2	0.074	1.9	7.00	SST	CG	N
0.953	24.21	3954	1.75	44.5	.809	20.5	6.6	1.2	.92	23	6.1	27	.83	21.0	0.072	1.8	10.5	SPR	C	Z
0.953	24.21	3385	1.75	44.5	.797	20.2	26	4.6	.65	16	17	76	.39	9.9	0.078	2.0	5.00	SPR	CG	Z
0.953	24.21	11492	1.75	44.5	.689	17.5	158	28	.46	12	73	323	1.06	26.8	0.132	3.4	7.00	SPR	CG	GI
0.953	24.21	2932	1.81	46.0	.739	18.8	44	7.8	.85	22	38	168	.96	24.5	0.107	2.7	9.00	SPR	CG	Z
0.953	24.21	S-984	1.91	48.4	.791	20.1	11	1.9	1.1	29	12	55	.77	19.5	0.081	2.1	9.50	SST	CG	N
0.953	24.21	AA-72	1.94	49.2	.693	17.6	98	17	.70	18	69	307	1.24	31.4	0.130	3.3	9.50	SPR	CG	Z
0.953	24.21	11157	2.00	50.8	.699	17.8	140	24	.48	12	67	297	.86	21.8	0.127	3.2	6.75	SPR	CG	Z
0.953	24.21	2875	2.13	54.0	.717	18.2	77	13	.70	18	54	240	1.09	27.7	0.118	3.0	8.25	SPR	C	Z
0.953	24.21	10566	2.28	57.9	.823	20.9	7.0	1.2	1.5	38	11	47	.54	13.6	0.065	1.7	7.25	SPR	C	Z
0.953	24.21	MM-54	2.44	61.9	.593	15.1	483	85	.29	7.5	142	633	1.44	36.6	0.180	4.6	8.00	SST	CG	N
0.953	24.21	S-1149	2.75	69.9	.793	20.1	11	1.9	1.6	40	17	77	.80	20.3	0.080	2.0	9.00	SST	C	N
0.953	24.21	11868	3.00	76.2	.783	19.9	12	2.2	1.7	43	21	92	.87	22.1	0.085	2.2	10.3	SST	CG	N
0.953	24.21	2917	3.69	93.6	.711	18.1	51	8.9	1.1	29	58	258	1.63	41.5	0.121	3.1	12.5	SPR	C	Z
0.953	24.21	2914	3.75	95.3	.793	20.1	11	1.9	1.7	42	18	82	.88	22.4	0.080	2.0	10.0	SPR	C	Z
0.953	24.21	11524	3.94	100.0	.743	18.9	23	4.0	1.7	44	40	176	1.63	41.3	0.105	2.7	14.5	SPR	CG	Z
0.953	24.21	11955	4.00	101.6	.763	19.4	19	3.2	1.6	40	29	131	1.24	31.4	0.095	2.4	12.0	SPR	C	Z
0.953	24.21	3423	4.38	111.1	.819	20.8	4.6	.81	2.5	63	12	51	.80	20.4	0.067	1.7	11.0	SPR	C	Z
0.953	24.21	3335	4.44	112.7	.693	17.6	59	10	1.2	30	69	309	2.02	51.2	0.130	3.3	14.5	SPR	C	Z
0.953	24.21	2642	4.81	122.2	.641	16.3	99	17	1.2	29	115	511	2.96	75.3	0.156	4.0	19.0	SPR	CG	Z
0.953	24.21	11558	7.75	196.9	.793	20.1	3.3	.57	5.4	136	18	78	2.40	61.0	0.080	2.0	29.0	SPR	CG	Z
0.953	24.21	3341	8.00	203.2	.539	13.7	254	45	.96	24	245	1088	5.59	142.0	0.207	5.3	27.0	SPR	CG	Z
0.968	24.59	S-182	.69	17.4	.786	20.0	86	15	.27	7.0	24	105	.41	10.4	0.091	2.3	3.50	SST	C	N
0.968	24.59	11911	.75	19.1	.880	22.4	1.8	.32	.47	12	.86	3.8	.28	7.1	0.044	1.1	5.33	SST	C	N
0.968	24.59	KK-54	.78	19.8	.688	17.5	486	85	.17	4.4	85	378	.56	14.2	0.140	3.6	4.00	SPR	CG	GI
0.968	24.59	11692	1.00	25.4	.844	21.4	9.5	1.7	.69	18	6.6	29	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
0.968	24.59	3657	1.03	26.2	.842	21.4	15	2.7	.62	16	9.4	42	.32	8.0	0.063	1.6	4.00	SPR	C	Z
0.968	24.59	S-1476	1.09	27.8	.878	22.3	2.2	.38	.82	21	1.8	8.0	.27	6.9	0.045	1.1	5.00	SST	C	N
0.968	24.59	S-1140	1.13	28.6	.882	22.4	2.0	.34	.88	22	1.7	7.7	.25	6.3	0.043	1.1	4.75	SST	C	N
0.968	24.59	S-1256	1.31	33.3	.874	22.2	3.9	.68	1.0	26	4.0	18	.19	4.8	0.047	1.2	4.00	SST	CG	N
0.968	24.59	PP-78	1.44	36.5	.848	21.5	6.2	1.1	1.1	27	6.7	30	.36	9.1	0.060	1.5	6.00	SPR	CG	Z
0.968	24.59	S-343	1.50	38.1	.794	20.2	30	5.2	.73	19	22	97	.48	12.2	0.087	2.2	5.50	SST	CG	N
0.968	24.59	11128	1.50	38.1	.614	15.6	671	117	.24	6.2	163	724	1.11	28.1	0.177	4.5	6.25	SPR	CG	Z
0.968	24.59	12770	1.56	39.7	.592	15.0	946	166	.19	4.9	184	820	1.13	28.7	0.188	4.8	6.00	HD	CG	Z
0.968	24.59	11183	1.63	41.3	.728	18.5	122	21	.46	12	56	248	.72	18.3	0.120	3.0	6.00	SPR	CG	Z
0.968	24.59	S-1230	1.75	44.5	.888	22.6	.89	.16	1.5	37	1.3	5.7	.30	7.6	0.040	1.0	6.50	SST	C	N
0.968	24.59	S-80	1.88	47.6	.808	20.5	9.7	1.7	1.1	28	11	48	.76	19.3	0.080	2.0	9.50	SST	CG	N
0.968	24.59	11819	2.00	50.8	.794	20.2	21	3.7	1.0	26	22	97	.61	15.5	0.087	2.2	7.00	SST	CG	N
0.968	24.59	10484	2.00	50.8	.718	18.2	107	19	.59	15	63	280	.94	23.8	0.125	3.2	7.50	SPR	CG	Z
0.968	24.59	10510	2.19	55.6	.816	20.7	17	3.0	.93	24	16	70	.46	11.6	0.076	1.9	6.00	SPR	CG	Z
0.968	24.59	11106	2.25	57.2	.874	22.2	2.2	.39	1.9	49	4.3	19	.33	8.4	0.047	1.2	6.00	MW	C	N
0.968	24.59	10496	2.25	57.2	.852	21.6	3.9	.69	1.8	45	6.9	31	.49	12.5	0.058	1.5	7.50	SPR	C	Z
0.968	24.59	2504	2.25	57.2	.838	21.3	3.5	.61	1.5	37	5.1	23	.78	19.8	0.065	1.7	12.0	HD	CG	Z
0.968	24.59	3403	2.25	57.2	.768	19.5	38	6.7	.88	22	34	150	.78	19.7	0.100	2.5	7.75	SPR	CG	Z
0.968	24.59	3119	2.31	58.7	.844	21.4	4.1	.71	1.7	43	6.9	31	.62	15.7	0.062	1.6	9.00	SPR	C	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.968	24.59	2952	2.34	59.5	.824	20.9	11	1.9	1.2	32	13	59	.50	12.8	0.072	1.8	7.00	SPR	CG	Z
0.968	24.59	3018	2.44	61.9	.808	20.5	11	1.8	1.6	42	17	77	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
0.968	24.59	3223	2.53	64.3	.812	20.6	15	2.6	1.1	28	17	75	.62	15.8	0.078	2.0	7.00	SPR	C	Z
0.968	24.59	4272	2.63	66.7	.688	17.5	111	19	.76	19	85	378	1.51	38.2	0.140	3.6	10.8	SPR	CG	Z
0.968	24.59	A13-68	2.78	70.6	.832	21.1	7.5	1.3	1.5	38	11	50	.48	12.1	0.068	1.7	7.00	SST	CG	N
0.968	24.59	11913	2.81	71.4	.788	20.0	15	2.7	1.5	38	23	102	.90	22.9	0.090	2.3	10.0	SST	CG	N
0.968	24.59	S-429	3.06	77.8	.780	19.8	15	2.7	1.7	43	26	116	1.08	27.5	0.094	2.4	11.5	SST	CG	N
0.968	24.59	B17-176	3.28	83.3	.718	18.2	42	7.4	1.4	35	57	255	1.79	45.5	0.125	3.2	14.3	SST	CG	N
0.968	24.59	3175	3.38	85.7	.878	22.3	.94	.16	2.9	74	2.7	12	.45	11.4	0.045	1.1	10.0	SPR	CG	Z
0.968	24.59	11436	3.38	85.7	.728	18.5	47	8.2	1.2	30	56	248	1.50	38.1	0.120	3.0	12.5	SPR	CG	Z
0.968	24.59	3106	3.38	85.7	.698	17.7	83	14	.92	23	76	340	1.62	41.1	0.135	3.4	12.0	SPR	CG	Z
0.968	24.59	1661	3.50	88.9	.758	19.3	30	5.3	1.3	33	39	173	1.26	32.0	0.105	2.7	11.0	SPR	C	Z
0.968	24.59	11486	4.09	104.0	.808	20.5	8.4	1.5	2.2	55	18	81	1.04	26.4	0.080	2.0	12.0	SPR	CG	Z
0.968	24.59	11640	4.38	111.1	.808	20.5	5.6	.98	3.0	77	17	75	1.36	34.5	0.080	2.0	17.0	SPR	CG	Z
0.968	24.59	10655	4.56	115.9	.720	18.3	49	8.6	1.2	32	61	273	1.67	42.5	0.124	3.1	13.5	SPR	CG	Z
0.968	24.59	11563	7.25	184.2	.778	19.8	7.7	1.3	3.8	96	29	129	2.47	62.7	0.095	2.4	25.0	SPR	CG	Z
0.968	24.59	12457	12.0	304.8	.728	18.5	14	2.4	4.1	103	56	248	4.38	111.3	0.120	3.0	35.5	SPR	CG	Z
0.968	24.59	3065	15.3	387.4	.758	19.3	5.8	1.0	6.7	171	39	173	5.15	130.7	0.105	2.7	49.0	SPR	CG	GI
0.968	24.59	3077	16.1	409.6	.808	20.5	2.0	.34	9.3	236	18	81	3.60	91.4	0.080	2.0	45.0	SPR	CG	Z
0.975	24.77	72327	.75	19.1	.849	21.6	26	4.5	.51	13	13	58	.20	5.0	0.063	1.6	3.13	MW	CG	N
0.975	24.77	72327S	.75	19.1	.849	21.6	22	3.8	.40	10	8.8	39	.20	5.0	0.063	1.6	3.13	SST	CG	N
0.975	24.77	72339	.75	19.1	.831	21.1	40	6.9	.47	12	18	82	.24	6.2	0.072	1.8	3.38	MW	CG	N
0.975	24.77	72339S	.75	19.1	.831	21.1	34	5.9	.37	9.4	12	55	.24	6.2	0.072	1.8	3.38	SST	CG	N
0.975	24.77	72351	.75	19.1	.827	21.0	40	7.0	.49	12	20	87	.26	6.6	0.074	1.9	3.50	MW	CG	N
0.975	24.77	72351S	.75	19.1	.827	21.0	34	5.9	.40	10	13	60	.26	6.6	0.074	1.9	3.50	SST	CG	N
0.975	24.77	72367	.75	19.1	.813	20.7	61	11	.43	11	26	117	.27	6.9	0.081	2.1	3.38	MW	CG	N
0.975	24.77	72367S	.75	19.1	.813	20.7	51	9.0	.34	8.7	18	78	.27	6.9	0.081	2.1	3.38	SST	CG	N
0.975	24.77	72352	.88	22.4	.827	21.0	33	5.8	.60	15	20	88	.28	7.0	0.074	1.9	3.75	MW	CG	N
0.975	24.77	72352S	.88	22.4	.827	21.0	28	4.9	.48	12	13	60	.28	7.0	0.074	1.9	3.75	SST	CG	N
0.975	24.77	72379	.88	22.4	.805	20.4	54	9.4	.54	14	29	129	.34	8.6	0.085	2.2	4.00	MW	CG	N
0.975	24.77	72379S	.88	22.4	.805	20.4	46	8.0	.44	11	20	90	.34	8.6	0.085	2.2	4.00	SST	CG	N
0.975	24.77	72394	.88	22.4	.791	20.1	72	13	.50	13	36	160	.38	9.6	0.092	2.3	4.13	MW	CG	N
0.975	24.77	72394S	.88	22.4	.791	20.1	61	11	.40	10	24	108	.38	9.6	0.092	2.3	4.13	SST	CG	N
0.975	24.77	72403	.88	22.4	.783	19.9	85	15	.48	12	41	182	.40	10.1	0.096	2.4	4.13	MW	CG	N
0.975	24.77	72403S	.88	22.4	.783	19.9	72	13	.38	9.7	28	123	.40	10.1	0.096	2.4	4.13	SST	CG	N
0.975	24.77	72415	.88	22.4	.765	19.4	119	21	.43	11	52	230	.45	11.3	0.105	2.7	4.25	MW	CG	N
0.975	24.77	72415S	.88	22.4	.765	19.4	101	18	.35	9.0	36	160	.45	11.3	0.105	2.7	4.25	SST	CG	N
0.975	24.77	72427	.88	22.4	.751	19.1	155	27	.40	10	62	278	.48	12.1	0.112	2.8	4.25	MW	CG	N
0.975	24.77	72427S	.88	22.4	.751	19.1	131	23	.31	8.0	41	184	.48	12.1	0.112	2.8	4.25	SST	CG	N
0.975	24.77	72455	.88	22.4	.725	18.4	247	43	.33	8.5	82	365	.55	13.9	0.125	3.2	4.38	MW	CG	N
0.975	24.77	72455S	.88	22.4	.725	18.4	210	37	.27	6.9	57	253	.55	13.9	0.125	3.2	4.38	SST	CG	N
0.975	24.77	72467	.88	22.4	.705	17.9	357	62	.30	7.6	106	473	.57	14.6	0.135	3.4	4.25	MW	CG	N
0.975	24.77	72467S	.88	22.4	.705	17.9	303	53	.23	5.7	68	304	.57	14.6	0.135	3.4	4.25	SST	CG	N
0.975	24.77	72328	1.00	25.4	.849	21.6	18	3.2	.71	18	13	58	.23	5.8	0.063	1.6	3.63	MW	CG	N
0.975	24.77	72328S	1.00	25.4	.849	21.6	16	2.7	.57	14	8.8	39	.23	5.8	0.063	1.6	3.63	SST	CG	N
0.975	24.77	72340	1.00	25.4	.831	21.1	28	4.9	.66	17	18	82	.28	7.1	0.072	1.8	3.88	MW	CG	N
0.975	24.77	72340S	1.00	25.4	.831	21.1	24	4.2	.52	13	12	55	.28	7.1	0.072	1.8	3.88	SST	CG	N
0.975	24.77	72353	1.00	25.4	.827	21.0	28	4.9	.69	18	20	87	.31	7.8	0.074	1.9	4.13	MW	CG	N
0.975	24.77	72353S	1.00	25.4	.827	21.0	24	4.2	.56	14	13	60	.31	7.8	0.074	1.9	4.13	SST	CG	N
0.975	24.77	72368	1.00	25.4	.813	20.7	44	7.6	.60	15	26	117	.32	8.2	0.081	2.1	4.00	MW	CG	N
0.975	24.77	72368S	1.00	25.4	.813	20.7	37	6.5	.47	12	18	78	.32	8.2	0.081	2.1	4.00	SST	CG	N
0.975	24.77	72380	1.00	25.4	.805	20.4	52	9.0	.59	15	30	134	.35	8.9	0.085	2.2	4.13	MW	CG	N
0.975	24.77	72380S	1.00	25.4	.805	20.4	44	7.7	.46	12	20	90	.35	8.9	0.085	2.2	4.13	SST	CG	N
0.975	24.77	72395	1.00	25.4	.791	20.1	61	11	.59	15	36	159	.41	10.5	0.092	2.3	4.50	MW	CG	N
0.975	24.77	72395S	1.00	25.4	.791	20.1	52	9.1	.47	12	24	108	.41	10.5	0.092	2.3	4.50	SST	CG	N
0.975	24.77	72404	1.00	25.4	.783	19.9	74	13	.56	14	42	185	.42	10.7	0.096	2.4	4.38	MW	CG	N
0.975	24.77	72404S	1.00	25.4	.783	19.9	63	11	.44	11	28	123	.42	10.7	0.096	2.4	4.38	SST	CG	N
0.975	24.77	72416	1.00	25.4	.765	19.4	101	18	.51	13	52	231	.49	12.3	0.105	2.7	4.63	MW	CG	N
0.975	24.77	72416S	1.00	25.4	.765	19.4	86	15	.42	11	36	160	.49	12.3	0.105	2.7	4.63	SST	CG	N
0.975	24.77	72428	1.00	25.4	.751	19.1	131	23	.47	12	61	272	.53	13.5	0.112	2.8	4.75	MW	CG	N
0.975	24.77	72428S	1.00	25.4	.751	19.1	111	19	.37	9.4	41	184	.53	13.5	0.112	2.8	4.75	SST	CG	N
0.975	24.77	72429	1.00	25.4	.751	19.1	151	26	.42	11	63	281	.49	12.4	0.112	2.8	4.38	MW	CG	N
0.975	24.77	72429S	1.00	25.4	.751	19.1	128	22	.32	8.2	41	184	.49	12.4	0.112	2.8	4.38	SST	CG	N
0.975	24.77	72456	1.00	25.4	.725	18.4	207	36	.41	10	84	374	.59	15.1	0.125	3.2	4.75	MW	CG	N
0.975	24.77	72456S	1.00	25.4	.725	18.4	176	31	.32	8.2	57	253	.59	15.1	0.125	3.2	4.75	SST	CG	N
0.975	24.77	72468	1.00	25.4	.705	17.9	298	52	.36	9.1	106	473	.64	16.3	0.135	3.4	4.75	MW	CG	N
0.975	24.77	72468S	1.00	25.4	.705	17.9	253	44	.27	6.9	68	304	.64	16.3	0.135	3.4	4.75	SST	CG	N
0.975	24.77	72475	1.00	25.4	.679	17.2	459	80	.30	7.7	139	617	.68	17.4	0.148	3.8	4.63	MW	CG	N
0.975	24.77	72475S	1.00	25.4	.679	17.2	390	68	.23	5.8	89	397	.68	17.4	0.148	3.8	4.63	SST	CG	N
0.975	24.77	72329	1.25	31.8	.849	21.6	14	2.5	.91	23	13	58	.26	6.6	0.063	1.6	4.13	MW	CG	N
0.975	24.77	72329S	1.25	31.8	.849	21.6	12	2.1	.73	19	8.8	39	.26	6.6	0.063	1.6	4.13	SST	CG	N
0.975	24.77	72341	1.25	31.8	.831	21.1	22	3.8	.85	22	18	82	.32	8.0	0.072	1.8	4.38	MW	CG	N
0.975	24.77	72341S	1.25	31.8	.831	21.1	18	3.2	.67	17	12	55	.32	8.0	0.072	1.8	4.38	SST	CG	N
0.975	24.77	72354	1.25	31.8	.827	21.0	22	3.8	.90	23	19	87	.35	8.9	0.074	1.9	4.75	MW	CG	N
0.975	24.77	72354S	1.25	31.8	.827	21.0	18	3.2	.73	19	13	60	.35	8.9	0.074	1.9	4.75	SST	CG	N
0.975	24.77	72369	1.25	31.8	.813	20.7	34	5.9	.77	20	26	117	.36	9.3	0.081	2.1	4.50	MW	CG	N
0.975	24.77	72369S	1.25	31.8	.813	20.7	29	5.0	.61	15	18	78	.36	9.3	0.081	2.1	4.50	SST	CG	N
0.975	24.77	72381	1.25	31.8	.805	20.4	40	6.9	.76	19	30	134	.40	10.3	0.085	2.2	4.75	MW	CG	N
0.975	24.77	72381S	1.25	31.8	.805	20.4	34	5.9	.60	15	20	90	.40	10.3	0.085	2.2	4.75	SST	CG	N
0.975	24.77	72396	1.25	31.8	.791	20.1	47	8.2	.77	19	36	159	.48	12.3	0.092	2.3	5.25	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
0.975	24.77	72396S	1.25	31.8	.791	20.1	40	7.0	.61	16	24	108	.48	12.3	0.092	2.3	5.25	SST	CG	N
0.975	24.77	72405	1.25	31.8	.783	19.9	56	9.9	.74	19	42	185	.49	12.5	0.096	2.4	5.13	MW	CG	N
0.975	24.77	72405S	1.25	31.8	.783	19.9	48	8.4	.57	15	28	123	.49	12.5	0.096	2.4	5.13	SST	CG	N
0.975	24.77	72417	1.25	31.8	.765	19.4	81	14	.67	17	54	241	.55	14.0	0.105	2.7	5.25	MW	CG	N
0.975	24.77	72417S	1.25	31.8	.765	19.4	69	12	.52	13	36	160	.55	14.0	0.105	2.7	5.25	SST	CG	N
0.975	24.77	72430	1.25	31.8	.751	19.1	102	18	.62	16	63	281	.62	15.6	0.112	2.8	5.50	MW	CG	N
0.975	24.77	72430S	1.25	31.8	.751	19.1	87	15	.48	12	41	184	.62	15.6	0.112	2.8	5.50	SST	CG	N
0.975	24.77	72457	1.25	31.8	.725	18.4	155	27	.55	14	85	378	.70	17.9	0.125	3.2	5.63	MW	CG	N
0.975	24.77	72457S	1.25	31.8	.725	18.4	132	23	.43	11	57	253	.70	17.9	0.125	3.2	5.63	SST	CG	N
0.975	24.77	72330	1.50	38.1	.849	21.6	12	2.0	1.1	28	13	58	.29	7.4	0.063	1.6	4.63	MW	CG	N
0.975	24.77	72330S	1.50	38.1	.849	21.6	9.9	1.7	.89	23	8.8	39	.29	7.4	0.063	1.6	4.63	SST	CG	N
0.975	24.77	72342	1.50	38.1	.831	21.1	18	3.1	1.0	27	18	82	.36	9.1	0.072	1.8	5.00	MW	CG	N
0.975	24.77	72342S	1.50	38.1	.831	21.1	15	2.6	.83	21	12	55	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.975	24.77	72355	1.50	38.1	.827	21.0	18	3.1	1.1	28	20	87	.40	10.1	0.074	1.9	5.38	MW	CG	N
0.975	24.77	72355S	1.50	38.1	.827	21.0	15	2.6	.89	23	13	60	.40	10.1	0.074	1.9	5.38	SST	CG	N
0.975	24.77	72370	1.50	38.1	.813	20.7	28	4.8	.95	24	26	117	.42	10.5	0.081	2.1	5.13	MW	CG	N
0.975	24.77	72370S	1.50	38.1	.813	20.7	23	4.1	.75	19	18	78	.42	10.5	0.081	2.1	5.13	SST	CG	N
0.975	24.77	72382	1.50	38.1	.805	20.4	32	5.6	.94	24	30	134	.45	11.3	0.085	2.2	5.25	MW	CG	N
0.975	24.77	72382S	1.50	38.1	.805	20.4	27	4.8	.74	19	20	90	.45	11.3	0.085	2.2	5.25	SST	CG	N
0.975	24.77	72397	1.50	38.1	.791	20.1	38	6.6	.95	24	36	159	.55	14.0	0.092	2.3	6.00	MW	CG	N
0.975	24.77	72397S	1.50	38.1	.791	20.1	32	5.6	.76	19	24	108	.55	14.0	0.092	2.3	6.00	SST	CG	N
0.975	24.77	72406	1.50	38.1	.783	19.9	46	8.0	.91	23	42	185	.56	14.3	0.096	2.4	5.88	MW	CG	N
0.975	24.77	72406S	1.50	38.1	.783	19.9	39	6.8	.71	18	28	123	.56	14.3	0.095	2.4	5.88	SST	CG	N
0.975	24.77	72418	1.50	38.1	.765	19.4	65	11	.83	21	54	241	.63	16.0	0.105	2.7	6.00	MW	CG	N
0.975	24.77	72418S	1.50	38.1	.765	19.4	56	9.7	.65	16	36	160	.63	16.0	0.105	2.7	6.00	SST	CG	N
0.975	24.77	72431	1.50	38.1	.751	19.1	82	14	.77	20	63	281	.70	17.8	0.112	2.8	6.25	MW	CG	N
0.975	24.77	72431S	1.50	38.1	.751	19.1	70	12	.59	15	41	184	.70	17.8	0.112	2.8	6.25	SST	CG	N
0.975	24.77	72447	1.50	38.1	.735	18.7	114	20	.68	17	77	344	.75	19.1	0.120	3.0	6.25	MW	CG	N
0.975	24.77	72447S	1.50	38.1	.735	18.7	97	17	.52	13	51	225	.75	19.1	0.120	3.0	6.25	SST	CG	N
0.975	24.77	72458	1.50	38.1	.725	18.4	131	23	.66	17	87	388	.80	20.2	0.125	3.2	6.38	MW	CG	N
0.975	24.77	72458S	1.50	38.1	.725	18.4	112	20	.51	13	57	253	.80	20.2	0.125	3.2	6.38	SST	CG	N
0.975	24.77	72469	1.50	38.1	.705	17.9	177	31	.60	15	106	473	.88	22.3	0.135	3.4	6.50	MW	CG	N
0.975	24.77	72469S	1.50	38.1	.705	17.9	150	26	.45	12	68	304	.88	22.3	0.135	3.4	6.50	SST	CG	N
0.975	24.77	72476	1.50	38.1	.679	17.2	268	47	.52	13	139	617	.96	24.4	0.148	3.8	6.50	MW	CG	N
0.975	24.77	72476S	1.50	38.1	.679	17.2	228	40	.39	9.9	89	397	.96	24.4	0.148	3.8	6.50	SST	CG	N
0.975	24.77	72482	1.50	38.1	.651	16.5	415	73	.42	11	176	782	1.05	26.7	0.162	4.1	6.50	MW	CG	N
0.975	24.77	72482S	1.50	38.1	.651	16.5	353	62	.32	8.0	111	496	1.05	26.7	0.162	4.1	6.50	SST	CG	N
0.975	24.77	72331	1.75	44.5	.849	21.6	9.9	1.7	1.3	34	13	58	.32	8.0	0.063	1.6	5.00	MW	CG	N
0.975	24.77	72331S	1.75	44.5	.849	21.6	8.4	1.5	1.1	27	8.8	39	.32	8.0	0.063	1.6	5.00	SST	CG	N
0.975	24.77	72343	1.75	44.5	.831	21.1	15	2.6	1.2	32	18	82	.40	10.1	0.072	1.8	5.50	MW	CG	N
0.975	24.77	72343S	1.75	44.5	.831	21.1	13	2.2	.98	25	12	55	.40	10.1	0.072	1.8	5.50	SST	CG	N
0.975	24.77	72357	1.75	44.5	.827	21.0	16	2.7	1.3	33	20	89	.43	10.8	0.074	1.9	5.75	MW	CG	N
0.975	24.77	72357S	1.75	44.5	.827	21.0	13	2.3	1.0	26	13	60	.43	10.8	0.074	1.9	5.75	SST	CG	N
0.975	24.77	72371	1.75	44.5	.813	20.7	23	4.1	1.1	29	26	117	.47	11.8	0.081	2.1	5.75	MW	CG	N
0.975	24.77	72371S	1.75	44.5	.813	20.7	20	3.5	.89	23	18	78	.47	11.8	0.081	2.1	5.75	SST	CG	N
0.975	24.77	72383	1.75	44.5	.805	20.4	30	5.3	1.0	25	30	134	.47	11.9	0.085	2.2	5.50	MW	CG	N
0.975	24.77	72383S	1.75	44.5	.805	20.4	26	4.5	.79	20	20	90	.47	11.9	0.085	2.2	5.50	SST	CG	N
0.975	24.77	72384	1.75	44.5	.805	20.4	25	4.3	1.2	31	30	134	.53	13.5	0.085	2.2	6.25	MW	CG	N
0.975	24.77	72384S	1.75	44.5	.805	20.4	21	3.7	.96	24	20	90	.53	13.5	0.085	2.2	6.25	SST	CG	N
0.975	24.77	72407	1.75	44.5	.783	19.9	40	7.0	1.0	27	42	185	.62	15.8	0.096	2.4	6.50	MW	CG	N
0.975	24.77	72407S	1.75	44.5	.783	19.9	34	5.9	.82	21	28	123	.62	15.8	0.096	2.4	6.50	SST	CG	N
0.975	24.77	72419	1.75	44.5	.765	19.4	54	9.5	1.0	25	54	241	.72	18.3	0.105	2.7	6.88	MW	CG	N
0.975	24.77	72419S	1.75	44.5	.765	19.4	46	8.1	.78	20	36	160	.72	18.3	0.105	2.7	6.88	SST	CG	N
0.975	24.77	72432	1.75	44.5	.751	19.1	71	12	.89	23	63	281	.78	19.9	0.112	2.8	7.00	MW	CG	N
0.975	24.77	72432S	1.75	44.5	.751	19.1	60	11	.68	17	41	184	.78	19.9	0.112	2.8	7.00	SST	CG	N
0.975	24.77	72440	1.75	44.5	.745	18.9	78	14	.88	22	68	304	.82	20.8	0.115	2.9	7.13	MW	CG	N
0.975	24.77	72440S	1.75	44.5	.745	18.9	66	12	.67	17	45	199	.82	20.8	0.115	2.9	7.13	SST	CG	N
0.975	24.77	72448	1.75	44.5	.735	18.7	95	17	.81	21	77	344	.84	21.3	0.120	3.0	7.00	MW	CG	N
0.975	24.77	72448S	1.75	44.5	.735	18.7	81	14	.63	16	51	225	.84	21.3	0.120	3.0	7.00	SST	CG	N
0.975	24.77	72459	1.75	44.5	.725	18.4	109	19	.80	20	87	388	.91	23.0	0.125	3.2	7.25	MW	CG	N
0.975	24.77	72459S	1.75	44.5	.725	18.4	93	16	.61	16	57	253	.91	23.0	0.125	3.2	7.25	SST	CG	N
0.975	24.77	72332	2.00	50.8	.849	21.6	8.5	1.5	1.5	39	13	58	.35	8.8	0.063	1.6	5.50	MW	CG	N
0.975	24.77	72332S	2.00	50.8	.849	21.6	7.3	1.3	1.2	31	8.8	39	.35	8.8	0.063	1.6	5.50	SST	CG	N
0.975	24.77	72344	2.00	50.8	.831	21.1	13	2.3	1.4	36	18	82	.44	11.2	0.072	1.8	6.13	MW	CG	N
0.975	24.77	72344S	2.00	50.8	.831	21.1	11	1.9	1.1	29	12	55	.44	11.2	0.072	1.8	6.13	SST	CG	N
0.975	24.77	72358	2.00	50.8	.827	21.0	13	2.3	1.5	38	19	87	.49	12.5	0.074	1.9	6.63	MW	CG	N
0.975	24.77	72358S	2.00	50.8	.827	21.0	11	1.9	1.2	31	13	60	.49	12.5	0.074	1.9	6.63	SST	CG	N
0.975	24.77	72372	2.00	50.8	.813	20.7	20	3.5	1.3	33	26	117	.51	12.9	0.081	2.1	6.25	MW	CG	N
0.975	24.77	72372S	2.00	50.8	.813	20.7	17	3.0	1.0	26	18	78	.51	12.9	0.081	2.1	6.25	SST	CG	N
0.975	24.77	72385	2.00	50.8	.805	20.4	23	4.1	1.3	33	30	134	.55	14.0	0.085	2.2	6.50	MW	CG	N
0.975	24.77	72385S	2.00	50.8	.805	20.4	20	3.5	1.0	26	20	90	.55	14.0	0.085	2.2	6.50	SST	CG	N
0.975	24.77	72398	2.00	50.8	.791	20.1	27	4.8	1.3	33	36	160	.69	17.5	0.092	2.3	7.50	MW	CG	N
0.975	24.77	72398S	2.00	50.8	.791	20.1	23	4.1	1.0	27	24	108	.69	17.5	0.092	2.3	7.50	SST	CG	N
0.975	24.77	72408	2.00	50.8	.783	19.9	35	5.8	1.3	32	42	185	.71	18.0	0.096	2.4	7.38	MW	CG	N
0.975	24.77	72408S	2.00	50.8	.783	19.9	28	4.9	.98	25	28	123	.71	18.0	0.096	2.4	7.38	SST	CG	N
0.975	24.77	72420	2.00	50.8	.765	19.4	47	8.2	1.2	29	54	241	.80	20.3	0.105	2.7	7.63	MW	CG	N
0.975	24.77	72420S	2.00	50.8	.765	19.4	40	7.0	.90	23	36	160	.80	20.3	0.105	2.7	7.63	SST	CG	N
0.975	24.77	72433	2.00	50.8	.751	19.1	59	10	1.1	27	63	281	.90	22.8	0.112	2.8	8.00	MW	CG	N
0.975	24.77	72433S	2.00	50.8	.751	19.1	50	8.8	.82	21	41	184	.90	22.8	0.112	2.8	8.00	SST	CG	N
0.975	24.77	72441	2.00	50.8	.745	18.9	68	12	1.0	26	68	304	.91	23.0	0.115	2.9	7.88	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
0.975	24.77	72441S	2.00	50.8	.745	18.9	58	10	.77	20	45	199	.91	23.0	0.115	2.9	7.88	SST	CG	N
0.975	24.77	72449	2.00	50.8	.735	18.7	82	14	.94	24	77	344	.95	24.0	0.120	3.0	7.88	MW	CG	N
0.975	24.77	72449S	2.00	50.8	.735	18.7	70	12	.73	18	51	225	.95	24.0	0.120	3.0	7.88	SST	CG	N
0.975	24.77	72460	2.00	50.8	.725	18.4	94	16	.93	24	87	388	1.02	25.8	0.125	3.2	8.13	MW	CG	N
0.975	24.77	72460S	2.00	50.8	.725	18.4	80	14	.71	18	57	253	1.02	25.8	0.125	3.2	8.13	SST	CG	N
0.975	24.77	72470	2.00	50.8	.705	17.9	126	22	.85	21	106	473	1.13	28.7	0.135	3.4	8.38	MW	CG	N
0.975	24.77	72470S	2.00	50.8	.705	17.9	107	19	.64	16	68	304	1.13	28.7	0.135	3.4	8.38	SST	CG	N
0.975	24.77	72477	2.00	50.8	.679	17.2	190	33	.73	19	139	617	1.24	31.5	0.148	3.8	8.38	MW	CG	N
0.975	24.77	72477S	2.00	50.8	.679	17.2	161	28	.55	14	89	397	1.24	31.5	0.148	3.8	8.38	SST	CG	N
0.975	24.77	72483	2.00	50.8	.651	16.5	291	51	.60	15	176	782	1.36	34.5	0.162	4.1	8.38	MW	CG	N
0.975	24.77	72483S	2.00	50.8	.651	16.5	248	43	.45	11	111	496	1.36	34.5	0.162	4.1	8.38	SST	CG	N
0.975	24.77	72333	2.25	57.2	.849	21.6	7.5	1.3	1.7	44	13	58	.38	9.6	0.063	1.6	6.00	MW	CG	N
0.975	24.77	72333S	2.25	57.2	.849	21.6	6.4	1.1	1.4	35	8.8	39	.38	9.6	0.063	1.6	6.00	SST	CG	N
0.975	24.77	72345	2.25	57.2	.831	21.1	11	2.0	1.6	41	18	82	.48	12.1	0.072	1.8	6.63	MW	CG	N
0.975	24.77	72345S	2.25	57.2	.831	21.1	9.7	1.7	1.3	33	12	55	.48	12.1	0.072	1.8	6.63	SST	CG	N
0.975	24.77	72360	2.25	57.2	.827	21.0	12	2.1	1.7	43	20	89	.52	13.2	0.074	1.9	7.00	MW	CG	N
0.975	24.77	72360S	2.25	57.2	.827	21.0	10	1.8	1.3	34	13	60	.52	13.2	0.074	1.9	7.00	SST	CG	N
0.975	24.77	72373	2.25	57.2	.813	20.7	18	3.1	1.5	38	26	117	.56	14.1	0.081	2.1	6.88	MW	CG	N
0.975	24.77	72373S	2.25	57.2	.813	20.7	15	2.6	1.2	30	18	78	.56	14.1	0.081	2.1	6.88	SST	CG	N
0.975	24.77	72386	2.25	57.2	.805	20.4	23	4.0	1.3	33	30	134	.56	14.3	0.085	2.2	6.63	MW	CG	N
0.975	24.77	72386S	2.25	57.2	.805	20.4	19	3.4	1.0	26	20	90	.56	14.3	0.085	2.2	6.63	SST	CG	N
0.975	24.77	72387	2.25	57.2	.805	20.4	19	3.3	1.6	41	30	134	.65	16.5	0.085	2.2	7.63	MW	CG	N
0.975	24.77	72387S	2.25	57.2	.805	20.4	16	2.8	1.3	32	20	90	.65	16.5	0.085	2.2	7.63	SST	CG	N
0.975	24.77	72409	2.25	57.2	.783	19.9	30	5.3	1.4	35	42	185	.77	19.5	0.096	2.4	8.00	MW	CG	N
0.975	24.77	72409S	2.25	57.2	.783	19.9	26	4.5	1.1	27	28	123	.77	19.5	0.096	2.4	8.00	SST	CG	N
0.975	24.77	72421	2.25	57.2	.765	19.4	41	7.2	1.3	33	54	241	.89	22.7	0.105	2.7	8.50	MW	CG	N
0.975	24.77	72421S	2.25	57.2	.765	19.4	35	6.1	1.0	26	36	160	.89	22.7	0.105	2.7	8.50	SST	CG	N
0.975	24.77	72434	2.25	57.2	.751	19.1	54	9.5	1.2	30	63	281	.95	24.2	0.112	2.8	8.50	MW	CG	N
0.975	24.77	72434S	2.25	57.2	.751	19.1	46	8.0	.90	23	41	184	.95	24.2	0.112	2.8	8.50	SST	CG	N
0.975	24.77	72442	2.25	57.2	.745	18.9	59	10	1.2	29	68	304	1.01	25.6	0.115	2.9	8.75	MW	CG	N
0.975	24.77	72442S	2.25	57.2	.745	18.9	50	8.8	.89	23	45	199	1.01	25.6	0.115	2.9	8.75	SST	CG	N
0.975	24.77	72450	2.25	57.2	.735	18.7	71	12	1.1	28	77	344	1.05	26.7	0.120	3.0	8.75	MW	CG	N
0.975	24.77	72450S	2.25	57.2	.735	18.7	60	11	.84	21	51	225	1.05	26.7	0.120	3.0	8.75	SST	CG	N
0.975	24.77	72461	2.25	57.2	.725	18.4	82	14	1.1	27	87	388	1.13	28.6	0.125	3.2	9.00	MW	CG	N
0.975	24.77	72461S	2.25	57.2	.725	18.4	70	12	.82	21	57	253	1.13	28.6	0.125	3.2	9.00	SST	CG	N
0.975	24.77	72334	2.50	63.5	.849	21.6	6.7	1.2	1.9	49	13	58	.40	10.2	0.063	1.6	6.38	MW	CG	N
0.975	24.77	72334S	2.50	63.5	.849	21.6	5.7	1.0	1.5	39	8.8	39	.40	10.2	0.063	1.6	6.38	SST	CG	N
0.975	24.77	72346	2.50	63.5	.831	21.1	10	1.8	1.8	46	18	82	.51	13.0	0.072	1.8	7.13	MW	CG	N
0.975	24.77	72346S	2.50	63.5	.831	21.1	8.6	1.5	1.4	36	12	55	.51	13.0	0.072	1.8	7.13	SST	CG	N
0.975	24.77	72361	2.50	63.5	.827	21.0	10	1.8	1.9	49	20	87	.57	14.6	0.074	1.9	7.75	MW	CG	N
0.975	24.77	72361S	2.50	63.5	.827	21.0	8.7	1.5	1.6	39	13	60	.57	14.6	0.074	1.9	7.75	SST	CG	N
0.975	24.77	72374	2.50	63.5	.813	20.7	16	2.8	1.7	42	26	117	.61	15.4	0.081	2.1	7.50	MW	CG	N
0.975	24.77	72374S	2.50	63.5	.813	20.7	13	2.4	1.3	33	18	78	.61	15.4	0.081	2.1	7.50	SST	CG	N
0.975	24.77	72388	2.50	63.5	.805	20.4	18	3.2	1.6	42	30	134	.66	16.7	0.085	2.2	7.75	MW	CG	N
0.975	24.77	72388S	2.50	63.5	.805	20.4	16	2.7	1.3	33	20	90	.66	16.7	0.085	2.2	7.75	SST	CG	N
0.975	24.77	72399	2.50	63.5	.791	20.1	22	3.8	1.7	42	36	160	.83	21.0	0.092	2.3	9.00	MW	CG	N
0.975	24.77	72399S	2.50	63.5	.791	20.1	18	3.2	1.3	34	24	108	.83	21.0	0.092	2.3	9.00	SST	CG	N
0.975	24.77	72410	2.50	63.5	.783	19.9	26	4.5	1.6	41	42	185	.85	21.6	0.096	2.4	8.88	MW	CG	N
0.975	24.77	72410S	2.50	63.5	.783	19.9	22	3.9	1.2	32	28	123	.85	21.6	0.096	2.4	8.88	SST	CG	N
0.975	24.77	72422	2.50	63.5	.765	19.4	36	6.4	1.5	38	54	241	.97	24.7	0.105	2.7	9.25	MW	CG	N
0.975	24.77	72422S	2.50	63.5	.765	19.4	31	5.4	1.2	29	36	160	.97	24.7	0.105	2.7	9.25	SST	CG	N
0.975	24.77	72435	2.50	63.5	.751	19.1	46	8.0	1.4	35	63	281	1.08	27.4	0.112	2.8	9.63	MW	CG	N
0.975	24.77	72435S	2.50	63.5	.751	19.1	39	6.8	1.1	27	41	184	1.08	27.4	0.112	2.8	9.63	SST	CG	N
0.975	24.77	72443	2.50	63.5	.745	18.9	52	9.1	1.3	33	68	304	1.11	28.1	0.115	2.9	9.63	MW	CG	N
0.975	24.77	72443S	2.50	63.5	.745	18.9	44	7.7	1.0	26	45	199	1.11	28.1	0.115	2.9	9.63	SST	CG	N
0.975	24.77	72451	2.50	63.5	.735	18.7	64	11	1.2	31	77	344	1.14	29.0	0.120	3.0	9.50	MW	CG	N
0.975	24.77	72451S	2.50	63.5	.735	18.7	54	9.5	.93	24	51	225	1.14	29.0	0.120	3.0	9.50	SST	CG	N
0.975	24.77	72462	2.50	63.5	.725	18.4	73	13	1.2	30	87	388	1.23	31.4	0.125	3.2	9.88	MW	CG	N
0.975	24.77	72462S	2.50	63.5	.725	18.4	62	11	.92	23	57	253	1.23	31.4	0.125	3.2	9.88	SST	CG	N
0.975	24.77	72471	2.50	63.5	.705	17.9	98	17	1.1	28	106	473	1.38	35.1	0.135	3.4	10.3	MW	CG	N
0.975	24.77	72471S	2.50	63.5	.705	17.9	83	15	.82	21	68	304	1.38	35.1	0.135	3.4	10.3	SST	CG	N
0.975	24.77	72478	2.50	63.5	.679	17.2	147	26	.95	24	139	617	1.54	39.0	0.148	3.8	10.4	MW	CG	N
0.975	24.77	72478S	2.50	63.5	.679	17.2	125	22	.72	18	89	397	1.54	39.0	0.148	3.8	10.4	SST	CG	N
0.975	24.77	72484	2.50	63.5	.651	16.5	224	39	.78	20	176	782	1.66	42.2	0.162	4.1	10.3	MW	CG	N
0.975	24.77	72484S	2.50	63.5	.651	16.5	191	33	.58	15	111	496	1.66	42.2	0.162	4.1	10.3	SST	CG	N
0.975	24.77	72335	2.75	69.9	.849	21.6	6.1	1.1	2.1	54	13	58	.43	11.0	0.063	1.6	6.88	MW	CG	N
0.975	24.77	72335S	2.75	69.9	.849	21.6	5.2	.91	1.7	43	8.8	39	.43	11.0	0.063	1.6	6.88	SST	CG	N
0.975	24.77	72347	2.75	69.9	.831	21.1	9.2	1.6	2.0	51	18	82	.56	14.2	0.072	1.8	7.75	MW	CG	N
0.975	24.77	72347S	2.75	69.9	.831	21.1	7.8	1.4	1.6	40	12	55	.56	14.2	0.072	1.8	7.75	SST	CG	N
0.975	24.77	72363	2.75	69.9	.827	21.0	9.6	1.7	2.1	53	20	89	.60	15.3	0.074	1.9	8.13	MW	CG	N
0.975	24.77	72363S	2.75	69.9	.827	21.0	8.2	1.4	1.6	42	13	60	.60	15.3	0.074	1.9	8.13	SST	CG	N
0.975	24.77	72375	2.75	69.9	.813	20.7	14	2.5	1.8	47	26	117	.65	16.5	0.081	2.1	8.00	MW	CG	N
0.975	24.77	72375S	2.75	69.9	.813	20.7	12	2.1	1.4	37	18	78	.65	16.5	0.081	2.1	8.00	SST	CG	N
0.975	24.77	72389	2.75	69.9	.805	20.4	18	3.2	1.6	42	30	134	.66	16.7	0.085	2.2	7.75	MW	CG	N
0.975	24.77	72389S	2.75	69.9	.805	20.4	16	2.8	1.3	33	20	90	.66	16.7	0.085	2.2	7.75	SST	CG	N
0.975	24.77	72390	2.75	69.9	.805	20.4	15	2.7	2.0	50	30	134	.77	19.4	0.085	2.2	9.00	MW	CG	N
0.975	24.77	72390S	2.75	69.9	.805	20.4	13	2.3	1.6	40	20	90	.77	19.4	0.085	2.2	9.00	SST	CG	N
0.975	24.77	72411	2.75	69.9	.783	19.9	24	4.3	1.7	44	42	185	.90	22.9	0.096	2.4	9.38	MW	CG	N
0.975	24.77	72411S	2.75	69.9	.783	19.9	21	3.6	1.3	34	28	123	.90	22.9	0.096	2.4	9.38	SST	CG	N
0.975	24.77	72423	2.75	69.9	.765	19.4	33	5.7	1.7	42	54	241	1.06	27.0	0.105	2.7	10.1	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.975	24.77	72423S	2.75	69.9	.765	19.4	28	4.9	1.3	33	36	160	1.06	27.0	0.105	2.7	10.1	SST	CG	N
0.975	24.77	72436	2.75	69.9	.751	19.1	43	7.5	1.5	37	63	281	1.13	28.8	0.112	2.8	10.1	MW	CG	N
0.975	24.77	72436S	2.75	69.9	.751	19.1	37	6.4	1.1	29	41	184	1.13	28.8	0.112	2.8	10.1	SST	CG	N
0.975	24.77	72463	2.75	69.9	.725	18.4	62	11	1.3	34	84	372	1.41	35.7	0.125	3.2	11.3	MW	CG	N
0.975	24.77	72463S	2.75	69.9	.725	18.4	53	9.3	1.1	27	57	253	1.41	35.7	0.125	3.2	11.3	SST	CG	N
0.975	24.77	72336	3.00	76.2	.849	21.6	5.6	.97	2.3	59	13	58	.46	11.8	0.063	1.6	7.38	MW	CG	N
0.975	24.77	72336S	3.00	76.2	.849	21.6	4.7	.83	1.9	47	8.8	39	.46	11.8	0.063	1.6	7.38	SST	CG	N
0.975	24.77	72348	3.00	76.2	.831	21.1	8.4	1.5	2.2	56	18	82	.59	15.1	0.072	1.8	8.25	MW	CG	N
0.975	24.77	72348S	3.00	76.2	.831	21.1	7.1	1.2	1.7	44	12	55	.59	15.1	0.072	1.8	8.25	SST	CG	N
0.975	24.77	72364	3.00	76.2	.827	21.0	8.4	1.5	2.3	59	20	87	.67	16.9	0.074	1.9	9.00	MW	CG	N
0.975	24.77	72364S	3.00	76.2	.827	21.0	7.1	1.3	1.9	48	13	60	.67	16.9	0.074	1.9	9.00	SST	CG	N
0.975	24.77	72376	3.00	76.2	.813	20.7	13	2.3	2.0	51	26	117	.70	17.7	0.081	2.1	8.63	MW	CG	N
0.975	24.77	72376S	3.00	76.2	.813	20.7	11	1.9	1.6	40	18	78	.70	17.7	0.081	2.1	8.63	SST	CG	N
0.975	24.77	72391	3.00	76.2	.805	20.4	15	2.6	2.0	51	30	134	.77	19.4	0.085	2.2	9.00	MW	CG	N
0.975	24.77	72391S	3.00	76.2	.805	20.4	13	2.3	1.6	40	20	90	.77	19.4	0.085	2.2	9.00	SST	CG	N
0.975	24.77	72400	3.00	76.2	.791	20.1	18	3.1	2.0	52	36	160	.97	24.5	0.092	2.3	10.5	MW	CG	N
0.975	24.77	72400S	3.00	76.2	.791	20.1	15	2.6	1.6	41	24	108	.97	24.5	0.092	2.3	10.5	SST	CG	N
0.975	24.77	72412	3.00	76.2	.783	19.9	21	3.7	1.9	49	42	185	1.00	25.3	0.096	2.4	10.4	MW	CG	N
0.975	24.77	72412S	3.00	76.2	.783	19.9	18	3.2	1.5	39	28	123	1.00	25.3	0.096	2.4	10.4	SST	CG	N
0.975	24.77	72424	3.00	76.2	.765	19.4	30	5.2	1.8	46	54	241	1.14	29.0	0.105	2.7	10.9	MW	CG	N
0.975	24.77	72424S	3.00	76.2	.765	19.4	25	4.4	1.4	36	36	160	1.14	29.0	0.105	2.7	10.9	SST	CG	N
0.975	24.77	72437	3.00	76.2	.751	19.1	38	6.6	1.7	43	63	281	1.26	32.0	0.112	2.8	11.3	MW	CG	N
0.975	24.77	72437S	3.00	76.2	.751	19.1	32	5.6	1.3	33	41	184	1.26	32.0	0.112	2.8	11.3	SST	CG	N
0.975	24.77	72444	3.00	76.2	.745	18.9	43	7.5	1.6	40	68	304	1.29	32.9	0.115	2.9	11.3	MW	CG	N
0.975	24.77	72444S	3.00	76.2	.745	18.9	37	6.4	1.2	31	45	199	1.29	32.9	0.115	2.9	11.3	SST	CG	N
0.975	24.77	72452	3.00	76.2	.735	18.7	52	9.1	1.5	38	77	344	1.34	33.9	0.120	3.0	11.1	MW	CG	N
0.975	24.77	72452S	3.00	76.2	.735	18.7	44	7.7	1.1	29	51	225	1.34	33.9	0.120	3.0	11.1	SST	CG	N
0.975	24.77	72464	3.00	76.2	.725	18.4	60	10	1.5	37	87	388	1.45	36.9	0.125	3.2	11.6	MW	CG	N
0.975	24.77	72464S	3.00	76.2	.725	18.4	51	8.9	1.1	29	57	253	1.45	36.9	0.125	3.2	11.6	SST	CG	N
0.975	24.77	72472	3.00	76.2	.705	17.9	80	14	1.3	34	106	473	1.64	41.6	0.135	3.4	12.1	MW	CG	N
0.975	24.77	72472S	3.00	76.2	.705	17.9	68	12	1.0	26	68	304	1.64	41.6	0.135	3.4	12.1	SST	CG	N
0.975	24.77	72479	3.00	76.2	.679	17.2	120	21	1.2	29	139	617	1.81	46.1	0.148	3.8	12.3	MW	CG	N
0.975	24.77	72479S	3.00	76.2	.679	17.2	102	18	.88	22	89	397	1.81	46.1	0.148	3.8	12.3	SST	CG	N
0.975	24.77	72485	3.00	76.2	.651	16.5	183	32	.96	24	176	782	1.96	49.9	0.162	4.1	12.1	MW	CG	N
0.975	24.77	72485S	3.00	76.2	.651	16.5	155	27	.72	18	111	496	1.96	49.9	0.162	4.1	12.1	SST	CG	N
0.975	24.77	72337	3.50	88.9	.849	21.6	4.7	.83	2.7	70	13	58	.52	13.2	0.063	1.6	8.25	MW	CG	N
0.975	24.77	72337S	3.50	88.9	.849	21.6	4.0	.71	2.2	56	8.8	39	.52	13.2	0.063	1.6	8.25	SST	CG	N
0.975	24.77	72349	3.50	88.9	.831	21.1	7.1	1.2	2.6	66	18	82	.68	17.1	0.072	1.8	9.38	MW	CG	N
0.975	24.77	72349S	3.50	88.9	.831	21.1	6.1	1.1	2.0	52	12	55	.68	17.1	0.072	1.8	9.38	SST	CG	N
0.975	24.77	72365	3.50	88.9	.827	21.0	7.1	1.2	2.7	70	19	87	.76	19.3	0.074	1.9	10.3	MW	CG	N
0.975	24.77	72365S	3.50	88.9	.827	21.0	6.0	1.1	2.2	57	13	60	.76	19.3	0.074	1.9	10.3	SST	CG	N
0.975	24.77	72377	3.50	88.9	.813	20.7	11	1.9	2.4	60	26	117	.79	20.1	0.081	2.1	9.75	MW	CG	N
0.975	24.77	72377S	3.50	88.9	.813	20.7	9.4	1.7	1.9	47	18	78	.79	20.1	0.081	2.1	9.75	SST	CG	N
0.975	24.77	72392	3.50	88.9	.805	20.4	13	2.3	2.3	60	30	134	.87	22.1	0.085	2.2	10.3	MW	CG	N
0.975	24.77	72392S	3.50	88.9	.805	20.4	11	1.9	1.9	47	20	90	.87	22.1	0.085	2.2	10.3	SST	CG	N
0.975	24.77	72401	3.50	88.9	.791	20.1	15	2.6	2.4	61	36	160	1.10	28.0	0.092	2.3	12.0	MW	CG	N
0.975	24.77	72401S	3.50	88.9	.791	20.1	13	2.2	1.9	48	24	108	1.10	28.0	0.092	2.3	12.0	SST	CG	N
0.975	24.77	72413	3.50	88.9	.783	19.9	18	3.2	2.3	58	42	185	1.14	29.0	0.096	2.4	11.9	MW	CG	N
0.975	24.77	72413S	3.50	88.9	.783	19.9	15	2.7	1.8	45	28	123	1.14	29.0	0.096	2.4	11.9	SST	CG	N
0.975	24.77	72425	3.50	88.9	.765	19.4	26	4.5	2.1	54	54	241	1.30	33.0	0.105	2.7	12.4	MW	CG	N
0.975	24.77	72425S	3.50	88.9	.765	19.4	22	3.8	1.6	42	36	160	1.30	33.0	0.105	2.7	12.4	SST	CG	N
0.975	24.77	72438	3.50	88.9	.751	19.1	32	5.6	2.0	50	63	281	1.46	37.0	0.112	2.8	13.0	MW	CG	N
0.975	24.77	72438S	3.50	88.9	.751	19.1	27	4.8	1.5	39	41	184	1.46	37.0	0.112	2.8	13.0	SST	CG	N
0.975	24.77	72445	3.50	88.9	.745	18.9	36	6.3	1.9	48	68	304	1.50	38.0	0.115	2.9	13.0	MW	CG	N
0.975	24.77	72445S	3.50	88.9	.745	18.9	31	5.4	1.5	37	45	199	1.50	38.0	0.115	2.9	13.0	SST	CG	N
0.975	24.77	72453	3.50	88.9	.735	18.7	44	7.7	1.8	45	77	344	1.55	39.2	0.120	3.0	12.9	MW	CG	N
0.975	24.77	72453S	3.50	88.9	.735	18.7	37	6.5	1.4	34	51	225	1.55	39.2	0.120	3.0	12.9	SST	CG	N
0.975	24.77	72465	3.50	88.9	.725	18.4	50	8.8	1.7	44	87	388	1.67	42.5	0.125	3.2	13.4	MW	CG	N
0.975	24.77	72465S	3.50	88.9	.725	18.4	43	7.5	1.3	34	57	253	1.67	42.5	0.125	3.2	13.4	SST	CG	N
0.975	24.77	72473	3.50	88.9	.705	17.9	67	12	1.6	40	106	473	1.89	48.0	0.135	3.4	14.0	MW	CG	N
0.975	24.77	72473S	3.50	88.9	.705	17.9	57	10	1.2	30	68	304	1.89	48.0	0.135	3.4	14.0	SST	CG	N
0.975	24.77	72480	3.50	88.9	.679	17.2	101	18	1.4	35	139	617	2.09	53.1	0.148	3.8	14.1	MW	CG	N
0.975	24.77	72480S	3.50	88.9	.679	17.2	86	15	1.0	26	89	397	2.09	53.1	0.148	3.8	14.1	SST	CG	N
0.975	24.77	72486	3.50	88.9	.651	16.5	154	27	1.1	29	176	782	2.27	57.6	0.162	4.1	14.0	MW	CG	N
0.975	24.77	72486S	3.50	88.9	.651	16.5	131	23	.85	22	111	496	2.27	57.6	0.162	4.1	14.0	SST	CG	N
0.975	24.77	72338	4.00	101.6	.849	21.6	4.1	.72	3.2	80	13	58	.58	14.8	0.063	1.6	9.25	MW	CG	N
0.975	24.77	72338S	4.00	101.6	.849	21.6	3.5	.61	2.5	64	8.8	39	.58	14.8	0.063	1.6	9.25	SST	CG	N
0.975	24.77	72350	4.00	101.6	.831	21.1	6.2	1.1	3.0	76	18	82	.76	19.2	0.072	1.8	10.5	MW	CG	N
0.975	24.77	72350S	4.00	101.6	.831	21.1	5.3	.92	2.3	60	12	55	.76	19.2	0.072	1.8	10.5	SST	CG	N
0.975	24.77	72366	4.00	101.6	.827	21.0	6.2	1.1	3.1	80	20	87	.85	21.6	0.074	1.9	11.5	MW	CG	N
0.975	24.77	72366S	4.00	101.6	.827	21.0	5.3	.92	2.6	65	13	60	.85	21.6	0.074	1.9	11.5	SST	CG	N
0.975	24.77	72378	4.00	101.6	.813	20.7	9.7	1.7	2.7	69	26	117	.89	22.6	0.081	2.1	11.0	MW	CG	N
0.975	24.77	72378S	4.00	101.6	.813	20.7	8.2	1.4	2.1	54	18	78	.89	22.6	0.081	2.1	11.0	SST	CG	N
0.975	24.77	72393	4.00	101.6	.805	20.4	12	2.2	2.4	62	30	134	.89	22.7	0.085	2.2	10.5	MW	CG	N
0.975	24.77	72393S	4.00	101.6	.805	20.4	11	1.9	1.9	49	20	90	.89	22.7	0.085	2.2	10.5	SST	CG	N
0.975	24.77	72402	4.00	101.6	.791	20.1	13	2.3	2.8	70	36	159	1.24	31.5	0.092	2.3	13.5	MW	CG	N
0.975	24.77	72402S	4.00	101.6	.791	20.1	11	1.9	2.2	56	24	108	1.24	31.5	0.092	2.3	13.5	SST	CG	N
0.975	24.77	72414	4.00	101.6	.783	19.9	16	2.8	2.6	65	42	185	1.26	32.0	0.096	2.4	13.1	MW	CG	N
0.975	24.77	72414S	4.00	101.6	.783	19.9	14	2.4	2.0	51	28	123	1.26	32.0	0.096	2.4	13.1	SST	CG	N
0.975	24.77	72426	4.00	101.6	.765	19.4	22	3.9	2.4	62	54	241	1.46	37.0	0.105	2.7	13.9	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
0.975	24.77	72426S	4.00	101.6	.765	19.4	19	3.3	1.9	48	36	160	1.46	37.0	0.105	2.7	13.9	SST	CG	N
0.975	24.77	72439	4.00	101.6	.751	19.1	29	5.0	2.2	56	63	281	1.60	40.5	0.112	2.8	14.3	MW	CG	N
0.975	24.77	72439S	4.00	101.6	.751	19.1	24	4.3	1.7	43	41	184	1.60	40.5	0.112	2.8	14.3	SST	CG	N
0.975	24.77	72446	4.00	101.6	.745	18.9	32	5.6	2.1	54	68	304	1.65	42.0	0.115	2.9	14.4	MW	CG	N
0.975	24.77	72446S	4.00	101.6	.745	18.9	27	4.8	1.6	42	45	199	1.65	42.0	0.115	2.9	14.4	SST	CG	N
0.975	24.77	72454	4.00	101.6	.735	18.7	38	6.7	2.0	52	77	344	1.74	44.2	0.120	3.0	14.5	MW	CG	N
0.975	24.77	72454S	4.00	101.6	.735	18.7	32	5.7	1.6	40	51	225	1.74	44.2	0.120	3.0	14.5	SST	CG	N
0.975	24.77	72466	4.00	101.6	.725	18.4	44	7.7	2.0	51	87	388	1.89	48.0	0.125	3.2	15.1	MW	CG	N
0.975	24.77	72466S	4.00	101.6	.725	18.4	37	6.5	1.5	39	57	253	1.89	48.0	0.125	3.2	15.1	SST	CG	N
0.975	24.77	72474	4.00	101.6	.705	17.9	58	10	1.8	46	106	473	2.14	54.4	0.135	3.4	15.9	MW	CG	N
0.975	24.77	72474S	4.00	101.6	.705	17.9	50	8.7	1.4	35	68	304	2.14	54.4	0.135	3.4	15.9	SST	CG	N
0.975	24.77	72481	4.00	101.6	.679	17.2	87	15	1.6	40	139	617	2.37	60.1	0.148	3.8	16.0	MW	CG	N
0.975	24.77	72481S	4.00	101.6	.679	17.2	74	13	1.2	31	89	397	2.37	60.1	0.148	3.8	16.0	SST	CG	N
0.975	24.77	72487	4.00	101.6	.651	16.5	133	23	1.3	34	176	782	2.57	65.3	0.162	4.1	15.9	MW	CG	N
0.975	24.77	72487S	4.00	101.6	.651	16.5	113	20	.99	25	111	496	2.57	65.3	0.162	4.1	15.9	SST	CG	N
0.984	24.99	3336	.72	18.2	.794	20.2	111	19	.26	6.5	29	127	.33	8.4	0.095	2.4	3.50	SPR	CG	Z
0.984	24.99	2832	.81	20.6	.800	20.3	97	17	.38	9.5	36	162	.41	10.5	0.092	2.3	3.50	MW	C	Z
0.984	24.99	12579	.81	20.6	.794	20.2	111	19	.26	6.5	29	127	.33	8.5	0.095	2.4	3.50	SPR	CG	Z
0.984	24.99	S-3104	.88	22.2	.904	23.0	1.3	.22	.64	16	.81	3.6	.24	6.1	0.040	1.0	5.00	SST	C	N
0.984	24.99	10652	.94	23.8	.824	20.9	29	5.1	.48	12	14	62	.46	11.7	0.080	2.0	4.75	SPR	C	GI
0.984	24.99	1659	1.00	25.4	.860	21.8	11	1.9	.66	17	7.1	32	.34	8.7	0.062	1.6	4.50	SPR	C	Z
0.984	24.99	11942	1.00	25.4	.792	20.1	44	7.6	.42	11	18	82	.58	14.6	0.096	2.4	6.00	SPR	CG	Z
0.984	24.99	2635	1.00	25.4	.690	17.5	763	134	.18	4.5	135	600	.51	13.1	0.147	3.7	3.50	MW	CG	Z
0.984	24.99	3146	1.03	26.2	.894	22.7	2.5	.43	.81	21	2.0	8.9	.22	5.6	0.045	1.1	5.00	SPR	CG	Z
0.984	24.99	1513	1.06	27.0	.914	23.2	1.0	.18	.87	22	.88	3.9	.19	4.9	0.035	0.9	4.50	HD	C	Z
0.984	24.99	B12-24	1.06	27.0	.890	22.6	2.8	.50	.83	21	2.4	10	.24	6.0	0.047	1.2	5.00	SPR	CG	N
0.984	24.99	S-1048	1.19	30.2	.840	21.3	15	2.6	.83	21	12	54	.36	9.1	0.072	1.8	5.00	SST	CG	N
0.984	24.99	322	1.19	30.2	.824	20.9	30	5.2	.60	15	18	80	.45	11.5	0.080	2.0	4.67	SPR	C	GI
0.984	24.99	S-3087	1.25	31.8	.894	22.7	3.1	.54	1.0	26	3.2	14	.23	5.7	0.045	1.1	4.00	SST	C	N
0.984	24.99	3402	1.25	31.8	.656	16.7	539	94	.24	6.1	129	574	.90	22.9	0.164	4.2	5.50	SPR	CG	Z
0.984	24.99	11866	1.31	33.3	.862	21.9	13	2.2	.67	17	8.4	38	.31	7.7	0.061	1.5	4.00	SPR	C	N
0.984	24.99	12041	1.34	34.1	.674	17.1	485	85	.23	5.7	110	488	.78	19.7	0.155	3.9	5.00	SPR	CG	Z
0.984	24.99	S-183	1.41	35.7	.784	19.9	53	9.2	.58	15	31	137	.55	14.0	0.100	2.5	5.50	SST	CG	N
0.984	24.99	S-3084	1.47	37.3	.814	20.7	26	4.5	.78	20	20	89	.47	11.9	0.085	2.2	5.50	SST	CG	N
0.984	24.99	12205	1.50	38.1	.800	20.3	32	5.6	.81	20	26	116	.60	15.2	0.092	2.3	6.50	SPR	CG	Z
0.984	24.99	2599	1.50	38.1	.774	19.7	57	10	.67	17	38	171	.68	17.3	0.105	2.7	6.50	SPR	CG	Z
0.984	24.99	12704	1.63	41.3	.796	20.2	40	7.0	.97	25	38	171	.66	16.7	0.094	2.4	6.00	MW	C	N
0.984	24.99	S-1570	1.72	43.6	.916	23.3	.53	.09	1.5	38	.79	3.5	.23	5.8	0.034	0.9	5.75	SST	C	N
0.984	24.99	10861	1.75	44.5	.914	23.2	.60	.10	1.5	38	.90	4.0	.24	6.0	0.035	0.9	5.75	SST	C	N
0.984	24.99	II-78	1.75	44.5	.704	17.9	153	27	.55	14	84	372	1.12	28.4	0.140	3.6	8.00	SPR	CG	Z
0.984	24.99	S-470	1.78	45.2	.688	17.5	209	37	.42	11	89	394	1.04	26.3	0.148	3.8	7.00	SST	CG	N
0.984	24.99	S-1201	1.81	46.0	.814	20.7	9.0	1.6	.79	20	7.1	32	1.02	25.9	0.085	2.2	12.0	SST	CG	N
0.984	24.99	3862	1.88	47.6	.774	19.7	37	6.4	.93	24	34	152	.95	24.0	0.105	2.7	9.00	HD	CG	Z
0.984	24.99	B18-199	2.09	53.2	.784	19.9	31	5.4	1.0	25	31	137	.90	22.9	0.100	2.5	8.00	SST	C	N
0.984	24.99	12427	2.16	54.8	.884	22.5	3.3	.57	1.3	34	4.4	20	.30	7.6	0.050	1.3	5.00	SST	C	N
0.984	24.99	S-1590	2.25	57.2	.906	23.0	.58	.10	1.9	48	1.1	4.9	.35	8.9	0.039	1.0	8.00	SST	C	N
0.984	24.99	10395	2.25	57.2	.834	21.2	15	2.7	.98	25	15	66	.53	13.3	0.075	1.9	6.00	SPR	C	Z
0.984	24.99	11673	2.38	60.3	.686	17.4	187	33	.54	14	100	446	1.27	32.2	0.149	3.8	8.50	SPR	CG	Z
0.984	24.99	M-141	2.47	62.7	.484	12.3	2367	414	.16	4.1	385	1714	2.00	50.8	0.250	6.4	8.00	SPR	CG	Z
0.984	24.99	11752	2.50	63.5	.824	20.9	10	1.7	1.7	43	17	75	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
0.984	24.99	2622	2.72	69.0	.600	15.2	562	98	.34	8.7	193	859	1.73	43.9	0.192	4.9	9.00	SPR	CG	Z
0.984	24.99	4371	3.00	76.2	.814	20.7	12	2.1	1.8	46	21	95	.91	23.2	0.085	2.2	10.8	SPR	CG	Z
0.984	24.99	1807	3.00	76.2	.774	19.7	22	3.9	1.6	40	35	157	1.42	36.0	0.105	2.7	13.5	HD	CG	Z
0.984	24.99	10429	3.50	88.9	.758	19.3	31	5.4	1.5	38	46	205	1.53	38.7	0.113	2.9	13.5	SPR	CG	Z
0.984	24.99	3188	3.63	92.1	.890	22.6	1.1	.19	3.1	79	3.3	15	.52	13.1	0.047	1.2	10.0	SPR	C	Z
0.984	24.99	10586	3.75	95.3	.820	20.8	6.0	1.1	2.5	64	15	68	1.23	31.2	0.082	2.1	15.0	SST	CG	N
0.984	24.99	11623	4.00	101.6	.626	15.9	189	33	.88	22	166	737	3.04	77.3	0.179	4.5	17.0	SPR	CG	Z
0.984	24.99	11630	4.00	101.6	.624	15.8	194	34	.83	21	161	715	3.06	77.7	0.180	4.6	17.0	SPR	CG	Z
0.984	24.99	3410	5.00	127.0	.660	16.8	94	17	1.3	34	124	554	3.61	91.6	0.162	4.1	22.0	SPR	CG	Z
0.984	24.99	10924	6.94	176.2	.760	19.3	12	2.0	3.5	89	41	182	3.14	79.7	0.112	2.8	28.0	SST	CG	N
0.984	24.99	11998	8.06	204.8	.564	14.3	246	43	1.0	26	248	1104	5.57	141.4	0.210	5.3	26.5	SPR	CG	Z
1.000	25.40	LL-49	.66	16.7	.760	19.3	437	77	.12	3.1	54	241	.36	9.1	0.120	3.0	3.00	SPR	CG	Z
1.000	25.40	11894	.78	19.8	.894	22.7	6.7	1.2	.52	13	3.4	15	.27	6.7	0.053	1.3	4.00	SPR	C	N
1.000	25.40	10287	.84	21.4	.876	22.3	10	1.8	.56	14	5.8	26	.28	7.1	0.062	1.6	4.50	SPR	CG	Z
1.000	25.40	2692	.88	22.2	.906	23.0	4.1	.71	.64	16	2.6	12	.24	6.0	0.047	1.2	4.00	HD	C	Z
1.000	25.40	B8-41	.88	22.2	.858	21.8	10	1.8	.45	11	4.5	20	.43	10.8	0.071	1.8	6.00	SST	CG	N
1.000	25.40	S-1233	.88	22.2	.856	21.7	11	1.8	.44	11	4.7	21	.43	11.0	0.072	1.8	6.00	SST	CG	N
1.000	25.40	S-178	.88	22.2	.790	20.1	106	19	.33	8.4	35	156	.42	10.7	0.105	2.7	4.00	SST	CG	N
1.000	25.40	AA-48	.94	23.8	.820	20.8	32	5.6	.44	11	14	62	.50	12.6	0.090	2.3	5.50	SST	CG	N
1.000	25.40	4211	1.00	25.4	.910	23.1	2.7	.47	.75	19	2.0	9.1	.25	6.3	0.045	1.1	4.50	SPR	C	Z
1.000	25.40	S-1360	1.00	25.4	.880	22.4	9.8	1.7	.70	18	6.8	30	.30	7.6	0.060	1.5	4.00	SST	C	N
1.000	25.40	11763	1.00	25.4	.876	22.3	8.6	1.5	.63	16	5.4	24	.37	9.4	0.062	1.6	5.00	SPR	C	Z
1.000	25.40	12402	1.00	25.4	.852	21.6	22	3.8	.00	.00	.00	.00	.41	10.3	0.074	1.9	4.50	DD	C	N
1.000	25.40	11534	1.00	25.4	.840	21.3	23	4.1	.50	13	12	52	.50	12.7	0.080	2.0	5.25	SPR	CG	Z
1.000	25.40	11548	1.00	25.4	.808	20.5	66	12	.44	11	29	129	.53	13.4	0.096	2.4	4.50	SPR	CG	Z
1.000	25.40	11805	1.00	25.4	.790	20.1	216	38	.16	4.1	35	156	.32	8.0	0.105	2.7	3.00	SST	CG	N
1.000	25.40	27	1.00	25.4	.730	18.5	268	47	.28	7.0	74	330	.64	16.3	0.135	3.4	4.75	HD	CG	Z
1.000	25.40	4341	1.13	28.6	.804	20.4	52	9.0	.59	15	30	135	.54	13.7	0.098	2.5	5.50	SPR	CG	Z
1.000	25.40	S-1599	1.16	29.4	.852	21.6	19	3.4	.68	17	13	58	.41	10.3	0.074	1.9	4.50	SST	C	N
1.000	25.40	3854	1.19	30.2	.750	19.1	140	24	.44	11	61	271	.72	18.3	0.125	3.2	5.75	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.000	25.40	10164	1.25	31.8	.750	19.1	175	31	.35	8.9	61	271	.63	15.9	0.125	3.2	5.00	SPR	CG	Z
1.000	25.40	10251	1.25	31.8	.750	19.1	190	33	.32	8.1	61	271	.59	15.1	0.125	3.2	4.75	SPR	CG	Z
1.000	25.40	Q-82	1.34	34.1	.814	20.7	29	5.0	.69	18	20	89	.65	16.5	0.093	2.4	7.00	SPR	CG	N
1.000	25.40	S-899	1.38	34.9	.930	23.6	.52	.09	1.1	29	.59	2.6	.25	6.2	0.035	0.9	6.00	SST	C	N
1.000	25.40	00-90	1.38	34.9	.892	22.7	6.3	1.1	.87	22	5.4	24	.27	6.9	0.054	1.4	4.00	SST	CG	N
1.000	25.40	S-53	1.38	34.9	.840	21.3	17	3.0	.91	23	15	68	.47	11.9	0.080	2.0	6.00	SST	CG	N
1.000	25.40	S-1573	1.50	38.1	.892	22.7	3.7	.64	1.2	31	4.4	20	.30	7.5	0.054	1.4	5.50	SST	CG	N
1.000	25.40	2864	1.50	38.1	.790	20.1	54	9.5	.70	18	38	168	.68	17.3	0.105	2.7	6.50	HD	CG	Z
1.000	25.40	10969	1.50	38.1	.646	16.4	595	104	.27	6.8	158	704	1.11	28.2	0.177	4.5	6.25	HD	CG	BO
1.000	25.40	S-75	1.72	43.6	.790	20.1	41	7.2	.85	22	35	156	.76	19.3	0.105	2.7	7.25	SST	CG	N
1.000	25.40	10791	1.75	44.5	.930	23.6	.57	.10	1.5	38	.86	3.8	.24	6.0	0.035	0.9	5.75	SST	C	N
1.000	25.40	12523	1.75	44.5	.884	22.5	4.9	.85	1.4	36	6.8	30	.35	8.8	0.058	1.5	6.00	SPR	CG	Z
1.000	25.40	912	1.75	44.5	.876	22.3	5.7	1.0	1.3	33	7.3	33	.47	11.8	0.062	1.6	6.50	MW	C	Z
1.000	25.40	11812	1.75	44.5	.868	22.0	7.4	1.3	1.3	34	9.8	44	.43	10.9	0.066	1.7	6.50	SPR	CG	Z
1.000	25.40	11751	1.75	44.5	.840	21.3	22	3.8	.82	21	18	78	.44	11.2	0.080	2.0	5.50	SPR	CG	Z
1.000	25.40	11832	1.75	44.5	.790	20.1	41	7.2	.85	22	35	156	.76	19.3	0.105	2.7	7.25	SST	CG	N
1.000	25.40	3935	1.75	44.5	.760	19.3	87	15	.62	16	54	241	.84	21.3	0.120	3.0	7.00	SPR	CG	Z
1.000	25.40	S-3033	1.75	44.5	.704	17.9	194	34	.45	11	87	388	1.04	26.3	0.148	3.8	7.00	SST	CG	N
1.000	25.40	12260	1.78	45.2	.840	21.3	15	2.6	1.1	29	17	77	.64	16.3	0.080	2.0	7.00	SPR	C	Z
1.000	25.40	S-3195	1.88	47.6	.798	20.3	52	9.1	.60	15	31	139	.56	14.1	0.101	2.6	5.50	SST	CG	N
1.000	25.40	10561	1.94	49.2	.818	20.8	22	3.8	1.1	27	23	102	.67	16.9	0.091	2.3	7.33	SST	CG	N
1.000	25.40	S-1485	2.00	50.8	.918	23.3	1.3	.23	1.8	45	2.3	10	.25	6.2	0.041	1.0	5.00	SST	C	N
1.000	25.40	S-3021	2.00	50.8	.876	22.3	3.7	.65	1.5	38	5.6	25	.50	12.6	0.062	1.6	8.00	SST	CG	N
1.000	25.40	2767	2.00	50.8	.840	21.3	14	2.5	1.2	32	18	78	.59	14.9	0.080	2.0	7.33	HD	CG	Z
1.000	25.40	10091	2.00	50.8	.818	20.8	26	4.6	.94	24	25	110	.73	18.5	0.091	2.3	7.00	SPR	C	Z
1.000	25.40	1771	2.00	50.8	.760	19.3	109	19	.69	18	76	336	.84	21.3	0.120	3.0	6.00	MW	C	Z
1.000	25.40	10321	2.03	51.6	.774	19.7	75	13	.61	15	45	202	.73	18.7	0.113	2.9	6.50	SPR	CG	Z
1.000	25.40	10006	2.09	53.2	.676	17.2	240	42	.51	13	123	546	1.46	37.0	0.162	4.1	9.00	SPR	CG	Z
1.000	25.40	S-3226	2.13	54.0	.816	20.7	17	3.1	1.2	31	21	93	.92	23.4	0.092	2.3	9.00	SST	C	N
1.000	25.40	B17-189	2.13	54.0	.540	13.7	1469	257	.29	7.2	419	1862	1.84	46.7	0.230	5.8	8.00	MW	CG	Z
1.000	25.40	2662	2.16	54.8	.730	18.5	148	26	.50	13	74	330	.95	24.0	0.135	3.4	7.00	SPR	CG	Z
1.000	25.40	S-395	2.19	55.6	.898	22.8	3.3	.58	1.4	35	4.6	20	.31	7.8	0.051	1.3	5.00	SST	C	N
1.000	25.40	S-1386	2.19	55.6	.892	22.7	3.1	.55	1.7	44	5.4	24	.38	9.6	0.054	1.4	6.00	SST	C	N
1.000	25.40	S-3056	2.25	57.2	.910	23.1	1.2	.21	1.9	48	2.2	9.9	.36	9.1	0.045	1.1	7.00	SST	C	N
1.000	25.40	S-1147	2.25	57.2	.876	22.3	4.7	.83	1.7	44	8.2	36	.42	10.6	0.062	1.6	6.75	SST	CG	N
1.000	25.40	11391	2.25	57.2	.860	21.8	6.1	1.1	1.6	39	9.5	42	.70	17.8	0.070	1.8	9.00	SPR	C	Z
1.000	25.40	FF-79	2.25	57.2	.820	20.8	16	2.7	1.4	34	21	94	.90	22.9	0.090	2.3	10.0	SPR	CG	N
1.000	25.40	S-106	2.25	57.2	.706	17.9	171	30	.50	13	86	381	1.10	28.0	0.147	3.7	7.50	SST	CG	N
1.000	25.40	11912	2.28	57.9	.878	22.3	4.3	.75	1.8	47	7.8	35	.43	10.8	0.061	1.5	7.00	SST	CG	N
1.000	25.40	10697	2.31	58.7	.814	20.7	18	3.1	1.3	32	22	99	1.04	26.5	0.093	2.4	10.5	SPR	C	N
1.000	25.40	S-293	2.38	60.3	.790	20.1	30	5.3	1.2	29	35	156	.95	24.0	0.105	2.7	9.00	SST	CG	N
1.000	25.40	4141	2.38	60.3	.760	19.3	58	10	.93	24	54	241	1.26	32.0	0.120	3.0	9.50	SPR	C	Z
1.000	25.40	DD-67	2.50	63.5	.860	21.8	5.4	.94	1.8	46	9.7	43	.70	17.8	0.070	1.8	10.0	SPR	CG	Z
1.000	25.40	B17-184	2.50	63.5	.800	20.3	28	4.9	1.6	41	45	200	.90	22.9	0.100	2.5	9.00	MW	CG	GI
1.000	25.40	375	2.50	63.5	.790	20.1	35	6.1	1.1	28	38	168	1.05	26.7	0.105	2.7	9.00	HD	C	Z
1.000	25.40	71	2.50	63.5	.760	19.3	55	9.6	.99	25	54	241	1.20	30.5	0.120	3.0	10.0	HD	CG	Z
1.000	25.40	S-408	2.59	65.9	.676	17.2	260	45	.42	11	109	485	1.26	31.9	0.162	4.1	7.75	SST	CG	N
1.000	25.40	4311	2.63	66.7	.704	17.9	131	23	.74	19	97	431	1.55	39.5	0.148	3.8	10.5	SPR	CG	Z
1.000	25.40	10964	2.72	69.0	.750	19.1	62	11	.87	22	53	238	1.85	47.0	0.125	3.2	10.5	HD	CG	Z
1.000	25.40	2587	2.75	69.9	.866	22.0	5.9	1.0	1.8	47	11	49	.54	13.6	0.067	1.7	8.00	HD	CG	Z
1.000	25.40	12477	2.75	69.9	.840	21.3	9.5	1.7	1.9	47	18	78	.80	20.3	0.080	2.0	10.0	SPR	CG	Z
1.000	25.40	4207	2.88	73.0	.816	20.7	15	2.7	1.7	43	26	114	1.01	25.7	0.092	2.3	11.0	SPR	CG	Z
1.000	25.40	10358	2.94	74.6	.750	19.1	58	10	1.0	27	61	271	1.38	34.9	0.125	3.2	11.0	SPR	CG	Z
1.000	25.40	EE-56	3.00	76.2	.880	22.4	2.7	.46	2.4	60	6.3	28	.63	16.0	0.060	1.5	9.50	SST	C	N
1.000	25.40	10741	3.00	76.2	.876	22.3	2.0	.35	2.1	53	4.1	18	.93	23.6	0.062	1.6	15.0	SPR	CG	N
1.000	25.40	11135	3.00	76.2	.816	20.7	11	1.9	1.7	44	19	84	1.27	32.4	0.092	2.3	14.0	HD	CG	Z
1.000	25.40	3357	3.00	76.2	.782	19.9	29	5.0	1.5	37	42	188	1.31	33.2	0.109	2.8	12.0	SPR	CG	Z
1.000	25.40	57	3.00	76.2	.760	19.3	45	7.9	1.2	31	54	241	1.41	35.8	0.120	3.0	11.8	HD	CG	Z
1.000	25.40	7052	3.00	76.2	.744	18.9	51	8.9	1.2	30	60	265	1.66	42.3	0.128	3.3	12.0	SST	C	N
1.000	25.40	HH-79	3.13	79.4	.880	22.4	2.2	.39	2.5	63	5.4	24	.66	16.8	0.060	1.5	11.0	SST	CG	N
1.000	25.40	10550	3.19	81.0	.750	19.1	63	11	.96	24	61	271	1.41	35.7	0.125	3.2	10.3	SPR	C	Z
1.000	25.40	S-1491	3.25	82.6	.922	23.4	.54	.10	2.9	75	1.6	7.1	.31	7.9	0.039	1.0	8.00	SST	CG	N
1.000	25.40	S-3204	3.25	82.6	.922	23.4	.58	.10	2.9	75	1.7	7.6	.30	7.7	0.039	1.0	7.75	SST	CG	N
1.000	25.40	S-252	3.38	85.7	.876	22.3	3.0	.52	2.7	70	8.2	36	.59	15.0	0.062	1.6	9.50	SST	CG	N
1.000	25.40	4106	3.38	85.7	.810	20.6	19	3.3	1.5	38	28	125	1.00	25.3	0.095	2.4	10.5	SPR	CG	Z
1.000	25.40	11555	3.50	88.9	.906	23.0	1.4	.24	3.0	77	4.1	18	.42	10.7	0.047	1.2	8.00	SPR	C	Z
1.000	25.40	S-1617	3.50	88.9	.894	22.7	1.3	.23	2.9	74	3.8	17	.58	14.8	0.053	1.3	11.0	SST	CG	N
1.000	25.40	39	3.50	88.9	.760	19.3	36	6.3	1.5	39	54	241	1.71	43.4	0.120	3.0	14.3	HD	CG	Z
1.000	25.40	2728	3.50	88.9	.676	17.2	240	42	.51	13	123	546	1.46	37.0	0.162	4.1	9.00	SPR	CG	Z
1.000	25.40	38	3.50	88.9	.676	17.2	153	27	.80	20	123	546	2.11	53.5	0.162	4.1	13.0	HD	CG	Z
1.000	25.40	3111	3.63	92.1	.914	23.2	.93	.16	3.3	83	3.1	14	.34	8.7	0.043	1.1	8.00	SPR	CG	Z
1.000	25.40	2716	3.75	95.3	.856	21.7	3.9	.68	2.6	67	10	45	1.12	28.3	0.072	1.8	14.5	SPR	C	Z
1.000	25.40	2968	3.75	95.3	.790	20.1	27	4.7	1.4	35	38	168	1.26	32.0	0.105	2.7	11.0	SPR	C	Z
1.000	25.40	4228	3.75	95.3	.712	18.1	90	16	1.0	25	89	398	2.02	51.2	0.144	3.7	13.0	SPR	C	Z
1.000	25.40	4356	3.94	100.0	.830	21.1	6.5	1.1	2.5	63	16	72	1.45	36.7	0.085	2.2	17.0	SPR	CG	Z
1.000	25.40	10548	4.00	101.6	.838	21.3	12	2.1	1.5	38	18	81	.69	17.5	0.081	2.1	8.50	SPR	CG	Z
1.000	25.40	10777	4.00	101.6	.820	20.8	9.8	1.7	2.4	62	24	107	1.33	33.7	0.090	2.3	14.8	SPR	CG	N
1.000	25.40	11615	4.19	106.4	.820	20.8	9.6	1.7	2.5	63	24	107	1.44	36.6	0.090	2.3	15.0	SPR	CG	Z
1.000	25.40	10248	4.25	108.0	.812	20.6	16	2.8	1.7	44	27	121	1.18	29.8	0.094	2.4	11.5	SPR	C	Z
1.000	25.40	12556	4.45	113.0	.734	18.6	53	9.3	1.2	30	64	285	1.90	48.1	0.133	3.4	13.3	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.000	25.40	7001	4.50	114.3	.760	19.3	25	4.4	2.1	53	53	234	2.40	61.0	0.120	3.0	19.5	HD	C	Z
1.000	25.40	656	4.50	114.3	.646	16.4	153	27	1.0	26	158	704	3.27	83.2	0.177	4.5	18.5	HD	CG	Z
1.000	25.40	1949	4.69	119.0	.704	17.9	74	13	1.3	33	97	431	2.52	63.9	0.148	3.8	17.0	SPR	CG	Z
1.000	25.40	4365	4.75	120.7	.840	21.3	6.0	1.1	2.9	74	18	78	1.16	29.5	0.080	2.0	14.5	SPR	CG	Z
1.000	25.40	3062	4.81	122.2	.818	20.8	12	2.1	2.1	52	25	110	1.17	29.8	0.091	2.3	13.0	SPR	CG	Z
1.000	25.40	10115	4.88	123.8	.676	17.2	120	21	1.0	26	123	546	2.59	65.8	0.162	4.1	16.0	SPR	CG	N
1.000	25.40	333	5.00	127.0	.646	16.4	137	24	1.2	29	158	704	3.63	92.2	0.177	4.5	20.5	HD	CG	Z
1.000	25.40	S-3106	5.13	130.2	.840	21.3	4.7	.82	3.5	89	17	73	1.28	32.5	0.080	2.0	16.0	SST	CG	N
1.000	25.40	S-270	5.13	130.2	.820	20.8	7.8	1.4	2.9	73	22	99	1.44	36.6	0.090	2.3	16.0	SST	CG	N
1.000	25.40	2605	5.25	133.4	.790	20.1	15	2.7	2.5	63	38	168	2.00	50.7	0.105	2.7	18.0	SPR	C	Z
1.000	25.40	12150	5.50	139.7	.700	17.8	54	9.4	1.8	46	98	437	3.60	91.4	0.150	3.8	24.0	SPR	CG	Z
1.000	25.40	848	6.00	152.4	.676	17.2	74	13	1.7	42	123	546	4.00	101.5	0.162	4.1	24.7	HD	CG	Z
1.000	25.40	11617	6.50	165.1	.814	20.7	8.0	1.4	3.3	84	26	118	1.95	49.6	0.093	2.4	20.0	SPR	CG	Z
1.000	25.40	2880	6.88	174.6	.706	17.9	49	8.6	1.9	49	95	423	3.53	89.6	0.147	3.7	24.0	SPR	CG	Z
1.000	25.40	S-1251	7.25	184.2	.818	20.8	8.2	1.4	2.8	72	23	102	1.46	37.0	0.091	2.3	16.0	SST	CG	N
1.000	25.40	12115	7.50	190.5	.660	16.8	66	11	1.7	44	113	502	5.78	146.8	0.170	4.3	34.0	SPR	CG	Z
1.000	25.40	S-121	8.00	203.2	.930	23.6	.15	.03	7.4	188	1.1	4.9	.60	15.1	0.035	0.9	16.0	SST	C	N
1.000	25.40	884	8.00	203.2	.818	20.8	5.6	.98	4.4	113	25	110	2.41	61.3	0.091	2.3	25.5	HD	C	Z
1.000	25.40	873	8.00	203.2	.790	20.1	9.3	1.6	4.1	103	38	168	2.97	75.3	0.105	2.7	28.3	HD	CG	Z
1.000	25.40	866	8.00	203.2	.760	19.3	15	2.7	3.5	90	54	241	3.78	96.0	0.120	3.0	30.5	HD	C	Z
1.000	25.40	856	8.00	203.2	.730	18.5	25	4.3	3.0	77	74	330	4.32	109.7	0.135	3.4	32.0	HD	CG	Z
1.000	25.40	S-464	8.00	203.2	.730	18.5	21	3.7	3.1	79	67	297	4.32	109.7	0.135	3.4	32.0	SST	CG	N
1.000	25.40	819	8.00	203.2	.704	17.9	37	6.4	2.7	67	97	431	4.81	122.2	0.148	3.8	32.5	HD	CG	Z
1.000	25.40	360	8.00	203.2	.586	14.9	183	32	1.3	33	235	1047	6.42	163.0	0.207	5.3	31.0	HD	CG	Z
1.000	25.40	10175	8.50	215.9	.646	16.4	114	20	1.4	35	158	704	4.29	109.0	0.177	4.5	24.3	SPR	CG	Z
1.000	25.40	2962	9.00	228.6	.790	20.1	8.3	1.5	4.5	115	38	168	3.39	86.0	0.105	2.7	31.3	SPR	C	Z
1.000	25.40	910	10.0	254.0	.790	20.1	7.0	1.2	5.4	138	38	168	3.99	101.3	0.105	2.7	37.0	HD	C	Z
1.000	25.40	11576	11.0	279.4	.828	21.0	3.5	.61	6.3	160	22	97	2.82	71.5	0.086	2.2	31.8	SPR	C	N
1.000	25.40	901	12.0	304.8	.856	21.7	1.8	.32	7.1	181	13	57	2.14	54.4	0.072	1.8	28.8	HD	C	Z
1.000	25.40	298	12.0	304.8	.840	21.3	2.4	.41	7.5	190	18	78	2.80	71.1	0.080	2.0	34.0	HD	C	Z
1.000	25.40	341	12.0	304.8	.616	15.6	99	17	1.9	49	190	847	7.58	192.6	0.192	4.9	39.5	HD	CG	Z
1.000	25.40	3069	16.8	425.5	.704	17.9	20	3.5	4.8	123	97	431	8.55	217.1	0.148	3.8	57.8	SPR	CG	GI
1.010	25.65	72489	1.00	25.4	.786	20.0	105	18	.44	11	46	206	.56	14.2	0.112	2.8	5.00	MW	CG	N
1.010	25.65	72489S	1.00	25.4	.786	20.0	90	16	.44	11	39	175	.56	14.2	0.112	2.8	5.00	SST	CG	N
1.010	25.65	72491	1.50	38.1	.786	20.0	64	11	.73	19	47	208	.77	19.6	0.112	2.8	6.88	MW	CG	N
1.010	25.65	72491S	1.50	38.1	.786	20.0	54	9.5	.73	19	40	177	.77	19.6	0.112	2.8	6.88	SST	CG	N
1.010	25.65	72493	2.00	50.8	.786	20.0	46	8.1	1.0	26	47	209	.98	24.9	0.112	2.8	8.75	MW	CG	N
1.010	25.65	72493S	2.00	50.8	.786	20.0	39	6.8	1.0	26	40	177	.98	24.9	0.112	2.8	8.75	SST	CG	N
1.010	25.65	72495	2.50	63.5	.786	20.0	36	6.3	1.3	33	47	207	1.20	30.6	0.112	2.8	10.8	MW	CG	N
1.010	25.65	72495S	2.50	63.5	.786	20.0	31	5.3	1.3	33	40	176	1.20	30.6	0.112	2.8	10.8	SST	CG	N
1.010	25.65	72497	3.00	76.2	.786	20.0	29	5.1	1.6	40	47	207	1.41	35.9	0.112	2.8	12.6	MW	CG	N
1.010	25.65	72497S	3.00	76.2	.786	20.0	25	4.4	1.6	40	40	176	1.41	35.9	0.112	2.8	12.6	SST	CG	N
1.010	25.65	72499	3.50	88.9	.786	20.0	25	4.4	1.9	48	47	208	1.62	41.2	0.112	2.8	14.5	MW	CG	N
1.010	25.65	72499S	3.50	88.9	.786	20.0	21	3.7	1.9	48	40	177	1.62	41.2	0.112	2.8	14.5	SST	CG	N
1.010	25.65	72501	4.00	101.6	.786	20.0	22	3.8	2.2	55	46	207	1.85	46.9	0.112	2.8	16.5	MW	CG	N
1.010	25.65	72501S	4.00	101.6	.786	20.0	18	3.2	2.2	55	40	176	1.85	46.9	0.112	2.8	16.5	SST	CG	N
1.010	25.65	72503	4.50	114.3	.786	20.0	19	3.3	2.4	62	47	207	2.06	52.3	0.112	2.8	18.4	MW	CG	N
1.010	25.65	72503S	4.50	114.3	.786	20.0	16	2.8	2.4	62	40	176	2.06	52.3	0.112	2.8	18.4	SST	CG	N
1.015	25.78	3882	.69	17.4	.775	19.7	416	73	.13	3.3	53	237	.36	9.1	0.120	3.0	3.00	HD	CG	Z
1.015	25.78	S-896	.88	22.2	.829	21.1	40	7.0	.41	10	16	73	.47	11.8	0.093	2.4	5.00	SST	CG	N
1.015	25.78	12136	1.28	32.5	.889	22.6	10	1.8	.86	22	9.0	40	.35	8.8	0.063	1.6	4.50	SPR	C	Z
1.015	25.78	S-1626	1.38	34.9	.909	23.1	5.7	.99	.90	23	5.1	23	.21	5.4	0.053	1.3	4.00	SST	CG	N
1.015	25.78	11694	1.50	38.1	.891	22.6	4.9	.86	1.1	27	5.2	23	.43	11.0	0.062	1.6	7.00	SPR	CG	Z
1.015	25.78	3390	1.50	38.1	.825	21.0	30	5.3	.84	21	25	112	.67	16.9	0.095	2.4	7.00	SPR	CG	Z
1.015	25.78	S-1021	1.63	41.3	.907	23.0	3.0	.52	1.3	33	3.9	17	.32	8.2	0.054	1.4	6.00	SST	CG	N
1.015	25.78	12059	1.69	42.8	.591	15.0	1869	327	.13	3.4	249	1106	1.06	26.9	0.212	5.4	5.00	SPR	CG	Z
1.015	25.78	11846	1.72	43.6	.767	19.5	142	25	.38	9.6	54	238	.74	18.9	0.124	3.1	5.00	SST	C	N
1.015	25.78	A13-62	1.78	45.2	.717	18.2	194	34	.45	12	88	391	1.04	26.5	0.149	3.8	7.00	SST	CG	N
1.015	25.78	12093	1.81	46.0	.781	19.8	94	17	.48	12	45	201	.64	16.3	0.117	3.0	5.50	SST	CG	N
1.015	25.78	S-28	2.00	50.8	.745	18.9	187	33	.35	8.9	66	293	.71	18.0	0.135	3.4	5.25	SST	CG	N
1.015	25.78	12547	2.00	50.8	.745	18.9	143	25	.46	12	66	293	.84	21.4	0.135	3.4	6.25	SST	CG	N
1.015	25.78	B12-52	2.13	54.0	.889	22.6	4.4	.77	1.6	41	7.1	32	.50	12.8	0.063	1.6	8.00	SPR	CG	N
1.015	25.78	11711	2.16	54.8	.845	21.5	11	2.0	1.3	32	14	64	.88	22.3	0.085	2.2	10.3	SPR	CG	N
1.015	25.78	S-1426	2.25	57.2	.805	20.4	34	5.9	1.0	26	35	154	.84	21.3	0.105	2.7	8.00	SST	CG	N
1.015	25.78	10455	2.25	57.2	.731	18.6	146	26	.58	15	85	377	1.14	28.9	0.142	3.6	8.00	SPR	CG	Z
1.015	25.78	12522	2.56	65.1	.775	19.7	59	10	.90	23	53	237	1.08	27.4	0.120	3.0	9.00	HD	CG	Z
1.015	25.78	10301	2.81	71.4	.641	16.3	344	60	.51	13	175	776	2.06	52.2	0.187	4.7	11.0	SPR	CG	Z
1.015	25.78	3367	3.13	79.4	.899	22.8	3.1	.54	2.3	58	7.0	31	.52	13.3	0.058	1.5	8.00	SPR	C	Z
1.015	25.78	S-420	3.31	84.1	.901	22.9	2.0	.34	2.8	70	5.4	24	.55	13.9	0.057	1.4	10.0	SST	CG	N
1.015	25.78	S-1618	3.50	88.9	.907	23.0	1.3	.23	2.9	73	3.8	17	.61	15.4	0.054	1.4	11.3	SST	CG	N
1.015	25.78	S-962	3.50	88.9	.825	21.0	15	2.7	1.7	42	26	114	1.00	25.3	0.095	2.4	10.5	SST	CG	N
1.015	25.78	B17-201	3.59	91.3	.935	23.7	.43	.07	3.1	80	1.3	6.0	.45	11.4	0.040	1.0	10.3	SST	C	N
1.015	25.78	2810	3.88	98.4	.887	22.5	5.6	.98	2.3	59	13	58	.45	11.4	0.064	1.6	7.00	MW	CG	Z
1.015	25.78	S-1222	4.88	123.8	.895	22.7	1.2	.22	3.8	96	4.7	21	1.08	27.4	0.060	1.5	17.0	SST	C	N
1.015	25.78	1823	4.88	123.8	.691	17.6	106	19	1.1	29	121	539	2.75	70.0	0.162	4.1	17.0	HD	CG	Z
1.015	25.78	12456	5.38	136.5	.763	19.4	37	6.5	1.7	42	62	274	2.14	54.4	0.126	3.2	16.0	SPR	C	N
1.015	25.78	2647	7.50	190.5	.833	21.2	7.2	1.3	4.7	120	34	152	1.75	44.5	0.091	2.3	19.3	MW	CG	Z
1.031	26.19	S-1084	.63	15.9	.871	22.1	60	10	.27	6.8	16	71	.24	6.1	0.080	2.0	3.00	SST	CG	N
1.031	26.19	MM-98	.69	17.4	.731	18.6	710	124	.13	3.4	96	425	.53	13.3	0.150	3.8	3.50	SPR	CG	Z
1.031	26.19	BB-40	.75	19.1	.931	23.6	2.1	.37	.45	11	.95	4.2	.30	7.6	0.050	1.3	6.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.031	26.19	10107	.81	20.7	.907	23.0	12	2.0	.57	14	6.6	29	.25	6.3	0.062	1.6	4.00	SPR	CG	Z
1.031	26.19	S-3054	.88	22.2	.915	23.2	15	2.7	.43	11	6.5	29	.23	5.9	0.058	1.5	3.00	SST	C	N
1.031	26.19	A10-65	1.03	26.2	.869	22.1	21	3.7	.63	16	13	59	.41	10.3	0.081	2.1	5.00	SST	CG	N
1.031	26.19	2678	1.13	28.6	.849	21.6	40	6.9	.58	15	23	102	.55	13.9	0.091	2.3	5.00	HD	C	Z
1.031	26.19	10852	1.38	34.9	.875	22.2	18	3.2	.82	21	15	66	.39	9.9	0.078	2.0	5.00	SST	CG	N
1.031	26.19	3339	1.44	36.5	.907	23.0	4.9	.86	1.0	26	5.0	22	.42	10.6	0.062	1.6	6.75	HD	CG	GI
1.031	26.19	10740	1.50	38.1	.929	23.6	5.2	.90	.92	23	4.7	21	.20	5.2	0.051	1.3	4.00	SPR	CG	Z
1.031	26.19	S-1417	1.50	38.1	.857	21.8	17	3.0	.80	20	14	61	.70	17.7	0.087	2.2	7.00	SST	C	N
1.031	26.19	10659	1.53	38.9	.741	18.8	244	43	.36	9.3	89	395	.83	21.2	0.145	3.7	5.75	SPR	CG	Z
1.031	26.19	12447	1.56	39.7	.791	20.1	53	9.2	.42	11	22	99	1.14	29.0	0.120	3.0	9.50	SPR	CG	N
1.031	26.19	10409	1.94	49.2	.657	16.7	487	85	.35	9.0	172	766	1.50	38.0	0.187	4.7	8.00	SPR	CG	Z
1.031	26.19	10676	1.97	50.0	.807	20.5	36	6.4	.74	19	27	119	1.23	31.3	0.112	2.8	10.0	SPR	C	Z
1.031	26.19	S-1532	2.00	50.8	.923	23.4	2.8	.50	1.7	43	4.8	21	.32	8.2	0.054	1.4	6.00	SST	CG	N
1.031	26.19	10457	2.19	55.6	.707	18.0	224	39	.53	14	119	531	1.42	36.0	0.162	4.1	8.75	SPR	CG	Z
1.031	26.19	NN-20	2.19	55.6	.571	14.5	1305	228	.23	5.8	297	1321	1.84	46.7	0.230	5.8	8.00	SPR	CG	Z
1.031	26.19	10722	2.28	57.9	.747	19.0	145	25	.58	15	84	372	1.10	28.0	0.142	3.6	7.75	SPR	CG	Z
1.031	26.19	2730	2.34	59.5	.911	23.1	5.1	.89	1.9	49	9.8	44	.42	10.7	0.060	1.5	6.00	MW	C	Z
1.031	26.19	2702	2.47	62.7	.761	19.3	111	19	.91	23	101	449	1.08	27.4	0.135	3.4	8.00	MW	CG	Z
1.031	26.19	2677	2.63	66.7	.871	22.1	12	2.1	1.4	37	17	76	.62	15.7	0.080	2.0	7.75	HD	CG	Z
1.031	26.19	10988	2.81	71.4	.657	16.7	325	57	.53	13	172	766	2.06	52.2	0.187	4.7	11.0	HD	CG	Z
1.031	26.19	S-1473	3.00	76.2	.871	22.1	4.8	.83	1.8	47	8.8	39	1.16	29.5	0.080	2.0	14.5	SST	CG	N
1.031	26.19	3401	3.63	92.1	.917	23.3	1.5	.26	2.8	72	4.2	19	.80	20.3	0.057	1.4	13.0	SPR	C	Z
1.031	26.19	B18-197	3.75	95.3	.959	24.4	.49	.09	3.5	88	1.7	7.5	.29	7.3	0.036	0.9	7.00	SPR	C	Z
1.031	26.19	1631	3.75	95.3	.851	21.6	10	1.7	2.3	59	23	104	1.29	32.8	0.090	2.3	13.3	SPR	C	Z
1.031	26.19	B9-48	3.88	98.4	.637	16.2	325	57	.62	16	200	888	2.66	67.6	0.197	5.0	13.5	SPR	CG	N
1.031	26.19	12004	9.88	250.8	.837	21.3	4.9	.85	6.0	151	29	129	3.30	83.8	0.097	2.5	34.0	SPR	CG	Z
1.046	26.57	1895	.75	19.1	.944	24.0	9.9	1.7	.47	12	4.7	21	.20	5.2	0.051	1.3	3.00	HD	C	Z
1.046	26.57	S-1035	.81	20.6	.806	20.5	154	27	.31	7.8	47	211	.50	12.6	0.120	3.0	4.00	SST	CG	N
1.046	26.57	S-3004	.81	20.6	.806	20.5	163	29	.29	7.4	47	211	.48	12.2	0.120	3.0	4.00	SST	CG	N
1.046	26.57	10973	.94	23.8	.934	23.7	13	2.3	.45	11	5.8	26	.22	5.7	0.056	1.4	3.00	SST	C	N
1.046	26.57	B18-193	1.03	26.2	.866	22.0	36	6.3	.49	12	18	79	.54	13.7	0.090	2.3	5.00	SPR	C	Z
1.046	26.57	A14-56	1.19	30.2	.916	23.3	7.8	1.4	.83	21	6.4	29	.36	9.1	0.065	1.7	5.50	SPR	CG	Z
1.046	26.57	S-1444	1.31	33.3	.864	21.9	33	5.7	.67	17	22	98	.46	11.6	0.091	2.3	5.00	SST	CG	N
1.046	26.57	3338	1.44	36.5	.916	23.3	5.4	.95	.98	25	5.3	24	.46	11.6	0.065	1.7	7.00	SPR	CG	Z
1.046	26.57	2985	1.47	37.3	.806	20.5	94	16	.55	14	52	231	.72	18.3	0.120	3.0	6.00	SPR	CG	Z
1.046	26.57	S-1199	1.50	38.1	.930	23.6	2.9	.51	1.0	26	3.0	14	.46	11.8	0.058	1.5	7.00	SST	C	N
1.046	26.57	3826	1.50	38.1	.918	23.3	5.1	.89	1.1	27	5.4	24	.45	11.4	0.064	1.6	7.00	SPR	CG	Z
1.046	26.57	12066	1.50	38.1	.808	20.5	90	16	.56	14	51	225	.71	18.1	0.119	3.0	6.00	SPR	CG	Z
1.046	26.57	11561	1.69	42.8	.924	23.5	10	1.8	.76	19	8.0	35	.31	7.7	0.061	1.5	4.00	SPR	C	Z
1.046	26.57	12245	1.72	43.6	.884	22.5	14	2.4	1.2	29	16	71	.57	14.4	0.081	2.1	7.00	SPR	CG	GI
1.046	26.57	S-1496	1.81	46.0	.902	22.9	12	2.1	.96	24	12	52	.36	9.1	0.072	1.8	5.00	SST	CG	N
1.046	26.57	11231	1.91	48.4	.896	22.8	13	2.3	1.1	27	14	62	.51	12.9	0.075	1.9	5.75	SPR	C	Z
1.046	26.57	3213	2.00	50.8	.934	23.7	3.8	.66	1.6	42	6.2	27	.33	8.4	0.056	1.4	6.00	SPR	CG	Z
1.046	26.57	S-350	2.00	50.8	.836	21.2	52	9.1	.64	16	34	149	.58	14.7	0.105	2.7	5.50	SST	CG	N
1.046	26.57	3067	2.00	50.8	.750	19.1	159	28	.59	15	93	414	1.18	30.1	0.148	3.8	8.00	SPR	CG	Z
1.046	26.57	3757	2.25	57.2	.836	21.2	47	8.2	.78	20	36	161	.68	17.3	0.105	2.7	6.50	SPR	CG	Z
1.046	26.57	3009	2.25	57.2	.722	18.3	205	36	.58	15	118	525	1.46	37.0	0.162	4.1	9.00	SPR	CG	Z
1.046	26.57	S-1425	2.63	66.7	.896	22.8	6.9	1.2	1.9	48	13	58	.62	15.7	0.075	1.9	8.25	SST	C	N
1.046	26.57	S-3244	2.66	67.5	.898	22.8	6.6	1.2	1.9	49	13	56	.62	15.7	0.074	1.9	8.33	SST	CG	N
1.046	26.57	2744	3.88	98.4	.922	23.4	1.7	.29	2.9	73	4.8	21	1.01	25.6	0.062	1.6	15.3	HD	C	Z
1.046	26.57	11992	4.88	123.8	.822	20.9	21	3.7	2.0	50	42	189	1.68	42.7	0.112	2.8	15.0	SPR	CG	Z
1.046	26.57	3329	4.88	123.8	.722	18.3	96	17	1.2	31	118	525	2.75	70.0	0.162	4.1	17.0	SPR	CG	Z
1.046	26.57	11684	7.50	190.5	.790	20.1	28	4.8	2.3	58	63	279	2.88	73.2	0.128	3.3	22.0	SPR	CG	Z
1.046	26.57	3427	8.50	215.9	.846	21.5	8.9	1.6	3.5	89	31	140	2.10	53.3	0.100	2.5	21.0	SPR	CG	Z
1.062	26.97	AA-80	.88	22.2	.942	23.9	6.0	1.0	.59	15	3.5	16	.29	7.2	0.060	1.5	4.75	SST	CG	N
1.062	26.97	S-1394	.88	22.2	.938	23.8	7.4	1.3	.60	15	4.4	20	.28	7.1	0.062	1.6	4.50	SST	CG	N
1.062	26.97	S-311	.88	22.2	.914	23.2	26	4.5	.48	12	12	55	.26	6.6	0.074	1.9	3.50	SST	CG	N
1.062	26.97	4192	1.00	25.4	.938	23.8	11	1.9	.69	18	7.3	33	.31	7.9	0.062	1.6	4.00	HD	C	Z
1.062	26.97	S-1221	1.00	25.4	.872	22.1	20	3.6	.29	7.3	5.9	26	.71	18.1	0.095	2.4	7.50	SST	CG	N
1.062	26.97	12714	1.03	26.2	.822	20.9	143	25	.36	9.1	51	228	.54	13.7	0.120	3.0	4.50	HD	CG	BO
1.062	26.97	10516	1.03	26.2	.792	20.1	199	35	.32	8.1	63	281	.60	15.2	0.135	3.4	4.50	SST	CG	N
1.062	26.97	MM-70	1.34	34.1	.802	20.4	145	25	.43	11	63	280	.72	18.2	0.130	3.3	5.50	SPR	CG	N
1.062	26.97	MM-4	1.38	34.9	.942	23.9	3.7	.65	.96	24	3.5	16	.42	10.7	0.060	1.5	7.00	SPR	CG	Z
1.062	26.97	10645	1.50	38.1	.838	21.3	66	12	.63	16	42	186	.67	17.1	0.112	2.8	6.00	SPR	CG	Z
1.062	26.97	2854	1.50	38.1	.822	20.9	114	20	.45	11	51	228	.64	16.1	0.120	3.0	5.25	SPR	CG	Z
1.062	26.97	S-3009	1.50	38.1	.822	20.9	89	16	.53	13	47	208	.66	16.8	0.120	3.0	5.50	SST	CG	N
1.062	26.97	3234	1.50	38.1	.708	18.0	740	130	.20	5.2	150	668	.84	21.4	0.177	4.5	4.75	SPR	CG	Z
1.062	26.97	PP-46	1.50	38.1	.662	16.8	1197	210	.17	4.3	203	904	1.00	25.4	0.200	5.1	5.00	SPR	CG	Z
1.062	26.97	10864	1.56	39.7	1.010	25.7	.13	.02	1.4	35	.18	.80	.18	4.6	0.026	0.7	6.00	SST	C	N
1.062	26.97	11661	1.59	40.5	.862	21.9	29	5.1	.84	21	25	110	.75	19.1	0.100	2.5	7.50	SPR	CG	Z
1.062	26.97	S-83	1.63	41.3	.902	22.9	22	3.8	.72	18	16	69	.36	9.1	0.080	2.0	4.50	SST	CG	N
1.062	26.97	10207	1.63	41.3	.612	15.5	1571	275	.17	4.4	273	1214	1.35	34.3	0.225	5.7	6.00	SPR	CG	Z
1.062	26.97	10796	1.75	44.5	.826	21.0	133	23	.37	9.3	49	217	.53	13.5	0.118	3.0	4.50	SPR	CG	BO
1.062	26.97	3007	1.84	46.8	.954	24.2	4.0	.70	1.4	35	5.5	24	.32	8.2	0.054	1.4	5.00	SPR	C	Z
1.062	26.97	S-3125	1.88	47.6	.918	23.3	5.8	1.0	1.2	31	7.1	31	.65	16.5	0.072	1.8	8.00	SST	C	N
1.062	26.97	4388	1.88	47.6	.910	23.1	13	2.3	1.1	27	14	64	.51	13.0	0.076	1.9	5.75	SPR	C	Z
1.062	26.97	MM-44	1.88	47.6	.882	22.4	21	3.6	1.1	28	23	101	.63	16.0	0.090	2.3	7.00	SPR	CG	Z
1.062	26.97	12311	1.94	49.2	.862	21.9	29	5.1	1.1	27	31	138	.75	19.1	0.100	2.5	7.50	SPR	CG	Z
1.062	26.97	S-1385	2.00	50.8	.880	22.4	17	3.0	1.3	32	22	97	.68	17.3	0.091	2.3	7.50	SST	CG	N
1.062	26.97	4352	2.19	55.6	.892	22.7	16	2.8	1.2	31	20	89	.60	15.1	0.085	2.2	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.062	26.97	11636	2.25	57.2	.842	21.4	35	6.1	1.1	29	40	176	.99	25.1	0.110	2.8	9.00	SPR	CG	Z
1.062	26.97	CC-44	2.25	57.2	.742	18.8	190	33	.53	13	100	443	1.28	32.5	0.160	4.1	8.00	SST	CG	N
1.062	26.97	12520	2.31	58.7	.812	20.6	71	12	.81	21	58	257	1.13	28.6	0.125	3.2	8.00	SPR	C	N
1.062	26.97	3133	2.38	60.3	.922	23.4	9.4	1.7	1.2	30	11	50	.47	12.0	0.070	1.8	5.75	SPR	C	Z
1.062	26.97	3942	2.50	63.5	.766	19.5	113	20	.81	21	92	408	1.48	37.6	0.148	3.8	10.0	SPR	CG	Z
1.062	26.97	A13-56	2.69	68.2	.916	23.3	4.4	.77	1.9	49	8.5	38	.77	19.5	0.073	1.9	10.5	SST	CG	N
1.062	26.97	S-437	3.38	85.7	.904	23.0	4.7	.83	2.4	60	11	49	1.02	25.8	0.079	2.0	13.0	SST	CG	N
1.062	26.97	S-1326	3.50	88.9	.918	23.3	3.5	.61	2.6	67	9.1	41	.86	21.9	0.072	1.8	12.0	SST	CG	N
1.062	26.97	3272	3.63	92.1	.848	21.5	22	3.8	1.7	44	38	168	1.28	32.6	0.107	2.7	12.0	SPR	CG	Z
1.062	26.97	12436	3.88	98.4	.938	23.8	2.2	.39	3.1	79	6.9	31	.78	19.7	0.062	1.6	11.5	SPR	C	Z
1.062	26.97	S-444	4.63	117.5	.862	21.9	12	2.0	2.5	62	29	128	1.40	35.6	0.100	2.5	14.0	SST	CG	N
1.062	26.97	S-3217	5.00	127.0	.992	25.2	.15	.03	4.5	114	.69	3.1	.51	12.9	0.035	0.9	13.5	SST	C	N
1.062	26.97	4108	5.00	127.0	.822	20.9	27	4.8	1.9	47	51	228	1.92	48.8	0.120	3.0	15.0	SPR	C	Z
1.062	26.97	334	6.00	152.4	.708	18.0	96	17	1.6	40	150	668	4.12	104.5	0.177	4.5	23.3	HD	CG	Z
1.062	26.97	2755	7.25	184.2	.738	18.7	61	11	1.9	49	116	518	3.94	100.1	0.162	4.1	24.3	SPR	CG	Z
1.062	26.97	1936	7.63	193.7	.880	22.4	6.3	1.1	3.7	94	23	104	1.73	43.9	0.091	2.3	19.0	SPR	CG	Z
1.062	26.97	1703	7.63	193.7	.738	18.7	60	10	1.9	49	116	518	4.16	105.6	0.162	4.1	24.7	SPR	C	Z
1.062	26.97	385	11.5	292.1	.852	21.6	12	2.2	2.9	73	36	159	2.00	50.7	0.105	2.7	18.0	HD	C	Z
1.062	26.97	4170	11.5	292.1	.852	21.6	5.7	1.0	6.3	159	36	159	3.99	101.3	0.105	2.7	37.0	SPR	C	Z
1.070	27.18	12804	4.00	101.6	.656	16.7	315	55	.71	18	223	991	3.10	78.7	0.207	5.3	15.0	HD	CG	Z
1.078	27.38	11507	.78	19.8	.934	23.7	19	3.3	.42	11	8.0	36	.36	9.1	0.072	1.8	4.00	SPR	CG	Z
1.078	27.38	12074	1.00	25.4	.918	23.3	30	5.2	.55	14	16	73	.32	8.1	0.080	2.0	4.00	SPR	CG	Z
1.078	27.38	10525	1.00	25.4	.868	22.0	47	8.3	.37	9.4	18	78	.63	16.0	0.105	2.7	6.00	SPR	CG	Z
1.078	27.38	11702	1.13	28.6	.992	25.2	1.3	.22	.89	23	1.1	5.0	.24	6.0	0.043	1.1	5.50	SPR	CG	Z
1.078	27.38	10685	1.13	28.6	.908	23.1	27	4.8	.66	17	18	79	.47	11.9	0.085	2.2	4.50	SST	C	N
1.078	27.38	11728	1.13	28.6	.828	21.0	135	24	.42	11	57	253	.63	15.9	0.125	3.2	5.00	SPR	CG	Z
1.078	27.38	12318	1.19	30.2	.992	25.2	1.3	.22	.91	23	1.2	5.1	.28	7.1	0.043	1.1	5.50	SPR	C	Z
1.078	27.38	11850	1.34	34.1	.922	23.4	12	2.1	.88	22	10	46	.47	11.9	0.078	2.0	6.00	SST	CG	N
1.078	27.38	12307	1.47	37.3	.958	24.3	3.5	.62	.99	25	3.5	16	.48	12.2	0.060	1.5	7.00	SPR	C	Z
1.078	27.38	A13-69	1.47	37.3	.894	22.7	23	4.0	.90	23	21	93	.56	14.3	0.092	2.3	6.13	SST	CG	N
1.078	27.38	12268	1.50	38.1	.966	24.5	3.8	.66	1.2	30	4.5	20	.31	7.8	0.056	1.4	5.50	SPR	CG	Z
1.078	27.38	1908	1.50	38.1	.852	21.6	65	11	.65	16	42	188	.68	17.2	0.113	2.9	6.00	SPR	CG	Z
1.078	27.38	1739	1.63	41.3	.782	19.9	229	40	.55	14	127	564	.85	21.6	0.148	3.8	5.75	MW	CG	Z
1.078	27.38	1741	1.75	44.5	.896	22.8	34	6.0	.68	17	23	103	.55	13.9	0.091	2.3	5.00	HD	C	Z
1.078	27.38	11564	1.81	46.0	.960	24.4	4.7	.82	1.4	36	6.7	30	.38	9.7	0.059	1.5	5.50	SPR	CG	Z
1.078	27.38	S-844	1.88	47.6	.908	23.1	14	2.4	1.3	33	18	78	.58	14.8	0.085	2.2	6.88	SST	CG	N
1.078	27.38	S-356	2.00	50.8	.988	25.1	1.6	.27	1.7	44	2.7	12	.27	6.9	0.045	1.1	5.00	SST	C	N
1.078	27.38	11586	2.00	50.8	.896	22.8	21	3.6	1.1	29	23	103	.73	18.5	0.091	2.3	7.00	SPR	CG	N
1.078	27.38	12156	2.00	50.8	.808	20.5	104	18	.67	17	69	308	1.01	25.7	0.135	3.4	7.50	SPR	CG	Z
1.078	27.38	B11-29	2.00	50.8	.808	20.5	127	22	.55	14	69	308	.88	22.3	0.135	3.4	6.50	SPR	CG	N
1.078	27.38	10992	2.00	50.8	.754	19.2	224	39	.51	13	115	511	1.42	36.0	0.162	4.1	7.75	HD	CG	Z
1.078	27.38	10939	2.06	52.4	.934	23.7	6.3	1.1	1.5	38	9.4	42	.58	14.6	0.072	1.8	8.00	SPR	CG	Z
1.078	27.38	3121	2.13	54.0	.934	23.7	9.5	1.7	1.3	32	12	53	.43	11.0	0.072	1.8	6.00	SPR	CG	Z
1.078	27.38	11870	2.13	54.0	.894	22.7	20	3.4	1.2	31	24	106	.69	17.5	0.092	2.3	7.50	SPR	CG	N
1.078	27.38	11165	2.13	54.0	.782	19.9	202	35	.45	11	91	403	.93	23.5	0.148	3.8	6.25	SPR	CG	Z
1.078	27.38	S-129	2.19	55.6	.932	23.7	8.2	1.4	1.4	36	12	52	.46	11.6	0.073	1.9	6.25	SST	CG	N
1.078	27.38	S-3166	2.25	57.2	.954	24.2	4.1	.73	1.8	47	7.6	34	.39	9.8	0.062	1.6	6.25	SST	CG	N
1.078	27.38	S-1672	2.25	57.2	.898	22.8	14	2.5	1.4	36	21	92	.72	18.3	0.090	2.3	8.00	SST	CG	N
1.078	27.38	B17-132	2.50	63.5	1.026	26.1	.08	.01	2.3	58	.19	.84	.23	5.9	0.026	0.7	8.00	SST	C	N
1.078	27.38	S-422	2.50	63.5	.894	22.7	18	3.1	1.2	32	22	98	.67	16.9	0.092	2.3	7.25	SST	CG	N
1.078	27.38	11827	2.50	63.5	.808	20.5	70	12	.90	23	62	277	1.25	31.7	0.135	3.4	9.25	SST	CG	N
1.078	27.38	10369	2.50	63.5	.796	20.2	138	24	.57	14	79	350	.99	25.1	0.141	3.6	7.00	SPR	CG	Z
1.078	27.38	2649	2.50	63.5	.784	19.9	104	18	.85	22	89	395	1.47	37.3	0.147	3.7	10.0	HD	CG	Z
1.078	27.38	RR-58	2.75	69.9	.998	25.3	.41	.07	2.3	59	.95	4.2	.44	11.2	0.040	1.0	10.0	SPR	C	Z
1.078	27.38	11759	2.84	72.2	.954	24.2	1.6	.27	1.9	47	2.9	13	.99	25.2	0.062	1.6	15.0	SPR	C	Z
1.078	27.38	S-95	3.00	76.2	.578	14.7	1075	188	.28	7.2	304	1352	2.50	63.5	0.250	6.4	10.0	SST	CG	N
1.078	27.38	2698	3.75	95.3	.748	19.0	127	22	.95	24	121	539	2.15	54.5	0.165	4.2	13.0	SPR	CG	Z
1.078	27.38	11674	4.00	101.6	.996	25.3	.28	.05	3.4	86	.95	4.2	.62	15.6	0.041	1.0	15.0	SPR	CG	Z
1.078	27.38	10386	4.00	101.6	.944	24.0	3.3	.58	3.1	79	10	45	.70	17.9	0.067	1.7	10.5	SPR	CG	Z
1.078	27.38	S-172	4.25	108.0	.868	22.0	38	6.7	.86	22	33	145	.66	16.9	0.105	2.7	6.33	SST	CG	N
1.078	27.38	12131	4.84	123.0	.882	22.4	11	1.9	2.7	67	29	128	1.57	39.8	0.098	2.5	15.0	SPR	C	Z
1.078	27.38	10865	5.00	127.0	.918	23.3	5.3	.92	2.9	74	15	68	.96	24.4	0.080	2.0	12.0	SST	CG	N
1.078	27.38	11921	5.94	150.8	.828	21.0	19	3.3	2.7	70	52	231	2.63	66.7	0.125	3.2	21.0	SST	CG	N
1.078	27.38	1599	7.50	190.5	.754	19.2	57	10	2.0	51	115	511	3.97	100.8	0.162	4.1	24.5	HD	CG	Z
1.078	27.38	4028	19.0	482.6	.782	19.9	19	3.3	4.8	122	91	403	7.03	178.6	0.148	3.8	47.5	SPR	CG	Z
1.094	27.79	S-111	.75	19.1	.800	20.3	687	120	.11	2.9	79	351	.44	11.2	0.147	3.7	3.00	SST	CG	N
1.094	27.79	S-1549	.88	22.2	.924	23.5	51	8.9	.36	9.1	18	81	.28	7.0	0.085	2.2	3.25	SST	CG	N
1.094	27.79	S-1397	.88	22.2	.868	22.0	108	19	.35	9.0	38	169	.45	11.5	0.113	2.9	4.00	SST	CG	N
1.094	27.79	S-3088	.94	23.8	.924	23.5	42	7.4	.43	11	18	81	.30	7.6	0.085	2.2	3.50	SST	CG	N
1.094	27.79	12149	.94	23.8	.910	23.1	41	7.2	.43	11	18	79	.51	12.9	0.092	2.3	4.50	SPR	C	Z
1.094	27.79	A15-59	.97	24.6	.910	23.1	45	7.9	.48	12	22	97	.37	9.3	0.092	2.3	4.00	SST	CG	N
1.094	27.79	S-130	1.00	25.4	.884	22.5	79	14	.41	10	32	143	.42	10.7	0.105	2.7	4.00	SST	CG	N
1.094	27.79	KK-44	1.06	27.0	.954	24.2	16	2.8	.68	17	11	48	.28	7.1	0.070	1.8	4.00	SPR	CG	GI
1.094	27.79	3910	1.25	31.8	.912	23.2	33	5.7	.70	18	23	101	.46	11.6	0.091	2.3	5.00	SPR	CG	GI
1.094	27.79	11741	1.25	31.8	.904	23.0	39	6.9	.66	17	26	115	.48	12.1	0.095	2.4	5.00	SPR	CG	Z
1.094	27.79	2814	1.38	34.9	.950	24.1	14	2.5	.82	21	12	53	.32	8.2	0.072	1.8	4.50	HD	CG	Z
1.094	27.79	3034	1.38	34.9	.944	24.0	16	2.8	.83	21	13	59	.42	10.8	0.075	1.9	4.67	SPR	C	Z
1.094	27.79	10223	1.50	38.1	.902	22.9	38	6.6	.71	18	27	119	.50	12.8	0.096	2.4	5.25	SPR	CG	Z
1.094	27.79	HH-98	1.50	38.1	.894	22.7	42	7.3	.72	18	30	134	.55	14.0	0.100	2.5	5.50	SPR	CG	Z
1.094	27.79	12555	1.50	38.1	.884	22.5	45	7.9	.72	18	32	143	.58	14.7	0.105	2.7	5.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.094	27.79	12111	1.53	38.9	.934	23.7	11	1.9	.93	24	10	46	.60	15.2	0.080	2.0	6.50	SST	C	N
1.094	27.79	3132	1.59	40.5	.894	22.7	33	5.7	.92	23	30	134	.65	16.5	0.100	2.5	6.50	SPR	CG	Z
1.094	27.79	12006	1.59	40.5	.782	19.9	295	52	.34	8.8	102	452	.86	21.8	0.156	4.0	5.50	SPR	CG	Z
1.094	27.79	1671	1.63	41.3	.798	20.3	217	38	.41	10	89	397	.85	21.6	0.148	3.8	5.75	SPR	CG	Z
1.094	27.79	11278	1.69	42.8	.782	19.9	258	45	.39	10	102	452	.94	23.8	0.156	4.0	6.00	SPR	CG	Z
1.094	27.79	10332	1.88	47.6	.810	20.6	159	28	.50	13	79	352	.89	22.6	0.142	3.6	6.25	SPR	CG	Z
1.094	27.79	945	2.00	50.8	.974	24.7	3.7	.66	1.6	39	5.8	26	.45	11.4	0.060	1.5	6.50	MW	C	Z
1.094	27.79	1577	2.00	50.8	.884	22.5	34	5.9	1.0	26	35	154	.77	19.6	0.105	2.7	7.33	SPR	CG	Z
1.094	27.79	3262	2.00	50.8	.824	20.9	98	17	.69	18	68	304	1.01	25.7	0.135	3.4	7.50	HD	CG	Z
1.094	27.79	10325	2.13	54.0	.810	20.6	135	24	.58	15	79	352	.99	25.2	0.142	3.6	7.00	SPR	CG	Z
1.094	27.79	S-1246	2.19	55.6	.950	24.1	7.9	1.4	1.4	36	11	49	.43	11.0	0.072	1.8	6.00	SST	C	N
1.094	27.79	11284	2.19	55.6	.798	20.3	172	30	.52	13	89	397	1.00	25.4	0.148	3.8	6.75	SPR	CG	Z
1.094	27.79	3697	2.25	57.2	1.006	25.6	1.2	.20	1.9	49	2.3	10	.31	7.8	0.044	1.1	6.00	SPR	C	Z
1.094	27.79	11971	2.38	60.3	.914	23.2	14	2.5	1.4	36	20	91	.70	17.7	0.090	2.3	7.75	SST	CG	N
1.094	27.79	11381	2.50	63.5	.944	24.0	7.6	1.3	1.6	42	13	56	.53	13.3	0.075	1.9	7.00	SST	CG	N
1.094	27.79	3309	2.50	63.5	.814	20.7	91	16	.84	21	76	338	1.26	32.0	0.140	3.6	9.00	SPR	CG	Z
1.094	27.79	S-448	2.63	66.7	.872	22.1	32	5.6	1.1	29	36	161	.92	23.3	0.111	2.8	8.25	SST	CG	N
1.094	27.79	10381	2.63	66.7	.868	22.0	31	5.4	1.3	34	42	186	1.13	28.7	0.113	2.9	10.0	SPR	CG	Z
1.094	27.79	3913	2.75	69.9	1.012	25.7	.43	.08	2.3	58	1.0	4.4	.45	11.5	0.041	1.0	10.0	SPR	C	Z
1.094	27.79	S-1439	2.75	69.9	.992	25.2	1.4	.24	2.3	59	3.1	14	.43	11.0	0.051	1.3	7.50	SST	C	N
1.094	27.79	3163	2.75	69.9	.782	19.9	163	29	.62	16	102	452	1.33	33.9	0.156	4.0	8.50	SPR	CG	Z
1.094	27.79	11388	3.41	86.5	.844	21.4	38	6.7	1.3	34	51	228	1.38	34.9	0.125	3.2	11.0	SST	CG	N
1.094	27.79	S-279	3.63	92.1	.912	23.2	6.3	1.1	2.2	56	14	62	1.41	35.8	0.091	2.3	15.5	SST	CG	N
1.094	27.79	3711	4.00	101.6	.984	25.0	1.2	.21	3.3	83	3.9	17	.72	18.2	0.055	1.4	12.0	SPR	C	Z
1.094	27.79	3374	4.00	101.6	.814	20.7	55	9.7	1.4	35	76	338	1.89	48.0	0.140	3.6	13.5	SPR	CG	GI
1.094	27.79	12169	4.06	103.2	.782	19.86	115	20	.88	22.35	101	447	1.72	43.69	0.158	4.0	11.0	SPR	CG	GI
1.094	27.79	10948	4.19	106.4	.854	21.7	26	4.6	1.7	44	45	202	1.56	39.6	0.120	3.0	13.0	SST	CG	N
1.094	27.79	2713	4.75	120.7	.894	22.7	11	1.9	2.8	70	30	134	1.55	39.4	0.100	2.5	15.5	SPR	CG	Z
1.094	27.79	11775	4.91	124.6	.900	22.9	9.7	1.7	2.6	67	25	113	1.33	33.9	0.097	2.5	13.8	SST	CG	N
1.094	27.79	12312	5.00	127.0	.884	22.5	15	2.6	2.3	59	35	154	1.58	40.0	0.105	2.7	14.0	HD	C	Z
1.094	27.79	S-3046	5.13	130.2	.844	21.4	24	4.2	2.1	54	51	228	2.00	50.8	0.125	3.2	16.0	SST	CG	N
1.094	27.79	4130	5.38	136.5	.914	23.2	9.3	1.6	2.4	60	22	98	1.08	27.4	0.090	2.3	12.0	SPR	CG	Z
1.094	27.79	11709	6.00	152.4	.910	23.1	7.9	1.4	3.0	76	24	105	1.38	35.1	0.092	2.3	15.0	SPR	CG	Z
1.094	27.79	3471	7.50	190.5	.766	19.5	57	10	2.0	52	117	522	4.18	106.2	0.164	4.2	24.5	SPR	C	Z
1.094	27.79	1643	7.88	200.0	.884	22.5	7.5	1.3	4.6	117	35	154	2.73	69.3	0.105	2.7	26.0	SPR	CG	Z
1.094	27.79	12180	8.19	207.9	.888	22.6	6.9	1.2	4.7	120	33	146	2.68	68.0	0.103	2.6	26.0	SPR	CG	Z
1.094	27.79	361	11.3	285.8	.740	18.8	46	8.0	3.2	81	146	651	7.43	188.8	0.177	4.5	42.0	HD	CG	Z
1.100	27.94	72504	.88	22.4	.936	23.8	43	7.5	.57	14	24	108	.29	7.3	0.082	2.1	3.50	MW	CG	N
1.100	27.94	72504S	.88	22.4	.936	23.8	36	6.3	.45	11	16	72	.29	7.3	0.082	2.1	3.50	SST	CG	N
1.100	27.94	72514	.88	22.4	.930	23.6	45	7.9	.57	15	26	115	.31	7.8	0.085	2.2	3.63	MW	CG	N
1.100	27.94	72514S	.88	22.4	.930	23.6	38	6.7	.47	12	18	80	.31	7.8	0.085	2.2	3.63	SST	CG	N
1.100	27.94	72527	.88	22.4	.914	23.2	65	11	.52	13	34	150	.34	8.6	0.093	2.4	3.63	MW	CG	N
1.100	27.94	72527S	.88	22.4	.914	23.2	55	9.6	.41	10	22	100	.34	8.6	0.093	2.4	3.63	SST	CG	N
1.100	27.94	72537	.88	22.4	.908	23.1	70	12	.52	13	36	161	.36	9.1	0.096	2.4	3.75	MW	CG	N
1.100	27.94	72537S	.88	22.4	.908	23.1	59	10	.41	11	25	109	.36	9.1	0.096	2.4	3.75	SST	CG	N
1.100	27.94	72549	.88	22.4	.890	22.6	98	17	.47	12	46	206	.41	10.3	0.105	2.7	3.88	MW	CG	N
1.100	27.94	72549S	.88	22.4	.890	22.6	83	15	.39	9.8	32	142	.41	10.3	0.105	2.7	3.88	SST	CG	N
1.100	27.94	72560	.88	22.4	.876	22.3	126	22	.45	11	56	249	.43	11.0	0.112	2.8	3.88	MW	CG	N
1.100	27.94	72560S	.88	22.4	.876	22.3	107	19	.35	8.8	37	164	.43	11.0	0.112	2.8	3.88	SST	CG	N
1.100	27.94	72582	.88	22.4	.850	21.6	194	34	.38	9.7	74	328	.50	12.7	0.125	3.2	4.00	MW	CG	N
1.100	27.94	72582S	.88	22.4	.850	21.6	165	29	.31	7.8	51	227	.50	12.7	0.125	3.2	4.00	SST	CG	N
1.100	27.94	72505	1.00	25.4	.936	23.8	36	6.3	.67	17	24	108	.31	7.8	0.082	2.1	3.75	MW	CG	N
1.100	27.94	72505S	1.00	25.4	.936	23.8	31	5.4	.53	13	16	72	.31	7.8	0.082	2.1	3.75	SST	CG	N
1.100	27.94	72515	1.00	25.4	.930	23.6	38	6.7	.67	17	26	114	.33	8.4	0.085	2.2	3.88	MW	CG	N
1.100	27.94	72515S	1.00	25.4	.930	23.6	33	5.7	.55	14	18	80	.33	8.4	0.085	2.2	3.88	SST	CG	N
1.100	27.94	72528	1.00	25.4	.914	23.2	55	9.6	.62	16	34	150	.36	9.2	0.093	2.4	3.88	MW	CG	N
1.100	27.94	72528S	1.00	25.4	.914	23.2	46	8.1	.48	12	22	100	.36	9.2	0.093	2.4	3.88	SST	CG	N
1.100	27.94	72538	1.00	25.4	.908	23.1	59	10	.62	16	36	162	.38	9.8	0.096	2.4	4.00	MW	CG	N
1.100	27.94	72538S	1.00	25.4	.908	23.1	50	8.8	.49	12	25	109	.38	9.8	0.096	2.4	4.00	SST	CG	N
1.100	27.94	72550	1.00	25.4	.890	22.6	82	14	.57	14	47	207	.43	11.0	0.105	2.7	4.13	MW	CG	N
1.100	27.94	72550S	1.00	25.4	.890	22.6	70	12	.46	12	32	142	.43	11.0	0.105	2.7	4.13	SST	CG	N
1.100	27.94	72561	1.00	25.4	.876	22.3	111	19	.51	13	56	251	.46	11.7	0.112	2.8	4.13	MW	CG	N
1.100	27.94	72561S	1.00	25.4	.876	22.3	94	17	.39	9.9	37	164	.46	11.7	0.112	2.8	4.13	SST	CG	N
1.100	27.94	72572	1.00	25.4	.860	21.8	153	27	.45	11	69	308	.50	12.6	0.120	3.0	4.13	MW	CG	N
1.100	27.94	72572S	1.00	25.4	.860	21.8	130	23	.35	8.8	45	201	.50	12.6	0.120	3.0	4.13	SST	CG	N
1.100	27.94	72583	1.00	25.4	.850	21.6	163	29	.45	12	74	329	.55	13.9	0.125	3.2	4.38	MW	CG	N
1.100	27.94	72583S	1.00	25.4	.850	21.6	139	24	.37	9.3	51	227	.55	13.9	0.125	3.2	4.38	SST	CG	N
1.100	27.94	72506	1.25	31.8	.936	23.8	28	4.9	.87	22	24	108	.35	8.9	0.082	2.1	4.25	MW	CG	N
1.100	27.94	72506S	1.25	31.8	.936	23.8	24	4.2	.68	17	16	72	.35	8.9	0.082	2.1	4.25	SST	CG	N
1.100	27.94	72516	1.25	31.8	.930	23.6	30	5.2	.88	22	26	115	.37	9.4	0.085	2.2	4.38	MW	CG	N
1.100	27.94	72516S	1.25	31.8	.930	23.6	25	4.4	.72	18	18	80	.37	9.4	0.085	2.2	4.38	SST	CG	N
1.100	27.94	72529	1.25	31.8	.914	23.2	43	7.4	.79	20	34	150	.42	10.6	0.093	2.4	4.50	MW	CG	N
1.100	27.94	72529S	1.25	31.8	.914	23.2	36	6.3	.62	16	22	100	.42	10.6	0.093	2.4	4.50	SST	CG	N
1.100	27.94	72539	1.25	31.8	.908	23.1	45	7.9	.81	20	36	162	.44	11.3	0.096	2.4	4.63	MW	CG	N
1.100	27.94	72539S	1.25	31.8	.908	23.1	38	6.7	.64	16	25	109	.44	11.3	0.096	2.4	4.63	SST	CG	N
1.100	27.94	72551	1.25	31.8	.890	22.6	62	11	.74	19	46	205	.51	13.0	0.105	2.7	4.88	MW	CG	N
1.100	27.94	72551S	1.25	31.8	.890	22.6	53	9.3	.60	15	32	142	.51	13.0	0.105	2.7	4.88	SST	CG	N
1.100	27.94	72562	1.25	31.8	.876	22.3	80	14	.69	18	55	244	.56	14.2	0.112	2.8	5.00	MW	CG	N
1.100	27.94	72562S	1.25	31.8	.876	22.3	68	12	.55	14	37	164	.56	14.2	0.112	2.8	5.00	SST	CG	N
1.100	27.94	72584	1.25	31.8	.850	21.6	122	21	.61	15	75	332	.64	16.3	0.125	3.2	5.13	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
1.100	27.94	72584S	1.25	31.8	.850	21.6	104	18	.49	12	51	227	.64	16.3	0.125	3.2	5.13	SST	CG	N
1.100	27.94	72507	1.50	38.1	.936	23.8	23	4.0	1.1	27	24	108	.39	9.9	0.082	2.1	4.75	MW	CG	N
1.100	27.94	72507S	1.50	38.1	.936	23.8	19	3.4	.84	21	16	72	.39	9.9	0.082	2.1	4.75	SST	CG	N
1.100	27.94	72517	1.50	38.1	.930	23.6	24	4.2	1.1	27	26	114	.43	10.8	0.085	2.2	5.00	MW	CG	N
1.100	27.94	72517S	1.50	38.1	.930	23.6	20	3.6	.89	23	18	80	.43	10.8	0.085	2.2	5.00	SST	CG	N
1.100	27.94	72530	1.50	38.1	.914	23.2	34	6.0	.98	25	34	150	.48	12.1	0.093	2.4	5.13	MW	CG	N
1.100	27.94	72530S	1.50	38.1	.914	23.2	29	5.1	.77	19	22	100	.48	12.1	0.093	2.4	5.13	SST	CG	N
1.100	27.94	72540	1.50	38.1	.908	23.1	37	6.4	1.0	25	36	162	.50	12.8	0.096	2.4	5.25	MW	CG	N
1.100	27.94	72540S	1.50	38.1	.908	23.1	31	5.4	.79	20	25	109	.50	12.8	0.096	2.4	5.25	SST	CG	N
1.100	27.94	72552	1.50	38.1	.890	22.6	50	8.8	.92	23	46	206	.58	14.7	0.105	2.7	5.50	MW	CG	N
1.100	27.94	72552S	1.50	38.1	.890	22.6	43	7.5	.75	19	32	142	.58	14.7	0.105	2.7	5.50	SST	CG	N
1.100	27.94	72563	1.50	38.1	.876	22.3	68	12	.84	21	56	251	.62	15.6	0.112	2.8	5.50	MW	CG	N
1.100	27.94	72563S	1.50	38.1	.876	22.3	57	10	.64	16	37	164	.62	15.6	0.112	2.8	5.50	SST	CG	N
1.100	27.94	72573	1.50	38.1	.860	21.8	93	16	.75	19	69	308	.65	16.4	0.120	3.0	5.38	MW	CG	N
1.100	27.94	72573S	1.50	38.1	.860	21.8	79	14	.57	15	45	201	.65	16.4	0.120	3.0	5.38	SST	CG	N
1.100	27.94	72585	1.50	38.1	.850	21.6	105	18	.74	19	78	347	.70	17.9	0.125	3.2	5.63	MW	CG	N
1.100	27.94	72585S	1.50	38.1	.850	21.6	89	16	.57	15	51	227	.70	17.9	0.125	3.2	5.63	SST	CG	N
1.100	27.94	72594	1.50	38.1	.830	21.1	137	24	.69	18	95	423	.79	20.1	0.135	3.4	5.88	MW	CG	N
1.100	27.94	72594S	1.50	38.1	.830	21.1	116	20	.53	13	61	272	.79	20.1	0.135	3.4	5.88	SST	CG	N
1.100	27.94	72508	1.75	44.5	.936	23.8	19	3.3	1.3	32	24	108	.43	10.9	0.082	2.1	5.25	MW	CG	N
1.100	27.94	72508S	1.75	44.5	.936	23.8	16	2.8	1.0	25	16	72	.43	10.9	0.082	2.1	5.25	SST	CG	N
1.100	27.94	72519	1.75	44.5	.930	23.6	21	3.6	1.3	33	27	119	.47	11.9	0.085	2.2	5.50	MW	CG	N
1.100	27.94	72519S	1.75	44.5	.930	23.6	18	3.1	1.0	26	18	80	.47	11.9	0.085	2.2	5.50	SST	CG	N
1.100	27.94	72531	1.75	44.5	.914	23.2	29	5.1	1.2	30	34	150	.52	13.3	0.093	2.4	5.63	MW	CG	N
1.100	27.94	72531S	1.75	44.5	.914	23.2	25	4.3	.91	23	22	100	.52	13.3	0.093	2.4	5.63	SST	CG	N
1.100	27.94	72542	1.75	44.5	.908	23.1	31	5.3	1.2	30	36	159	.58	14.6	0.096	2.4	6.00	MW	CG	N
1.100	27.94	72542S	1.75	44.5	.908	23.1	26	4.5	.95	24	25	109	.58	14.6	0.096	2.4	6.00	SST	CG	N
1.100	27.94	72553	1.75	44.5	.890	22.6	42	7.4	1.1	28	46	204	.66	16.7	0.105	2.7	6.25	MW	CG	N
1.100	27.94	72553S	1.75	44.5	.890	22.6	36	6.3	.90	23	32	142	.66	16.7	0.105	2.7	6.25	SST	CG	N
1.100	27.94	72564	1.75	44.5	.876	22.3	56	9.9	1.0	25	56	251	.69	17.4	0.112	2.8	6.13	MW	CG	N
1.100	27.94	72564S	1.75	44.5	.876	22.3	48	8.4	.77	20	37	164	.69	17.4	0.112	2.8	6.13	SST	CG	N
1.100	27.94	72574	1.75	44.5	.860	21.8	77	14	.90	23	69	308	.74	18.7	0.120	3.0	6.13	MW	CG	N
1.100	27.94	72574S	1.75	44.5	.860	21.8	66	11	.69	17	45	201	.74	18.7	0.120	3.0	6.13	SST	CG	N
1.100	27.94	72586	1.75	44.5	.850	21.6	86	15	.90	23	78	347	.80	20.2	0.125	3.2	6.38	MW	CG	N
1.100	27.94	72586S	1.75	44.5	.850	21.6	73	13	.69	18	51	227	.80	20.2	0.125	3.2	6.38	SST	CG	N
1.100	27.94	72596	1.75	44.5	.830	21.1	113	20	.84	21	95	423	.89	22.7	0.135	3.4	6.63	MW	CG	N
1.100	27.94	72596S	1.75	44.5	.830	21.1	96	17	.63	16	61	272	.89	22.7	0.135	3.4	6.63	SST	CG	N
1.100	27.94	72605	1.75	44.5	.816	20.7	150	26	.73	19	110	490	.91	23.0	0.142	3.6	6.38	MW	CG	N
1.100	27.94	72605S	1.75	44.5	.816	20.7	128	22	.56	14	71	316	.91	23.0	0.142	3.6	6.38	SST	CG	N
1.100	27.94	72617	1.75	44.5	.804	20.4	175	31	.71	18	124	553	.98	24.9	0.148	3.8	6.63	MW	CG	N
1.100	27.94	72617S	1.75	44.5	.804	20.4	149	26	.54	14	80	356	.98	24.9	0.148	3.8	6.63	SST	CG	N
1.100	27.94	72509	2.00	50.8	.936	23.8	17	2.9	1.5	37	24	108	.47	12.0	0.082	2.1	5.75	MW	CG	N
1.100	27.94	72509S	2.00	50.8	.936	23.8	14	2.5	1.2	29	16	72	.47	12.0	0.082	2.1	5.75	SST	CG	N
1.100	27.94	72520	2.00	50.8	.930	23.6	17	3.0	1.5	38	26	114	.52	13.2	0.085	2.2	6.13	MW	CG	N
1.100	27.94	72520S	2.00	50.8	.930	23.6	15	2.6	1.2	31	18	80	.52	13.2	0.085	2.2	6.13	SST	CG	N
1.100	27.94	72532	2.00	50.8	.914	23.2	25	4.4	1.4	34	34	150	.58	14.8	0.093	2.4	6.25	MW	CG	N
1.100	27.94	72532S	2.00	50.8	.914	23.2	21	3.7	1.1	27	22	100	.58	14.8	0.093	2.4	6.25	SST	CG	N
1.100	27.94	72543	2.00	50.8	.908	23.1	26	4.6	1.4	35	36	160	.64	16.2	0.096	2.4	6.63	MW	CG	N
1.100	27.94	72543S	2.00	50.8	.908	23.1	22	3.9	1.1	28	25	109	.64	16.2	0.096	2.4	6.63	SST	CG	N
1.100	27.94	72554	2.00	50.8	.890	22.6	36	6.3	1.3	32	46	206	.72	18.3	0.105	2.7	6.88	MW	CG	N
1.100	27.94	72554S	2.00	50.8	.890	22.6	31	5.4	1.0	26	32	142	.72	18.3	0.105	2.7	6.88	SST	CG	N
1.100	27.94	72565	2.00	50.8	.876	22.3	49	8.5	1.2	30	56	251	.77	19.6	0.112	2.8	6.88	MW	CG	N
1.100	27.94	72565S	2.00	50.8	.876	22.3	41	7.2	.89	23	37	164	.77	19.6	0.112	2.8	6.88	SST	CG	N
1.100	27.94	72575	2.00	50.8	.860	21.8	66	12	1.0	27	69	308	.81	20.6	0.120	3.0	6.75	MW	CG	N
1.100	27.94	72575S	2.00	50.8	.860	21.8	56	9.9	.80	20	45	201	.81	20.6	0.120	3.0	6.75	SST	CG	N
1.100	27.94	72587	2.00	50.8	.850	21.6	74	13	1.0	27	78	347	.89	22.6	0.125	3.2	7.13	MW	CG	N
1.100	27.94	72587S	2.00	50.8	.850	21.6	63	11	.80	20	51	227	.89	22.6	0.125	3.2	7.13	SST	CG	N
1.100	27.94	72597	2.00	50.8	.830	21.1	98	17	.97	25	95	423	1.01	25.7	0.135	3.4	7.50	MW	CG	N
1.100	27.94	72597S	2.00	50.8	.830	21.1	83	15	.74	19	61	272	1.01	25.7	0.135	3.4	7.50	SST	CG	N
1.100	27.94	72606	2.00	50.8	.816	20.7	129	23	.85	22	110	490	1.01	25.7	0.142	3.6	7.13	MW	CG	N
1.100	27.94	72606S	2.00	50.8	.816	20.7	110	19	.65	16	71	316	1.01	25.7	0.142	3.6	7.13	SST	CG	N
1.100	27.94	72618	2.00	50.8	.804	20.4	149	26	.83	21	124	553	1.09	27.7	0.148	3.8	7.38	MW	CG	N
1.100	27.94	72618S	2.00	50.8	.804	20.4	127	22	.63	16	80	356	1.09	27.7	0.148	3.8	7.38	SST	CG	N
1.100	27.94	72607	2.19	55.6	.816	20.7	100	18	.97	25	97	429	1.22	31.1	0.142	3.6	8.63	MW	CG	N
1.100	27.94	72607S	2.19	55.6	.816	20.7	85	15	.83	21	71	316	1.22	31.1	0.142	3.6	8.63	SST	CG	N
1.100	27.94	72566	2.25	57.2	.876	22.3	43	7.5	1.3	34	56	251	.84	21.3	0.112	2.8	7.50	MW	CG	N
1.100	27.94	72566S	2.25	57.2	.876	22.3	36	6.3	1.0	26	37	164	.84	21.3	0.112	2.8	7.50	SST	CG	N
1.100	27.94	72576	2.25	57.2	.860	21.8	58	10	1.2	30	69	308	.90	22.9	0.120	3.0	7.50	MW	CG	N
1.100	27.94	72576S	2.25	57.2	.860	21.8	49	8.6	.92	23	45	201	.90	22.9	0.120	3.0	7.50	SST	CG	N
1.100	27.94	72588	2.25	57.2	.850	21.6	65	11	1.2	30	78	347	.98	25.0	0.125	3.2	7.88	MW	CG	N
1.100	27.94	72588S	2.25	57.2	.850	21.6	55	9.7	.92	23	51	227	.98	25.0	0.125	3.2	7.88	SST	CG	N
1.100	27.94	72598	2.25	57.2	.830	21.1	88	15	1.1	27	95	423	1.08	27.4	0.135	3.4	8.00	MW	CG	N
1.100	27.94	72598S	2.25	57.2	.830	21.1	75	13	.82	21	61	272	1.08	27.4	0.135	3.4	8.00	SST	CG	N
1.100	27.94	72608	2.25	57.2	.816	20.7	111	19	.99	25	110	490	1.14	28.9	0.142	3.6	8.00	MW	CG	N
1.100	27.94	72608S	2.25	57.2	.816	20.7	94	17	.75	19	71	316	1.14	28.9	0.142	3.6	8.00	SST	CG	N
1.100	27.94	72619	2.25	57.2	.804	20.4	130	23	.96	24	124	553	1.20	30.5	0.148	3.8	8.13	MW	CG	N
1.100	27.94	72619S	2.25	57.2	.804	20.4	111	19	.72	18	80	356	1.20	30.5	0.148	3.8	8.13	SST	CG	N
1.100	27.94	72510	2.50	63.5	.936	23.8	13	2.3	1.9	47	24	108	.55	14.1	0.082	2.1	6.75	MW	CG	N
1.100	27.94	72510S	2.50	63.5	.936	23.8	11	1.9	1.5	37	16	72	.55	14.1	0.082	2.1	6.75	SST	CG	N
1.100	27.94	72521	2.50	63.5	.930	23.6	14	2.4	1.9	48	26	115	.62	15.7	0.085	2.2	7.25	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.100	27.94	72521S	2.50	63.5	.930	23.6	12	2.0	1.5	39	18	80	.62	15.7	0.085	2.2	7.25	SST	CG	N
1.100	27.94	72533	2.50	63.5	.914	23.2	20	3.4	1.7	44	34	150	.69	17.4	0.093	2.4	7.38	MW	CG	N
1.100	27.94	72533S	2.50	63.5	.914	23.2	17	2.9	1.4	34	22	100	.69	17.4	0.093	2.4	7.38	SST	CG	N
1.100	27.94	72544	2.50	63.5	.908	23.1	21	3.6	1.7	44	36	161	.76	19.2	0.096	2.4	7.88	MW	CG	N
1.100	27.94	72544S	2.50	63.5	.908	23.1	18	3.1	1.4	35	25	109	.76	19.2	0.096	2.4	7.88	SST	CG	N
1.100	27.94	72555	2.50	63.5	.890	22.6	28	5.0	1.6	41	46	206	.87	22.0	0.105	2.7	8.25	MW	CG	N
1.100	27.94	72555S	2.50	63.5	.890	22.6	24	4.2	1.3	34	32	142	.87	22.0	0.105	2.7	8.25	SST	CG	N
1.100	27.94	72567	2.50	63.5	.876	22.3	38	6.6	1.5	38	56	251	.92	23.5	0.112	2.8	8.25	MW	CG	N
1.100	27.94	72567S	2.50	63.5	.876	22.3	32	5.6	1.1	29	37	164	.92	23.5	0.112	2.8	8.25	SST	CG	N
1.100	27.94	72577	2.50	63.5	.860	21.8	52	9.0	1.3	34	69	308	.98	24.8	0.120	3.0	8.13	MW	CG	N
1.100	27.94	72577S	2.50	63.5	.860	21.8	44	7.7	1.0	26	45	201	.98	24.8	0.120	3.0	8.13	SST	CG	N
1.100	27.94	72589	2.50	63.5	.850	21.6	58	10	1.4	34	78	347	1.08	27.4	0.125	3.2	8.63	MW	CG	N
1.100	27.94	72589S	2.50	63.5	.850	21.6	49	8.6	1.0	26	51	227	1.08	27.4	0.125	3.2	8.63	SST	CG	N
1.100	27.94	72599	2.50	63.5	.830	21.1	76	13	1.3	32	95	423	1.22	30.9	0.135	3.4	9.00	MW	CG	N
1.100	27.94	72599S	2.50	63.5	.830	21.1	65	11	.95	24	61	272	1.22	30.9	0.135	3.4	9.00	SST	CG	N
1.100	27.94	72609	2.50	63.5	.816	20.7	98	17	1.1	29	110	490	1.24	31.6	0.142	3.6	8.75	MW	CG	N
1.100	27.94	72609S	2.50	63.5	.816	20.7	83	15	.85	22	71	316	1.24	31.6	0.142	3.6	8.75	SST	CG	N
1.100	27.94	72620	2.50	63.5	.804	20.4	115	20	1.1	27	124	553	1.31	33.4	0.148	3.8	8.88	MW	CG	N
1.100	27.94	72620S	2.50	63.5	.804	20.4	98	17	.82	21	80	356	1.31	33.4	0.148	3.8	8.88	SST	CG	N
1.100	27.94	72610	2.75	69.9	.816	20.7	88	15	1.3	32	110	490	1.35	34.3	0.142	3.6	9.50	MW	CG	N
1.100	27.94	72610S	2.75	69.9	.816	20.7	75	13	.95	24	71	316	1.35	34.3	0.142	3.6	9.50	SST	CG	N
1.100	27.94	72621	2.75	69.9	.804	20.4	104	18	1.2	30	124	553	1.44	36.7	0.148	3.8	9.75	MW	CG	N
1.100	27.94	72621S	2.75	69.9	.804	20.4	88	15	.91	23	80	356	1.44	36.7	0.148	3.8	9.75	SST	CG	N
1.100	27.94	72511	3.00	76.2	.936	23.8	11	1.9	2.3	57	24	108	.64	16.1	0.082	2.1	7.75	MW	CG	N
1.100	27.94	72511S	3.00	76.2	.936	23.8	9.1	1.6	1.8	45	16	72	.64	16.1	0.082	2.1	7.75	SST	CG	N
1.100	27.94	72522	3.00	76.2	.930	23.6	11	2.0	2.3	58	26	114	.71	18.1	0.085	2.2	8.38	MW	CG	N
1.100	27.94	72522S	3.00	76.2	.930	23.6	9.5	1.7	1.9	48	18	80	.71	18.1	0.085	2.2	8.38	SST	CG	N
1.100	27.94	72534	3.00	76.2	.914	23.2	16	2.8	2.1	54	34	150	.80	20.4	0.093	2.4	8.63	MW	CG	N
1.100	27.94	72534S	3.00	76.2	.914	23.2	14	2.4	1.6	42	22	100	.80	20.4	0.093	2.4	8.63	SST	CG	N
1.100	27.94	72545	3.00	76.2	.908	23.1	17	3.0	2.1	54	36	161	.88	22.3	0.096	2.4	9.13	MW	CG	N
1.100	27.94	72545S	3.00	76.2	.908	23.1	14	2.5	1.7	43	25	109	.88	22.3	0.096	2.4	9.13	SST	CG	N
1.100	27.94	72556	3.00	76.2	.890	22.6	23	4.1	2.0	51	46	206	1.01	25.7	0.105	2.7	9.63	MW	CG	N
1.100	27.94	72556S	3.00	76.2	.890	22.6	20	3.5	1.6	41	32	142	1.01	25.7	0.105	2.7	9.63	SST	CG	N
1.100	27.94	72568	3.00	76.2	.876	22.3	31	5.4	1.8	46	56	251	1.06	27.0	0.112	2.8	9.50	MW	CG	N
1.100	27.94	72568S	3.00	76.2	.876	22.3	26	4.6	1.4	35	37	164	1.06	27.0	0.112	2.8	9.50	SST	CG	N
1.100	27.94	72578	3.00	76.2	.860	21.8	42	7.4	1.6	42	69	308	1.14	29.0	0.120	3.0	9.50	MW	CG	N
1.100	27.94	72578S	3.00	76.2	.860	21.8	36	6.3	1.3	32	45	201	1.14	29.0	0.120	3.0	9.50	SST	CG	N
1.100	27.94	72590	3.00	76.2	.850	21.6	47	8.3	1.7	42	78	347	1.25	31.8	0.125	3.2	10.0	MW	CG	N
1.100	27.94	72590S	3.00	76.2	.850	21.6	40	7.0	1.3	32	51	227	1.25	31.8	0.125	3.2	10.0	SST	CG	N
1.100	27.94	72600	3.00	76.2	.830	21.1	62	11	1.5	39	95	423	1.42	36.0	0.135	3.4	10.5	MW	CG	N
1.100	27.94	72600S	3.00	76.2	.830	21.1	53	9.3	1.2	29	61	272	1.42	36.0	0.135	3.4	10.5	SST	CG	N
1.100	27.94	72611	3.00	76.2	.816	20.7	80	14	1.4	35	110	490	1.46	37.0	0.142	3.6	10.3	MW	CG	N
1.100	27.94	72611S	3.00	76.2	.816	20.7	68	12	1.0	27	71	316	1.46	37.0	0.142	3.6	10.3	SST	CG	N
1.100	27.94	72622	3.00	76.2	.804	20.4	94	16	1.3	34	124	553	1.55	39.5	0.148	3.8	10.5	MW	CG	N
1.100	27.94	72622S	3.00	76.2	.804	20.4	80	14	1.0	25	80	356	1.55	39.5	0.148	3.8	10.5	SST	CG	N
1.100	27.94	72612	3.31	84.1	.816	20.7	64	11	1.6	39	99	442	1.76	44.6	0.142	3.6	12.4	MW	CG	N
1.100	27.94	72612S	3.31	84.1	.816	20.7	54	9.5	1.3	33	71	316	1.76	44.6	0.142	3.6	12.4	SST	CG	N
1.100	27.94	72512	3.50	88.9	.936	23.8	9.1	1.6	2.7	68	24	108	.72	18.2	0.082	2.1	8.75	MW	CG	N
1.100	27.94	72512S	3.50	88.9	.936	23.8	7.7	1.4	2.1	53	16	72	.72	18.2	0.082	2.1	8.75	SST	CG	N
1.100	27.94	72523	3.50	88.9	.930	23.6	9.6	1.7	2.7	68	26	115	.81	20.5	0.085	2.2	9.50	MW	CG	N
1.100	27.94	72523S	3.50	88.9	.930	23.6	8.2	1.4	2.2	56	18	80	.81	20.5	0.085	2.2	9.50	SST	CG	N
1.100	27.94	72535	3.50	88.9	.914	23.2	14	2.4	2.5	63	34	150	.91	23.0	0.093	2.4	9.75	MW	CG	N
1.100	27.94	72535S	3.50	88.9	.914	23.2	12	2.0	1.9	49	22	100	.91	23.0	0.093	2.4	9.75	SST	CG	N
1.100	27.94	72546	3.50	88.9	.908	23.1	14	2.5	2.5	64	36	160	1.00	25.3	0.096	2.4	10.4	MW	CG	N
1.100	27.94	72546S	3.50	88.9	.908	23.1	12	2.1	2.0	51	25	109	1.00	25.3	0.096	2.4	10.4	SST	CG	N
1.100	27.94	72557	3.50	88.9	.890	22.6	20	3.4	2.3	60	46	205	1.16	29.3	0.105	2.7	11.0	MW	CG	N
1.100	27.94	72557S	3.50	88.9	.890	22.6	17	2.9	1.9	49	32	142	1.16	29.3	0.105	2.7	11.0	SST	CG	N
1.100	27.94	72569	3.50	88.9	.876	22.3	26	4.6	2.1	54	56	251	1.22	30.9	0.112	2.8	10.9	MW	CG	N
1.100	27.94	72569S	3.50	88.9	.876	22.3	22	3.9	1.6	42	37	164	1.22	30.9	0.112	2.8	10.9	SST	CG	N
1.100	27.94	72579	3.50	88.9	.860	21.8	36	6.3	1.9	49	69	308	1.31	33.1	0.120	3.0	10.9	MW	CG	N
1.100	27.94	72579S	3.50	88.9	.860	21.8	30	5.3	1.5	38	45	201	1.31	33.1	0.120	3.0	10.9	SST	CG	N
1.100	27.94	72591	3.50	88.9	.850	21.6	40	7.0	2.0	50	78	347	1.44	36.5	0.125	3.2	11.5	MW	CG	N
1.100	27.94	72591S	3.50	88.9	.850	21.6	34	5.9	1.5	38	51	227	1.44	36.5	0.125	3.2	11.5	SST	CG	N
1.100	27.94	72601	3.50	88.9	.830	21.1	52	9.1	1.8	46	95	423	1.65	42.0	0.135	3.4	12.3	MW	CG	N
1.100	27.94	72601S	3.50	88.9	.830	21.1	44	7.7	1.4	35	61	272	1.65	42.0	0.135	3.4	12.3	SST	CG	N
1.100	27.94	72613	3.50	88.9	.816	20.7	67	12	1.6	42	110	490	1.69	42.8	0.142	3.6	11.9	MW	CG	N
1.100	27.94	72613S	3.50	88.9	.816	20.7	57	10	1.2	32	71	316	1.69	42.8	0.142	3.6	11.9	SST	CG	N
1.100	27.94	72623	3.50	88.9	.804	20.4	79	14	1.6	40	124	553	1.79	45.6	0.148	3.8	12.1	MW	CG	N
1.100	27.94	72623S	3.50	88.9	.804	20.4	68	12	1.2	30	80	356	1.79	45.6	0.148	3.8	12.1	SST	CG	N
1.100	27.94	72513	4.00	101.6	.936	23.8	7.9	1.4	3.1	78	24	108	.80	20.3	0.082	2.1	9.75	MW	CG	N
1.100	27.94	72513S	4.00	101.6	.936	23.8	6.7	1.2	2.4	61	16	72	.80	20.3	0.082	2.1	9.75	SST	CG	N
1.100	27.94	72524	4.00	101.6	.930	23.6	8.3	1.5	3.1	79	26	114	.90	22.9	0.085	2.2	10.6	MW	CG	N
1.100	27.94	72524S	4.00	101.6	.930	23.6	7.1	1.2	2.6	65	18	80	.90	22.9	0.085	2.2	10.6	SST	CG	N
1.100	27.94	72536	4.00	101.6	.914	23.2	12	2.1	2.9	72	34	150	1.01	25.7	0.093	2.4	10.9	MW	CG	N
1.100	27.94	72536S	4.00	101.6	.914	23.2	10	1.8	2.2	56	22	100	1.01	25.7	0.093	2.4	10.9	SST	CG	N
1.100	27.94	72547	4.00	101.6	.908	23.1	13	2.2	2.9	73	36	160	1.12	28.3	0.096	2.4	11.6	MW	CG	N
1.100	27.94	72547S	4.00	101.6	.908	23.1	11	1.9	2.3	59	25	109	1.12	28.3	0.096	2.4	11.6	SST	CG	N
1.100	27.94	72558	4.00	101.6	.890	22.6	17	3.0	2.7	69	46	205	1.30	33.0	0.105	2.7	12.4	MW	CG	N
1.100	27.94	72558S	4.00	101.6	.890	22.6	15	2.5	2.2	56	32	142	1.30	33.0	0.105	2.7	12.4	SST	CG	N
1.100	27.94	72570	4.00	101.6	.876	22.3	23	4.0	2.5	63	56	251	1.37	34.8	0.112	2.8	12.3	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.100	27.94	72570S	4.00	101.6	.876	22.3	19	3.4	1.9	48	37	164	1.37	34.8	0.112	2.8	12.3	SST	CG	N
1.100	27.94	72580	4.00	101.6	.860	21.8	31	5.4	2.2	57	69	308	1.47	37.3	0.120	3.0	12.3	MW	CG	N
1.100	27.94	72580S	4.00	101.6	.860	21.8	26	4.6	1.7	44	45	201	1.47	37.3	0.120	3.0	12.3	SST	CG	N
1.100	27.94	72592	4.00	101.6	.850	21.6	34	6.0	2.3	58	78	347	1.63	41.3	0.125	3.2	13.0	MW	CG	N
1.100	27.94	72592S	4.00	101.6	.850	21.6	29	5.1	1.7	44	51	227	1.63	41.3	0.125	3.2	13.0	SST	CG	N
1.100	27.94	72602	4.00	101.6	.830	21.1	45	7.9	2.1	54	95	423	1.86	47.1	0.135	3.4	13.8	MW	CG	N
1.100	27.94	72602S	4.00	101.6	.830	21.1	38	6.7	1.6	41	61	272	1.86	47.1	0.135	3.4	13.8	SST	CG	N
1.100	27.94	72614	4.00	101.6	.816	20.7	59	10	1.9	47	110	490	1.88	47.8	0.142	3.6	13.3	MW	CG	N
1.100	27.94	72614S	4.00	101.6	.816	20.7	50	8.8	1.4	36	71	316	1.88	47.8	0.142	3.6	13.3	SST	CG	N
1.100	27.94	72624	4.00	101.6	.804	20.4	69	12	1.8	46	124	553	2.02	51.2	0.148	3.8	13.6	MW	CG	N
1.100	27.94	72624S	4.00	101.6	.804	20.4	58	10	1.4	35	80	356	2.02	51.2	0.148	3.8	13.6	SST	CG	N
1.100	27.94	72525	4.50	114.3	.930	23.6	7.3	1.3	3.5	89	25	113	1.01	25.6	0.085	2.2	11.9	MW	CG	N
1.100	27.94	72525S	4.50	114.3	.930	23.6	6.2	1.1	2.9	74	18	80	1.01	25.6	0.085	2.2	11.9	SST	CG	N
1.100	27.94	72548	4.50	114.3	.908	23.1	11	1.9	3.3	83	36	161	1.24	31.4	0.096	2.4	12.9	MW	CG	N
1.100	27.94	72548S	4.50	114.3	.908	23.1	9.4	1.7	2.6	66	25	109	1.24	31.4	0.096	2.4	12.9	SST	CG	N
1.100	27.94	72559	4.50	114.3	.890	22.6	15	2.6	3.1	78	46	205	1.44	36.7	0.105	2.7	13.8	MW	CG	N
1.100	27.94	72559S	4.50	114.3	.890	22.6	13	2.2	2.5	64	32	142	1.44	36.7	0.105	2.7	13.8	SST	CG	N
1.100	27.94	72571	4.50	114.3	.876	22.3	20	3.5	2.8	71	56	251	1.53	38.8	0.112	2.8	13.6	MW	CG	N
1.100	27.94	72571S	4.50	114.3	.876	22.3	17	3.0	2.2	55	37	164	1.53	38.8	0.112	2.8	13.6	SST	CG	N
1.100	27.94	72581	4.50	114.3	.860	21.8	27	4.8	2.5	64	69	308	1.64	41.5	0.120	3.0	13.6	MW	CG	N
1.100	27.94	72581S	4.50	114.3	.860	21.8	23	4.1	1.9	49	45	201	1.64	41.5	0.120	3.0	13.6	SST	CG	N
1.100	27.94	72593	4.50	114.3	.850	21.6	30	5.3	2.6	65	78	347	1.81	46.0	0.125	3.2	14.5	MW	CG	N
1.100	27.94	72593S	4.50	114.3	.850	21.6	26	4.5	2.0	50	51	227	1.81	46.0	0.125	3.2	14.5	SST	CG	N
1.100	27.94	72603	4.50	114.3	.830	21.1	39	6.9	2.4	61	95	422	2.09	53.1	0.135	3.4	15.5	MW	CG	N
1.100	27.94	72603S	4.50	114.3	.830	21.1	34	5.9	1.8	46	61	272	2.09	53.1	0.135	3.4	15.5	SST	CG	N
1.100	27.94	72615	4.50	114.3	.816	20.7	51	8.9	2.2	55	110	490	2.13	54.1	0.142	3.6	15.0	MW	CG	N
1.100	27.94	72615S	4.50	114.3	.816	20.7	43	7.6	1.6	42	71	316	2.13	54.1	0.142	3.6	15.0	SST	CG	N
1.100	27.94	72625	4.50	114.3	.804	20.4	61	11	2.1	52	124	553	2.26	57.3	0.148	3.8	15.3	MW	CG	N
1.100	27.94	72625S	4.50	114.3	.804	20.4	51	9.0	1.6	40	80	356	2.26	57.3	0.148	3.8	15.3	SST	CG	N
1.100	27.94	72526	5.00	127.0	.930	23.6	6.6	1.2	3.9	99	26	115	1.09	27.8	0.085	2.2	12.9	MW	CG	N
1.100	27.94	72526S	5.00	127.0	.930	23.6	5.6	.98	3.2	82	18	80	1.09	27.8	0.085	2.2	12.9	SST	CG	N
1.100	27.94	72604	5.00	127.0	.830	21.1	35	6.2	2.7	68	95	423	2.30	58.3	0.135	3.4	17.0	MW	CG	N
1.100	27.94	72604S	5.00	127.0	.830	21.1	30	5.3	2.0	52	61	272	2.30	58.3	0.135	3.4	17.0	SST	CG	N
1.100	27.94	72616	5.00	127.0	.816	20.7	46	8.1	2.4	61	110	490	2.34	59.5	0.142	3.6	16.5	MW	CG	N
1.100	27.94	72616S	5.00	127.0	.816	20.7	39	6.8	1.8	46	71	316	2.34	59.5	0.142	3.6	16.5	SST	CG	N
1.100	27.94	72626	5.00	127.0	.804	20.4	54	9.5	2.3	58	124	553	2.48	63.0	0.148	3.8	16.8	MW	CG	N
1.100	27.94	72626S	5.00	127.0	.804	20.4	46	8.1	1.7	44	80	356	2.48	63.0	0.148	3.8	16.8	SST	CG	N
1.109	28.17	II-8	.69	17.4	.869	22.1	308	54	.16	4.1	49	219	.36	9.1	0.120	3.0	3.00	SPR	CG	N
1.109	28.17	1869	.75	19.1	.965	24.5	8.7	1.5	.32	8.1	2.8	12	.43	11.0	0.072	1.8	6.00	HD	CG	Z
1.109	28.17	S-1258	1.00	25.4	.899	22.8	75	13	.42	11	32	141	.42	10.7	0.105	2.7	4.00	SST	CG	N
1.109	28.17	3752	1.00	25.4	.859	21.8	134	23	.41	10	54	242	.59	15.1	0.125	3.2	4.75	SPR	CG	Z
1.109	28.17	DD-27	1.06	27.0	.769	19.5	857	150	.13	3.4	114	508	.60	15.1	0.170	4.3	3.50	SST	CG	N
1.109	28.17	LL-100	1.09	27.8	.949	24.1	13	2.2	.59	15	7.6	34	.50	12.7	0.080	2.0	6.25	SPR	CG	N
1.109	28.17	S-34	1.16	29.4	.983	25.0	2.9	.51	.67	17	2.0	8.7	.48	12.3	0.063	1.6	7.50	SST	CG	N
1.109	28.17	11705	1.16	29.4	.921	23.4	36	6.3	.69	17	25	109	.47	11.9	0.094	2.4	5.00	SPR	CG	Z
1.109	28.17	12160	1.25	31.8	.919	23.3	56	9.8	.45	12	26	113	.38	9.7	0.095	2.4	4.00	SPR	CG	Z
1.109	28.17	10621	1.28	32.5	.927	23.5	31	5.5	.72	18	22	100	.46	11.6	0.091	2.3	5.00	SPR	CG	Z
1.109	28.17	12562	1.30	32.9	.993	25.2	7.0	1.2	.92	23	6.5	29	.29	7.4	0.058	1.5	4.00	SPR	C	N
1.109	28.17	S-55	1.38	34.9	.869	22.1	62	11	.62	16	38	169	.76	19.3	0.120	3.0	6.33	SST	CG	N
1.109	28.17	HH-33	1.38	34.9	.809	20.5	206	36	.43	11	90	398	.90	22.9	0.150	3.8	6.00	SPR	CG	N
1.109	28.17	11697	1.53	38.9	.885	22.5	57	10	.70	18	40	178	.67	17.1	0.112	2.8	6.00	SPR	CG	Z
1.109	28.17	2681	1.78	45.2	.861	21.9	59	10	.79	20	47	208	.99	25.2	0.124	3.1	8.00	HD	CG	Z
1.109	28.17	UU-39	1.78	45.2	.795	20.2	184	32	.56	14	102	455	1.18	29.9	0.157	4.0	7.50	SPR	CG	Z
1.109	28.17	S-3060	2.00	50.8	.813	20.7	135	24	.59	15	79	353	1.04	26.3	0.148	3.8	7.00	SST	CG	N
1.109	28.17	B17-150	2.13	54.0	1.013	25.7	.94	.17	1.7	44	1.6	7.3	.38	9.8	0.048	1.2	8.00	SST	CG	N
1.109	28.17	S-1415	2.19	55.6	.959	24.4	4.8	.84	1.5	37	7.0	31	.71	18.1	0.075	1.9	9.50	SST	CG	N
1.109	28.17	11864	2.25	57.2	.737	18.7	299	52	.46	12	137	610	1.58	40.2	0.186	4.7	8.50	SST	CG	N
1.109	28.17	11717	2.56	65.1	.885	22.5	38	6.7	1.1	27	40	178	1.01	25.6	0.112	2.8	8.00	SPR	C	Z
1.109	28.17	11590	2.63	66.7	.783	19.9	171	30	.67	17	114	507	1.63	41.4	0.163	4.1	9.00	SPR	CG	Z
1.109	28.17	S-1513	2.69	68.2	.869	22.1	54	9.4	.84	21	45	199	.84	21.3	0.120	3.0	7.00	SST	CG	N
1.109	28.17	11275	2.75	69.9	.927	23.5	13	2.3	1.7	43	22	100	.82	20.8	0.091	2.3	9.00	SPR	CG	Z
1.109	28.17	10975	2.75	69.9	.881	22.4	32	5.6	1.3	34	42	188	1.11	28.2	0.114	2.9	9.75	HD	CG	Z
1.109	28.17	10503	2.81	71.4	.885	22.5	29	5.2	1.4	35	40	178	1.20	30.6	0.112	2.8	9.75	SPR	C	Z
1.109	28.17	10407	2.81	71.4	.869	22.1	54	9.4	.92	23	49	219	1.05	26.7	0.120	3.0	7.75	SPR	C	Z
1.109	28.17	3400	2.88	73.0	.953	24.2	8.1	1.4	1.8	46	15	66	.62	15.8	0.078	2.0	8.00	SPR	CG	Z
1.109	28.17	4303	3.13	79.4	.899	22.8	25	4.3	1.4	35	34	152	.95	24.0	0.105	2.7	9.00	SPR	CG	Z
1.109	28.17	11222	3.16	80.2	.813	20.7	153	27	.52	13	79	353	1.11	28.2	0.148	3.8	6.50	SST	C	N
1.109	28.17	S-1378	3.75	95.3	.927	23.5	7.7	1.4	2.6	66	20	90	1.14	28.9	0.091	2.3	12.5	SST	CG	N
1.109	28.17	11618	3.94	100.0	.779	19.8	127	22	.93	24	118	525	2.15	54.5	0.165	4.2	12.0	SPR	CG	Z
1.109	28.17	3028	4.44	112.7	.889	22.6	21	3.7	1.8	46	38	169	1.32	33.5	0.110	2.8	12.0	SPR	CG	Z
1.109	28.17	3360	4.50	114.3	.909	23.1	11	1.9	2.8	70	30	132	1.60	40.6	0.100	2.5	15.0	SPR	C	Z
1.109	28.17	S-3256	4.91	124.6	.951	24.2	4.5	.80	3.2	81	14	64	.95	24.1	0.079	2.0	12.0	SST	CG	N
1.109	28.17	2727	5.13	130.2	.949	24.1	5.4	.95	4.1	104	22	98	1.04	26.4	0.080	2.0	12.0	MW	C	Z
1.109	28.17	394	8.00	203.2	.889	22.6	8.8	1.5	4.3	110	38	169	2.86	72.6	0.110	2.8	26.0	SPR	CG	Z
1.109	28.17	1817	10.0	254.0	.899	22.8	6.4	1.1	6.9	174	44	195	3.15	80.0	0.105	2.7	29.0	MW	C	Z
1.109	28.17	4039	19.5	495.3	.809	20.5	18	3.2	4.9	125	90	398	7.13	181.0	0.150	3.8	47.5	SPR	CG	Z
1.125	28.58	A14-51	.75	19.1	1.001	25.4	9.4	1.6	.46	12	4.3	19	.29	7.4	0.062	1.6	3.67	SST	C	N
1.125	28.58	1549	.81	20.6	.875	22.2	351	61	.22	5.5	76	340	.50	12.7	0.125	3.2	3.00	MW	C	Z
1.125	28.58	S-205	.88	22.2	1.023	26.0	2.7	.48	.59	15	1.6	7.2	.28	7.1	0.051	1.3	4.50	SST	C	N
1.125	28.58	S-1405	.88	22.2	.915	23.2	82	14	.38	9.7	31	139	.39	10.0	0.105	2.7	3.75	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.125	28.58	S-931	.97	24.6	1.023	26.0	1.7	.30	.66	17	1.1	5.0	.31	7.8	0.051	1.3	6.00	SST	CG	N
1.125	28.58	11963	.97	24.6	1.003	25.5	4.1	.72	.60	15	2.5	11	.37	9.3	0.061	1.5	6.00	SPR	CG	Z
1.125	28.58	10482	1.00	25.4	.965	24.5	26	4.5	.61	16	16	70	.32	8.1	0.080	2.0	4.00	SPR	CG	N
1.125	28.58	S-1383	1.06	27.0	.915	23.2	57	10	.55	14	31	139	.47	12.0	0.105	2.7	4.50	SST	CG	N
1.125	28.58	3947	1.19	30.2	.941	23.9	31	5.5	.73	18	23	101	.46	11.7	0.092	2.3	5.00	SPR	CG	Z
1.125	28.58	B17-147	1.22	31.0	1.005	25.5	7.7	1.4	.91	23	7.1	31	.24	6.1	0.060	1.5	4.00	SPR	CG	N
1.125	28.58	S-1236	1.25	31.8	.981	24.9	9.6	1.7	.89	23	8.5	38	.36	9.1	0.072	1.8	5.00	SST	CG	N
1.125	28.58	11742	1.25	31.8	.895	22.7	122	21	.35	8.9	43	190	.46	11.7	0.115	2.9	4.00	SPR	CG	Z
1.125	28.58	12271	1.38	34.9	.995	25.3	4.2	.74	.95	24	4.0	18	.42	10.7	0.065	1.7	6.50	SST	CG	N
1.125	28.58	S-147	1.41	35.7	1.031	26.2	.89	.16	1.0	26	.89	4.0	.40	10.1	0.047	1.2	7.50	SST	C	N
1.125	28.58	S-911	1.47	37.3	.981	24.9	7.3	1.3	1.0	26	7.6	34	.43	11.0	0.072	1.8	6.00	SST	CG	N
1.125	28.58	2945	1.50	38.1	1.017	25.8	5.0	.87	1.0	26	5.2	23	.27	6.9	0.054	1.4	4.00	SPR	C	Z
1.125	28.58	12001	1.50	38.1	.935	23.7	27	4.7	.93	24	25	111	.57	14.5	0.095	2.4	6.00	SPR	CG	Z
1.125	28.58	S-1249	1.50	38.1	.915	23.2	48	8.4	.66	17	31	139	.53	13.3	0.105	2.7	5.00	SST	CG	N
1.125	28.58	S-1561	1.50	38.1	.875	22.2	87	15	.57	15	50	222	.69	17.5	0.125	3.2	5.50	SST	CG	N
1.125	28.58	10624	1.56	39.7	.815	20.7	303	53	.32	8.1	97	432	.78	19.7	0.155	3.9	5.00	SPR	CG	Z
1.125	28.58	M-80	1.59	40.5	.859	21.8	115	20	.55	14	64	283	.80	20.3	0.133	3.4	6.00	SPR	CG	Z
1.125	28.58	S-3242	1.72	43.6	1.003	25.5	3.7	.64	1.4	34	5.0	22	.37	9.3	0.061	1.5	6.00	SST	CG	N
1.125	28.58	3302	1.75	44.5	.875	22.2	58	10	.75	19	44	195	1.00	25.4	0.125	3.2	8.00	HD	CG	Z
1.125	28.58	11433	1.88	47.6	.885	22.5	56	9.8	.87	22	48	216	.87	22.1	0.120	3.0	7.25	HD	CG	Z
1.125	28.58	11335	2.00	50.8	.829	21.1	148	26	.59	15	87	387	1.04	26.3	0.148	3.8	7.00	SPR	CG	Z
1.125	28.58	CC-96	2.00	50.8	.805	20.4	210	37	.51	13	107	474	1.12	28.4	0.160	4.1	7.00	SPR	CG	Z
1.125	28.58	S-3239	2.09	53.2	.945	24.0	19	3.3	1.1	27	20	88	.54	13.7	0.090	2.3	6.00	SST	CG	N
1.125	28.58	4340	2.13	54.0	.855	21.7	66	11	.84	21	55	246	1.28	32.6	0.135	3.4	9.50	SPR	CG	Z
1.125	28.58	S-973	2.28	57.9	.965	24.5	8.2	1.4	1.7	43	14	61	.60	15.2	0.080	2.0	7.50	SST	CG	N
1.125	28.58	2694	2.31	58.7	.933	23.7	20	3.6	1.3	32	26	115	.72	18.3	0.096	2.4	7.50	HD	CG	Z
1.125	28.58	S-1569	2.38	60.3	.875	22.2	69	12	.72	18	50	222	.81	20.6	0.125	3.2	6.50	SST	CG	N
1.125	28.58	10483	2.38	60.3	.831	21.1	159	28	.54	14	85	380	.96	24.3	0.147	3.7	6.50	SPR	CG	Z
1.125	28.58	S-194	2.44	61.9	1.045	26.5	.72	.13	2.2	55	1.6	6.9	.26	6.6	0.040	1.0	5.50	SST	C	N
1.125	28.58	1629	2.50	63.5	.965	24.5	8.6	1.5	1.8	47	16	70	.64	16.3	0.080	2.0	8.00	SPR	CG	Z
1.125	28.58	3965	2.50	63.5	.905	23.0	31	5.4	1.2	31	38	167	.94	23.7	0.110	2.8	8.50	SPR	CG	Z
1.125	28.58	S-466	2.50	63.5	.885	22.5	59	10	.75	19	44	197	.76	19.3	0.120	3.0	6.33	SST	CG	N
1.125	28.58	12017	2.53	64.3	.831	21.1	120	21	.71	18	85	380	1.18	29.9	0.147	3.7	8.00	SPR	CG	Z
1.125	28.58	B8-67	2.66	67.5	.875	22.2	64	11	.86	22	55	243	1.06	27.0	0.125	3.2	7.50	SPR	C	N
1.125	28.58	2567	2.69	68.2	.995	25.3	4.3	.75	2.1	53	9.0	40	.46	11.6	0.065	1.7	7.00	SPR	CG	Z
1.125	28.58	11143	2.69	68.2	.901	22.9	29	5.1	1.4	35	40	176	1.18	29.9	0.112	2.8	9.50	SPR	C	Z
1.125	28.58	11785	2.72	69.0	.919	23.3	28	4.8	1.2	29	32	142	.77	19.6	0.103	2.6	7.50	SPR	CG	N
1.125	28.58	10540	2.72	69.0	.895	22.7	31	5.3	1.4	36	43	190	1.15	29.2	0.115	2.9	10.0	SPR	CG	Z
1.125	28.58	B7-47	2.72	69.0	.845	21.5	82	14	.81	21	67	297	1.16	29.3	0.140	3.6	8.25	SST	CG	N
1.125	28.58	11203	2.75	69.9	.901	22.9	27	4.8	1.5	37	40	176	1.23	31.3	0.112	2.8	10.0	SPR	C	Z
1.125	28.58	12076	2.78	70.6	.811	20.6	175	31	.58	15	101	449	1.18	29.9	0.157	4.0	7.50	SPR	CG	Z
1.125	28.58	2736	2.84	72.2	.855	21.7	70	12	1.3	34	93	414	1.22	30.9	0.135	3.4	9.00	MW	CG	Z
1.125	28.58	825	2.88	73.0	.855	21.7	60	10	1.1	28	67	296	1.52	38.6	0.135	3.4	10.3	HD	C	Z
1.125	28.58	2824	2.94	74.6	.875	22.2	39	6.8	1.6	40	61	271	1.38	34.9	0.125	3.2	11.0	MW	CG	Z
1.125	28.58	S-1131	3.00	76.2	.965	24.5	5.6	.98	2.2	56	12	55	.80	20.3	0.080	2.0	10.0	SST	CG	N
1.125	28.58	10643	3.00	76.2	.943	24.0	14	2.5	1.6	39	22	99	.75	19.1	0.091	2.3	8.25	SPR	CG	Z
1.125	28.58	366	3.00	76.2	.915	23.2	22	3.8	1.5	39	34	150	1.00	25.3	0.105	2.7	9.50	HD	CG	Z
1.125	28.58	59	3.00	76.2	.741	18.8	275	48	.63	16	172	766	2.06	52.4	0.192	4.9	10.8	HD	CG	Z
1.125	28.58	3157	3.19	81.0	.781	19.8	156	27	.84	21	131	585	1.95	49.5	0.172	4.4	11.3	SPR	CG	Z
1.125	28.58	11935	3.25	82.6	.965	24.5	3.2	.56	1.8	46	5.8	26	1.44	36.6	0.080	2.0	18.0	SPR	CG	Z
1.125	28.58	S-169	3.38	85.7	1.031	26.2	.41	.07	2.7	68	1.1	4.8	.71	17.9	0.047	1.2	14.0	SST	C	N
1.125	28.58	3180	3.44	87.3	.749	19.0	230	40	.71	18	162	721	2.16	54.9	0.188	4.8	11.5	SPR	CG	Z
1.125	28.58	4399	3.50	88.9	.915	23.2	14	2.4	2.0	52	28	124	1.47	37.3	0.105	2.7	14.0	SPR	CG	N
1.125	28.58	10297	3.50	88.9	.875	22.2	39	6.8	1.4	36	55	243	1.38	34.9	0.125	3.2	11.0	SPR	CG	Z
1.125	28.58	2519	3.63	92.1	.899	22.8	19	3.3	2.0	52	39	171	1.58	40.2	0.113	2.9	14.0	HD	CG	Z
1.125	28.58	4274	3.75	95.3	.889	22.6	25	4.3	1.9	47	46	205	1.53	39.0	0.118	3.0	13.0	SPR	CG	Z
1.125	28.58	7054	3.75	95.3	.813	20.7	74	13	1.2	30	88	391	2.18	55.5	0.156	4.0	13.0	SST	C	N
1.125	28.58	3083	3.94	100.0	.805	20.4	95	17	1.1	28	107	474	2.08	52.8	0.160	4.1	13.0	SPR	CG	GI
1.125	28.58	S-1300	4.00	101.6	.975	24.8	4.6	.80	2.7	68	12	54	.79	20.0	0.075	1.9	9.50	SST	C	N
1.125	28.58	362	4.00	101.6	.885	22.5	26	4.5	1.9	48	48	216	1.72	43.7	0.120	3.0	13.3	HD	C	Z
1.125	28.58	4121	4.00	101.6	.829	21.1	62	11	1.4	36	87	387	2.07	52.6	0.148	3.8	14.0	SPR	CG	Z
1.125	28.58	S-1675	4.13	104.8	.827	21.0	56	9.9	1.4	36	80	356	2.09	53.0	0.149	3.8	14.0	SST	CG	N
1.125	28.58	12068	4.50	114.3	.823	20.9	67	12	1.3	34	90	401	2.11	53.7	0.151	3.8	14.0	SPR	CG	Z
1.125	28.58	1847	4.63	117.5	.935	23.7	9.3	1.6	3.3	85	31	138	1.28	32.6	0.095	2.4	13.5	MW	CG	Z
1.125	28.58	10626	4.75	120.7	.957	24.3	5.1	.90	3.3	85	17	76	1.09	27.7	0.084	2.1	13.0	SST	CG	N
1.125	28.58	12462	5.25	133.4	.969	24.6	4.6	.81	3.2	80	15	65	1.01	25.8	0.078	2.0	12.0	SPR	C	Z
1.125	28.58	2723	5.31	134.9	.961	24.4	5.7	1.0	4.1	105	24	105	1.07	27.1	0.082	2.1	12.0	MW	C	Z
1.125	28.58	7003	5.31	134.9	.813	20.7	50	8.8	1.9	49	96	427	3.39	86.1	0.156	4.0	20.5	HD	C	Z
1.125	28.58	11518	6.50	165.1	.875	22.2	50	8.8	1.1	28	55	243	1.25	31.8	0.125	3.2	9.00	SPR	CG	Z
1.125	28.58	814	7.00	177.8	.801	20.3	49	8.6	2.3	57	111	492	4.00	101.5	0.162	4.1	24.7	HD	CG	Z
1.125	28.58	1625	7.50	190.5	.801	20.3	58	10	1.9	48	111	492	3.40	86.4	0.162	4.1	21.0	SPR	CG	Z
1.125	28.58	3270	8.00	203.2	.741	18.8	109	19	1.6	40	172	766	4.61	117.0	0.192	4.9	24.0	SPR	CG	Z
1.125	28.58	374	9.25	235.0	.915	23.2	8.2	1.4	4.1	104	34	150	2.42	61.3	0.105	2.7	22.0	HD	C	Z
1.125	28.58	833	10.0	254.0	.915	23.2	6.1	1.1	5.5	141	34	150	3.05	77.3	0.105	2.7	29.0	HD	CG	Z
1.125	28.58	826	10.0	254.0	.855	21.7	15	2.7	4.3	110	67	296	4.59	116.6	0.135	3.4	34.0	HD	CG	Z
1.125	28.58	820	10.0	254.0	.829	21.1	22	3.8	4.0	101	87	387	5.29	134.4	0.148	3.8	35.8	HD	CG	Z
1.125	28.58	867	11.0	279.4	.885	22.5	9.7	1.7	5.0	127	48	216	4.00	101.6	0.120	3.0	32.3	HD	C	Z
1.125	28.58	838	12.0	304.8	.741	18.8	61	11	2.8	72	172	766	8.02	203.6	0.192	4.9	41.8	HD	CG	Z
1.140	28.96	S-1466	.59	15.1	.858	21.8	496	87	.14	3.4	67	299	.42	10.7	0.141	3.6	3.00	SST	CG	N
1.140	28.96	S-305	1.00	25.4	.956	24.3	31	5.4	.49	13	15	68	.51	12.9	0.092	2.3	4.50	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.140	28.96	11907	1.09	27.8	1.012	25.7	2.9	.50	.58	15	1.7	7.4	.51	13.0	0.064	1.6	8.00	SST	CG	N
1.140	28.96	S-1047	1.25	31.8	.900	22.9	81	14	.54	14	44	194	.60	15.2	0.120	3.0	5.00	SST	CG	N
1.140	28.96	10889	1.31	33.3	1.046	26.6	.79	.14	.94	24	.74	3.3	.38	9.6	0.047	1.2	8.00	SST	CG	N
1.140	28.96	12321	1.50	38.1	1.030	26.2	2.2	.38	1.1	29	2.4	11	.37	9.4	0.055	1.4	6.75	SPR	CG	Z
1.140	28.96	12644	1.83	46.4	1.032	26.2	2.4	.42	1.5	38	3.5	16	.35	8.9	0.054	1.4	5.50	SST	C	N
1.140	28.96	S-3008	1.88	47.6	.880	22.4	99	17	.54	14	53	236	.72	18.2	0.130	3.3	5.50	SST	CG	N
1.140	28.96	S-1203	1.94	49.2	.880	22.4	87	15	.61	16	53	236	.78	19.8	0.130	3.3	6.00	SST	CG	N
1.140	28.96	S-254	2.00	50.8	.756	19.2	352	62	.42	11	147	653	1.47	37.4	0.192	4.9	7.67	SST	CG	N
1.140	28.96	3999	2.25	57.2	.956	24.3	19	3.3	1.2	30	23	100	.62	15.8	0.092	2.3	6.75	SPR	CG	Z
1.140	28.96	11343	2.41	61.1	.844	21.4	157	27	.55	14	86	383	.96	24.4	0.148	3.8	6.50	SPR	CG	Z
1.140	28.96	3173	2.56	65.1	.956	24.3	13	2.2	1.7	44	22	99	.83	21.0	0.092	2.3	9.00	SPR	CG	Z
1.140	28.96	3156	2.63	66.7	1.028	26.1	2.8	.49	2.0	52	5.7	25	.34	8.5	0.056	1.4	6.00	SPR	CG	Z
1.140	28.96	11130	2.84	72.2	.756	19.2	270	47	.63	16	170	758	2.02	51.2	0.192	4.9	10.5	SPR	CG	Z
1.140	28.96	12755	2.84	72.2	.766	19.5	232	41	.77	19	178	790	2.01	51.1	0.187	4.7	10.8	OT	CG	N
1.140	28.96	S-1168	3.00	76.2	.960	24.4	8.9	1.6	2.1	53	19	83	.90	22.9	0.090	2.3	10.0	SST	CG	N
1.140	28.96	11799	3.13	79.4	.830	21.1	124	22	.77	20	96	427	1.40	35.4	0.155	3.9	9.00	SPR	CG	Z
1.140	28.96	10365	3.19	81.0	.844	21.4	76	13	1.1	29	86	383	1.67	42.3	0.148	3.8	11.3	SPR	CG	Z
1.140	28.96	4312	3.88	98.4	.870	22.1	51	8.9	1.3	33	66	292	1.52	38.6	0.135	3.4	11.3	SPR	CG	Z
1.140	28.96	3158	4.00	101.6	.890	22.6	30	5.2	1.8	46	54	240	1.78	45.2	0.125	3.2	14.0	SPR	CG	Z
1.140	28.96	S-1458	4.88	123.8	.970	24.6	5.1	.88	3.5	88	17	78	1.11	28.1	0.085	2.2	13.0	SST	CG	N
1.140	28.96	10571	4.88	123.8	.890	22.6	23	4.1	2.3	59	54	240	2.06	52.4	0.125	3.2	16.5	SPR	CG	Z
1.140	28.96	12179	5.16	131.0	.814	20.7	75	13	1.5	38	111	494	2.69	68.3	0.163	4.1	16.5	SPR	CG	Z
1.140	28.96	10458	5.25	133.4	.968	24.6	6.7	1.2	2.9	73	19	86	1.03	26.2	0.086	2.2	12.0	SPR	CG	Z
1.140	28.96	10376	5.31	134.9	.966	24.5	7.1	1.2	2.8	72	20	89	1.04	26.5	0.087	2.2	12.0	HD	CG	Z
1.140	28.96	3024	5.63	142.9	.786	20.0	88	15	1.6	41	141	628	3.54	89.9	0.177	4.5	20.0	SPR	CG	Z
1.156	29.36	S-262	.50	12.7	1.062	27.0	2.2	.39	.27	6.7	.59	2.6	.24	6.0	0.047	1.2	4.00	SST	C	N
1.156	29.36	3306	.69	17.4	.996	25.3	32	5.5	.33	8.3	10	46	.36	9.1	0.080	2.0	3.50	SPR	C	Z
1.156	29.36	10831	.81	20.6	1.066	27.1	1.9	.33	.59	15	1.1	5.0	.23	5.7	0.045	1.1	4.00	SST	C	N
1.156	29.36	B8-47	.88	22.2	1.056	26.8	2.4	.41	.65	17	1.5	6.8	.23	5.7	0.050	1.3	4.50	SST	CG	N
1.156	29.36	Q-32	.88	22.2	1.044	26.5	9.4	1.6	.56	14	5.3	23	.17	4.3	0.056	1.4	3.00	SST	CG	N
1.156	29.36	S-1018	.94	23.8	.886	22.5	223	39	.26	6.7	58	260	.51	12.9	0.135	3.4	3.75	SST	CG	N
1.156	29.36	S-1070	1.00	25.4	.832	21.1	584	102	.16	4.2	96	426	.57	14.4	0.162	4.1	3.50	SST	CG	N
1.156	29.36	12237	1.25	31.8	1.046	26.6	2.0	.35	.87	22	1.7	7.6	.39	9.8	0.055	1.4	7.00	SPR	CG	Z
1.156	29.36	3468	1.25	31.8	.980	24.9	24	4.1	.81	21	19	85	.44	11.2	0.088	2.2	5.00	SPR	CG	Z
1.156	29.36	3027	1.25	31.8	.976	24.8	21	3.6	.73	19	15	68	.52	13.1	0.090	2.3	5.75	SPR	CG	Z
1.156	29.36	PP-40	1.28	32.5	.896	22.8	109	19	.53	14	58	258	.72	18.2	0.130	3.3	5.50	SPR	CG	Z
1.156	29.36	4120	1.38	34.9	.986	25.0	20	3.6	.87	22	18	78	.51	13.0	0.085	2.2	5.00	SPR	CG	Z
1.156	29.36	PP-38	1.38	34.9	.896	22.8	52	9.1	.27	6.9	14	62	1.11	28.1	0.130	3.3	8.50	SST	CG	N
1.156	29.36	S-1183	1.44	36.5	1.052	26.7	.80	.14	.84	21	.67	3.0	.60	15.2	0.052	1.3	10.5	SST	C	N
1.156	29.36	10168	1.50	38.1	1.048	26.6	1.9	.34	1.1	29	2.2	9.7	.36	9.3	0.054	1.4	6.75	SPR	CG	Z
1.156	29.36	S-468	1.69	42.8	.946	24.0	26	4.6	.95	24	25	111	.74	18.7	0.105	2.7	7.00	SST	CG	N
1.156	29.36	12208	1.78	45.2	.900	22.9	71	12	.76	19	54	239	1.02	26.0	0.128	3.3	7.00	MW	C	Z
1.156	29.36	11528	1.88	47.6	1.084	27.5	.57	.10	1.7	42	.95	4.2	.22	5.5	0.036	0.9	5.00	SPR	C	Z
1.156	29.36	S-79	1.94	49.2	1.050	26.7	1.5	.27	1.6	40	2.4	11	.36	9.1	0.053	1.3	6.75	SST	CG	N
1.156	29.36	3013	2.00	50.8	1.028	26.1	3.1	.54	1.5	38	4.6	20	.51	13.0	0.064	1.6	8.00	SPR	CG	Z
1.156	29.36	3255	2.13	54.0	.870	22.1	105	18	.73	19	77	342	1.07	27.2	0.143	3.6	7.50	SPR	CG	Z
1.156	29.36	2969	2.50	63.5	1.012	25.7	5.5	.97	2.0	50	11	48	.54	13.7	0.072	1.8	7.50	SPR	CG	Z
1.156	29.36	3368	2.63	66.7	.946	24.0	21	3.6	1.6	40	33	147	.97	24.7	0.105	2.7	9.25	SPR	CG	GI
1.156	29.36	Y-63	2.75	69.9	1.028	26.1	2.8	.49	2.2	56	6.1	27	.56	14.2	0.064	1.6	7.75	SST	C	N
1.156	29.36	3487	2.75	69.9	1.026	26.1	4.0	.69	2.2	56	8.7	39	.52	13.2	0.065	1.7	7.00	HD	C	Z
1.156	29.36	S-469	2.88	73.0	1.048	26.6	1.3	.23	2.4	61	3.2	14	.49	12.3	0.054	1.4	8.00	SST	C	N
1.156	29.36	S-153	3.00	76.2	1.048	26.6	1.3	.22	2.5	64	3.2	14	.50	12.7	0.054	1.4	8.25	SST	C	N
1.156	29.36	S-256	3.00	76.2	.974	24.7	9.0	1.6	2.1	53	19	84	.90	22.8	0.091	2.3	10.0	SST	CG	N
1.156	29.36	11624	3.25	82.6	.916	23.3	23	4.1	1.5	38	35	157	1.74	44.2	0.120	3.0	13.5	SPR	C	Z
1.156	29.36	3269	3.75	95.3	.932	23.7	17	2.9	2.2	55	36	161	1.57	39.8	0.112	2.8	14.0	SPR	CG	Z
1.156	29.36	534	3.84	97.6	.860	21.8	56	9.8	1.5	38	85	378	2.07	52.6	0.148	3.8	14.0	SPR	CG	Z
1.156	29.36	S-3210	3.88	98.4	.892	22.7	40	7.0	1.4	35	55	243	1.45	36.9	0.132	3.4	11.0	SST	CG	N
1.156	29.36	10177	4.13	104.8	.886	22.5	39	6.8	1.7	42	65	289	1.82	46.3	0.135	3.4	13.5	SPR	CG	Z
1.156	29.36	3143	4.13	104.8	.860	21.8	56	9.8	1.5	38	85	378	2.07	52.6	0.148	3.8	14.0	SPR	CG	Z
1.156	29.36	12516	4.16	105.6	.964	24.5	10	1.8	3.0	76	31	137	1.15	29.3	0.096	2.4	12.0	MW	CG	Z
1.156	29.36	11831	4.50	114.3	.956	24.3	7.2	1.3	2.8	71	20	90	1.70	43.2	0.100	2.5	17.0	SST	CG	N
1.156	29.36	B7-55	5.03	127.8	.976	24.8	6.5	1.1	3.2	82	21	93	1.26	32.0	0.090	2.3	14.0	SPR	CG	N
1.156	29.36	2991	5.25	133.4	1.026	26.1	1.4	.25	4.1	105	5.9	26	1.11	28.1	0.065	1.7	16.0	SPR	C	Z
1.156	29.36	10549	5.31	134.9	.980	24.9	7.4	1.3	2.7	69	20	91	1.01	25.7	0.088	2.2	11.5	SPR	CG	Z
1.156	29.36	11685	5.94	150.8	.832	21.1	54	9.4	2.0	51	108	480	3.36	85.4	0.162	4.1	20.8	SPR	CG	Z
1.156	29.36	12003	6.13	155.6	.694	17.6	287	50	.96	24	274	1221	4.62	117.3	0.231	5.9	20.0	SPR	CG	Z
1.156	29.36	4123	7.25	184.2	.818	20.8	64	11	1.9	48	122	542	3.72	94.4	0.169	4.3	21.0	SPR	CG	Z
1.172	29.77	S-903	.78	19.8	1.012	25.7	23	3.9	.48	12	11	48	.30	7.6	0.080	2.0	3.75	SST	CG	N
1.172	29.77	3177	1.03	26.2	1.022	26.0	6.9	1.2	.51	13	3.5	16	.53	13.3	0.075	1.9	7.00	MW	CG	Z
1.172	29.77	12587	1.13	28.6	.972	24.7	42	7.4	.65	17	28	123	.48	12.1	0.100	2.5	4.75	SPR	CG	N
1.172	29.77	4147	1.50	38.1	.818	20.8	410	72	.34	8.5	138	612	.97	24.7	0.177	4.5	5.50	SPR	CG	Z
1.172	29.77	KK-60	1.75	44.5	1.032	26.2	6.1	1.1	1.3	33	8.0	35	.44	11.1	0.070	1.8	6.25	SPR	CG	Z
1.172	29.77	LL-35	1.78	45.2	1.032	26.2	2.1	.38	.80	20	1.7	7.7	.98	24.9	0.070	1.8	14.0	SPR	CG	Z
1.172	29.77	11389	2.00	50.8	.902	22.9	76	13	.76	19	58	257	.95	24.0	0.135	3.4	7.00	SST	CG	N
1.172	29.77	10680	2.00	50.8	.848	21.5	148	26	.62	16	92	411	1.38	35.0	0.162	4.1	8.50	SPR	CG	Z
1.172	29.77	11122	2.16	54.8	.860	21.8	125	22	.76	19	95	424	1.33	33.7	0.156	4.0	8.50	SPR	CG	Z
1.172	29.77	S-1234	2.19	55.6	1.012	25.7	9.3	1.6	1.5	39	14	63	.50	12.7	0.080	2.0	6.25	SST	CG	N
1.172	29.77	12014	2.34	59.5	1.058	26.9	2.1	.37	1.9	49	4.0	18	.41	10.5	0.057	1.4	7.25	SPR	CG	Z
1.172	29.77	11213	2.38	60.3	.876	22.3	92	16	.90	23	82	365	1.48	37.6	0.148	3.8	9.00	SPR	C	Z
1.172	29.77	1539	2.41	61.1	.932	23.7	43	7.5	1.1	28	47	208	.96	24.4	0.120	3.0	8.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.172	29.77	1797	2.44	61.9	.902	22.9	66	12	.97	25	64	285	1.15	29.2	0.135	3.4	8.50	HD	CG	Z
1.172	29.77	11862	2.94	74.6	1.016	25.8	9.1	1.6	1.6	39	14	62	.51	12.9	0.078	2.0	6.50	SPR	CG	N
1.172	29.77	B17-188	3.50	88.9	1.082	27.5	.41	.07	3.0	76	1.2	5.4	.50	12.6	0.045	1.1	11.0	SST	CG	N
1.172	29.77	S-1244	3.63	92.1	1.012	25.7	7.9	1.4	1.8	46	14	63	.56	14.2	0.080	2.0	7.00	SST	CG	N
1.172	29.77	3016	4.17	106.0	.888	22.6	49	8.5	1.5	39	74	330	1.85	46.9	0.142	3.6	13.0	SPR	CG	GI
1.172	29.77	3670	4.28	108.7	1.074	27.3	.73	.13	3.7	95	2.7	12	.54	13.7	0.049	1.2	10.0	SPR	C	Z
1.172	29.77	11220	6.00	152.4	.788	20.0	143	25	1.2	30	166	740	3.17	80.5	0.192	4.9	16.5	SPR	CG	Z
1.172	29.77	S-1616	7.00	177.8	.988	25.1	3.3	.58	4.7	119	15	69	2.30	58.4	0.092	2.3	24.0	SST	C	N
1.172	29.77	10675	10.8	273.1	.860	21.8	27	4.7	3.5	90	95	424	4.99	126.8	0.156	4.0	32.0	SPR	CG	Z
1.172	29.77	2742	11.3	285.8	.908	23.1	11	2.0	5.2	133	60	267	4.88	124.1	0.132	3.4	36.0	SPR	C	Z
1.188	30.18	10160	.44	11.1	1.028	26.1	43	7.6	.20	5.0	8.6	38	.24	6.1	0.080	2.0	3.00	SPR	CG	Z
1.188	30.18	10661	.66	16.7	1.000	25.4	86	15	.27	6.9	23	103	.28	7.2	0.094	2.4	3.00	SPR	CG	Z
1.188	30.18	S-3078	.75	19.1	.928	23.6	241	42	.21	5.4	51	227	.42	10.7	0.130	3.3	3.25	SST	CG	N
1.188	30.18	S-3178	.75	19.1	.908	23.1	417	73	.15	3.9	63	282	.42	10.7	0.140	3.6	3.00	SST	CG	N
1.188	30.18	2844	.81	20.6	.808	20.5	1256	220	.13	3.2	159	709	.67	16.9	0.190	4.8	3.50	SPR	CG	Z
1.188	30.18	11918	1.00	25.4	1.066	27.1	4.1	.72	.70	18	2.9	13	.31	7.7	0.061	1.5	5.00	SST	CG	N
1.188	30.18	1902	1.13	28.6	1.038	26.4	6.6	1.2	.60	15	4.0	18	.53	13.3	0.075	1.9	7.00	SPR	CG	Z
1.188	30.18	11632	1.22	31.0	1.006	25.6	15	2.6	.58	15	8.7	39	.64	16.2	0.091	2.3	7.00	SPR	CG	Z
1.188	30.18	12540	1.38	34.9	1.028	26.1	17	3.0	.86	22	15	66	.44	11.2	0.080	2.0	4.50	SPR	C	N
1.188	30.18	533	1.38	34.9	.978	24.8	50	8.8	.64	16	32	143	.60	15.3	0.105	2.7	4.75	HD	C	Z
1.188	30.18	11259	1.41	35.7	1.028	26.1	19	3.4	.78	20	15	66	.42	10.7	0.080	2.0	4.25	SPR	C	Z
1.188	30.18	12334	1.50	38.1	1.032	26.2	9.7	1.7	1.0	26	10	45	.47	11.9	0.078	2.0	6.00	SPR	CG	Z
1.188	30.18	11642	1.50	38.1	1.028	26.1	14	2.5	1.0	26	15	66	.40	10.2	0.080	2.0	5.00	SPR	CG	Z
1.188	30.18	3186	1.50	38.1	.774	19.7	932	163	.22	5.6	204	907	1.04	26.3	0.207	5.3	5.00	SPR	CG	Z
1.188	30.18	1849	1.53	38.9	1.006	25.6	30	5.2	.98	25	29	131	.41	10.4	0.091	2.3	4.50	MW	CG	Z
1.188	30.18	11485	1.59	40.5	1.020	25.9	18	3.1	.97	25	17	77	.50	12.8	0.084	2.1	5.00	SPR	C	Z
1.188	30.18	S-3058	1.88	47.6	1.068	27.1	3.2	.56	1.5	38	4.8	21	.39	9.9	0.060	1.5	5.50	SST	C	N
1.188	30.18	2992	1.88	47.6	.938	23.8	65	11	.80	20	52	231	.81	20.6	0.125	3.2	6.50	SPR	CG	Z
1.188	30.18	1889	2.00	50.8	1.044	26.5	6.2	1.1	1.5	37	9.0	40	.54	13.7	0.072	1.8	6.50	HD	C	Z
1.188	30.18	12437	2.00	50.8	1.040	26.4	7.3	1.3	1.5	37	11	48	.54	13.6	0.074	1.9	6.25	SPR	C	Z
1.188	30.18	S-3133	2.00	50.8	.978	24.8	28	4.9	1.1	27	30	132	.76	19.3	0.105	2.7	6.25	SST	C	N
1.188	30.18	S-3186	2.00	50.8	.918	23.3	71	12	.80	20	57	253	.95	24.0	0.135	3.4	7.00	SST	CG	N
1.188	30.18	S-3012	2.00	50.8	.774	19.7	442	77	.40	10	176	781	1.55	39.4	0.207	5.3	7.50	SST	CG	N
1.188	30.18	2792	2.19	55.6	.918	23.3	58	10	.97	25	57	253	1.22	30.9	0.135	3.4	9.00	SPR	CG	Z
1.188	30.18	12036	2.28	57.9	1.068	27.1	3.1	.53	1.9	48	5.8	26	.38	9.5	0.060	1.5	6.25	SPR	CG	Z
1.188	30.18	11160	2.28	57.9	.876	22.3	163	29	.58	15	94	419	1.05	26.7	0.156	4.0	6.75	SPR	CG	Z
1.188	30.18	1924	2.38	60.3	1.004	25.5	16	2.7	1.4	35	22	97	.74	18.7	0.092	2.3	7.00	SPR	C	GI
1.188	30.18	857	2.38	60.3	.918	23.3	68	12	.93	24	63	281	1.22	30.9	0.135	3.4	8.00	HD	C	Z
1.188	30.18	11251	2.41	61.1	.864	21.9	203	36	.46	12	93	415	.97	24.7	0.162	4.1	6.00	SST	CG	N
1.188	30.18	821	2.50	63.5	.892	22.7	85	15	.98	25	83	368	1.37	34.8	0.148	3.8	9.25	HD	CG	Z
1.188	30.18	3382	2.63	66.7	.908	23.1	69	12	1.0	26	70	313	1.26	32.0	0.140	3.6	9.00	SPR	CG	Z
1.188	30.18	869	2.75	69.9	.948	24.1	35	6.1	1.3	33	46	205	1.20	30.5	0.120	3.0	9.00	HD	C	Z
1.188	30.18	3469	2.75	69.9	.918	23.3	58	10	1.1	28	63	281	1.22	30.9	0.135	3.4	9.00	HD	CG	Z
1.188	30.18	B8-64	3.00	76.2	.862	21.9	119	21	.80	20	95	423	1.47	37.3	0.163	4.1	9.00	SST	CG	N
1.188	30.18	11960	3.06	77.8	.908	23.1	64	11	1.1	28	70	313	1.33	33.8	0.140	3.6	9.50	SPR	CG	Z
1.188	30.18	11414	3.13	79.4	.978	24.8	18	3.2	1.8	44	32	143	1.00	25.3	0.105	2.7	9.50	HD	CG	Z
1.188	30.18	11175	3.25	82.6	.892	22.7	88	15	.95	24	83	368	1.33	33.8	0.148	3.8	9.00	SPR	CG	Z
1.188	30.18	840	3.25	82.6	.804	20.4	203	36	.81	21	164	731	2.26	57.3	0.192	4.9	11.8	HD	CG	Z
1.188	30.18	43	3.25	82.6	.734	18.6	434	76	.59	15	255	1136	2.59	65.7	0.227	5.8	11.5	HD	CG	Z
1.188	30.18	S-165	3.50	88.9	1.094	27.8	.46	.08	3.0	76	1.4	6.1	.52	13.1	0.047	1.2	11.0	SST	CG	N
1.188	30.18	S-949	3.94	100.0	.812	20.6	169	30	.79	20	133	592	2.12	53.7	0.188	4.8	11.3	SST	CG	N
1.188	30.18	3673	4.63	117.5	1.026	26.1	3.8	.67	3.5	89	13	59	1.13	28.8	0.081	2.1	14.0	SPR	CG	Z
1.188	30.18	S-362	4.63	117.5	.978	24.8	8.0	1.4	2.8	72	23	101	1.79	45.3	0.105	2.7	17.0	SST	CG	N
1.188	30.18	815	4.63	117.5	.864	21.9	64	11	1.6	42	105	468	2.63	66.9	0.162	4.1	16.3	HD	CG	Z
1.188	30.18	11690	4.75	120.7	.858	21.8	77	13	1.4	37	111	493	2.48	62.9	0.165	4.2	15.0	SPR	CG	Z
1.188	30.18	2704	4.81	122.2	1.028	26.1	3.5	.61	3.6	91	12	55	1.24	31.5	0.080	2.0	14.5	HD	C	Z
1.188	30.18	3260	5.25	133.4	.834	21.2	114	20	1.2	30	136	605	2.48	62.9	0.177	4.5	14.0	SPR	CG	Z
1.188	30.18	3292	5.50	139.7	.834	21.2	114	20	1.2	30	136	605	2.48	62.9	0.177	4.5	14.0	SPR	CG	Z
1.188	30.18	809	6.00	152.4	.834	21.2	72	13	1.9	48	136	605	3.72	94.4	0.177	4.5	21.0	HD	CG	Z
1.188	30.18	S-250	6.13	155.6	.948	24.1	13	2.3	3.2	80	42	187	2.16	54.9	0.120	3.0	18.0	SST	CG	N
1.188	30.18	4344	6.75	171.5	.854	21.7	51	9.0	2.2	57	115	511	3.76	95.4	0.167	4.2	22.5	SPR	CG	Z
1.188	30.18	2760	7.00	177.8	.864	21.9	51	8.9	2.1	52	105	468	3.24	82.3	0.162	4.1	20.0	SPR	CG	GI
1.188	30.18	4140	11.5	292.1	1.008	25.6	3.1	.54	6.6	167	20	91	2.34	59.4	0.090	2.3	25.0	SPR	C	Z
1.203	30.56	10638	.81	20.6	.833	21.2	1064	186	.14	3.5	146	649	.65	16.4	0.185	4.7	3.50	SPR	CG	Z
1.203	30.56	S-1045	1.13	28.6	.963	24.5	117	20	.36	9.0	42	185	.45	11.4	0.120	3.0	4.00	SST	CG	N
1.203	30.56	1894	1.13	28.6	.961	24.4	139	24	.34	8.5	47	208	.45	11.5	0.121	3.1	3.75	SPR	CG	Z
1.203	30.56	B10-65	1.16	29.4	1.101	28.0	.63	.11	.60	15	.37	1.7	.56	14.2	0.051	1.3	11.0	SST	CG	N
1.203	30.56	S-981	1.28	32.5	.933	23.7	136	24	.41	10	56	251	.61	15.4	0.135	3.4	4.50	SST	CG	N
1.203	30.56	3055	1.31	33.3	1.113	28.3	.84	.15	1.0	26	.86	3.8	.29	7.4	0.045	1.1	6.50	SPR	CG	Z
1.203	30.56	12737	1.31	33.3	1.043	26.5	17	2.9	.87	22	15	65	.44	11.2	0.080	2.0	4.50	SPR	C	N
1.203	30.56	2549	1.34	34.1	1.017	25.8	39	6.9	.56	14	22	99	.37	9.4	0.093	2.4	4.00	SPR	CG	Z
1.203	30.56	12120	1.41	35.7	1.079	27.4	6.4	1.1	1.1	29	7.3	32	.26	6.7	0.062	1.6	4.25	SPR	CG	Z
1.203	30.56	12281	1.47	37.3	1.075	27.3	7.3	1.3	1.1	28	8.0	36	.27	6.9	0.064	1.6	4.25	SPR	CG	Z
1.203	30.56	3370	1.75	44.5	.879	22.3	195	34	.53	14	104	462	1.05	26.7	0.162	4.1	6.50	SPR	CG	Z
1.203	30.56	11695	1.94	49.2	1.019	25.9	9.7	1.7	1.0	26	10	45	.90	22.8	0.092	2.3	9.75	SPR	CG	Z
1.203	30.56	10302	1.94	49.2	.849	21.6	290	51	.46	12	134	598	1.15	29.2	0.177	4.5	6.50	SPR	CG	Z
1.203	30.56	S-1668	1.97	50.0	.849	21.6	290	51	.41	10	119	531	1.06	27.0	0.177	4.5	6.00	SST	CG	N
1.203	30.56	S-3005	2.00	50.8	.849	21.6	252	44	.47	12	119	531	1.15	29.2	0.177	4.5	6.50	SST	CG	N
1.203	30.56	11500	2.00	50.8	.791	20.1	746	131	.27	6.8	199	885	1.34	34.0	0.206	5.2	5.50	SPR	CG	Z
1.203	30.56	11572	2.03	51.6	.907	23.0	168	29	.49	12	82	364	.96	24.4	0.148	3.8	5.50	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.203	30.56	12087	2.06	52.4	.933	23.7	78	14	.80	20	63	278	.95	24.0	0.135	3.4	7.00	SPR	CG	Z
1.203	30.56	B18-166	2.28	57.9	1.003	25.5	19	3.4	1.4	36	27	122	.75	19.1	0.100	2.5	7.50	SPR	CG	N
1.203	30.56	S-241	2.34	59.5	.963	24.5	45	7.9	.92	23	42	185	.78	19.8	0.120	3.0	6.50	SST	CG	N
1.203	30.56	S-337	2.38	60.3	.993	25.2	23	4.0	1.3	33	29	131	.74	18.7	0.105	2.7	7.00	SST	CG	N
1.203	30.56	10291	2.38	60.3	.907	23.0	98	17	.84	21	82	364	1.18	30.1	0.148	3.8	8.00	SPR	CG	Z
1.203	30.56	S-281	2.38	60.3	.907	23.0	93	16	.79	20	74	328	1.11	28.2	0.148	3.8	7.50	SST	CG	N
1.203	30.56	3626	2.75	69.9	1.113	28.3	.54	.09	2.3	58	1.2	5.5	.45	11.4	0.045	1.1	9.00	HD	C	Z
1.203	30.56	10461	2.75	69.9	.999	25.4	20	3.6	1.4	36	29	130	.79	20.1	0.102	2.6	7.75	SPR	CG	Z
1.203	30.56	12301	3.00	76.2	1.113	28.3	.54	.09	2.6	66	1.4	6.3	.41	10.3	0.045	1.1	9.00	SPR	CG	Z
1.203	30.56	4339	3.25	82.6	.753	19.1	485	85	.51	13	246	1096	2.36	60.0	0.225	5.7	10.5	SPR	CG	Z
1.203	30.56	12090	3.38	85.7	1.079	27.4	1.6	.28	2.8	70	4.4	19	.62	15.7	0.062	1.6	10.0	SST	CG	N
1.203	30.56	12002	3.38	85.7	1.013	25.7	14	2.5	1.6	42	24	105	.76	19.3	0.095	2.4	8.00	SPR	CG	Z
1.203	30.56	B18-201	3.47	88.1	1.061	26.9	2.5	.43	2.7	68	6.7	30	.78	19.8	0.071	1.8	11.0	SST	CG	N
1.203	30.56	S-306	3.50	88.9	1.033	26.2	6.7	1.2	2.5	63	17	74	.85	21.6	0.085	2.2	9.00	SST	C	N
1.203	30.56	2955	3.56	90.5	1.063	27.0	2.5	.44	2.7	68	6.7	30	.88	22.2	0.070	1.8	11.5	SPR	C	Z
1.203	30.56	2548	4.38	111.1	.983	25.0	14	2.4	2.6	65	35	157	1.51	38.4	0.110	2.8	13.8	SPR	CG	Z
1.203	30.56	1745	5.13	130.2	1.079	27.4	.99	.17	4.0	103	4.0	18	1.09	27.6	0.062	1.6	16.5	SPR	C	Z
1.203	30.56	10974	5.88	149.2	.963	24.5	15	2.6	3.1	79	46	202	2.16	54.9	0.120	3.0	18.0	HD	CG	Z
1.203	30.56	11826	7.25	184.2	.991	25.2	8.7	1.5	3.5	88	30	135	1.80	45.8	0.106	2.7	16.0	SST	C	N
1.203	30.56	1551	7.75	196.9	.909	23.1	25	4.4	3.2	81	80	357	3.63	92.1	0.147	3.7	24.7	SPR	CG	Z
1.203	30.56	S-346	16.0	406.4	1.023	26.0	1.6	.29	11	290	19	83	3.56	90.3	0.090	2.3	38.5	SST	C	N
1.219	30.96	11552	.94	23.8	.949	24.1	.02	.003	.88	22	.02	.07	.06	1.5	0.135	3.4	3.50	MW	CG	Z
1.219	30.96	3444	.94	23.8	.943	24.0	275	48	.24	6.1	66	293	.48	12.3	0.138	3.5	3.50	SPR	CG	Z
1.219	30.96	B10-8	1.00	25.4	.969	24.6	119	21	.39	9.9	46	206	.50	12.7	0.125	3.2	4.00	SST	CG	N
1.219	30.96	S-974	1.16	29.4	.979	24.9	104	18	.39	10	41	182	.47	11.8	0.120	3.0	4.00	SST	CG	N
1.219	30.96	12701	1.31	33.3	1.057	26.8	17	2.9	.87	22	15	65	.45	11.3	0.081	2.1	4.50	SPR	C	N
1.219	30.96	10875	1.31	33.3	1.009	25.6	28	4.9	.68	17	19	85	.63	16.0	0.105	2.7	6.00	SST	CG	N
1.219	30.96	10704	1.38	34.9	1.075	27.3	9.1	1.6	1.1	27	9.5	42	.32	8.2	0.072	1.8	4.50	SST	CG	N
1.219	30.96	12631	1.38	34.9	1.059	26.9	16	2.8	.91	23	15	65	.44	11.2	0.080	2.0	4.50	HD	C	N
1.219	30.96	11353	1.38	34.9	.895	22.7	297	52	.31	7.8	91	406	.73	18.5	0.162	4.1	4.50	SST	CG	N
1.219	30.96	3451	1.44	36.5	1.035	26.3	36	6.3	.59	15	21	94	.37	9.3	0.092	2.3	4.00	HD	CG	Z
1.219	30.96	2885	1.53	38.9	1.017	25.8	37	6.5	.75	19	28	124	.49	12.5	0.101	2.6	5.00	SPR	CG	Z
1.219	30.96	11164	1.63	41.3	.907	23.0	236	41	.39	9.9	92	409	.78	19.8	0.156	4.0	5.00	SPR	CG	Z
1.219	30.96	KK-71	1.75	44.5	1.039	26.4	29	5.1	.63	16	18	82	.36	9.1	0.090	2.3	4.00	SST	CG	N
1.219	30.96	10304	1.75	44.5	1.009	25.6	32	5.5	.99	25	31	139	.74	18.7	0.105	2.7	6.00	SPR	C	Z
1.219	30.96	12096	1.75	44.5	.859	21.8	384	67	.35	8.8	133	593	.99	25.1	0.180	4.6	5.50	SPR	CG	Z
1.219	30.96	11120	1.97	50.0	.879	22.3	198	35	.60	15	118	526	1.23	31.3	0.170	4.3	7.25	SPR	CG	Z
1.219	30.96	11579	2.22	56.4	.951	24.2	60	11	1.0	25	60	269	1.21	30.6	0.134	3.4	8.00	SPR	CG	N
1.219	30.96	4391	2.33	59.1	.923	23.4	94	16	.86	22	81	360	1.18	30.1	0.148	3.8	8.00	SPR	CG	Z
1.219	30.96	S-955	2.34	59.5	1.035	26.3	14	2.4	1.4	36	20	87	.60	15.2	0.092	2.3	6.50	SST	CG	N
1.219	30.96	S-1336	2.38	60.3	1.037	26.3	14	2.4	1.4	36	19	85	.68	17.3	0.091	2.3	6.50	SST	C	N
1.219	30.96	11320	2.38	60.3	.907	23.0	177	31	.52	13	92	409	.94	23.8	0.156	4.0	6.00	SPR	CG	Z
1.219	30.96	B18-194	2.44	61.9	1.129	28.7	.52	.09	2.0	52	1.1	4.7	.41	10.3	0.045	1.1	9.00	SPR	CG	N
1.219	30.96	11932	2.50	63.5	.829	21.1	387	68	.43	11	168	747	1.37	34.7	0.195	5.0	7.00	SPR	CG	N
1.219	30.96	3404	2.75	69.9	1.009	25.6	23	4.0	1.4	35	31	139	.86	21.7	0.105	2.7	8.00	SPR	CG	Z
1.219	30.96	S-3053	2.88	73.0	1.075	27.3	5.6	.97	1.8	46	10	44	.50	12.8	0.072	1.8	6.00	SST	C	N
1.219	30.96	12328	3.00	76.2	1.119	28.4	1.0	.18	2.6	65	2.6	12	.43	10.8	0.050	1.3	7.50	SPR	C	Z
1.219	30.96	S-1375	3.00	76.2	1.117	28.4	.59	.10	2.4	61	1.4	6.3	.61	15.5	0.051	1.3	11.0	SST	C	N
1.219	30.96	B18-182	3.22	81.8	.725	18.4	574	101	.47	12	267	1188	2.72	69.0	0.247	6.3	11.0	SST	CG	N
1.219	30.96	4302	3.25	82.6	1.009	25.6	16	2.8	2.0	50	31	139	1.05	26.7	0.105	2.7	10.0	SPR	CG	Z
1.219	30.96	11858	3.84	97.6	1.043	26.5	7.6	1.3	2.4	61	18	81	.79	20.1	0.088	2.2	9.00	SST	CG	N
1.219	30.96	7056	4.00	101.6	.865	22.0	99	17	1.2	30	118	525	2.48	62.9	0.177	4.5	13.0	SST	C	N
1.219	30.96	10989	4.06	103.2	.805	20.4	255	45	.78	20	199	887	2.48	63.1	0.207	5.3	12.0	HD	CG	Z
1.219	30.96	283	4.50	114.3	.895	22.7	70	12	1.5	37	103	457	2.27	57.6	0.162	4.1	14.0	HD	CG	Z
1.219	30.96	11731	7.50	190.5	.895	22.7	41	7.2	2.5	64	103	457	3.65	92.6	0.162	4.1	22.5	SPR	CG	Z
1.219	30.96	2841	7.75	196.9	.923	23.4	24	4.2	3.4	86	81	360	3.77	95.9	0.148	3.8	25.5	HD	CG	Z
1.219	30.96	4174	12.0	304.8	1.039	26.4	3.0	.52	6.7	169	20	88	2.25	57.2	0.090	2.3	24.0	SPR	C	Z
1.225	31.12	72627	.88	22.4	1.055	26.8	37	6.4	.59	15	22	97	.29	7.3	0.085	2.2	3.38	MW	CG	N
1.225	31.12	72627S	.88	22.4	1.055	26.8	31	5.4	.52	13	16	72	.29	7.3	0.085	2.2	3.38	SST	CG	N
1.225	31.12	72637	.88	22.4	1.033	26.2	60	10	.56	14	33	147	.32	8.2	0.096	2.4	3.38	MW	CG	N
1.225	31.12	72637S	.88	22.4	1.033	26.2	51	8.9	.44	11	22	99	.32	8.2	0.096	2.4	3.38	SST	CG	N
1.225	31.12	72651	.88	22.4	1.015	25.8	83	14	.51	13	42	188	.37	9.3	0.105	2.7	3.50	MW	CG	N
1.225	31.12	72651S	.88	22.4	1.015	25.8	70	12	.41	10	29	129	.37	9.3	0.105	2.7	3.50	SST	CG	N
1.225	31.12	72664	.88	22.4	1.001	25.4	105	18	.49	12	51	227	.39	10.0	0.112	2.8	3.50	MW	CG	N
1.225	31.12	72664S	.88	22.4	1.001	25.4	89	16	.37	9.5	33	148	.39	10.0	0.112	2.8	3.50	SST	CG	N
1.225	31.12	72679	.88	22.4	.975	24.8	161	28	.43	11	69	306	.45	11.5	0.125	3.2	3.63	MW	CG	N
1.225	31.12	72679S	.88	22.4	.975	24.8	137	24	.34	8.5	46	205	.45	11.5	0.125	3.2	3.63	SST	CG	N
1.225	31.12	72693	.88	22.4	.955	24.3	219	38	.39	9.9	86	381	.49	12.4	0.135	3.4	3.63	MW	CG	N
1.225	31.12	72693S	.88	22.4	.955	24.3	186	33	.30	7.5	55	246	.49	12.4	0.135	3.4	3.63	SST	CG	N
1.225	31.12	72708	.88	22.4	.929	23.6	325	57	.33	8.3	106	470	.56	14.1	0.148	3.8	3.75	MW	CG	N
1.225	31.12	72708S	.88	22.4	.929	23.6	276	48	.26	6.7	73	322	.56	14.1	0.148	3.8	3.75	SST	CG	N
1.225	31.12	72628	1.00	25.4	1.055	26.8	31	5.4	.69	18	22	96	.31	7.8	0.085	2.2	3.63	MW	CG	N
1.225	31.12	72628S	1.00	25.4	1.055	26.8	26	4.6	.62	16	16	72	.31	7.8	0.085	2.2	3.63	SST	CG	N
1.225	31.12	72638	1.00	25.4	1.033	26.2	50	8.8	.65	17	33	146	.35	8.8	0.096	2.4	3.63	MW	CG	N
1.225	31.12	72638S	1.00	25.4	1.033	26.2	43	7.5	.52	13	22	99	.35	8.8	0.096	2.4	3.63	SST	CG	N
1.225	31.12	72652	1.00	25.4	1.015	25.8	70	12	.61	15	42	187	.39	10.0	0.105	2.7	3.75	MW	CG	N
1.225	31.12	72652S	1.00	25.4	1.015	25.8	59	10	.49	12	29	129	.39	10.0	0.105	2.7	3.75	SST	CG	N
1.225	31.12	72665	1.00	25.4	1.001	25.4	88	15	.57	14	50	222	.43	11.0	0.112	2.8	3.88	MW	CG	N
1.225	31.12	72665S	1.00	25.4	1.001	25.4	75	13	.44	11	33	148	.43	11.0	0.112	2.8	3.88	SST	CG	N
1.225	31.12	72680	1.00	25.4	.975	24.8	134	24	.50	13	67	299	.50	12.7	0.125	3.2	4.00	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.225	31.12	72680S	1.00	25.4	.975	24.8	114	20	.40	10	46	205	.50	12.7	0.125	3.2	4.00	SST	CG	N
1.225	31.12	72694	1.00	25.4	.955	24.3	183	32	.46	12	84	375	.54	13.7	0.135	3.4	4.00	MW	CG	N
1.225	31.12	72694S	1.00	25.4	.955	24.3	156	27	.36	9.0	55	246	.54	13.7	0.135	3.4	4.00	SST	CG	N
1.225	31.12	72709	1.00	25.4	.929	23.6	270	47	.41	10	110	489	.59	15.0	0.148	3.8	4.00	MW	CG	N
1.225	31.12	72709S	1.00	25.4	.929	23.6	229	40	.32	8.0	73	322	.59	15.0	0.148	3.8	4.00	SST	CG	N
1.225	31.12	72729	1.00	25.4	.901	22.9	415	73	.35	8.8	143	637	.65	16.5	0.162	4.1	4.00	MW	CG	N
1.225	31.12	72729S	1.00	25.4	.901	22.9	352	62	.26	6.5	91	404	.65	16.5	0.162	4.1	4.00	SST	CG	N
1.225	31.12	72639	1.25	31.8	1.033	26.2	39	6.7	.84	21	32	144	.41	10.4	0.096	2.4	4.25	MW	CG	N
1.225	31.12	72639S	1.25	31.8	1.033	26.2	33	5.7	.68	17	22	99	.41	10.4	0.096	2.4	4.25	SST	CG	N
1.225	31.12	72653	1.25	31.8	1.015	25.8	53	9.2	.79	20	42	186	.46	11.7	0.105	2.7	4.38	MW	CG	N
1.225	31.12	72653S	1.25	31.8	1.015	25.8	45	7.9	.64	16	29	129	.46	11.7	0.105	2.7	4.38	SST	CG	N
1.225	31.12	72666	1.25	31.8	1.001	25.4	67	12	.75	19	50	221	.50	12.8	0.112	2.8	4.50	MW	CG	N
1.225	31.12	72666S	1.25	31.8	1.001	25.4	57	9.9	.59	15	33	148	.50	12.8	0.112	2.8	4.50	SST	CG	N
1.225	31.12	72681	1.25	31.8	.975	24.8	101	18	.67	17	68	301	.58	14.7	0.125	3.2	4.63	MW	CG	N
1.225	31.12	72681S	1.25	31.8	.975	24.8	86	15	.54	14	46	205	.58	14.7	0.125	3.2	4.63	SST	CG	N
1.225	31.12	72695	1.25	31.8	.955	24.3	136	24	.61	15	83	369	.64	16.3	0.135	3.4	4.75	MW	CG	N
1.225	31.12	72695S	1.25	31.8	.955	24.3	116	20	.48	12	55	246	.64	16.3	0.135	3.4	4.75	SST	CG	N
1.225	31.12	72710	1.25	31.8	.929	23.6	199	35	.55	14	109	484	.70	17.9	0.148	3.8	4.75	MW	CG	N
1.225	31.12	72710S	1.25	31.8	.929	23.6	169	30	.43	11	73	322	.70	17.9	0.148	3.8	4.75	SST	CG	N
1.225	31.12	72629	1.50	38.1	1.055	26.8	19	3.4	1.1	28	21	96	.39	10.0	0.085	2.2	4.63	MW	CG	N
1.225	31.12	72629S	1.50	38.1	1.055	26.8	16	2.9	.99	25	16	72	.39	10.0	0.085	2.2	4.63	SST	CG	N
1.225	31.12	72640	1.50	38.1	1.033	26.2	31	5.4	1.0	27	32	144	.46	11.6	0.096	2.4	4.75	MW	CG	N
1.225	31.12	72640S	1.50	38.1	1.033	26.2	26	4.6	.84	21	22	99	.46	11.6	0.096	2.4	4.75	SST	CG	N
1.225	31.12	72654	1.50	38.1	1.015	25.8	43	7.4	.99	25	42	187	.51	13.0	0.105	2.7	4.88	MW	CG	N
1.225	31.12	72654S	1.50	38.1	1.015	25.8	36	6.3	.80	20	29	129	.51	13.0	0.105	2.7	4.88	SST	CG	N
1.225	31.12	72667	1.50	38.1	1.001	25.4	54	9.4	.94	24	50	224	.56	14.2	0.112	2.8	5.00	MW	CG	N
1.225	31.12	72667S	1.50	38.1	1.001	25.4	46	8.0	.73	19	33	148	.56	14.2	0.112	2.8	5.00	SST	CG	N
1.225	31.12	72682	1.50	38.1	.975	24.8	81	14	.84	21	68	302	.66	16.7	0.125	3.2	5.25	MW	CG	N
1.225	31.12	72682S	1.50	38.1	.975	24.8	69	12	.67	17	46	205	.66	16.7	0.125	3.2	5.25	SST	CG	N
1.225	31.12	72696	1.50	38.1	.955	24.3	116	20	.74	19	86	383	.69	17.6	0.135	3.4	5.13	MW	CG	N
1.225	31.12	72696S	1.50	38.1	.955	24.3	98	17	.56	14	55	246	.69	17.6	0.135	3.4	5.13	SST	CG	N
1.225	31.12	72711	1.50	38.1	.929	23.6	158	28	.69	17	108	481	.81	20.7	0.148	3.8	5.50	MW	CG	N
1.225	31.12	72711S	1.50	38.1	.929	23.6	134	23	.54	14	73	322	.81	20.7	0.148	3.8	5.50	SST	CG	N
1.225	31.12	72730	1.50	38.1	.901	22.9	238	42	.60	15	143	637	.89	22.6	0.162	4.1	5.50	MW	CG	N
1.225	31.12	72730S	1.50	38.1	.901	22.9	203	35	.45	11	91	404	.89	22.6	0.162	4.1	5.50	SST	CG	N
1.225	31.12	72743	1.50	38.1	.871	22.1	353	62	.52	13	185	824	.97	24.7	0.177	4.5	5.50	MW	CG	N
1.225	31.12	72743S	1.50	38.1	.871	22.1	300	53	.39	9.9	118	523	.97	24.7	0.177	4.5	5.50	SST	CG	N
1.225	31.12	72751	1.50	38.1	.841	21.4	516	90	.44	11	226	1005	1.03	26.2	0.192	4.9	5.38	MW	CG	N
1.225	31.12	72751S	1.50	38.1	.841	21.4	439	77	.31	8.0	138	613	1.03	26.2	0.192	4.9	5.38	SST	CG	N
1.225	31.12	72641	1.75	44.5	1.033	26.2	26	4.6	1.2	32	33	145	.50	12.8	0.096	2.4	5.25	MW	CG	N
1.225	31.12	72641S	1.75	44.5	1.033	26.2	22	3.9	1.0	25	22	99	.50	12.8	0.096	2.4	5.25	SST	CG	N
1.225	31.12	72656	1.75	44.5	1.015	25.8	37	6.5	1.2	30	44	194	.56	14.3	0.105	2.7	5.38	MW	CG	N
1.225	31.12	72656S	1.75	44.5	1.015	25.8	31	5.5	.92	23	29	129	.56	14.3	0.105	2.7	5.38	SST	CG	N
1.225	31.12	72669	1.75	44.5	1.001	25.4	51	8.9	1.0	25	51	227	.59	14.9	0.112	2.8	5.25	MW	CG	N
1.225	31.12	72669S	1.75	44.5	1.001	25.4	43	7.6	.77	19	33	148	.59	14.9	0.112	2.8	5.25	SST	CG	N
1.225	31.12	72683	1.75	44.5	.975	24.8	67	12	1.0	26	68	304	.73	18.7	0.125	3.2	5.88	MW	CG	N
1.225	31.12	72683S	1.75	44.5	.975	24.8	57	10	.81	20	46	205	.73	18.7	0.125	3.2	5.88	SST	CG	N
1.225	31.12	72698	1.75	44.5	.955	24.3	92	16	.93	24	86	383	.81	20.6	0.135	3.4	6.00	MW	CG	N
1.225	31.12	72698S	1.75	44.5	.955	24.3	78	14	.71	18	55	246	.81	20.6	0.135	3.4	6.00	SST	CG	N
1.225	31.12	72713	1.75	44.5	.929	23.6	134	23	.84	21	113	501	.91	23.0	0.148	3.8	6.13	MW	CG	N
1.225	31.12	72713S	1.75	44.5	.929	23.6	114	20	.64	16	73	322	.91	23.0	0.148	3.8	6.13	SST	CG	N
1.225	31.12	72630	2.00	50.8	1.055	26.8	14	2.5	1.5	39	21	95	.48	12.1	0.085	2.2	5.63	MW	CG	N
1.225	31.12	72630S	2.00	50.8	1.055	26.8	12	2.1	1.4	34	16	72	.48	12.1	0.085	2.2	5.63	SST	CG	N
1.225	31.12	72642	2.00	50.8	1.033	26.2	23	3.9	1.4	37	33	145	.55	14.0	0.096	2.4	5.75	MW	CG	N
1.225	31.12	72642S	2.00	50.8	1.033	26.2	19	3.3	1.2	29	22	99	.55	14.0	0.096	2.4	5.75	SST	CG	N
1.225	31.12	72657	2.00	50.8	1.015	25.8	31	5.4	1.4	35	42	187	.63	16.0	0.105	2.7	6.00	MW	CG	N
1.225	31.12	72657S	2.00	50.8	1.015	25.8	26	4.6	1.1	28	29	129	.63	16.0	0.105	2.7	6.00	SST	CG	N
1.225	31.12	72670	2.00	50.8	1.001	25.4	39	6.7	1.3	33	50	223	.70	17.8	0.112	2.8	6.25	MW	CG	N
1.225	31.12	72670S	2.00	50.8	1.001	25.4	33	5.7	1.0	26	33	148	.70	17.8	0.112	2.8	6.25	SST	CG	N
1.225	31.12	72684	2.00	50.8	.975	24.8	58	10	1.2	30	68	300	.83	21.0	0.125	3.2	6.63	MW	CG	N
1.225	31.12	72684S	2.00	50.8	.975	24.8	49	8.6	.94	24	46	205	.83	21.0	0.125	3.2	6.63	SST	CG	N
1.225	31.12	72699	2.00	50.8	.955	24.3	82	14	1.0	27	86	383	.88	22.3	0.135	3.4	6.50	MW	CG	N
1.225	31.12	72699S	2.00	50.8	.955	24.3	70	12	.79	20	55	246	.88	22.3	0.135	3.4	6.50	SST	CG	N
1.225	31.12	72714	2.00	50.8	.929	23.6	111	20	.96	24	107	478	1.04	26.3	0.148	3.8	7.00	MW	CG	N
1.225	31.12	72714S	2.00	50.8	.929	23.6	95	17	.77	19	73	322	1.04	26.3	0.148	3.8	7.00	SST	CG	N
1.225	31.12	72731	2.00	50.8	.901	22.9	167	29	.86	22	143	637	1.11	28.3	0.162	4.1	6.88	MW	CG	N
1.225	31.12	72731S	2.00	50.8	.901	22.9	142	25	.64	16	91	404	1.11	28.3	0.162	4.1	6.88	SST	CG	N
1.225	31.12	72744	2.00	50.8	.871	22.1	246	43	.75	19	185	824	1.24	31.5	0.177	4.5	7.00	MW	CG	N
1.225	31.12	72744S	2.00	50.8	.871	22.1	209	37	.56	14	118	523	1.24	31.5	0.177	4.5	7.00	SST	CG	N
1.225	31.12	72752	2.00	50.8	.841	21.4	356	62	.63	16	226	1005	1.34	34.1	0.192	4.9	7.00	MW	CG	N
1.225	31.12	72752S	2.00	50.8	.841	21.4	303	53	.45	12	138	613	1.34	34.1	0.192	4.9	7.00	SST	CG	N
1.225	31.12	72759	2.00	50.8	.811	20.6	505	88	.55	14	278	1237	1.45	36.8	0.207	5.3	7.00	MW	CG	N
1.225	31.12	72759S	2.00	50.8	.811	20.6	429	75	.40	10	171	761	1.45	36.8	0.207	5.3	7.00	SST	CG	N
1.225	31.12	72643	2.25	57.2	1.033	26.2	20	3.5	1.7	42	33	145	.60	15.2	0.096	2.4	6.25	MW	CG	N
1.225	31.12	72643S	2.25	57.2	1.033	26.2	17	2.9	1.3	33	22	99	.60	15.2	0.096	2.4	6.25	SST	CG	N
1.225	31.12	72685	2.25	57.2	.975	24.8	50	8.8	1.3	34	68	301	.91	23.0	0.125	3.2	7.25	MW	CG	N
1.225	31.12	72685S	2.25	57.2	.975	24.8	43	7.5	1.1	27	46	205	.91	23.0	0.125	3.2	7.25	SST	CG	N
1.225	31.12	72721	2.25	57.2	.913	23.2	130	23	.99	25	128	571	1.15	29.2	0.156	4.0	7.38	MW	CG	N
1.225	31.12	72721S	2.25	57.2	.913	23.2	111	19	.74	19	81	362	1.15	29.2	0.156	4.0	7.38	SST	CG	N
1.225	31.12	72732	2.25	57.2	.901	22.9	151	26	.95	24	143	637	1.22	30.9	0.162	4.1	7.50	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.225	31.12	72732S	2.25	57.2	.901	22.9	128	22	.71	18	91	404	1.22	30.9	0.162	4.1	7.50	SST	CG	N
1.225	31.12	72631	2.50	63.5	1.055	26.8	11	1.9	1.9	49	21	96	.56	14.3	0.085	2.2	6.63	MW	CG	N
1.225	31.12	72631S	2.50	63.5	1.055	26.8	9.4	1.7	1.7	44	16	72	.56	14.3	0.085	2.2	6.63	SST	CG	N
1.225	31.12	72644	2.50	63.5	1.033	26.2	18	3.1	1.8	47	32	144	.66	16.8	0.096	2.4	6.88	MW	CG	N
1.225	31.12	72644S	2.50	63.5	1.033	26.2	15	2.6	1.5	38	22	99	.66	16.8	0.096	2.4	6.88	SST	CG	N
1.225	31.12	72658	2.50	63.5	1.015	25.8	24	4.2	1.8	44	42	187	.75	19.0	0.105	2.7	7.13	MW	CG	N
1.225	31.12	72658S	2.50	63.5	1.015	25.8	20	3.6	1.4	36	29	129	.75	19.0	0.105	2.7	7.13	SST	CG	N
1.225	31.12	72671	2.50	63.5	1.001	25.4	30	5.3	1.7	42	50	222	.84	21.3	0.112	2.8	7.50	MW	CG	N
1.225	31.12	72671S	2.50	63.5	1.001	25.4	26	4.5	1.3	33	33	148	.84	21.3	0.112	2.8	7.50	SST	CG	N
1.225	31.12	72686	2.50	63.5	.975	24.8	45	7.8	1.5	38	68	302	.98	25.0	0.125	3.2	7.88	MW	CG	N
1.225	31.12	72686S	2.50	63.5	.975	24.8	38	6.7	1.2	31	46	205	.98	25.0	0.125	3.2	7.88	SST	CG	N
1.225	31.12	72700	2.50	63.5	.955	24.3	64	11	1.3	34	86	383	1.05	26.6	0.135	3.4	7.75	MW	CG	N
1.225	31.12	72700S	2.50	63.5	.955	24.3	54	9.5	1.0	26	55	246	1.05	26.6	0.135	3.4	7.75	SST	CG	N
1.225	31.12	72715	2.50	63.5	.929	23.6	86	15	1.3	32	109	483	1.24	31.5	0.148	3.8	8.38	MW	CG	N
1.225	31.12	72715S	2.50	63.5	.929	23.6	73	13	.99	25	73	322	1.24	31.5	0.148	3.8	8.38	SST	CG	N
1.225	31.12	72722	2.50	63.5	.913	23.2	113	20	1.1	29	128	571	1.27	32.2	0.156	4.0	8.13	MW	CG	N
1.225	31.12	72722S	2.50	63.5	.913	23.2	96	17	.85	22	81	362	1.27	32.2	0.156	4.0	8.13	SST	CG	N
1.225	31.12	72733	2.50	63.5	.901	22.9	131	23	1.1	28	143	637	1.34	33.9	0.162	4.1	8.25	MW	CG	N
1.225	31.12	72733S	2.50	63.5	.901	22.9	111	19	.82	21	91	404	1.34	33.9	0.162	4.1	8.25	SST	CG	N
1.225	31.12	72745	2.50	63.5	.871	22.1	189	33	.98	25	185	824	1.50	38.2	0.177	4.5	8.50	MW	CG	N
1.225	31.12	72745S	2.50	63.5	.871	22.1	160	28	.73	19	118	523	1.50	38.2	0.177	4.5	8.50	SST	CG	N
1.225	31.12	72753	2.50	63.5	.841	21.4	272	48	.83	21	226	1005	1.63	41.5	0.192	4.9	8.50	MW	CG	N
1.225	31.12	72753S	2.50	63.5	.841	21.4	231	41	.60	15	138	613	1.63	41.5	0.192	4.9	8.50	SST	CG	N
1.225	31.12	72760	2.50	63.5	.811	20.6	384	67	.73	19	281	1248	1.76	44.7	0.207	5.3	8.50	MW	CG	N
1.225	31.12	72760S	2.50	63.5	.811	20.6	326	57	.52	13	171	761	1.76	44.7	0.207	5.3	8.50	SST	CG	N
1.225	31.12	72645	2.75	69.9	1.033	26.2	16	2.8	2.0	52	32	144	.71	18.0	0.096	2.4	7.38	MW	CG	N
1.225	31.12	72645S	2.75	69.9	1.033	26.2	14	2.4	1.6	42	22	99	.71	18.0	0.096	2.4	7.38	SST	CG	N
1.225	31.12	72687	2.75	69.9	.975	24.8	40	7.1	1.7	43	68	302	1.06	27.0	0.125	3.2	8.50	MW	CG	N
1.225	31.12	72687S	2.75	69.9	.975	24.8	34	6.0	1.3	34	46	205	1.06	27.0	0.125	3.2	8.50	SST	CG	N
1.225	31.12	72632	3.00	76.2	1.055	26.8	9.1	1.6	2.4	60	21	95	.65	16.5	0.085	2.2	7.63	MW	CG	N
1.225	31.12	72632S	3.00	76.2	1.055	26.8	7.7	1.4	2.1	53	16	72	.65	16.5	0.085	2.2	7.63	SST	CG	N
1.225	31.12	72646	3.00	76.2	1.033	26.2	15	2.5	2.2	57	33	145	.76	19.2	0.096	2.4	7.88	MW	CG	N
1.225	31.12	72646S	3.00	76.2	1.033	26.2	12	2.2	1.8	46	22	99	.76	19.2	0.096	2.4	7.88	SST	CG	N
1.225	31.12	72659	3.00	76.2	1.015	25.8	20	3.4	2.1	54	42	186	.88	22.3	0.105	2.7	8.38	MW	CG	N
1.225	31.12	72659S	3.00	76.2	1.015	25.8	17	2.9	1.7	44	29	129	.88	22.3	0.105	2.7	8.38	SST	CG	N
1.225	31.12	72672	3.00	76.2	1.001	25.4	25	4.3	2.0	52	50	223	.97	24.5	0.112	2.8	8.63	MW	CG	N
1.225	31.12	72672S	3.00	76.2	1.001	25.4	21	3.7	1.6	40	33	148	.97	24.5	0.112	2.8	8.63	SST	CG	N
1.225	31.12	72688	3.00	76.2	.975	24.8	37	6.4	1.9	47	68	304	1.14	29.0	0.125	3.2	9.13	MW	CG	N
1.225	31.12	72688S	3.00	76.2	.975	24.8	31	5.5	1.5	37	46	205	1.14	29.0	0.125	3.2	9.13	SST	CG	N
1.225	31.12	72701	3.00	76.2	.955	24.3	52	9.1	1.6	42	86	383	1.23	31.3	0.135	3.4	9.13	MW	CG	N
1.225	31.12	72701S	3.00	76.2	.955	24.3	44	7.8	1.2	32	55	246	1.23	31.3	0.135	3.4	9.13	SST	CG	N
1.225	31.12	72716	3.00	76.2	.929	23.6	70	12	1.5	39	108	480	1.46	37.1	0.148	3.8	9.88	MW	CG	N
1.225	31.12	72716S	3.00	76.2	.929	23.6	60	10	1.2	31	73	322	1.46	37.1	0.148	3.8	9.88	SST	CG	N
1.225	31.12	72723	3.00	76.2	.913	23.2	93	16	1.4	35	128	571	1.48	37.6	0.156	4.0	9.50	MW	CG	N
1.225	31.12	72723S	3.00	76.2	.913	23.2	79	14	1.0	26	81	362	1.48	37.6	0.156	4.0	9.50	SST	CG	N
1.225	31.12	72734	3.00	76.2	.901	22.9	107	19	1.3	34	143	637	1.56	39.6	0.162	4.1	9.63	MW	CG	N
1.225	31.12	72734S	3.00	76.2	.901	22.9	91	16	1.0	25	91	404	1.56	39.6	0.162	4.1	9.63	SST	CG	N
1.225	31.12	72746	3.00	76.2	.871	22.1	153	27	1.2	31	185	824	1.77	45.0	0.177	4.5	10.0	MW	CG	N
1.225	31.12	72746S	3.00	76.2	.871	22.1	130	23	.90	23	118	523	1.77	45.0	0.177	4.5	10.0	SST	CG	N
1.225	31.12	72754	3.00	76.2	.841	21.4	220	39	1.0	26	226	1005	1.92	48.8	0.192	4.9	10.0	MW	CG	N
1.225	31.12	72754S	3.00	76.2	.841	21.4	187	33	.74	19	138	613	1.92	48.8	0.192	4.9	10.0	SST	CG	N
1.225	31.12	72761	3.00	76.2	.811	20.6	310	54	.90	23	280	1245	2.10	53.2	0.207	5.3	10.1	MW	CG	N
1.225	31.12	72761S	3.00	76.2	.811	20.6	263	46	.65	17	171	761	2.10	53.2	0.207	5.3	10.1	SST	CG	N
1.225	31.12	72633	3.50	88.9	1.055	26.8	7.8	1.4	2.8	71	22	96	.72	18.4	0.085	2.2	8.50	MW	CG	N
1.225	31.12	72633S	3.50	88.9	1.055	26.8	6.6	1.2	2.5	62	16	72	.72	18.4	0.085	2.2	8.50	SST	CG	N
1.225	31.12	72647	3.50	88.9	1.033	26.2	12	2.2	2.6	67	33	145	.85	21.6	0.096	2.4	8.88	MW	CG	N
1.225	31.12	72647S	3.50	88.9	1.033	26.2	10	1.8	2.1	54	22	99	.85	21.6	0.096	2.4	8.88	SST	CG	N
1.225	31.12	72660	3.50	88.9	1.015	25.8	17	2.9	2.5	64	42	186	1.00	25.3	0.105	2.7	9.50	MW	CG	N
1.225	31.12	72660S	3.50	88.9	1.015	25.8	14	2.5	2.0	52	29	129	1.00	25.3	0.105	2.7	9.50	SST	CG	N
1.225	31.12	72673	3.50	88.9	1.001	25.4	21	3.7	2.4	61	50	223	1.11	28.1	0.112	2.8	9.88	MW	CG	N
1.225	31.12	72673S	3.50	88.9	1.001	25.4	18	3.1	1.9	48	33	148	1.11	28.1	0.112	2.8	9.88	SST	CG	N
1.225	31.12	72689	3.50	88.9	.975	24.8	31	5.4	2.2	56	68	302	1.31	33.3	0.125	3.2	10.5	MW	CG	N
1.225	31.12	72689S	3.50	88.9	.975	24.8	26	4.6	1.7	44	46	205	1.31	33.3	0.125	3.2	10.5	SST	CG	N
1.225	31.12	72702	3.50	88.9	.955	24.3	44	7.7	2.0	50	86	383	1.40	35.6	0.135	3.4	10.4	MW	CG	N
1.225	31.12	72702S	3.50	88.9	.955	24.3	37	6.6	1.5	38	55	246	1.40	35.6	0.135	3.4	10.4	SST	CG	N
1.225	31.12	72717	3.50	88.9	.929	23.6	59	10	1.8	46	108	478	1.68	42.8	0.148	3.8	11.4	MW	CG	N
1.225	31.12	72717S	3.50	88.9	.929	23.6	50	8.8	1.4	37	73	322	1.68	42.8	0.148	3.8	11.4	SST	CG	N
1.225	31.12	72724	3.50	88.9	.913	23.2	78	14	1.6	42	128	571	1.70	43.1	0.156	4.0	10.9	MW	CG	N
1.225	31.12	72724S	3.50	88.9	.913	23.2	66	12	1.2	31	81	362	1.70	43.1	0.156	4.0	10.9	SST	CG	N
1.225	31.12	72735	3.50	88.9	.901	22.9	90	16	1.6	41	143	637	1.82	46.3	0.162	4.1	11.3	MW	CG	N
1.225	31.12	72735S	3.50	88.9	.901	22.9	76	13	1.2	30	91	404	1.82	46.3	0.162	4.1	11.3	SST	CG	N
1.225	31.12	72747	3.50	88.9	.871	22.1	129	23	1.4	37	185	824	2.04	51.7	0.177	4.5	11.5	MW	CG	N
1.225	31.12	72747S	3.50	88.9	.871	22.1	109	19	1.1	27	118	523	2.04	51.7	0.177	4.5	11.5	SST	CG	N
1.225	31.12	72755	3.50	88.9	.841	21.4	185	32	1.2	31	226	1005	2.23	56.7	0.192	4.9	11.6	MW	CG	N
1.225	31.12	72755S	3.50	88.9	.841	21.4	157	28	.88	22	138	613	2.23	56.7	0.192	4.9	11.6	SST	CG	N
1.225	31.12	72762	3.50	88.9	.811	20.6	259	45	1.1	27	281	1248	2.41	61.1	0.207	5.3	11.6	MW	CG	N
1.225	31.12	72762S	3.50	88.9	.811	20.6	220	39	.78	20	171	761	2.41	61.1	0.207	5.3	11.6	SST	CG	N
1.225	31.12	72725	3.75	95.3	.913	23.2	72	13	1.8	45	128	571	1.81	46.1	0.156	4.0	11.6	MW	CG	N
1.225	31.12	72725S	3.75	95.3	.913	23.2	61	11	1.3	34	81	362	1.81	46.1	0.156	4.0	11.6	SST	CG	N
1.225	31.12	72736	3.75	95.3	.901	22.9	85	15	1.7	43	143	637	1.90	48.3	0.162	4.1	11.8	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com


O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.225	31.12	72736S	3.75	95.3	.901	22.9	72	13	1.3	32	91	404	1.90	48.3	0.162	4.1	11.8	SST	CG	N
1.225	31.12	72634	4.00	101.6	1.055	26.8	6.7	1.2	3.2	81	21	95	.81	20.5	0.085	2.2	9.50	MW	CG	N
1.225	31.12	72634S	4.00	101.6	1.055	26.8	5.7	1.0	2.9	73	16	72	.81	20.5	0.085	2.2	9.50	SST	CG	N
1.225	31.12	72648	4.00	101.6	1.033	26.2	11	1.9	3.1	78	33	145	.95	24.1	0.096	2.4	9.88	MW	CG	N
1.225	31.12	72648S	4.00	101.6	1.033	26.2	9.1	1.6	2.4	62	22	99	.95	24.1	0.096	2.4	9.88	SST	CG	N
1.225	31.12	72661	4.00	101.6	1.015	25.8	15	2.5	2.9	73	42	186	1.12	28.3	0.105	2.7	10.6	MW	CG	N
1.225	31.12	72661S	4.00	101.6	1.015	25.8	12	2.2	2.3	60	29	129	1.12	28.3	0.105	2.7	10.6	SST	CG	N
1.225	31.12	72674	4.00	101.6	1.001	25.4	18	3.2	2.8	70	50	222	1.25	31.6	0.112	2.8	11.1	MW	CG	N
1.225	31.12	72674S	4.00	101.6	1.001	25.4	15	2.7	2.2	55	33	148	1.25	31.6	0.112	2.8	11.1	SST	CG	N
1.225	31.12	72690	4.00	101.6	.975	24.8	27	4.7	2.5	64	68	303	1.47	37.3	0.125	3.2	11.8	MW	CG	N
1.225	31.12	72690S	4.00	101.6	.975	24.8	23	4.0	2.0	51	46	205	1.47	37.3	0.125	3.2	11.8	SST	CG	N
1.225	31.12	72703	4.00	101.6	.955	24.3	41	7.1	2.1	54	86	383	1.50	38.1	0.135	3.4	11.1	MW	CG	N
1.225	31.12	72703S	4.00	101.6	.955	24.3	34	6.0	1.6	41	55	246	1.50	38.1	0.135	3.4	11.1	SST	CG	N
1.225	31.12	72718	4.00	101.6	.929	23.6	51	9.0	2.1	54	108	481	1.89	47.9	0.148	3.8	12.8	MW	CG	N
1.225	31.12	72718S	4.00	101.6	.929	23.6	44	7.6	1.7	42	73	322	1.89	47.9	0.148	3.8	12.8	SST	CG	N
1.225	31.12	72726	4.00	101.6	.913	23.2	68	12	1.9	48	128	571	1.91	48.5	0.156	4.0	12.3	MW	CG	N
1.225	31.12	72726S	4.00	101.6	.913	23.2	58	10	1.4	36	81	362	1.91	48.5	0.156	4.0	12.3	SST	CG	N
1.225	31.12	72737	4.00	101.6	.901	22.9	78	14	1.8	47	143	637	2.05	51.9	0.162	4.1	12.6	MW	CG	N
1.225	31.12	72737S	4.00	101.6	.901	22.9	66	12	1.4	35	91	404	2.05	51.9	0.162	4.1	12.6	SST	CG	N
1.225	31.12	72748	4.00	101.6	.871	22.1	111	19	1.7	42	185	824	2.30	58.4	0.177	4.5	13.0	MW	CG	N
1.225	31.12	72748S	4.00	101.6	.871	22.1	94	17	1.2	32	118	523	2.30	58.4	0.177	4.5	13.0	SST	CG	N
1.225	31.12	72756	4.00	101.6	.841	21.4	159	28	1.4	36	226	1005	2.52	64.0	0.192	4.9	13.1	MW	CG	N
1.225	31.12	72756S	4.00	101.6	.841	21.4	135	24	1.0	26	138	613	2.52	64.0	0.192	4.9	13.1	SST	CG	N
1.225	31.12	72763	4.00	101.6	.811	20.6	223	39	1.3	32	281	1248	2.74	69.7	0.207	5.3	13.3	MW	CG	N
1.225	31.12	72763S	4.00	101.6	.811	20.6	190	33	.90	23	171	761	2.74	69.7	0.207	5.3	13.3	SST	CG	N
1.225	31.12	72635	4.50	114.3	1.055	26.8	6.0	1.1	3.6	92	22	96	.89	22.7	0.085	2.2	10.5	MW	CG	N
1.225	31.12	72635S	4.50	114.3	1.055	26.8	5.1	.89	3.2	81	16	72	.89	22.7	0.085	2.2	10.5	SST	CG	N
1.225	31.12	72649	4.50	114.3	1.033	26.2	9.5	1.7	3.5	88	33	146	1.04	26.5	0.096	2.4	10.9	MW	CG	N
1.225	31.12	72649S	4.50	114.3	1.033	26.2	8.1	1.4	2.7	70	22	99	1.04	26.5	0.096	2.4	10.9	SST	CG	N
1.225	31.12	72662	4.50	114.3	1.015	25.8	13	2.2	3.3	83	42	186	1.23	31.3	0.105	2.7	11.8	MW	CG	N
1.225	31.12	72662S	4.50	114.3	1.015	25.8	11	1.9	2.7	67	29	129	1.23	31.3	0.105	2.7	11.8	SST	CG	N
1.225	31.12	72676	4.50	114.3	1.001	25.4	18	3.2	2.8	71	51	227	1.23	31.3	0.112	2.8	11.0	MW	CG	N
1.225	31.12	72676S	4.50	114.3	1.001	25.4	15	2.7	2.2	55	33	148	1.23	31.3	0.112	2.8	11.0	SST	CG	N
1.225	31.12	72691	4.50	114.3	.975	24.8	24	4.2	2.9	73	68	301	1.64	41.7	0.125	3.2	13.1	MW	CG	N
1.225	31.12	72691S	4.50	114.3	.975	24.8	20	3.5	2.3	58	46	205	1.64	41.7	0.125	3.2	13.1	SST	CG	N
1.225	31.12	72705	4.50	114.3	.955	24.3	32	5.7	2.7	68	86	383	1.81	45.9	0.135	3.4	13.4	MW	CG	N
1.225	31.12	72705S	4.50	114.3	.955	24.3	27	4.8	2.0	51	55	246	1.81	45.9	0.135	3.4	13.4	SST	CG	N
1.225	31.12	72719	4.50	114.3	.929	23.6	45	7.9	2.4	61	108	480	2.11	53.6	0.148	3.8	14.3	MW	CG	N
1.225	31.12	72719S	4.50	114.3	.929	23.6	38	6.7	1.9	48	73	322	2.11	53.6	0.148	3.8	14.3	SST	CG	N
1.225	31.12	72727	4.50	114.3	.913	23.2	60	11	2.1	54	128	571	2.13	54.0	0.156	4.0	13.6	MW	CG	N
1.225	31.12	72727S	4.50	114.3	.913	23.2	51	8.9	1.6	41	81	362	2.13	54.0	0.156	4.0	13.6	SST	CG	N
1.225	31.12	72738	4.50	114.3	.901	22.9	69	12	2.1	53	143	637	2.27	57.6	0.162	4.1	14.0	MW	CG	N
1.225	31.12	72738S	4.50	114.3	.901	22.9	58	10	1.6	40	91	404	2.27	57.6	0.162	4.1	14.0	SST	CG	N
1.225	31.12	72749	4.50	114.3	.871	22.1	98	17	1.9	48	185	824	2.57	65.2	0.177	4.5	14.5	MW	CG	N
1.225	31.12	72749S	4.50	114.3	.871	22.1	83	15	1.4	36	118	523	2.57	65.2	0.177	4.5	14.5	SST	CG	N
1.225	31.12	72757	4.50	114.3	.841	21.4	140	24	1.6	41	226	1005	2.81	71.3	0.192	4.9	14.6	MW	CG	N
1.225	31.12	72757S	4.50	114.3	.841	21.4	119	21	1.2	29	138	613	2.81	71.3	0.192	4.9	14.6	SST	CG	N
1.225	31.12	72764	4.50	114.3	.811	20.6	196	34	1.4	36	281	1248	3.05	77.6	0.207	5.3	14.8	MW	CG	N
1.225	31.12	72764S	4.50	114.3	.811	20.6	167	29	1.0	26	171	761	3.05	77.6	0.207	5.3	14.8	SST	CG	N
1.225	31.12	72636	5.00	127.0	1.055	26.8	5.3	.93	4.0	102	21	95	.98	24.8	0.085	2.2	11.5	MW	CG	N
1.225	31.12	72636S	5.00	127.0	1.055	26.8	4.5	.79	3.6	92	16	72	.98	24.8	0.085	2.2	11.5	SST	CG	N
1.225	31.12	72650	5.00	127.0	1.033	26.2	8.5	1.5	3.8	98	33	145	1.15	29.3	0.096	2.4	12.0	MW	CG	N
1.225	31.12	72650S	5.00	127.0	1.033	26.2	7.2	1.3	3.1	78	22	99	1.15	29.3	0.096	2.4	12.0	SST	CG	N
1.225	31.12	72663	5.00	127.0	1.015	25.8	12	2.0	3.6	93	42	187	1.35	34.3	0.105	2.7	12.9	MW	CG	N
1.225	31.12	72663S	5.00	127.0	1.015	25.8	9.8	1.7	3.0	75	29	129	1.35	34.3	0.105	2.7	12.9	SST	CG	N
1.225	31.12	72678	5.00	127.0	1.001	25.4	16	2.9	3.1	79	51	227	1.36	34.5	0.112	2.8	12.1	MW	CG	N
1.225	31.12	72678S	5.00	127.0	1.001	25.4	14	2.4	2.4	61	33	148	1.36	34.5	0.112	2.8	12.1	SST	CG	N
1.225	31.12	72692	5.00	127.0	.975	24.8	21	3.7	3.2	81	68	301	1.81	46.0	0.125	3.2	14.5	MW	CG	N
1.225	31.12	72692S	5.00	127.0	.975	24.8	18	3.2	2.6	65	46	205	1.81	46.0	0.125	3.2	14.5	SST	CG	N
1.225	31.12	72707	5.00	127.0	.955	24.3	29	5.1	3.0	76	86	383	1.99	50.6	0.135	3.4	14.8	MW	CG	N
1.225	31.12	72707S	5.00	127.0	.955	24.3	25	4.3	2.3	57	55	246	1.99	50.6	0.135	3.4	14.8	SST	CG	N
1.225	31.12	72720	5.00	127.0	.929	23.6	40	7.1	2.7	68	108	478	2.33	59.2	0.148	3.8	15.8	MW	CG	N
1.225	31.12	72720S	5.00	127.0	.929	23.6	34	6.0	2.1	54	73	322	2.33	59.2	0.148	3.8	15.8	SST	CG	N
1.225	31.12	72728	5.00	127.0	.913	23.2	53	9.3	2.4	61	128	571	2.36	59.9	0.156	4.0	15.1	MW	CG	N
1.225	31.12	72728S	5.00	127.0	.913	23.2	45	7.9	1.8	46	81	362	2.36	59.9	0.156	4.0	15.1	SST	CG	N
1.225	31.12	72739	5.00	127.0	.901	22.9	61	11	2.3	59	143	637	2.49	63.3	0.162	4.1	15.4	MW	CG	N
1.225	31.12	72739S	5.00	127.0	.901	22.9	52	9.1	1.7	44	91	404	2.49	63.3	0.162	4.1	15.4	SST	CG	N
1.225	31.12	72750	5.00	127.0	.871	22.1	87	15	2.1	54	185	824	2.85	72.5	0.177	4.5	16.1	MW	CG	N
1.225	31.12	72750S	5.00	127.0	.871	22.1	74	13	1.6	40	118	523	2.85	72.5	0.177	4.5	16.1	SST	CG	N
1.225	31.12	72758	5.00	127.0	.841	21.4	125	22	1.8	46	226	1005	3.12	79.2	0.192	4.9	16.3	MW	CG	N
1.225	31.12	72758S	5.00	127.0	.841	21.4	106	19	1.3	33	138	613	3.12	79.2	0.192	4.9	16.3	SST	CG	N
1.225	31.12	72765	5.00	127.0	.811	20.6	175	31	1.6	41	281	1248	3.39	86.1	0.207	5.3	16.4	MW	CG	N
1.225	31.12	72765S	5.00	127.0	.811	20.6	148	26	1.2	29	171	761	3.39	86.1	0.207	5.3	16.4	SST	CG	N
1.225	31.12	72740	5.25	133.4	.901	22.9	60	11	2.4	61	143	637	2.55	64.8	0.162	4.1	15.8	MW	CG	N
1.225	31.12	72740S	5.25	133.4	.901	22.9	51	8.9	1.8	45	91	404	2.55	64.8	0.162	4.1	15.8	SST	CG	N
1.225	31.12	72741	5.50	139.7	.901	22.9	56	9.8	2.6	65	143	637	2.71	68.9	0.162	4.1	16.8	MW	CG	N
1.225	31.12	72741S	5.50	139.7	.901	22.9	48	8.3	1.9	48	91	404	2.71	68.9	0.162	4.1	16.8	SST	CG	N
1.225	31.12	72742	6.00	152.4	.901	22.9	51	8.9	2.8	71	143	637	2.94	74.6	0.162	4.1	18.1	MW	CG	N
1.225	31.12	72742S	6.00	152.4	.901	22.9	43	7.6	2.1	53	91	404	2.94	74.6	0.162	4.1	18.1	SST	CG	N
1.234	31.34	11740	.69	17.4	1.030	26.2	107	19	.26	6.7	28	126	.31	7.8	0.102	2.6	3.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
1.234	31.34	II-92	.78	19.8	1.074	27.3	38	6.7	.38	9.5	14	64	.24	6.1	0.080	2.0	3.00	SPR	CG	N
1.234	31.34	3237	.84	21.4	1.082	27.5	31	5.4	.40	10	12	55	.23	5.8	0.076	1.9	3.00	SPR	CG	Z
1.234	31.34	3045	.88	22.2	1.110	28.2	7.0	1.2	.63	16	4.5	20	.24	6.1	0.062	1.6	4.00	SPR	CG	Z
1.234	31.34	1805	.88	22.2	1.080	27.4	33	5.7	.55	14	18	80	.23	5.9	0.077	2.0	3.00	MW	CG	Z
1.234	31.34	EE-77	.94	23.8	.954	24.2	281	49	.24	6.1	68	302	.49	12.4	0.140	3.6	3.50	SPR	CG	Z
1.234	31.34	12495	1.03	26.2	1.040	26.4	58	10	.42	11	24	109	.34	8.6	0.097	2.5	3.50	SPR	CG	Z
1.234	31.34	12094	1.19	30.2	.984	25.0	103	18	.49	12	50	223	.56	14.3	0.125	3.2	4.50	SPR	CG	Z
1.234	31.34	11597	1.31	33.3	.994	25.2	54	9.4	.47	12	25	113	.84	21.3	0.120	3.0	6.00	SPR	CG	Z
1.234	31.34	10120	1.38	34.9	1.100	27.9	3.7	.64	.91	23	3.3	15	.47	11.9	0.067	1.7	7.00	SPR	CG	Z
1.234	31.34	10499	1.41	35.7	1.040	26.4	58	10	.42	11	24	109	.34	8.6	0.097	2.5	3.50	SPR	CG	Z
1.234	31.34	10913	1.44	36.5	1.122	28.5	1.6	.29	1.1	27	1.8	7.8	.37	9.5	0.056	1.4	6.67	SST	CG	N
1.234	31.34	3202	1.50	38.1	1.080	27.4	8.7	1.5	1.1	27	9.2	41	.44	11.2	0.077	2.0	5.75	SPR	CG	Z
1.234	31.34	3430	1.63	41.3	1.050	26.7	28	4.8	.76	19	21	93	.41	10.5	0.092	2.3	4.50	SPR	CG	Z
1.234	31.34	2663	1.63	41.3	.910	23.1	268	47	.38	9.6	102	452	.81	20.6	0.162	4.1	5.00	SPR	CG	Z
1.234	31.34	S-338	1.75	44.5	1.110	28.2	2.3	.40	1.3	33	3.0	13	.43	11.0	0.062	1.6	7.00	SST	CG	N
1.234	31.34	S-1677	1.75	44.5	1.026	26.1	26	4.5	1.1	27	28	124	.62	15.8	0.104	2.6	6.00	SST	CG	N
1.234	31.34	S-963	1.81	46.0	1.066	27.1	20	3.6	.76	19	16	69	.34	8.5	0.084	2.1	4.00	SST	CG	N
1.234	31.34	EE-88	2.00	50.8	.694	17.6	2132	373	.18	4.6	390	1734	1.62	41.1	0.270	6.9	6.00	SPR	CG	Z
1.234	31.34	12000	2.25	57.2	.848	21.5	272	48	.59	15	161	717	1.64	41.7	0.193	4.9	8.50	SPR	CG	Z
1.234	31.34	2641	2.34	59.5	1.024	26.0	24	4.3	1.5	38	36	162	.84	21.3	0.105	2.7	7.00	MW	C	Z
1.234	31.34	PP-44	2.69	68.2	1.134	28.8	.40	.07	1.9	47	.75	3.3	.83	21.0	0.050	1.3	15.5	SPR	C	Z
1.234	31.34	10578	2.75	69.9	1.024	26.0	20	3.5	1.5	39	31	138	.84	21.3	0.105	2.7	8.00	SPR	CG	Z
1.234	31.34	1759	2.78	70.6	1.064	27.0	11	2.0	1.5	39	17	77	.50	12.6	0.085	2.2	6.00	SPR	CG	Z
1.234	31.34	S-3061	3.13	79.4	1.062	27.0	10	1.8	1.7	42	17	74	.65	16.4	0.086	2.2	6.50	SST	C	N
1.234	31.34	11787	3.16	80.2	.852	21.6	211	37	.74	19	156	696	1.91	48.5	0.191	4.9	10.0	SPR	CG	Z
1.234	31.34	3465	3.50	88.9	.794	20.2	359	63	.63	16	226	1006	2.42	61.5	0.220	5.6	11.0	SPR	CG	Z
1.234	31.34	S-458	3.63	92.1	1.110	28.2	.96	.17	2.8	70	2.6	12	.87	22.0	0.062	1.6	14.0	SST	CG	N
1.234	31.34	2724	4.00	101.6	.994	25.2	21	3.7	2.1	54	44	198	1.59	40.4	0.120	3.0	12.3	HD	C	Z
1.234	31.34	2768	4.19	106.4	.964	24.5	36	6.3	1.7	43	61	272	1.62	41.1	0.135	3.4	12.0	SPR	CG	Z
1.234	31.34	397	5.44	138.1	.880	22.4	94	16	1.4	36	131	585	2.61	66.3	0.177	4.5	14.8	SPR	CG	Z
1.234	31.34	10341	6.00	152.4	.820	20.8	174	30	1.1	29	197	878	3.31	84.1	0.207	5.3	16.0	SPR	CG	Z
1.250	31.75	BB-44	.50	12.7	1.176	29.9	1.3	.23	.35	8.9	.46	2.1	.15	3.8	0.037	0.9	3.00	SST	C	N
1.250	31.75	10830	.50	12.7	1.070	27.2	54	9.4	.23	5.8	12	55	.27	6.9	0.090	2.3	3.00	SST	CG	N
1.250	31.75	2891	.63	15.9	1.126	28.6	5.3	.93	.35	9.0	1.9	8.4	.27	6.9	0.062	1.6	4.33	SPR	CG	Z
1.250	31.75	10971	.75	19.1	1.060	26.9	67	12	.31	7.9	21	94	.29	7.2	0.095	2.4	3.00	SST	CG	N
1.250	31.75	12207	.75	19.1	1.050	26.7	47	8.3	.35	8.9	17	74	.40	10.2	0.100	2.5	4.00	SPR	CG	Z
1.250	31.75	3963	.75	19.1	1.046	26.6	118	21	.24	6.1	28	125	.29	7.4	0.102	2.6	3.00	SPR	CG	Z
1.250	31.75	2887	.94	23.8	1.130	28.7	7.4	1.3	.73	18	5.4	24	.21	5.3	0.060	1.5	3.50	SPR	CG	Z
1.250	31.75	10231	1.06	27.0	.800	20.3	1955	342	.12	3.1	239	1061	.84	21.4	0.225	5.7	3.75	SPR	CG	Z
1.250	31.75	S-3158	1.13	28.6	1.068	27.1	20	3.5	.69	18	14	62	.43	11.0	0.091	2.3	4.75	SST	CG	N
1.250	31.75	S-148	1.25	31.8	1.126	28.6	5.5	.96	.94	24	5.2	23	.31	7.9	0.062	1.6	4.00	SST	C	N
1.250	31.75	829	1.25	31.8	1.010	25.7	89	16	.50	13	44	195	.64	16.3	0.120	3.0	4.33	HD	C	Z
1.250	31.75	S-1436	1.31	33.3	1.040	26.4	40	7.1	.70	18	28	126	.47	12.0	0.105	2.7	4.50	SST	CG	N
1.250	31.75	3044	1.34	34.1	1.106	28.1	7.9	1.4	.98	25	7.7	34	.36	9.1	0.072	1.8	5.00	SPR	CG	Z
1.250	31.75	S-475	1.38	34.9	.896	22.8	331	58	.35	8.9	115	513	.89	22.5	0.177	4.5	5.00	SST	CG	N
1.250	31.75	1933	1.38	34.9	.896	22.8	286	50	.31	8.0	89	398	1.06	27.0	0.177	4.5	6.00	SPR	CG	Z
1.250	31.75	807	1.63	41.3	.866	22.0	412	72	.38	9.7	157	699	1.15	29.3	0.192	4.9	6.00	HD	CG	Z
1.250	31.75	B18-196	1.72	43.6	.982	24.9	74	13	.72	18	53	236	.80	20.4	0.134	3.4	6.00	SST	CG	N
1.250	31.75	B17-153	1.75	44.5	1.164	29.6	.13	.02	.80	20	.10	.47	.95	24.0	0.043	1.1	21.0	SST	C	N
1.250	31.75	I-60A	1.75	44.5	1.126	28.6	1.8	.32	1.1	29	2.0	9.1	.62	15.7	0.062	1.6	9.00	HD	C	BO
1.250	31.75	11708	1.75	44.5	.892	22.7	400	70	.34	8.5	134	597	.90	22.7	0.179	4.5	5.00	SPR	CG	Z
1.250	31.75	3455	1.75	44.5	.890	22.6	308	54	.42	11	130	579	1.08	27.4	0.180	4.6	6.00	SPR	CG	Z
1.250	31.75	2936	1.78	45.2	1.116	28.3	5.8	1.0	1.4	37	8.4	38	.34	8.5	0.067	1.7	5.00	SPR	CG	Z
1.250	31.75	1901	2.00	50.8	1.040	26.4	23	4.1	1.3	32	29	131	.74	18.7	0.105	2.7	7.00	SPR	CG	Z
1.250	31.75	S-3247	2.03	51.6	1.130	28.7	1.2	.21	1.4	36	1.8	7.8	.60	15.2	0.060	1.5	10.0	SST	CG	N
1.250	31.75	12608	2.25	57.2	1.116	28.3	4.1	.72	1.8	47	7.5	34	.42	10.6	0.067	1.7	6.25	MW	CG	Z
1.250	31.75	11298	2.28	57.9	.910	23.1	224	39	.52	13	116	514	1.06	27.0	0.170	4.3	6.25	SPR	CG	Z
1.250	31.75	10995	2.31	58.7	.954	24.2	86	15	.92	23	79	351	1.18	30.1	0.148	3.8	8.00	HD	CG	Z
1.250	31.75	11848	2.34	59.5	1.102	28.0	5.9	1.0	1.8	46	11	47	.44	11.3	0.074	1.9	6.00	SST	CG	N
1.250	31.75	10644	2.38	60.3	.866	22.0	275	48	.57	15	157	699	1.54	39.0	0.192	4.9	8.00	SPR	CG	Z
1.250	31.75	11917	2.50	63.5	1.068	27.1	11	2.0	1.7	42	19	83	.64	16.2	0.091	2.3	7.00	SST	CG	N
1.250	31.75	72	2.50	63.5	.896	22.8	169	30	.77	20	130	578	1.55	39.3	0.177	4.5	8.75	HD	CG	Z
1.250	31.75	12097	2.56	65.1	1.068	27.1	11	2.0	1.7	42	19	83	.64	16.2	0.091	2.3	7.00	SST	CG	N
1.250	31.75	S-352	2.63	66.7	1.138	28.9	2.2	.39	2.2	56	4.9	22	.35	8.9	0.056	1.4	5.25	SST	C	N
1.250	31.75	B2-58	2.63	66.7	1.116	28.3	4.4	.77	2.2	56	9.7	43	.40	10.2	0.067	1.7	6.00	MW	CG	Z
1.250	31.75	272	2.88	73.0	.980	24.9	49	8.6	1.2	31	60	268	1.22	30.9	0.135	3.4	9.00	HD	CG	Z
1.250	31.75	3085	2.94	74.6	1.122	28.5	3.3	.58	2.3	59	7.7	34	.47	12.0	0.064	1.6	6.33	SPR	C	Z
1.250	31.75	10710	3.00	76.2	.980	24.9	31	5.5	1.2	32	39	173	1.76	44.6	0.135	3.4	13.0	SPR	CG	Z
1.250	31.75	58	3.00	76.2	.954	24.2	71	12	1.1	28	79	351	1.52	38.5	0.148	3.8	9.25	HD	CG	Z
1.250	31.75	60	3.00	76.2	.866	22.0	194	34	.81	21	157	699	2.02	51.2	0.192	4.9	10.5	HD	CG	Z
1.250	31.75	858	3.13	79.4	.974	24.7	49	8.7	1.3	33	64	286	1.33	33.9	0.138	3.5	9.67	HD	CG	Z
1.250	31.75	S-1625	3.25	82.6	1.106	28.1	3.9	.69	2.5	63	9.7	43	.59	15.1	0.072	1.8	7.25	SST	C	N
1.250	31.75	3344	3.25	82.6	1.036	26.3	18	3.2	1.8	46	32	144	.96	24.5	0.107	2.7	9.00	SPR	CG	Z
1.250	31.75	S-274	3.38	85.7	1.100	27.9	4.6	.80	2.4	61	11	49	.62	15.9	0.075	1.9	7.33	SST	C	N
1.250	31.75	11644	3.41	86.5	1.124	28.5	2.3	.40	2.9	74	6.5	29	.50	12.8	0.063	1.6	8.00	SPR	CG	Z
1.250	31.75	810	3.63	92.1	.896	22.8	111	19	1.2	30	130	578	2.18	55.4	0.177	4.5	12.3	HD	CG	Z
1.250	31.75	S-1166	3.75	95.3	1.010	25.7	21	3.7	1.9	48	40	178	1.26	32.0	0.120	3.0	10.5	SST	CG	N
1.250	31.75	11102	4.00	101.6	1.040	26.4	10	1.8	2.6	66	27	120	1.39	35.3	0.105	2.7	13.3	SPR	CG	Z
1.250	31.75	859	4.00	101.6	.980	24.9	34	5.9	1.8	46	60	268	1.65	42.0	0.135	3.4	12.3	HD	CG	Z
1.250	31.75	34	4.00	101.6	.954	24.2	49	8.6	1.6	41	79	351	1.85	47.0	0.148	3.8	12.5	HD	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.250	31.75	33	4.00	101.6	.800	20.3	302	53	.79	20	239	1061	3.00	76.2	0.225	5.7	13.3	HD	CG	Z
1.250	31.75	4264	4.50	114.3	1.010	25.7	23	4.0	1.9	49	44	195	1.44	36.6	0.120	3.0	11.0	SPR	C	Z
1.250	31.75	3179	4.59	116.7	1.024	26.0	10	1.8	2.6	65	26	115	2.02	51.3	0.113	2.9	18.0	SPR	CG	Z
1.250	31.75	11681	4.63	117.5	.980	24.9	26	4.5	2.4	60	60	268	2.09	53.1	0.135	3.4	15.5	SPR	CG	Z
1.250	31.75	S-954	4.75	120.7	1.124	28.5	.74	.13	3.6	90	2.6	12	1.20	30.4	0.063	1.6	18.0	SST	C	N
1.250	31.75	1765	4.75	120.7	1.068	27.1	5.8	1.0	3.5	88	20	89	1.18	30.0	0.091	2.3	13.0	HD	CG	Z
1.250	31.75	4100	5.00	127.0	.814	20.7	328	57	.69	18	226	1007	2.40	60.9	0.218	5.5	11.0	SPR	CG	Z
1.250	31.75	3145	5.06	128.6	.896	22.8	143	25	.91	23	130	578	1.77	45.0	0.177	4.5	10.0	SPR	CG	Z
1.250	31.75	12772	5.75	146.1	.950	24.1	36	6.2	2.15	56	77.4	344	2.56	65.1	0.148	3.8	16.3	HD	C	Z
1.250	31.75	3448	6.00	152.4	1.136	28.9	1.1	.20	4.9	124	5.5	24	.63	15.9	0.057	1.4	10.0	SPR	C	Z
1.250	31.75	248	6.25	158.8	.926	23.5	51	9.0	2.0	50	100	447	2.75	70.0	0.162	4.1	17.0	HD	CG	Z
1.250	31.75	3043	6.38	161.9	.990	25.1	19	3.2	2.9	74	54	240	2.31	58.6	0.130	3.3	17.8	SPR	CG	Z
1.250	31.75	S-959	6.88	174.6	.956	24.3	22	3.8	3.2	81	70	310	3.23	82.1	0.147	3.7	22.0	SST	CG	N
1.250	31.75	3210	7.00	177.8	.926	23.5	57	10	1.8	45	100	447	2.51	63.8	0.162	4.1	15.5	SPR	CG	Z
1.250	31.75	2725	7.63	193.7	.954	24.2	26	4.6	3.0	76	79	351	3.18	80.8	0.148	3.8	21.5	SPR	CG	Z
1.250	31.75	12648	8.00	203.2	1.066	27.1	12	2.1	1.7	44	21	92	.78	19.9	0.092	2.3	7.50	SPR	C	Z
1.250	31.75	12658	8.00	203.2	1.062	27.0	4.6	.81	6.2	158	29	128	1.76	44.8	0.094	2.4	17.8	MW	C	Z
1.250	31.75	4181	8.00	203.2	1.010	25.7	9.8	1.7	4.5	113	44	195	2.88	73.2	0.120	3.0	23.0	SPR	C	Z
1.250	31.75	849	8.00	203.2	.926	23.5	32	5.6	3.1	80	100	447	4.21	107.0	0.162	4.1	26.0	HD	CG	Z
1.250	31.75	2996	8.38	212.7	1.022	26.0	7.3	1.3	5.2	132	38	168	2.82	71.7	0.114	2.9	24.8	SPR	CG	Z
1.250	31.75	822	10.0	254.0	.954	24.2	18	3.2	4.3	110	79	351	4.48	113.7	0.148	3.8	30.3	HD	CG	Z
1.250	31.75	3460	11.8	298.5	1.066	27.1	2.8	.48	7.5	190	21	92	2.48	63.1	0.092	2.3	26.0	HD	C	GI
1.250	31.75	868	12.0	304.8	1.010	25.7	6.7	1.2	6.6	167	44	195	4.08	103.6	0.120	3.0	33.0	HD	C	Z
1.250	31.75	860	12.0	304.8	.980	24.9	11	1.8	5.7	146	60	268	4.83	122.6	0.135	3.4	34.8	HD	C	Z
1.250	31.75	839	12.0	304.8	.866	22.0	55	9.6	2.9	73	157	699	6.14	156.1	0.192	4.9	32.0	HD	CG	Z
1.250	31.75	802	12.0	304.8	.836	21.2	67	12	2.9	73	195	868	7.56	191.9	0.207	5.3	36.5	HD	CG	Z
1.250	31.75	834	12.0	304.8	.800	20.3	93	16	2.6	65	239	1061	8.72	221.5	0.225	5.7	38.8	HD	CG	Z
1.250	31.75	S-3047	16.0	406.4	1.070	27.2	1.5	.26	12	313	18	80	3.51	89.2	0.090	2.3	38.0	SST	C	N
1.250	31.75	4000	19.0	482.6	1.000	25.4	5.9	1.0	8.4	214	50	220	5.50	139.7	0.125	3.2	44.0	SPR	CG	Z
1.250	31.75	4045	24.8	628.7	.750	19.1	97	17	3.3	84	322	1431	15.0	381.0	0.250	6.4	60.0	SPR	CG	Z
1.266	32.16	S-3199	.75	19.1	1.124	28.5	19	3.3	.49	12	9.2	41	.21	5.4	0.071	1.8	3.00	SST	CG	N
1.266	32.16	2957	1.41	35.7	1.056	26.8	45	7.8	.68	17	30	134	.47	12.0	0.105	2.7	4.50	SPR	CG	Z
1.266	32.16	10292	1.44	36.5	1.094	27.8	19	3.4	.91	23	17	77	.39	9.8	0.086	2.2	4.50	SPR	CG	Z
1.266	32.16	11212	1.53	38.9	.926	23.5	304	53	.38	9.5	114	508	.85	21.6	0.170	4.3	5.00	SPR	CG	Z
1.266	32.16	11210	1.63	41.3	.970	24.6	165	29	.47	12	78	347	.89	22.6	0.148	3.8	5.00	SPR	C	Z
1.266	32.16	2600	1.75	44.5	1.056	26.8	41	7.1	1.0	26	42	188	.50	12.7	0.105	2.7	4.75	MW	CG	Z
1.266	32.16	11796	1.97	50.0	1.164	29.6	1.1	.19	1.6	42	1.7	7.8	.33	8.4	0.051	1.3	6.50	SST	CG	N
1.266	32.16	B18-186	2.03	51.6	.766	19.5	1357	238	.20	5.0	268	1192	1.38	34.9	0.250	6.4	5.50	SST	CG	N
1.266	32.16	11857	2.47	62.7	1.128	28.7	6.3	1.1	1.5	38	9.5	42	.35	8.8	0.069	1.8	5.00	SPR	CG	N
1.266	32.16	S-348	2.75	69.9	1.016	25.8	37	6.5	1.2	30	45	199	.94	23.8	0.125	3.2	7.50	SST	CG	N
1.266	32.16	10169	2.75	69.9	.912	23.2	156	27	.82	21	128	571	1.59	40.5	0.177	4.5	9.00	SPR	CG	Z
1.266	32.16	11503	2.75	69.9	.850	21.6	284	50	.46	12	131	584	2.29	58.1	0.208	5.3	10.0	SPR	CG	Z
1.266	32.16	11700	3.09	78.6	1.182	30.0	.81	.14	2.8	72	2.3	10	.25	6.4	0.042	1.1	5.00	SPR	C	Z
1.266	32.16	11788	3.31	84.1	1.054	26.8	17	2.9	1.9	48	31	138	.95	24.2	0.106	2.7	9.00	SPR	CG	Z
1.266	32.16	S-335	4.00	101.6	.882	22.4	224	39	.60	15	134	595	1.56	39.6	0.192	4.9	8.00	SST	CG	N
1.266	32.16	10515	4.13	104.8	1.056	26.8	9.7	1.7	2.7	69	26	117	1.42	36.0	0.105	2.7	13.5	SPR	CG	Z
1.266	32.16	12512	4.19	106.3	.922	23.4	120	21	1.4	35	165	736	1.89	48.1	0.172	4.4	10.0	MW	C	N
1.266	32.16	S-1128	4.25	108.0	1.142	29.0	1.1	.19	3.4	87	3.6	16	.81	20.5	0.062	1.6	12.0	SST	C	N
1.266	32.16	11903	5.09	129.4	1.144	29.1	.63	.11	3.9	100	2.5	11	1.16	29.4	0.061	1.5	18.0	SST	C	N
1.266	32.16	2712	6.00	152.4	.954	24.2	37	6.4	2.4	62	89	395	3.16	80.3	0.156	4.0	20.0	SPR	CG	Z
1.266	32.16	11562	7.25	184.2	1.028	26.1	12	2.0	3.7	93	42	188	2.32	58.9	0.119	3.0	18.5	SPR	CG	GI
1.266	32.16	3283	8.00	203.2	1.026	26.1	9.4	1.7	4.6	117	43	193	2.88	73.2	0.120	3.0	23.0	HD	C	Z
1.266	32.16	4164	8.25	209.6	.906	23.0	51	9.0	2.5	64	129	573	4.50	114.3	0.180	4.6	25.0	SPR	CG	Z
1.266	32.16	3377	9.38	238.1	1.052	26.7	5.5	.96	5.8	147	32	142	2.68	67.9	0.107	2.7	24.0	SPR	C	Z
1.281	32.54	B8-59	.59	15.1	1.125	28.6	11	1.9	.24	6.1	2.6	12	.35	8.9	0.078	2.0	4.50	SST	CG	N
1.281	32.54	3620	.69	17.4	1.157	29.4	3.9	.68	.38	9.6	1.5	6.6	.31	7.9	0.062	1.6	5.00	SPR	CG	Z
1.281	32.54	S-1683	.95	24.2	.997	25.3	229	40	.27	6.8	62	274	.50	12.6	0.142	3.6	3.50	SST	CG	N
1.281	32.54	S-3031	1.00	25.4	1.099	27.9	20	3.6	.59	15	12	53	.41	10.4	0.091	2.3	4.50	SST	CG	N
1.281	32.54	S-291	1.13	28.6	1.157	29.4	5.1	.89	.88	22	4.5	20	.25	6.3	0.062	1.6	4.00	SST	CG	N
1.281	32.54	A14-50	1.28	32.5	1.119	28.4	14	2.5	.94	24	13	59	.34	8.7	0.081	2.1	4.25	SST	CG	N
1.281	32.54	10459	1.50	38.1	1.111	28.2	15	2.6	1.1	27	16	70	.43	10.8	0.085	2.2	5.00	SPR	CG	Z
1.281	32.54	11668	1.50	38.1	1.001	25.4	124	22	.53	13	66	292	.70	17.8	0.140	3.6	5.00	SPR	CG	GI
1.281	32.54	11187	1.56	39.7	1.071	27.2	36	6.3	.83	21	30	133	.53	13.3	0.105	2.7	5.00	HD	CG	Z
1.281	32.54	3041	1.75	44.5	1.157	29.4	2.9	.51	1.3	33	3.9	17	.43	11.0	0.062	1.6	6.00	SPR	C	Z
1.281	32.54	11944	1.75	44.5	1.115	28.3	13	2.3	1.2	30	15	69	.42	10.5	0.083	2.1	5.00	SPR	CG	Z
1.281	32.54	1896	1.75	44.5	.987	25.1	132	23	.81	20	106	471	.81	20.5	0.147	3.7	5.50	MW	CG	Z
1.281	32.54	816	2.13	54.0	.957	24.3	128	22	.76	19	98	437	1.22	30.9	0.162	4.1	7.50	HD	CG	Z
1.281	32.54	S-217	2.63	66.7	1.199	30.5	.53	.09	2.4	61	1.3	5.6	.23	5.7	0.041	1.0	5.50	SST	CG	N
1.281	32.54	10528	3.06	77.8	.953	24.2	107	19	.95	24	102	453	1.48	37.5	0.164	4.2	9.00	SPR	CG	N
1.281	32.54	817	3.38	85.7	.957	24.3	76	13	1.3	33	98	437	1.84	46.6	0.162	4.1	11.3	HD	CG	Z
1.281	32.54	S-3055	3.50	88.9	1.137	28.9	2.9	.51	2.8	72	8.2	37	.68	17.4	0.072	1.8	8.50	SST	C	N
1.281	32.54	11645	4.00	101.6	1.153	29.3	2.2	.39	3.4	86	7.5	33	.58	14.6	0.064	1.6	8.00	SPR	C	Z
1.281	32.54	11665	4.00	101.6	.965	24.5	58	10	1.6	40	91	406	2.05	52.2	0.158	4.0	13.0	SPR	CG	Z
1.281	32.54	S-1604	4.13	104.8	1.155	29.3	1.1	.19	3.3	84	3.7	16	.82	20.8	0.063	1.6	12.0	SST	CG	N
1.281	32.54	S-431	4.31	109.5	1.121	28.5	3.0	.52	3.4	85	10	45	.95	24.1	0.080	2.0	11.8	SST	CG	N
1.281	32.54	1843	5.00	127.0	1.171	29.7	.89	.16	4.4	112	3.9	17	.61	15.4	0.055	1.4	10.0	HD	C	Z
1.281	32.54	S-3224	5.31	134.9	1.101	28.0	4.1	.72	4.1	103	17	74	1.26	32.0	0.090	2.3	14.0	SST	CG	N
1.281	32.54	2879	6.19	157.2	.969	24.6	33	5.8	2.6	67	88	391	3.12	79.2	0.156	4.0	20.0	SPR	CG	Z
1.281	32.54	S-1017	11.0	279.4	.961	24.4	24	4.3	3.4	87	84	374	4.12	104.6	0.160	4.1	25.8	SST	CG	N
1.296	32.92	4360	.50	12.7	1.194	30.3	5.0	.88	.35	8.8	1.7	7.8	.15	3.9	0.051	1.3	3.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.296	32.92	11527	1.25	31.8	1.086	27.6	52	9.1	.57	15	30	131	.53	13.3	0.105	2.7	4.00	SPR	CG	Z
1.296	32.92	3655	1.50	38.1	1.114	28.3	20	3.6	.94	24	19	86	.43	11.0	0.091	2.3	4.75	SPR	CG	Z
1.296	32.92	10402	1.63	41.3	1.086	27.6	34	6.0	.86	22	30	131	.53	13.3	0.105	2.7	5.00	SPR	CG	Z
1.296	32.92	3409	1.63	41.3	1.080	27.4	39	6.8	.83	21	32	143	.54	13.7	0.108	2.7	5.00	SPR	CG	Z
1.296	32.92	3955	1.69	42.8	1.172	29.8	2.8	.49	1.3	32	3.5	16	.43	11.0	0.062	1.6	6.00	SPR	C	Z
1.296	32.92	2550	1.75	44.5	1.100	27.9	22	3.9	1.2	31	27	119	.54	13.7	0.098	2.5	5.50	MW	CG	Z
1.296	32.92	12015	1.75	44.5	1.086	27.6	34	6.0	.86	22	30	131	.53	13.3	0.105	2.7	5.00	SPR	CG	Z
1.296	32.92	10902	2.38	60.3	1.116	28.3	7.9	1.4	1.7	42	13	59	.72	18.3	0.090	2.3	8.00	SST	CG	N
1.296	32.92	11771	2.50	63.5	1.046	26.6	55	9.6	.88	22	48	213	.75	19.1	0.125	3.2	6.00	SPR	CG	Z
1.296	32.92	3151	2.56	65.1	1.184	30.1	1.2	.22	2.1	54	2.6	12	.45	11.4	0.056	1.4	8.00	SPR	CG	Z
1.296	32.92	S-977	2.66	67.5	1.026	26.1	44	7.7	1.2	30	53	234	1.08	27.4	0.135	3.4	8.00	SST	CG	N
1.296	32.92	11638	2.72	69.0	1.086	27.6	13	2.3	1.7	42	22	96	1.05	26.7	0.105	2.7	10.0	SPR	CG	Z
1.296	32.92	1845	2.75	69.9	1.100	27.9	22	3.9	1.5	39	34	150	.54	13.7	0.098	2.5	5.50	MW	CG	Z
1.296	32.92	3359	2.75	69.9	1.046	26.6	40	7.0	1.2	31	48	213	1.06	27.0	0.125	3.2	7.50	SPR	C	Z
1.296	32.92	3744	2.94	74.6	1.096	27.8	17	2.9	1.5	39	26	114	.70	17.8	0.100	2.5	7.00	SPR	CG	Z
1.296	32.92	S-3017	3.00	76.2	1.172	29.8	1.4	.25	2.4	60	3.3	15	.62	15.7	0.062	1.6	9.00	SST	C	N
1.296	32.92	11265	3.00	76.2	.972	24.7	97	17	1.0	25	97	432	1.46	37.0	0.162	4.1	9.00	SPR	CG	N
1.296	32.92	2828	3.75	95.3	.796	20.2	497	87	.63	16	312	1389	2.97	75.4	0.250	6.4	12.0	SPR	CG	Z
1.296	32.92	11966	4.00	101.6	.984	25.0	52	9.1	1.7	42	87	387	2.03	51.5	0.156	4.0	13.0	SPR	CG	Z
1.296	32.92	S-160	4.50	114.3	1.112	28.2	5.4	.95	3.4	85	18	80	1.15	29.2	0.092	2.3	11.5	SST	C	N
1.296	32.92	12128	4.94	125.4	1.188	30.2	.80	.14	4.3	110	3.5	15	.59	15.1	0.054	1.4	10.0	SPR	C	Z
1.296	32.92	11734	4.94	125.4	1.008	25.6	35	6.2	2.0	51	70	314	1.94	49.4	0.144	3.7	13.5	SPR	CG	Z
1.296	32.92	S-1657	6.00	152.4	1.156	29.4	1.7	.29	5.2	131	8.6	38	.84	21.3	0.070	1.8	12.0	SST	CG	N
1.296	32.92	4133	6.75	171.5	.992	25.2	39	6.9	2.0	52	81	358	2.28	57.9	0.152	3.9	15.0	SPR	CG	GI
1.296	32.92	4025	22.0	558.8	1.046	26.6	3.4	.59	13	330	44	194	7.31	185.7	0.125	3.2	58.5	SST	CG	N
1.312	33.32	S-1499	.94	23.8	1.188	30.2	2.7	.47	.60	15	1.6	7.2	.34	8.7	0.062	1.6	5.50	SST	CG	N
1.312	33.32	10053	1.13	28.6	.812	20.6	3125	547	.10	2.5	309	1375	.88	22.2	0.250	6.4	3.50	SPR	CG	Z
1.312	33.32	3325	1.19	30.2	1.072	27.2	88	15	.48	12	42	187	.48	12.2	0.120	3.0	4.00	SPR	CG	Z
1.312	33.32	S-198	1.22	31.0	1.102	28.0	44	7.7	.61	16	27	120	.42	10.7	0.105	2.7	4.00	SST	CG	N
1.312	33.32	S-1275	1.38	34.9	1.112	28.2	20	3.5	.83	21	17	74	.55	14.0	0.100	2.5	5.50	SST	CG	N
1.312	33.32	S-3223	1.44	36.5	1.152	29.3	14	2.4	.91	23	13	57	.32	8.1	0.080	2.0	4.00	SST	CG	N
1.312	33.32	10670	1.81	46.0	1.102	28.0	29	5.1	.92	23	27	120	.53	13.3	0.105	2.7	5.00	SST	CG	N
1.312	33.32	271	1.88	47.6	.988	25.1	145	25	.66	17	96	427	1.05	26.7	0.162	4.1	6.50	HD	CG	Z
1.312	33.32	12127	1.91	48.4	1.050	26.7	86	15	.62	16	53	235	.66	16.6	0.131	3.3	5.00	SPR	CG	Z
1.312	33.32	10505	1.94	49.2	1.126	28.6	17	3.0	1.2	31	20	91	.51	13.0	0.093	2.4	5.50	SPR	CG	Z
1.312	33.32	3021	1.94	49.2	1.102	28.0	25	4.4	1.2	30	29	130	.63	16.0	0.105	2.7	6.00	SPR	CG	Z
1.312	33.32	11986	2.09	53.2	.897	22.8	396	69	.48	12	188	837	1.45	36.9	0.208	5.3	7.00	SPR	CG	Z
1.312	33.32	S-1422	2.38	60.3	1.152	29.3	7.3	1.3	1.7	44	13	57	.54	13.7	0.080	2.0	5.75	SST	C	N
1.312	33.32	S-3170	2.50	63.5	1.136	28.9	5.8	1.0	1.7	43	10	44	.79	20.1	0.088	2.2	9.00	SST	CG	N
1.312	33.32	3169	2.63	66.7	.986	25.0	103	18	.95	24	98	435	1.39	35.2	0.163	4.1	8.50	SPR	CG	Z
1.312	33.32	1877	2.88	73.0	1.116	28.3	21	3.7	1.6	40	33	148	.64	16.2	0.098	2.5	5.50	MW	C	Z
1.312	33.32	2988	2.94	74.6	1.062	27.0	35	6.1	1.4	35	47	210	1.08	27.4	0.125	3.2	8.50	SPR	CG	Z
1.312	33.32	10109	3.25	82.6	1.192	30.3	2.7	.47	2.2	57	6.1	27	.39	9.9	0.060	1.5	5.50	SPR	C	Z
1.312	33.32	3397	3.50	88.9	1.172	29.8	4.5	.79	2.0	51	9.1	41	.49	12.4	0.070	1.8	6.00	SPR	C	Z
1.312	33.32	S-1628	3.53	89.7	1.170	29.7	1.8	.31	2.7	69	4.8	22	.82	20.7	0.071	1.8	11.5	SST	CG	N
1.312	33.32	12056	3.56	90.5	.952	24.2	116	20	1.1	27	125	555	1.98	50.3	0.180	4.6	11.0	SPR	CG	N
1.312	33.32	10044	3.63	92.1	.862	21.9	319	56	.72	18	229	1018	2.48	62.9	0.225	5.7	11.0	SPR	CG	Z
1.312	33.32	4361	4.00	101.6	1.102	28.0	11	2.0	2.6	65	29	130	1.13	28.7	0.105	2.7	10.8	SPR	CG	Z
1.312	33.32	11434	4.00	101.6	.938	23.8	154	27	.90	23	139	620	1.87	47.5	0.187	4.7	10.0	SPR	CG	Z
1.312	33.32	2749	4.69	119.0	.788	20.0	600	105	.57	14	341	1518	3.08	78.2	0.262	6.7	11.8	SPR	CG	Z
1.312	33.32	12144	4.75	120.7	1.010	25.7	33	5.8	2.3	57	74	331	2.49	63.3	0.151	3.8	16.5	SPR	CG	Z
1.312	33.32	12012	4.94	125.4	1.204	30.6	.77	.13	4.3	110	3.3	15	.59	15.1	0.054	1.4	10.0	SPR	C	Z
1.312	33.32	11488	5.09	129.4	1.205	30.6	.74	.13	4.5	114	3.3	15	.59	14.9	0.054	1.4	10.0	SPR	CG	Z
1.312	33.32	3048	5.25	133.4	1.042	26.5	24	4.3	2.4	60	58	256	1.89	48.0	0.135	3.4	14.0	SPR	CG	Z
1.312	33.32	12108	5.41	137.3	1.094	27.8	12	2.1	2.7	68	33	145	1.25	31.8	0.109	2.8	11.5	SPR	CG	GI
1.312	33.32	S-456	5.63	142.9	1.092	27.7	7.8	1.4	3.8	96	30	132	1.71	43.3	0.110	2.8	15.5	SST	CG	N
1.312	33.32	10399	6.00	152.4	1.086	27.6	10	1.8	3.5	89	35	156	1.75	44.5	0.113	2.9	15.5	SPR	CG	Z
1.312	33.32	336	6.00	152.4	.958	24.3	57	9.9	2.2	56	124	553	3.36	85.4	0.177	4.5	19.0	HD	CG	Z
1.312	33.32	10410	6.00	152.4	.874	22.2	188	33	1.2	30	220	978	3.39	86.2	0.219	5.6	15.5	SPR	CG	Z
1.312	33.32	1921	7.75	196.9	.936	23.8	70	12	2.0	51	141	629	3.76	95.5	0.188	4.8	20.0	HD	CG	Z
1.312	33.32	S-1416	8.75	222.3	.936	23.8	53	9.3	2.3	58	122	542	4.28	108.6	0.188	4.8	22.8	SST	CG	N
1.312	33.32	4012	23.0	584.2	1.028	26.1	6.0	1.0	10.0	254	60.0	267	7.8	198.1	0.142	3.6	54.9	SST	CG	N
1.328	33.73	11423	1.25	31.8	1.058	26.9	62	11	.44	11	27	122	.81	20.6	0.135	3.4	6.00	SST	CG	N
1.328	33.73	11508	1.25	31.8	1.056	26.8	73	13	.30	7.6	22	96	.95	24.2	0.136	3.5	6.00	SPR	CG	Z
1.328	33.73	S-3068	1.38	34.9	1.208	30.7	4.0	.70	1.1	27	4.3	19	.30	7.6	0.060	1.5	4.00	SST	C	N
1.328	33.73	S-233	1.59	40.5	1.004	25.5	189	33	.45	11	84	375	.79	20.1	0.162	4.1	5.00	SST	CG	N
1.328	33.73	11543	2.00	50.8	1.065	27.1	84	15	.63	16	53	235	.79	20.0	0.132	3.3	5.00	SPR	CG	Z
1.328	33.73	10364	2.25	57.2	1.204	30.6	2.8	.49	1.9	48	5.3	24	.36	9.1	0.062	1.6	5.75	SPR	CG	Z
1.328	33.73	12326	2.38	60.3	1.178	29.9	3.9	.67	1.8	45	6.8	30	.60	15.2	0.075	1.9	8.00	SPR	CG	Z
1.328	33.73	12438	2.59	65.9	.956	24.3	193	34	.70	18	136	603	1.49	37.8	0.186	4.7	8.00	SPR	CG	N
1.328	33.73	11605	2.69	68.2	1.088	27.6	34	5.9	1.2	31	41	184	.96	24.4	0.120	3.0	7.00	SPR	C	Z
1.328	33.73	S-953	2.75	69.9	1.202	30.5	1.9	.34	2.3	59	4.5	20	.44	11.2	0.063	1.6	7.00	SST	CG	N
1.328	33.73	S-261	3.13	79.4	1.226	31.1	.90	.16	2.7	70	2.5	11	.38	9.7	0.051	1.3	6.50	SST	C	N
1.328	33.73	S-377	4.38	111.1	1.058	26.9	24	4.3	2.1	53	51	228	1.62	41.1	0.135	3.4	12.0	SST	CG	N
1.328	33.73	11625	5.00	127.0	1.226	31.1	.58	.10	4.5	114	2.6	12	.51	13.0	0.051	1.3	10.0	SPR	CG	Z
1.328	33.73	3084	5.38	136.5	1.058	26.9	23	4.1	2.4	62	57	253	1.89	48.0	0.135	3.4	14.0	SPR	CG	Z
1.328	33.73	11526	5.50	139.7	1.116	28.3	11	1.9	2.8	71	30	132	1.31	33.2	0.106	2.7	11.3	SPR	CG	GI
1.328	33.73	10840	5.69	144.4	1.114	28.3	6.2	1.1	3.7	93	23	101	2.01	51.0	0.107	2.7	18.8	SPR	CG	Z
1.328	33.73	S-1658	6.00	152.4	1.088	27.6	14.0	2.4	2.7	73.6	38	170	1.50	38.1	0.120	3.0	12.5	SST	CG	N
1.328	33.73	3082	8.00	203.2	1.016	25.8	27	4.8	3.1	79	85	378	3.32	84.2	0.156	4.0	21.3	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.328	33.73	4306	8.25	209.6	.974	24.7	54	9.5	2.3	57	123	547	3.36	85.4	0.177	4.5	19.0	SPR	CG	Z
1.343	34.11	2634	.88	22.2	1.183	30.0	29	5.1	.45	12	13	59	.24	6.1	0.080	2.0	3.00	SPR	CG	Z
1.343	34.11	2774	1.50	38.1	1.191	30.3	5.9	1.0	1.0	27	6.2	27	.46	11.6	0.076	1.9	6.00	SPR	CG	Z
1.343	34.11	11807	1.50	38.1	1.181	30.0	12	2.2	1.1	28	14	61	.36	9.3	0.081	2.1	4.50	SPR	CG	Z
1.343	34.11	10639	1.72	43.6	.843	21.4	1229	215	.25	6.3	303	1348	1.38	34.9	0.250	6.4	5.50	SPR	CG	GI
1.343	34.11	2777	1.75	44.5	1.193	30.3	5.8	1.0	1.3	33	7.5	34	.44	11.2	0.075	1.9	6.00	MW	CG	Z
1.343	34.11	3061	1.88	47.6	1.155	29.3	18	3.1	1.2	29	21	91	.49	12.5	0.094	2.4	5.25	SPR	CG	Z
1.343	34.11	11643	1.88	47.6	1.151	29.2	25	4.4	.87	22	22	97	.43	11.0	0.096	2.4	4.50	SPR	CG	Z
1.343	34.11	1717	2.09	53.2	1.233	31.3	2.5	.43	1.8	45	4.4	20	.30	7.7	0.055	1.4	4.50	HD	C	Z
1.343	34.11	11567	2.34	59.5	1.205	30.6	2.6	.46	1.7	44	4.5	20	.62	15.8	0.069	1.8	8.00	SPR	CG	Z
1.343	34.11	10425	2.38	60.3	1.217	30.9	2.9	.50	2.0	51	5.8	26	.36	9.2	0.063	1.6	5.75	SPR	CG	Z
1.343	34.11	11387	2.38	60.3	1.163	29.5	9.6	1.7	1.7	44	17	74	.63	16.0	0.090	2.3	7.00	MW	CG	Z
1.343	34.11	11929	2.41	61.1	1.111	28.2	20	3.5	1.4	35	27	122	1.04	26.5	0.116	2.9	9.00	SPR	CG	Z
1.343	34.11	4370	2.56	65.1	.893	22.7	479	84	.47	12	224	998	1.69	42.9	0.225	5.7	7.50	SPR	CG	GI
1.343	34.11	3278	2.63	66.7	1.029	26.1	100	17	.86	22	86	381	1.14	28.9	0.157	4.0	7.25	SPR	CG	Z
1.343	34.11	12112	2.69	68.2	1.103	28.0	33	5.7	1.3	32	41	182	.84	21.3	0.120	3.0	7.00	SPR	CG	Z
1.343	34.11	11721	3.06	77.8	1.101	28.0	28	4.9	1.5	38	42	187	.97	24.6	0.121	3.1	8.00	SPR	CG	Z
1.343	34.11	3267	3.13	79.4	.969	24.6	175	31	.78	20	136	607	1.59	40.4	0.187	4.7	8.50	SPR	CG	Z
1.343	34.11	10658	3.31	84.1	1.219	31.0	1.8	.31	2.8	70	4.9	22	.54	13.8	0.062	1.6	7.75	SPR	C	Z
1.343	34.11	S-1605	4.03	102.4	1.139	28.9	8.3	1.4	2.8	72	23	104	1.20	30.4	0.102	2.6	10.8	SST	CG	N
1.343	34.11	11904	4.13	104.8	1.227	31.2	1.2	.21	3.6	93	4.5	20	.48	12.2	0.058	1.5	8.25	SPR	CG	N
1.343	34.11	S-155	4.50	114.3	1.227	31.2	1.1	.19	4.0	102	4.3	19	.48	12.2	0.058	1.5	8.25	SST	CG	N
1.343	34.11	S-353	4.50	114.3	1.199	30.5	1.6	.29	3.6	92	5.9	26	.86	21.9	0.072	1.8	12.0	SST	CG	N
1.343	34.11	10090	5.50	139.7	.893	22.7	176	31	1.3	32	224	998	3.83	97.2	0.225	5.7	17.0	SPR	CG	Z
1.343	34.11	4137	5.75	146.1	1.073	27.3	23	4.0	2.5	63	56	251	1.89	48.0	0.135	3.4	14.0	SPR	CG	Z
1.343	34.11	10445	5.75	146.1	1.073	27.3	19	3.3	3.0	77	56	251	2.23	56.6	0.135	3.4	16.5	SPR	CG	Z
1.343	34.11	396	7.09	180.2	1.103	28.0	9.1	1.6	4.5	115	41	182	2.39	60.7	0.120	3.0	20.0	SPR	CG	Z
1.343	34.11	12439	10.0	254.0	1.017	25.8	25	4.3	3.9	98	96	426	4.56	115.9	0.163	4.1	27.0	SPR	C	N
1.343	34.11	1623	10.4	263.5	.989	25.1	33	5.8	3.7	93	122	541	5.09	129.3	0.177	4.5	28.8	SPR	CG	Z
1.343	34.11	4014	15.8	400.1	1.049	26.6	8.5	1.5	8.5	216	72	322	7.06	179.2	0.147	3.7	48.0	SPR	CG	Z
1.359	34.52	10424	.50	12.7	1.177	29.9	73	13	.25	6.5	18	82	.24	6.2	0.091	2.3	2.67	SPR	CG	GI
1.359	34.52	LL-79	.50	12.7	1.159	29.4	128	22	.18	4.5	23	101	.25	6.4	0.100	2.5	2.50	SST	CG	N
1.359	34.52	EE-84	1.19	30.2	1.099	27.9	55	9.7	.41	10	23	100	.78	19.8	0.130	3.3	6.00	SPR	CG	N
1.359	34.52	2664	1.19	30.2	.977	24.8	639	112	.22	5.7	144	638	.74	18.8	0.191	4.9	4.00	SPR	CG	Z
1.359	34.52	11677	1.22	31.0	1.199	30.5	7.0	1.2	.74	19	5.2	23	.48	12.2	0.080	2.0	6.00	SPR	CG	Z
1.359	34.52	S-1261	1.25	31.8	1.253	31.8	2.5	.44	1.0	25	2.5	11	.25	6.4	0.053	1.3	3.75	SST	C	N
1.359	34.52	11824	1.28	32.5	1.179	29.9	18	3.2	.90	23	16	73	.38	9.7	0.090	2.3	4.25	SST	CG	N
1.359	34.52	JJ-52	1.28	32.5	1.119	28.4	78	14	.52	13	41	180	.48	12.2	0.120	3.0	4.00	SPR	CG	N
1.359	34.52	11551	1.31	33.3	1.135	28.8	58	10	.57	14	33	147	.56	14.2	0.112	2.8	4.00	SPR	CG	Z
1.359	34.52	11867	1.47	37.3	1.221	31.0	5.1	.89	1.1	27	5.3	24	.41	10.5	0.069	1.8	5.00	SPR	C	N
1.359	34.52	10511	1.50	38.1	1.247	31.7	2.6	.45	1.2	30	3.0	14	.31	7.8	0.056	1.4	4.50	SPR	C	Z
1.359	34.52	B18-180	1.50	38.1	.859	21.82	1302	228	.190	4.83	247	1101	1.190	30.23	0.250	6.35	4.75	SST	CG	N
1.359	34.52	3433	1.88	47.6	1.159	29.4	21	3.6	1.2	30	24	109	.65	16.5	0.100	2.5	5.50	SPR	C	Z
1.359	34.52	11789	1.94	49.2	1.025	26.0	165	29	.62	16	102	452	1.00	25.5	0.167	4.2	6.00	SPR	CG	Z
1.359	34.52	3747	2.13	54.0	1.159	29.4	24	4.2	1.0	26	24	109	.50	12.7	0.100	2.5	5.00	SPR	CG	Z
1.359	34.52	S-3235	2.19	55.6	1.065	27.1	61	11	1.1	27	65	287	1.10	28.0	0.147	3.7	7.50	SST	CG	N
1.359	34.52	12514	2.25	57.2	1.069	27.2	75	13	1.1	29	84	374	1.12	28.5	0.145	3.7	6.75	MW	C	N
1.359	34.52	11922	2.28	57.9	1.267	32.2	.15	.03	1.4	35	.20	.90	.92	23.4	0.046	1.2	19.0	SST	C	N
1.359	34.52	2564	2.63	66.7	1.199	30.5	7.0	1.2	1.9	47	13	58	.48	12.2	0.080	2.0	6.00	SPR	CG	Z
1.359	34.52	S-960	2.69	68.2	1.177	29.9	11	1.9	1.6	41	17	76	.55	13.9	0.091	2.3	6.00	SST	CG	N
1.359	34.52	3373	2.75	69.9	1.215	30.9	3.6	.63	2.2	55	7.9	35	.58	14.6	0.072	1.8	7.00	HD	C	Z
1.359	34.52	11409	2.75	69.9	1.119	28.4	30	5.2	1.4	35	41	180	.99	25.1	0.120	3.0	7.25	SPR	C	Z
1.359	34.52	11520	2.75	69.9	1.045	26.5	94	17	.90	23	85	377	1.31	33.2	0.157	4.0	7.33	SPR	CG	Z
1.359	34.52	B17-171	3.00	76.2	1.151	29.2	19	3.3	1.3	34	25	113	.62	15.8	0.104	2.6	6.00	SST	CG	N
1.359	34.52	10476	3.13	79.4	1.063	27.0	55	9.7	1.3	33	73	325	1.33	33.8	0.148	3.8	9.00	SPR	CG	Z
1.359	34.52	3102	3.25	82.6	1.207	30.7	4.5	.80	2.5	63	11	50	.61	15.4	0.076	1.9	7.00	SPR	C	Z
1.359	34.52	S-3112	3.25	82.6	1.199	30.5	4.7	.82	2.6	66	12	54	.66	16.8	0.080	2.0	7.25	SST	C	N
1.359	34.52	S-958	3.25	82.6	1.177	29.9	8.4	1.5	2.0	52	17	76	.64	16.2	0.091	2.3	7.00	SST	CG	N
1.359	34.52	11877	3.34	84.9	1.175	29.8	10	1.8	1.9	48	19	85	.64	16.4	0.092	2.3	7.00	SPR	CG	N
1.359	34.52	S-43	3.50	88.9	1.161	29.5	7.5	1.3	2.5	64	19	84	.99	25.1	0.099	2.5	10.0	SST	CG	N
1.359	34.52	11780	3.50	88.9	1.047	26.6	70	12	1.2	30	83	370	1.40	35.7	0.156	4.0	9.00	SPR	CG	N
1.359	34.52	2859	3.50	88.9	.909	23.1	311	54	.71	18	222	987	2.28	57.9	0.225	5.7	10.0	SPR	CG	Z
1.359	34.52	3443	3.69	93.6	.945	24.0	314	55	.58	15	181	806	1.55	39.4	0.207	5.3	7.50	SPR	CG	Z
1.359	34.52	12044	4.50	114.3	1.035	26.3	48	8.4	1.9	49	93	413	2.27	57.6	0.162	4.1	14.0	SPR	CG	Z
1.359	34.52	S-3251	4.75	120.7	1.239	31.5	1.4	.25	3.8	98	5.5	25	.44	11.0	0.060	1.5	7.25	SST	CG	N
1.359	34.52	12060	4.88	123.8	1.175	29.8	6.3	1.1	3.0	77	19	85	1.01	25.7	0.092	2.3	10.0	SPR	C	Z
1.359	34.52	S-3249	5.00	127.0	.967	24.6	128	22	1.0	26	133	593	2.42	61.4	0.196	5.0	11.3	SST	C	N
1.359	34.52	3426	5.75	146.1	1.231	31.3	1.6	.28	4.5	114	7.1	32	.64	16.3	0.064	1.6	9.00	SPR	C	Z
1.359	34.52	11401	6.13	155.6	1.119	28.4	13	2.2	3.2	81	41	180	1.83	46.5	0.120	3.0	14.3	SPR	C	Z
1.359	34.52	11997	10.4	265.1	1.003	25.5	32	5.7	3.8	96	122	544	5.16	131.1	0.178	4.5	29.0	SPR	CG	Z
1.359	34.52	2979	11.1	282.6	.835	21.2	257	45	1.3	33	332	1475	5.76	146.4	0.262	6.7	22.0	SPR	CG	Z
1.375	34.93	11808	.63	15.9	1.257	31.9	4.4	.76	.40	10	1.8	7.8	.22	5.6	0.059	1.5	3.75	SPR	CG	Z
1.375	34.93	BB-59	1.00	25.4	1.275	32.4	3.9	.68	.85	22	3.3	15	.15	3.8	0.050	1.3	3.00	SPR	CG	N
1.375	34.93	3393	1.19	30.2	1.125	28.6	80	14	.57	14	45	201	.53	13.5	0.125	3.2	4.25	SPR	CG	Z
1.375	34.93	GG-76	1.19	30.2	.995	25.3	499	87	.24	6.1	120	536	.76	19.3	0.190	4.8	4.00	SST	CG	N
1.375	34.93	12539	1.20	30.5	1.081	27.5	207	36	.34	8.7	71	315	.70	17.7	0.147	3.7	3.75	SPR	CL	N
1.375	34.93	11883	1.22	31.0	1.271	32.3	3.0	.53	1.0	26	3.1	14	.18	4.6	0.052	1.3	3.50	SPR	CG	N
1.375	34.93	917	1.25	31.8	1.165	29.6	43	7.5	.65	17	28	124	.42	10.7	0.105	2.7	4.00	HD	CG	Z
1.375	34.93	3346	1.25	31.8	1.151	29.2	56	9.8	.58	15	33	145	.45	11.4	0.112	2.8	4.00	SPR	CG	Z
1.375	34.93	12140	1.59	40.5	1.115	28.3	47	8.3	.75	19	35	157	.85	21.5	0.130	3.3	6.50	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.375	34.93	S-1087	1.63	41.3	1.135	28.8	48	8.4	.77	19	37	163	.57	14.5	0.120	3.0	4.75	SST	CG	N
1.375	34.93	11628	1.63	41.3	1.123	28.5	41	7.2	.81	20	33	148	.82	20.8	0.126	3.2	6.50	SPR	CG	Z
1.375	34.93	S-326	1.69	42.8	1.105	28.1	63	11	.78	20	50	221	.74	18.9	0.135	3.4	5.50	SST	CG	N
1.375	34.93	3560	1.75	44.5	.991	25.2	393	69	.37	9.3	144	641	.96	24.4	0.192	4.9	5.00	SPR	CG	Z
1.375	34.93	10401	1.97	50.0	1.063	27.0	104	18	.79	20	82	366	1.01	25.8	0.156	4.0	6.50	SPR	CG	Z
1.375	34.93	12610	2.00	50.8	1.041	26.4	141	25	.71	18	100	447	1.09	27.6	0.167	4.2	6.50	SPR	CG	Z
1.375	34.93	10299	2.13	54.0	1.193	30.3	13	2.3	1.4	35	18	81	.50	12.7	0.091	2.3	5.50	SPR	CG	Z
1.375	34.93	11671	2.13	54.0	1.041	26.4	141	25	.71	18	100	447	1.09	27.6	0.167	4.2	6.50	SPR	CG	Z
1.375	34.93	12779	2.19	55.6	1.079	27.4	79	14	.92	23	72	321	1.00	25.4	0.148	3.8	6.75	HD	CG	Z
1.375	34.93	4400	2.22	56.4	1.179	29.9	15	2.6	1.5	39	23	101	.61	15.6	0.098	2.5	6.25	SPR	CG	Z
1.375	34.93	4343	2.25	57.2	1.193	30.3	10	1.8	1.7	42	17	76	.59	15.0	0.091	2.3	6.50	SPR	CG	Z
1.375	34.93	S-1388	2.31	58.7	1.191	30.3	6.8	1.2	1.6	39	11	47	.76	19.3	0.092	2.3	8.25	SST	CG	N
1.375	34.93	11839	2.34	59.5	1.187	30.1	7.6	1.3	1.6	40	12	53	.78	19.7	0.094	2.4	8.25	SST	CG	N
1.375	34.93	S-450	2.44	61.9	1.191	30.3	7.1	1.2	1.7	43	12	54	.74	18.7	0.092	2.3	8.00	SST	CG	N
1.375	34.93	10309	2.44	61.9	1.021	25.9	164	29	.73	18	119	530	1.24	31.5	0.177	4.5	7.00	SPR	CG	Z
1.375	34.93	10348	2.50	63.5	1.193	30.3	8.5	1.5	1.8	46	15	68	.68	17.3	0.091	2.3	7.50	SPR	CG	Z
1.375	34.93	12092	2.50	63.5	1.167	29.6	18	3.2	1.4	35	25	112	.73	18.5	0.104	2.6	6.00	SST	C	N
1.375	34.93	73	2.50	63.5	1.105	28.1	48	8.4	1.2	29	55	245	.98	24.9	0.135	3.4	7.25	HD	CG	Z
1.375	34.93	S-347	2.50	63.5	1.105	28.1	46	8.0	1.1	28	50	221	.91	23.1	0.135	3.4	6.75	SST	CG	N
1.375	34.93	12420	2.75	69.9	1.277	32.4	.89	.16	2.4	61	2.1	9.5	.34	8.7	0.049	1.2	6.00	SPR	C	Z
1.375	34.93	269	2.75	69.9	1.135	28.8	27	4.8	1.5	37	40	178	1.02	25.9	0.120	3.0	7.50	HD	C	Z
1.375	34.93	3464	2.75	69.9	1.105	28.1	31	5.5	1.3	32	40	176	1.49	37.7	0.135	3.4	10.0	HD	C	Z
1.375	34.93	54	2.75	69.9	1.021	25.9	122	21	.98	25	119	530	1.55	39.3	0.177	4.5	8.75	HD	CG	Z
1.375	34.93	10742	2.88	73.0	1.215	30.9	5.4	.95	2.3	59	13	56	.56	14.2	0.080	2.0	7.00	SPR	CG	Z
1.375	34.93	4355	2.94	74.6	1.205	30.6	4.0	.70	2.0	51	8.1	36	.91	23.2	0.085	2.2	10.8	SPR	CG	Z
1.375	34.93	S-1209	3.00	76.2	1.135	28.8	20	3.5	1.8	46	37	163	1.02	25.9	0.120	3.0	8.50	SST	CG	N
1.375	34.93	11266	3.00	76.2	1.021	25.9	153	27	.69	18	106	471	1.19	30.3	0.177	4.5	6.75	SST	CG	N
1.375	34.93	12048	3.47	88.1	1.125	28.6	28	4.8	1.6	42	45	201	1.06	27.0	0.125	3.2	8.50	SPR	CG	N
1.375	34.93	1557	3.50	88.9	1.259	32.0	.89	.16	2.9	73	2.5	11	.64	16.2	0.058	1.5	10.0	SPR	C	Z
1.375	34.93	S-289	3.75	95.3	1.251	31.8	1.5	.26	3.2	82	4.8	21	.53	13.4	0.062	1.6	7.50	SST	C	N
1.375	34.93	2591	3.75	95.3	1.231	31.3	1.6	.27	2.8	71	4.3	19	.95	24.2	0.072	1.8	13.3	HD	CG	Z
1.375	34.93	S-103	3.75	95.3	1.231	31.3	2.6	.46	3.1	79	8.2	37	.63	16.0	0.072	1.8	7.75	SST	C	N
1.375	34.93	S-1355	3.75	95.3	1.199	30.5	7.0	1.2	2.3	58	16	72	.62	15.6	0.088	2.2	7.00	SST	CG	N
1.375	34.93	S-445	3.75	95.3	1.175	29.8	6.0	1.1	2.6	65	15	68	1.20	30.5	0.100	2.5	12.0	SST	CG	N
1.375	34.93	898	3.75	95.3	1.105	28.1	29	5.2	1.9	48	55	245	1.55	39.4	0.135	3.4	10.5	HD	C	Z
1.375	34.93	S-195	3.75	95.3	1.063	27.0	63	11	1.2	30	73	325	1.33	33.7	0.156	4.0	8.50	SST	CG	N
1.375	34.93	S-327	3.88	98.4	1.231	31.3	2.6	.46	3.2	82	8.6	38	.63	16.0	0.072	1.8	7.75	SST	C	N
1.375	34.93	3987	4.00	101.6	1.021	25.9	80	14	1.5	38	119	530	2.17	55.1	0.177	4.5	12.3	SPR	CG	Z
1.375	34.93	861	4.13	104.8	1.105	28.1	27	4.7	2.1	52	55	245	1.53	38.9	0.135	3.4	11.3	HD	CG	Z
1.375	34.93	11513	4.38	111.1	1.217	30.9	3.7	.64	3.4	86	12	56	.79	20.1	0.079	2.0	9.00	SPR	CG	Z
1.375	34.93	823	4.38	111.1	1.079	27.4	36	6.3	2.0	51	72	321	1.83	46.4	0.148	3.8	12.3	HD	CG	Z
1.375	34.93	811	4.50	114.3	1.021	25.9	70	12	1.7	43	119	530	2.43	61.8	0.177	4.5	13.8	HD	CG	Z
1.375	34.93	10363	4.75	120.7	1.181	30.0	6.8	1.2	3.3	83	22	98	1.07	27.1	0.097	2.5	11.0	SPR	CG	Z
1.375	34.93	S-3002	5.38	136.5	1.221	31.0	3.3	.59	3.2	82	11	48	.69	17.6	0.077	2.0	8.00	SST	C	N
1.375	34.93	7005	5.38	136.5	1.001	25.4	75	13	1.8	45	134	594	3.30	83.8	0.187	4.7	16.3	HD	C	Z
1.375	34.93	389	6.00	152.4	1.135	28.8	13	2.2	3.2	81	40	178	1.68	42.7	0.120	3.0	14.0	HD	CG	Z
1.375	34.93	11977	6.50	165.1	.989	25.1	107	19	1.4	35	146	651	2.56	65.0	0.193	4.9	13.3	SPR	CG	Z
1.375	34.93	845	8.00	203.2	1.021	25.9	44	7.8	2.7	68	119	530	3.63	92.2	0.177	4.5	20.5	HD	CG	Z
1.375	34.93	383	9.75	247.7	1.215	30.9	1.1	.19	7.5	191	8.1	36	2.24	56.9	0.080	2.0	27.0	HD	C	Z
1.375	34.93	850	10.0	254.0	1.051	26.7	21	3.6	4.4	112	92	409	4.81	122.1	0.162	4.1	28.7	HD	C	Z
1.375	34.93	11489	10.9	277.8	1.019	25.9	32	5.6	3.8	97	121	539	5.25	133.4	0.178	4.5	28.5	HD	CG	Z
1.375	34.93	862	12.0	304.8	1.105	28.1	8.6	1.5	6.4	162	55	245	4.32	109.7	0.135	3.4	31.0	HD	C	Z
1.375	34.93	824	12.0	304.8	1.079	27.4	12	2.2	5.9	149	72	321	4.79	121.5	0.148	3.8	32.3	HD	CG	Z
1.375	34.93	841	12.0	304.8	.991	25.2	35	6.1	4.2	106	144	641	6.91	175.6	0.192	4.9	36.0	HD	CG	Z
1.375	34.93	803	12.0	304.8	.961	24.4	49	8.5	3.7	93	179	798	7.45	189.3	0.207	5.3	36.0	HD	CG	Z
1.375	34.93	801	12.0	304.8	.925	23.5	79	14	2.8	70	220	977	7.31	185.7	0.225	5.7	32.5	HD	CG	Z
1.390	35.31	10492	.78	19.8	1.118	28.4	249	44	.22	5.7	56	248	.41	10.4	0.136	3.5	3.00	SPR	CG	GI
1.390	35.31	S-401	.94	23.8	1.120	28.4	143	25	.34	8.7	49	219	.47	12.0	0.135	3.4	3.50	SST	CG	N
1.390	35.31	3492	1.00	25.4	1.150	29.2	83	15	.48	12	40	177	.45	11.4	0.120	3.0	3.75	HD	CG	Z
1.390	35.31	S-143	1.13	28.6	1.308	33.2	.72	.13	.92	23	.66	2.9	.21	5.2	0.041	1.0	4.00	SST	C	N
1.390	35.31	2909	1.13	28.6	1.266	32.2	2.6	.45	.72	18	1.9	8.3	.40	10.2	0.062	1.6	5.50	SPR	C	Z
1.390	35.31	S-1594	1.69	42.8	1.142	29.0	37	6.5	.82	21	30	135	.87	22.0	0.124	3.1	6.00	SST	CG	N
1.390	35.31	10359	2.06	52.4	1.016	25.8	213	37	.62	16	132	588	1.26	32.1	0.187	4.7	6.75	SPR	CG	Z
1.390	35.31	10498	2.22	56.4	1.194	30.3	13	2.2	1.6	40	20.3	90	.66	16.8	0.098	2.5	6.75	SPR	CG	Z
1.390	35.31	10300	2.25	57.2	1.190	30.2	19	3.4	1.2	32	24	106	.55	14.0	0.100	2.5	5.50	SPR	CG	Z
1.390	35.31	12124	2.72	69.0	1.220	31.0	5.6	.99	2.0	52	11	51	.68	17.3	0.085	2.2	8.00	SPR	CG	Z
1.390	35.31	S-942	2.75	69.9	1.250	31.8	3.5	.61	2.3	59	8.1	36	.40	10.2	0.070	1.8	5.75	SST	CG	N
1.390	35.31	B8-37	2.75	69.9	.940	23.9	333	58	.65	17	218	968	2.03	51.4	0.225	5.7	9.00	SPR	CG	N
1.390	35.31	S-3248	3.06	77.8	1.232	31.3	5.5	.96	2.1	53	12	51	.47	12.0	0.079	2.0	6.00	SST	CG	N
1.390	35.31	S-1189	3.25	82.6	1.300	33.0	.26	.05	2.8	70	.73	3.2	.50	12.6	0.045	1.1	10.0	SST	C	N
1.390	35.31	S-1245	3.25	82.6	1.150	29.2	25	4.4	1.4	36	36	161	.84	21.3	0.120	3.0	7.00	SST	CG	N
1.390	35.31	3394	5.50	139.7	1.120	28.4	16	2.8	3.1	78	49	220	2.43	61.7	0.135	3.4	17.0	SPR	C	Z
1.390	35.31	11308	5.75	146.1	1.230	31.2	2.9	.51	4.4	112	13	57	.88	22.4	0.080	2.0	11.0	SPR	CG	Z
1.390	35.31	12680	5.88	149.2	1.114	28.3	18	3.2	3.2	82	58	259	2.45	62.2	0.138	3.5	16.8	SPR	C	Z
1.390	35.31	3398	6.50	165.1	1.006	25.6	103	18	1.4	35	143	635	2.50	63.4	0.192	4.9	13.0	SPR	CG	Z
1.390	35.31	3187	7.00	177.8	1.150	29.2	12	2.1	3.3	83	40	177	1.68	42.7	0.120	3.0	14.0	SPR	CG	Z
1.390	35.31	11978	8.00	203.2	1.034	26.3	44	7.7	2.7	69	120	533	3.65	92.7	0.178	4.5	20.5	SPR	CG	Z
1.390	35.31	12444	10.0	254.0	1.066	27.1	21	3.7	4.3	108	91	405	4.54	115.2	0.162	4.1	27.0	SPR	C	N
1.400	35.56	72766	2.25	57.2	1.076	27.3	116	20	1.1	28	127	563	1.05	26.7	0.162	4.1	6.50	MW	CG	N
1.400	35.56	72766S	2.25	57.2	1.076	27.3	99	17	.81	21	80	357	1.05	26.7	0.162	4.1	6.50	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.400	35.56	72775	2.25	57.2	1.046	26.6	169	30	.97	25	164	730	1.17	29.8	0.177	4.5	6.63	MW	CG	N
1.400	35.56	72775S	2.25	57.2	1.046	26.6	143	25	.73	18	104	463	1.17	29.8	0.177	4.5	6.63	SST	CG	N
1.400	35.56	72767	2.50	63.5	1.076	27.3	103	18	1.2	31	127	563	1.15	29.3	0.162	4.1	7.13	MW	CG	N
1.400	35.56	72767S	2.50	63.5	1.076	27.3	87	15	.92	23	80	357	1.15	29.3	0.162	4.1	7.13	SST	CG	N
1.400	35.56	72776	2.50	63.5	1.046	26.6	149	26	1.1	28	164	730	1.26	32.0	0.177	4.5	7.13	MW	CG	N
1.400	35.56	72776S	2.50	63.5	1.046	26.6	127	22	.82	21	104	463	1.26	32.0	0.177	4.5	7.13	SST	CG	N
1.400	35.56	72768	3.00	76.2	1.076	27.3	84	15	1.5	39	127	563	1.34	33.9	0.162	4.1	8.25	MW	CG	N
1.400	35.56	72768S	3.00	76.2	1.076	27.3	71	12	1.1	29	80	357	1.34	33.9	0.162	4.1	8.25	SST	CG	N
1.400	35.56	72777	3.00	76.2	1.046	26.6	120	21	1.4	35	164	730	1.48	37.7	0.177	4.5	8.38	MW	CG	N
1.400	35.56	72777S	3.00	76.2	1.046	26.6	102	18	1.0	26	104	463	1.48	37.7	0.177	4.5	8.38	SST	CG	N
1.400	35.56	72769	3.50	88.9	1.076	27.3	70	12	1.8	46	127	563	1.52	38.6	0.162	4.1	9.38	MW	CG	N
1.400	35.56	72769S	3.50	88.9	1.076	27.3	60	10	1.3	34	80	357	1.52	38.6	0.162	4.1	9.38	SST	CG	N
1.400	35.56	72778	3.50	88.9	1.046	26.6	100	18	1.6	42	164	730	1.73	43.8	0.177	4.5	9.75	MW	CG	N
1.400	35.56	72778S	3.50	88.9	1.046	26.6	85	15	1.2	31	104	463	1.73	43.8	0.177	4.5	9.75	SST	CG	N
1.400	35.56	72770	4.00	101.6	1.076	27.3	61	11	2.1	53	127	563	1.72	43.7	0.162	4.1	10.6	MW	CG	N
1.400	35.56	72770S	4.00	101.6	1.076	27.3	52	9.0	1.6	39	80	357	1.72	43.7	0.162	4.1	10.6	SST	CG	N
1.400	35.56	72779	4.00	101.6	1.046	26.6	87	15	1.9	48	164	730	1.92	48.9	0.177	4.5	10.9	MW	CG	N
1.400	35.56	72779S	4.00	101.6	1.046	26.6	74	13	1.4	36	104	463	1.92	48.9	0.177	4.5	10.9	SST	CG	N
1.400	35.56	72771	4.25	108.0	1.076	27.3	57	10	2.2	57	127	563	1.80	45.8	0.162	4.1	11.1	MW	CG	N
1.400	35.56	72771S	4.25	108.0	1.076	27.3	48	8.5	1.7	42	80	357	1.80	45.8	0.162	4.1	11.1	SST	CG	N
1.400	35.56	72780	4.25	108.0	1.046	26.6	81	14	2.0	51	164	730	2.04	51.7	0.177	4.5	11.5	MW	CG	N
1.400	35.56	72780S	4.25	108.0	1.046	26.6	69	12	1.5	38	104	463	2.04	51.7	0.177	4.5	11.5	SST	CG	N
1.400	35.56	72772	4.50	114.3	1.076	27.3	54	9.4	2.4	60	127	563	1.90	48.3	0.162	4.1	11.8	MW	CG	N
1.400	35.56	72772S	4.50	114.3	1.076	27.3	45	8.0	1.8	45	80	357	1.90	48.3	0.162	4.1	11.8	SST	CG	N
1.400	35.56	72781	4.50	114.3	1.046	26.6	76	13	2.2	55	164	730	2.15	54.5	0.177	4.5	12.1	MW	CG	N
1.400	35.56	72781S	4.50	114.3	1.046	26.6	65	11	1.6	41	104	463	2.15	54.5	0.177	4.5	12.1	SST	CG	N
1.400	35.56	72773	5.00	127.0	1.076	27.3	48	8.4	2.7	67	127	563	2.09	53.0	0.162	4.1	12.9	MW	CG	N
1.400	35.56	72773S	5.00	127.0	1.076	27.3	41	7.1	2.0	50	80	357	2.09	53.0	0.162	4.1	12.9	SST	CG	N
1.400	35.56	72782	5.00	127.0	1.046	26.6	69	12	2.4	60	164	730	2.32	59.0	0.177	4.5	13.1	MW	CG	N
1.400	35.56	72782S	5.00	127.0	1.046	26.6	59	10	1.8	45	104	463	2.32	59.0	0.177	4.5	13.1	SST	CG	N
1.400	35.56	72774	5.25	133.4	1.076	27.3	45	7.9	2.8	71	127	563	2.19	55.5	0.162	4.1	13.5	MW	CG	N
1.400	35.56	72774S	5.25	133.4	1.076	27.3	39	6.8	2.1	53	80	357	2.19	55.5	0.162	4.1	13.5	SST	CG	N
1.400	35.56	72783	5.25	133.4	1.046	26.6	65	11	2.5	64	164	730	2.46	62.4	0.177	4.5	13.9	MW	CG	N
1.400	35.56	72783S	5.25	133.4	1.046	26.6	55	9.7	1.9	48	104	463	2.46	62.4	0.177	4.5	13.9	SST	CG	N
1.406	35.71	S-1241	.75	19.1	1.136	28.9	202	35	.24	6.1	49	216	.41	10.3	0.135	3.4	3.00	SST	CG	N
1.406	35.71	S-70	.88	22.2	1.246	31.6	15	2.6	.60	15	8.7	39	.28	7.1	0.080	2.0	3.50	SST	CG	N
1.406	35.71	S-3246	1.00	25.4	1.322	33.6	.78	.14	.83	21	.65	2.9	.17	4.3	0.042	1.1	4.00	SST	CG	N
1.406	35.71	S-3024	1.00	25.4	1.256	31.9	9.6	1.7	.64	16	6.2	27	.36	9.0	0.075	1.9	3.75	SST	C	N
1.406	35.71	S-3018	1.13	28.6	1.226	31.1	18	3.2	.68	17	12	54	.45	11.4	0.090	2.3	4.00	SST	C	N
1.406	35.71	S-3075	1.13	28.6	1.032	26.2	563	99	.20	5.1	113	501	.65	16.6	0.187	4.7	3.50	SST	CG	N
1.406	35.71	NN-77	1.22	31.0	1.086	27.6	288	50	.27	6.8	77	343	.56	14.2	0.160	4.1	3.50	SST	CG	N
1.406	35.71	3017	1.25	31.8	1.282	32.6	2.5	.44	.85	22	2.1	9.4	.40	10.2	0.062	1.6	5.50	SPR	C	Z
1.406	35.71	11980	1.25	31.8	1.082	27.5	343	60	.26	6.7	90	401	.57	14.4	0.162	4.1	3.50	SPR	CG	Z
1.406	35.71	3324	1.28	32.5	1.166	29.6	47	8.2	.68	17	32	142	.60	15.2	0.120	3.0	5.00	HD	CG	Z
1.406	35.71	12192	1.34	34.1	1.296	32.9	2.1	.37	1.0	26	2.2	9.9	.30	7.7	0.055	1.4	4.50	SPR	C	Z
1.406	35.71	11908	1.50	38.1	1.300	33.0	1.6	.28	1.2	31	2.0	8.7	.29	7.4	0.053	1.3	4.50	SST	C	N
1.406	35.71	12009	1.50	38.1	1.296	32.9	.82	.14	1.0	26	.85	3.8	.47	11.9	0.055	1.4	8.50	SPR	CG	GI
1.406	35.71	S-333	1.50	38.1	1.136	28.9	67	12	.72	18	49	216	.68	17.1	0.135	3.4	5.00	SST	CG	N
1.406	35.71	S-1676	1.63	41.3	1.240	31.5	13	2.3	1.0	26	13	59	.42	10.5	0.083	2.1	4.00	SST	C	N
1.406	35.71	281	1.75	44.5	1.110	28.2	104	18	.68	17	71	315	.79	20.0	0.148	3.8	5.33	HD	CG	Z
1.406	35.71	11424	1.91	48.4	1.032	26.2	216	38	.61	15	131	582	1.22	30.9	0.187	4.7	6.50	SPR	CG	N
1.406	35.71	11283	2.13	54.0	1.224	31.1	8.7	1.5	1.5	38	13	57	.64	16.2	0.091	2.3	7.00	HD	CG	Z
1.406	35.71	10547	2.13	54.0	1.034	26.3	199	35	.65	16	129	573	1.26	31.9	0.186	4.7	6.75	SPR	CG	Z
1.406	35.71	S-1250	2.50	63.5	1.136	28.9	43	7.5	1.1	29	49	216	.91	23.1	0.135	3.4	6.75	SST	CG	N
1.406	35.71	12058	3.16	80.2	.992	25.2	236	41	.75	19	176	782	1.76	44.7	0.207	5.3	8.50	SPR	CG	Z
1.406	35.71	1683	3.25	82.6	.984	25.0	257	45	.72	18	186	826	1.79	45.6	0.211	5.4	8.50	SPR	CG	Z
1.406	35.71	S-1214	3.75	95.3	1.222	31.0	4.4	.77	2.7	70	12	53	1.01	25.7	0.092	2.3	11.0	SST	CG	N
1.406	35.71	3056	4.00	101.6	1.262	32.1	1.5	.26	3.0	76	4.4	20	1.01	25.6	0.072	1.8	13.0	SPR	C	Z
1.406	35.71	11914	4.00	101.6	1.230	31.2	4.8	.84	3.2	81	15	68	.79	20.1	0.088	2.2	9.00	SST	CG	N
1.406	35.71	12445	4.13	104.8	1.264	32.1	1.4	.24	3.2	81	4.5	20	.92	23.4	0.071	1.8	13.0	SPR	CG	Z
1.406	35.71	S-3233	4.25	108.0	1.196	30.4	4.6	.81	2.3	59	11	48	1.92	48.7	0.105	2.7	17.3	SST	C	N
1.406	35.71	11282	4.25	108.0	.956	24.3	317	56	.57	15	181	807	1.86	47.1	0.225	5.7	8.25	SST	CG	N
1.406	35.71	12167	4.41	111.9	1.216	30.9	6.5	1.1	3.1	79	20	90	.95	24.1	0.095	2.4	10.0	SPR	CG	N
1.406	35.71	11906	5.75	146.1	1.170	29.7	14	2.5	2.6	65	37	166	1.30	33.0	0.118	3.0	11.0	SPR	CG	N
1.406	35.71	2756	6.00	152.4	1.166	29.6	11	2.0	3.5	89	39	175	1.74	44.2	0.120	3.0	14.5	SPR	CG	Z
1.406	35.71	12151	6.66	169.1	1.258	32.0	2.4	.43	4.1	105	10	45	.78	19.7	0.074	1.9	9.50	SPR	C	Z
1.406	35.71	12413	7.00	177.8	1.168	29.7	11	2.0	3.4	86	38	170	1.79	45.3	0.119	3.0	14.0	SPR	C	N
1.406	35.71	12077	8.00	203.2	.902	22.9	222	39	1.3	34	298	1327	4.79	121.6	0.252	6.4	19.0	SPR	CG	Z
1.406	35.71	3490	12.5	317.5	1.110	28.2	12	2.1	6.0	152	71	315	4.63	117.6	0.148	3.8	30.5	SPR	C	Z
1.406	35.71	10980	13.5	342.9	.970	24.6	62	11	3.3	83	204	908	7.19	182.7	0.218	5.5	33.0	HD	CG	Z
1.406	35.71	4013	18.5	469.9	1.046	26.6	16	2.9	7.1	181	117	521	9.36	237.7	0.180	4.6	52.0	SPR	CG	Z
1.421	36.09	S-336	1.19	30.2	1.203	30.6	46	8.0	.61	16	28	125	.41	10.4	0.109	2.8	3.75	SST	CG	N
1.421	36.09	S-1229	1.38	34.9	1.321	33.6	1.0	.18	1.1	27	1.1	4.8	.30	7.6	0.050	1.3	5.00	SST	C	N
1.421	36.09	4395	2.19	55.6	1.249	31.7	7.0	1.2	1.6	41	11	50	.58	14.7	0.086	2.2	6.75	SPR	CG	Z
1.421	36.09	S-3229	2.50	63.5	1.275	32.4	4.4	.78	2.0	51	9.0	40	.46	11.7	0.073	1.9	5.33	SST	C	N
1.421	36.09	2733	2.50	63.5	1.171	29.7	40	7.1	1.5	39	61	272	.75	19.1	0.125	3.2	6.00	MW	CG	Z
1.421	36.09	1913	2.75	69.9	1.211	30.8	11	1.9	1.8	46	20	88	.95	24.0	0.105	2.7	9.00	SPR	CG	Z
1.421	36.09	3328	2.75	69.9	1.001	25.4	242	42	.75	19	182	807	1.79	45.3	0.210	5.3	8.50	SPR	CG	Z
1.421	36.09	S-3022	3.00	76.2	1.109	28.2	66	12	1.1	27	71	315	1.17	29.7	0.156	4.0	7.50	SST	CG	N
1.421	36.09	11930	3.03	77.0	1.211	30.8	15	2.7	1.8	45	27	120	.74	18.7	0.105	2.7	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.421	36.09	4194	4.00	101.6	1.281	32.5	1.3	.22	3.0	77	3.8	17	.98	24.9	0.070	1.8	13.0	SPR	C	Z
1.421	36.09	3141	5.13	130.2	1.261	32.0	2.6	.45	4.1	105	11	47	1.00	25.4	0.080	2.0	11.5	SPR	C	Z
1.421	36.09	12460	12.0	304.8	1.003	25.5	55	9.5	3.3	83	179	796	6.32	160.6	0.209	5.3	30.3	SPR	CG	N
1.421	36.09	4018	27.5	698.5	.921	23.4	60	11	4.8	122	289	1285	15.0	381.0	0.250	6.4	60.0	SPR	CG	N
1.437	36.50	S-1550	.56	14.3	1.237	31.4	70	12	.29	7.3	20	89	.28	7.0	0.100	2.5	2.75	SST	CG	N
1.437	36.50	DD-88	.69	17.4	1.217	30.9	45	7.9	.25	6.3	11	49	.44	11.2	0.110	2.8	4.00	SPR	CG	Z
1.437	36.50	S-3059	.88	22.2	1.281	32.5	12	2.2	.52	13	6.4	29	.35	8.9	0.078	2.0	3.50	SST	C	N
1.437	36.50	12222	1.00	25.4	1.293	32.8	15	2.7	.60	15	9.1	40	.22	5.5	0.072	1.8	3.00	SPR	CG	Z
1.437	36.50	S-151	1.50	38.1	1.347	34.2	.32	.06	1.1	28	.35	1.5	.41	10.3	0.045	1.1	8.00	SST	C	N
1.437	36.50	S-1033	1.50	38.1	1.277	32.4	5.9	1.0	.98	25	5.7	26	.52	13.2	0.080	2.0	5.50	SST	C	N
1.437	36.50	11360	1.50	38.1	1.255	31.9	12	2.1	1.0	27	12	56	.46	11.6	0.091	2.3	5.00	SST	CG	N
1.437	36.50	3071	1.50	38.1	1.173	29.8	56	9.8	.77	20	43	193	.73	18.4	0.132	3.4	5.50	SPR	CG	Z
1.437	36.50	S-944	1.69	42.8	1.237	31.4	26	4.6	.82	21	21	95	.40	10.2	0.100	2.5	4.00	SST	CG	N
1.437	36.50	12487	1.75	44.5	1.317	33.5	1.0	.18	1.2	31	1.3	5.6	.54	13.7	0.060	1.5	8.00	SST	C	N
1.437	36.50	B17-167	1.84	46.8	1.125	28.6	135	24	.58	15	79	351	.78	19.8	0.156	4.0	5.00	SPR	CG	N
1.437	36.50	11531	2.72	69.0	1.013	25.7	234	41	.65	17	152	678	2.07	52.5	0.212	5.4	8.75	SPR	CG	Z
1.437	36.50	3909	2.75	69.9	1.317	33.5	1.8	.31	2.3	59	4.2	18	.42	10.7	0.060	1.5	6.00	SPR	C	Z
1.437	36.50	3288	2.75	69.9	1.017	25.8	275	48	.65	17	180	799	1.58	40.0	0.210	5.3	7.50	SPR	CG	Z
1.437	36.50	12069	2.88	73.0	1.287	32.7	3.0	.53	2.3	58	6.8	30	.60	15.2	0.075	1.9	8.00	SPR	CG	Z
1.437	36.50	3704	3.00	76.2	1.327	33.7	1.2	.22	2.7	68	3.3	15	.33	8.4	0.055	1.4	6.00	SPR	CG	Z
1.437	36.50	2753	3.13	79.4	1.287	32.7	3.0	.53	2.5	64	7.6	34	.60	15.2	0.075	1.9	8.00	HD	CG	Z
1.437	36.50	10719	3.31	84.1	1.335	33.9	.52	.09	2.9	72	1.5	6.6	.46	11.7	0.051	1.3	9.00	SPR	CG	Z
1.437	36.50	3407	3.38	85.7	1.177	29.9	31	5.4	1.5	39	47	210	1.04	26.4	0.130	3.3	8.00	SPR	CG	Z
1.437	36.50	S-303	3.59	91.3	1.277	32.4	2.6	.46	2.8	71	7.3	32	.80	20.3	0.080	2.0	10.0	SST	CG	N
1.437	36.50	10594	3.75	95.3	1.265	32.1	3.2	.56	2.7	69	8.7	39	1.03	26.2	0.086	2.2	12.0	SPR	CG	Z
1.437	36.50	10823	4.00	101.6	1.167	29.6	30	5.2	1.8	45	53	235	1.38	35.1	0.135	3.4	9.25	SPR	C	Z
1.437	36.50	S-369	4.88	123.8	1.137	28.9	37	6.5	1.7	43	63	278	1.50	38.1	0.150	3.8	10.0	SST	CG	N
1.437	36.50	7007	5.63	142.9	1.023	26.0	100	18	1.7	44	172	767	3.60	91.4	0.207	5.3	16.3	HD	C	Z
1.437	36.50	3049	6.88	174.6	1.077	27.4	47	8.3	2.4	62	115	510	3.26	82.9	0.180	4.6	18.0	SPR	CG	Z
1.437	36.50	10454	8.88	225.4	1.187	30.1	13	2.2	3.5	88	43	193	2.02	51.2	0.125	3.2	15.8	SPR	CG	Z
1.437	36.50	4236	14.5	368.3	1.083	27.5	20	3.6	5.6	142	114	509	6.64	168.6	0.177	4.5	36.5	SPR	C	Z
1.437	36.50	4040	20.5	520.7	1.113	28.3	12	2.1	7.4	188	88	392	6.40	162.6	0.162	4.1	40.0	SPR	CG	Z
1.437	36.50	4029	23.0	584.2	1.113	28.3	12	2.1	7.2	183	88	392	6.64	168.7	0.162	4.1	41.0	SPR	CG	Z
1.453	36.91	3299	1.53	38.9	1.227	31.2	49	8.5	.65	17	32	142	.45	11.5	0.113	2.9	4.00	SPR	CG	Z
1.453	36.91	3297	1.75	44.5	1.243	31.6	12	2.1	.91	23	11	48	.84	21.3	0.105	2.7	8.00	HD	CG	Z
1.453	36.91	12297	1.94	49.2	1.323	33.6	3.2	.56	1.6	41	5.2	23	.33	8.3	0.065	1.7	5.00	SPR	CG	Z
1.453	36.91	10339	2.06	52.4	1.233	31.3	35	6.1	.85	21	29	131	.50	12.6	0.110	2.8	4.50	SPR	CG	Z
1.453	36.91	4359	2.06	52.4	1.069	27.2	216	38	.63	16	137	610	1.25	31.7	0.192	4.9	6.50	SPR	CG	Z
1.453	36.91	11791	2.41	61.1	1.203	30.6	37	6.6	1.1	29	43	191	.75	19.1	0.125	3.2	6.00	SPR	CG	Z
1.453	36.91	12616	2.50	63.5	1.203	30.6	37	6.6	1.6	41	60	267	.88	22.2	0.125	3.2	6.00	MW	C	N
1.453	36.91	B11-63	2.84	72.2	1.157	29.4	62	11	1.1	28	69	305	1.04	26.3	0.148	3.8	7.00	SPR	CG	N
1.453	36.91	B17-203	2.88	73.0	1.275	32.4	6.3	1.1	2.3	57	14	63	.62	15.8	0.089	2.3	7.00	SST	CG	N
1.453	36.91	11238	3.00	76.2	1.141	29.0	58	10	1.4	34	78	348	1.37	34.7	0.156	4.0	8.75	SPR	CG	Z
1.453	36.91	12177	3.03	77.0	1.269	32.2	7.8	1.4	2.3	58	18	80	.67	16.9	0.092	2.3	7.25	SPR	CG	GI
1.453	36.91	4026	20.3	514.4	1.123	28.5	12	2.1	7.8	197	92	410	7.26	184.4	0.165	4.2	44.0	SPR	CG	Z
1.453	36.91	4038	21.0	533.4	1.099	27.9	16	2.9	6.9	176	113	503	7.70	195.6	0.177	4.5	43.5	SPR	CG	Z
1.453	36.91	4032	22.5	571.5	1.093	27.8	16	2.7	7.3	185	114	505	8.82	224.0	0.180	4.6	49.0	SPR	CG	Z
1.460	37.08	72784	1.50	38.1	1.236	31.4	41	7.2	1.0	26	42	188	.48	12.1	0.112	2.8	4.25	MW	CG	N
1.460	37.08	72784S	1.50	38.1	1.236	31.4	35	6.1	.80	20	28	125	.48	12.1	0.112	2.8	4.25	SST	CG	N
1.460	37.08	72794	1.50	38.1	1.210	30.7	61	11	.95	24	58	257	.55	13.9	0.125	3.2	4.38	MW	CG	N
1.460	37.08	72794S	1.50	38.1	1.210	30.7	52	9.0	.76	19	39	173	.55	13.9	0.125	3.2	4.38	SST	CG	N
1.460	37.08	72800	1.50	38.1	1.190	30.2	80	14	.89	23	72	319	.61	15.4	0.135	3.4	4.50	MW	CG	N
1.460	37.08	72800S	1.50	38.1	1.190	30.2	68	12	.69	17	47	209	.61	15.4	0.135	3.4	4.50	SST	CG	N
1.460	37.08	72810	1.50	38.1	1.164	29.6	114	20	.82	21	93	412	.68	17.4	0.148	3.8	4.63	MW	CG	N
1.460	37.08	72810S	1.50	38.1	1.164	29.6	97	17	.64	16	62	274	.68	17.4	0.148	3.8	4.63	SST	CG	N
1.460	37.08	72817	1.50	38.1	1.148	29.2	143	25	.76	19	109	485	.72	18.3	0.156	4.0	4.63	MW	CG	N
1.460	37.08	72817S	1.50	38.1	1.148	29.2	122	21	.57	14	69	307	.72	18.3	0.156	4.0	4.63	SST	CG	N
1.460	37.08	72832	1.50	38.1	1.136	28.9	162	28	.73	19	119	528	.77	19.5	0.162	4.1	4.75	MW	CG	N
1.460	37.08	72832S	1.50	38.1	1.136	28.9	138	24	.56	14	77	343	.77	19.5	0.162	4.1	4.75	SST	CG	N
1.460	37.08	72841	1.50	38.1	1.106	28.1	240	42	.66	17	158	702	.84	21.4	0.177	4.5	4.75	MW	CG	N
1.460	37.08	72841S	1.50	38.1	1.106	28.1	204	36	.49	12	100	445	.84	21.4	0.177	4.5	4.75	SST	CG	N
1.460	37.08	72785	2.00	50.8	1.236	31.4	30	5.2	1.4	36	42	188	.57	14.6	0.112	2.8	5.13	MW	CG	N
1.460	37.08	72785S	2.00	50.8	1.236	31.4	25	4.4	1.1	28	28	125	.57	14.6	0.112	2.8	5.13	SST	CG	N
1.460	37.08	72795	2.00	50.8	1.210	30.7	43	7.6	1.3	34	58	256	.67	17.1	0.125	3.2	5.38	MW	CG	N
1.460	37.08	72795S	2.00	50.8	1.210	30.7	37	6.5	1.1	27	39	173	.67	17.1	0.125	3.2	5.38	SST	CG	N
1.460	37.08	72801	2.00	50.8	1.190	30.2	57	10	1.2	32	71	315	.76	19.3	0.135	3.4	5.63	MW	CG	N
1.460	37.08	72801S	2.00	50.8	1.190	30.2	49	8.5	.97	25	47	209	.76	19.3	0.135	3.4	5.63	SST	CG	N
1.460	37.08	72811	2.00	50.8	1.164	29.6	80	14	1.1	29	92	410	.85	21.6	0.148	3.8	5.75	MW	CG	N
1.460	37.08	72811S	2.00	50.8	1.164	29.6	68	12	.90	23	62	274	.85	21.6	0.148	3.8	5.75	SST	CG	N
1.460	37.08	72819	2.00	50.8	1.148	29.2	101	18	1.1	27	109	485	.90	22.8	0.156	4.0	5.75	MW	CG	N
1.460	37.08	72819S	2.00	50.8	1.148	29.2	86	15	.81	20	69	307	.90	22.8	0.156	4.0	5.75	SST	CG	N
1.460	37.08	72833	2.00	50.8	1.136	28.9	114	20	1.0	26	117	521	.97	24.7	0.162	4.1	6.00	MW	CG	N
1.460	37.08	72833S	2.00	50.8	1.136	28.9	97	17	.80	20	77	343	.97	24.7	0.162	4.1	6.00	SST	CG	N
1.460	37.08	72843	2.00	50.8	1.106	28.1	167	29	.94	24	157	696	1.06	27.0	0.177	4.5	6.00	MW	CG	N
1.460	37.08	72843S	2.00	50.8	1.106	28.1	142	25	.71	18	100	445	1.06	27.0	0.177	4.5	6.00	SST	CG	N
1.460	37.08	72786	2.50	63.5	1.236	31.4	23	4.0	1.8	46	42	188	.67	17.1	0.112	2.8	6.00	MW	CG	N
1.460	37.08	72786S	2.50	63.5	1.236	31.4	20	3.4	1.4	36	28	125	.67	17.1	0.112	2.8	6.00	SST	CG	N
1.460	37.08	72796	2.50	63.5	1.210	30.7	34	5.9	1.7	43	57	255	.80	20.2	0.125	3.2	6.38	MW	CG	N
1.460	37.08	72796S	2.50	63.5	1.210	30.7	29	5.0	1.4	35	39	173	.80	20.2	0.125	3.2	6.38	SST	CG	N
1.460	37.08	72802	2.50	63.5	1.190	30.2	44	7.8	1.6	41	71	316	.89	22.7	0.135	3.4	6.63	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.460	37.08	72802S	2.50	63.5	1.190	30.2	38	6.6	1.2	32	47	209	.89	22.7	0.135	3.4	6.63	SST	CG	N
1.460	37.08	72812	2.50	63.5	1.164	29.6	62	11	1.5	38	92	409	1.02	25.8	0.148	3.8	6.88	MW	CG	N
1.460	37.08	72812S	2.50	63.5	1.164	29.6	53	9.2	1.2	30	62	274	1.02	25.8	0.148	3.8	6.88	SST	CG	N
1.460	37.08	72821	2.50	63.5	1.148	29.2	78	14	1.4	36	109	485	1.07	27.2	0.156	4.0	6.88	MW	CG	N
1.460	37.08	72821S	2.50	63.5	1.148	29.2	66	12	1.0	27	69	307	1.07	27.2	0.156	4.0	6.88	SST	CG	N
1.460	37.08	72834	2.50	63.5	1.136	28.9	88	15	1.3	34	118	526	1.15	29.3	0.162	4.1	7.13	MW	CG	N
1.460	37.08	72834S	2.50	63.5	1.136	28.9	75	13	1.0	26	77	343	1.15	29.3	0.162	4.1	7.13	SST	CG	N
1.460	37.08	72845	2.50	63.5	1.106	28.1	128	22	1.2	31	156	693	1.28	32.6	0.177	4.5	7.25	MW	CG	N
1.460	37.08	72845S	2.50	63.5	1.106	28.1	109	19	.92	23	100	445	1.28	32.6	0.177	4.5	7.25	SST	CG	N
1.460	37.08	72856	2.50	63.5	1.086	27.6	168	29	1.1	27	179	795	1.33	33.8	0.187	4.7	7.13	MW	CG	N
1.460	37.08	72856S	2.50	63.5	1.086	27.6	143	25	.76	19	109	484	1.33	33.8	0.187	4.7	7.13	SST	CG	N
1.460	37.08	72787	3.00	76.2	1.236	31.4	19	3.3	2.2	57	42	188	.77	19.6	0.112	2.8	6.88	MW	CG	N
1.460	37.08	72787S	3.00	76.2	1.236	31.4	16	2.8	1.7	44	28	125	.77	19.6	0.112	2.8	6.88	SST	CG	N
1.460	37.08	72797	3.00	76.2	1.210	30.7	28	4.8	2.1	53	57	255	.92	23.4	0.125	3.2	7.38	MW	CG	N
1.460	37.08	72797S	3.00	76.2	1.210	30.7	23	4.1	1.7	42	39	173	.92	23.4	0.125	3.2	7.38	SST	CG	N
1.460	37.08	72803	3.00	76.2	1.190	30.2	36	6.3	2.0	50	71	317	1.03	26.1	0.135	3.4	7.63	MW	CG	N
1.460	37.08	72803S	3.00	76.2	1.190	30.2	31	5.4	1.5	39	47	209	1.03	26.1	0.135	3.4	7.63	SST	CG	N
1.460	37.08	72813	3.00	76.2	1.164	29.6	51	8.9	1.8	46	92	409	1.18	30.1	0.148	3.8	8.00	MW	CG	N
1.460	37.08	72813S	3.00	76.2	1.164	29.6	43	7.5	1.4	36	62	274	1.18	30.1	0.148	3.8	8.00	SST	CG	N
1.460	37.08	72823	3.00	76.2	1.148	29.2	63	11	1.7	44	109	485	1.25	31.7	0.156	4.0	8.00	MW	CG	N
1.460	37.08	72823S	3.00	76.2	1.148	29.2	54	9.4	1.3	33	69	307	1.25	31.7	0.156	4.0	8.00	SST	CG	N
1.460	37.08	72835	3.00	76.2	1.136	28.9	71	13	1.6	42	117	522	1.36	34.5	0.162	4.1	8.38	MW	CG	N
1.460	37.08	72835S	3.00	76.2	1.136	28.9	61	11	1.3	32	77	343	1.36	34.5	0.162	4.1	8.38	SST	CG	N
1.460	37.08	72847	3.00	76.2	1.106	28.1	104	18	1.5	39	158	701	1.48	37.7	0.177	4.5	8.38	MW	CG	N
1.460	37.08	72847S	3.00	76.2	1.106	28.1	88	15	1.1	29	100	445	1.48	37.7	0.177	4.5	8.38	SST	CG	N
1.460	37.08	72857	3.00	76.2	1.086	27.6	138	24	1.3	33	179	795	1.52	38.6	0.187	4.7	8.13	MW	CG	N
1.460	37.08	72857S	3.00	76.2	1.086	27.6	117	21	.93	24	109	484	1.52	38.6	0.187	4.7	8.13	SST	CG	N
1.460	37.08	72788	3.50	88.9	1.236	31.4	16	2.8	2.6	67	42	188	.87	22.0	0.112	2.8	7.75	MW	CG	N
1.460	37.08	72788S	3.50	88.9	1.236	31.4	14	2.4	2.1	52	28	125	.87	22.0	0.112	2.8	7.75	SST	CG	N
1.460	37.08	72798	3.50	88.9	1.210	30.7	23	4.1	2.5	62	57	254	1.05	26.6	0.125	3.2	8.38	MW	CG	N
1.460	37.08	72798S	3.50	88.9	1.210	30.7	20	3.5	2.0	50	39	173	1.05	26.6	0.125	3.2	8.38	SST	CG	N
1.460	37.08	72804	3.50	88.9	1.190	30.2	31	5.4	2.3	59	71	316	1.18	30.0	0.135	3.4	8.75	MW	CG	N
1.460	37.08	72804S	3.50	88.9	1.190	30.2	26	4.6	1.8	46	47	209	1.18	30.0	0.135	3.4	8.75	SST	CG	N
1.460	37.08	72814	3.50	88.9	1.164	29.6	43	7.5	2.1	55	92	408	1.35	34.3	0.148	3.8	9.13	MW	CG	N
1.460	37.08	72814S	3.50	88.9	1.164	29.6	36	6.4	1.7	43	62	274	1.35	34.3	0.148	3.8	9.13	SST	CG	N
1.460	37.08	72825	3.50	88.9	1.148	29.2	53	9.4	2.0	52	109	485	1.44	36.7	0.156	4.0	9.25	MW	CG	N
1.460	37.08	72825S	3.50	88.9	1.148	29.2	45	7.9	1.5	39	69	307	1.44	36.7	0.156	4.0	9.25	SST	CG	N
1.460	37.08	72836	3.50	88.9	1.136	28.9	60	11	2.0	50	118	524	1.54	39.1	0.162	4.1	9.50	MW	CG	N
1.460	37.08	72836S	3.50	88.9	1.136	28.9	51	8.9	1.5	38	77	343	1.54	39.1	0.162	4.1	9.50	SST	CG	N
1.460	37.08	72849	3.50	88.9	1.106	28.1	87	15	1.8	46	157	698	1.70	43.3	0.177	4.5	9.63	MW	CG	N
1.460	37.08	72849S	3.50	88.9	1.106	28.1	74	13	1.3	34	100	445	1.70	43.3	0.177	4.5	9.63	SST	CG	N
1.460	37.08	72858	3.50	88.9	1.086	27.6	116	20	1.5	39	179	795	1.75	44.5	0.187	4.7	9.38	MW	CG	N
1.460	37.08	72858S	3.50	88.9	1.086	27.6	99	17	1.1	28	109	484	1.75	44.5	0.187	4.7	9.38	SST	CG	N
1.460	37.08	72789	4.00	101.6	1.236	31.4	14	2.4	3.0	77	42	188	.97	24.5	0.112	2.8	8.63	MW	CG	N
1.460	37.08	72789S	4.00	101.6	1.236	31.4	12	2.1	2.4	61	28	125	.97	24.5	0.112	2.8	8.63	SST	CG	N
1.460	37.08	72799	4.00	101.6	1.210	30.7	20	3.5	2.8	72	57	256	1.16	29.4	0.125	3.2	9.25	MW	CG	N
1.460	37.08	72799S	4.00	101.6	1.210	30.7	17	3.0	2.3	58	39	173	1.16	29.4	0.125	3.2	9.25	SST	CG	N
1.460	37.08	72805	4.00	101.6	1.190	30.2	27	4.6	2.7	68	71	316	1.32	33.4	0.135	3.4	9.75	MW	CG	N
1.460	37.08	72805S	4.00	101.6	1.190	30.2	23	3.9	2.1	53	47	209	1.32	33.4	0.135	3.4	9.75	SST	CG	N
1.460	37.08	72815	4.00	101.6	1.164	29.6	37	6.5	2.5	63	92	409	1.52	38.5	0.148	3.8	10.3	MW	CG	N
1.460	37.08	72815S	4.00	101.6	1.164	29.6	31	5.5	2.0	50	62	274	1.52	38.5	0.148	3.8	10.3	SST	CG	N
1.460	37.08	72827	4.00	101.6	1.148	29.2	46	8.1	2.4	60	109	485	1.60	40.6	0.156	4.0	10.3	MW	CG	N
1.460	37.08	72827S	4.00	101.6	1.148	29.2	39	6.9	1.8	45	69	307	1.60	40.6	0.156	4.0	10.3	SST	CG	N
1.460	37.08	72837	4.00	101.6	1.136	28.9	52	9.1	2.3	57	117	522	1.74	44.2	0.162	4.1	10.8	MW	CG	N
1.460	37.08	72837S	4.00	101.6	1.136	28.9	44	7.7	1.7	44	77	343	1.74	44.2	0.162	4.1	10.8	SST	CG	N
1.460	37.08	72851	4.00	101.6	1.106	28.1	75	13	2.1	53	156	695	1.92	48.9	0.177	4.5	10.9	MW	CG	N
1.460	37.08	72851S	4.00	101.6	1.106	28.1	64	11	1.6	40	100	445	1.92	48.9	0.177	4.5	10.9	SST	CG	N
1.460	37.08	72859	4.00	101.6	1.086	27.6	99	17	1.8	46	179	795	1.99	50.5	0.187	4.7	10.6	MW	CG	N
1.460	37.08	72859S	4.00	101.6	1.086	27.6	84	15	1.3	33	109	484	1.99	50.5	0.187	4.7	10.6	SST	CG	N
1.460	37.08	72860	4.25	108.0	1.086	27.6	92	16	1.9	49	179	795	2.10	53.4	0.187	4.7	11.3	MW	CG	N
1.460	37.08	72860S	4.25	108.0	1.086	27.6	78	14	1.4	35	109	484	2.10	53.4	0.187	4.7	11.3	SST	CG	N
1.460	37.08	72791	4.50	114.3	1.236	31.4	14	2.4	3.1	79	43	192	.97	24.5	0.112	2.8	8.63	MW	CG	N
1.460	37.08	72791S	4.50	114.3	1.236	31.4	12	2.1	2.4	61	28	125	.97	24.5	0.112	2.8	8.63	SST	CG	N
1.460	37.08	72807	4.50	114.3	1.190	30.2	24	4.2	3.1	77	73	324	1.43	36.4	0.135	3.4	10.6	MW	CG	N
1.460	37.08	72807S	4.50	114.3	1.190	30.2	20	3.6	2.3	59	47	209	1.43	36.4	0.135	3.4	10.6	SST	CG	N
1.460	37.08	72829	4.50	114.3	1.148	29.2	41	7.1	2.7	68	109	485	1.77	45.1	0.156	4.0	11.4	MW	CG	N
1.460	37.08	72829S	4.50	114.3	1.148	29.2	35	6.1	2.0	51	69	307	1.77	45.1	0.156	4.0	11.4	SST	CG	N
1.460	37.08	72838	4.50	114.3	1.136	28.9	46	8.0	2.6	65	118	524	1.92	48.9	0.162	4.1	11.9	MW	CG	N
1.460	37.08	72838S	4.50	114.3	1.136	28.9	39	6.8	2.0	50	77	343	1.92	48.9	0.162	4.1	11.9	SST	CG	N
1.460	37.08	72853	4.50	114.3	1.106	28.1	66	12	2.4	60	156	694	2.15	54.5	0.177	4.5	12.1	MW	CG	N
1.460	37.08	72853S	4.50	114.3	1.106	28.1	56	9.9	1.8	45	100	445	2.15	54.5	0.177	4.5	12.1	SST	CG	N
1.460	37.08	72861	4.50	114.3	1.086	27.6	86	15	2.1	53	179	795	2.22	56.4	0.187	4.7	11.9	MW	CG	N
1.460	37.08	72861S	4.50	114.3	1.086	27.6	73	13	1.5	38	109	484	2.22	56.4	0.187	4.7	11.9	SST	CG	N
1.460	37.08	72793	5.00	127.0	1.236	31.4	13	2.2	3.4	88	43	192	1.05	26.7	0.112	2.8	9.38	MW	CG	N
1.460	37.08	72793S	5.00	127.0	1.236	31.4	11	1.9	2.7	67	28	125	1.05	26.7	0.112	2.8	9.38	SST	CG	N
1.460	37.08	72809	5.00	127.0	1.190	30.2	21	3.7	3.4	87	73	324	1.57	39.9	0.135	3.4	11.6	MW	CG	N
1.460	37.08	72809S	5.00	127.0	1.190	30.2	18	3.2	2.6	66	47	209	1.57	39.9	0.135	3.4	11.6	SST	CG	N
1.460	37.08	72831	5.00	127.0	1.148	29.2	36	6.4	3.0	76	109	485	1.97	50.0	0.156	4.0	12.6	MW	CG	N
1.460	37.08	72831S	5.00	127.0	1.148	29.2	31	5.4	2.2	57	69	307	1.97	50.0	0.156	4.0	12.6	SST	CG	N
1.460	37.08	72839	5.00	127.0	1.136	28.9	41	7.1	2.9	73	117	522	2.13	54.0	0.162	4.1	13.1	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.460	37.08	72839S	5.00	127.0	1.136	28.9	35	6.1	2.2	57	77	343	2.13	54.0	0.162	4.1	13.1	SST	CG	N
1.460	37.08	72855	5.00	127.0	1.106	28.1	59	10	2.7	67	157	698	2.35	59.6	0.177	4.5	13.3	MW	CG	N
1.460	37.08	72855S	5.00	127.0	1.106	28.1	50	8.8	2.0	51	100	445	2.35	59.6	0.177	4.5	13.3	SST	CG	N
1.460	37.08	72862	5.00	127.0	1.086	27.6	77	13	2.3	59	179	795	2.45	62.3	0.187	4.7	13.1	MW	CG	N
1.460	37.08	72862S	5.00	127.0	1.086	27.6	65	11	1.7	42	109	484	2.45	62.3	0.187	4.7	13.1	SST	CG	N
1.460	37.08	72863	5.25	133.4	1.086	27.6	73	13	2.4	62	179	795	2.55	64.7	0.187	4.7	13.6	MW	CG	N
1.460	37.08	72863S	5.25	133.4	1.086	27.6	62	11	1.8	45	109	484	2.55	64.7	0.187	4.7	13.6	SST	CG	N
1.468	37.29	S-3052	.69	17.4	1.410	35.8	.30	.05	.57	15	.17	.75	.12	2.9	0.029	0.7	3.00	SST	C	N
1.468	37.29	1853	1.00	25.4	1.198	30.4	134	24	.39	9.8	52	231	.47	12.0	0.135	3.4	3.50	SPR	CG	Z
1.468	37.29	3496	1.31	33.3	1.258	32.0	28	4.8	.84	21	23	103	.47	12.0	0.105	2.7	4.50	SPR	CG	Z
1.468	37.29	3456	1.31	33.3	1.018	25.9	959	168	.22	5.5	207	922	.90	22.9	0.225	5.7	4.00	SPR	CG	Z
1.468	37.29	11426	1.50	38.1	1.054	26.8	389	68	.37	9.5	146	648	1.04	26.3	0.207	5.3	5.00	SST	CG	N
1.468	37.29	S-1669	1.56	39.7	1.308	33.2	13	2.3	.88	22	11	51	.28	7.1	0.080	2.0	3.50	SST	CG	N
1.468	37.29	S-1358	1.75	44.5	1.268	32.2	24	4.3	.86	22	21	93	.40	10.2	0.100	2.5	4.00	SST	CG	N
1.468	37.29	S-1443	1.84	46.8	1.054	26.8	327	57	.45	11	146	648	1.14	28.9	0.207	5.3	5.50	SST	CG	N
1.468	37.29	S-3192	2.00	50.8	1.272	32.3	18	3.2	1.1	27	20	88	.44	11.2	0.098	2.5	4.50	SST	CG	N
1.468	37.29	S-1632	2.06	52.4	1.094	27.8	212	37	.51	13	108	482	1.03	26.1	0.187	4.7	5.50	SST	CG	N
1.468	37.29	11881	2.13	54.0	1.230	31.2	39	6.9	.94	24	37	163	.60	15.1	0.119	3.0	5.00	SPR	CG	N
1.468	37.29	S-987	2.13	54.0	1.226	31.1	35	6.2	1.0	25	35	157	.60	15.2	0.121	3.1	5.00	SST	CG	N
1.468	37.29	10336	2.19	55.6	.718	18.2	7917	1386	.10	2.6	799	3554	1.78	45.2	0.375	9.5	4.75	SPR	CG	Z
1.468	37.29	10368	2.25	57.2	1.084	27.5	235	41	.58	15	136	604	1.15	29.3	0.192	4.9	6.00	SPR	CG	Z
1.468	37.29	10317	2.38	60.3	1.068	27.1	215	38	.71	18	153	680	1.45	36.8	0.200	5.1	7.25	SPR	CG	Z
1.468	37.29	1743	2.41	61.1	1.304	33.1	4.9	.85	1.8	44	8.5	38	.66	16.7	0.082	2.1	7.00	HD	C	Z
1.468	37.29	S-1595	2.44	61.9	1.258	32.0	7.9	1.4	1.3	33	10	46	1.13	28.7	0.105	2.7	9.75	SST	CG	N
1.468	37.29	10048	2.44	61.9	1.054	26.8	251	44	.67	17	169	752	1.50	38.1	0.207	5.3	7.25	SPR	CG	Z
1.468	37.29	S-3057	2.50	63.5	1.284	32.6	11	2.0	1.4	36	16	73	.55	14.0	0.092	2.3	5.00	SST	C	N
1.468	37.29	10204	2.50	63.5	1.084	27.5	235	41	.58	15	136	604	1.15	29.3	0.192	4.9	6.00	SPR	CG	Z
1.468	37.29	10371	2.53	64.3	1.068	27.1	215	38	.71	18	153	680	1.45	36.8	0.200	5.1	7.25	SPR	CG	Z
1.468	37.29	S-3165	2.69	68.2	1.258	32.0	12	2.1	2.0	50	23	104	.74	18.7	0.105	2.7	7.00	SST	CG	N
1.468	37.29	11496	2.75	69.9	1.048	26.6	234	41	.75	19	176	784	1.89	48.0	0.210	5.3	8.00	SPR	CG	Z
1.468	37.29	S-3222	3.00	76.2	1.172	29.8	53	9.3	1.2	29	61	272	1.04	26.3	0.148	3.8	7.00	SST	CG	N
1.468	37.29	B17-200	3.28	83.3	1.232	31.3	17	2.9	2.0	50	33	145	.94	24.0	0.118	3.0	8.00	SST	CG	N
1.468	37.29	S-1598	3.50	88.9	1.310	33.3	2.3	.41	2.6	67	6.1	27	.87	22.1	0.079	2.0	10.0	SST	CG	N
1.468	37.29	S-3066	3.63	92.1	1.298	33.0	5.5	.96	2.5	63	14	61	.55	14.0	0.085	2.2	6.50	SST	CG	N
1.468	37.29	S-3184	4.50	114.3	1.268	32.2	7.5	1.3	2.8	71	21	93	.85	21.6	0.100	2.5	8.50	SST	CG	N
1.468	37.29	12270	4.59	116.7	1.298	33.0	3.5	.62	3.7	95	13	59	.85	21.6	0.085	2.2	10.0	SPR	CG	Z
1.468	37.29	12440	4.81	122.2	1.032	26.2	148	26	1.3	34	196	874	2.89	73.4	0.218	5.5	13.3	SPR	CG	Z
1.468	37.29	S-970	5.13	130.2	1.240	31.5	8.8	1.5	3.4	85	30	131	1.33	33.8	0.114	2.9	11.7	SST	CG	N
1.468	37.29	S-3216	5.25	133.4	1.310	33.3	1.6	.28	4.2	106	6.7	30	1.07	27.1	0.079	2.0	13.5	SST	CG	N
1.468	37.29	10388	5.75	146.1	1.030	26.2	148	26	1.3	34	199	886	2.96	75.1	0.219	5.6	13.5	SPR	CG	Z
1.468	37.29	11172	6.00	152.4	1.028	26.1	161	28	1.2	31	194	864	3.03	76.8	0.220	5.6	12.8	SPR	C	Z
1.484	37.69	S-1603	1.53	38.9	1.072	27.2	367	64	.30	7.5	108	481	1.24	31.4	0.206	5.2	5.00	SST	CG	N
1.484	37.69	S-383	3.25	82.6	1.274	32.4	13	2.3	1.9	47	24	107	.68	17.3	0.105	2.7	6.50	SST	CG	N
1.484	37.69	3023	3.38	85.7	1.172	29.8	61	11	1.3	32	77	341	1.25	31.7	0.156	4.0	8.00	SPR	CG	Z
1.484	37.69	S-1655	3.75	95.3	1.070	27.2	125	22	1.2	29	144	641	2.28	57.8	0.207	5.3	11.0	SST	CG	N
1.484	37.69	12412	5.00	127.0	1.380	35.1	.80	.14	4.4	112	3.5	16	.39	9.9	0.052	1.3	6.50	SPR	C	Z
1.484	37.69	1735	9.00	228.6	1.160	29.5	20	3.6	4.2	107	86	381	3.73	94.6	0.162	4.1	23.0	SPR	CG	Z
1.500	38.10	11898	.84	21.4	1.230	31.2	125	22	.37	9.3	46	203	.45	11.4	0.135	3.4	3.33	SST	CG	N
1.500	38.10	3804	1.25	31.8	1.290	32.8	32	5.6	.80	20	26	114	.42	10.7	0.105	2.7	4.00	SPR	CG	Z
1.500	38.10	12635	1.56	39.7	1.184	30.1	185	32	.60	15	110	491	.79	20.1	0.158	4.0	4.00	MW	C	N
1.500	38.10	S-1197	1.75	44.5	1.380	35.1	2.0	.35	1.4	36	2.8	12	.35	8.8	0.060	1.5	4.75	SST	C	N
1.500	38.10	S-3032	1.75	44.5	1.374	34.9	2.5	.44	1.4	36	3.5	16	.34	8.7	0.063	1.6	4.50	SST	C	N
1.500	38.10	11471	1.75	44.5	1.340	34.0	6.3	1.1	1.3	34	8.4	37	.42	10.7	0.080	2.0	5.25	HD	CG	Z
1.500	38.10	12544	1.75	44.5	1.188	30.2	140	25	.61	15	85	380	.86	21.8	0.156	4.0	4.50	OT	C	N
1.500	38.10	10405	1.94	49.2	1.274	32.4	27	4.7	1.1	29	31	137	.59	15.1	0.113	2.9	5.25	SPR	CG	N
1.500	38.10	3647	2.06	52.4	1.376	35.0	2.4	.42	1.7	43	4.0	18	.37	9.4	0.062	1.6	5.00	SPR	C	Z
1.500	38.10	10145	2.13	54.0	1.086	27.6	376	66	.44	11	166	737	1.09	27.6	0.207	5.3	5.25	SPR	CG	Z
1.500	38.10	12645	2.25	57.2	1.340	34.0	4.0	.70	1.7	44	6.9	31	.52	13.2	0.080	2.0	6.50	SST	CG	N
1.500	38.10	S-290	2.25	57.2	1.250	31.8	59	10	.65	16	38	169	.50	12.7	0.125	3.2	4.00	SST	CG	N
1.500	38.10	10569	2.44	61.9	1.098	27.9	204	36	.75	19	152	677	1.46	37.0	0.201	5.1	7.25	SPR	CG	Z
1.500	38.10	10666	2.50	63.5	1.264	32.1	25	4.4	1.4	36	35	156	.74	18.7	0.118	3.0	6.25	SPR	CG	Z
1.500	38.10	74	2.50	63.5	1.230	31.2	42	7.3	1.2	31	51	226	.88	22.3	0.135	3.4	6.50	HD	CG	Z
1.500	38.10	947	2.50	63.5	1.086	27.6	244	43	.68	17	166	737	1.45	36.8	0.207	5.3	7.00	HD	CG	Z
1.500	38.10	11140	2.56	65.1	1.260	32.0	28	5.0	1.3	33	37	164	.72	18.3	0.120	3.0	6.00	HD	CG	Z
1.500	38.10	11147	2.56	65.1	1.086	27.6	349	61	.48	12	166	737	1.14	28.9	0.207	5.3	5.50	SPR	CG	Z
1.500	38.10	S-1263	2.63	66.7	1.318	33.5	6.8	1.2	2.0	52	14	62	.59	15.0	0.091	2.3	6.50	SST	CG	N
1.500	38.10	10606	2.69	68.2	1.032	26.2	405	71	.56	14	228	1014	1.70	43.1	0.234	5.9	7.25	SPR	CG	Z
1.500	38.10	B17-181	2.75	69.9	.988	25.1	583	102	.51	13	295	1313	1.92	48.8	0.256	6.5	7.50	SPR	CG	Z
1.500	38.10	S-1673	2.78	70.6	1.262	32.1	18	3.2	1.8	45	33	146	.86	21.9	0.119	3.0	7.25	SST	CG	N
1.500	38.10	10392	3.00	76.2	.976	24.8	595	104	.51	13	305	1357	2.10	53.2	0.262	6.7	8.00	SPR	CG	Z
1.500	38.10	3015	3.06	77.8	1.220	31.0	40	7.0	1.4	36	57	251	1.05	26.7	0.140	3.6	7.50	SPR	CG	Z
1.500	38.10	S-329	3.25	82.6	1.404	35.7	.29	.05	2.7	70	.79	3.5	.50	12.8	0.048	1.2	9.50	SST	C	N
1.500	38.10	531	3.25	82.6	1.204	30.6	43	7.5	1.6	39	67	296	1.26	32.0	0.148	3.8	8.50	HD	CG	Z
1.500	38.10	S-1602	3.31	84.1	1.340	34.0	2.8	.49	2.6	65	7.2	32	.76	19.3	0.080	2.0	8.50	SST	CG	N
1.500	38.10	B18-174	3.31	84.1	1.050	26.7	245	43	.83	21	203	905	2.08	52.9	0.225	5.7	9.25	SPR	CG	N
1.500	38.10	10372	3.63	92.1	1.064	27.0	193	34	1.0	25	193	857	2.18	55.4	0.218	5.5	10.0	SPR	CG	Z
1.500	38.10	11970	3.75	95.3	1.174	29.8	71	12	1.2	31	86	384	1.30	33.1	0.163	4.1	8.00	SPR	CG	Z
1.500	38.10	S-3230	3.78	96.0	1.086	27.6	120	21	1.2	30	143	635	2.28	57.8	0.207	5.3	11.0	SST	CG	N
1.500	38.10	S-1327	4.00	101.6	1.392	35.4	.56	.10	3.5	89	2.0	8.8	.50	12.7	0.054	1.4	8.25	SST	C	N
1.500	38.10	S-1649	4.00	101.6	1.240	31.5	17	2.9	2.5	62	41	182	1.37	34.7	0.130	3.3	10.5	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.500	38.10	32	4.00	101.6	1.230	31.2	24	4.2	2.1	53	51	226	1.32	33.4	0.135	3.4	9.75	HD	CG	Z
1.500	38.10	11514	4.16	105.6	1.282	32.6	11	1.9	2.7	68	29	128	1.09	27.7	0.109	2.8	9.00	SPR	CG	Z
1.500	38.10	3380	4.25	108.0	1.286	32.7	10	1.7	2.7	69	27	121	1.07	27.2	0.107	2.7	9.00	SPR	C	Z
1.500	38.10	S-3167	4.50	114.3	1.300	33.0	7.3	1.3	2.8	72	21	92	.83	21.0	0.100	2.5	8.25	SST	CG	N
1.500	38.10	11976	4.50	114.3	1.260	32.0	22	3.8	1.7	43	37	164	.87	22.1	0.120	3.0	7.25	SPR	CG	Z
1.500	38.10	4259	4.50	114.3	1.012	25.7	321	56	.80	20	257	1143	2.44	62.0	0.244	6.2	10.0	SPR	CG	Z
1.500	38.10	3135	4.56	115.9	1.300	33.0	8.3	1.4	2.7	68	22	99	.83	21.2	0.100	2.5	8.33	SPR	CG	Z
1.500	38.10	12042	4.59	116.7	1.250	31.8	16	2.8	2.6	67	42	185	1.31	33.3	0.125	3.2	10.5	SPR	CG	Z
1.500	38.10	2847	4.88	123.8	1.176	29.9	57	10	1.5	38	85	377	1.50	38.1	0.162	4.1	9.25	SPR	CG	Z
1.500	38.10	7058	5.00	127.0	1.032	26.2	161	28	1.2	30	192	853	3.39	86.2	0.234	5.9	13.5	SST	C	N
1.500	38.10	S-467	5.13	130.2	1.250	31.8	9.8	1.7	3.4	86	33	147	1.75	44.5	0.125	3.2	14.0	SST	CG	N
1.500	38.10	7009	5.88	149.2	1.050	26.7	125	22	1.6	41	203	905	3.90	99.1	0.225	5.7	16.3	HD	C	Z
1.500	38.10	3440	6.00	152.4	1.290	32.8	4.0	.70	4.1	104	17	74	1.89	48.0	0.105	2.7	18.0	SPR	CG	Z
1.500	38.10	3378	6.75	171.5	1.070	27.2	90	16	2.0	52	185	823	3.87	98.3	0.215	5.5	18.0	SPR	CG	Z
1.500	38.10	S-985	6.88	174.6	1.250	31.8	9.0	1.6	4.2	107	38	169	1.88	47.6	0.125	3.2	15.0	SST	CG	N
1.500	38.10	846	8.00	203.2	1.146	29.1	31	5.5	3.5	89	110	489	3.81	96.7	0.177	4.5	21.5	HD	CG	Z
1.500	38.10	12152	8.63	219.1	1.156	29.4	27	4.7	3.8	96	101	449	3.78	96.1	0.172	4.4	22.0	SPR	CG	Z
1.500	38.10	4222	10.0	254.0	1.290	32.8	2.9	.50	7.4	189	21	95	2.57	65.3	0.105	2.7	24.5	SPR	CG	Z
1.500	38.10	10256	10.0	254.0	1.116	28.3	49	8.6	2.7	69	133	592	3.98	101.2	0.192	4.9	19.8	SPR	C	GI
1.500	38.10	863	12.0	304.8	1.230	31.2	7.5	1.3	6.8	172	51	226	3.65	92.6	0.135	3.4	27.0	HD	CG	Z
1.500	38.10	532	12.0	304.8	1.204	30.6	11	1.8	6.3	161	67	296	4.37	110.9	0.148	3.8	28.5	HD	C	Z
1.500	38.10	851	12.0	304.8	1.176	29.9	17	2.9	5.1	130	85	377	4.54	115.2	0.162	4.1	27.0	HD	C	Z
1.500	38.10	842	12.0	304.8	1.116	28.3	29	5.0	4.7	118	133	592	6.24	158.5	0.192	4.9	32.5	HD	CG	Z
1.500	38.10	804	12.0	304.8	1.086	27.6	39	6.9	4.2	107	166	737	6.83	173.5	0.207	5.3	33.0	HD	CG	Z
1.500	38.10	835	12.0	304.8	1.050	26.7	57	9.9	3.6	91	203	905	7.50	190.5	0.225	5.7	33.3	HD	CG	Z
1.515	38.48	12679	1.50	38.1	1.203	30.6	151	26	.50	13	75	334	.82	20.8	0.156	4.0	4.25	SPR	C	N
1.515	38.48	S-989	1.91	48.4	1.135	28.8	204	36	.54	14	110	490	1.05	26.5	0.190	4.8	5.50	SST	CG	N
1.515	38.48	S-288	2.13	54.0	1.371	34.8	2.5	.44	1.7	42	4.1	18	.47	11.9	0.072	1.8	6.50	SST	CG	N
1.515	38.48	11872	2.16	54.8	1.141	29.0	214	38	.57	14	122	543	1.03	26.1	0.187	4.7	5.50	SPR	CG	N
1.515	38.48	11178	2.31	58.7	1.099	27.9	344	60	.48	12	167	741	1.14	29.1	0.208	5.3	5.50	SPR	CG	Z
1.515	38.48	2923	2.50	63.5	1.245	31.6	28	5.0	1.2	30	34	150	1.31	33.2	0.135	3.4	8.67	SPR	C	Z
1.515	38.48	2775	2.50	63.5	1.227	31.2	37	6.5	1.1	29	42	186	1.37	34.7	0.144	3.7	8.50	SPR	C	Z
1.515	38.48	11116	2.50	63.5	1.141	29.0	214	38	.57	14	122	543	1.03	26.1	0.187	4.7	5.50	SPR	CG	N
1.515	38.48	1519	2.75	69.9	1.075	27.3	312	55	.660	16.76	206	922	1.69	42.9	0.225	5.72	7.50	SPR	CG	Z
1.515	38.48	S-3092	3.00	76.2	1.279	32.5	12	2.1	1.8	45	21	93	1.24	31.5	0.118	3.0	9.50	SST	C	N
1.515	38.48	S-109	3.00	76.2	1.015	25.8	322	56	.63	16	201	894	2.38	60.3	0.250	6.4	9.50	SST	CG	N
1.515	38.48	2706	4.84	123.0	1.191	30.3	57	10	1.5	37	84	373	1.46	37.0	0.162	4.1	9.00	SPR	CG	Z
1.515	38.48	3323	6.75	171.5	1.105	28.1	71	12	2.3	57	160	710	3.69	93.7	0.205	5.2	18.0	SPR	CG	Z
1.515	38.48	3418	6.75	171.5	1.075	27.3	97	17	1.9	50	189	840	3.96	100.6	0.220	5.6	18.0	SPR	CG	Z
1.515	38.48	3414	8.50	215.9	1.065	27.1	86	15	2.3	60	202	897	4.95	125.7	0.225	5.7	22.0	SPR	CG	Z
1.531	38.89	11262	1.19	30.2	1.247	31.7	77	14	.55	14	42	189	.64	16.2	0.142	3.6	4.50	SST	CG	N
1.531	38.89	11155	1.25	31.8	1.247	31.7	97	17	.60	15	58	257	.60	15.3	0.142	3.6	4.25	SPR	CG	Z
1.531	38.89	S-1648	1.41	35.7	1.321	33.6	21	3.7	.93	24	20	89	.47	12.0	0.105	2.7	4.50	SST	CG	N
1.531	38.89	1675	1.50	38.1	1.399	35.5	3.3	.57	1.1	29	3.7	16	.37	9.5	0.066	1.7	4.67	SPR	C	Z
1.531	38.89	10648	1.63	41.3	1.371	34.8	6.4	1.1	1.2	31	7.9	35	.40	10.2	0.080	2.0	5.00	SPR	CG	Z
1.531	38.89	S-85	2.00	50.8	1.387	35.2	3.9	.69	1.6	40	6.2	28	.41	10.5	0.072	1.8	4.75	SST	C	N
1.531	38.89	S-405	2.00	50.8	1.147	29.1	202	35	.56	14	113	501	1.06	26.8	0.192	4.9	5.50	SST	CG	N
1.531	38.89	11152	2.19	55.6	1.091	27.7	498	87	.38	9.5	187	832	1.10	27.9	0.220	5.6	5.00	SPR	CG	Z
1.531	38.89	4397	2.22	56.4	1.321	33.6	13	2.2	1.5	38	19	85	.71	18.0	0.105	2.7	6.75	SPR	CG	N
1.531	38.89	10391	2.25	57.2	1.105	28.1	431	75	.41	10	177	787	1.07	27.1	0.213	5.4	5.00	SPR	CG	Z
1.531	38.89	10319	2.44	61.9	1.117	28.4	284	50	.57	15	163	724	1.24	31.5	0.207	5.3	6.00	SPR	CG	Z
1.531	38.89	10835	3.00	76.2	1.305	33.1	17	3.0	1.6	41	28	123	.71	17.9	0.113	2.9	6.25	SST	CG	N
1.531	38.89	4242	3.00	76.2	1.207	30.7	110	19	.75	19	83	370	.89	22.6	0.162	4.1	5.50	SPR	CG	Z
1.531	38.89	S-3111	3.38	85.7	1.321	33.6	12	2.0	2.0	51	23	104	.68	17.3	0.105	2.7	6.50	SST	CG	N
1.531	38.89	4115	4.25	108.0	.907	23.0	1003	176	.48	12	478	2128	2.96	75.3	0.312	7.9	9.50	SPR	CG	Z
1.531	38.89	S-449	6.50	165.1	1.147	29.1	46	8.0	2.5	63	113	501	3.36	85.3	0.192	4.9	17.5	SST	CG	N
1.546	39.27	10324	1.25	31.8	1.276	32.4	113	20	.44	11	49	219	.47	12.0	0.135	3.4	3.50	SPR	CG	Z
1.546	39.27	10947	1.28	32.5	1.276	32.4	62	11	.64	16	40	176	.64	16.3	0.135	3.4	4.75	SPR	CG	Z
1.546	39.27	1721	1.38	34.9	1.402	35.6	5.4	.94	1.0	25	5.3	24	.38	9.6	0.072	1.8	4.25	SPR	C	Z
1.546	39.27	11156	1.50	38.1	1.134	28.8	269	47	.26	6.7	71	316	1.24	31.4	0.206	5.2	6.00	SPR	CG	Z
1.546	39.27	4335	1.63	41.3	1.266	32.2	114	20	.48	12	55	244	.53	13.3	0.140	3.6	3.75	SPR	CG	Z
1.546	39.27	11224	1.75	44.5	1.310	33.3	28	5.0	1.1	28	31	138	.59	15.0	0.118	3.0	5.00	SST	CG	N
1.546	39.27	S-98	2.19	55.6	1.172	29.8	187	33	.55	14	103	459	.98	24.9	0.187	4.7	5.25	SST	CG	N
1.546	39.27	12011	2.38	60.3	1.276	32.4	57	9.9	.87	22	49	219	.68	17.1	0.135	3.4	5.00	SPR	CG	Z
1.546	39.27	11979	3.25	82.6	1.262	32.1	38	6.7	1.5	38	57	255	1.07	27.1	0.142	3.6	7.50	SPR	CG	Z
1.546	39.27	B8-68	4.09	104.0	1.296	32.9	14	2.4	2.7	69	37	164	1.25	31.8	0.125	3.2	10.0	SST	CG	N
1.546	39.27	S-1134	4.50	114.3	1.452	36.9	.13	.02	3.7	94	.48	2.1	.80	20.3	0.047	1.2	16.0	SST	C	N
1.546	39.27	4169	6.25	158.8	1.246	31.6	21	3.7	3.1	78	66	292	2.18	55.2	0.150	3.8	14.5	SPR	CG	GI
1.546	39.27	S-455	7.00	177.8	1.366	34.7	1.7	.29	5.4	137	9.0	40	1.61	40.9	0.090	2.3	18.0	SST	CG	N
1.550	39.37	7010	4.98	126.4	1.096	27.8	157	27	1.3	33	203	901	3.06	77.7	0.227	5.8	12.5	HD	C	Z
1.562	39.67	12057	1.06	27.0	1.322	33.6	66	12	.54	14	35	158	.42	10.7	0.120	3.0	3.50	SPR	CG	Z
1.562	39.67	11154	1.13	28.6	1.266	32.2	122	21	.53	13	64	285	.59	15.0	0.148	3.8	4.00	SPR	CG	Z
1.562	39.67	10428	1.19	30.2	1.266	32.2	108	19	.56	14	61	270	.63	16.0	0.148	3.8	4.25	SPR	CG	Z
1.562	39.67	10318	1.25	31.8	1.250	31.8	175	31	.42	11	73	325	.59	14.9	0.156	4.0	3.75	SPR	CG	Z
1.562	39.67	10131	1.28	32.5	1.250	31.8	153	27	.48	12	73	325	.62	15.8	0.156	4.0	4.00	SPR	CG	Z
1.562	39.67	3348	1.38	34.9	1.418	36.0	9.3	1.6	.90	23	8.4	37	.31	7.8	0.072	1.8	3.25	HD	C	Z
1.562	39.67	3355	1.88	47.6	1.312	33.3	47	8.3	.85	21	40	178	.56	14.3	0.125	3.2	4.50	HD	CG	Z
1.562	39.67	10333	2.00	50.8	1.148	29.2	250	44	.64	16	160	711	1.29	32.9	0.207	5.3	6.25	SPR	CG	Z
1.562	39.67	3701	2.38	60.3	1.444	36.7	1.5	.26	2.1	52	3.0	13	.32	8.2	0.059	1.5	5.50	SPR	CG	Z
1.562	39.67	11170	2.56	65.1	1.188	30.2	169	30	.70	18	119	528	1.12	28.5	0.187	4.7	6.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
1.562	39.67	11177	2.56	65.1	1.188	30.2	225	39	.53	13	119	528	.94	23.7	0.187	4.7	5.00	SPR	CG	Z
1.562	39.67	11996	2.63	66.7	.876	22.3	2312	405	.26	6.6	599	2665	2.32	58.8	0.343	8.7	6.75	SPR	CG	Z
1.562	39.67	852	2.75	69.9	1.238	31.4	69	12	1.2	30	82	363	1.17	29.8	0.162	4.1	7.25	HD	CG	Z
1.562	39.67	S-314	3.16	80.2	1.436	36.5	2.1	.37	2.6	66	5.6	25	.36	9.2	0.063	1.6	4.75	SST	C	N
1.562	39.67	4346	3.63	92.1	1.178	29.9	76	13	1.3	34	100	446	2.30	58.5	0.192	4.9	12.0	SPR	CG	Z
1.562	39.67	895	4.00	101.6	.996	25.3	497	87	.74	19	367	1633	3.08	78.2	0.283	7.2	11.0	HD	CG	Z
1.562	39.67	812	4.25	108.0	1.208	30.7	57	10	1.9	47	106	471	2.01	51.0	0.177	4.5	11.3	HD	CG	Z
1.562	39.67	678	4.38	111.1	1.076	27.3	213	37	1.2	29	245	1090	2.98	75.6	0.243	6.2	12.3	HD	CG	Z
1.562	39.67	11669	4.84	123.0	1.478	37.5	.07	.01	4.0	103	.30	1.3	.80	20.3	0.042	1.1	19.0	SPR	CG	N
1.562	39.67	3244	5.00	127.0	1.202	30.5	54	9.5	2.0	50	106	472	2.25	57.2	0.180	4.6	12.5	SPR	CG	Z
1.562	39.67	10570	5.00	127.0	1.108	28.1	153	27	1.3	33	201	895	3.07	77.9	0.227	5.8	12.5	SPR	C	Z
1.562	39.67	S-3110	5.50	139.7	1.380	35.1	4.7	.82	3.2	81	15	67	.71	17.9	0.091	2.3	7.75	SST	CG	N
1.562	39.67	11509	6.41	162.7	1.260	32.0	20	3.5	3.3	84	66	295	2.47	62.6	0.151	3.8	15.3	SPR	CG	Z
1.562	39.67	911	7.50	190.5	1.266	32.2	15	2.6	4.3	110	64	285	2.74	69.5	0.148	3.8	18.5	HD	CG	Z
1.562	39.67	2735	11.4	290.5	1.362	34.6	2.9	.51	7.3	186	21	95	1.78	45.1	0.100	2.5	17.8	SPR	CG	Z
1.578	40.08	12276	1.00	25.4	1.496	38.0	.37	.07	.75	19	.28	1.3	.25	6.2	0.041	1.0	5.00	SPR	C	Z
1.578	40.08	11148	1.25	31.8	1.266	32.2	169	30	.43	11	72	322	.59	14.9	0.156	4.0	3.75	SPR	CG	Z
1.578	40.08	3358	1.31	33.3	1.204	30.6	435	76	.27	6.9	118	523	.65	16.6	0.187	4.7	3.50	SPR	CG	Z
1.578	40.08	10349	1.56	39.7	1.368	34.7	14	2.4	.93	24	13	57	.63	16.0	0.105	2.7	6.00	SPR	CG	Z
1.578	40.08	S-162	1.63	41.3	1.426	36.2	2.9	.51	1.2	29	3.3	15	.48	12.1	0.076	1.9	6.25	SST	CG	N
1.578	40.08	S-3227	1.72	43.6	1.394	35.4	5.6	.97	1.1	27	6.0	27	.64	16.4	0.092	2.3	7.00	SST	CG	N
1.578	40.08	11774	2.38	60.3	1.462	37.1	1.9	.32	2.1	54	3.9	17	.26	6.6	0.058	1.5	4.50	SPR	CG	Z
1.578	40.08	10329	2.44	61.9	1.164	29.6	241	42	.66	17	158	704	1.29	32.9	0.207	5.3	6.25	SPR	CG	Z
1.578	40.08	11629	2.50	63.5	1.338	34.0	14	2.4	1.4	36	20	87	1.08	27.4	0.120	3.0	9.00	SPR	CG	Z
1.578	40.08	S-3189	3.00	76.2	1.308	33.2	28	4.8	1.6	40	44	194	.95	24.0	0.135	3.4	7.00	SST	CG	N
1.578	40.08	10689	3.38	85.7	1.458	37.0	.74	.13	2.8	70	2.0	9.0	.62	15.6	0.060	1.5	9.25	SPR	C	Z
1.578	40.08	3486	3.75	95.3	1.328	33.7	16	2.9	2.4	62	40	176	1.13	28.6	0.125	3.2	9.00	HD	CG	Z
1.578	40.08	S-298	4.16	105.6	1.404	35.7	4.8	.84	2.8	72	14	61	.57	14.4	0.087	2.2	6.50	SST	CG	N
1.578	40.08	S-3193	6.75	171.5	1.398	35.5	1.7	.30	5.2	133	8.8	39	1.53	38.9	0.090	2.3	17.0	SST	CG	N
1.578	40.08	11965	7.69	195.2	1.190	30.2	52	9.1	2.5	64	131	583	3.1	78.7	0.192	4.9	16.1	SPR	CG	GI
1.580	40.13	72864	2.50	63.5	1.166	29.6	210	37	1.1	27	223	994	1.42	36.1	0.207	5.3	6.88	MW	CG	N
1.580	40.13	72864S	2.50	63.5	1.166	29.6	179	31	.76	19	136	606	1.42	36.1	0.207	5.3	6.88	SST	CG	N
1.580	40.13	72865	3.00	76.2	1.166	29.6	170	30	1.3	33	223	994	1.66	42.1	0.207	5.3	8.00	MW	CG	N
1.580	40.13	72865S	3.00	76.2	1.166	29.6	145	25	.94	24	136	606	1.66	42.1	0.207	5.3	8.00	SST	CG	N
1.580	40.13	72866	3.50	88.9	1.166	29.6	142	25	1.6	40	223	994	1.89	48.0	0.207	5.3	9.13	MW	CG	N
1.580	40.13	72866S	3.50	88.9	1.166	29.6	121	21	1.1	29	136	606	1.89	48.0	0.207	5.3	9.13	SST	CG	N
1.580	40.13	72867	4.00	101.6	1.166	29.6	121	21	1.8	47	223	994	2.15	54.5	0.207	5.3	10.4	MW	CG	N
1.580	40.13	72867S	4.00	101.6	1.166	29.6	103	18	1.3	34	136	606	2.15	54.5	0.207	5.3	10.4	SST	CG	N
1.580	40.13	72868	4.50	114.3	1.166	29.6	107	19	2.1	53	223	994	2.38	60.5	0.207	5.3	11.5	MW	CG	N
1.580	40.13	72868S	4.50	114.3	1.166	29.6	91	16	1.5	38	136	606	2.38	60.5	0.207	5.3	11.5	SST	CG	N
1.580	40.13	72869	5.00	127.0	1.166	29.6	95	17	2.4	60	223	994	2.64	67.0	0.207	5.3	12.8	MW	CG	N
1.580	40.13	72869S	5.00	127.0	1.166	29.6	81	14	1.7	43	136	606	2.64	67.0	0.207	5.3	12.8	SST	CG	N
1.580	40.13	72870	5.50	139.7	1.166	29.6	86	15	2.6	66	223	994	2.87	73.0	0.207	5.3	13.9	MW	CG	N
1.580	40.13	72870S	5.50	139.7	1.166	29.6	73	13	1.9	47	136	606	2.87	73.0	0.207	5.3	13.9	SST	CG	N
1.580	40.13	72871	6.00	152.4	1.166	29.6	79	14	2.8	72	223	994	3.08	78.2	0.207	5.3	14.9	MW	CG	N
1.580	40.13	72871S	6.00	152.4	1.166	29.6	67	12	2.0	52	136	606	3.08	78.2	0.207	5.3	14.9	SST	CG	N
1.593	40.46	11608	1.88	47.6	1.181	30.0	243	42	.43	11	105	467	1.44	36.6	0.206	5.2	6.00	SPR	CG	Z
1.593	40.46	S-1600	2.25	57.2	1.347	34.2	15	2.7	1.1	29	18	78	1.11	28.1	0.123	3.1	8.00	SST	CG	N
1.593	40.46	3428	2.50	63.5	1.343	34.1	16	2.8	1.4	35	22	97	1.13	28.6	0.125	3.2	9.00	HD	CG	Z
1.593	40.46	S-991	2.63	66.7	1.417	36.0	7.3	1.3	1.9	48	14	62	.44	11.2	0.088	2.2	5.00	SST	CG	N
1.593	40.46	10825	4.25	108.0	1.351	34.3	19	3.4	1.8	47	36	159	.97	24.6	0.121	3.1	7.00	SPR	C	Z
1.593	40.46	3641	5.00	127.0	1.453	36.9	1.2	.21	4.3	109	5.3	23	.70	17.8	0.070	1.8	10.0	HD	CG	Z
1.593	40.46	3109	5.13	130.2	1.343	34.1	11	1.9	3.5	89	39	173	1.63	41.3	0.125	3.2	12.0	SPR	C	Z
1.593	40.46	S-359	5.13	130.2	1.179	29.9	108	19	1.3	32	135	601	2.07	52.6	0.207	5.3	10.0	SST	CG	N
1.609	40.87	10451	1.28	32.5	1.277	32.4	208	36	.41	10	85	379	.62	15.8	0.166	4.2	3.75	SPR	CG	Z
1.609	40.87	2717	1.56	39.7	1.409	35.8	8.4	1.5	.76	19	6.4	28	.80	20.3	0.100	2.5	7.00	SPR	C	Z
1.609	40.87	11957	1.69	42.8	1.423	36.1	5.5	.96	1.0	26	5.7	25	.65	16.5	0.093	2.4	7.00	SPR	CG	Z
1.609	40.87	10507	2.00	50.8	1.383	35.1	16	2.7	1.3	32	20	88	.74	18.7	0.113	2.9	6.50	SPR	CG	Z
1.609	40.87	11119	2.41	61.1	1.169	29.7	343	60	.44	11	151	670	1.16	29.3	0.220	5.6	5.25	SST	CG	N
1.609	40.87	3220	2.50	63.5	1.255	31.9	96	17	1.1	27	103	458	1.24	31.5	0.177	4.5	7.00	SPR	CG	Z
1.609	40.87	11641	2.59	65.9	1.427	36.2	9.4	1.6	1.7	42	16	70	.55	13.9	0.091	2.3	5.00	SPR	C	Z
1.609	40.87	11757	4.00	101.6	1.427	36.2	4.2	.73	3.2	81	13	59	.80	20.2	0.091	2.3	8.75	SPR	CG	Z
1.609	40.87	12089	4.94	125.4	1.469	37.3	1.2	.21	4.2	108	5.0	22	.70	17.8	0.070	1.8	10.0	SPR	CG	Z
1.609	40.87	4393	7.00	177.8	1.159	29.4	93	16	2.1	52	191	849	3.83	97.2	0.225	5.7	17.0	SPR	CG	Z
1.609	40.87	3445	7.75	196.9	1.219	31.0	49	8.6	2.7	68	131	581	3.32	84.2	0.195	5.0	17.0	SPR	CG	BO
1.625	41.28	S-1170	.50	12.7	1.375	34.9	90	16	.13	3.2	11	50	.38	9.5	0.125	3.2	3.00	SST	CG	N
1.625	41.28	4350	1.00	25.4	1.301	33.0	316	55	.25	6.3	79	350	.49	12.3	0.162	4.1	3.00	SPR	CG	Z
1.625	41.28	10893	1.03	26.2	1.543	39.2	.30	.05	.79	20	.24	1.1	.25	6.2	0.041	1.0	5.00	SST	C	N
1.625	41.28	3408	1.19	30.2	1.287	32.7	380	67	.23	6.0	89	396	.51	12.9	0.169	4.3	3.00	SPR	CG	Z
1.625	41.28	10543	1.28	32.5	1.301	33.0	181	32	.44	11	79	350	.61	15.4	0.162	4.1	3.75	SPR	CG	Z
1.625	41.28	1535	1.58	40.1	1.415	35.9	15	2.7	1.0	26	16	70	.55	14.0	0.105	2.7	5.25	SPR	CG	Z
1.625	41.28	10045	1.63	41.3	1.481	37.6	5.2	.90	1.3	32	6.5	29	.36	9.1	0.072	1.8	4.00	SPR	C	Z
1.625	41.28	10015	1.63	41.3	1.001	25.4	3009	527	.15	3.8	456	2026	1.25	31.7	0.312	7.9	4.00	SPR	CG	Z
1.625	41.28	10101	2.25	57.2	1.175	29.8	448	78	.42	11	189	842	1.13	28.6	0.225	5.7	5.00	SPR	CG	Z
1.625	41.28	10362	2.44	61.9	1.189	30.2	359	63	.50	13	179	797	1.15	29.1	0.218	5.5	5.25	SPR	CG	Z
1.625	41.28	S-240	2.50	63.5	1.501	38.1	1.8	.32	2.2	55	4.0	18	.35	8.9	0.062	1.6	4.67	SST	C	N
1.625	41.28	3294	2.63	66.7	1.281	32.5	117	21	.80	20	94	417	.95	24.0	0.172	4.4	5.50	SPR	CG	Z
1.625	41.28	S-84	3.50	88.9	1.241	31.5	115	20	.92	23	106	474	1.54	39.0	0.192	4.9	7.00	SST	C	N
1.625	41.28	S-275	3.75	95.3	1.375	34.9	14	2.4	2.5	64	35	156	1.06	27.0	0.125	3.2	8.50	SST	CG	N
1.625	41.28	12119	3.84	97.6	1.375	34.9	12	2.1	2.5	64	31	138	1.31	33.3	0.125	3.2	10.5	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.625	41.28	12725	4.30	109.2	1.443	36.7	3.0	.53	3.2	81	9.7	43	1.09	27.7	0.091	2.3	11.0	HD	C	N
1.625	41.28	369	4.50	114.3	1.139	28.9	200	35	1.2	30	237	1053	2.79	71.0	0.243	6.2	11.5	HD	CG	Z
1.625	41.28	2793	5.63	142.9	1.343	34.1	13	2.3	3.5	89	47	209	2.12	53.7	0.141	3.6	15.0	SPR	CG	GI
1.625	41.28	10393	7.25	184.2	1.137	28.9	119	21	2.0	51	239	1065	4.45	113.1	0.244	6.2	18.3	SPR	CG	Z
1.625	41.28	843	12.0	304.8	1.241	31.5	24	4.2	5.1	130	124	550	5.66	143.9	0.192	4.9	29.5	HD	CG	Z
1.640	41.66	S-1465	1.38	34.9	1.464	37.2	13	2.3	.98	25	13	58	.40	10.1	0.088	2.2	3.50	SST	C	N
1.640	41.66	B17-193	1.47	37.3	1.280	32.5	215	38	.41	10	87	389	.72	18.3	0.180	4.6	4.00	SST	CG	N
1.640	41.66	S-965	1.69	42.8	1.344	34.1	60	11	.92	23	55	245	.74	18.8	0.148	3.8	5.00	SST	CG	N
1.640	41.66	3008	1.88	47.6	1.496	38.0	4.0	.70	1.6	39	6.2	28	.32	8.2	0.072	1.8	4.50	SPR	CG	GI
1.640	41.66	3105	2.00	50.8	1.370	34.8	49	8.5	.96	24	47	207	.66	16.7	0.135	3.4	5.00	SPR	CG	Z
1.640	41.66	S-1666	2.25	57.2	1.370	34.8	41	7.3	1.0	26	42	187	.68	17.1	0.135	3.4	5.00	SST	CG	N
1.640	41.66	3239	2.25	57.2	1.286	32.7	120	21	.84	21	101	450	1.02	25.9	0.177	4.5	5.75	SPR	CG	Z
1.640	41.66	S-3237	2.34	59.5	1.390	35.3	20	3.5	1.5	39	30	135	.81	20.6	0.125	3.2	6.50	SST	CG	N
1.640	41.66	10665	2.38	60.3	1.190	30.2	433	76	.43	11	188	835	1.13	28.6	0.225	5.7	5.00	SPR	CG	Z
1.640	41.66	S-102	3.25	82.6	1.328	33.7	38	6.6	1.6	42	62	275	1.25	31.7	0.156	4.0	8.00	SST	CG	N
1.640	41.66	4193	3.25	82.6	1.016	25.8	969	170	.47	12	452	2011	2.50	63.4	0.312	7.9	8.00	SPR	CG	Z
1.640	41.66	2990	3.38	85.7	1.476	37.5	3.4	.60	2.7	69	9.3	42	.66	16.7	0.082	2.1	7.00	SPR	C	Z
1.640	41.66	S-319	3.63	92.1	1.300	33.0	43	7.5	1.9	47	80	355	1.64	41.7	0.170	4.3	9.67	SST	CG	N
1.640	41.66	S-1188	3.75	95.3	1.506	38.3	1.3	.23	3.2	82	4.2	19	.54	13.6	0.067	1.7	7.00	SST	C	N
1.640	41.66	3174	4.00	101.6	1.506	38.3	.99	.17	3.3	84	3.3	15	.70	17.9	0.067	1.7	9.50	SPR	C	Z
1.640	41.66	1861	4.31	109.5	1.370	34.8	18	3.2	2.6	66	47	207	1.32	33.4	0.135	3.4	9.75	HD	CG	Z
1.640	41.66	1833	4.78	121.4	1.324	33.6	46	8.0	1.6	40	72	322	1.26	32.1	0.158	4.0	8.00	HD	CG	GI
1.640	41.66	3307	5.75	146.1	1.286	32.7	41	7.2	2.5	63	101	450	2.30	58.4	0.177	4.5	13.0	SPR	CG	Z
1.640	41.66	4404	8.00	203.2	1.430	36.3	4.6	.81	5.1	130	24	105	1.42	36.0	0.105	2.7	12.5	SPR	C	GI
1.656	42.06	10529	1.16	29.4	1.430	36.3	51	8.9	.55	14	28	125	.37	9.3	0.113	2.9	3.25	SPR	CG	Z
1.656	42.06	11542	2.03	51.6	1.416	36.0	18	3.2	1.1	29	21	92	.90	22.9	0.120	3.0	6.50	SPR	CG	GI
1.656	42.06	10373	2.38	60.3	1.206	30.6	457	80	.41	10	186	827	1.07	27.2	0.225	5.7	4.75	SPR	CG	Z
1.656	42.06	S-283	2.88	73.0	1.406	35.7	21	3.7	1.6	41	35	154	.75	19.1	0.125	3.2	6.00	SST	CG	N
1.656	42.06	S-1642	9.19	233.4	1.092	27.7	154	27	1.9	47	286	1270	6.27	159.4	0.282	7.2	22.3	SST	CG	N
1.672	42.47	12618	4.00	101.6	1.318	33.5	42	7.3	1.9	49	81	358	2.08	52.8	0.177	4.5	10.8	SST	C	N
1.687	42.85	S-3070	1.38	34.9	1.531	38.9	3.7	.65	.91	23	3.4	15	.47	11.9	0.078	2.0	5.00	SST	C	N
1.687	42.85	1948	1.50	38.1	1.531	38.9	4.3	.75	1.1	28	4.7	21	.39	9.9	0.078	2.0	5.00	SPR	CG	Z
1.687	42.85	72872	1.50	38.1	1.417	36.0	64	11	.96	24	62	275	.54	13.7	0.135	3.4	4.00	MW	CG	N
1.687	42.85	72872S	1.50	38.1	1.417	36.0	55	9.6	.75	19	41	182	.54	13.7	0.135	3.4	4.00	SST	CG	N
1.687	42.85	72880	1.50	38.1	1.391	35.3	90	16	.89	23	80	355	.61	15.5	0.148	3.8	4.13	MW	CG	N
1.687	42.85	72880S	1.50	38.1	1.391	35.3	76	13	.70	18	54	239	.61	15.5	0.148	3.8	4.13	SST	CG	N
1.687	42.85	72882	1.50	38.1	1.375	34.9	112	20	.85	22	95	423	.64	16.3	0.156	4.0	4.13	MW	CG	N
1.687	42.85	72882S	1.50	38.1	1.375	34.9	95	17	.63	16	60	268	.64	16.3	0.156	4.0	4.13	SST	CG	N
1.687	42.85	72897	1.50	38.1	1.363	34.6	126	22	.81	21	102	454	.69	17.5	0.162	4.1	4.25	MW	CG	N
1.687	42.85	72897S	1.50	38.1	1.363	34.6	107	19	.63	16	67	300	.69	17.5	0.162	4.1	4.25	SST	CG	N
1.687	42.85	72898	1.50	38.1	1.333	33.9	178	31	.75	19	133	591	.75	19.1	0.177	4.5	4.25	MW	CG	N
1.687	42.85	72898S	1.50	38.1	1.333	33.9	151	26	.58	15	87	389	.75	19.1	0.177	4.5	4.25	SST	CG	N
1.687	42.85	72909	1.50	38.1	1.303	33.1	247	43	.66	17	163	726	.84	21.3	0.192	4.9	4.38	MW	CG	N
1.687	42.85	72909S	1.50	38.1	1.303	33.1	210	37	.49	12	103	457	.84	21.3	0.192	4.9	4.38	SST	CG	N
1.687	42.85	365	1.88	47.6	1.333	33.9	142	25	.69	18	98	438	.86	21.9	0.177	4.5	5.00	HD	CG	Z
1.687	42.85	11380	2.00	50.8	1.505	38.2	12	2.2	1.1	29	14	62	.34	8.7	0.091	2.3	3.75	SST	CG	N
1.687	42.85	72873	2.00	50.8	1.417	36.0	46	8.0	1.4	35	62	277	.64	16.3	0.135	3.4	4.75	MW	CG	N
1.687	42.85	72873S	2.00	50.8	1.417	36.0	39	6.8	1.0	27	41	182	.64	16.3	0.135	3.4	4.75	SST	CG	N
1.687	42.85	72884	2.00	50.8	1.375	34.9	79	14	1.2	31	95	423	.78	19.8	0.156	4.0	5.00	MW	CG	N
1.687	42.85	72884S	2.00	50.8	1.375	34.9	67	12	.90	23	60	268	.78	19.8	0.156	4.0	5.00	SST	CG	N
1.687	42.85	72899	2.00	50.8	1.333	33.9	124	22	1.0	27	130	577	.95	24.2	0.177	4.5	5.38	MW	CG	N
1.687	42.85	72899S	2.00	50.8	1.333	33.9	105	18	.83	21	87	389	.95	24.2	0.177	4.5	5.38	SST	CG	N
1.687	42.85	72910	2.00	50.8	1.303	33.1	171	30	.97	25	165	736	1.03	26.2	0.192	4.9	5.38	MW	CG	N
1.687	42.85	72910S	2.00	50.8	1.303	33.1	145	25	.71	18	103	457	1.03	26.2	0.192	4.9	5.38	SST	CG	N
1.687	42.85	S-3065	2.25	57.2	1.407	35.7	43	7.6	1.1	27	46	202	.70	17.8	0.140	3.6	5.00	SST	CG	N
1.687	42.85	72874	2.50	63.5	1.417	36.0	36	6.2	1.7	44	62	275	.76	19.3	0.135	3.4	5.63	MW	CG	N
1.687	42.85	72874S	2.50	63.5	1.417	36.0	30	5.3	1.4	34	41	182	.76	19.3	0.135	3.4	5.63	SST	CG	N
1.687	42.85	72886	2.50	63.5	1.375	34.9	61	11	1.6	40	95	423	.92	23.3	0.156	4.0	5.88	MW	CG	N
1.687	42.85	72886S	2.50	63.5	1.375	34.9	52	9.1	1.2	30	60	268	.92	23.3	0.156	4.0	5.88	SST	CG	N
1.687	42.85	72901	2.50	63.5	1.333	33.9	97	17	1.4	35	136	604	1.11	28.1	0.177	4.5	6.25	MW	CG	N
1.687	42.85	72901S	2.50	63.5	1.333	33.9	83	14	1.1	27	87	389	1.11	28.1	0.177	4.5	6.25	SST	CG	N
1.687	42.85	72911	2.50	63.5	1.303	33.1	131	23	1.3	32	163	727	1.25	31.7	0.192	4.9	6.50	MW	CG	N
1.687	42.85	72911S	2.50	63.5	1.303	33.1	111	19	.93	24	103	457	1.25	31.7	0.192	4.9	6.50	SST	CG	N
1.687	42.85	72917	2.50	63.5	1.251	31.8	228	40	1.1	27	245	1089	1.42	36.0	0.218	5.5	6.50	MW	CG	N
1.687	42.85	72917S	2.50	63.5	1.251	31.8	194	34	.77	20	149	663	1.42	36.0	0.218	5.5	6.50	SST	CG	N
1.687	42.85	72925	2.50	63.5	1.219	31.0	310	54	.94	24	292	1299	1.52	38.6	0.234	5.9	6.50	MW	CG	N
1.687	42.85	72925S	2.50	63.5	1.219	31.0	263	46	.66	17	173	768	1.52	38.6	0.234	5.9	6.50	SST	CG	N
1.687	42.85	11425	2.88	73.0	1.363	34.6	56	9.8	1.4	35	76	337	1.13	28.8	0.162	4.1	7.00	SPR	CG	Z
1.687	42.85	72875	3.00	76.2	1.417	36.0	29	5.1	2.1	54	62	276	.86	21.9	0.135	3.4	6.38	MW	CG	N
1.687	42.85	72875S	3.00	76.2	1.417	36.0	25	4.3	1.7	42	41	182	.86	21.9	0.135	3.4	6.38	SST	CG	N
1.687	42.85	72888	3.00	76.2	1.375	34.9	50	8.7	1.9	49	95	423	1.05	26.7	0.156	4.0	6.75	MW	CG	N
1.687	42.85	72888S	3.00	76.2	1.375	34.9	42	7.4	1.4	36	60	268	1.05	26.7	0.156	4.0	6.75	SST	CG	N
1.687	42.85	72903	3.00	76.2	1.333	33.9	79	14	1.7	44	136	603	1.28	32.6	0.177	4.5	7.25	MW	CG	N
1.687	42.85	72903S	3.00	76.2	1.333	33.9	67	12	1.3	33	87	389	1.28	32.6	0.177	4.5	7.25	SST	CG	N
1.687	42.85	72912	3.00	76.2	1.303	33.1	106	18	1.6	40	165	733	1.44	36.6	0.192	4.9	7.50	MW	CG	N
1.687	42.85	72912S	3.00	76.2	1.303	33.1	90	16	1.1	29	103	457	1.44	36.6	0.192	4.9	7.50	SST	CG	N
1.687	42.85	72918	3.00	76.2	1.251	31.8	181	32	1.3	34	242	1077	1.66	42.2	0.218	5.5	7.63	MW	CG	N
1.687	42.85	72918S	3.00	76.2	1.251	31.8	154	27	.97	25	149	663	1.66	42.2	0.218	5.5	7.63	SST	CG	N
1.687	42.85	72926	3.00	76.2	1.219	31.0	249	44	1.2	30	292	1299	1.78	45.3	0.234	5.9	7.63	MW	CG	N
1.687	42.85	72926S	3.00	76.2	1.219	31.0	211	37	.82	21	173	768	1.78	45.3	0.234	5.9	7.63	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.687	42.85	11253	3.00	76.2	1.201	30.5	290	51	.79	20	229	1018	1.88	47.8	0.243	6.2	7.75	SPR	CG	Z
1.687	42.85	72876	3.50	88.9	1.417	36.0	25	4.3	2.5	64	62	275	.98	24.9	0.135	3.4	7.25	MW	CG	N
1.687	42.85	72876S	3.50	88.9	1.417	36.0	21	3.6	2.0	50	41	182	.98	24.9	0.135	3.4	7.25	SST	CG	N
1.687	42.85	72890	3.50	88.9	1.375	34.9	42	7.3	2.3	58	95	423	1.19	30.2	0.156	4.0	7.63	MW	CG	N
1.687	42.85	72890S	3.50	88.9	1.375	34.9	36	6.2	1.7	43	60	268	1.19	30.2	0.156	4.0	7.63	SST	CG	N
1.687	42.85	72905	3.50	88.9	1.333	33.9	66	12	2.1	52	137	609	1.44	36.5	0.177	4.5	8.13	MW	CG	N
1.687	42.85	72905S	3.50	88.9	1.333	33.9	56	9.9	1.5	39	87	389	1.44	36.5	0.177	4.5	8.13	SST	CG	N
1.687	42.85	72913	3.50	88.9	1.303	33.1	89	16	1.8	47	163	727	1.66	42.1	0.192	4.9	8.63	MW	CG	N
1.687	42.85	72913S	3.50	88.9	1.303	33.1	75	13	1.4	35	103	457	1.66	42.1	0.192	4.9	8.63	SST	CG	N
1.687	42.85	72919	3.50	88.9	1.251	31.8	152	27	1.6	40	242	1077	1.91	48.5	0.218	5.5	8.75	MW	CG	N
1.687	42.85	72919S	3.50	88.9	1.251	31.8	129	23	1.2	29	149	663	1.91	48.5	0.218	5.5	8.75	SST	CG	N
1.687	42.85	72927	3.50	88.9	1.219	31.0	208	36	1.4	36	292	1299	2.05	52.0	0.234	5.9	8.75	MW	CG	N
1.687	42.85	72927S	3.50	88.9	1.219	31.0	176	31	.98	25	173	768	2.05	52.0	0.234	5.9	8.75	SST	CG	N
1.687	42.85	72877	4.00	101.6	1.417	36.0	21	3.7	2.9	74	62	275	1.08	27.4	0.135	3.4	8.00	MW	CG	N
1.687	42.85	72877S	4.00	101.6	1.417	36.0	18	3.2	2.3	58	41	182	1.08	27.4	0.135	3.4	8.00	SST	CG	N
1.687	42.85	72892	4.00	101.6	1.375	34.9	36	6.3	2.6	67	95	423	1.35	34.2	0.156	4.0	8.63	MW	CG	N
1.687	42.85	72892S	4.00	101.6	1.375	34.9	31	5.4	2.0	50	60	268	1.35	34.2	0.156	4.0	8.63	SST	CG	N
1.687	42.85	72906	4.00	101.6	1.333	33.9	56	9.8	2.3	59	131	581	1.66	42.1	0.177	4.5	9.38	MW	CG	N
1.687	42.85	72906S	4.00	101.6	1.333	33.9	47	8.3	1.8	47	87	389	1.66	42.1	0.177	4.5	9.38	SST	CG	N
1.687	42.85	72914	4.00	101.6	1.303	33.1	76	13	2.2	55	164	731	1.85	46.9	0.192	4.9	9.63	MW	CG	N
1.687	42.85	72914S	4.00	101.6	1.303	33.1	65	11	1.6	40	103	457	1.85	46.9	0.192	4.9	9.63	SST	CG	N
1.687	42.85	72920	4.00	101.6	1.251	31.8	130	23	1.8	47	240	1068	2.15	54.7	0.218	5.5	9.88	MW	CG	N
1.687	42.85	72920S	4.00	101.6	1.251	31.8	111	19	1.3	34	149	663	2.15	54.7	0.218	5.5	9.88	SST	CG	N
1.687	42.85	72928	4.00	101.6	1.219	31.0	178	31	1.6	42	292	1299	2.31	58.7	0.234	5.9	9.88	MW	CG	N
1.687	42.85	72928S	4.00	101.6	1.219	31.0	151	27	1.1	29	173	768	2.31	58.7	0.234	5.9	9.88	SST	CG	N
1.687	42.85	S-1217	4.25	108.0	1.477	37.5	7.7	1.3	2.8	70	21	94	.74	18.7	0.105	2.7	7.00	SST	CG	N
1.687	42.85	3497	4.38	111.1	1.417	36.0	16	2.9	2.8	70	45	202	1.32	33.4	0.135	3.4	9.75	HD	CG	Z
1.687	42.85	72878	4.50	114.3	1.417	36.0	19	3.3	3.3	84	62	275	1.20	30.4	0.135	3.4	8.88	MW	CG	N
1.687	42.85	72878S	4.50	114.3	1.417	36.0	16	2.8	2.6	65	41	182	1.20	30.4	0.135	3.4	8.88	SST	CG	N
1.687	42.85	72894	4.50	114.3	1.375	34.9	32	5.6	3.0	76	95	423	1.48	37.6	0.156	4.0	9.50	MW	CG	N
1.687	42.85	72894S	4.50	114.3	1.375	34.9	27	4.7	2.2	57	60	268	1.48	37.6	0.156	4.0	9.50	SST	CG	N
1.687	42.85	72907	4.50	114.3	1.333	33.9	49	8.6	2.7	68	131	582	1.84	46.6	0.177	4.5	10.4	MW	CG	N
1.687	42.85	72907S	4.50	114.3	1.333	33.9	42	7.3	2.1	53	87	389	1.84	46.6	0.177	4.5	10.4	SST	CG	N
1.687	42.85	4162	4.50	114.3	1.327	33.7	55	9.6	1.8	46	99	439	1.80	45.7	0.180	4.6	10.0	SPR	CG	Z
1.687	42.85	72915	4.50	114.3	1.303	33.1	67	12	2.4	62	163	727	2.06	52.4	0.192	4.9	10.8	MW	CG	N
1.687	42.85	72915S	4.50	114.3	1.303	33.1	57	10	1.8	46	103	457	2.06	52.4	0.192	4.9	10.8	SST	CG	N
1.687	42.85	72921	4.50	114.3	1.251	31.8	114	20	2.1	53	240	1066	2.40	60.9	0.218	5.5	11.0	MW	CG	N
1.687	42.85	72921S	4.50	114.3	1.251	31.8	97	17	1.5	39	149	663	2.40	60.9	0.218	5.5	11.0	SST	CG	N
1.687	42.85	72929	4.50	114.3	1.219	31.0	156	27	1.9	48	292	1299	2.57	65.4	0.234	5.9	11.0	MW	CG	N
1.687	42.85	72929S	4.50	114.3	1.219	31.0	133	23	1.3	33	173	768	2.57	65.4	0.234	5.9	11.0	SST	CG	N
1.687	42.85	S-435	5.00	127.0	1.417	36.0	13	2.4	3.0	77	41	182	1.38	35.1	0.135	3.4	10.3	SST	CG	N
1.687	42.85	72879	5.00	127.0	1.417	36.0	17	2.9	3.7	94	62	275	1.30	33.0	0.135	3.4	9.63	MW	CG	N
1.687	42.85	72879S	5.00	127.0	1.417	36.0	14	2.5	2.9	73	41	182	1.30	33.0	0.135	3.4	9.63	SST	CG	N
1.687	42.85	1851	5.00	127.0	1.385	35.2	21	3.6	3.0	76	62	274	1.81	46.0	0.151	3.8	12.0	SPR	CG	Z
1.687	42.85	72896	5.00	127.0	1.375	34.9	28	5.0	3.3	85	95	423	1.62	41.1	0.156	4.0	10.4	MW	CG	N
1.687	42.85	72896S	5.00	127.0	1.375	34.9	24	4.2	2.5	63	60	268	1.62	41.1	0.156	4.0	10.4	SST	CG	N
1.687	42.85	72908	5.00	127.0	1.333	33.9	44	7.7	3.0	76	131	582	2.01	51.1	0.177	4.5	11.4	MW	CG	N
1.687	42.85	72908S	5.00	127.0	1.333	33.9	37	6.5	2.3	60	87	389	2.01	51.1	0.177	4.5	11.4	SST	CG	N
1.687	42.85	72916	5.00	127.0	1.303	33.1	60	10	2.7	70	164	730	2.26	57.3	0.192	4.9	11.8	MW	CG	N
1.687	42.85	72916S	5.00	127.0	1.303	33.1	51	8.9	2.0	51	103	457	2.26	57.3	0.192	4.9	11.8	SST	CG	N
1.687	42.85	72922	5.00	127.0	1.251	31.8	102	18	2.4	61	243	1082	2.62	66.4	0.218	5.5	12.0	MW	CG	N
1.687	42.85	72922S	5.00	127.0	1.251	31.8	87	15	1.7	44	149	663	2.62	66.4	0.218	5.5	12.0	SST	CG	N
1.687	42.85	72930	5.00	127.0	1.219	31.0	139	24	2.1	53	292	1299	2.84	72.1	0.234	5.9	12.1	MW	CG	N
1.687	42.85	72930S	5.00	127.0	1.219	31.0	118	21	1.5	37	173	768	2.84	72.1	0.234	5.9	12.1	SST	CG	N
1.687	42.85	72923	5.50	139.7	1.251	31.8	91	16	2.6	66	238	1057	2.89	73.4	0.218	5.5	13.3	MW	CG	N
1.687	42.85	72923S	5.50	139.7	1.251	31.8	77	14	1.9	49	149	663	2.89	73.4	0.218	5.5	13.3	SST	CG	N
1.687	42.85	72931	5.50	139.7	1.219	31.0	125	22	2.3	59	292	1299	3.10	78.8	0.234	5.9	13.3	MW	CG	N
1.687	42.85	72931S	5.50	139.7	1.219	31.0	106	19	1.6	41	173	768	3.10	78.8	0.234	5.9	13.3	SST	CG	N
1.687	42.85	72924	6.00	152.4	1.251	31.8	84	15	2.9	73	243	1081	3.11	78.9	0.218	5.5	14.3	MW	CG	N
1.687	42.85	72924S	6.00	152.4	1.251	31.8	71	13	2.1	53	149	663	3.11	78.9	0.218	5.5	14.3	SST	CG	N
1.687	42.85	72932	6.00	152.4	1.219	31.0	114	20	2.6	65	292	1299	3.36	85.4	0.234	5.9	14.4	MW	CG	N
1.687	42.85	72932S	6.00	152.4	1.219	31.0	97	17	1.8	45	173	768	3.36	85.4	0.234	5.9	14.4	SST	CG	N
1.687	42.85	10914	6.31	160.3	1.437	36.5	8.4	1.5	4.5	113	37	165	1.63	41.3	0.125	3.2	13.0	SPR	CG	N
1.687	42.85	4132	6.38	161.9	1.423	36.1	29	5.1	1.5	37	42	189	.92	23.5	0.132	3.4	6.00	SPR	C	Z
1.687	42.85	10776	6.63	168.3	1.505	38.2	3.1	.55	4.8	122	15	67	.89	22.5	0.091	2.3	9.75	SPR	CG	Z
1.687	42.85	3276	6.75	171.5	1.391	35.3	20	3.6	2.9	74	60	265	1.62	41.1	0.148	3.8	11.0	SPR	CG	Z
1.687	42.85	3480	7.00	177.8	1.437	36.5	8.8	1.5	4.2	108	37	165	1.56	39.7	0.125	3.2	12.5	HD	CG	Z
1.687	42.85	1911	7.25	184.2	1.427	36.2	10	1.8	4.0	101	41	180	1.65	41.8	0.130	3.3	12.7	SPR	CG	Z
1.687	42.85	4011	20.0	508.0	1.477	37.5	1.1	.19	16	399	17	77	4.31	109.3	0.105	2.7	40.0	SPR	O	Z
1.703	43.26	10208	.88	22.2	1.527	38.8	14	2.4	.57	14	7.7	34	.31	7.8	0.088	2.2	3.50	SPR	CG	Z
1.703	43.26	11835	1.75	44.5	1.547	39.3	4.0	.70	1.4	35	5.5	25	.37	9.4	0.078	2.0	4.75	SST	CG	N
1.703	43.26	11842	1.84	46.8	1.593	40.5	1.2	.20	1.6	39	1.8	8.0	.29	7.3	0.055	1.4	4.25	SST	C	N
1.703	43.26	S-3034	4.00	101.6	1.467	37.3	7.2	1.3	2.8	70	20	88	1.24	31.5	0.118	3.0	10.5	SST	CG	N
1.703	43.26	S-3109	4.38	111.1	1.453	36.9	9.7	1.7	3.1	79	30	135	1.25	31.8	0.125	3.2	10.0	SST	CG	N
1.703	43.26	S-956	4.38	111.1	1.433	36.4	13	2.4	3.0	76	40	180	1.35	34.3	0.135	3.4	10.0	SST	CG	N
1.703	43.26	1639	7.00	177.8	1.407	35.7	15	2.7	3.9	98	59	263	2.22	56.4	0.148	3.8	14.0	SPR	C	Z
1.703	43.26	11925	9.25	235.0	1.363	34.6	13	2.3	4.7	118	62	276	4.59	116.6	0.170	4.3	27.0	SPR	CG	GI
1.703	43.26	10259	10.3	260.4	1.217	30.9	83	14	2.7	70	227	1009	5.23	132.7	0.243	6.2	21.5	SPR	CG	Z
1.703	43.26	12459	20.0	508.0	1.493	37.9	1.1	.19	16	401	17	77	4.23	107.3	0.105	2.7	39.3	SPR	O	N
1.718	43.64	S-1481	1.31	33.3	1.574	40.0	3.8	.66	.95	24	3.6	16	.36	9.1	0.072	1.8	4.00	SST	C	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.718	43.64	4315	3.50	88.9	1.344	34.1	75	13	1.4	37	109	483	1.59	40.4	0.187	4.7	8.50	SPR	CG	Z
1.718	43.64	S-1507	5.00	127.0	1.594	40.5	.71	.12	4.5	115	3.2	14	.48	12.2	0.062	1.6	7.75	SST	CG	N
1.718	43.64	3934	5.00	127.0	1.558	39.6	1.7	.29	4.1	105	6.9	31	.88	22.4	0.080	2.0	10.0	SPR	C	Z
1.718	43.64	2525	5.00	127.0	1.548	39.3	2.2	.38	4.1	103	8.8	39	.94	23.7	0.085	2.2	10.0	SPR	C	Z
1.718	43.64	4337	5.50	139.7	1.094	27.8	577	101	.75	19	435	1934	3.28	83.2	0.312	7.9	10.5	SPR	CG	Z
1.718	43.64	S-1622	6.13	155.6	1.518	38.6	3.6	.63	5.0	127	18	80	1.03	26.2	0.100	2.5	10.3	SST	CG	N
1.718	43.64	238	7.00	177.8	1.422	36.1	15	2.7	3.9	98	59	260	2.04	51.7	0.148	3.8	13.8	SPR	CG	Z
1.718	43.64	3176	8.75	222.3	1.500	38.1	4.2	.74	5.9	151	25	112	1.47	37.4	0.109	2.8	13.0	SPR	CG	Z
1.734	44.04	12130	1.56	39.7	1.284	32.6	460	81	.39	9.8	178	793	.97	24.7	0.225	5.7	4.33	SPR	CG	Z
1.734	44.04	1669	2.00	50.8	1.324	33.6	178	31	.77	20	137	608	1.23	31.2	0.205	5.2	6.00	SPR	CG	Z
1.734	44.04	S-3044	2.25	57.2	1.464	37.2	25	4.4	1.4	37	37	163	.81	20.6	0.135	3.4	6.00	SST	CG	N
1.734	44.04	11285	2.38	60.3	1.552	39.4	4.6	.81	1.7	44	8.0	35	.66	16.8	0.091	2.3	6.25	SST	C	N
1.734	44.04	10361	2.50	63.5	1.284	32.6	238	42	.75	19	178	793	1.46	37.2	0.225	5.7	6.50	SPR	CG	Z
1.734	44.04	1595	3.38	85.7	1.010	25.7	1821	319	.40	10	722	3209	2.63	66.7	0.362	9.2	7.25	OT	CG	Z
1.734	44.04	S-382	3.44	87.3	1.576	40.0	2.1	.38	2.8	71	6.0	27	.63	16.1	0.079	2.0	7.00	SST	C	N
1.734	44.04	4191	3.75	95.3	1.414	35.9	30	5.3	2.2	55	65	289	1.60	40.6	0.160	4.1	10.0	SPR	CG	GI
1.734	44.04	11793	5.47	138.9	1.094	27.8	627	110	.74	19	464	2062	3.84	97.5	0.320	8.1	10.5	SPR	CG	Z
1.734	44.04	12550	5.47	138.9	1.110	28.2	474	83	.91	23	431	1918	3.74	95.1	0.312	7.9	12.0	SPR	CG	Z
1.734	44.04	12681	5.50	139.7	1.072	27.2	625	109	.82	21	510	2269	3.97	100.9	0.331	8.4	12.0	SPR	CG	Z
1.734	44.04	S-967	6.38	161.9	1.574	40.0	1.3	.22	5.5	140	6.9	31	.88	22.4	0.080	2.0	11.0	SST	CG	N
1.734	44.04	1946	7.25	184.2	1.484	37.7	8.7	1.5	4.2	106	36	161	1.46	37.0	0.125	3.2	11.7	SPR	CG	Z
1.734	44.04	12106	7.81	198.4	1.588	40.3	.91	.16	6.9	175	6.3	28	.93	23.6	0.073	1.9	11.8	SPR	C	Z
1.750	44.45	S-273	.84	21.4	1.396	35.5	214	38	.22	5.7	48	213	.62	15.7	0.177	4.5	3.50	SST	CG	N
1.750	44.45	S-41	1.00	25.4	1.396	35.5	315	55	.27	6.8	84	376	.53	13.5	0.177	4.5	3.00	SST	CG	N
1.750	44.45	3331	1.44	36.5	1.184	30.1	1460	256	.23	5.8	333	1480	1.13	28.8	0.283	7.2	4.00	SPR	CG	Z
1.750	44.45	1799	1.50	38.1	1.454	36.9	56	9.8	.76	19	42	189	.74	18.8	0.148	3.8	5.00	HD	CG	Z
1.750	44.45	1633	1.50	38.1	1.396	35.5	121	21	.62	16	74	331	.89	22.5	0.177	4.5	5.00	HD	CG	N
1.750	44.45	1919	1.63	41.3	1.454	36.9	96	17	.60	15	58	256	.70	17.9	0.148	3.8	3.75	SPR	C	Z
1.750	44.45	11600	1.75	44.5	1.396	35.5	121	21	.69	17	83	370	1.06	27.0	0.177	4.5	5.00	SPR	CG	Z
1.750	44.45	3301	2.00	50.8	1.566	39.8	11	2.0	1.3	34	15	66	.46	11.7	0.092	2.3	4.00	SPR	C	Z
1.750	44.45	12458	2.31	58.7	1.516	38.5	9.1	1.6	1.3	32	12	51	1.05	26.7	0.117	3.0	8.00	SST	C	N
1.750	44.45	10841	2.38	60.3	1.460	37.1	35	6.2	1.4	35	49	217	.85	21.6	0.145	3.7	6.00	SST	CG	N
1.750	44.45	10653	2.56	65.1	1.300	33.0	231	40	.77	19	177	787	1.46	37.2	0.225	5.7	6.50	SPR	CG	Z
1.750	44.45	S-1663	2.66	67.5	1.396	35.5	80	14	1.1	27	84	376	1.06	27.0	0.177	4.5	6.00	SST	CG	N
1.750	44.45	11499	3.00	76.2	1.426	36.2	35	6.2	1.4	35	49	217	1.62	41.1	0.162	4.1	9.00	SPR	C	Z
1.750	44.45	3447	3.13	79.4	1.616	41.0	1.3	.22	2.6	66	3.3	15	.52	13.2	0.067	1.7	6.75	SPR	C	Z
1.750	44.45	380	3.50	88.9	1.426	36.2	43	7.5	1.7	43	73	326	1.26	31.9	0.162	4.1	7.75	HD	CG	Z
1.750	44.45	31	4.00	101.6	1.426	36.2	37	6.4	2.0	51	73	326	1.42	36.0	0.162	4.1	8.75	HD	CG	Z
1.750	44.45	11825	4.06	103.2	1.604	40.7	1.2	.21	3.4	87	4.1	18	.62	15.8	0.073	1.9	8.50	SST	CG	N
1.750	44.45	S-1294	4.75	120.7	1.590	40.4	3.1	.55	3.1	78	9.6	43	.44	11.2	0.080	2.0	5.50	SST	C	N
1.750	44.45	11497	4.78	121.4	1.510	38.4	8.1	1.4	3.4	86	28	122	1.38	35.1	0.120	3.0	10.5	SPR	CG	Z
1.750	44.45	11578	4.81	122.2	1.582	40.2	2.8	.49	4.1	104	12	51	.71	18.1	0.084	2.1	7.50	SPR	C	N
1.750	44.45	S-3176	5.00	127.0	1.532	38.9	5.0	.87	3.8	97	19	84	1.20	30.5	0.109	2.8	10.0	SST	C	N
1.750	44.45	1783	5.38	136.5	1.480	37.6	16	2.8	3.8	96	61	273	1.35	34.3	0.135	3.4	9.00	MW	C	Z
1.750	44.45	S-3194	6.00	152.4	1.592	40.4	1.2	.21	5.1	128	6.0	27	.95	24.1	0.079	2.0	11.0	SST	C	N
1.750	44.45	10657	6.00	152.4	1.544	39.2	5.2	.91	4.0	102	21	93	.93	23.5	0.103	2.6	9.00	SPR	CG	GI
1.750	44.45	12126	6.81	173.0	1.426	36.2	15	2.5	3.7	95	54	242	3.08	78.2	0.162	4.1	19.0	SPR	CG	Z
1.750	44.45	7011	7.00	177.8	1.184	30.1	200	35	1.7	42	333	1480	5.00	127.0	0.283	7.2	16.6	HD	C	Z
1.750	44.45	3474	7.00	177.8	1.010	25.7	1079	189	.63	16	677	3010	4.26	108.1	0.370	9.4	11.5	SPR	CG	Z
1.750	44.45	3194	7.31	185.7	1.454	36.9	14	2.4	4.2	108	58	256	2.06	52.3	0.148	3.8	14.0	SPR	CG	Z
1.750	44.45	1677	7.50	190.5	1.310	33.3	63	11	2.6	67	164	730	3.56	90.4	0.218	5.54	16.3	SPR	CG	Z
1.750	44.45	4323	8.00	203.2	1.606	40.8	.82	.14	7.1	179	5.8	26	.94	23.8	0.072	1.8	12.0	SPR	C	Z
1.750	44.45	1779	10.0	254.0	1.426	36.2	14	2.4	5.3	135	73	326	3.40	86.4	0.162	4.1	20.0	HD	C	Z
1.750	44.45	847	10.0	254.0	1.396	35.5	19	3.3	5.1	128	95	423	3.76	95.5	0.177	4.5	21.3	HD	CG	Z
1.750	44.45	853	12.0	304.8	1.426	36.2	11	2.0	6.5	166	73	326	4.05	102.9	0.162	4.1	24.0	HD	C	Z
1.750	44.45	844	12.0	304.8	1.366	34.7	21	3.7	5.5	140	115	513	5.14	130.5	0.192	4.9	26.8	HD	CG	Z
1.750	44.45	805	12.0	304.8	1.336	33.9	28	4.9	5.1	130	144	640	5.69	144.6	0.207	5.3	27.5	HD	CG	Z
1.750	44.45	836	12.0	304.8	1.300	33.0	39	6.9	4.5	115	177	787	6.41	162.9	0.225	5.7	28.5	HD	CG	Z
1.750	44.45	4047	21.8	552.5	1.300	33.0	31	5.4	5.8	147	177	787	8.10	205.7	0.225	5.7	36.0	SPR	CG	Z
1.765	44.83	S-126	.75	19.1	1.525	38.7	58	10	.39	9.9	23	101	.36	9.1	0.120	3.0	3.00	SST	CG	N
1.765	44.83	11144	1.25	31.8	1.441	36.6	120	21	.60	15	72	322	.65	16.5	0.162	4.1	4.00	SPR	CG	Z
1.765	44.83	10117	1.69	42.8	1.211	30.8	1142	200	.27	6.9	311	1381	1.18	29.9	0.277	7.0	4.25	SPR	CG	Z
1.765	44.83	B18-203	1.75	44.5	1.527	38.8	26	4.5	1.2	30	31	137	.54	13.6	0.119	3.0	4.50	SPR	CG	N
1.765	44.83	11989	1.84	46.8	1.421	36.1	156	27	.56	14	87	386	.69	17.5	0.172	4.4	4.00	SPR	CG	Z
1.765	44.83	11892	2.91	73.8	1.331	33.8	172	30	.95	24	164	729	1.52	38.6	0.217	5.5	7.00	SPR	CG	N
1.765	44.83	3006	3.13	79.4	1.631	41.4	1.2	.22	2.6	66	3.2	14	.52	13.2	0.067	1.7	6.75	SPR	C	Z
1.781	45.24	S-3175	1.25	31.8	1.599	40.6	18	3.1	.74	19	13	59	.27	6.9	0.091	2.3	3.00	SST	CG	N
1.781	45.24	S-1276	1.31	33.3	1.599	40.6	12	2.1	.90	23	11	48	.41	10.4	0.091	2.3	3.50	SST	C	N
1.781	45.24	3029	1.38	34.9	1.599	40.6	6.1	1.1	.89	23	5.5	24	.49	12.3	0.091	2.3	5.33	SPR	CG	N
1.781	45.24	2697	1.44	36.5	1.257	31.9	1933	338	.14	3.4	262	1166	.79	20.0	0.262	6.7	3.00	HD	CG	Z
1.781	45.24	3303	1.88	47.6	1.145	29.1	1878	329	.24	6.0	445	1980	1.43	36.3	0.318	8.1	4.50	SPR	CG	Z
1.781	45.24	1687	2.00	50.8	1.485	37.7	53	9.2	1.1	27	57	252	.74	18.8	0.148	3.8	5.00	SPR	CG	Z
1.781	45.24	S-1671	2.25	57.2	1.511	38.4	27	4.8	1.4	36	39	173	.74	18.9	0.135	3.4	5.50	SST	CG	N
1.781	45.24	11716	2.28	57.9	1.511	38.4	21	3.7	1.3	34	29	127	.95	24.0	0.135	3.4	7.00	SPR	CG	Z
1.781	45.24	S-1528	3.00	76.2	1.541	39.1	14	2.5	2.0	51	29	127	.72	18.3	0.120	3.0	6.00	SST	CG	N
1.781	45.24	11609	3.53	89.7	1.309	33.2	161	28	1.1	27	170	755	2.48	62.9	0.236	6.0	9.50	SPR	CG	Z
1.781	45.24	S-227	4.25	108.0	1.621	41.2	1.8	.32	3.6	90	6.5	29	.69	17.6	0.080	2.0	7.67	SST	C	N
1.781	45.24	2930	4.56	115.9	1.531	38.9	13	2.2	2.8	70	35	157	1.04	26.4	0.125	3.2	8.25	SPR	CG	Z
1.781	45.24	S-1638	5.19	131.8	1.563	39.7	4.8	.84	4.0	101	19	85	1.20	30.5	0.109	2.8	10.0	SST	C	N
1.781	45.24	3419	5.75	146.1	1.367	34.7	68	12	2.1	53	142	630	2.48	63.1	0.207	5.3	12.0	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.781	45.24	S-1005	6.75	171.5	1.557	39.5	6.0	1.1	3.8	98	23	103	1.01	25.6	0.112	2.8	9.00	SST	CG	N
1.781	45.24	S-3083	16.0	406.4	1.511	38.3	3.4	.59	9.8	248.9	32.9	147	4.01	101.8	0.135	3.4	29.7	SST	CG	N
1.796	45.62	4153	3.00	76.2	1.662	42.2	1.4	.25	2.5	64	3.5	16	.47	11.9	0.067	1.7	6.00	SPR	C	Z
1.796	45.62	12168	3.47	88.1	1.306	33.2	198	35	1.1	28	221	985	2.21	56.0	0.245	6.2	9.00	SPR	CG	Z
1.796	45.62	10906	3.50	88.9	1.530	38.9	12	2.1	2.6	67	31	138	.86	22.0	0.133	3.4	6.50	PB	CG	N
1.796	45.62	B17-198	4.00	101.6	1.640	41.7	1.5	.26	3.3	83	4.8	21	.73	18.5	0.078	2.0	8.33	SST	C	N
1.796	45.62	3494	4.38	111.1	1.296	32.9	190	33	1.2	31	235	1044	2.50	63.5	0.250	6.4	10.0	SPR	CG	Z
1.796	45.62	S-983	5.00	127.0	1.472	37.4	38	6.6	1.7	43	63	282	1.17	29.8	0.162	4.1	7.25	SST	CG	N
1.796	45.62	11854	6.50	165.1	1.576	40.0	6.3	1.1	3.8	97	24	107	.99	25.1	0.110	2.8	9.00	SPR	CG	N
1.796	45.62	1621	11.0	279.4	1.416	36.0	23	4.0	4.8	123	109	486	4.18	106.2	0.190	4.8	22.0	HD	CG	Z
1.812	46.02	11994	1.25	31.8	1.516	38.5	75	13	.66	17	49	219	.59	15.0	0.148	3.8	4.00	SPR	CG	Z
1.812	46.02	2758	2.31	58.7	1.542	39.2	22	3.8	1.4	34	29	130	.96	24.4	0.135	3.4	7.00	SPR	CG	Z
1.812	46.02	1583	3.03	77.0	1.692	43.0	.69	.12	2.6	65	1.8	7.9	.48	12.2	0.060	1.5	7.00	SPR	C	Z
1.812	46.02	4349	3.25	82.6	1.542	39.2	20	3.5	2.1	53	42	188	.95	24.0	0.135	3.4	7.00	SPR	CG	Z
1.812	46.02	11115	3.34	84.9	1.342	34.1	186	33	1.0	27	194	865	1.88	47.8	0.235	6.0	8.00	SPR	CG	Z
1.812	46.02	S-3171	3.38	85.7	1.362	34.6	160	28	.90	23	144	641	1.80	45.7	0.225	5.7	7.00	SST	CG	N
1.812	46.02	10478	3.50	88.9	1.342	34.1	194	34	1.0	25	194	865	1.82	46.3	0.235	6.0	7.75	SPR	CG	Z
1.812	46.02	3081	6.00	152.4	1.428	36.3	51	8.9	2.2	56	112	497	2.11	53.6	0.192	4.9	11.0	SPR	CG	Z
1.812	46.02	3298	6.00	152.4	1.392	35.4	68	12	2.1	54	145	646	2.52	64.0	0.210	5.3	12.0	SPR	CG	Z
1.812	46.02	10990	6.50	165.1	1.428	36.3	50	8.7	2.2	57	112	497	2.16	54.9	0.192	4.9	11.3	HD	CG	Z
1.812	46.02	1523	10.4	263.5	1.392	35.4	34	6.0	4.3	109	145	646	4.62	117.3	0.210	5.3	22.0	HD	CG	Z
1.812	46.02	386	10.5	266.7	1.398	35.5	32	5.6	4.4	111	139	620	4.55	115.7	0.207	5.3	22.0	HD	CG	Z
1.828	46.43	12075	1.41	35.7	1.474	37.4	105	18	.52	13	54	242	.89	22.5	0.177	4.5	5.00	SPR	CG	Z
1.828	46.43	S-1193	1.44	36.5	1.618	41.1	15	2.6	1.0	26	15	67	.42	10.7	0.105	2.7	4.00	SST	CG	N
1.828	46.43	S-3049	3.50	88.9	1.588	40.3	7.4	1.3	2.4	61	18	80	1.08	27.4	0.120	3.0	9.00	SST	CG	N
1.828	46.43	11802	5.81	147.6	1.558	39.6	9.2	1.6	4.1	104	37	167	1.72	43.7	0.135	3.4	12.8	SPR	CG	GI
1.828	46.43	1801	8.00	203.2	1.532	38.9	15	2.6	5.2	131	77	343	1.74	44.2	0.148	3.8	11.8	MW	CG	GI
1.828	46.43	3421	8.25	209.6	1.368	34.7	56	9.9	3.2	82	181	806	4.49	113.9	0.230	5.8	19.5	SPR	CG	BO
1.843	46.81	S-3173	1.38	34.9	1.593	40.5	30	5.3	.88	22	26	117	.50	12.7	0.125	3.2	4.00	SST	CG	N
1.843	46.81	11765	1.94	49.2	1.701	43.2	1.6	.29	1.5	38	2.5	11	.43	10.8	0.071	1.8	6.00	SPR	CG	Z
1.843	46.81	10444	2.88	73.0	1.683	42.7	1.9	.33	2.2	55	4.1	18	.70	17.8	0.080	2.0	7.75	SPR	C	Z
1.843	46.81	3304	5.75	146.1	1.483	37.7	44	7.7	2.1	53	91	404	1.71	43.4	0.180	4.6	9.50	SPR	CG	Z
1.843	46.81	3381	6.00	152.4	1.489	37.8	36	6.3	2.5	64	91	403	1.86	47.2	0.177	4.5	10.5	SPR	CG	Z
1.843	46.81	4325	17.3	438.2	1.429	36.3	22	3.9	6.1	156	137	610	6.00	152.5	0.207	5.3	29.0	SPR	CG	Z
1.859	47.22	S-426	2.94	74.6	1.619	41.1	14	2.5	1.9	49	27	122	.66	16.8	0.120	3.0	5.50	SST	CG	N
1.859	47.22	S-979	3.13	79.4	1.409	35.8	147	26	.96	24	141	626	1.58	40.0	0.225	5.7	7.00	SST	CG	N
1.859	47.22	3399	4.13	104.8	1.235	31.4	589	103	.69	18	406	1807	2.57	65.4	0.312	7.9	8.25	SPR	CG	Z
1.859	47.22	S-1185	5.75	146.1	1.675	42.5	1.7	.30	4.6	117	7.9	35	1.15	29.2	0.092	2.3	11.5	SST	C	N
1.875	47.63	S-3064	1.25	31.8	1.715	43.6	5.9	1.0	.89	23	5.3	23	.36	9.1	0.080	2.0	3.50	SST	C	N
1.875	47.63	12678	1.63	41.3	1.689	42.9	6.6	1.2	1.2	31	8.0	35	.42	10.6	0.093	2.4	4.50	SST	CG	N
1.875	47.63	4308	1.88	47.6	1.741	44.2	1.1	.19	1.4	35	1.5	6.6	.50	12.8	0.067	1.7	6.50	SPR	C	Z
1.875	47.63	S-1228	2.13	54.0	1.691	43.0	2.6	.46	1.4	35	3.7	16	.74	18.7	0.092	2.3	8.00	SST	CG	N
1.875	47.63	10751	2.31	58.7	1.625	41.3	22	3.8	1.5	39	34	149	.63	15.9	0.125	3.2	5.00	SPR	CG	Z
1.875	47.63	10462	2.50	63.5	1.579	40.1	41	7.2	1.3	33	54	239	.78	19.7	0.148	3.8	5.25	SPR	CG	Z
1.875	47.63	4273	2.88	73.0	1.615	41.0	18	3.2	2.0	51	37	163	.81	20.6	0.130	3.3	6.25	SPR	CG	Z
1.875	47.63	4159	3.00	76.2	1.151	29.2	1425	250	.40	10	570	2535	2.57	65.3	0.362	9.2	7.00	SPR	CG	N
1.875	47.63	S-947	3.09	78.6	1.635	41.5	14	2.4	2.0	50	27	121	.66	16.8	0.120	3.0	5.50	SST	CG	N
1.875	47.63	4155	3.38	85.7	1.571	39.9	25	4.4	2.2	55	54	240	1.22	30.9	0.152	3.9	8.00	SPR	CG	Z
1.875	47.63	S-3139	4.25	108.0	1.605	40.8	15	2.6	2.5	62	37	164	1.11	28.3	0.135	3.4	7.25	SST	C	N
1.875	47.63	S-141	4.41	111.9	1.605	40.8	13	2.3	2.8	71	37	164	1.08	27.4	0.135	3.4	8.00	SST	CG	N
1.875	47.63	4331	4.50	114.3	1.125	28.6	1203	211	.55	14	665	2957	3.38	85.7	0.375	9.5	9.00	SPR	CG	GI
1.875	47.63	S-969	4.63	117.5	1.605	40.8	9.9	1.7	3.1	80	31	138	1.49	37.7	0.135	3.4	10.0	SST	C	N
1.875	47.63	11519	5.03	127.8	1.637	41.6	8.9	1.6	3.3	83	29	129	1.07	27.2	0.119	3.0	8.00	SPR	CG	Z
1.875	47.63	10360	5.50	139.7	1.649	41.9	6.1	1.1	4.1	103	25	111	1.02	25.8	0.113	2.9	9.00	SPR	CG	Z
1.875	47.63	4188	7.75	196.9	1.521	38.6	29	5.0	3.1	79	89	396	2.12	53.9	0.177	4.5	12.0	SPR	CG	GI
1.875	47.63	2868	8.25	209.6	1.773	45.0	.22	.04	7.7	196	1.7	7.7	.52	13.1	0.051	1.3	9.00	MW	C	Z
1.875	47.63	4338	11.5	292.1	1.425	36.2	59	10	3.2	81	187	830	3.60	91.4	0.225	5.7	16.0	OT	CG	Z
1.875	47.63	4077	15.5	393.7	1.425	36.2	32	5.5	5.3	134	166	738	6.30	160.0	0.225	5.7	28.0	SPR	CG	N
1.890	48.01	12504	.75	19.1	1.646	41.8	58	10	.38	9.8	22	98	.37	9.3	0.122	3.1	3.00	SPR	CG	Z
1.890	48.01	11834	1.28	32.5	1.594	40.5	58	10	.69	18	40	177	.59	15.0	0.148	3.8	4.00	SST	CG	N
1.890	48.01	S-176	2.00	50.8	1.680	42.7	8.9	1.6	1.5	37	13	58	.53	13.3	0.105	2.7	5.00	SST	CG	N
1.890	48.01	S-1615	4.00	101.6	1.324	33.6	263	46	.98	25	257	1142	2.69	68.3	0.283	7.2	9.50	SST	CG	N
1.890	48.01	4131	4.13	104.8	1.620	41.1	24	4.2	1.7	43	41	181	.83	21.0	0.135	3.4	6.00	SPR	CG	Z
1.890	48.01	S-3051	4.25	108.0	1.640	41.7	11	1.9	2.9	73	30	135	1.03	26.2	0.125	3.2	7.25	SST	C	N
1.890	48.01	3434	5.00	127.0	1.476	37.5	76	13	1.8	45	134	596	1.91	48.6	0.207	5.3	9.25	SPR	CG	GI
1.890	48.01	S-3225	5.13	130.2	1.526	38.8	28	4.9	2.8	71	79	351	2.18	55.5	0.182	4.6	12.0	SST	CG	N
1.906	48.41	3108	1.19	30.2	1.772	45.0	3.1	.54	.89	23	2.8	12	.30	7.7	0.067	1.7	3.50	SPR	C	Z
1.906	48.41	S-3253	1.41	35.7	1.726	43.8	9.3	1.6	1.0	25	9.3	41	.41	10.3	0.090	2.3	3.50	SST	C	N
1.906	48.41	11359	1.63	41.3	1.420	36.1	727	127	.28	7.2	205	911	.85	21.6	0.243	6.2	3.50	SPR	CG	Z
1.906	48.41	S-1688	1.75	44.5	1.722	43.7	6.0	1.1	1.3	34	8.0	36	.41	10.5	0.092	2.3	4.50	SST	CG	N
1.906	48.41	1867	1.75	44.5	1.666	42.3	26	4.6	1.1	28	29	130	.48	12.2	0.120	3.0	4.00	HD	CG	Z
1.906	48.41	12053	1.78	45.2	1.680	42.7	14	2.4	1.1	28	15	66	.68	17.2	0.113	2.9	5.00	SPR	C	N
1.906	48.41	S-378	1.78	45.2	1.656	42.1	22	3.9	1.1	28	24	107	.69	17.5	0.125	3.2	4.50	SST	C	N
1.906	48.41	S-952	1.97	50.0	1.582	40.2	65	11	.92	23	60	267	.73	18.5	0.162	4.1	4.50	SST	CG	N
1.906	48.41	1667	2.59	65.9	1.182	30.0	2439	427	.27	7.0	668	2971	1.72	43.7	0.362	9.2	4.75	OT	CG	Z
1.906	48.41	11574	2.63	66.7	1.610	40.9	32	5.6	1.6	40	50	224	1.04	26.3	0.148	3.8	6.00	SPR	CG	N
1.906	48.41	S-957	2.75	69.9	1.582	40.2	36	6.3	1.7	42	60	267	1.05	26.7	0.162	4.1	6.50	SST	CG	N
1.906	48.41	S-184	3.13	79.4	1.582	40.2	41	7.1	1.5	38	60	267	.97	24.7	0.162	4.1	6.00	SST	CG	N
1.906	48.41	4165	4.00	101.6	1.636	41.6	15	2.6	2.7	69	40	179	1.05	26.6	0.135	3.4	7.75	SPR	CG	Z
1.906	48.41	1835	4.00	101.6	1.622	41.2	28	5.0	2.3	59	66	292	.82	20.8	0.142	3.6	5.75	MW	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.906	48.41	S-978	4.25	108.0	1.636	41.6	14	2.5	2.6	66	36	162	.99	25.1	0.135	3.4	7.33	SST	CG	N
1.906	48.41	11646	5.75	146.1	1.662	42.2	56	9.8	.55	14	31	137	.37	9.3	0.122	3.1	3.00	SPR	CG	Z
1.906	48.41	3281	6.13	155.6	1.420	36.1	141	25	1.4	37	205	911	2.45	62.2	0.243	6.2	10.0	SPR	CG	Z
1.906	48.41	3148	7.00	177.8	1.532	38.9	35	6.2	2.8	71	99	438	2.26	57.3	0.187	4.7	12.0	SPR	CG	Z
1.906	48.41	3417	7.50	190.5	1.340	34.0	160	28	1.9	49	309	1372	4.39	111.4	0.283	7.2	15.5	SPR	CG	Z
1.906	48.41	10088	8.75	222.3	1.562	39.7	21	3.7	3.8	98	81	359	2.32	59.0	0.172	4.4	13.5	SPR	CG	Z
1.906	48.41	3098	9.31	236.5	1.456	37.0	48	8.4	3.4	87	163	727	4.11	104.3	0.225	5.7	18.3	SPR	CG	Z
1.921	48.79	3142	.75	19.1	1.721	43.7	24	4.2	.45	11	11	48	.30	7.6	0.100	2.5	3.00	SPR	CG	Z
1.921	48.79	3330	1.00	25.4	1.731	44.0	19	3.4	.72	18	14	61	.29	7.2	0.095	2.4	3.00	SPR	CG	Z
1.921	48.79	11861	1.66	42.1	1.609	40.9	92	16	.58	15	53	237	.55	13.9	0.156	4.0	3.50	SST	CG	N
1.921	48.79	S-988	1.69	42.8	1.597	40.6	47	8.3	.82	21	39	174	.86	21.9	0.162	4.1	5.33	SST	CG	N
1.921	48.79	S-941	2.25	57.2	1.739	44.2	4.7	.82	1.7	43	7.9	35	.55	13.9	0.091	2.3	5.00	SST	C	N
1.921	48.79	3310	4.25	108.0	1.651	41.9	14	2.4	2.9	73	40	178	1.08	27.4	0.135	3.4	8.00	SPR	CG	Z
1.921	48.79	S-379	4.25	108.0	1.651	41.9	9.1	1.6	2.9	74	26	118	1.35	34.3	0.135	3.4	10.0	SST	CG	N
1.921	48.79	11505	8.75	222.3	1.577	40.1	21	3.6	3.9	98	80	356	2.46	62.6	0.172	4.4	13.3	SPR	CG	Z
1.921	48.79	4054	22.5	571.5	1.471	37.4	18	3.1	9.0	229	162	722	10.1	257.2	0.225	5.7	44.0	SPR	C	Z
1.937	49.20	12114	1.50	38.1	1.563	39.7	109	19	.57	14	62	274	.94	23.7	0.187	4.7	5.00	SPR	CG	Z
1.937	49.20	72933	2.00	50.8	1.641	41.7	52	9.0	1.4	34	70	310	.65	16.4	0.148	3.8	4.38	MW	CG	N
1.937	49.20	72933S	2.00	50.8	1.641	41.7	44	7.7	1.1	27	47	209	.65	16.4	0.148	3.8	4.38	SST	CG	N
1.937	49.20	72942	2.00	50.8	1.625	41.3	64	11	1.3	33	83	371	.68	17.3	0.156	4.0	4.38	MW	CG	N
1.937	49.20	72942S	2.00	50.8	1.625	41.3	54	9.5	.97	25	53	235	.68	17.3	0.156	4.0	4.38	SST	CG	N
1.937	49.20	72959	2.00	50.8	1.613	41.0	71	12	1.3	32	90	400	.73	18.5	0.162	4.1	4.50	MW	CG	N
1.937	49.20	72959S	2.00	50.8	1.613	41.0	60	11	.98	25	59	263	.73	18.5	0.162	4.1	4.50	SST	CG	N
1.937	49.20	72976	2.00	50.8	1.553	39.4	124	22	1.0	26	129	575	.96	24.4	0.192	4.9	5.00	MW	CG	N
1.937	49.20	72976S	2.00	50.8	1.553	39.4	106	18	.86	22	90	402	.96	24.4	0.192	4.9	5.00	SST	CG	N
1.937	49.20	72934	2.50	63.5	1.641	41.7	40	7.0	1.8	45	70	312	.74	18.8	0.148	3.8	5.00	MW	CG	N
1.937	49.20	72934S	2.50	63.5	1.641	41.7	34	5.9	1.4	35	47	209	.74	18.8	0.148	3.8	5.00	SST	CG	N
1.937	49.20	72944	2.50	63.5	1.625	41.3	49	8.6	1.7	43	83	371	.80	20.3	0.156	4.0	5.13	MW	CG	N
1.937	49.20	72944S	2.50	63.5	1.625	41.3	42	7.3	1.3	32	53	235	.80	20.3	0.156	4.0	5.13	SST	CG	N
1.937	49.20	72960	2.50	63.5	1.613	41.0	55	9.5	1.6	42	90	400	.85	21.6	0.162	4.1	5.25	MW	CG	N
1.937	49.20	72960S	2.50	63.5	1.613	41.0	46	8.1	1.3	32	59	263	.85	21.6	0.162	4.1	5.25	SST	CG	N
1.937	49.20	72967	2.50	63.5	1.583	40.2	75	13	1.5	39	114	509	.97	24.7	0.177	4.5	5.50	MW	CG	N
1.937	49.20	72967S	2.50	63.5	1.583	40.2	64	11	1.2	31	77	341	.97	24.7	0.177	4.5	5.50	SST	CG	N
1.937	49.20	72977	2.50	63.5	1.553	39.4	101	18	1.4	36	144	640	1.08	27.4	0.192	4.9	5.63	MW	CG	N
1.937	49.20	72977S	2.50	63.5	1.553	39.4	86	15	1.0	27	90	402	1.08	27.4	0.192	4.9	5.63	SST	CG	N
1.937	49.20	72985	2.50	63.5	1.523	38.7	141	25	1.3	33	185	823	1.16	29.6	0.207	5.3	5.63	MW	CG	N
1.937	49.20	72985S	2.50	63.5	1.523	38.7	120	21	.94	24	113	501	1.16	29.6	0.207	5.3	5.63	SST	CG	N
1.937	49.20	72994	2.50	63.5	1.487	37.8	194	34	1.2	30	229	1020	1.29	32.9	0.225	5.7	5.75	MW	CG	N
1.937	49.20	72994S	2.50	63.5	1.487	37.8	165	29	.82	21	136	603	1.29	32.9	0.225	5.7	5.75	SST	CG	N
1.937	49.20	73009	2.50	63.5	1.437	36.5	296	52	1.0	25	296	1319	1.50	38.1	0.250	6.4	6.00	MW	CG	N
1.937	49.20	73009S	2.50	63.5	1.437	36.5	252	44	.73	19	184	820	1.50	38.1	0.250	6.4	6.00	SST	CG	N
1.937	49.20	12700	2.59	65.9	1.433	36.4	404	71	.56	14	224	998	1.26	32.0	0.252	6.4	5.00	SPR	CG	Z
1.937	49.20	11804	2.59	65.9	1.433	36.4	605	106	.37	9.4	224	998	1.01	25.6	0.252	6.4	4.00	SPR	CG	Z
1.937	49.20	3406	3.00	76.2	1.767	44.9	4.3	.75	2.5	64	11	48	.49	12.4	0.085	2.2	4.75	SPR	C	Z
1.937	49.20	72935	3.00	76.2	1.641	41.7	33	5.7	2.1	55	70	311	.85	21.6	0.148	3.8	5.75	MW	CG	N
1.937	49.20	72935S	3.00	76.2	1.641	41.7	28	4.8	1.7	43	47	209	.85	21.6	0.148	3.8	5.75	SST	CG	N
1.937	49.20	72946	3.00	76.2	1.625	41.3	40	7.0	2.1	53	83	371	.90	22.8	0.156	4.0	5.75	MW	CG	N
1.937	49.20	72946S	3.00	76.2	1.625	41.3	34	6.0	1.5	39	53	235	.90	22.8	0.156	4.0	5.75	SST	CG	N
1.937	49.20	72961	3.00	76.2	1.613	41.0	44	7.8	2.0	52	90	400	.97	24.7	0.162	4.1	6.00	MW	CG	N
1.937	49.20	72961S	3.00	76.2	1.613	41.0	38	6.6	1.6	40	59	263	.97	24.7	0.162	4.1	6.00	SST	CG	N
1.937	49.20	72968	3.00	76.2	1.583	40.2	61	11	1.9	48	115	512	1.11	28.1	0.177	4.5	6.25	MW	CG	N
1.937	49.20	72968S	3.00	76.2	1.583	40.2	52	9.1	1.5	38	77	341	1.11	28.1	0.177	4.5	6.25	SST	CG	N
1.937	49.20	72978	3.00	76.2	1.553	39.4	82	14	1.8	45	144	639	1.25	31.7	0.192	4.9	6.50	MW	CG	N
1.937	49.20	72978S	3.00	76.2	1.553	39.4	70	12	1.3	33	90	402	1.25	31.7	0.192	4.9	6.50	SST	CG	N
1.937	49.20	72986	3.00	76.2	1.523	38.7	118	21	1.6	40	185	823	1.32	33.5	0.207	5.3	6.38	MW	CG	N
1.937	49.20	72986S	3.00	76.2	1.523	38.7	100	18	1.1	29	113	501	1.32	33.5	0.207	5.3	6.38	SST	CG	N
1.937	49.20	72996	3.00	76.2	1.487	37.8	156	27	1.5	37	229	1020	1.52	38.6	0.225	5.7	6.75	MW	CG	N
1.937	49.20	72996S	3.00	76.2	1.487	37.8	133	23	1.0	26	136	603	1.52	38.6	0.225	5.7	6.75	SST	CG	N
1.937	49.20	73010	3.00	76.2	1.437	36.5	237	42	1.3	33	304	1352	1.72	43.7	0.250	6.4	6.88	MW	CG	N
1.937	49.20	73010S	3.00	76.2	1.437	36.5	202	35	.91	23	184	820	1.72	43.7	0.250	6.4	6.88	SST	CG	N
1.937	49.20	72936	3.50	88.9	1.641	41.7	27	4.8	2.6	65	70	312	.94	24.0	0.148	3.8	6.38	MW	CG	N
1.937	49.20	72936S	3.50	88.9	1.641	41.7	23	4.1	2.0	51	47	209	.94	24.0	0.148	3.8	6.38	SST	CG	N
1.937	49.20	72948	3.50	88.9	1.625	41.3	34	5.9	2.5	63	83	371	1.01	25.8	0.156	4.0	6.50	MW	CG	N
1.937	49.20	72948S	3.50	88.9	1.625	41.3	29	5.0	1.8	47	53	235	1.01	25.8	0.156	4.0	6.50	SST	CG	N
1.937	49.20	72962	3.50	88.9	1.613	41.0	37	6.5	2.4	61	90	400	1.09	27.8	0.162	4.1	6.75	MW	CG	N
1.937	49.20	72962S	3.50	88.9	1.613	41.0	32	5.6	1.9	47	59	263	1.09	27.8	0.162	4.1	6.75	SST	CG	N
1.937	49.20	S-3160	3.50	88.9	1.583	40.2	47	8.3	1.6	41	77	341	1.19	30.3	0.177	4.5	6.75	SST	CG	N
1.937	49.20	72969	3.50	88.9	1.583	40.2	51	8.9	2.2	57	114	509	1.26	32.0	0.177	4.5	7.13	MW	CG	N
1.937	49.20	72969S	3.50	88.9	1.583	40.2	43	7.6	1.8	45	77	341	1.26	32.0	0.177	4.5	7.13	SST	CG	N
1.937	49.20	72979	3.50	88.9	1.553	39.4	69	12	2.1	53	143	638	1.42	36.0	0.192	4.9	7.38	MW	CG	N
1.937	49.20	72979S	3.50	88.9	1.553	39.4	58	10	1.5	39	90	402	1.42	36.0	0.192	4.9	7.38	SST	CG	N
1.937	49.20	72987	3.50	88.9	1.523	38.7	95	17	1.9	49	185	823	1.53	38.8	0.207	5.3	7.38	MW	CG	N
1.937	49.20	72987S	3.50	88.9	1.523	38.7	81	14	1.4	35	113	501	1.53	38.8	0.207	5.3	7.38	SST	CG	N
1.937	49.20	72998	3.50	88.9	1.487	37.8	131	23	1.8	45	229	1020	1.72	43.6	0.225	5.7	7.63	MW	CG	N
1.937	49.20	72998S	3.50	88.9	1.487	37.8	111	19	1.2	31	136	603	1.72	43.6	0.225	5.7	7.63	SST	CG	N
1.937	49.20	73011	3.50	88.9	1.437	36.5	198	35	1.5	39	303	1346	1.97	50.0	0.250	6.4	7.88	MW	CG	N
1.937	49.20	73011S	3.50	88.9	1.437	36.5	168	29	1.1	28	184	820	1.97	50.0	0.250	6.4	7.88	SST	CG	N
1.937	49.20	72937	4.00	101.6	1.641	41.7	24	4.2	2.9	75	70	311	1.05	26.8	0.148	3.8	7.13	MW	CG	N
1.937	49.20	72937S	4.00	101.6	1.641	41.7	20	3.5	2.3	59	47	209	1.05	26.8	0.148	3.8	7.13	SST	CG	N
1.937	49.20	72950	4.00	101.6	1.625	41.3	29	5.1	2.9	72	83	371	1.11	28.2	0.156	4.0	7.13	MW	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
1.937	49.20	72950S	4.00	101.6	1.625	41.3	25	4.3	2.1	54	53	235	1.11	28.2	0.156	4.0	7.13	SST	CG	N
1.937	49.20	72963	4.00	101.6	1.613	41.0	32	5.7	2.8	71	90	400	1.22	30.9	0.162	4.1	7.50	MW	CG	N
1.937	49.20	72963S	4.00	101.6	1.613	41.0	27	4.8	2.2	55	59	263	1.22	30.9	0.162	4.1	7.50	SST	CG	N
1.937	49.20	72970	4.00	101.6	1.583	40.2	44	7.7	2.6	66	115	511	1.39	35.4	0.177	4.5	7.88	MW	CG	N
1.937	49.20	72970S	4.00	101.6	1.583	40.2	37	6.6	2.0	52	77	341	1.39	35.4	0.177	4.5	7.88	SST	CG	N
1.937	49.20	72980	4.00	101.6	1.553	39.4	59	10	2.4	61	143	637	1.58	40.2	0.192	4.9	8.25	MW	CG	N
1.937	49.20	72980S	4.00	101.6	1.553	39.4	50	8.8	1.8	46	90	402	1.58	40.2	0.192	4.9	8.25	SST	CG	N
1.937	49.20	72988	4.00	101.6	1.523	38.7	82	14	2.3	57	185	823	1.71	43.4	0.207	5.3	8.25	MW	CG	N
1.937	49.20	72988S	4.00	101.6	1.523	38.7	70	12	1.6	41	113	501	1.71	43.4	0.207	5.3	8.25	SST	CG	N
1.937	49.20	73000	4.00	101.6	1.487	37.8	112	20	2.0	52	229	1020	1.91	48.6	0.225	5.7	8.50	MW	CG	N
1.937	49.20	73000S	4.00	101.6	1.487	37.8	95	17	1.4	36	136	603	1.91	48.6	0.225	5.7	8.50	SST	CG	N
1.937	49.20	73012	4.00	101.6	1.437	36.5	169	30	1.8	45	302	1342	2.22	56.4	0.250	6.4	8.88	MW	CG	N
1.937	49.20	73012S	4.00	101.6	1.437	36.5	144	25	1.3	33	184	820	2.22	56.4	0.250	6.4	8.88	SST	CG	N
1.937	49.20	3420	4.44	112.7	1.371	34.8	254	45	1.2	30	304	1352	2.83	71.9	0.283	7.2	10.0	SPR	CG	BO
1.937	49.20	72938	4.50	114.3	1.641	41.7	21	3.7	3.4	85	70	312	1.15	29.1	0.148	3.8	7.75	MW	CG	N
1.937	49.20	72938S	4.50	114.3	1.641	41.7	18	3.1	2.6	67	47	209	1.15	29.1	0.148	3.8	7.75	SST	CG	N
1.937	49.20	72952	4.50	114.3	1.625	41.3	26	4.5	3.2	82	83	371	1.23	31.2	0.156	4.0	7.88	MW	CG	N
1.937	49.20	72952S	4.50	114.3	1.625	41.3	22	3.8	2.4	61	53	235	1.23	31.2	0.156	4.0	7.88	SST	CG	N
1.937	49.20	72964	4.50	114.3	1.613	41.0	28	5.0	3.2	80	90	400	1.34	33.9	0.162	4.1	8.25	MW	CG	N
1.937	49.20	72964S	4.50	114.3	1.613	41.0	24	4.2	2.4	62	59	263	1.34	33.9	0.162	4.1	8.25	SST	CG	N
1.937	49.20	72971	4.50	114.3	1.583	40.2	39	6.8	3.0	76	115	513	1.53	38.8	0.177	4.5	8.63	MW	CG	N
1.937	49.20	72971S	4.50	114.3	1.583	40.2	33	5.8	2.3	59	77	341	1.53	38.8	0.177	4.5	8.63	SST	CG	N
1.937	49.20	72981	4.50	114.3	1.553	39.4	52	9.1	2.8	70	144	642	1.73	43.9	0.192	4.9	9.00	MW	CG	N
1.937	49.20	72981S	4.50	114.3	1.553	39.4	44	7.8	2.0	52	90	402	1.73	43.9	0.192	4.9	9.00	SST	CG	N
1.937	49.20	72989	4.50	114.3	1.523	38.7	72	13	2.6	65	185	823	1.89	48.0	0.207	5.3	9.13	MW	CG	N
1.937	49.20	72989S	4.50	114.3	1.523	38.7	61	11	1.8	47	113	501	1.89	48.0	0.207	5.3	9.13	SST	CG	N
1.937	49.20	73002	4.50	114.3	1.487	37.8	98	17	2.3	59	229	1020	2.14	54.3	0.225	5.7	9.50	MW	CG	N
1.937	49.20	73002S	4.50	114.3	1.487	37.8	84	15	1.6	41	136	603	2.14	54.3	0.225	5.7	9.50	SST	CG	N
1.937	49.20	73013	4.50	114.3	1.437	36.5	148	26	2.0	52	301	1339	2.47	62.7	0.250	6.4	9.88	MW	CG	N
1.937	49.20	73013S	4.50	114.3	1.437	36.5	126	22	1.5	37	184	820	2.47	62.7	0.250	6.4	9.88	SST	CG	N
1.937	49.20	72939	5.00	127.0	1.641	41.7	19	3.3	3.7	95	70	311	1.26	32.0	0.148	3.8	8.50	MW	CG	N
1.937	49.20	72939S	5.00	127.0	1.641	41.7	16	2.8	3.0	75	47	209	1.26	32.0	0.148	3.8	8.50	SST	CG	N
1.937	49.20	72954	5.00	127.0	1.625	41.3	23	4.0	3.6	92	83	371	1.33	33.7	0.156	4.0	8.50	MW	CG	N
1.937	49.20	72954S	5.00	127.0	1.625	41.3	20	3.4	2.7	69	53	235	1.33	33.7	0.156	4.0	8.50	SST	CG	N
1.937	49.20	72965	5.00	127.0	1.613	41.0	25	4.4	3.5	90	90	400	1.46	37.0	0.162	4.1	9.00	MW	CG	N
1.937	49.20	72965S	5.00	127.0	1.613	41.0	22	3.8	2.7	69	59	263	1.46	37.0	0.162	4.1	9.00	SST	CG	N
1.937	49.20	72972	5.00	127.0	1.583	40.2	35	6.1	3.3	84	115	511	1.68	42.7	0.177	4.5	9.50	MW	CG	N
1.937	49.20	72972S	5.00	127.0	1.583	40.2	29	5.2	2.6	66	77	341	1.68	42.7	0.177	4.5	9.50	SST	CG	N
1.937	49.20	72982	5.00	127.0	1.553	39.4	47	8.1	3.1	79	144	642	1.90	48.2	0.192	4.9	9.88	MW	CG	N
1.937	49.20	72982S	5.00	127.0	1.553	39.4	40	6.9	2.3	58	90	402	1.90	48.2	0.192	4.9	9.88	SST	CG	N
1.937	49.20	72990	5.00	127.0	1.523	38.7	64	11	2.9	73	185	823	2.07	52.6	0.207	5.3	10.0	MW	CG	N
1.937	49.20	72990S	5.00	127.0	1.523	38.7	54	9.5	2.1	53	113	501	2.07	52.6	0.207	5.3	10.0	SST	CG	N
1.937	49.20	73004	5.00	127.0	1.487	37.8	88	15	2.6	67	229	1020	2.33	59.3	0.225	5.7	10.4	MW	CG	N
1.937	49.20	73004S	5.00	127.0	1.487	37.8	74	13	1.8	46	136	603	2.33	59.3	0.225	5.7	10.4	SST	CG	N
1.937	49.20	73014	5.00	127.0	1.437	36.5	132	23	2.3	58	301	1337	2.72	69.1	0.250	6.4	10.9	MW	CG	N
1.937	49.20	73014S	5.00	127.0	1.437	36.5	112	20	1.6	42	184	820	2.72	69.1	0.250	6.4	10.9	SST	CG	N
1.937	49.20	11895	5.25	133.4	1.583	40.2	33	5.8	2.6	66	86	384	1.73	43.8	0.177	4.5	9.75	SPR	CG	N
1.937	49.20	72940	5.50	139.7	1.641	41.7	17	3.0	4.1	105	70	312	1.35	34.3	0.148	3.8	9.13	MW	CG	N
1.937	49.20	72940S	5.50	139.7	1.641	41.7	14	2.5	3.3	83	47	209	1.35	34.3	0.148	3.8	9.13	SST	CG	N
1.937	49.20	72956	5.50	139.7	1.625	41.3	21	3.6	4.0	102	83	371	1.44	36.7	0.156	4.0	9.25	MW	CG	N
1.937	49.20	72956S	5.50	139.7	1.625	41.3	18	3.1	3.0	76	53	235	1.44	36.7	0.156	4.0	9.25	SST	CG	N
1.937	49.20	72966	5.50	139.7	1.613	41.0	23	4.0	3.9	100	90	399	1.58	40.1	0.162	4.1	9.75	MW	CG	N
1.937	49.20	72966S	5.50	139.7	1.613	41.0	19	3.4	3.0	77	59	263	1.58	40.1	0.162	4.1	9.75	SST	CG	N
1.937	49.20	72973	5.50	139.7	1.583	40.2	31	5.5	3.7	94	115	511	1.81	46.1	0.177	4.5	10.3	MW	CG	N
1.937	49.20	72973S	5.50	139.7	1.583	40.2	27	4.6	2.9	73	77	341	1.81	46.1	0.177	4.5	10.3	SST	CG	N
1.937	49.20	72983	5.50	139.7	1.553	39.4	42	7.3	3.4	87	144	640	2.06	52.4	0.192	4.9	10.8	MW	CG	N
1.937	49.20	72983S	5.50	139.7	1.553	39.4	36	6.2	2.5	64	90	402	2.06	52.4	0.192	4.9	10.8	SST	CG	N
1.937	49.20	72991	5.50	139.7	1.523	38.7	58	10	3.2	81	185	823	2.25	57.2	0.207	5.3	10.9	MW	CG	N
1.937	49.20	72991S	5.50	139.7	1.523	38.7	49	8.6	2.3	58	113	501	2.25	57.2	0.207	5.3	10.9	SST	CG	N
1.937	49.20	73006	5.50	139.7	1.487	37.8	79	14	2.9	74	229	1020	2.56	65.0	0.225	5.7	11.4	MW	CG	N
1.937	49.20	73006S	5.50	139.7	1.487	37.8	67	12	2.0	51	136	603	2.56	65.0	0.225	5.7	11.4	SST	CG	N
1.937	49.20	73015	5.50	139.7	1.437	36.5	119	21	2.5	64	300	1335	2.97	75.4	0.250	6.4	11.9	MW	CG	N
1.937	49.20	73015S	5.50	139.7	1.437	36.5	101	18	1.8	46	184	820	2.97	75.4	0.250	6.4	11.9	SST	CG	N
1.937	49.20	72958	6.00	152.4	1.625	41.3	19	3.3	4.4	112	83	371	1.56	39.6	0.156	4.0	10.0	MW	CG	N
1.937	49.20	72958S	6.00	152.4	1.625	41.3	16	2.8	3.3	84	53	235	1.56	39.6	0.156	4.0	10.0	SST	CG	N
1.937	49.20	72974	6.00	152.4	1.583	40.2	29	5.0	4.0	102	115	511	1.97	50.0	0.177	4.5	11.1	MW	CG	N
1.937	49.20	72974S	6.00	152.4	1.583	40.2	24	4.2	3.2	80	77	341	1.97	50.0	0.177	4.5	11.1	SST	CG	N
1.937	49.20	72984	6.00	152.4	1.553	39.4	38	6.7	3.8	96	144	640	2.23	56.7	0.192	4.9	11.6	MW	CG	N
1.937	49.20	72984S	6.00	152.4	1.553	39.4	32	5.7	2.8	71	90	402	2.23	56.7	0.192	4.9	11.6	SST	CG	N
1.937	49.20	72992	6.00	152.4	1.523	38.7	53	9.2	3.5	89	185	823	2.41	61.1	0.207	5.3	11.6	MW	CG	N
1.937	49.20	72992S	6.00	152.4	1.523	38.7	45	7.8	2.5	64	113	501	2.41	61.1	0.207	5.3	11.6	SST	CG	N
1.937	49.20	73008	6.00	152.4	1.487	37.8	72	13	3.2	81	229	1020	2.76	70.0	0.225	5.7	12.3	MW	CG	N
1.937	49.20	73008S	6.00	152.4	1.487	37.8	61	11	2.2	56	136	603	2.76	70.0	0.225	5.7	12.3	SST	CG	N
1.937	49.20	73016	6.00	152.4	1.437	36.5	108	19	2.8	71	302	1349	3.2	81.3	0.250	6.4	12.8	MW	CG	N
1.937	49.20	73016S	6.00	152.4	1.437	36.5	94	16.5	1.95	49.5	183	817	3.2	81.8	0.250	6.4	12.8	SST	CG	N
1.937	49.20	S-3191	7.00	177.8	1.711	43.5	3.1	.54	5.4	138	17	75	1.58	40.2	0.113	2.9	13.0	SST	C	N
1.953	49.61	11926	1.50	38.1	1.579	40.1	106	19	.57	14	60	267	.94	23.7	0.187	4.7	5.00	SPR	CG	Z
1.953	49.61	12080	1.56	39.7	1.829	46.5	1.3	.24	1.2	31	1.7	7.4	.33	8.4	0.062	1.6	4.33	SPR	C	Z
1.953	49.61	S-3080	1.88	47.6	1.657	42.1	51	8.9	.91	23	47	207	.59	15.0	0.148	3.8	4.00	SST	CG	N
1.953	49.61	S-92	2.75	69.9	1.579	40.1	139	24	.60	15	83	369	.75	19.0	0.187	4.7	4.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FINISH
1.953	49.61	S-380	4.13	104.8	1.683	42.7	12	2.2	2.9	73	35	158	1.03	26.1	0.135	3.4	7.67	SST	CG	N
1.953	49.61	11985	4.88	123.8	1.641	41.7	15	2.6	3.0	76	44	196	1.87	47.5	0.156	4.0	12.0	SPR	CG	Z
1.953	49.61	S-3050	5.25	133.4	1.599	40.6	28	4.9	2.7	68	76	339	1.73	43.8	0.177	4.5	9.75	SST	CG	N
1.953	49.61	3375	5.25	133.4	1.329	33.8	385	67	1.0	26	389	1730	3.12	79.2	0.312	7.9	10.0	SPR	CG	Z
1.953	49.61	2687	6.38	161.9	1.599	40.6	19	3.4	3.7	94	72	321	2.66	67.4	0.177	4.5	15.0	HD	CG	Z
1.953	49.61	S-257	6.38	161.9	1.539	39.1	36	6.3	3.1	79	112	497	2.90	73.6	0.207	5.3	14.0	SST	CG	N
1.968	49.99	3376	4.00	101.6	1.594	40.5	104	18	.92	23	96	425	.94	23.7	0.187	4.7	5.00	SPR	CG	Z
1.968	49.99	12626	4.25	108.0	1.698	46.4	12	2.1	3.0	76	35	155	1.05	26.7	.135	3.4	7.75	SST	C	N
1.968	49.99	S-1645	5.50	139.7	1.774	45.1	3.1	.55	4.6	117	14	64	.73	18.5	0.097	2.5	7.50	SST	CG	N
1.968	49.99	4197	8.00	203.2	1.528	38.8	45	7.9	3.3	84	149	661	3.74	95.0	0.225	5.7	16.0	SPR	CG	Z
1.968	49.99	12552	8.00	203.2	1.518	38.6	50	8.7	3.2	81	159	706	3.60	91.4	0.225	5.7	16.0	HD	CG	Z
1.968	49.99	10237	8.00	203.2	1.306	33.2	281	49	1.6	41	458	2037	5.30	134.5	0.331	8.4	16.0	SPR	CG	Z
1.968	49.99	4042	22.0	558.8	1.518	38.6	20	3.6	7.8	197	159	706	8.10	205.7	0.225	5.7	36.0	SPR	CG	Z
1.984	50.39	3170	1.22	31.0	1.756	44.6	15	2.6	.71	18	10	47	.51	13.0	0.114	2.9	4.50	SPR	CG	Z
1.984	50.39	1681	1.25	31.8	1.744	44.3	23	4.0	.77	20	18	79	.48	12.2	0.120	3.0	4.00	SPR	CG	Z
1.984	50.39	S-3071	1.50	38.1	1.774	45.1	15	2.7	1.0	26	16	70	.47	12.0	0.105	2.7	3.50	SST	C	N
1.984	50.39	1875	1.69	42.8	1.704	43.3	88	15	.69	17	61	269	.42	10.7	0.140	3.6	3.00	MW	CG	Z
1.984	50.39	4177	2.88	73.0	1.600	40.6	91	16	1.1	29	103	456	1.10	28.0	0.192	4.9	5.75	SPR	CG	Z
2.000	50.80	S-1243	1.75	44.5	1.550	39.4	229	40	.57	15	132	585	1.01	25.7	0.225	5.7	4.50	SST	CG	N
2.000	50.80	S-120	1.88	47.6	1.616	41.0	144	25	.61	15	88	390	.77	19.5	0.192	4.9	4.00	SST	CG	N
2.000	50.80	11050	2.00	50.8	1.514	38.5	370	65	.53	13	196	871	1.09	27.8	0.243	6.2	4.50	HD	CG	Z
2.000	50.80	11247	2.41	61.1	1.836	46.6	4.6	.81	2.1	53	9.6	43	.33	8.3	0.082	2.1	4.00	MW	CG	N
2.000	50.80	S-365	2.50	63.5	1.876	47.7	.68	.12	2.1	53	1.4	6.3	.42	10.6	0.062	1.6	5.75	SST	C	N
2.000	50.80	11991	2.50	63.5	1.620	41.1	74	13	1.3	33	98	434	1.19	30.2	0.190	4.8	6.25	SPR	CG	Z
2.000	50.80	1795	2.94	74.6	1.730	43.9	23	4.0	1.7	43	39	171	.71	18.0	0.135	3.4	5.25	SPR	CG	Z
2.000	50.80	1673	3.50	88.9	1.550	39.4	125	22	1.2	32	156	695	1.63	41.4	0.225	5.7	7.25	HD	CG	Z
2.000	50.80	S-1650	3.63	92.1	1.828	46.4	1.9	.33	3.0	76	5.7	25	.62	15.8	0.086	2.2	7.25	SST	CG	N
2.000	50.80	S-982	3.63	92.1	1.626	41.3	73	13	1.1	28	81	361	1.03	26.1	0.187	4.7	5.50	SST	CG	N
2.000	50.80	4145	4.00	101.6	1.376	35.0	472	83	.81	20	381	1694	2.50	63.4	0.312	7.9	8.00	SPR	CG	Z
2.000	50.80	S-461	4.50	114.3	1.614	41.0	45	7.9	2.0	50	89	396	1.64	41.7	0.193	4.9	8.50	SST	CG	N
2.000	50.80	S-3113	4.63	117.5	1.676	42.6	17	3.0	3.0	76	52	232	1.62	41.1	0.162	4.1	10.0	SST	CG	N
2.000	50.80	1947	5.09	129.4	1.800	45.7	3.9	.68	4.3	108	17	74	.84	21.3	0.100	2.5	7.38	SPR	C	Z
2.000	50.80	11446	5.63	142.9	1.750	44.5	5.9	1.0	4.1	105	24	109	1.50	38.1	0.125	3.2	11.0	SPR	C	Z
2.000	50.80	3094	6.13	155.6	1.830	46.5	1.5	.27	5.4	136	8.2	36	.77	19.4	0.085	2.2	9.00	SPR	CG	GI
2.000	50.80	3485	6.50	165.1	1.730	43.9	11	2.0	3.4	86	39	171	1.28	32.6	0.135	3.4	8.50	HD	C	GI
2.000	50.80	10441	8.00	203.2	1.550	39.4	51	8.9	3.1	78	156	695	3.38	85.7	0.225	5.7	15.0	SPR	CG	N
2.000	50.80	10247	8.50	215.9	1.434	36.4	152	27	1.9	49	295	1314	3.96	100.6	0.283	7.2	14.0	SPR	CG	GI
2.000	50.80	4239	9.25	235.0	1.550	39.4	41	7.2	3.8	96	156	695	4.05	102.9	0.225	5.7	18.0	SPR	CG	Z
2.000	50.80	3489	9.88	250.8	1.476	37.5	76	13	3.1	79	236	1050	4.98	126.4	0.262	6.7	19.0	SPR	CG	Z
2.000	50.80	S-3198	11.0	279.4	1.768	44.9	3.1	.54	7.5	191	23	103	1.54	39.0	0.116	2.9	13.3	SST	CG	N
2.000	50.80	3124	11.1	282.6	1.750	44.5	5.3	.93	5.9	150	32	140	1.50	38.1	0.125	3.2	12.0	SPR	CG	Z
2.000	50.80	4385	11.8	298.5	1.616	41.0	14	2.5	6.9	174	96	429	4.90	124.4	0.192	4.9	25.5	SPR	CG	Z
2.000	50.80	813	12.0	304.8	1.646	41.8	12	2.1	6.8	174	84	373	3.72	94.4	0.177	4.5	21.0	HD	CG	Z
2.000	50.80	806	12.0	304.8	1.586	40.3	22	3.8	5.9	150	127	565	4.81	122.2	0.207	5.3	23.3	HD	CG	Z
2.000	50.80	837	12.0	304.8	1.550	39.4	30	5.2	5.2	133	156	695	5.40	137.2	0.225	5.7	24.0	HD	CG	Z
2.000	50.80	676	12.0	304.8	1.376	35.0	142	25	2.7	68	381	1694	6.86	174.3	0.312	7.9	22.0	SPR	CG	Z
2.015	51.18	S-1665	2.34	59.5	1.565	39.8	175	31	.75	19	131	581	1.18	30.0	0.225	5.7	5.25	SST	CG	N
2.015	51.18	S-1664	2.44	61.9	1.565	39.8	190	33	.69	17	131	581	1.13	28.6	0.225	5.7	5.00	SST	CG	N
2.015	51.18	11975	3.41	86.5	1.745	44.3	14	2.5	2.5	63	35	157	.95	24.0	0.135	3.4	7.00	SPR	CG	Z
2.031	51.59	S-3196	4.66	118.3	1.873	47.6	1.3	.23	4.0	102	5.4	24	.63	16.1	0.079	2.0	7.00	SST	C	N
2.031	51.59	3413	5.25	133.4	1.847	46.9	2.0	.35	4.3	110	8.7	39	.92	23.4	0.092	2.3	9.00	SPR	C	Z
2.031	51.59	4353	6.75	171.5	1.465	37.2	145	25	2.0	51	291	1296	3.79	96.4	0.283	7.2	13.5	SPR	CG	Z
2.046	51.97	11931	1.53	38.9	1.794	45.6	20	3.6	.96	24	20	88	.57	14.4	0.126	3.2	4.50	SPR	CG	Z
2.046	51.97	10651	2.53	64.3	1.522	38.7	434	76	.53	14	231	1028	1.25	31.6	0.262	6.7	4.75	SPR	CG	Z
2.046	51.97	3379	3.13	79.4	1.692	43.0	43	7.6	1.9	48	82	363	1.24	31.5	0.177	4.5	7.00	SPR	CG	GI
2.046	51.97	S-1619	3.75	95.3	1.924	48.9	.75	.13	3.4	88	2.6	12	.31	7.7	0.061	1.5	5.00	SST	CG	N
2.046	51.97	11607	5.63	142.9	1.785	45.3	6.6	1.2	4.1	103	27	119	1.57	39.8	0.131	3.3	11.0	SPR	CG	Z
2.046	51.97	4167	7.38	187.3	1.722	43.7	14	2.4	4.6	116	63	281	2.07	52.5	0.162	4.1	12.8	SPR	CG	Z
2.046	51.97	10580	11.0	279.4	1.538	39.1	70	12	3.1	79	218	971	4.26	108.1	0.254	6.5	16.8	SPR	CG	N
2.062	52.37	S-1554	1.91	48.4	1.758	44.7	26	4.5	1.0	26	26	117	.87	22.2	0.152	3.9	5.75	SST	CG	N
2.062	52.37	S-3141	2.13	54.0	1.496	38.0	518	91	.46	12	237	1055	1.34	34.1	0.283	7.2	4.75	SST	CG	N
2.062	52.37	3118	2.25	57.2	1.852	47.0	5.8	1.0	1.6	41	9.4	42	.63	16.0	0.105	2.7	6.00	SPR	CG	Z
2.062	52.37	S-1562	3.19	80.9	1.862	47.3	5.5	.97	2.7	68	15	66	.50	12.7	0.100	2.5	5.00	SST	CG	N
2.062	52.37	S-3238	3.19	81.0	1.738	44.1	30	5.3	1.8	47	56	247	1.01	25.7	0.162	4.1	6.25	SST	CG	N
2.062	52.37	S-3136	3.25	82.6	1.812	46.0	6.0	1.1	2.1	54	13	57	1.13	28.6	0.125	3.2	9.00	SST	CG	N
2.062	52.37	S-3069	3.50	88.9	1.708	43.4	37	6.4	2.0	50	72	322	1.24	31.5	0.177	4.5	7.00	SST	CG	N
2.062	52.37	S-1019	4.00	101.6	1.792	45.5	15	2.5	2.3	59	34	150	.81	20.6	0.135	3.4	6.00	SST	CG	N
2.062	52.37	11727	4.97	126.2	1.568	39.8	224	39	.89	23	200	888	1.48	37.6	0.247	6.3	6.00	SPR	CG	Z
2.062	52.37	2986	5.00	127.0	1.738	44.1	25	4.3	2.5	64	63	279	1.30	33.1	0.162	4.1	8.00	SPR	CG	Z
2.062	52.37	S-158	5.00	127.0	1.738	44.1	21	3.7	2.7	68	56	247	1.30	32.9	0.162	4.1	8.00	SST	CG	N
2.062	52.37	11730	5.25	133.4	1.890	48.0	1.5	.25	4.5	114	6.5	29	.77	19.7	0.086	2.2	9.00	SPR	CG	GI
2.062	52.37	1839	5.50	139.7	1.918	48.7	.40	.07	4.4	112	1.8	7.8	1.10	27.9	0.072	1.8	14.3	HD	C	Z
2.062	52.37	11905	7.09	180.2	1.708	43.4	23	4.1	3.5	88	81	362	1.95	49.5	0.177	4.5	11.0	SPR	CG	N
2.062	52.37	3259	8.88	225.4	1.538	39.1	116	20	2.2	56	258	1148	3.14	79.9	0.262	6.7	12.0	OT	CG	Z
2.062	52.37	4178	9.00	228.6	1.538	39.1	83	15	2.8	70	229	1021	4.19	106.5	0.262	6.7	16.0	SPR	CG	BO
2.062	52.37	3261	9.00	228.6	1.496	38.0	126	22	2.6	65	323	1438	4.25	107.8	0.283	7.2	15.0	OT	CG	Z
2.062	52.37	3263	9.19	233.4	1.538	39.1	97	17	2.7	68	258	1148	3.67	93.2	0.262	6.7	14.0	OT	CG	Z
2.062	52.37	S-3014	9.75	247.7	1.750	44.5	7.4	1.3	6.7	171	50	221	2.57	65.4	0.156	4.0	16.5	SST	CG	N
2.078	52.78	12073	1.75	44.5	1.942	49.3	1.2	.21	1.4	36	1.7	7.6	.35	8.9	0.068	1.7	5.00	SPR	CG	Z
2.078	52.78	11813	4.34	110.3	1.838	46.7	7.9	1.4	3.4	86	27	120	.84	21.3	0.120	3.0	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.078	52.78	S-1661	4.44	112.7	1.870	47.5	4.3	.75	3.8	96	16	72	.68	17.2	0.104	2.6	6.50	SST	CG	N
2.094	53.19	3372	1.38	34.9	1.644	41.8	564	99	.27	6.7	150	666	.68	17.1	0.225	5.7	3.00	SPR	CG	Z
2.094	53.19	11715	1.75	44.5	1.956	49.7	1.3	.23	1.4	36	1.8	8.2	.35	8.8	0.069	1.8	5.00	SPR	CG	GI
2.094	53.19	4298	2.25	57.2	1.854	47.1	14	2.5	1.7	43	24	105	.57	14.5	0.120	3.0	4.75	SPR	CG	Z
2.094	53.19	11869	2.53	64.3	1.782	45.3	19	3.3	1.4	35	26	114	1.17	29.7	0.156	4.0	7.50	SST	CG	N
2.094	53.19	10400	4.50	114.3	1.798	45.7	17	3.0	2.8	72	48	215	1.11	28.2	0.148	3.8	7.50	SPR	CG	Z
2.109	53.57	3229	1.06	27.0	1.721	43.7	193	34	.38	9.7	74	329	.68	17.2	0.194	4.9	3.50	SPR	CG	Z
2.109	53.57	S-389	1.38	34.9	1.585	40.3	703	123	.26	6.7	186	826	.89	22.6	0.262	6.7	3.38	SST	CG	N
2.109	53.57	2754	1.50	38.1	1.869	47.5	38	6.6	.98	25	37	165	.36	9.1	0.120	3.0	3.00	MW	CG	Z
2.109	53.57	12083	1.66	42.1	1.899	48.2	14	2.5	1.3	32	18	82	.37	9.3	0.105	2.7	3.50	SPR	CG	Z
2.109	53.57	S-1644	2.06	52.4	1.785	45.3	28	4.9	1.0	27	29	131	1.01	25.7	0.162	4.1	6.25	SST	CG	N
2.109	53.57	3452	2.25	57.2	1.925	48.9	4.2	.73	1.8	45	7.5	33	.46	11.7	0.092	2.3	5.00	SPR	CG	Z
2.109	53.57	S-1674	2.50	63.5	1.989	50.5	.55	.10	2.1	54	1.2	5.2	.39	9.9	0.060	1.5	5.50	SST	C	N
2.109	53.57	2688	2.88	73.0	1.705	43.3	86	15	1.3	33	112	500	1.21	30.8	0.202	5.1	6.00	SPR	CG	Z
2.109	53.57	1615	2.91	73.8	1.321	33.6	1962	344	.35	8.8	677	3012	2.17	55.0	0.394	10.0	5.50	SPR	CG	Z
2.109	53.57	11849	4.63	117.5	1.917	48.7	3.8	.66	3.4	88	13	58	.62	15.8	0.096	2.4	5.50	SST	C	N
2.109	53.57	S-152	4.84	123.0	1.927	48.9	2.6	.46	4.3	109	11	50	.55	13.9	0.091	2.3	6.00	SST	CG	N
2.109	53.57	S-3023	5.50	139.7	1.749	44.4	17	3.0	3.3	83	57	252	2.25	57.2	0.180	4.6	12.5	SST	CG	N
2.109	53.57	S-3236	6.03	153.2	1.899	48.2	3.8	.66	4.5	115	17	76	.81	20.7	0.105	2.7	7.75	SST	CG	N
2.109	53.57	12627	8.50	215.9	1.649	41.9	56	9.9	2.8	71	159	706	2.93	74.5	0.230	5.8	12.8	SPR	CG	N
2.125	53.98	S-3151	.69	17.4	1.875	47.6	76	13	.25	6.3	19	85	.44	11.1	0.125	3.2	2.50	SST	C	N
2.125	53.98	S-3072	3.63	92.1	1.813	46.1	16	2.8	2.4	60	38	171	1.25	31.7	0.156	4.0	8.00	SST	CG	N
2.125	53.98	10607	5.38	136.5	1.915	48.6	2.1	.37	4.1	105	8.6	38	1.26	32.0	0.105	2.7	11.0	SST	C	N
2.125	53.98	11860	5.38	136.5	1.899	48.2	5.5	.96	4.0	102	22	98	.93	23.7	0.113	2.9	7.25	SPR	C	N
2.125	53.98	S-3168	5.50	139.7	1.899	48.2	5.0	.88	4.0	102	20	89	.79	20.1	0.113	2.9	7.00	SST	CG	N
2.125	53.98	S-3213	5.66	143.7	1.859	47.2	6.1	1.1	4.3	109	26	117	1.36	34.6	0.133	3.4	10.3	SST	CG	N
2.125	53.98	12054	6.03	153.2	1.915	48.6	3.3	.57	5.2	132	17	75	.81	20.7	0.105	2.7	7.75	SST	CG	N
2.125	53.98	4332	6.50	165.1	1.511	38.4	202	35	1.7	43	344	1531	3.84	97.5	0.307	7.8	12.5	SPR	CG	Z
2.125	53.98	S-1640	6.75	171.5	1.813	46.1	13	2.3	3.7	93	48	215	1.48	37.6	0.156	4.0	9.50	SST	CG	N
2.125	53.98	S-3093	7.00	177.8	1.941	49.3	2.8	.50	4.0	102	11	51	.62	15.8	0.092	2.3	5.75	SST	C	N
2.125	53.98	S-3161	7.00	177.8	1.855	47.1	7.0	1.2	4.7	118	33	145	1.42	36.0	0.135	3.4	9.50	SST	C	N
2.140	54.36	S-3211	2.34	59.5	1.984	50.4	1.7	.29	1.9	49	3.2	14	.41	10.4	0.078	2.0	5.25	SST	CG	N
2.140	54.36	S-89	2.63	66.7	1.700	43.2	83	14	1.1	28	90	399	1.54	39.1	0.220	5.6	7.00	SST	CG	N
2.140	54.36	S-101	3.13	79.4	1.828	46.4	31	5.4	1.6	40	48	213	.78	19.7	0.156	4.0	5.00	SST	CG	N
2.140	54.36	S-3073	3.25	82.6	1.766	44.9	34	6.0	1.8	45	60	267	1.50	38.0	0.187	4.7	8.00	SST	CG	N
2.140	54.36	11604	3.50	88.9	2.006	51.0	.81	.14	3.0	77	2.5	11	.47	11.9	0.067	1.7	6.00	SPR	CG	Z
2.140	54.36	S-174	4.38	111.1	1.920	48.8	6.3	1.1	2.9	75	18	82	.61	15.4	0.110	2.8	5.50	SST	CG	N
2.140	54.36	S-447	5.16	131.0	1.930	49.0	6.0	1.1	2.8	71	17	75	.53	13.3	0.105	2.7	5.00	SST	C	N
2.140	54.36	1841	5.75	146.1	1.936	49.2	3.7	.64	4.9	125	18	81	.82	20.7	0.102	2.6	7.00	MW	C	Z
2.140	54.36	S-258	6.38	161.9	1.890	48.0	4.1	.73	5.0	127	21	92	1.38	34.9	0.125	3.2	11.0	SST	CG	N
2.140	54.36	S-3019	8.88	225.4	1.780	45.2	15	2.5	4.7	119	68	302	2.52	64.0	0.180	4.6	14.0	SST	CG	N
2.140	54.36	4101	9.00	228.6	1.516	38.5	127	22	2.8	71	359	1595	6.08	154.5	0.312	7.9	19.5	SPR	CG	Z
2.156	54.76	11786	1.47	37.3	2.000	50.8	4.0	.69	1.2	30	4.7	21	.27	6.9	0.078	2.0	3.50	SPR	CG	N
2.156	54.76	S-3036	5.50	139.7	1.886	47.9	6.3	1.1	4.2	105	26	116	1.35	34.3	0.135	3.4	10.0	SST	CG	N
2.172	55.17	11823	5.75	146.1	1.962	49.8	3.5	.61	4.7	120	17	74	.74	18.7	0.105	2.7	7.00	SST	CG	N
2.187	55.55	3493	1.75	44.5	1.927	48.9	16	2.8	1.1	28	17	77	.65	16.5	0.130	3.3	5.00	SPR	CG	Z
2.187	55.55	3059	2.13	54.0	1.917	48.7	26	4.6	1.4	34	35	157	.56	14.1	0.135	3.4	4.00	SPR	CG	GI
2.187	55.55	73017	4.00	101.6	1.773	45.0	68	12	1.9	49	131	584	1.45	36.8	0.207	5.3	7.00	OT	CG	N
2.187	55.55	73024	4.00	101.6	1.751	44.5	81	14	1.9	48	153	680	1.58	40.2	0.218	5.5	7.25	OT	CG	N
2.187	55.55	73031	4.00	101.6	1.687	42.8	134	24	1.6	42	220	980	1.94	49.2	0.250	6.4	7.75	OT	CG	N
2.187	55.55	73038	4.00	101.6	1.625	41.3	216	38	1.4	35	300	1335	2.25	57.1	0.281	7.1	8.00	OT	CG	N
2.187	55.55	73045	4.00	101.6	1.563	39.7	344	60	1.1	29	396	1759	2.50	63.4	0.312	7.9	8.00	OT	CG	N
2.187	55.55	73052	4.00	101.6	1.501	38.1	552	97	.92	23	508	2261	2.66	67.5	0.343	8.7	7.75	OT	CG	N
2.187	55.55	73059	4.00	101.6	1.437	36.5	831	146	.79	20	657	2922	2.91	73.8	0.375	9.5	7.75	OT	CG	N
2.187	55.55	73066	4.00	101.6	1.401	35.6	1080	189	.68	17	733	3262	2.95	74.9	0.393	10.0	7.50	OT	CG	N
2.187	55.55	S-1641	4.09	104.0	1.813	46.1	41	7.2	1.8	46	74	331	1.26	32.1	0.187	4.7	6.75	SST	CG	N
2.187	55.55	S-113	5.00	127.0	1.977	50.2	2.8	.49	4.1	103	11	51	.95	24.0	0.105	2.7	8.00	SST	C	N
2.187	55.55	S-440	5.00	127.0	1.927	48.9	5.4	.94	3.7	95	20	90	1.25	31.8	0.130	3.3	9.67	SST	CG	N
2.187	55.55	73018	5.00	127.0	1.773	45.0	54	9.5	2.4	61	131	584	1.71	43.4	0.207	5.3	8.25	OT	CG	N
2.187	55.55	73025	5.00	127.0	1.751	44.5	63	11	2.4	62	153	680	1.91	48.5	0.218	5.5	8.75	OT	CG	N
2.187	55.55	73032	5.00	127.0	1.687	42.8	103	18	2.1	54	220	980	2.38	60.3	0.250	6.4	9.50	OT	CG	N
2.187	55.55	73039	5.00	127.0	1.625	41.3	167	29	1.8	46	300	1335	2.74	69.6	0.281	7.1	9.75	OT	CG	N
2.187	55.55	73046	5.00	127.0	1.563	39.7	267	47	1.5	38	396	1759	3.04	77.3	0.312	7.9	9.75	OT	CG	N
2.187	55.55	73053	5.00	127.0	1.501	38.1	423	74	1.2	31	508	2261	3.26	82.8	0.343	8.7	9.50	OT	CG	N
2.187	55.55	73060	5.00	127.0	1.437	36.5	637	112	1.0	26	657	2922	3.56	90.5	0.375	9.5	9.50	OT	CG	N
2.187	55.55	73067	5.00	127.0	1.401	35.6	825	144	.89	23	733	3262	3.62	91.8	0.393	10.0	9.20	OT	CG	N
2.187	55.55	S-3028	5.50	139.7	1.937	49.2	4.4	.76	4.3	108	18	82	1.25	31.8	0.125	3.2	10.0	SST	CG	N
2.187	55.55	73019	6.00	152.4	1.773	45.0	44	7.7	3.0	76	131	584	2.02	51.3	0.207	5.3	9.76	OT	CG	N
2.187	55.55	73026	6.00	152.4	1.751	44.5	52	9.0	3.0	75	153	680	2.24	56.8	0.218	5.5	10.3	OT	CG	N
2.187	55.55	73033	6.00	152.4	1.687	42.8	86	15	2.6	65	220	980	2.75	69.9	0.250	6.4	11.0	OT	CG	N
2.187	55.55	73040	6.00	152.4	1.625	41.3	136	24	2.2	56	300	1335	3.23	82.1	0.281	7.1	11.5	OT	CG	N
2.187	55.55	73047	6.00	152.4	1.563	39.7	218	38	1.8	46	396	1759	3.59	91.1	0.312	7.9	11.5	OT	CG	N
2.187	55.55	73054	6.00	152.4	1.501	38.1	343	60	1.5	38	508	2261	3.86	98.0	0.343	8.7	11.3	OT	CG	N
2.187	55.55	73061	6.00	152.4	1.437	36.5	514	90	1.3	32	657	2922	4.24	107.6	0.375	9.5	11.3	OT	CG	N
2.187	55.55	73068	6.00	152.4	1.401	35.6	664	116	1.1	28	733	3262	4.30	109.3	0.393	10.0	11.0	OT	CG	N
2.187	55.55	3074	6.38	161.9	2.043	51.9	.68	.12	5.7	145	3.9	17	.65	16.5	0.072	1.8	8.00	SPR	C	Z
2.187	55.55	73020	7.00	177.8	1.773	45.0	38	6.6	3.5	88	131	584	2.28	57.9	0.207	5.3	11.0	OT	CG	N
2.187	55.55	73027	7.00	177.8	1.751	44.5	44	7.6	3.5	89	153	680	2.56	65.1	0.218	5.5	11.8	OT	CG	N
2.187	55.55	73034	7.00	177.8	1.687	42.8	72	13	3.1	78	220	980	3.19	80.9	0.250	6.4	12.7	OT	CG	N
2.187	55.55	73041	7.00	177.8	1.625	41.3	115	20	2.6	66	300	1335	3.72	94.6	0.281	7.1	13.3	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.187	55.55	73048	7.00	177.8	1.563	39.7	183	32	2.2	55	396	1759	4.15	105.4	0.312	7.9	13.3	OT	CG	N
2.187	55.55	73055	7.00	177.8	1.501	38.1	289	51	1.8	45	508	2261	4.46	113.2	0.343	8.7	13.0	OT	CG	N
2.187	55.55	73062	7.00	177.8	1.437	36.5	432	76	1.5	39	657	2922	4.90	124.4	0.375	9.5	13.1	OT	CG	N
2.187	55.55	73069	7.00	177.8	1.401	35.6	559	98	1.3	33	733	3262	4.96	126.0	0.393	10.0	12.6	OT	CG	N
2.187	55.55	73021	8.00	203.2	1.773	45.0	32	5.7	4.1	103	131	584	2.59	65.9	0.207	5.3	12.5	OT	CG	N
2.187	55.55	73028	8.00	203.2	1.751	44.5	38	6.6	4.0	103	153	680	2.89	73.4	0.218	5.5	13.3	OT	CG	N
2.187	55.55	73035	8.00	203.2	1.687	42.8	62	11	3.6	91	220	980	3.63	92.1	0.250	6.4	14.5	OT	CG	N
2.187	55.55	73042	8.00	203.2	1.625	41.3	100	17	3.0	77	300	1335	4.21	107.0	0.281	7.1	15.0	OT	CG	N
2.187	55.55	73049	8.00	203.2	1.563	39.7	157	28	2.5	64	396	1759	4.72	119.9	0.312	7.9	15.1	OT	CG	N
2.187	55.55	73056	8.00	203.2	1.501	38.1	249	44	2.0	52	508	2261	5.06	128.5	0.343	8.7	14.7	OT	CG	N
2.187	55.55	73063	8.00	203.2	1.437	36.5	372	65	1.8	45	657	2922	5.57	141.5	0.375	9.5	14.9	OT	CG	N
2.187	55.55	73070	8.00	203.2	1.401	35.6	480	84	1.5	39	733	3262	5.65	143.5	0.393	10.0	14.4	OT	CG	N
2.187	55.55	73022	9.00	228.6	1.773	45.0	28	5.0	4.6	118	131	584	2.90	73.7	0.207	5.3	14.0	OT	CG	N
2.187	55.55	73029	9.00	228.6	1.751	44.5	33	5.8	4.6	117	153	680	3.22	81.8	0.218	5.5	14.8	OT	CG	N
2.187	55.55	73036	9.00	228.6	1.687	42.8	55	9.7	4.0	101	220	980	4.00	101.6	0.250	6.4	16.0	OT	CG	N
2.187	55.55	73043	9.00	228.6	1.625	41.3	88	15	3.4	87	300	1335	4.70	119.5	0.281	7.1	16.7	OT	CG	N
2.187	55.55	73050	9.00	228.6	1.563	39.7	139	24	2.8	72	396	1759	5.27	133.7	0.312	7.9	16.9	OT	CG	N
2.187	55.55	73057	9.00	228.6	1.501	38.1	219	38	2.3	59	508	2261	5.66	143.8	0.343	8.7	16.5	OT	CG	N
2.187	55.55	73064	9.00	228.6	1.437	36.5	327	57	2.0	51	657	2922	6.23	158.4	0.375	9.5	16.6	OT	CG	N
2.187	55.55	73071	9.00	228.6	1.401	35.6	422	74	1.7	44	733	3262	6.32	160.4	0.393	10.0	16.1	OT	CG	N
2.187	55.55	73023	10.0	254.0	1.773	45.0	26	4.5	5.1	130	131	584	3.16	80.3	0.207	5.3	15.3	OT	CG	N
2.187	55.55	73030	10.0	254.0	1.751	44.5	30	5.2	5.1	130	153	680	3.55	90.1	0.218	5.5	16.3	OT	CG	N
2.187	55.55	73037	10.0	254.0	1.687	42.8	50	8.7	4.4	112	220	980	4.38	111.2	0.250	6.4	17.5	OT	CG	N
2.187	55.55	73044	10.0	254.0	1.625	41.3	78	14	3.8	97	300	1335	5.20	132.1	0.281	7.1	18.5	OT	CG	N
2.187	55.55	73051	10.0	254.0	1.563	39.7	124	22	3.2	81	396	1759	5.81	147.6	0.312	7.9	18.6	OT	CG	N
2.187	55.55	73058	10.0	254.0	1.501	38.1	195	34	2.6	66	508	2261	6.26	159.0	0.343	8.7	18.2	OT	CG	N
2.187	55.55	73065	10.0	254.0	1.437	36.5	292	51	2.3	57	657	2922	6.89	175.0	0.375	9.5	18.4	OT	CG	N
2.187	55.55	73072	10.0	254.0	1.401	35.6	376	66	2.0	50	733	3262	7.00	177.7	0.393	10.0	17.8	OT	CG	N
2.203	55.96	4276	5.00	127.0	1.933	49.1	10	1.8	3.4	87	35	156	.98	24.9	0.135	3.4	7.25	SPR	CG	Z
2.219	56.36	3072	1.38	34.9	1.695	43.1	904	158	.24	6.0	214	954	.79	20.0	0.262	6.7	3.00	SPR	CG	Z
2.219	56.36	12615	1.75	44.5	2.035	51.7	4.7	.81	1.3	33	6.0	27	.46	11.7	0.092	2.3	4.00	SST	C	N
2.219	56.36	11297	3.75	95.3	1.907	48.4	24	4.2	2.2	55	52	232	.94	23.8	0.156	4.0	6.00	SPR	CG	Z
2.219	56.36	4227	5.75	146.1	1.949	49.5	10	1.8	3.5	88	35	155	.98	24.9	0.135	3.4	7.25	SPR	CG	Z
2.234	56.74	3205	5.00	127.0	1.820	46.2	47	8.2	2.4	62	114	509	1.81	46.0	0.207	5.3	8.75	SPR	CG	Z
2.250	57.15	S-3219	2.09	53.2	1.954	49.6	15	2.7	1.2	30	18	81	.93	23.5	0.148	3.8	6.25	SST	CG	N
2.250	57.15	S-3215	3.25	82.6	2.040	51.8	6.3	1.1	2.6	65	16	71	.47	12.0	0.105	2.7	4.50	SST	CG	N
2.250	57.15	4394	5.25	133.4	1.750	44.5	134	23	1.4	36	191	848	1.81	46.0	0.250	6.4	7.25	SPR	CG	Z
2.250	57.15	4366	5.75	146.1	1.374	34.9	1046	183	.81	21	845	3759	4.60	116.8	0.438	11.1	10.5	SPR	CG	N
2.250	57.15	4218	7.00	177.8	1.926	48.9	15	2.6	3.8	98	58	256	1.50	38.1	0.162	4.1	9.25	SPR	CG	N
2.250	57.15	S-355	7.50	190.5	1.980	50.3	4.1	.71	5.6	143	23	102	1.86	47.1	0.135	3.4	12.8	SST	C	N
2.250	57.15	1935	8.13	206.4	1.836	46.6	31	5.4	3.7	93	114	505	2.48	63.1	0.207	5.3	12.0	SPR	CG	Z
2.250	57.15	S-354	9.25	235.0	2.010	51.1	2.2	.39	7.6	192	17	75	1.68	42.7	0.120	3.0	14.0	SST	CG	N
2.250	57.15	10161	9.50	241.3	1.726	43.8	72	13	2.9	75	212	942	3.67	93.2	0.262	6.7	14.0	SPR	CG	N
2.250	57.15	10275	9.50	241.3	1.684	42.8	105	18	2.5	64	265	1180	3.82	97.1	0.283	7.2	13.5	SPR	CG	Z
2.250	57.15	7013	10.0	254.0	1.500	38.1	250	44	2.3	58	570	2534	7.70	195.6	0.375	9.5	19.3	HD	C	Z
2.250	57.15	10692	14.0	355.6	1.876	47.7	9.0	1.6	9.3	236	83	371	4.72	119.9	0.187	4.7	24.3	SPR	C	Z
2.250	57.15	7015	16.0	406.4	1.500	38.1	150	26	3.8	96	570	2534	12.0	304.8	0.375	9.5	30.8	HD	C	Z
2.266	57.56	S-1660	2.78	70.6	1.832	46.5	110	19	1.0	26	112	497	1.09	27.6	0.217	5.5	5.00	SST	CG	N
2.281	57.94	S-1646	1.38	34.9	1.987	50.5	46	8.1	.85	22	39	175	.49	12.4	0.147	3.7	3.33	SST	CG	N
2.281	57.94	10272	9.50	241.3	1.715	43.6	108	19	2.4	62	262	1165	3.61	91.6	0.283	7.2	12.8	SPR	CG	Z
2.296	58.32	10984	1.94	49.2	1.796	45.6	219	38	.69	17	150	669	1.25	31.8	0.250	6.4	5.00	HD	CG	N
2.296	58.32	S-1629	8.09	205.6	2.058	52.3	3.3	.58	6.6	167	22	97	1.13	28.7	0.119	3.0	9.50	SST	CG	N
2.296	58.32	S-1659	10.4	263.5	2.058	52.3	3.1	.54	7.0	178	22	97	1.19	30.2	0.119	3.0	10.0	SST	CG	N
2.312	58.72	12082	1.97	50.0	2.188	55.6	.47	.08	1.5	39	.72	3.2	.43	11.0	0.062	1.6	6.00	SPR	C	Z
2.312	58.72	4198	3.00	76.2	2.122	53.9	2.1	.38	2.2	57	4.8	21	.76	19.3	0.095	2.4	7.00	SPR	C	Z
2.312	58.72	4354	3.25	82.6	1.588	40.3	888	155	.57	14	502	2235	2.08	52.9	0.362	9.2	5.75	SPR	CG	GI
2.312	58.72	2869	3.50	88.9	1.982	50.3	31	5.4	1.9	49	59	263	.91	23.1	0.165	4.2	5.50	SPR	CG	GI
2.312	58.72	3287	4.25	108.0	1.892	48.1	60	11	1.9	49	115	514	1.47	37.3	0.210	5.3	7.00	SPR	CG	Z
2.312	58.72	12721	5.31	134.9	1.752	44.5	211	37	1.2	30	251	1115	1.96	49.8	0.280	7.1	7.00	HD	CG	N
2.312	58.72	3482	7.50	190.5	1.988	50.5	13	2.3	4.2	107	56	250	1.54	39.1	0.162	4.1	9.50	SPR	CG	Z
2.312	58.72	10151	8.50	215.9	2.072	52.6	4.0	.71	6.0	152	24	108	1.08	27.4	0.120	3.0	9.00	SPR	CG	Z
2.312	58.72	10166	9.25	235.0	1.700	43.2	108	19	2.9	75	316	1405	5.05	128.2	0.306	7.8	16.5	SPR	CG	N
2.312	58.72	S-3188	13.0	330.2	1.588	40.3	138	24	2.9	74	401	1782	8.33	211.5	0.362	9.2	23.0	SST	CG	N
2.328	59.13	11417	6.38	161.9	2.058	52.3	3.9	.69	4.6	116	18	80	1.79	45.4	0.135	3.4	12.3	SST	C	N
2.328	59.13	4009	18.5	469.9	2.094	53.2	2.3	.40	9.9	251	22	99	1.64	41.6	0.117	3.0	13.0	SPR	C	Z
2.343	59.51	S-239	2.13	54.0	2.047	52.0	22	3.8	1.3	33	28	124	.83	21.1	0.148	3.8	4.67	SST	C	N
2.343	59.51	10281	3.00	76.2	1.843	46.8	153	27	1.2	30	184	817	1.50	38.1	0.250	6.4	6.00	SPR	CG	Z
2.343	59.51	3120	3.75	95.3	2.073	52.7	13	2.2	2.6	66	33	147	.74	18.9	0.135	3.4	5.50	SPR	CG	Z
2.343	59.51	3078	4.00	101.6	2.093	53.2	9.5	1.7	2.8	72	27	120	.80	20.2	0.125	3.2	5.38	SPR	C	Z
2.343	59.51	3284	4.00	101.6	2.093	53.2	9.2	1.6	2.9	75	27	120	.81	20.6	0.125	3.2	5.50	SPR	C	Z
2.343	59.51	3488	7.00	177.8	2.019	51.3	11	1.9	5.1	128	54	238	1.94	49.4	0.162	4.1	11.0	SPR	C	Z
2.343	59.51	10271	8.00	203.2	1.681	42.7	242	42	1.6	41	392	1744	3.56	90.4	0.331	8.4	10.8	SPR	CG	Z
2.343	59.51	S-376	8.25	209.6	1.779	45.2	72	13	2.9	73	209	929	4.09	103.9	0.283	7.2	14.5	SST	CG	N
2.359	59.92	10440	3.09	78.6	1.793	45.5	344	60	.74	19	254	1129	1.42	35.9	0.283	7.2	5.00	SPR	CG	N
2.359	59.92	S-427	4.88	123.8	1.909	48.5	51	8.9	2.2	56	113	501	1.91	48.6	0.225	5.7	8.50	SST	CG	N
2.375	60.33	10367	3.00	76.2	1.875	47.6	146	26	1.2	31	181	806	1.50	38.1	0.250	6.4	6.00	SPR	CG	Z
2.375	60.33	S-1662	4.16	105.6	2.063	52.4	12	2.0	2.9	74	33	149	1.25	31.7	0.156	4.0	8.00	SST	CG	N
2.375	60.33	S-1654	4.44	112.7	2.063	52.4	15	2.5	3.0	76	43	193	1.05	26.7	0.156	4.0	6.75	SST	CG	N
2.375	60.33	4006	4.75	120.7	1.501	38.1	1200	210	.67	17	802	3569	3.50	88.8	0.437	11.1	8.00	SPR	CG	BO
2.375	60.33	S-315	4.94	125.4	2.165	55.0	3.2	.57	4.3	109	14	62	.63	16.0	0.105	2.7	6.00	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.375	60.33	S-318	5.75	146.1	2.165	55.0	2.7	.48	5.0	128	14	61	.71	18.0	0.105	2.7	6.75	SST	CG	N
2.375	60.33	S-3094	6.63	168.3	2.063	52.4	14	2.4	3.2	82	43	193	1.04	26.4	0.156	4.0	6.75	SST	CG	N
2.375	60.33	4326	7.50	190.5	2.051	52.1	12	2.1	4.5	114	55	243	1.54	39.1	0.162	4.1	9.50	SPR	CG	Z
2.375	60.33	12043	9.56	242.9	2.079	52.8	6.9	1.2	6.2	157	43	191	1.63	41.4	0.148	3.8	11.0	SPR	CG	Z
2.375	60.33	S-137	11.8	298.5	2.063	52.4	5.4	.95	8.0	203	43	193	2.26	57.5	0.156	4.0	14.5	SST	CG	N
2.375	60.33	4405	11.8	298.5	1.751	44.5	113	20	2.9	73	326	1451	4.91	124.8	0.312	7.9	15.8	SPR	CG	Z
2.390	60.71	4168	3.13	79.4	2.036	51.7	43	7.6	1.6	41	71	314	.89	22.5	0.177	4.5	5.00	SPR	CG	Z
2.406	61.11	S-149	2.13	54.0	2.110	53.6	19	3.3	1.4	37	27	122	.69	17.4	0.148	3.8	4.67	SST	CG	N
2.406	61.11	11573	3.06	77.8	2.242	56.9	3.5	.60	2.3	59	8.1	36	.37	9.4	0.082	2.1	3.50	SPR	C	N
2.406	61.11	4112	3.13	79.4	2.052	52.1	42	7.4	1.7	42	70	312	.89	22.5	0.177	4.5	5.00	SPR	CG	Z
2.406	61.11	S-986	3.16	80.2	1.992	50.6	65	11	1.4	36	92	408	1.10	28.0	0.207	5.3	5.33	SST	CG	N
2.406	61.11	10582	3.75	95.3	1.882	47.8	161	28	1.3	33	206	914	1.64	41.6	0.262	6.7	6.3	SPR	CG	N
2.406	61.11	10278	4.00	101.6	1.882	47.8	153	27	1.3	33	199	884	1.70	43.3	0.262	6.7	6.50	SPR	CG	N
2.406	61.11	S-161	4.13	104.8	2.094	53.2	11	1.9	2.9	73	31	139	1.25	31.7	0.156	4.0	8.00	SST	CG	N
2.406	61.11	S-964	4.88	123.8	2.196	55.8	3.1	.55	4.1	105	13	57	.74	18.7	0.105	2.7	6.00	SST	C	N
2.406	61.11	11506	5.13	130.2	1.972	50.1	51	8.9	2.4	61	122	545	1.95	49.6	0.217	5.5	8.00	SPR	CG	Z
2.406	61.11	S-396	7.00	177.8	2.166	55.0	3.7	.65	5.8	146	21	95	.95	24.0	0.120	3.0	8.00	SST	CG	N
2.406	61.11	S-3098	16.0	406.4	2.094	53.2	5.9	1.0	7.2	183	43	191	2.08	52.8	0.156	4.0	13.3	SST	CG	N
2.421	61.49	10276	3.00	76.2	1.855	47.1	252	44	.99	25	248	1102	1.63	41.3	0.283	7.2	5.75	SPR	CG	N
2.437	61.90	4203	3.00	76.2	2.083	52.9	41	7.1	1.7	43	69	308	.89	22.5	0.177	4.5	5.00	SPR	CG	Z
2.437	61.90	73073	4.00	101.6	1.875	47.6	170	30	1.6	41	271	1207	2.04	51.8	0.281	7.1	7.26	OT	CG	N
2.437	61.90	73079	4.00	101.6	1.813	46.1	270	47	1.3	34	358	1594	2.26	57.5	0.312	7.9	7.26	OT	CG	N
2.437	61.90	73085	4.00	101.6	1.751	44.5	412	72	1.1	28	461	2052	2.49	63.3	0.343	8.7	7.26	OT	CG	N
2.437	61.90	73091	4.00	101.6	1.713	43.5	526	92	1.0	26	539	2399	2.63	66.7	0.362	9.2	7.25	OT	CG	N
2.437	61.90	73097	4.00	101.6	1.687	42.8	617	108	.97	25	597	2657	2.72	69.1	0.375	9.5	7.26	OT	CG	N
2.437	61.90	73103	4.00	101.6	1.651	41.9	765	134	.87	22	668	2970	2.85	72.4	0.393	10.0	7.25	OT	CG	N
2.437	61.90	73109	4.00	101.6	1.625	41.3	932	163	.79	20	733	3261	2.84	72.2	0.406	10.3	7.00	OT	CG	N
2.437	61.90	73115	4.00	101.6	1.563	39.7	1310	229	.67	17	883	3929	3.06	77.7	0.437	11.1	7.00	OT	CG	N
2.437	61.90	73074	5.00	127.0	1.875	47.6	132	23	2.1	52	271	1207	2.47	62.6	0.281	7.1	8.78	OT	CG	N
2.437	61.90	73080	5.00	127.0	1.813	46.1	210	37	1.7	43	358	1594	2.73	69.4	0.312	7.9	8.76	OT	CG	N
2.437	61.90	73086	5.00	127.0	1.751	44.5	315	55	1.5	37	461	2052	3.05	77.4	0.343	8.7	8.88	OT	CG	N
2.437	61.90	73092	5.00	127.0	1.713	43.5	402	70	1.3	34	539	2399	3.21	81.6	0.362	9.2	8.87	OT	CG	N
2.437	61.90	73098	5.00	127.0	1.687	42.8	472	83	1.3	32	597	2657	3.33	84.5	0.375	9.5	8.87	OT	CG	N
2.437	61.90	73104	5.00	127.0	1.651	41.9	584	102	1.1	29	668	2970	3.49	88.6	0.393	10.0	8.88	OT	CG	N
2.437	61.90	73110	5.00	127.0	1.625	41.3	704	123	1.0	26	733	3261	3.50	88.9	0.406	10.3	8.62	OT	CG	N
2.437	61.90	73116	5.00	127.0	1.563	39.7	989	173	.89	23	883	3929	3.77	95.7	0.437	11.1	8.63	OT	CG	N
2.437	61.90	3110	5.13	130.2	2.125	54.0	17	3.0	2.8	72	48	212	.98	24.8	0.156	4.0	6.25	SPR	CG	Z
2.437	61.90	73075	6.00	152.4	1.875	47.6	108	19	2.5	64	271	1207	2.89	73.4	0.281	7.1	10.3	OT	CG	N
2.437	61.90	73081	6.00	152.4	1.813	46.1	169	30	2.1	54	358	1594	3.24	82.4	0.312	7.9	10.4	OT	CG	N
2.437	61.90	73087	6.00	152.4	1.751	44.5	255	45	1.8	46	461	2052	3.60	91.5	0.343	8.7	10.5	OT	CG	N
2.437	61.90	73093	6.00	152.4	1.713	43.5	325	57	1.7	42	539	2399	3.80	96.6	0.362	9.2	10.5	OT	CG	N
2.437	61.90	73099	6.00	152.4	1.687	42.8	381	67	1.6	40	597	2657	3.94	100.1	0.375	9.5	10.5	OT	CG	N
2.437	61.90	73105	6.00	152.4	1.651	41.9	472	83	1.4	36	668	2970	4.13	104.9	0.393	10.0	10.5	OT	CG	N
2.437	61.90	73111	6.00	152.4	1.625	41.3	574	101	1.3	32	733	3261	4.11	104.4	0.406	10.3	10.1	OT	CG	N
2.437	61.90	73117	6.00	152.4	1.563	39.7	794	139	1.1	28	883	3929	4.48	113.8	0.437	11.1	10.3	OT	CG	N
2.437	61.90	73076	7.00	177.8	1.875	47.6	92	16	3.0	75	271	1207	3.29	83.7	0.281	7.1	11.7	OT	CG	N
2.437	61.90	73082	7.00	177.8	1.813	46.1	142	25	2.5	64	358	1594	3.74	95.1	0.312	7.9	12.0	OT	CG	N
2.437	61.90	73088	7.00	177.8	1.751	44.5	217	38	2.1	54	461	2052	4.11	104.4	0.343	8.7	12.0	OT	CG	N
2.437	61.90	73094	7.00	177.8	1.713	43.5	273	48	2.0	50	539	2399	4.39	111.5	0.362	9.2	12.1	OT	CG	N
2.437	61.90	73100	7.00	177.8	1.687	42.8	320	56	1.9	47	597	2657	4.55	115.6	0.375	9.5	12.1	OT	CG	N
2.437	61.90	73106	7.00	177.8	1.651	41.9	396	69	1.7	43	668	2970	4.77	121.2	0.393	10.0	12.1	OT	CG	N
2.437	61.90	73112	7.00	177.8	1.625	41.3	478	84	1.5	39	733	3261	4.77	121.2	0.406	10.3	11.8	OT	CG	N
2.437	61.90	73118	7.00	177.8	1.563	39.7	664	116	1.3	34	883	3929	5.19	131.7	0.437	11.1	11.9	OT	CG	N
2.437	61.90	10236	7.75	196.9	1.847	46.9	138	24	2.0	51	278	1237	2.95	74.9	0.295	7.5	10.0	SPR	CG	N
2.437	61.90	S-3232	7.88	200.0	2.137	54.3	11	2.0	3.3	84	38	168	1.01	25.7	0.150	3.8	6.75	SST	CG	N
2.437	61.90	73077	8.00	203.2	1.875	47.6	79	14	3.4	87	271	1207	3.74	95.1	0.281	7.1	13.3	OT	CG	N
2.437	61.90	73083	8.00	203.2	1.813	46.1	123	22	2.9	74	358	1594	4.22	107.3	0.312	7.9	13.5	OT	CG	N
2.437	61.90	73089	8.00	203.2	1.751	44.5	186	33	2.5	63	461	2052	4.68	118.9	0.343	8.7	13.7	OT	CG	N
2.437	61.90	73095	8.00	203.2	1.713	43.5	235	41	2.3	58	539	2399	4.98	126.5	0.362	9.2	13.8	OT	CG	N
2.437	61.90	73101	8.00	203.2	1.687	42.8	276	48	2.2	55	597	2657	5.16	130.9	0.375	9.5	13.7	OT	CG	N
2.437	61.90	73107	8.00	203.2	1.651	41.9	342	60	2.0	50	668	2970	5.40	137.2	0.393	10.0	13.7	OT	CG	N
2.437	61.90	73113	8.00	203.2	1.625	41.3	414	72	1.8	45	733	3261	5.38	136.8	0.406	10.3	13.3	OT	CG	N
2.437	61.90	73119	8.00	203.2	1.563	39.7	575	101	1.5	39	883	3929	5.85	148.7	0.437	11.1	13.4	OT	CG	N
2.437	61.90	73078	10.0	254.0	1.875	47.6	63	11	4.3	109	271	1207	4.55	115.6	0.281	7.1	16.2	OT	CG	N
2.437	61.90	73084	10.0	254.0	1.813	46.1	98	17	3.7	93	358	1594	5.14	130.6	0.312	7.9	16.5	OT	CG	N
2.437	61.90	73090	10.0	254.0	1.751	44.5	147	26	3.1	80	461	2052	5.74	145.9	0.343	8.7	16.7	OT	CG	N
2.437	61.90	73096	10.0	254.0	1.713	43.5	186	33	2.9	74	539	2399	6.10	155.0	0.362	9.2	16.9	OT	CG	N
2.437	61.90	73102	10.0	254.0	1.687	42.8	216	38	2.8	70	597	2657	6.38	162.0	0.375	9.5	17.0	OT	CG	N
2.437	61.90	73108	10.0	254.0	1.651	41.9	268	47	2.5	63	668	2970	6.67	169.5	0.393	10.0	17.0	OT	CG	N
2.437	61.90	73114	10.0	254.0	1.625	41.3	322	56	2.3	58	733	3261	6.69	169.9	0.406	10.3	16.5	OT	CG	N
2.437	61.90	73120	10.0	254.0	1.563	39.7	448	78	2.0	50	883	3929	7.27	184.6	0.437	11.1	16.6	OT	CG	N
2.437	61.90	3483	10.8	273.1	1.987	50.5	28	5.0	4.6	116	130	577	3.15	80.0	0.225	5.7	14.0	SPR	CG	Z
2.437	61.90	10163	11.0	279.4	1.813	46.1	105	18	3.0	77	319	1417	4.84	122.8	0.312	7.9	15.5	SPR	CG	N
2.468	62.69	4185	3.75	95.3	2.132	54.2	24	4.1	2.5	63	59	261	1.01	25.6	0.168	4.3	6.00	SPR	CG	Z
2.468	62.69	4129	6.75	171.5	2.054	52.2	23	4.0	4.3	108	97	433	2.48	63.1	0.207	5.3	12.0	SPR	CG	Z
2.468	62.69	4379	7.50	190.5	1.806	45.9	262	46	1.4	36	374	1664	2.90	73.6	0.331	8.4	8.75	SPR	CG	N
2.500	63.50	11956	2.22	56.4	2.174	55.2	32	5.6	1.5	38	47	210	.73	18.6	0.163	4.1	4.50	SPR	CG	Z
2.500	63.50	10941	4.00	101.6	1.376	35.0	5254	920	.28	7.2	1483	6595	3.23	82.1	0.562	14.3	5.75	SPR	CG	N
2.500	63.50	12591	5.00	127.0	2.202	55.9	11	1.9	3.8	97	42	185	1.19	30.3	0.148	3.8	7.00	SPR	C	N
2.500	63.50	4313	5.50	139.7	2.000	50.8	99	17	1.8	44	173	768	1.75	44.5	0.250	6.4	7.00	SPR	CG	Z

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.500	63.50	10286	6.50	165.1	1.812	46.0	259	45	1.6	40	404	1797	3.35	85.2	0.344	8.7	9.75	SPR	CG	Z
2.500	63.50	10238	7.75	196.9	1.888	48.0	140	25	2.1	53	294	1307	3.21	81.6	0.306	7.8	10.5	SPR	CG	N
2.500	63.50	10310	9.63	244.5	1.776	45.1	235	41	2.0	51	469	2084	4.62	117.2	0.362	9.2	12.8	SPR	CG	N
2.500	63.50	S-1639	10.5	266.7	2.030	51.6	20	3.6	6.0	152	121	539	4.35	110.4	0.235	6.0	18.5	SST	CG	N
2.500	63.50	S-3082	17.0	431.8	2.188	55.6	2.6	.45	13	332	34	149	3.93	99.7	0.156	4.0	25.0	SST	CG	N
2.562	65.07	S-1651	1.94	49.2	2.178	55.3	43	7.6	.98	25	42	189	.96	24.4	0.192	4.9	5.00	SST	CG	N
2.578	65.48	3391	3.50	88.9	1.888	48.0	457	80	.87	22	396	1762	2.07	52.6	0.345	8.8	6.00	SPR	CG	Z
2.593	65.86	S-410	8.75	222.3	2.383	60.5	2.0	.35	7.1	180	14	62	.74	18.7	0.105	2.7	7.00	SST	CG	N
2.593	65.86	11896	9.63	244.5	2.123	53.9	30	5.3	4.6	116	139	618	3.06	77.6	0.235	6.0	13.0	SPR	CG	N
2.625	66.68	11969	2.84	72.2	2.191	55.7	91	16	1.2	31	113	501	.98	24.8	0.217	5.5	4.50	SPR	CG	Z
2.625	66.68	S-980	3.00	76.2	2.445	62.1	1.9	.34	2.5	63	4.8	21	.51	12.9	0.090	2.3	4.67	SST	C	N
2.625	66.68	S-418	3.00	76.2	2.433	61.8	3.3	.57	2.5	64	8.3	37	.48	12.2	0.096	2.4	4.00	SST	C	N
2.625	66.68	S-993	3.88	98.4	2.097	53.3	95	17	1.6	42	155	688	1.82	46.1	0.264	6.7	7.00	SST	CG	N
2.625	66.68	4410	4.00	101.6	1.749	44.4	1012	177	.82	21	834	3709	3.07	77.9	0.438	11.1	7.00	OT	CG	N
2.687	68.25	4135	2.50	63.5	2.437	61.9	12	2.0	2.0	50	23	102	.51	13.0	0.125	3.2	4.00	SPR	CG	Z
2.687	68.25	73121	4.00	101.6	2.063	52.4	226	40	1.4	37	327	1456	2.03	51.5	0.312	7.9	6.50	OT	CG	N
2.687	68.25	73128	4.00	101.6	2.001	50.8	343	60	1.2	31	422	1877	2.23	56.6	0.343	8.7	6.50	OT	CG	N
2.687	68.25	73135	4.00	101.6	1.963	49.9	437	76	1.1	29	494	2196	2.35	59.8	0.362	9.2	6.50	OT	CG	N
2.687	68.25	73142	4.00	101.6	1.937	49.2	511	90	1.1	27	547	2434	2.44	61.9	0.375	9.5	6.50	OT	CG	N
2.687	68.25	73149	4.00	101.6	1.901	48.3	631	111	.97	25	612	2723	2.55	64.9	0.393	10.0	6.50	OT	CG	N
2.687	68.25	73156	4.50	114.3	1.875	47.6	627	110	1.1	27	673	2992	2.94	74.8	0.406	10.3	7.25	OT	CG	N
2.687	68.25	73163	4.50	114.3	1.813	46.1	877	154	.93	24	812	3610	3.17	80.5	0.437	11.1	7.25	OT	CG	N
2.687	68.25	73170	4.50	114.3	1.751	44.5	1262	221	.78	20	988	4395	3.28	83.2	0.468	11.9	7.00	OT	CG	N
2.687	68.25	3327	4.88	123.8	2.313	58.8	16	2.8	3.2	81	51	228	1.68	42.7	0.187	4.7	9.00	SPR	CG	Z
2.687	68.25	73122	5.00	127.0	2.063	52.4	175	31	1.9	47	327	1456	2.43	61.8	0.312	7.9	7.80	OT	CG	N
2.687	68.25	73129	5.00	127.0	2.001	50.8	262	46	1.6	41	422	1877	2.71	68.8	0.343	8.7	7.90	OT	CG	N
2.687	68.25	73136	5.00	127.0	1.963	49.9	334	59	1.5	38	494	2196	2.85	72.4	0.362	9.2	7.88	OT	CG	N
2.687	68.25	73143	5.00	127.0	1.937	49.2	392	69	1.4	35	547	2434	2.95	75.0	0.375	9.5	7.88	OT	CG	N
2.687	68.25	73150	5.00	127.0	1.901	48.3	481	84	1.3	32	612	2723	3.11	78.9	0.393	10.0	7.90	OT	CG	N
2.687	68.25	73157	5.00	127.0	1.875	47.6	549	96	1.2	31	673	2992	3.25	82.5	0.406	10.3	8.00	OT	CG	N
2.687	68.25	73164	5.00	127.0	1.813	46.1	767	134	1.1	27	812	3610	3.50	88.8	0.437	11.1	8.00	OT	CG	N
2.687	68.25	73171	5.00	127.0	1.751	44.5	1107	194	.89	23	988	4395	3.60	91.5	0.468	11.9	7.70	OT	CG	N
2.687	68.25	73123	6.00	152.4	2.063	52.4	143	25	2.3	58	327	1456	2.85	72.4	0.312	7.9	9.13	OT	CG	N
2.687	68.25	73130	6.00	152.4	2.001	50.8	213	37	2.0	50	422	1877	3.17	80.6	0.343	8.7	9.25	OT	CG	N
2.687	68.25	73137	6.00	152.4	1.963	49.9	271	47	1.8	46	494	2196	3.35	85.0	0.362	9.2	9.25	OT	CG	N
2.687	68.25	73144	6.00	152.4	1.937	49.2	317	56	1.7	44	547	2434	3.47	88.1	0.375	9.5	9.25	OT	CG	N
2.687	68.25	73151	6.00	152.4	1.901	48.3	389	68	1.6	40	612	2723	3.65	92.8	0.393	10.0	9.30	OT	CG	N
2.687	68.25	73158	6.00	152.4	1.875	47.6	445	78	1.5	38	673	2992	3.82	96.9	0.406	10.3	9.40	OT	CG	N
2.687	68.25	73165	6.00	152.4	1.813	46.1	618	108	1.3	33	812	3610	4.13	104.9	0.437	11.1	9.45	OT	CG	N
2.687	68.25	73172	6.00	152.4	1.751	44.5	890	156	1.1	28	988	4395	4.25	108.1	0.468	11.9	9.09	OT	CG	N
2.687	68.25	10182	6.25	158.8	2.417	61.4	7.7	1.3	3.8	96	29	129	.91	23.1	0.135	3.4	5.75	SPR	C	Z
2.687	68.25	73124	7.00	177.8	2.063	52.4	120	21	2.7	70	327	1456	3.28	83.2	0.312	7.9	10.5	OT	CG	N
2.687	68.25	73131	7.00	177.8	2.001	50.8	180	31	2.3	60	422	1877	3.64	92.4	0.343	8.7	10.6	OT	CG	N
2.687	68.25	73138	7.00	177.8	1.963	49.9	228	40	2.2	55	494	2196	3.85	97.7	0.362	9.2	10.6	OT	CG	N
2.687	68.25	73145	7.00	177.8	1.937	49.2	267	47	2.1	52	547	2434	3.98	101.2	0.375	9.5	10.6	OT	CG	N
2.687	68.25	73152	7.00	177.8	1.901	48.3	327	57	1.9	48	612	2723	4.21	106.8	0.393	10.0	10.7	OT	CG	N
2.687	68.25	73159	7.00	177.8	1.875	47.6	374	65	1.8	46	673	2992	4.38	111.4	0.406	10.3	10.8	OT	CG	N
2.687	68.25	73166	7.00	177.8	1.813	46.1	517	91	1.6	40	812	3610	4.76	121.0	0.437	11.1	10.9	OT	CG	N
2.687	68.25	73173	7.00	177.8	1.751	44.5	743	130	1.3	34	988	4395	4.91	124.8	0.468	11.9	10.5	OT	CG	N
2.687	68.25	73125	8.00	203.2	2.063	52.4	104	18	3.1	80	327	1456	3.67	93.1	0.312	7.9	11.7	OT	CG	N
2.687	68.25	73132	8.00	203.2	2.001	50.8	156	27	2.7	69	422	1877	4.08	103.7	0.343	8.7	11.9	OT	CG	N
2.687	68.25	73139	8.00	203.2	1.963	49.9	196	34	2.5	64	494	2196	4.34	110.3	0.362	9.2	12.0	OT	CG	N
2.687	68.25	73146	8.00	203.2	1.937	49.2	230	40	2.4	60	547	2434	4.50	114.3	0.375	9.5	12.0	OT	CG	N
2.687	68.25	73153	8.00	203.2	1.901	48.3	281	49	2.2	55	612	2723	4.76	120.8	0.393	10.0	12.1	OT	CG	N
2.687	68.25	73160	8.00	203.2	1.875	47.6	321	56	2.1	53	673	2992	4.97	126.3	0.406	10.3	12.2	OT	CG	N
2.687	68.25	73167	8.00	203.2	1.813	46.1	445	78	1.8	46	812	3610	5.40	137.1	0.437	11.1	12.3	OT	CG	N
2.687	68.25	73174	8.00	203.2	1.751	44.5	638	112	1.5	39	988	4395	5.57	141.5	0.468	11.9	11.9	OT	CG	N
2.687	68.25	73126	9.00	228.6	2.063	52.4	91	16	3.6	92	327	1456	4.12	104.6	0.312	7.9	13.2	OT	CG	N
2.687	68.25	73133	9.00	228.6	2.001	50.8	137	24	3.1	78	422	1877	4.55	115.5	0.343	8.7	13.3	OT	CG	N
2.687	68.25	73140	9.00	228.6	1.963	49.9	173	30	2.9	73	494	2196	4.84	123.0	0.362	9.2	13.4	OT	CG	N
2.687	68.25	73147	9.00	228.6	1.937	49.2	202	35	2.7	69	547	2434	5.02	127.4	0.375	9.5	13.4	OT	CG	N
2.687	68.25	73154	9.00	228.6	1.901	48.3	247	43	2.5	63	612	2723	5.31	134.8	0.393	10.0	13.5	OT	CG	N
2.687	68.25	73161	9.00	228.6	1.875	47.6	283	50	2.4	60	673	2992	5.53	140.5	0.406	10.3	13.6	OT	CG	N
2.687	68.25	73168	9.00	228.6	1.813	46.1	390	68	2.1	53	812	3610	6.03	153.2	0.437	11.1	13.8	OT	CG	N
2.687	68.25	73175	9.00	228.6	1.751	44.5	559	98	1.8	45	988	4395	6.22	158.1	0.468	11.9	13.3	OT	CG	N
2.687	68.25	S-3118	9.50	241.3	2.363	60.0	8.2	1.4	5.2	133	43	192	1.54	39.1	0.162	4.1	8.50	SST	C	N
2.687	68.25	73127	10.0	254.0	2.063	52.4	81	14	4.0	102	327	1456	4.53	115.0	0.312	7.9	14.5	OT	CG	N
2.687	68.25	73134	10.0	254.0	2.001	50.8	122	21	3.5	88	422	1877	5.04	128.1	0.343	8.7	14.7	OT	CG	N
2.687	68.25	73141	10.0	254.0	1.963	49.9	154	27	3.2	81	494	2196	5.34	135.7	0.362	9.2	14.8	OT	CG	N
2.687	68.25	73148	10.0	254.0	1.937	49.2	180	32	3.0	77	547	2434	5.53	140.5	0.375	9.5	14.8	OT	CG	N
2.687	68.25	73155	10.0	254.0	1.901	48.3	220	39	2.8	71	612	2723	5.86	148.7	0.393	10.0	14.9	OT	CG	N
2.687	68.25	73162	10.0	254.0	1.875	47.6	251	44	2.7	68	673	2992	6.13	155.7	0.406	10.3	15.1	OT	CG	N
2.687	68.25	73169	10.0	254.0	1.813	46.1	347	61	2.3	59	812	3610	6.67	169.3	0.437	11.1	15.3	OT	CG	N
2.687	68.25	73176	10.0	254.0	1.751	44.5	497	87	2.0	50	988	4395	6.88	174.7	0.468	11.9	14.7	OT	CG	N
2.703	68.66	4157	6.25	158.8	2.433	61.8	6.6	1.2	4.3	110	29	128	.98	24.9	0.135	3.4	6.25	SPR	C	GI
2.703	68.66	12019	7.00	177.8	2.493	63.3	2.2	.39	6.3	160	14	62	.68	17.3	0.105	2.7	6.50	SPR	CG	Z
2.734	69.44	1920	3.75	95.3	2.524	64.1	1.3	.23	2.7	68	3.5	16	1.09	27.6	0.105	2.7	9.33	SPR	C	Z
2.734	69.44	3058	5.00	127.0	2.422	61.5	12	2.2	3.4	87	43	190	.94	23.8	0.156	4.0	6.00	SPR	CG	Z
2.734	69.44	3238	6.25	158.8	2.454	62.3	7.3	1.3	4.3	110	32	141	.89	22.5	0.140	3.6	6.33	SPR	CG	Z
2.750	69.85	S-3157	2.50	63.5	2.366	60.1	81	14	.80	20	65	287	.62	15.8	0.192	4.9	3.25	SST	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.750	69.85	4336	4.75	120.7	2.300	58.4	65	11	1.8	45	116	514	1.24	31.4	0.225	5.7	5.50	SPR	CG	Z
2.750	69.85	4086	6.25	158.8	2.000	50.8	303	53	1.6	40	476	2118	3.38	85.7	0.375	9.5	9.00	HD	CG	N
2.750	69.85	4093	8.50	215.9	1.250	31.8	7107	1245	.36	9.2	2563	11400	7.50	190.5	0.750	19.1	10.0	HD	CG	N
2.750	69.85	S-3116	14.0	355.6	2.438	61.9	6.1	1.1	6.2	158	38	167	1.40	35.7	0.156	4.0	9.00	SST	CG	N
2.796	71.02	11890	9.00	228.6	2.564	65.1	1.5	.27	7.8	197	12	53	1.25	31.7	0.116	2.9	9.75	SST	C	N
2.812	71.42	4328	1.63	41.3	1.938	49.2	3913	685	.18	4.5	693	3082	1.31	33.3	0.437	11.1	3.00	SPR	CG	Z
2.812	71.42	4334	13.0	330.2	2.246	57.0	33	5.7	6.6	168	215	958	5.52	140.2	0.283	7.2	19.5	SPR	CG	Z
2.875	73.03	S-3095	2.88	73.0	2.351	59.7	189	33	.74	19	139	617	.98	25.0	0.262	6.7	3.75	SST	CG	N
2.875	73.03	S-3159	3.00	76.2	2.625	66.7	15	2.6	1.4	35	20	90	.50	12.7	0.125	3.2	3.00	SST	C	N
2.875	73.03	S-86	3.00	76.2	2.491	63.3	39	6.8	1.6	40	62	275	.82	20.7	0.192	4.9	4.25	SST	CG	N
2.875	73.03	S-995	3.63	92.1	2.309	58.6	107	19	1.6	41	174	775	1.76	44.6	0.283	7.2	6.25	SST	CG	N
2.875	73.03	4240	6.75	171.5	2.087	53.0	378	66	1.4	35	516	2293	3.15	80.1	0.394	10.0	8.00	SPR	CG	Z
2.875	73.03	4314	7.50	190.5	2.375	60.3	52	9.1	2.9	74	151	673	2.00	50.8	0.250	6.4	8.00	SPR	CG	Z
2.875	73.03	S-3124	8.50	215.9	2.375	60.3	39	6.8	3.3	84	127	566	2.25	57.2	0.250	6.4	9.00	SST	CG	N
2.875	73.03	11314	12.8	323.9	2.213	56.2	71	12	4.6	116	325	1445	5.54	140.8	0.331	8.4	16.8	SPR	CG	N
2.906	73.81	3313	1.50	38.1	2.492	63.3	135	24	.66	17	89	395	.62	15.8	0.207	5.3	3.00	SPR	CG	Z
2.906	73.81	73177	4.00	101.6	2.344	59.5	116	20	2.0	50	230	1023	1.76	44.8	0.281	7.1	6.27	OT	CG	N
2.906	73.81	73183	4.00	101.6	2.282	58.0	184	32	1.7	42	304	1353	1.95	49.5	0.312	7.9	6.24	OT	CG	N
2.906	73.81	73189	4.00	101.6	2.220	56.4	278	49	1.4	36	392	1746	2.14	54.5	0.343	8.7	6.25	OT	CG	N
2.906	73.81	73195	4.00	101.6	2.182	55.4	352	62	1.3	33	459	2044	2.27	57.6	0.362	9.2	6.26	OT	CG	N
2.906	73.81	73201	4.00	101.6	2.156	54.8	412	72	1.2	31	509	2266	2.35	59.6	0.375	9.5	6.26	OT	CG	N
2.906	73.81	73207	4.00	101.6	2.120	53.8	508	89	1.1	29	570	2536	2.46	62.4	0.393	10.0	6.25	OT	CG	N
2.906	73.81	73178	5.00	127.0	2.344	59.5	90	16	2.6	65	230	1023	2.11	53.6	0.281	7.1	7.51	OT	CG	N
2.906	73.81	73184	5.00	127.0	2.282	58.0	142	25	2.1	54	304	1353	2.34	59.4	0.312	7.9	7.50	OT	CG	N
2.906	73.81	73190	5.00	127.0	2.220	56.4	211	37	1.9	47	392	1746	2.61	66.2	0.343	8.7	7.60	OT	CG	N
2.906	73.81	73196	5.00	127.0	2.182	55.4	273	48	1.7	43	459	2044	2.71	68.9	0.362	9.2	7.49	OT	CG	N
2.906	73.81	73202	5.00	127.0	2.156	54.8	312	55	1.6	41	509	2266	2.86	72.6	0.375	9.5	7.62	OT	CG	N
2.906	73.81	73208	5.00	127.0	2.120	53.8	384	67	1.5	38	570	2536	3.00	76.1	0.393	10.0	7.63	OT	CG	N
2.906	73.81	73213	5.00	127.0	2.094	53.2	435	76	1.4	37	627	2788	3.14	79.9	0.406	10.3	7.75	OT	CG	N
2.906	73.81	73219	5.00	127.0	2.032	51.6	633	111	1.2	30	757	3368	3.28	83.3	0.437	11.1	7.50	OT	CG	N
2.906	73.81	73225	5.00	127.0	1.970	50.0	865	151	1.1	27	923	4105	3.51	89.2	0.468	11.9	7.50	OT	CG	N
2.906	73.81	73231	5.00	127.0	1.906	48.4	1228	215	.87	22	1074	4779	3.63	92.1	0.500	12.7	7.25	OT	CG	N
2.906	73.81	73237	5.00	127.0	1.844	46.8	1625	285	.79	20	1276	5674	3.85	97.8	0.531	13.5	7.25	OT	CG	N
2.906	73.81	73179	6.00	152.4	2.344	59.5	73	13	3.2	80	230	1023	2.47	62.7	0.281	7.1	8.79	OT	CG	N
2.906	73.81	73185	6.00	152.4	2.282	58.0	116	20	2.6	67	304	1353	2.72	69.2	0.312	7.9	8.73	OT	CG	N
2.906	73.81	73191	6.00	152.4	2.220	56.4	172	30	2.3	58	392	1746	3.04	77.3	0.343	8.7	8.87	OT	CG	N
2.906	73.81	73197	6.00	152.4	2.182	55.4	218	38	2.1	54	459	2044	3.21	81.6	0.362	9.2	8.88	OT	CG	N
2.906	73.81	73203	6.00	152.4	2.156	54.8	255	45	2.0	51	509	2266	3.33	84.5	0.375	9.5	8.88	OT	CG	N
2.906	73.81	73209	6.00	152.4	2.120	53.8	313	55	1.8	46	570	2536	3.50	88.9	0.393	10.0	8.90	OT	CG	N
2.906	73.81	73214	6.00	152.4	2.094	53.2	351	61	1.8	45	627	2788	3.70	94.1	0.406	10.3	9.12	OT	CG	N
2.906	73.81	73220	6.00	152.4	2.032	51.6	507	89	1.5	38	757	3368	3.88	98.5	0.437	11.1	8.87	OT	CG	N
2.906	73.81	73226	6.00	152.4	1.970	50.0	692	121	1.3	34	923	4105	4.15	105.5	0.468	11.9	8.88	OT	CG	N
2.906	73.81	73232	6.00	152.4	1.906	48.4	977	171	1.1	28	1074	4779	4.30	109.2	0.500	12.7	8.60	OT	CG	N
2.906	73.81	73238	6.00	152.4	1.844	46.8	1288	226	.99	25	1276	5674	4.58	116.3	0.531	13.5	8.62	OT	CG	N
2.906	73.81	4080	6.50	165.1	1.782	45.3	1856	325	.71	18	1315	5849	4.50	114.2	0.562	14.3	8.00	SPR	CG	N
2.906	73.81	73180	7.00	177.8	2.344	59.5	62	11	3.7	94	230	1023	2.81	71.3	0.281	7.1	9.99	OT	CG	N
2.906	73.81	73186	7.00	177.8	2.282	58.0	98	17	3.1	79	304	1353	3.11	79.0	0.312	7.9	9.96	OT	CG	N
2.906	73.81	73192	7.00	177.8	2.220	56.4	145	25	2.7	69	392	1746	3.48	88.4	0.343	8.7	10.2	OT	CG	N
2.906	73.81	73198	7.00	177.8	2.182	55.4	184	32	2.5	63	459	2044	3.67	93.3	0.362	9.2	10.1	OT	CG	N
2.906	73.81	73204	7.00	177.8	2.156	54.8	213	37	2.4	61	509	2266	3.84	97.5	0.375	9.5	10.2	OT	CG	N
2.906	73.81	73210	7.00	177.8	2.120	53.8	262	46	2.2	55	570	2536	4.03	102.3	0.393	10.0	10.2	OT	CG	N
2.906	73.81	73215	7.00	177.8	2.094	53.2	294	51	2.1	54	627	2788	4.26	108.3	0.406	10.3	10.5	OT	CG	N
2.906	73.81	73221	7.00	177.8	2.032	51.6	422	74	1.8	46	757	3368	4.48	113.8	0.437	11.1	10.3	OT	CG	N
2.906	73.81	73227	7.00	177.8	1.970	50.0	577	101	1.6	41	923	4105	4.80	121.8	0.468	11.9	10.2	OT	CG	N
2.906	73.81	73233	7.00	177.8	1.906	48.4	819	143	1.3	33	1074	4779	4.94	125.4	0.500	12.7	9.88	OT	CG	N
2.906	73.81	73239	7.00	177.8	1.844	46.8	1073	188	1.2	30	1276	5674	5.28	134.2	0.531	13.5	9.95	OT	CG	N
2.906	73.81	73181	8.00	203.2	2.344	59.5	53	9.3	4.3	110	230	1023	3.19	81.0	0.281	7.1	11.3	OT	CG	N
2.906	73.81	73187	8.00	203.2	2.282	58.0	84	15	3.6	92	304	1353	3.52	89.5	0.312	7.9	11.3	OT	CG	N
2.906	73.81	73193	8.00	203.2	2.220	56.4	126	22	3.1	79	392	1746	3.90	99.1	0.343	8.7	11.4	OT	CG	N
2.906	73.81	73199	8.00	203.2	2.182	55.4	158	28	2.9	74	459	2044	4.16	105.6	0.362	9.2	11.5	OT	CG	N
2.906	73.81	73205	8.00	203.2	2.156	54.8	185	32	2.8	70	509	2266	4.30	109.3	0.375	9.5	11.5	OT	CG	N
2.906	73.81	73211	8.00	203.2	2.120	53.8	227	40	2.5	64	570	2536	4.53	115.0	0.393	10.0	11.5	OT	CG	N
2.906	73.81	73216	8.00	203.2	2.094	53.2	253	44	2.5	63	627	2788	4.82	122.5	0.406	10.3	11.9	OT	CG	N
2.906	73.81	73222	8.00	203.2	2.032	51.6	367	64	2.1	52	757	3368	5.02	127.5	0.437	11.1	11.5	OT	CG	N
2.906	73.81	73228	8.00	203.2	1.970	50.0	494	87	1.9	47	923	4105	5.44	138.3	0.468	11.9	11.6	OT	CG	N
2.906	73.81	73234	8.00	203.2	1.906	48.4	697	122	1.5	39	1074	4779	5.63	142.9	0.500	12.7	11.3	OT	CG	N
2.906	73.81	73240	8.00	203.2	1.844	46.8	922	161	1.4	35	1276	5674	5.98	151.8	0.531	13.5	11.3	OT	CG	N
2.906	73.81	73182	10.0	254.0	2.344	59.5	42	7.4	5.5	139	230	1023	3.88	98.5	0.281	7.1	13.8	OT	CG	N
2.906	73.81	73188	10.0	254.0	2.282	58.0	66	12	4.6	117	304	1353	4.31	109.6	0.312	7.9	13.8	OT	CG	N
2.906	73.81	73194	10.0	254.0	2.220	56.4	98	17	4.0	102	392	1746	4.82	122.5	0.343	8.7	14.1	OT	CG	N
2.906	73.81	73200	10.0	254.0	2.182	55.4	125	22	3.7	93	459	2044	5.07	128.7	0.362	9.2	14.0	OT	CG	N
2.906	73.81	73206	10.0	254.0	2.156	54.8	143	25	3.6	90	509	2266	5.35	135.8	0.375	9.5	14.3	OT	CG	N
2.906	73.81	73212	10.0	254.0	2.120	53.8	176	31	3.2	82	570	2536	5.61	142.5	0.393	10.0	14.3	OT	CG	N
2.906	73.81	73217	10.0	254.0	2.094	53.2	198	35	3.2	80	627	2788	5.94	150.8	0.406	10.3	14.6	OT	CG	N
2.906	73.81	73223	10.0	254.0	2.032	51.6	284	50	2.7	68	757	3368	6.23	158.3	0.437	11.1	14.3	OT	CG	N
2.906	73.81	73229	10.0	254.0	1.970	50.0	388	68	2.4	60	923	4105	6.68	169.6	0.468	11.9	14.3	OT	CG	N
2.906	73.81	73235	10.0	254.0	1.906	48.4	543	95	2.0	50	1074	4779	6.94	176.3	0.500	12.7	13.9	OT	CG	N
2.906	73.81	73241	10.0	254.0	1.844	46.8	711	125	1.8	46	1276	5674	7.43	188.8	0.531	13.5	14.0	OT	CG	N
2.906	73.81	73218	12.0	304.8	2.094	53.2	163	29	3.8	98	627	2788	7.04	178.8	0.406	10.3	17.3	OT	CG	N
2.906	73.81	73224	12.0	304.8	2.032	51.6	232	41	3.3	83	757	3368	7.44	188.9	0.437	11.1	17.0	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
2.906	73.81	73230	12.0	304.8	1.970	50.0	317	56	2.9	74	923	4105	7.96	202.2	0.468	11.9	17.0	OT	CG	N
2.906	73.81	73236	12.0	304.8	1.906	48.4	445	78	2.4	61	1074	4779	8.25	209.5	0.500	12.7	16.5	OT	CG	N
2.906	73.81	73242	12.0	304.8	1.844	46.8	583	102	2.2	56	1276	5674	8.83	224.3	0.531	13.5	16.6	OT	CG	N
2.938	74.63	10799	3.25	82.6	2.728	69.3	2.7	.48	2.8	71	7.6	34	.47	12.0	0.105	2.7	4.50	SST	CG	N
2.938	74.63	12628	3.38	85.7	2.524	64.1	52	9.1	1.7	43	88	391	.93	23.7	0.207	5.3	4.50	SPR	CG	Z
2.938	74.63	11779	5.81	147.6	2.564	65.1	11	1.8	3.9	100	42	185	1.87	47.5	0.187	4.7	10.0	SPR	CG	Z
2.938	74.63	4055	8.00	203.2	1.564	39.7	3509	615	.59	15	2088	9287	6.87	174.5	0.687	17.4	10.0	HD	CG	N
2.938	74.63	S-3153	10.5	266.7	2.564	65.1	9.2	1.6	6.1	155	56	249	1.87	47.5	0.187	4.7	10.0	SST	CG	N
2.984	75.79	12443	7.00	177.8	2.782	70.7	1.0	.18	6.1	156	6.2	28	.86	21.8	0.101	2.6	7.50	SST	C	N
3.000	76.20	4138	1.75	44.5	2.586	65.7	81	14	1.0	26	83	368	.72	18.4	0.207	5.3	3.50	SPR	CG	Z
3.000	76.20	11357	2.00	50.8	2.376	60.4	561	98	.47	12	262	1167	1.01	25.8	0.312	7.9	3.25	SPR	CG	Z
3.000	76.20	S-3221	2.72	69.0	2.618	66.5	31	5.4	1.9	47	57	253	.86	21.8	0.191	4.9	4.50	SST	CG	N
3.000	76.20	S-3030	9.00	228.6	2.616	66.4	13	2.2	4.6	118	59	264	1.54	39.0	0.192	4.9	8.00	SST	CG	N
3.000	76.20	4241	11.0	279.4	2.616	66.4	9.8	1.7	7.0	179	69	307	2.11	53.6	0.192	4.9	11.0	SPR	CG	Z
3.031	76.99	S-3218	2.25	57.2	2.595	65.9	43	7.6	1.2	29	50	222	1.09	27.7	0.218	5.5	5.00	SST	CG	N
3.031	76.99	4249	4.63	117.5	2.345	59.6	341	60	.98	25	335	1492	1.72	43.6	0.343	8.7	5.00	SPR	CG	Z
3.125	79.38	11570	2.09	53.2	2.929	74.4	2.4	.42	1.6	41	3.8	17	.49	12.4	0.098	2.5	4.00	SPR	CG	N
3.125	79.38	10819	4.69	119.0	2.313	58.8	486	85	1.1	27	521	2319	2.44	61.9	0.406	10.3	6.00	SPR	CG	N
3.140	79.76	11606	1.50	38.1	2.764	70.2	23	4.1	.37	9.4	8.7	39	1.13	28.7	0.188	4.8	5.00	SPR	CG	Z
3.156	80.16	S-992	1.88	47.6	2.832	71.9	32	5.6	1.2	29	37	164	.49	12.3	0.162	4.1	3.00	SST	CG	N
3.156	80.16	S-249	3.19	81.0	2.860	72.6	11	1.9	2.6	66	29	128	.59	15.0	0.148	3.8	4.00	SST	CG	N
3.156	80.16	73243	5.00	127.0	2.470	62.7	179	31	2.0	52	363	1616	2.40	61.0	0.343	8.7	7.00	OT	CG	N
3.156	80.16	73249	5.00	127.0	2.432	61.8	226	40	1.9	48	426	1893	2.53	64.4	0.362	9.2	7.00	OT	CG	N
3.156	80.16	73255	5.00	127.0	2.406	61.1	264	46	1.8	45	472	2099	2.63	66.7	0.375	9.5	7.00	OT	CG	N
3.156	80.16	73261	5.00	127.0	2.370	60.2	325	57	1.6	41	529	2351	2.75	69.9	0.393	10.0	7.00	OT	CG	N
3.156	80.16	73267	5.00	127.0	2.344	59.5	376	66	1.5	39	581	2585	2.84	72.2	0.406	10.3	7.00	OT	CG	N
3.156	80.16	73273	5.00	127.0	2.282	58.0	522	91	1.3	34	703	3126	3.06	77.7	0.437	11.1	7.00	OT	CG	N
3.156	80.16	73279	5.00	127.0	2.220	56.4	710	124	1.2	31	858	3814	3.28	83.2	0.468	11.9	7.00	OT	CG	N
3.156	80.16	73285	5.00	127.0	2.156	54.8	959	168	1.0	26	999	4446	3.50	88.9	0.500	12.7	7.00	OT	CG	N
3.156	80.16	73291	5.00	127.0	2.094	53.2	1264	221	.94	24	1188	5286	3.72	94.4	0.531	13.5	7.00	OT	CG	N
3.156	80.16	4023-A	5.50	139.7	1.968	49.9	2003	351	.87	22	1750	7784	4.34	110.2	0.594	15.1	7.31	SPR	CG	N
3.156	80.16	73244	6.00	152.4	2.470	62.7	146	26	2.5	63	363	1616	2.79	70.8	0.343	8.7	8.12	OT	CG	N
3.156	80.16	73250	6.00	152.4	2.432	61.8	185	32	2.3	58	426	1893	2.94	74.7	0.362	9.2	8.12	OT	CG	N
3.156	80.16	73256	6.00	152.4	2.406	61.1	212	37	2.2	57	472	2099	3.09	78.6	0.375	9.5	8.25	OT	CG	N
3.156	80.16	73262	6.00	152.4	2.370	60.2	260	46	2.0	52	529	2351	3.24	82.4	0.393	10.0	8.25	OT	CG	N
3.156	80.16	73268	6.00	152.4	2.344	59.5	350	61	1.7	42	581	2585	2.99	76.0	0.406	10.3	7.37	OT	CG	N
3.156	80.16	73274	6.00	152.4	2.282	58.0	421	74	1.7	42	703	3126	3.58	91.0	0.437	11.1	8.20	OT	CG	N
3.156	80.16	73280	6.00	152.4	2.220	56.4	568	99	1.5	38	858	3814	3.86	98.1	0.468	11.9	8.25	OT	CG	N
3.156	80.16	73286	6.00	152.4	2.156	54.8	767	134	1.3	33	999	4446	4.13	104.8	0.500	12.7	8.25	OT	CG	N
3.156	80.16	73292	6.00	152.4	2.094	53.2	1011	177	1.2	30	1188	5286	4.38	111.3	0.531	13.5	8.25	OT	CG	N
3.156	80.16	73245	7.00	177.8	2.470	62.7	123	22	2.9	75	363	1616	3.17	80.6	0.343	8.7	9.25	OT	CG	N
3.156	80.16	73251	7.00	177.8	2.432	61.8	156	27	2.7	69	426	1893	3.35	85.1	0.362	9.2	9.25	OT	CG	N
3.156	80.16	73257	7.00	177.8	2.406	61.1	179	31	2.6	67	472	2099	3.52	89.3	0.375	9.5	9.38	OT	CG	N
3.156	80.16	73263	7.00	177.8	2.370	60.2	220	39	2.4	61	529	2351	3.68	93.6	0.393	10.0	9.38	OT	CG	N
3.156	80.16	73269	7.00	177.8	2.344	59.5	255	45	2.3	58	581	2585	3.81	96.7	0.406	10.3	9.38	OT	CG	N
3.156	80.16	73275	7.00	177.8	2.282	58.0	352	62	2.0	51	703	3126	4.11	104.3	0.437	11.1	9.40	OT	CG	N
3.156	80.16	73281	7.00	177.8	2.220	56.4	473	83	1.8	46	858	3814	4.45	112.9	0.468	11.9	9.50	OT	CG	N
3.156	80.16	73287	7.00	177.8	2.156	54.8	639	112	1.6	40	999	4446	4.75	120.6	0.500	12.7	9.50	OT	CG	N
3.156	80.16	73293	7.00	177.8	2.094	53.2	842	148	1.4	36	1188	5286	5.04	128.1	0.531	13.5	9.50	OT	CG	N
3.156	80.16	73246	8.00	203.2	2.470	62.7	105	18	3.5	88	363	1616	3.60	91.5	0.343	8.7	10.5	OT	CG	N
3.156	80.16	73252	8.00	203.2	2.432	61.8	133	23	3.2	81	426	1893	3.80	96.6	0.362	9.2	10.5	OT	CG	N
3.156	80.16	73258	8.00	203.2	2.406	61.1	156	27	3.0	77	472	2099	3.94	100.0	0.375	9.5	10.5	OT	CG	N
3.156	80.16	73264	8.00	203.2	2.370	60.2	191	33	2.8	70	529	2351	4.13	104.8	0.393	10.0	10.5	OT	CG	N
3.156	80.16	73270	8.00	203.2	2.344	59.5	218	38	2.7	68	581	2585	4.30	109.3	0.406	10.3	10.6	OT	CG	N
3.156	80.16	73276	8.00	203.2	2.282	58.0	304	53	2.3	59	703	3126	4.63	117.6	0.437	11.1	10.6	OT	CG	N
3.156	80.16	73282	8.00	203.2	2.220	56.4	408	71	2.1	53	858	3814	5.01	127.2	0.468	11.9	10.7	OT	CG	N
3.156	80.16	73288	8.00	203.2	2.156	54.8	548	96	1.8	46	999	4446	5.38	136.5	0.500	12.7	10.8	OT	CG	N
3.156	80.16	73294	8.00	203.2	2.094	53.2	718	126	1.7	42	1188	5286	5.73	145.7	0.531	13.5	10.8	OT	CG	N
3.156	80.16	73247	10.0	254.0	2.470	62.7	83	15	4.4	111	363	1616	4.38	111.1	0.343	8.7	12.8	OT	CG	N
3.156	80.16	73253	10.0	254.0	2.432	61.8	105	18	4.0	103	426	1893	4.61	117.2	0.362	9.2	12.7	OT	CG	N
3.156	80.16	73259	10.0	254.0	2.406	61.1	122	21	3.9	99	472	2099	4.83	122.7	0.375	9.5	12.9	OT	CG	N
3.156	80.16	73265	10.0	254.0	2.370	60.2	150	26	3.5	90	529	2351	5.06	128.5	0.393	10.0	12.9	OT	CG	N
3.156	80.16	73271	10.0	254.0	2.344	59.5	171	30	3.4	86	581	2585	5.28	134.1	0.406	10.3	13.0	OT	CG	N
3.156	80.16	73277	10.0	254.0	2.282	58.0	237	42	3.0	75	703	3126	5.68	144.3	0.437	11.1	13.0	OT	CG	N
3.156	80.16	73283	10.0	254.0	2.220	56.4	317	56	2.7	69	858	3814	6.18	156.9	0.468	11.9	13.2	OT	CG	N
3.156	80.16	73289	10.0	254.0	2.156	54.8	426	75	2.3	60	999	4446	6.63	168.3	0.500	12.7	13.3	OT	CG	N
3.156	80.16	73295	10.0	254.0	2.094	53.2	559	98	2.1	54	1188	5286	7.06	179.4	0.531	13.5	13.3	OT	CG	N
3.156	80.16	73248	12.0	304.8	2.470	62.7	69	12	5.3	134	363	1616	5.15	130.8	0.343	8.7	15.0	OT	CG	N
3.156	80.16	73254	12.0	304.8	2.432	61.8	85	15	5.0	127	426	1893	5.52	140.2	0.362	9.2	15.3	OT	CG	N
3.156	80.16	73260	12.0	304.8	2.406	61.1	100	17	4.7	120	472	2099	5.72	145.3	0.375	9.5	15.3	OT	CG	N
3.156	80.16	73266	12.0	304.8	2.370	60.2	123	21	4.3	109	529	2351	5.99	152.2	0.393	10.0	15.2	OT	CG	N
3.156	80.16	73272	12.0	304.8	2.344	59.5	140	25	4.1	105	581	2585	6.25	158.9	0.406	10.3	15.4	OT	CG	N
3.156	80.16	73278	12.0	304.8	2.282	58.0	193	34	3.6	92	703	3126	6.77	172.0	0.437	11.1	15.5	OT	CG	N
3.156	80.16	73284	12.0	304.8	2.220	56.4	260	46	3.3	84	858	3814	7.32	186.0	0.468	11.9	15.7	OT	CG	N
3.156	80.16	73290	12.0	304.8	2.156	54.8	349	61	2.9	73	999	4446	7.88	200.1	0.500	12.7	15.8	OT	CG	N
3.156	80.16	73296	12.0	304.8	2.094	53.2	456	80	2.6	66	1188	5286	8.42	213.8	0.531	13.5	15.9	OT	CG	N
3.172	80.57	S-3108	6.00	152.4	2.932	74.5	1.5	.27	4.9	125	7.5	33	1.08	27.4	0.120	3.0	8.00	SST	C	N
3.250	82.55	10708	2.13	54.0	2.780	70.6	107	19	1.0	27	112	498	.82	20.9	0.235	6.0	3.50	SPR	CG	Z
3.250	82.55	S-3102	4.25	108.0	2.750	69.9	60	11	1.9	48	113	503	1.25	31.8	0.250	6.4	5.00	SST	CG	N
3.250	82.55	4002	4.50	114.3	2.250	57.2	1234	216	.70	18	866	3850	2.75	69.9	0.500	12.7	5.50	SPR	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
3.250	82.55	4096	12.0	304.8	2.250	57.2	411	72	2.1	53	866	3850	6.25	158.8	0.500	12.7	12.5	SPR	CG	N
3.266	82.96	S-1635	6.75	171.5	2.330	59.2	632	111	.89	23	562	2501	2.96	75.2	0.468	11.9	6.33	SST	CG	N
3.328	84.53	10985	3.13	79.4	2.828	71.8	59	10	1.9	47	111	492	1.22	31.0	0.250	6.4	5.00	SST	CG	N
3.375	85.73	4347	5.25	133.4	2.991	76.0	22	3.9	2.8	71	61	273	.91	23.2	0.192	4.9	4.75	SPR	CG	Z
3.375	85.73	S-3020	5.50	139.7	3.125	79.4	3.0	.52	4.8	121	14	63	.75	19.1	0.125	3.2	5.00	SST	C	N
3.375	85.73	4090	14.0	355.6	2.501	63.5	207	36	2.8	72	588	2614	5.24	133.2	0.437	11.1	12.0	SPR	CG	N
3.406	86.51	73297	6.00	152.4	2.720	69.1	121	21	2.8	71	338	1504	2.65	67.3	0.343	8.7	7.72	OT	CG	N
3.406	86.51	73303	6.00	152.4	2.682	68.1	152	27	2.6	66	396	1763	2.81	71.3	0.362	9.2	7.76	OT	CG	N
3.406	86.51	73309	6.00	152.4	2.656	67.5	177	31	2.5	63	440	1955	2.91	74.0	0.375	9.5	7.77	OT	CG	N
3.406	86.51	73315	6.00	152.4	2.620	66.5	209	37	2.4	60	492	2191	3.14	79.8	0.393	10.0	8.00	OT	CG	N
3.406	86.51	73321	6.00	152.4	2.594	65.9	241	42	2.2	57	542	2410	3.25	82.5	0.406	10.3	8.00	OT	CG	N
3.406	86.51	73327	6.00	152.4	2.532	64.3	341	60	1.9	49	656	2916	3.44	87.4	0.437	11.1	7.87	OT	CG	N
3.406	86.51	73333	6.00	152.4	2.470	62.7	473	83	1.7	43	800	3560	3.63	92.1	0.468	11.9	7.75	OT	CG	N
3.406	86.51	73339	6.00	152.4	2.406	61.1	637	112	1.5	37	934	4154	3.87	98.4	0.500	12.7	7.75	OT	CG	N
3.406	86.51	73345	6.00	152.4	2.344	59.5	855	150	1.3	33	1111	4943	4.05	102.8	0.531	13.5	7.63	OT	CG	N
3.406	86.51	73351	6.00	152.4	2.282	58.0	1103	193	1.2	30	1292	5746	4.30	109.2	0.562	14.3	7.65	OT	CG	N
3.406	86.51	73357	6.00	152.4	2.220	56.4	1465	257	1.0	26	1477	6571	4.42	112.2	0.593	15.1	7.45	OT	CG	N
3.406	86.51	73298	8.00	203.2	2.720	69.1	89	16	3.8	97	338	1504	3.35	85.2	0.343	8.7	9.78	OT	CG	N
3.406	86.51	73304	8.00	203.2	2.682	68.1	109	19	3.6	92	396	1763	3.63	92.2	0.362	9.2	10.0	OT	CG	N
3.406	86.51	73310	8.00	203.2	2.656	67.5	127	22	3.5	88	440	1955	3.76	95.6	0.375	9.5	10.0	OT	CG	N
3.406	86.51	73316	8.00	203.2	2.620	66.5	152	27	3.2	82	492	2191	4.03	102.3	0.393	10.0	10.2	OT	CG	N
3.406	86.51	73322	8.00	203.2	2.594	65.9	175	31	3.1	79	542	2410	4.17	105.9	0.406	10.3	10.3	OT	CG	N
3.406	86.51	73328	8.00	203.2	2.532	64.3	243	43	2.7	69	656	2916	4.48	113.7	0.437	11.1	10.2	OT	CG	N
3.406	86.51	73334	8.00	203.2	2.470	62.7	340	60	2.4	60	800	3560	4.68	118.8	0.468	11.9	10.0	OT	CG	N
3.406	86.51	73340	8.00	203.2	2.406	61.1	457	80	2.0	52	934	4154	5.01	127.1	0.500	12.7	10.0	OT	CG	N
3.406	86.51	73346	8.00	203.2	2.344	59.5	608	106	1.8	46	1111	4943	5.26	133.7	0.531	13.5	9.91	OT	CG	N
3.406	86.51	73352	8.00	203.2	2.282	58.0	779	136	1.7	42	1292	5746	5.62	142.8	0.562	14.3	10.0	OT	CG	N
3.406	86.51	73358	8.00	203.2	2.220	56.4	1037	182	1.4	36	1477	6571	5.75	146.1	0.593	15.1	9.70	OT	CG	N
3.406	86.51	73299	10.0	254.0	2.720	69.1	71	12	4.8	121	338	1504	4.03	102.4	0.343	8.7	11.8	OT	CG	N
3.406	86.51	73305	10.0	254.0	2.682	68.1	85	15	4.7	118	396	1763	4.45	113.1	0.362	9.2	12.3	OT	CG	N
3.406	86.51	73311	10.0	254.0	2.656	67.5	100	18	4.4	112	440	1955	4.58	116.3	0.375	9.5	12.2	OT	CG	N
3.406	86.51	73317	10.0	254.0	2.620	66.5	119	21	4.1	105	492	2191	4.93	125.1	0.393	10.0	12.5	OT	CG	N
3.406	86.51	73323	10.0	254.0	2.594	65.9	138	24	3.9	100	542	2410	5.07	128.7	0.406	10.3	12.5	OT	CG	N
3.406	86.51	73329	10.0	254.0	2.532	64.3	191	33	3.4	87	656	2916	5.46	138.6	0.437	11.1	12.5	OT	CG	N
3.406	86.51	73335	10.0	254.0	2.470	62.7	265	46	3.0	77	800	3560	5.74	145.7	0.468	11.9	12.3	OT	CG	N
3.406	86.51	73341	10.0	254.0	2.406	61.1	353	62	2.6	67	934	4154	6.19	157.1	0.500	12.7	12.4	OT	CG	N
3.406	86.51	73347	10.0	254.0	2.344	59.5	469	82	2.4	60	1111	4943	6.51	165.3	0.531	13.5	12.3	OT	CG	N
3.406	86.51	73353	10.0	254.0	2.282	58.0	608	106	2.1	54	1292	5746	6.89	174.9	0.562	14.3	12.3	OT	CG	N
3.406	86.51	73359	10.0	254.0	2.220	56.4	798	140	1.9	47	1477	6571	7.12	180.9	0.593	15.1	12.0	OT	CG	N
3.406	86.51	73300	12.0	304.8	2.720	69.1	59	10	5.7	146	338	1504	4.71	119.7	0.343	8.7	13.7	OT	CG	N
3.406	86.51	73306	12.0	304.8	2.682	68.1	71	12	5.6	142	396	1763	5.19	131.7	0.362	9.2	14.3	OT	CG	N
3.406	86.51	73312	12.0	304.8	2.656	67.5	82	14	5.4	136	440	1955	5.42	137.6	0.375	9.5	14.5	OT	CG	N
3.406	86.51	73318	12.0	304.8	2.620	66.5	98	17	5.0	128	492	2191	5.81	147.7	0.393	10.0	14.8	OT	CG	N
3.406	86.51	73324	12.0	304.8	2.594	65.9	112	20	4.8	123	542	2410	6.06	153.8	0.406	10.3	14.9	OT	CG	N
3.406	86.51	73330	12.0	304.8	2.532	64.3	157	27	4.2	106	656	2916	6.45	163.8	0.437	11.1	14.8	OT	CG	N
3.406	86.51	73336	12.0	304.8	2.470	62.7	218	38	3.7	93	800	3560	6.77	172.0	0.468	11.9	14.5	OT	CG	N
3.406	86.51	73342	12.0	304.8	2.406	61.1	290	51	3.2	82	934	4154	7.31	185.7	0.500	12.7	14.6	OT	CG	N
3.406	86.51	73348	12.0	304.8	2.344	59.5	385	67	2.9	73	1111	4943	7.69	195.4	0.531	13.5	14.5	OT	CG	N
3.406	86.51	73354	12.0	304.8	2.282	58.0	494	87	2.6	66	1292	5746	8.22	208.7	0.562	14.3	14.6	OT	CG	N
3.406	86.51	73360	12.0	304.8	2.220	56.4	652	114	2.3	58	1477	6571	8.45	214.6	0.593	15.1	14.2	OT	CG	N
3.406	86.51	73301	14.0	355.6	2.720	69.1	49	8.6	6.9	175	338	1504	5.53	140.5	0.343	8.7	16.1	OT	CG	N
3.406	86.51	73307	14.0	355.6	2.682	68.1	59	10	6.7	171	396	1763	6.09	154.8	0.362	9.2	16.8	OT	CG	N
3.406	86.51	73313	14.0	355.6	2.656	67.5	69	12	6.4	162	440	1955	6.30	160.0	0.375	9.5	16.8	OT	CG	N
3.406	86.51	73319	14.0	355.6	2.620	66.5	84	15	5.9	149	492	2191	6.65	168.9	0.393	10.0	16.9	OT	CG	N
3.406	86.51	73325	14.0	355.6	2.594	65.9	95	17	5.7	145	542	2410	6.99	177.7	0.406	10.3	17.2	OT	CG	N
3.406	86.51	73331	14.0	355.6	2.532	64.3	132	23	5.0	126	656	2916	7.51	190.6	0.437	11.1	17.2	OT	CG	N
3.406	86.51	73337	14.0	355.6	2.470	62.7	184	32	4.4	110	800	3560	7.85	199.4	0.468	11.9	16.8	OT	CG	N
3.406	86.51	73343	14.0	355.6	2.406	61.1	244	43	3.8	97	934	4154	8.50	216.0	0.500	12.7	17.0	OT	CG	N
3.406	86.51	73349	14.0	355.6	2.344	59.5	326	57	3.4	87	1111	4943	8.90	225.9	0.531	13.5	16.8	OT	CG	N
3.406	86.51	73355	14.0	355.6	2.282	58.0	416	73	3.1	79	1292	5746	9.55	242.5	0.562	14.3	17.0	OT	CG	N
3.406	86.51	73361	14.0	355.6	2.220	56.4	551	96	2.7	68	1477	6571	9.78	248.4	0.593	15.1	16.5	OT	CG	N
3.406	86.51	73302	16.0	406.4	2.720	69.1	43	7.5	7.9	200	338	1504	6.21	157.7	0.343	8.7	18.1	OT	CG	N
3.406	86.51	73308	16.0	406.4	2.682	68.1	52	9.1	7.6	194	396	1763	6.82	173.1	0.362	9.2	18.8	OT	CG	N
3.406	86.51	73314	16.0	406.4	2.656	67.5	61	11	7.2	183	440	1955	7.03	178.5	0.375	9.5	18.7	OT	CG	N
3.406	86.51	73320	16.0	406.4	2.620	66.5	73	13	6.7	171	492	2191	7.53	191.4	0.393	10.0	19.2	OT	CG	N
3.406	86.51	73326	16.0	406.4	2.594	65.9	83	15	6.5	166	542	2410	7.89	200.4	0.406	10.3	19.4	OT	CG	N
3.406	86.51	73332	16.0	406.4	2.532	64.3	115	20	5.7	145	656	2916	8.49	215.5	0.437	11.1	19.4	OT	CG	N
3.406	86.51	73338	16.0	406.4	2.470	62.7	160	28	5.0	127	800	3560	8.89	225.8	0.468	11.9	19.0	OT	CG	N
3.406	86.51	73344	16.0	406.4	2.406	61.1	212	37	4.4	112	934	4154	9.63	244.7	0.500	12.7	19.3	OT	CG	N
3.406	86.51	73350	16.0	406.4	2.344	59.5	283	50	3.9	100	1111	4943	10.1	256.2	0.531	13.5	19.0	OT	CG	N
3.406	86.51	73356	16.0	406.4	2.282	58.0	361	63	3.6	91	1292	5746	10.8	275.1	0.562	14.3	19.3	OT	CG	N
3.406	86.51	73362	16.0	406.4	2.220	56.4	477	84	3.1	79	1477	6571	11.1	282.3	0.593	15.1	18.7	OT	CG	N
3.421	86.89	1879	3.84	97.6	2.921	74.2	50	8.8	2.5	63	124	552	1.38	34.9	0.250	6.4	5.50	HD	CG	Z
3.500	88.90	4085	4.00	101.6	1.750	44.5	23293	4079	.14	3.6	3298	14671	3.50	88.9	0.875	22.2	4.00	HD	CG	N
3.500	88.90	S-1652	4.13	104.8	3.010	76.5	44	7.8	2.2	57	99	441	1.23	31.1	0.245	6.2	5.00	SST	CG	N
3.500	88.90	4081	5.38	136.5	2.976	75.6	19	3.3	2.1	53	40	177	3.28	83.2	0.262	6.7	12.5	SPR	CG	Z
3.500	88.90	4084	8.00	203.2	2.000	50.8	3240	567	.67	17	2162	9616	6.56	166.7	0.750	19.1	8.75	HD	CG	N
3.500	88.90	S-3169	8.50	215.9	3.064	77.8	14	2.4	5.4	136	75	332	1.91	48.5	0.218	5.5	7.75	SST	C	N
3.500	88.90	4050	10.0	254.0	2.250	57.2	1191	209	1.3	32	1491	6631	6.09	154.8	0.625	15.9	9.75	SPR	CG	N
3.656	92.86	73363	6.00	152.4	2.932	74.5	138	24	2.7	68	371	1649	2.53	64.4	0.362	9.2	7.00	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
3.656	92.86	73369	6.00	152.4	2.906	73.8	161	28	2.6	65	411	1829	2.62	66.7	0.375	9.5	7.00	OT	CG	N
3.656	92.86	73375	6.00	152.4	2.870	72.9	197	35	2.3	59	461	2050	2.75	69.9	0.393	10.0	7.00	OT	CG	N
3.656	92.86	73381	6.00	152.4	2.844	72.2	228	40	2.2	57	507	2256	2.84	72.2	0.406	10.3	7.00	OT	CG	N
3.656	92.86	73387	6.00	152.4	2.782	70.7	299	52	2.1	52	614	2731	3.17	80.5	0.437	11.1	7.25	OT	CG	N
3.656	92.86	73393	6.00	152.4	2.720	69.1	405	71	1.9	47	750	3337	3.39	86.2	0.468	11.9	7.25	OT	CG	N
3.656	92.86	73399	6.00	152.4	2.656	67.5	544	95	1.6	41	876	3896	3.63	92.1	0.500	12.7	7.25	OT	CG	N
3.656	92.86	73405	6.00	152.4	2.594	65.9	713	125	1.5	37	1043	4640	3.85	97.8	0.531	13.5	7.25	OT	CG	N
3.656	92.86	73411	6.00	152.4	2.532	64.3	922	161	1.3	33	1214	5398	4.07	103.5	0.562	14.3	7.25	OT	CG	N
3.656	92.86	73417	6.00	152.4	2.470	62.7	1207	211	1.2	29	1389	6178	4.23	107.3	0.593	15.1	7.13	OT	CG	N
3.656	92.86	73364	8.00	203.2	2.932	74.5	99	17	3.8	95	371	1649	3.26	82.8	0.362	9.2	9.01	OT	CG	N
3.656	92.86	73370	8.00	203.2	2.906	73.8	117	20	3.5	90	411	1829	3.34	84.8	0.375	9.5	8.90	OT	CG	N
3.656	92.86	73376	8.00	203.2	2.870	72.9	143	25	3.2	82	461	2050	3.50	88.9	0.393	10.0	8.90	OT	CG	N
3.656	92.86	73382	8.00	203.2	2.844	72.2	165	29	3.1	78	507	2256	3.61	91.8	0.406	10.3	8.90	OT	CG	N
3.656	92.86	73388	8.00	203.2	2.782	70.7	217	38	2.8	72	614	2731	4.04	102.7	0.437	11.1	9.25	OT	CG	N
3.656	92.86	73394	8.00	203.2	2.720	69.1	292	51	2.6	65	750	3337	4.35	110.5	0.468	11.9	9.30	OT	CG	N
3.656	92.86	73400	8.00	203.2	2.656	67.5	389	68	2.3	57	876	3896	4.68	118.8	0.500	12.7	9.35	OT	CG	N
3.656	92.86	73406	8.00	203.2	2.594	65.9	506	89	2.1	52	1043	4640	4.99	126.8	0.531	13.5	9.40	OT	CG	N
3.656	92.86	73412	8.00	203.2	2.532	64.3	657	115	1.8	47	1214	5398	5.27	133.8	0.562	14.3	9.38	OT	CG	N
3.656	92.86	73418	8.00	203.2	2.470	62.7	853	149	1.6	41	1389	6178	5.49	139.3	0.593	15.1	9.25	OT	CG	N
3.656	92.86	73365	10.0	254.0	2.932	74.5	78	14	4.7	120	371	1649	3.91	99.4	0.362	9.2	10.8	OT	CG	N
3.656	92.86	73371	10.0	254.0	2.906	73.8	93	16	4.4	113	411	1829	4.01	101.9	0.375	9.5	10.7	OT	CG	N
3.656	92.86	73377	10.0	254.0	2.870	72.9	112	20	4.1	104	461	2050	4.25	107.9	0.393	10.0	10.8	OT	CG	N
3.656	92.86	73383	10.0	254.0	2.844	72.2	129	23	3.9	100	507	2256	4.38	111.4	0.406	10.3	10.8	OT	CG	N
3.656	92.86	73389	10.0	254.0	2.782	70.7	169	30	3.6	92	614	2731	4.94	125.4	0.437	11.1	11.3	OT	CG	N
3.656	92.86	73395	10.0	254.0	2.720	69.1	226	40	3.3	84	750	3337	5.34	135.5	0.468	11.9	11.4	OT	CG	N
3.656	92.86	73401	10.0	254.0	2.656	67.5	304	53	2.9	73	876	3896	5.70	144.8	0.500	12.7	11.4	OT	CG	N
3.656	92.86	73407	10.0	254.0	2.594	65.9	394	69	2.6	67	1043	4640	6.11	155.1	0.531	13.5	11.5	OT	CG	N
3.656	92.86	73413	10.0	254.0	2.532	64.3	507	89	2.4	61	1214	5398	6.49	164.9	0.562	14.3	11.6	OT	CG	N
3.656	92.86	73419	10.0	254.0	2.470	62.7	660	116	2.1	53	1389	6178	6.75	171.3	0.593	15.1	11.4	OT	CG	N
3.656	92.86	73366	12.0	304.8	2.932	74.5	64	11	5.8	147	371	1649	4.62	117.3	0.362	9.2	12.8	OT	CG	N
3.656	92.86	73372	12.0	304.8	2.906	73.8	76	13	5.4	138	411	1829	4.74	120.3	0.375	9.5	12.6	OT	CG	N
3.656	92.86	73378	12.0	304.8	2.870	72.9	92	16	5.0	128	461	2050	5.01	127.3	0.393	10.0	12.8	OT	CG	N
3.656	92.86	73384	12.0	304.8	2.844	72.2	106	19	4.8	122	507	2256	5.18	131.5	0.406	10.3	12.8	OT	CG	N
3.656	92.86	73390	12.0	304.8	2.782	70.7	139	24	4.4	113	614	2731	5.83	148.2	0.437	11.1	13.3	OT	CG	N
3.656	92.86	73396	12.0	304.8	2.720	69.1	185	32	4.1	103	750	3337	6.32	160.5	0.468	11.9	13.5	OT	CG	N
3.656	92.86	73402	12.0	304.8	2.656	67.5	249	44	3.5	90	876	3896	6.75	171.5	0.500	12.7	13.5	OT	CG	N
3.656	92.86	73408	12.0	304.8	2.594	65.9	323	57	3.2	82	1043	4640	7.22	183.4	0.531	13.5	13.6	OT	CG	N
3.656	92.86	73414	12.0	304.8	2.532	64.3	412	72	2.9	75	1214	5398	7.73	196.3	0.562	14.3	13.8	OT	CG	N
3.656	92.86	73420	12.0	304.8	2.470	62.7	538	94	2.6	66	1389	6178	8.01	203.3	0.593	15.1	13.5	OT	CG	N
3.656	92.86	73367	14.0	355.6	2.932	74.5	54	9.5	6.8	174	371	1649	5.34	135.6	0.362	9.2	14.7	OT	CG	N
3.656	92.86	73373	14.0	355.6	2.906	73.8	64	11	6.5	164	411	1829	5.49	139.4	0.375	9.5	14.6	OT	CG	N
3.656	92.86	73379	14.0	355.6	2.870	72.9	78	14	5.9	151	461	2050	5.78	146.8	0.393	10.0	14.7	OT	CG	N
3.656	92.86	73385	14.0	355.6	2.844	72.2	90	16	5.7	144	507	2256	5.97	151.6	0.406	10.3	14.7	OT	CG	N
3.656	92.86	73391	14.0	355.6	2.782	70.7	118	21	5.2	132	614	2731	6.71	170.4	0.437	11.1	15.4	OT	CG	N
3.656	92.86	73397	14.0	355.6	2.720	69.1	158	28	4.8	121	750	3337	7.26	184.3	0.468	11.9	15.5	OT	CG	N
3.656	92.86	73403	14.0	355.6	2.656	67.5	210	37	4.2	106	876	3896	7.80	198.2	0.500	12.7	15.6	OT	CG	N
3.656	92.86	73409	14.0	355.6	2.594	65.9	272	48	3.8	97	1043	4640	8.36	212.5	0.531	13.5	15.8	OT	CG	N
3.656	92.86	73415	14.0	355.6	2.532	64.3	349	61	3.5	88	1214	5398	8.92	226.6	0.562	14.3	15.9	OT	CG	N
3.656	92.86	73421	14.0	355.6	2.470	62.7	454	80	3.1	78	1389	6178	9.27	235.3	0.593	15.1	15.6	OT	CG	N
3.656	92.86	73368	16.0	406.4	2.932	74.5	47	8.2	7.9	201	371	1649	6.07	154.1	0.362	9.2	16.8	OT	CG	N
3.656	92.86	73374	16.0	406.4	2.906	73.8	56	9.7	7.4	188	411	1829	6.19	157.2	0.375	9.5	16.5	OT	CG	N
3.656	92.86	73380	16.0	406.4	2.870	72.9	68	12	6.8	173	461	2050	6.53	165.9	0.393	10.0	16.6	OT	CG	N
3.656	92.86	73386	16.0	406.4	2.844	72.2	78	14	6.5	166	507	2256	6.75	171.4	0.406	10.3	16.6	OT	CG	N
3.656	92.86	73392	16.0	406.4	2.782	70.7	102	18	6.0	153	614	2731	7.61	193.2	0.437	11.1	17.4	OT	CG	N
3.656	92.86	73398	16.0	406.4	2.720	69.1	136	24	5.5	140	750	3337	8.24	209.3	0.468	11.9	17.6	OT	CG	N
3.656	92.86	73404	16.0	406.4	2.656	67.5	182	32	4.8	123	876	3896	8.87	225.4	0.500	12.7	17.7	OT	CG	N
3.656	92.86	73410	16.0	406.4	2.594	65.9	236	41	4.4	112	1043	4640	9.48	240.7	0.531	13.5	17.8	OT	CG	N
3.656	92.86	73416	16.0	406.4	2.532	64.3	303	53	4.0	102	1214	5398	10.1	256.9	0.562	14.3	18.0	OT	CG	N
3.656	92.86	73422	16.0	406.4	2.470	62.7	393	69	3.5	90	1389	6178	10.5	267.4	0.593	15.1	17.8	OT	CG	N
3.687	93.65	S-3016	9.38	238.1	3.333	84.7	4.2	.74	7.8	199	33	146	1.55	39.3	0.177	4.5	8.75	SST	CG	N
3.750	95.25	S-1508	3.00	76.2	3.336	84.7	23	4.0	1.9	49	44	195	1.09	27.6	0.207	5.3	4.25	SST	C	N
3.750	95.25	4076	5.50	139.7	3.126	79.4	96	17	2.2	56	212	944	2.03	51.5	0.312	7.9	5.50	SPR	C	Z
3.750	95.25	4051	8.25	209.6	2.000	50.8	5910	1035	.53	13	3140	13967	7.00	177.8	0.875	22.2	8.00	SPR	CG	N
3.750	95.25	4099-C	17.0	431.8	3.130	79.5	36	6.3	5.7	146	208	927	3.41	86.6	0.310	7.9	11.0	HD	CG	Z
3.828	97.23	S-1643	3.50	88.9	3.588	91.1	.72	.13	2.4	61	1.7	7.6	1.11	28.2	0.120	3.0	9.25	SST	CG	N
3.875	98.43	4007	9.50	241.3	3.461	87.9	10	1.8	6.6	168	67	299	1.71	43.4	0.207	5.3	7.25	SPR	C	Z
3.906	99.21	73423	6.00	152.4	3.156	80.2	136	24	2.8	72	386	1718	2.53	64.3	0.375	9.5	6.75	OT	CG	N
3.906	99.21	73429	6.00	152.4	3.120	79.2	171	30	2.5	64	433	1926	2.60	66.1	0.393	10.0	6.63	OT	CG	N
3.906	99.21	73435	6.00	152.4	3.094	78.6	190	33	2.5	64	477	2120	2.76	70.1	0.406	10.3	6.80	OT	CG	N
3.906	99.21	73441	6.00	152.4	3.032	77.0	258	45	2.2	57	577	2568	3.00	76.2	0.437	11.1	6.87	OT	CG	N
3.906	99.21	73447	6.00	152.4	2.970	75.4	339	59	2.1	53	706	3139	3.28	83.3	0.468	11.9	7.01	OT	CG	N
3.906	99.21	73453	6.00	152.4	2.906	73.8	455	80	1.8	46	824	3667	3.50	88.9	0.500	12.7	7.00	OT	CG	N
3.906	99.21	73459	6.00	152.4	2.844	72.2	595	104	1.7	42	982	4370	3.71	94.4	0.531	13.5	7.00	OT	CG	N
3.906	99.21	73465	6.00	152.4	2.782	70.7	767	134	1.5	38	1144	5087	3.93	99.9	0.562	14.3	7.00	OT	CG	N
3.906	99.21	73471	6.00	152.4	2.720	69.1	978	171	1.3	34	1310	5827	4.15	105.4	0.593	15.1	7.00	OT	CG	N
3.906	99.21	73477	6.00	152.4	2.656	67.5	1307	229	1.2	30	1525	6782	4.22	107.2	0.625	15.9	6.75	OT	CG	N
3.906	99.21	73424	8.00	203.2	3.156	80.2	99	17	3.9	99	386	1718	3.20	81.2	0.375	9.5	8.52	OT	CG	N
3.906	99.21	73430	8.00	203.2	3.120	79.2	122	21	3.5	90	433	1926	3.33	84.7	0.393	10.0	8.48	OT	CG	N
3.906	99.21	73436	8.00	203.2	3.094	78.6	136	24	3.5	89	477	2120	3.53	89.7	0.406	10.3	8.70	OT	CG	N
3.906	99.21	73442	8.00	203.2	3.032	77.0	186	33	3.1	79	577	2568	3.82	97.1	0.437	11.1	8.75	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
3.906	99.21	73448	8.00	203.2	2.970	75.4	242	42	2.9	74	706	3139	4.22	107.1	0.468	11.9	9.01	OT	CG	N
3.906	99.21	73454	8.00	203.2	2.906	73.8	325	57	2.5	64	824	3667	4.50	114.2	0.500	12.7	9.00	OT	CG	N
3.906	99.21	73460	8.00	203.2	2.844	72.2	425	74	2.3	59	982	4370	4.78	121.3	0.531	13.5	9.00	OT	CG	N
3.906	99.21	73466	8.00	203.2	2.782	70.7	548	96	2.1	53	1144	5087	5.06	128.4	0.562	14.3	9.00	OT	CG	N
3.906	99.21	73472	8.00	203.2	2.720	69.1	699	122	1.9	48	1310	5827	5.33	135.5	0.593	15.1	8.99	OT	CG	N
3.906	99.21	73478	8.00	203.2	2.656	67.5	920	161	1.7	42	1525	6782	5.47	138.9	0.625	15.9	8.75	OT	CG	N
3.906	99.21	73425	10.0	254.0	3.156	80.2	78	14	5.0	126	386	1718	3.85	97.9	0.375	9.5	10.3	OT	CG	N
3.906	99.21	73431	10.0	254.0	3.120	79.2	96	17	4.5	115	433	1926	4.02	102.2	0.393	10.0	10.2	OT	CG	N
3.906	99.21	73437	10.0	254.0	3.094	78.6	107	19	4.5	113	477	2120	4.27	108.4	0.406	10.3	10.5	OT	CG	N
3.906	99.21	73443	10.0	254.0	3.032	77.0	143	25	4.0	103	577	2568	4.71	119.7	0.437	11.1	10.8	OT	CG	N
3.906	99.21	73449	10.0	254.0	2.970	75.4	189	33	3.7	95	706	3139	5.14	130.5	0.468	11.9	11.0	OT	CG	N
3.906	99.21	73455	10.0	254.0	2.906	73.8	253	44	3.3	83	824	3667	5.49	139.5	0.500	12.7	11.0	OT	CG	N
3.906	99.21	73461	10.0	254.0	2.844	72.2	330	58	3.0	76	982	4370	5.85	148.5	0.531	13.5	11.0	OT	CG	N
3.906	99.21	73467	10.0	254.0	2.782	70.7	420	74	2.7	69	1144	5087	6.26	158.9	0.562	14.3	11.1	OT	CG	N
3.906	99.21	73473	10.0	254.0	2.720	69.1	536	94	2.4	62	1310	5827	6.59	167.5	0.593	15.1	11.1	OT	CG	N
3.906	99.21	73479	10.0	254.0	2.656	67.5	710	124	2.1	55	1525	6782	6.72	170.6	0.625	15.9	10.7	OT	CG	N
3.906	99.21	73426	12.0	304.8	3.156	80.2	65	11	5.9	151	386	1718	4.48	113.7	0.375	9.5	11.9	OT	CG	N
3.906	99.21	73432	12.0	304.8	3.120	79.2	79	14	5.5	139	433	1926	4.72	119.9	0.393	10.0	12.0	OT	CG	N
3.906	99.21	73438	12.0	304.8	3.094	78.6	88	15	5.4	138	477	2120	5.01	127.4	0.406	10.3	12.4	OT	CG	N
3.906	99.21	73444	12.0	304.8	3.032	77.0	120	21	4.8	122	577	2568	5.45	138.4	0.437	11.1	12.5	OT	CG	N
3.906	99.21	73450	12.0	304.8	2.970	75.4	154	27	4.6	116	706	3139	6.09	154.8	0.468	11.9	13.0	OT	CG	N
3.906	99.21	73456	12.0	304.8	2.906	73.8	207	36	4.0	101	824	3667	6.49	164.9	0.500	12.7	13.0	OT	CG	N
3.906	99.21	73462	12.0	304.8	2.844	72.2	270	47	3.6	92	982	4370	6.91	175.5	0.531	13.5	13.0	OT	CG	N
3.906	99.21	73468	12.0	304.8	2.782	70.7	345	60	3.3	84	1144	5087	7.37	187.2	0.562	14.3	13.1	OT	CG	N
3.906	99.21	73474	12.0	304.8	2.720	69.1	439	77	3.0	76	1310	5827	7.79	197.8	0.593	15.1	13.1	OT	CG	N
3.906	99.21	73480	12.0	304.8	2.656	67.5	578	101	2.6	67	1525	6782	7.97	202.3	0.625	15.9	12.7	OT	CG	N
3.906	99.21	73427	14.0	355.6	3.156	80.2	54	9.5	7.2	182	386	1718	5.23	132.9	0.375	9.5	14.0	OT	CG	N
3.906	99.21	73433	14.0	355.6	3.120	79.2	66	12	6.6	167	433	1926	5.50	139.6	0.393	10.0	14.0	OT	CG	N
3.906	99.21	73439	14.0	355.6	3.094	78.6	74	13	6.4	164	477	2120	5.81	147.6	0.406	10.3	14.3	OT	CG	N
3.906	99.21	73445	14.0	355.6	3.032	77.0	100	18	5.8	147	577	2568	6.36	161.6	0.437	11.1	14.6	OT	CG	N
3.906	99.21	73451	14.0	355.6	2.970	75.4	131	23	5.4	137	706	3139	7.00	177.8	0.468	11.9	15.0	OT	CG	N
3.906	99.21	73457	14.0	355.6	2.906	73.8	175	31	4.7	120	824	3667	7.50	190.4	0.500	12.7	15.0	OT	CG	N
3.906	99.21	73463	14.0	355.6	2.844	72.2	229	40	4.3	109	982	4370	7.96	202.1	0.531	13.5	15.0	OT	CG	N
3.906	99.21	73469	14.0	355.6	2.782	70.7	289	51	4.0	101	1144	5087	8.58	218.0	0.562	14.3	15.3	OT	CG	N
3.906	99.21	73475	14.0	355.6	2.720	69.1	369	65	3.6	90	1310	5827	9.04	229.7	0.593	15.1	15.2	OT	CG	N
3.906	99.21	73481	14.0	355.6	2.656	67.5	487	85	3.1	80	1525	6782	9.22	234.2	0.625	15.9	14.8	OT	CG	N
3.906	99.21	73428	16.0	406.4	3.156	80.2	47	8.2	8.2	209	386	1718	5.90	149.9	0.375	9.5	15.7	OT	CG	N
3.906	99.21	73434	16.0	406.4	3.120	79.2	57	10	7.6	193	433	1926	6.24	158.5	0.393	10.0	15.9	OT	CG	N
3.906	99.21	73440	16.0	406.4	3.094	78.6	64	11	7.4	189	477	2120	6.59	167.4	0.406	10.3	16.2	OT	CG	N
3.906	99.21	73446	16.0	406.4	3.032	77.0	87	15	6.6	169	577	2568	7.18	182.4	0.437	11.1	16.4	OT	CG	N
3.906	99.21	73452	16.0	406.4	2.970	75.4	113	20	6.2	159	706	3139	7.96	202.3	0.468	11.9	17.0	OT	CG	N
3.906	99.21	73458	16.0	406.4	2.906	73.8	152	27	5.4	138	824	3667	8.48	215.4	0.500	12.7	17.0	OT	CG	N
3.906	99.21	73464	16.0	406.4	2.844	72.2	198	35	5.0	126	982	4370	9.03	229.5	0.531	13.5	17.0	OT	CG	N
3.906	99.21	73470	16.0	406.4	2.782	70.7	251	44	4.6	116	1144	5087	9.71	246.6	0.562	14.3	17.3	OT	CG	N
3.906	99.21	73476	16.0	406.4	2.720	69.1	321	56	4.1	104	1310	5827	10.2	259.5	0.593	15.1	17.2	OT	CG	N
3.906	99.21	73482	16.0	406.4	2.656	67.5	421	74	3.6	92	1525	6782	10.5	265.9	0.625	15.9	16.8	OT	CG	N
3.968	100.79	S-1596	3.50	88.9	3.728	94.7	.41	.07	1.9	49	.80	3.5	1.56	39.6	0.120	3.0	13.0	SST	CG	N
4.000	101.60	4052	4.25	108.0	2.000	50.8	26620	4662	.14	3.5	3645	16214	4.00	101.6	1.000	25.4	4.00	HD	CG	N
4.000	101.60	4030	6.00	152.4	3.338	84.8	116	20	2.0	52	238	1057	1.66	42.0	0.331	8.4	5.00	SPR	CG	Z
4.000	101.60	4082	6.25	158.8	2.812	71.4	2265	397	.51	13	1145	5095	2.38	60.4	0.594	15.1	4.00	HD	CG	N
4.000	101.60	4020	6.25	158.8	2.750	69.9	1201	210	1.1	28	1327	5903	4.22	107.2	0.625	15.9	6.75	SPR	CG	N
4.000	101.60	4048	10.0	254.0	2.500	63.5	2208	387	.88	22	1939	8625	6.00	152.4	0.750	19.1	8.00	SPR	CG	N
4.125	104.78	4406	4.00	101.6	3.713	94.3	17	3.0	3.1	78	52	231	.92	23.4	0.206	5.2	4.50	SPR	CG	Z
4.125	104.78	11302	4.00	101.6	3.375	85.7	127	22	1.7	42	210	934	2.34	59.5	0.375	9.5	6.25	SPR	CG	N
4.156	105.56	73483	6.00	152.4	3.406	86.5	124	22	2.9	75	364	1620	2.34	59.6	0.375	9.5	6.25	OT	CG	N
4.156	105.56	73489	6.00	152.4	3.370	85.6	151	27	2.7	69	408	1816	2.46	62.4	0.393	10.0	6.25	OT	CG	N
4.156	105.56	73495	6.00	152.4	3.344	84.9	165	29	2.7	69	449	1999	2.64	67.1	0.406	10.3	6.50	OT	CG	N
4.156	105.56	73501	6.00	152.4	3.282	83.4	227	40	2.4	61	545	2423	2.84	72.1	0.437	11.1	6.50	OT	CG	N
4.156	105.56	73507	6.00	152.4	3.220	81.8	306	53	2.2	55	666	2963	3.04	77.3	0.468	11.9	6.50	OT	CG	N
4.156	105.56	73513	6.00	152.4	3.156	80.2	387	68	2.0	51	778	3463	3.38	85.7	0.500	12.7	6.75	OT	CG	N
4.156	105.56	73519	6.00	152.4	3.094	78.6	533	93	1.7	44	928	4129	3.45	87.7	0.531	13.5	6.50	OT	CG	N
4.156	105.56	73525	6.00	152.4	3.032	77.0	686	120	1.6	40	1081	4809	3.65	92.8	0.562	14.3	6.50	OT	CG	N
4.156	105.56	73531	6.00	152.4	2.970	75.4	873	153	1.4	36	1239	5511	3.85	97.9	0.593	15.1	6.50	OT	CG	N
4.156	105.56	73484	8.00	203.2	3.406	86.5	91	16	4.0	102	364	1620	2.92	74.3	0.375	9.5	7.80	OT	CG	N
4.156	105.56	73490	8.00	203.2	3.370	85.6	110	19	3.7	95	408	1816	3.10	78.6	0.393	10.0	7.88	OT	CG	N
4.156	105.56	73496	8.00	203.2	3.344	84.9	119	21	3.8	96	449	1999	3.35	85.1	0.406	10.3	8.25	OT	CG	N
4.156	105.56	73502	8.00	203.2	3.282	83.4	163	29	3.3	85	545	2423	3.61	91.6	0.437	11.1	8.25	OT	CG	N
4.156	105.56	73508	8.00	203.2	3.220	81.8	220	39	3.0	77	666	2963	3.86	98.1	0.468	11.9	8.25	OT	CG	N
4.156	105.56	73514	8.00	203.2	3.156	80.2	278	49	2.8	71	778	3463	4.31	109.5	0.500	12.7	8.63	OT	CG	N
4.156	105.56	73520	8.00	203.2	3.094	78.6	380	67	2.4	62	928	4129	4.41	112.1	0.531	13.5	8.31	OT	CG	N
4.156	105.56	73526	8.00	203.2	3.032	77.0	485	85	2.2	57	1081	4809	4.71	119.6	0.562	14.3	8.38	OT	CG	N
4.156	105.56	73532	8.00	203.2	2.970	75.4	616	108	2.0	51	1239	5511	4.97	126.2	0.593	15.1	8.38	OT	CG	N
4.156	105.56	73485	10.0	254.0	3.406	86.5	70	12	5.2	132	364	1620	3.56	90.5	0.375	9.5	9.50	OT	CG	N
4.156	105.56	73491	10.0	254.0	3.370	85.6	86	15	4.8	121	408	1816	3.73	94.8	0.393	10.0	9.50	OT	CG	N
4.156	105.56	4099-F	10.0	254.0	3.344	84.9	129	23	3.1	79	400	1777	3.15	79.9	0.406	10.3	7.75	SPR	CG	N
4.156	105.56	73497	10.0	254.0	3.344	84.9	93	16	4.9	123	449	1999	4.06	103.1	0.406	10.3	10.0	OT	CG	N
4.156	105.56	73503	10.0	254.0	3.282	83.4	127	22	4.3	109	545	2423	4.37	111.0	0.437	11.1	10.0	OT	CG	N
4.156	105.56	73509	10.0	254.0	3.220	81.8	172	30	3.9	98	666	2963	4.68	118.9	0.468	11.9	10.0	OT	CG	N
4.156	105.56	73515	10.0	254.0	3.156	80.2	216	38	3.6	91	778	3463	5.25	133.4	0.500	12.7	10.5	OT	CG	N
4.156	105.56	73521	10.0	254.0	3.094	78.6	295	52	3.1	80	928	4129	5.38	136.6	0.531	13.5	10.1	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
4.156	105.56	73527	10.0	254.0	3.032	77.0	377	66	2.9	73	1081	4809	5.73	145.6	0.562	14.3	10.2	OT	CG	N
4.156	105.56	73533	10.0	254.0	2.970	75.4	476	83	2.6	66	1239	5511	6.08	154.4	0.593	15.1	10.3	OT	CG	N
4.156	105.56	73486	12.0	304.8	3.406	86.5	58	10	6.3	161	364	1620	4.17	106.0	0.375	9.5	11.1	OT	CG	N
4.156	105.56	73492	12.0	304.8	3.370	85.6	71	12	5.8	147	408	1816	4.37	111.1	0.393	10.0	11.1	OT	CG	N
4.156	105.56	73498	12.0	304.8	3.344	84.9	76	13	5.9	150	449	1999	4.77	121.1	0.406	10.3	11.7	OT	CG	N
4.156	105.56	73504	12.0	304.8	3.282	83.4	105	18	5.2	132	545	2423	5.14	130.5	0.437	11.1	11.8	OT	CG	N
4.156	105.56	73510	12.0	304.8	3.220	81.8	141	25	4.7	120	666	2963	5.50	139.7	0.468	11.9	11.8	OT	CG	N
4.156	105.56	73516	12.0	304.8	3.156	80.2	175	31	4.4	113	778	3463	6.25	158.8	0.500	12.7	12.5	OT	CG	N
4.156	105.56	73522	12.0	304.8	3.094	78.6	240	42	3.9	98	928	4129	6.37	161.8	0.531	13.5	12.0	OT	CG	N
4.156	105.56	73528	12.0	304.8	3.032	77.0	309	54	3.5	89	1081	4809	6.74	171.3	0.562	14.3	12.0	OT	CG	N
4.156	105.56	73534	12.0	304.8	2.970	75.4	388	68	3.2	81	1239	5511	7.19	182.6	0.593	15.1	12.1	OT	CG	N
4.156	105.56	73487	14.0	355.6	3.406	86.5	49	8.6	7.4	189	364	1620	4.78	121.5	0.375	9.5	12.8	OT	CG	N
4.156	105.56	73493	14.0	355.6	3.370	85.6	60	10	6.8	173	408	1816	5.02	127.4	0.393	10.0	12.8	OT	CG	N
4.156	105.56	73499	14.0	355.6	3.344	84.9	65	11	6.9	175	449	1999	5.43	137.9	0.406	10.3	13.4	OT	CG	N
4.156	105.56	73505	14.0	355.6	3.282	83.4	89	16	6.1	156	545	2423	5.90	149.9	0.437	11.1	13.5	OT	CG	N
4.156	105.56	73511	14.0	355.6	3.220	81.8	120	21	5.6	142	666	2963	6.32	160.5	0.468	11.9	13.5	OT	CG	N
4.156	105.56	73517	14.0	355.6	3.156	80.2	150	26	5.2	132	778	3463	7.12	181.0	0.500	12.7	14.2	OT	CG	N
4.156	105.56	73523	14.0	355.6	3.094	78.6	204	36	4.5	115	928	4129	7.30	185.4	0.531	13.5	13.7	OT	CG	N
4.156	105.56	73529	14.0	355.6	3.032	77.0	260	46	4.2	106	1081	4809	7.80	198.1	0.562	14.3	13.9	OT	CG	N
4.156	105.56	73535	14.0	355.6	2.970	75.4	328	57	3.8	96	1239	5511	8.30	210.9	0.593	15.1	14.0	OT	CG	N
4.156	105.56	73488	16.0	406.4	3.406	86.5	43	7.5	8.5	216	364	1620	5.35	135.8	0.375	9.5	14.3	OT	CG	N
4.156	105.56	73494	16.0	406.4	3.370	85.6	52	9.0	7.9	201	408	1816	5.70	144.7	0.393	10.0	14.5	OT	CG	N
4.156	105.56	73500	16.0	406.4	3.344	84.9	56	9.9	8.0	202	449	1999	6.14	156.0	0.406	10.3	15.1	OT	CG	N
4.156	105.56	73506	16.0	406.4	3.282	83.4	77	13	7.1	180	545	2423	6.67	169.3	0.437	11.1	15.3	OT	CG	N
4.156	105.56	73512	16.0	406.4	3.220	81.8	104	18	6.4	163	666	2963	7.14	181.4	0.468	11.9	15.3	OT	CG	N
4.156	105.56	73518	16.0	406.4	3.156	80.2	129	23	6.0	153	778	3463	8.13	206.4	0.500	12.7	16.3	OT	CG	N
4.156	105.56	73524	16.0	406.4	3.094	78.6	176	31	5.3	134	928	4129	8.28	210.4	0.531	13.5	15.6	OT	CG	N
4.156	105.56	73530	16.0	406.4	3.032	77.0	225	39	4.8	122	1081	4809	8.85	224.9	0.562	14.3	15.8	OT	CG	N
4.156	105.56	73536	16.0	406.4	2.970	75.4	283	50	4.4	111	1239	5511	9.42	239.1	0.593	15.1	15.9	OT	CG	N
4.250	107.95	4021	10.8	273.1	2.250	57.2	6979	1222	.50	13	3492	15531	8.00	203.2	1.000	25.4	8.00	SPR	CG	N
4.375	111.13	4022	8.00	203.2	2.499	63.5	6091	1067	.47	12	2863	12733	6.10	154.9	0.938	23.8	6.50	SPR	CG	N
4.406	111.91	73537	6.00	152.4	3.532	89.7	197	34	2.6	66	515	2293	2.73	69.4	0.437	11.1	6.26	OT	CG	N
4.406	111.91	73543	6.00	152.4	3.470	88.1	266	47	2.4	60	631	2805	2.92	74.2	0.468	11.9	6.25	OT	CG	N
4.406	111.91	73549	6.00	152.4	3.406	86.5	355	62	2.1	53	737	3280	3.12	79.3	0.500	12.7	6.25	OT	CG	N
4.406	111.91	73555	6.00	152.4	3.344	84.9	462	81	1.9	48	879	3912	3.32	84.3	0.531	13.5	6.25	OT	CG	N
4.406	111.91	73561	6.00	152.4	3.282	83.4	594	104	1.7	44	1025	4558	3.51	89.2	0.562	14.3	6.25	OT	CG	N
4.406	111.91	73567	6.00	152.4	3.220	81.8	754	132	1.6	40	1175	5226	3.71	94.2	0.593	15.1	6.25	OT	CG	N
4.406	111.91	73573	6.00	152.4	3.156	80.2	955	167	1.4	36	1369	6089	3.91	99.2	0.625	15.9	6.25	OT	CG	N
4.406	111.91	73538	8.00	203.2	3.532	89.7	143	25	3.6	92	515	2293	3.44	87.3	0.437	11.1	7.86	OT	CG	N
4.406	111.91	73544	8.00	203.2	3.470	88.1	188	33	3.4	85	631	2805	3.75	95.2	0.468	11.9	8.01	OT	CG	N
4.406	111.91	73550	8.00	203.2	3.406	86.5	251	44	2.9	75	737	3280	4.00	101.7	0.500	12.7	8.01	OT	CG	N
4.406	111.91	73556	8.00	203.2	3.344	84.9	327	57	2.7	68	879	3912	4.25	108.0	0.531	13.5	8.01	OT	CG	N
4.406	111.91	73562	8.00	203.2	3.282	83.4	421	74	2.4	62	1025	4558	4.49	114.2	0.562	14.3	8.00	OT	CG	N
4.406	111.91	73568	8.00	203.2	3.220	81.8	534	94	2.2	56	1175	5226	4.75	120.6	0.593	15.1	8.01	OT	CG	N
4.406	111.91	73574	8.00	203.2	3.156	80.2	676	118	2.0	51	1369	6089	5.00	127.0	0.625	15.9	8.00	OT	CG	N
4.406	111.91	73539	10.0	254.0	3.532	89.7	112	20	4.6	117	515	2293	4.15	105.3	0.437	11.1	9.49	OT	CG	N
4.406	111.91	73545	10.0	254.0	3.470	88.1	146	26	4.3	110	631	2805	4.56	115.7	0.468	11.9	9.73	OT	CG	N
4.406	111.91	73551	10.0	254.0	3.406	86.5	195	34	3.8	96	737	3280	4.87	123.6	0.500	12.7	9.73	OT	CG	N
4.406	111.91	73557	10.0	254.0	3.344	84.9	253	44	3.5	88	879	3912	5.18	131.7	0.531	13.5	9.76	OT	CG	N
4.406	111.91	73563	10.0	254.0	3.282	83.4	326	57	3.1	80	1025	4558	5.48	139.1	0.562	14.3	9.74	OT	CG	N
4.406	111.91	73569	10.0	254.0	3.220	81.8	414	72	2.8	72	1175	5226	5.78	146.8	0.593	15.1	9.75	OT	CG	N
4.406	111.91	73575	10.0	254.0	3.156	80.2	524	92	2.6	66	1369	6089	6.09	154.7	0.625	15.9	9.74	OT	CG	N
4.406	111.91	73540	12.0	304.8	3.532	89.7	93	16	5.5	141	515	2293	4.81	122.3	0.437	11.1	11.0	OT	CG	N
4.406	111.91	73546	12.0	304.8	3.470	88.1	122	21	5.2	131	631	2805	5.27	133.8	0.468	11.9	11.3	OT	CG	N
4.406	111.91	73552	12.0	304.8	3.406	86.5	159	28	4.6	118	737	3280	5.74	145.8	0.500	12.7	11.5	OT	CG	N
4.406	111.91	73558	12.0	304.8	3.344	84.9	210	37	4.2	106	879	3912	6.03	153.1	0.531	13.5	11.4	OT	CG	N
4.406	111.91	73564	12.0	304.8	3.282	83.4	266	47	3.9	98	1025	4558	6.46	164.0	0.562	14.3	11.5	OT	CG	N
4.406	111.91	73570	12.0	304.8	3.220	81.8	338	59	3.5	88	1175	5226	6.81	173.0	0.593	15.1	11.5	OT	CG	N
4.406	111.91	73576	12.0	304.8	3.156	80.2	422	74	3.2	82	1369	6089	7.26	184.4	0.625	15.9	11.6	OT	CG	N
4.406	111.91	73541	14.0	355.6	3.532	89.7	78	14	6.6	168	515	2293	5.57	141.5	0.437	11.1	12.8	OT	CG	N
4.406	111.91	73547	14.0	355.6	3.470	88.1	103	18	6.1	156	631	2805	6.07	154.1	0.468	11.9	13.0	OT	CG	N
4.406	111.91	73553	14.0	355.6	3.406	86.5	136	24	5.4	138	737	3280	6.54	166.2	0.500	12.7	13.1	OT	CG	N
4.406	111.91	73559	14.0	355.6	3.344	84.9	175	31	5.0	128	879	3912	7.02	178.4	0.531	13.5	13.2	OT	CG	N
4.406	111.91	73565	14.0	355.6	3.282	83.4	224	39	4.6	116	1025	4558	7.46	189.4	0.562	14.3	13.3	OT	CG	N
4.406	111.91	73571	14.0	355.6	3.220	81.8	285	50	4.1	105	1175	5226	7.86	199.6	0.593	15.1	13.3	OT	CG	N
4.406	111.91	73577	14.0	355.6	3.156	80.2	353	62	3.9	99	1369	6089	8.44	214.2	0.625	15.9	13.5	OT	CG	N
4.406	111.91	73542	16.0	406.4	3.532	89.7	67	12	7.7	195	515	2293	6.34	161.1	0.437	11.1	14.5	OT	CG	N
4.406	111.91	73548	16.0	406.4	3.470	88.1	89	16	7.1	180	631	2805	6.87	174.6	0.468	11.9	14.7	OT	CG	N
4.406	111.91	73554	16.0	406.4	3.406	86.5	118	21	6.2	159	737	3280	7.39	187.7	0.500	12.7	14.8	OT	CG	N
4.406	111.91	73560	16.0	406.4	3.344	84.9	151	26	5.8	148	879	3912	7.97	202.4	0.531	13.5	15.0	OT	CG	N
4.406	111.91	73566	16.0	406.4	3.282	83.4	194	34	5.3	134	1025	4558	8.44	214.3	0.562	14.3	15.0	OT	CG	N
4.406	111.91	73572	16.0	406.4	3.220	81.8	246	43	4.8	121	1175	5226	8.92	226.4	0.593	15.1	15.0	OT	CG	N
4.406	111.91	73578	16.0	406.4	3.156	80.2	306	54	4.5	114	1369	6089	9.54	242.3	0.625	15.9	15.3	OT	CG	N
4.500	114.30	4023	4.00	101.6	3.250	82.6	1675	293	.71	18	1194	5310	2.66	67.5	0.625	15.9	4.25	SPR	CG	Z
4.500	114.30	4041	6.00	152.4	3.376	85.8	522	91	1.7	43	893	3973	3.65	92.8	0.562	14.3	6.50	SPR	CG	Z
4.500	114.30	4046	6.50	165.1	3.564	90.5	263	46	2.1	53	550	2444	2.81	71.3	0.468	11.9	6.00	SPR	CG	Z
4.500	114.30	10940	9.00	228.6	3.820	97.0	63	11	3.6	91	225	999	2.13	54.0	0.340	8.6	6.25	SPR	CG	N
4.500	114.30	4087	10.5	266.7	2.500	63.5	5588	979	.82	21	4580	20380	8.00	203.2	1.000	25.4	8.00	HD	CG	N
4.687	119.05	4079	6.00	152.4	4.187	106.3	21	3.8	4.4	112	94	419	1.25	31.8	0.250	6.4	5.00	SPR	CG	N
4.687	119.05	73579	6.00	152.4	3.901	99.1	124	22	2.9	75	364	1620	2.16	54.9	0.393	10.0	5.50	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com




O.D. Inches	O.D. mm	CENTURY STOCK NUMBER	FREE LENGTH Inches	FREE LENGTH mm	I.D. Inches	I.D. mm	RATE Lbs./In.	RATE N/mm	SUGG. MAX. DEFL. Inches	SUGG. MAX. DEFL. mm	SUGG. MAX. LOAD Lbs.	SUGG. MAX. LOAD N	SOLID LENGTH Inches	SOLID LENGTH mm	WIRE DIA. Inches	WIRE DIA. mm	TOTAL COILS	MAT'L	ENDS	FNSH
4.687	119.05	73585	6.00	152.4	3.875	98.4	137	24	2.9	74	401	1783	2.28	58.0	0.406	10.3	5.63	OT	CG	N
4.687	119.05	73591	6.00	152.4	3.813	96.9	182	32	2.7	68	486	2162	2.51	63.8	0.437	11.1	5.75	OT	CG	N
4.687	119.05	73597	6.00	152.4	3.751	95.3	245	43	2.4	62	595	2646	2.69	68.4	0.468	11.9	5.75	OT	CG	N
4.687	119.05	73603	6.00	152.4	3.687	93.6	326	57	2.1	54	696	3095	2.88	73.0	0.500	12.7	5.75	OT	CG	N
4.687	119.05	73609	6.00	152.4	3.625	92.1	398	70	2.1	53	830	3693	3.19	80.9	0.531	13.5	6.00	OT	CG	N
4.687	119.05	73615	6.00	152.4	3.563	90.5	511	89	1.9	48	968	4305	3.37	85.7	0.562	14.3	6.00	OT	CG	N
4.687	119.05	73621	6.00	152.4	3.501	88.9	648	113	1.7	44	1110	4938	3.56	90.4	0.593	15.1	6.00	OT	CG	N
4.687	119.05	73627	6.00	152.4	3.437	87.3	818	143	1.6	40	1294	5756	3.75	95.3	0.625	15.9	6.00	OT	CG	N
4.687	119.05	73580	8.00	203.2	3.901	99.1	89	16	4.1	104	364	1620	2.70	68.6	0.393	10.0	6.88	OT	CG	N
4.687	119.05	73586	8.00	203.2	3.875	98.4	100	17	4.0	102	401	1783	2.84	72.2	0.406	10.3	7.00	OT	CG	N
4.687	119.05	73592	8.00	203.2	3.813	96.9	130	23	3.7	95	486	2162	3.17	80.5	0.437	11.1	7.25	OT	CG	N
4.687	119.05	73598	8.00	203.2	3.751	95.3	175	31	3.4	86	595	2646	3.39	86.2	0.468	11.9	7.25	OT	CG	N
4.687	119.05	73604	8.00	203.2	3.687	93.6	233	41	3.0	76	696	3095	3.63	92.1	0.500	12.7	7.25	OT	CG	N
4.687	119.05	73610	8.00	203.2	3.625	92.1	283	50	2.9	75	830	3693	4.05	102.9	0.531	13.5	7.63	OT	CG	N
4.687	119.05	73616	8.00	203.2	3.563	90.5	363	64	2.7	68	968	4305	4.29	108.8	0.562	14.3	7.63	OT	CG	N
4.687	119.05	73622	8.00	203.2	3.501	88.9	461	81	2.4	61	1110	4938	4.52	114.8	0.593	15.1	7.63	OT	CG	N
4.687	119.05	73628	8.00	203.2	3.437	87.3	574	101	2.3	57	1294	5756	4.81	122.2	0.625	15.9	7.70	OT	CG	N
4.687	119.05	73581	10.0	254.0	3.901	99.1	69	12	5.3	133	364	1620	3.24	82.4	0.393	10.0	8.25	OT	CG	N
4.687	119.05	73587	10.0	254.0	3.875	98.4	78	14	5.1	130	401	1783	3.40	86.4	0.406	10.3	8.37	OT	CG	N
4.687	119.05	73593	10.0	254.0	3.813	96.9	101	18	4.8	122	486	2162	3.82	97.1	0.437	11.1	8.75	OT	CG	N
4.687	119.05	73599	10.0	254.0	3.751	95.3	136	24	4.4	111	595	2646	4.10	104.0	0.468	11.9	8.75	OT	CG	N
4.687	119.05	73605	10.0	254.0	3.687	93.6	181	32	3.8	97	696	3095	4.38	111.1	0.500	12.7	8.75	OT	CG	N
4.687	119.05	73611	10.0	254.0	3.625	92.1	220	38	3.8	96	830	3693	4.91	124.8	0.531	13.5	9.25	OT	CG	N
4.687	119.05	73617	10.0	254.0	3.563	90.5	282	49	3.4	87	968	4305	5.20	132.0	0.562	14.3	9.25	OT	CG	N
4.687	119.05	73623	10.0	254.0	3.501	88.9	351	62	3.2	80	1110	4938	5.56	141.2	0.593	15.1	9.38	OT	CG	N
4.687	119.05	73629	10.0	254.0	3.437	87.3	444	78	2.9	74	1294	5756	5.86	148.8	0.625	15.9	9.38	OT	CG	N
4.687	119.05	73582	12.0	304.8	3.901	99.1	58	10	6.3	160	364	1620	3.74	94.9	0.393	10.0	9.51	OT	CG	N
4.687	119.05	73588	12.0	304.8	3.875	98.4	64	11	6.2	159	401	1783	3.96	100.6	0.406	10.3	9.75	OT	CG	N
4.687	119.05	73594	12.0	304.8	3.813	96.9	83	14	5.9	149	486	2162	4.48	113.8	0.437	11.1	10.2	OT	CG	N
4.687	119.05	73600	12.0	304.8	3.751	95.3	111	19	5.3	136	595	2646	4.80	121.8	0.468	11.9	10.3	OT	CG	N
4.687	119.05	73606	12.0	304.8	3.687	93.6	148	26	4.7	119	696	3095	5.12	130.1	0.500	12.7	10.2	OT	CG	N
4.687	119.05	73612	12.0	304.8	3.625	92.1	179	31	4.6	118	830	3693	5.77	146.7	0.531	13.5	10.9	OT	CG	N
4.687	119.05	73618	12.0	304.8	3.563	90.5	230	40	4.2	107	968	4305	6.11	155.2	0.562	14.3	10.9	OT	CG	N
4.687	119.05	73624	12.0	304.8	3.501	88.9	288	50	3.9	98	1110	4938	6.52	165.7	0.593	15.1	11.0	OT	CG	N
4.687	119.05	73630	12.0	304.8	3.437	87.3	362	63	3.6	91	1294	5756	6.91	175.4	0.625	15.9	11.1	OT	CG	N
4.687	119.05	73583	14.0	355.6	3.901	99.1	49	8.5	7.5	190	364	1620	4.27	108.6	0.393	10.0	10.9	OT	CG	N
4.687	119.05	73589	14.0	355.6	3.875	98.4	54	9.4	7.5	189	401	1783	4.57	116.0	0.406	10.3	11.3	OT	CG	N
4.687	119.05	73595	14.0	355.6	3.813	96.9	70	12	6.9	176	486	2162	5.14	130.5	0.437	11.1	11.8	OT	CG	N
4.687	119.05	73601	14.0	355.6	3.751	95.3	94	16	6.3	160	595	2646	5.50	139.7	0.468	11.9	11.7	OT	CG	N
4.687	119.05	73607	14.0	355.6	3.687	93.6	126	22	5.5	141	696	3095	5.88	149.3	0.500	12.7	11.8	OT	CG	N
4.687	119.05	73613	14.0	355.6	3.625	92.1	152	27	5.5	139	830	3693	6.64	168.6	0.531	13.5	12.5	OT	CG	N
4.687	119.05	73619	14.0	355.6	3.563	90.5	195	34	5.0	126	968	4305	7.02	178.4	0.562	14.3	12.5	OT	CG	N
4.687	119.05	73625	14.0	355.6	3.501	88.9	244	43	4.6	116	1110	4938	7.49	190.2	0.593	15.1	12.6	OT	CG	N
4.687	119.05	73631	14.0	355.6	3.437	87.3	304	53	4.3	108	1294	5756	7.97	202.4	0.625	15.9	12.8	OT	CG	N
4.687	119.05	73584	16.0	406.4	3.901	99.1	42	7.4	8.6	219	364	1620	4.81	122.2	0.393	10.0	12.2	OT	CG	N
4.687	119.05	73590	16.0	406.4	3.875	98.4	47	8.3	8.5	215	401	1783	5.08	128.9	0.406	10.3	12.5	OT	CG	N
4.687	119.05	73596	16.0	406.4	3.813	96.9	61	11	8.0	203	486	2162	5.79	147.1	0.437	11.1	13.3	OT	CG	N
4.687	119.05	73602	16.0	406.4	3.751	95.3	82	14	7.3	185	595	2646	6.20	157.5	0.468	11.9	13.3	OT	CG	N
4.687	119.05	73608	16.0	406.4	3.687	93.6	109	19	6.4	162	696	3095	6.63	168.3	0.500	12.7	13.3	OT	CG	N
4.687	119.05	73614	16.0	406.4	3.625	92.1	131	23	6.3	161	830	3693	7.50	190.5	0.531	13.5	14.1	OT	CG	N
4.687	119.05	73620	16.0	406.4	3.563	90.5	169	30	5.7	146	968	4305	7.94	201.6	0.562	14.3	14.1	OT	CG	N
4.687	119.05	73626	16.0	406.4	3.501	88.9	209	37	5.3	135	1110	4938	8.53	216.5	0.593	15.1	14.4	OT	CG	N
4.687	119.05	73632	16.0	406.4	3.437	87.3	263	46	4.9	125	1294	5756	9.03	229.4	0.625	15.9	14.4	OT	CG	N
4.750	120.65	4049	5.50	139.7	3.814	96.9	251	44	2.1	53	522	2323	2.57	65.4	0.468	11.9	5.50	SPR	CG	Z
4.875	123.83	4043	5.75	146.1	4.251	108.0	41	7.2	3.7	95	152	678	2.03	51.5	0.312	7.9	5.50	SPR	C	N
4.906	124.61	73633	6.00	152.4	3.970	100.8	210	37	2.7	69	570	2534	2.69	68.4	0.468	11.9	5.76	OT	CG	N
4.906	124.61	73639	6.00	152.4	3.906	99.2	280	49	2.4	60	667	2965	2.88	73.0	0.500	12.7	5.75	OT	CG	N
4.906	124.61	73645	6.00	152.4	3.844	97.6	364	64	2.2	56	796	3539	3.05	77.5	0.531	13.5	5.75	OT	CG	N
4.906	124.61	73651	6.00	152.4	3.782	96.1	466	82	2.0	51	928	4126	3.23	82.1	0.562	14.3	5.75	OT	CG	N
4.906	124.61	73657	6.00	152.4	3.720	94.5	591	103	1.8	46	1064	4734	3.41	86.6	0.593	15.1	5.75	OT	CG	N
4.906	124.61	73663	6.00	152.4	3.656	92.9	746	131	1.7	42	1241	5520	3.59	91.2	0.625	15.9	5.75	OT	CG	N
4.906	124.61	73634	8.00	203.2	3.970	100.8	150	26	3.8	96	570	2534	3.40	86.3	0.468	11.9	7.26	OT	CG	N
4.906	124.61	73640	8.00	203.2	3.906	99.2	200	35	3.3	85	667	2965	3.63	92.1	0.500	12.7	7.25	OT	CG	N
4.906	124.61	73646	8.00	203.2	3.844	97.6	260	46	3.1	78	796	3539	3.85	97.8	0.531	13.5	7.25	OT	CG	N
4.906	124.61	73652	8.00	203.2	3.782	96.1	333	58	2.8	71	928	4126	4.08	103.5	0.562	14.3	7.25	OT	CG	N
4.906	124.61	73658	8.00	203.2	3.720	94.5	422	74	2.5	64	1064	4734	4.30	109.2	0.593	15.1	7.25	OT	CG	N
4.906	124.61	73664	8.00	203.2	3.656	92.9	520	91	2.4	61	1241	5520	4.61	117.1	0.625	15.9	7.38	OT	CG	N
4.906	124.61	73635	10.0	254.0	3.970	100.8	117	20	4.9	124	570	2534	4.09	103.9	0.468	11.9	8.74	OT	CG	N
4.906	124.61	73641	10.0	254.0	3.906	99.2	156	27	4.3	109	667	2965	4.37	110.9	0.500	12.7	8.73	OT	CG	N
4.906	124.61	73647	10.0	254.0	3.844	97.6	202	35	3.9	100	796	3539	4.65	118.1	0.531	13.5	8.76	OT	CG	N
4.906	124.61	73653	10.0	254.0	3.782	96.1	250	44	3.7	94	928	4126	5.06	128.4	0.562	14.3	9.00	OT	CG	N
4.906	124.61	73659	10.0	254.0	3.720	94.5	328	57	3.2	82	1064	4734	5.19	131.9	0.593	15.1	8.76	OT	CG	N
4.906	124.61	73665	10.0	254.0	3.656	92.9	399	70	3.1	79	1241	5520	5.63	143.0	0.625	15.9	9.01	OT	CG	N
4.906	124.61	73636	12.0	304.8	3.970	100.8	96	17	5.9	151	570	2534	4.78	121.5	0.468	11.9	10.2	OT	CG	N
4.906	124.61	73642	12.0	304.8	3.906	99.2	127	22	5.2	133	667	2965	5.14	130.4	0.500	12.7	10.3	OT	CG	N
4.906	124.61	73648	12.0	304.8	3.844	97.6	165	29	4.8	122	796	3539	5.45	138.5	0.531	13.5	10.3	OT	CG	N
4.906	124.61	73654	12.0	304.8	3.782	96.1	206	36	4.5	114	928	4126	5.90	149.8	0.562	14.3	10.5	OT	CG	N
4.906	124.61	73660	12.0	304.8	3.720	94.5	268	47	4.0	101	1064	4734	6.09	154.6	0.593	15.1	10.3	OT	CG	N
4.906	124.61	73666	12.0	304.8	3.656	92.9	329	58	3.8	96	1241	5520	6.56	166.7	0.625	15.9	10.5	OT	CG	N
4.906	124.61	73637	14.0	355.6	3.970	100.8	81	14	7.0	179	570	2534	5.49	139.6	0.468	11.9	11.7	OT	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None



1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

O.D.		CENTURY STOCK NUMBER	FREE LENGTH		I.D.		RATE		SUGG. MAX. DEFL.		SUGG. MAX. LOAD		SOLID LENGTH		WIRE DIA.		TOTAL COILS	MAT'L	ENDS	FNSH
Inches	mm		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Lbs.	N	Inches	mm	Inches	mm				
4.906	124.61	73643	14.0	355.6	3.906	99.2	108	19	6.2	157	667	2965	5.86	148.9	0.500	12.7	11.7	OT	CG	N
4.906	124.61	73649	14.0	355.6	3.844	97.6	140	25	5.7	144	796	3539	6.24	158.4	0.531	13.5	11.7	OT	CG	N
4.906	124.61	73655	14.0	355.6	3.782	96.1	175	31	5.3	135	928	4126	6.74	171.2	0.562	14.3	12.0	OT	CG	N
4.906	124.61	73661	14.0	355.6	3.720	94.5	222	39	4.8	122	1064	4734	7.10	180.4	0.593	15.1	12.0	OT	CG	N
4.906	124.61	73667	14.0	355.6	3.656	92.9	273	48	4.5	115	1241	5520	7.65	194.3	0.625	15.9	12.2	OT	CG	N
4.906	124.61	73638	16.0	406.4	3.970	100.8	70	12	8.1	207	570	2534	6.21	157.7	0.468	11.9	13.3	OT	CG	N
4.906	124.61	73644	16.0	406.4	3.906	99.2	93	16	7.2	182	667	2965	6.65	168.8	0.500	12.7	13.3	OT	CG	N
4.906	124.61	73650	16.0	406.4	3.844	97.6	121	21	6.6	167	796	3539	7.05	179.1	0.531	13.5	13.3	OT	CG	N
4.906	124.61	73656	16.0	406.4	3.782	96.1	152	27	6.1	155	928	4126	7.59	192.8	0.562	14.3	13.5	OT	CG	N
4.906	124.61	73662	16.0	406.4	3.720	94.5	193	34	5.5	140	1064	4734	7.99	203.0	0.593	15.1	13.5	OT	CG	N
4.906	124.61	73668	16.0	406.4	3.656	92.9	238	42	5.2	132	1241	5520	8.59	218.2	0.625	15.9	13.7	OT	CG	N
5.000	127.00	4053	5.00	127.0	3.000	76.2	11230	1967	.4	10	4200	18690	4.00	101.6	1.000	25.4	4.00	HD	CG	N
5.000	127.00	4083	8.00	203.2	3.812	96.8	465	81	2.0	51	934	4155	3.86	98.1	0.594	15.1	6.50	HD	CG	N
5.000	127.00	4031	12.0	304.8	4.000	101.6	123	22	4.7	120	582	2589	5.00	127.0	0.500	12.7	10.0	SPR	CG	N
5.000	127.00	4088	12.0	304.8	3.124	79.3	2767	485	1.3	33	3600	16000	7.50	190.6	0.938	23.8	8.00	HD	CG	N
5.250	133.35	4022-A	4.00	101.6	4.926	125.1	4.1	.73	3.4	87	14	63	.56	14.2	0.162	4.1	3.50	SST	CG	N
5.500	139.70	4036	12.0	304.8	4.438	112.7	162	28	3.9	100	635	2824	4.12	104.5	0.531	13.5	7.75	SPR	CG	N
5.500	139.70	4000-A	18.8	476.3	4.500	114.3	78	14	6.8	174	532	2365	5.63	142.9	0.500	12.7	11.3	SPR	CG	N
5.750	146.05	4097	12.0	304.8	4.000	101.6	1818	318	1.4	36	2550	11350	5.25	133.4	0.875	22.2	6.00	HD	CG	N
6.000	152.40	4034	3.50	88.9	4.626	117.5	2135	374	.6	15	1220	5430	2.06	52.3	0.687	17.4	3.00	SPR	CG	N
6.000	152.40	4094	8.75	222.3	4.250	108.0	1669	292	1.5	38	2440	10860	5.03	127.8	0.875	22.2	5.75	HD	CG	N
6.000	152.40	4091	24.0	609.6	4.624	117.4	175	31	7	178	1210	5380	9.80	249.0	0.688	17.5	14.3	HD	CG	N
6.060	153.92	4099-A	17.0	431.8	5.490	139.4	4.9	.86	13	338	65	291	3.71	94.1	0.285	7.2	12.0	HD	C	GI
6.125	155.58	4078	14.0	355.6	5.687	144.4	3.5	.61	12	317	44	193	1.53	38.9	0.218	5.6	6.00	SST	C	N
6.250	158.75	4099-B	5.38	136.5	5.250	133.4	291	51	1.8	46	529	2354	1.81	46.1	0.500	12.7	3.63	OT	CG	N
6.250	158.75	4095	12.0	304.8	4.750	120.7	547	96	2.7	69	1500	6670	5.25	133.4	0.750	19.1	7.00	HD	CG	N
6.500	165.10	4089	5.00	127.0	4.500	114.3	4320	757	.8	20	3460	15400	4.00	101.6	1.000	25.4	4.00	HD	CG	N
6.500	165.10	4098	8.00	203.2	4.500	114.3	2033	356	1.6	41	3360	14950	6.25	158.8	1.000	25.4	6.25	HD	CG	N
6.500	165.10	4092	10.0	254.0	5.376	136.6	211	37	3.0	76	632	2811	2.95	74.9	0.562	14.3	5.25	HD	CG	N
7.250	184.15	4024-B	13.0	330.2	5.500	139.7	591	104	3.5	89	2060	9170	6.56	166.7	0.875	22.2	7.50	SPR	CG	N
7.250	184.15	4099	29.0	736.6	6.126	155.6	34	6.0	17	422	569	2532	8.99	228.4	0.562	14.3	16.0	HD	CG	N
7.500	190.50	4022-C	6.50	165.1	6.000	152.4	370	65	2.0	51	739	3289	4.50	114.3	0.750	19.1	6.00	HD	CG	N
7.750	196.85	4044	10.0	254.0	6.938	176.2	39	6.9	5.6	141	219	975	1.83	46.4	0.406	10.3	4.50	SPR	CG	N
8.000	203.20	4024	10.0	254.0	6.250	158.8	717	126	2.6	66	1880	8360	4.59	116.7	0.875	22.2	5.25	SPR	CG	N
9.000	228.60	4027	32.0	812.8	7.876	200.1	28	4.9	16	418	462	2055	5.90	149.9	0.562	14.3	10.5	SPR	CG	N
9.250	234.95	4024-A	15.8	400.1	6.626	168.3	2004	351	2.7	69	5370	23890	8.20	208.3	1.312	33.3	6.25	HD	CG	N

MATERIAL: MW - Music Wire; SPR - Spring Steel; HD - Hard Drawn; OT - Oil Tempered; SST - Stainless Steel; BC - Beryllium Copper; PB - Phosphor Bronze

ENDS: C - Closed; G - Ground; O - Open

FINISH: Z - Zinc; BO - Black Oxide; GI - Gold Irridite; N - None

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

LONG LENGTH COMPRESSION SPRINGS

The primary purpose of the 20" long stainless and 36" long carbon steel spring bodies found in the following tables is to offer our customers a means for creating a desired custom length and/or spring compression travel for a given load. Once cut, the end coils may be bent back to touch the previous coil to create a squared end.

The spring rate constant (lbs./in.) can be determined for any cut length by simply dividing the final length, in inches, into the appropriate rate-inch value listed for the spring body. The spring rate is merely the pounds it takes to compress a spring each inch, i.e., if the rate = 5 lbs. per inch, it would take 5 pounds to compress it one inch, 10 pounds to compress it 2 inches, 15 pounds for 3 inches, etc..

LONG LENGTH COMPRESSION SPRINGS

STAINLESS STEEL (302) 20 INCH LENGTHS

CENTURY STOCK NUMBER	O.D.		I.D.		WIRE DIA.		PITCH		RATE-INCH		SUGG. MAX LOAD		SOLID LGTH PER	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs.	N	Lbs.	N	Lbs.	N
ST2-13	0.125	3.18	0.099	3	0.013	0.33	.042	1	1.1	4.9	.8	3.6	.32	8.1
ST2-15	0.125	3.18	0.095	2	0.015	0.38	.040	1	1.9	8.5	1.2	5.3	.39	9.9
ST2-17	0.125	3.18	0.091	2	0.017	0.43	.035	1	3.0	13	1.8	8.0	.49	12
ST2-20	0.125	3.18	0.085	2	0.020	0.51	.033	1	5.8	26	2.8	12	.61	15
ST3-15	0.187	4.75	0.157	4	0.015	0.38	.067	2	1.0	4.4	.8	3.6	.21	5.3
ST3-17	0.187	4.75	0.153	4	0.017	0.43	.066	2	1.4	6.2	1.2	5.3	.28	7.1
ST3-20	0.187	4.75	0.147	4	0.020	0.51	.066	2	2.9	13	1.9	8.5	.32	8.1
ST3-26	0.187	4.75	0.135	3	0.026	0.66	.052	1	7.3	32	4	18	.51	13
ST4-15	0.250	6.35	0.220	6	0.015	0.38	.125	3	.60	2.7	6.4	28	.13	3.3
ST4-17	0.250	6.35	0.216	5	0.017	0.43	.117	3	1.0	4.4	.9	4.0	.16	4.1
ST4-20	0.250	6.35	0.210	5	0.020	0.51	.098	2	1.6	7.1	1.4	6.2	.22	5.6
ST4-26	0.250	6.35	0.198	5	0.026	0.66	.080	2	4.2	19	3.1	14	.34	8.6
ST4-32	0.250	6.35	0.186	5	0.032	0.81	.070	2	10	46	5.5	24	.42	11
ST5-20	0.312	7.92	0.272	7	0.020	0.51	.150	4	1.2	5.3	1.2	5.3	.15	3.8
ST5-26	0.312	7.92	0.260	7	0.026	0.66	.114	3	2.9	13	2.5	11	.25	6.4
ST5-32	0.312	7.92	0.248	6	0.032	0.81	.095	2	7.0	31	4.5	20	.31	7.9
ST5-41	0.312	7.92	0.230	6	0.041	1.04	.080	2	15	66	8.9	40	.53	13
ST6-32	0.375	9.53	0.311	8	0.032	0.81	.130	3	4.4	20	3.8	17	.27	6.9
ST6-41	0.375	9.53	0.293	7	0.041	1.04	.111	3	11	49	7.5	33	.39	9.9
ST6-54	0.375	9.53	0.267	7	0.054	1.37	.095	2	32	142	16	71	.60	15
ST7-41	0.438	11.13	0.356	9	0.041	1.04	.130	3	7.6	34	6.5	29	.34	8.6
ST7-54	0.438	11.13	0.330	8	0.054	1.37	.117	3	23	102	14	62	.49	12
ST8-54	0.500	12.70	0.392	10	0.054	1.37	.142	4	18	80	12	53	.41	10
ST8-72	0.500	12.70	0.356	9	0.072	1.83	.133	3	61	271	27	120	.57	14
ST9-41	0.562	14.27	0.480	12	0.041	1.04	.146	4	3.8	17	5	22	.31	7.9
ST9-54	0.562	14.27	0.454	12	0.054	1.37	.166	4	14	62	11	49	.36	9.1
ST9-72	0.562	14.27	0.418	11	0.072	1.83	.142	4	44	196	24	107	.54	14
ST9-91	0.562	14.27	0.380	10	0.091	2.31	.142	4	128	569	46	205	.67	17
ST10-72	0.625	15.88	0.481	12	0.072	1.83	.166	4	35	156	22	98	.47	12
ST10-91	0.625	15.88	0.443	11	0.091	2.31	.160	4	99	440	42	187	.61	15
ST12-91	0.750	19.05	0.568	14	0.091	2.31	.200	5	66	294	35	156	.50	13

AVAILABLE FOR IMMEDIATE SHIPMENT

1-800-237-5225
1-213-749-1466
Fax (213)749-3802
www.centuryspring.com

LONG LENGTH COMPRESSION SPRINGS

LONG LENGTH COMPRESSION SPRINGS

CARBON STEEL (ASTM A227) 36 INCH LENGTHS

CENTURY STOCK NUMBER	O.D.		I.D.		WIRE DIA.		PITCH		RATE-INCH		SUGG. MAX LOAD		SOLID LGTH PER	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs.	N	Lbs.	N	Lbs.	N
R-1	0.094	2.39	0.068	2	0.013	0.33	.028	1	2.2	9.8	1	4.4	.48	12
R-2	0.125	3.18	0.097	2	0.014	0.36	.039	1	1.6	7.1	.9	4.0	.38	9.7
R-3	0.125	3.18	0.089	2	0.018	0.46	.037	1	4.6	12	1.9	6.2	.45	11
R-4	0.125	3.18	0.079	2	0.023	0.58	.036	1	13.7	62	3.8	17	.65	17
R-5	0.187	4.75	0.151	4	0.018	0.46	.063	2	2.0	8.9	1.4	6.2	.30	7.6
R-6	0.187	4.75	0.131	3	0.028	0.71	.063	2	13.8	62	5	22	.46	12
R-7	0.250	6.35	0.204	5	0.023	0.58	.083	2	2.9	13	2	8.9	.30	7.6
R-8	0.250	6.35	0.180	5	0.035	0.89	.072	2	15.6	71	7	31	.50	13
R-9	0.312	7.92	0.230	6	0.041	1.04	.091	2	18.6	85	8	36	.47	12
R-10	0.312	7.92	0.217	6	0.048	1.21	.086	2	35.8	160	12	53	.57	14
R-11	0.375	9.53	0.305	8	0.035	0.88	.130	3	7.1	31	5	22	.30	7.6
R-12	0.438	11.13	0.343	9	0.048	1.21	.130	3	16.7	75	9	40	.40	10
R-13	0.500	12.70	0.405	10	0.048	1.21	.167	4	13.8	68	8	36	.39	9.9
R-14	0.500	12.70	0.392	10	0.054	1.37	.151	4	20.9	98	12	53	.39	9.9
R-15	0.500	12.70	0.375	10	0.063	1.59	.139	4	38.0	173	17	76	.48	12
R-15-A	0.562	14.27	0.467	12	0.048	1.21	.132	3	7.4	33	4.7	31	.39	9.9
R-16	0.562	14.27	0.437	11	0.063	1.59	.176	4	32.0	147	15	67	.39	9.9
R-17	0.562	14.27	0.402	10	0.080	2.03	.157	4	83.0	400	30	133	.55	14
R-18	0.625	15.88	0.501	13	0.062	1.57	.204	5	24.5	120	14	62	.35	8.9
R-19	0.625	15.88	0.481	12	0.072	1.83	.181	5	41.5	200	21	93	.44	11
R-20	0.625	15.88	0.442	11	0.092	2.32	.175	4	120.0	574	40	178	.57	14
R-21	0.750	19.05	0.590	15	0.080	2.03	.234	6	46.0	222	23	102	.39	9.9
R-22	0.750	19.05	0.540	14	0.105	2.67	.210	5	137.0	681	49	218	.55	14
R-23	0.875	22.23	0.715	18	0.080	2.03	.300	8	35.2	169	20	89	.33	8.4
R-24	1.000	25.40	0.817	21	0.092	2.32	.317	8	43.9	209	26	116	.35	8.9
R-25	1.000	25.40	0.759	19	0.121	3.06	.287	7	131.0	645	55	245	.49	12
R-26	1.000	25.40	0.730	19	0.135	3.43	.272	7	201.6	1032	75	334	.56	14
R-27	1.125	28.58	0.914	23	0.106	2.68	.382	10	65.5	311	34	151	.35	8.9
R-27-A	1.188	30.18	0.738	19	0.225	5.72	.337	9	1404	7980	252	1121	.74	19
R-28	1.250	31.75	1.009	26	0.121	3.06	.375	10	75.6	391	44	196	.40	10
R-29	1.250	31.75	0.954	24	0.148	3.76	.348	9	180	934	78	347	.51	13
R-29-A	1.375	34.93	1.079	27	0.148	3.76	.340	9	127	663	71	316	.52	13
R-30	1.500	38.10	1.176	30	0.162	4.11	.422	11	175	925	84	374	.48	12
R-31	1.750	44.45	1.376	35	0.187	4.75	.470	12	216	1183	108	480	.51	13

AVAILABLE FOR IMMEDIATE SHIPMENT

S-1013 S-1178 S-1238 S-1345 S-1577

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

71715	A-38	B14-5	BB-37	CC-14
CC-63	LL-23	LL-57	N-315	Q-16

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt

FR
Cette fiche technique est présentée par le fabricant