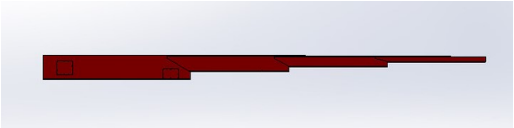


NIHVA Technologies Pvt. Ltd.

Technical Specification

Product: Telescopic conveyor
Client: ATG Tires , Mumbai

Sr no	Description	Remark
1	Size of Conveyor 	19 mtr
2	Elongated length with no of boom	12mtr with 4 booms
3	Collapsed length 	7.5 mtr
4	Width of belt	1200 mm
5	Speed of Conveyor 	10 mtr /min
6	Cycle time (for telescopic operation) 	100 - 150 sec
7	Cycle time (for telescopic collasing operation)	100 - 120 sec
8	Capacity of conveyor	70 kg / mtr
9	weight of total system 	950 kg
10	Roller guide with chain drive for telescopic operation	
11	motor used in conveyor 	SEW Make
12	Belt Used in conveyor 	1200 mm width , Black color Anti cut belt(Derco make)

13	Sensors Used in conveyor	limit Switch (Teknik) , Safety Sensor (Omron) ,
14	VFD	Siemens
15	Conveyor mobility in x direction (power driven)	3.5 HP Geared Motor Driven
16	Hydraullic lifting arrangement for conveying height adjustment	
17	Rigid piping of Hydraullic connections	
18	cable Routing through Flexible conduit	
19	Belt Tighetening arrangement to avoid slagging in belt	
20	Led Light unit is mounted at front of boom to illuminate light in container	
21	Audible warning to alert operator of impending belt starts.	
22	Anti collision strip fitted at the front of the boom which causes the machine to retract / Stop	
23	Main Supply	415 v , 20 A
24	Cotrol Voltage	24V Dc
25	Belt Speed	10 mtr /min
26	Forward & Retract Speed	6 mtr /min
27	Power Pack	2HP / 8 ltr