
TRUCK UNLOAD/RELOAD TELESCOPIC CONVEYOR SPECIFICATION

Equipment Details

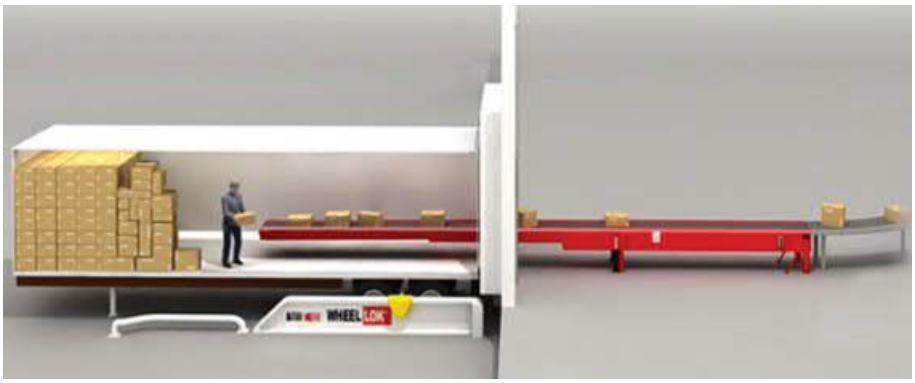



Specification:

Speed	:	30 m/min - To suit the site specific application (based on project design & User Requirement)
Telescopic Speed:	:	12m/min (0.2m/sec)
Direction	:	Bi-directional (Reversible)
Extended Length	:	7075 mm
Retracted Length	:	3075 mm based on truck dock depth w/ safety access in the front of 1.0m when retracted
No. of Sections	:	3
Controls	:	Both sides of boom and at one side of base at rear
Voltage	:	380V/3Ø/50Hz power with 220V/1/50 controls (standard specification) – The supply specification shall be in accordance with the local voltage & power rating All control functions to be self-contained with 1 connection to plant power.
Height	:	Variable Height required (unless specified as Fixed height) Vendor to indicate Maximum & Minimum height of boom conveyor (extended & retracted

Type	L1	L2	L	A	Width B*	Belt Width C
2-sections						
CB2L-2.7/2.1	2818	2050	4868	450	C+313	600/800
CB2L-4.1/2.8	4218	2750	6968	450	C+313	600/800
3-sections						
CB3L-2.3/2.6	2375	2600	4975	550	C+342	600/800
CB3L-3/4	3075	4000	7075	550	C+342	600/800
CB3L-4/5.4	4075	5400	9475	550	C+342	600/800
CB3M-5/7	5075	7000	12075	550	C+342	600/800
CB3M-6/8.4	6075	8400	14475	550	C+342	600/800
CB3H-7.7/12	7775	12000	19775	660	C+342	600/800
4-sections						
CB4M-4/7	4075	7000	11075	720	C+388	600/800
CB4M-5/10	5075	10000	15075	720	C+388	600/800
CB4M-6/12.3	6075	12300	18375	720	C+388	600/800
CB4H-7/14.3	7075	14300	21375	750	C+388	600/800
CB4H-7.5/15.3	7575	15300	22875	750	C+387	600/800
CB4X-7/15.6	7075	15600	22675	900	C+450	600/800
CB4X-7.6/16.7	7675	16700	24439	900	C+450	600/800
5-sections						
CB5X-5/14.4	5075	14400	19475	900	C+540	600/800
CB5X-5.8/15.8	5875	15800	21675	900	C+540	600/800

L1 Base length includes 75 mm anti-collision strip
L2 Length of extension with 50 kg load
* 'C' in this column refers to the belt width

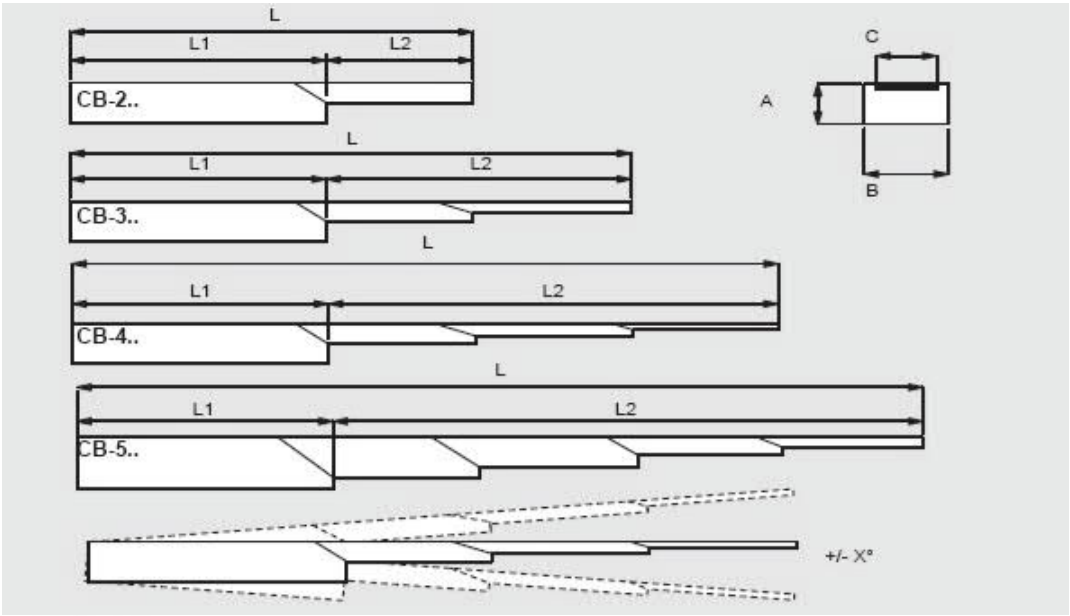


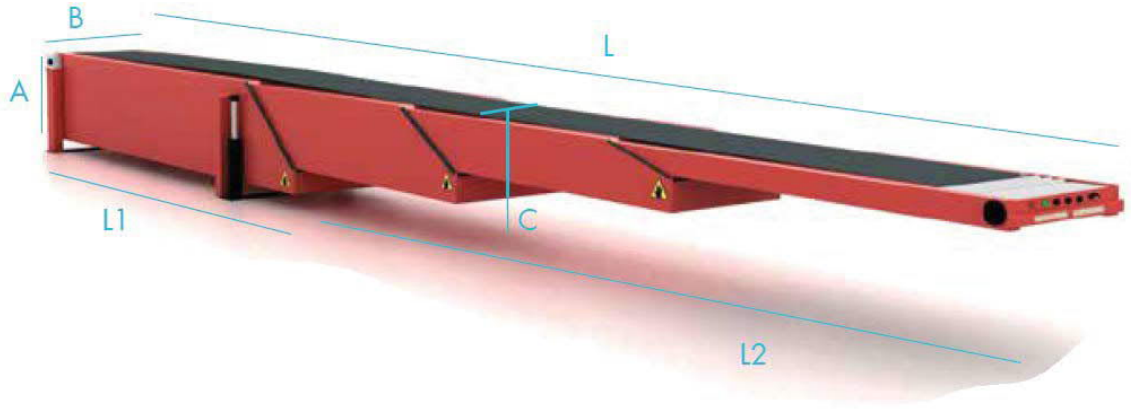

Height Adjustable Truck Telescopic Conveyors

Maximum & minimum height shall be dependent on several factors as listed below:

- Height levels vary depending on retracted & extended positions (partially extended to fully extended)
- Incline & decline angle
- Overall length of the telescopic conveyor (includes no. of extension stages)
- Length, position and arrangement of actuating cylinders
- Overall base height & depth
  - Height clearance between main unit & floor dependent on overall depth of base unit

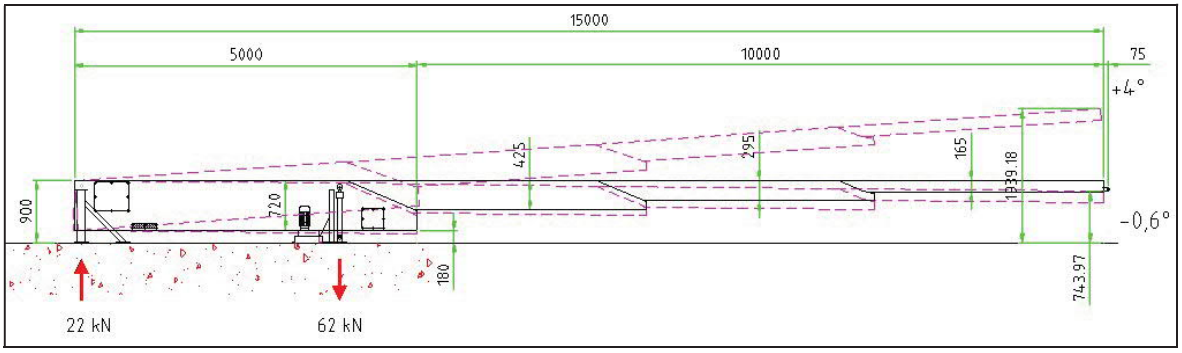

Note: The closer the base unit is to the floor the smaller the angle of decline

Limited to 3 sections to allow for lower decline angle for vans

Vendor shall indicate in their proposal the Maximum & Minimum height of the conveyor as well as angle of the inclined/decline conveyor with the front section at the lowest point.

Hydraulic Cylinders, Pump & Motor

Motorized hydraulic system shall be used for inclining or declining the telescopic conveyors.

Mounting position of the hydraulic cylinder on extendable. Closer to the front means less lifting height

Hydraulic cylinder size (closed length, extended length, etc.)


Pivot point position at rear of machine.

Hydraulic system mounting position shall be defined to determine hydraulic hose & cable length



Telescopic Conveyor for Trucks & Vans

For height adjustable telescopic conveyors that would be used for both trucks & vans, a +5°/-5° angle (incline/ decline) is required.

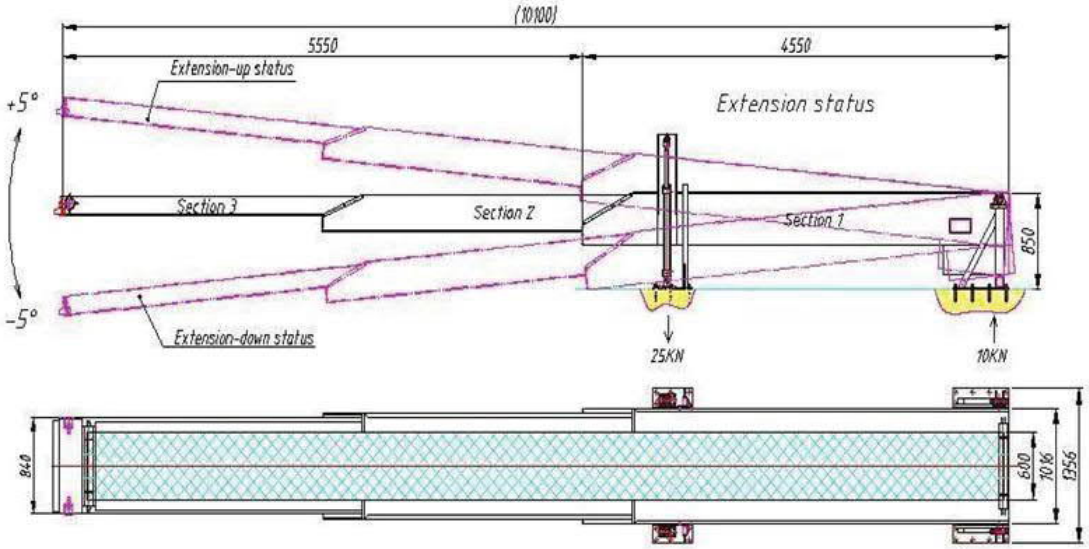





Long hydraulic cylinders will be required to achieve a +5°/-5° Incline/Decline angle requirement

Height of base unit (section 1) should be approximately around 400mm (Vendor to provide the exact height) from the ground, to allow for ample clearance of the base from hitting the ground when in full decline

Up to 3 sections only can be used to achieve +5°/-5° angle. More than 3 sections would require a deeper base unit that will decrease lowering angle.

Note: Where more than three (3) sections is required, MHS Vendor to provide details on the angle limitations and alternative solutions to allow for the same angle (+5°/-5°) to be achieved.