



MODEL : SKB-G65
THICKNESS 3mm
GALVANISED STEEL GUIDE RAIL



MODEL : SKB-A7
SHUTTER SLAT



MODEL : SKB-T120
FIRE RATED BOTTOM BAR


60 DAYS FABRICATION LEAD TIME

STANDARD RAL COLOR:	
	RAL 7055 GREY
	RAL 9010 WHITE


SHUTTER TYPE	SKB 2 HOURS FIRE RATED ROLLER SHUTTER
SHUTTER SLATS	GALVALUME/ELECRO-GALVANIZED STEEL, SKB-A7(1.0mm)
FINISHING OF SLATS	POWDER COAT TO SKB STANDARD RAL COLOUR
GUIDE RAIL	GALVANISED SKB-G65 SURFACE MOUNTED
FINISHING OF GUIDE	POWDER COAT TO SKB STANDARD RAL COLOUR
BOTTOM BAR	DOUBLE ANGLE T-SHAPE 38x38x3mm T-120
FINISHING OF B/BAR	POWDER COAT TO SKB STANDARD RAL COLOUR
BOX DESIGN	MILD STEEL SECTION FRAME DESIGN
FINISHING OF BOX	POWDER COAT TO SKB STANDARD RAL COLOUR
BOX COVER PLATE	0.8mm GALVANIZED STEEL SHEET
FINISHING OF COVER	POWDER COAT TO SKB STANDARD RAL COLOUR
OPERATION	SKB400KG WITH MANUAL OVERRIDE CHAIN
MOTOR POWER SOURCE	230 VOLTS, 1 PHASE, 50 Hz.
FIRE MODE	THERMAL FUSIBLE LINK WILL AUTO CLOSE BY GRAVITY FORCE
	WHEN ROOM TEMPERATURE RISES UP TO 68 C
	FIRE SIGNAL FROM FIRE CONTROL ROOM AND SHUTTER
	SHALL CLOSE DOWN BY GRAVITY FORCE WITHOUT DELAY
ADDITIONAL ITEM	.

LOCATION	SHUTTER NO.	CLEAR WIDTH	CLEAR HEIGHT	QTTY.	MOTOR POSITION
.	FRS-1	1750 mm	3050 mm	1	RH


REMARKS:
STEEL OR R.C STRUCTURE MUST ABLE TO WITHSTAND THE SHUTTER WEIGHT 30KG/M2 (MINIMUM 300KGS)

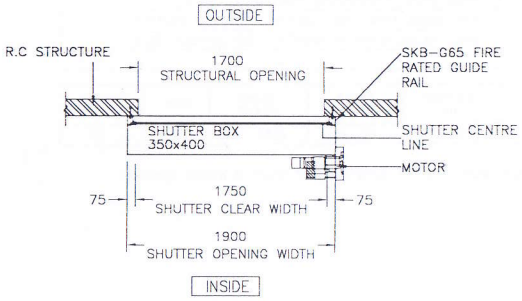


PLAN VIEW

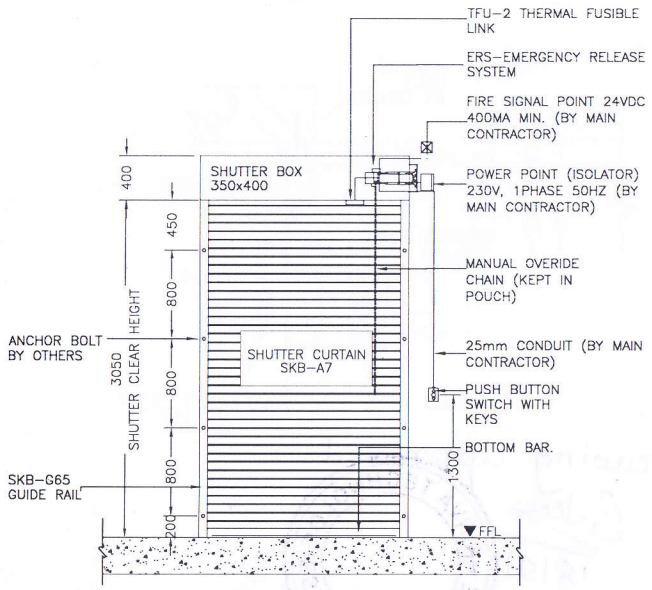

ELEVATION VIEW

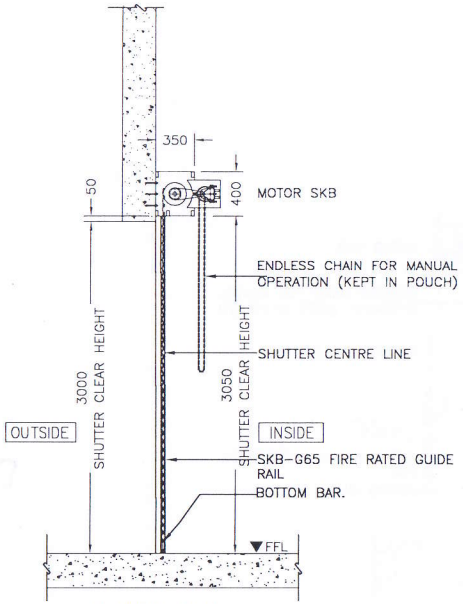

SECTION VIEW

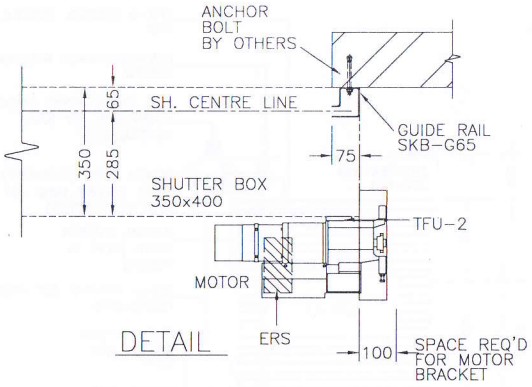


DETAIL


Drawing approved
Luka
18/9/17

NIHVA TECHNOLOGIES PUNE


CONTRACTOR	SKB® SKB SHUTTERS MANUFACTURING SDN BHD. KUALA LUMPUR TEL:03-61572277 FAX:03-61572211	PROJECT	NIHVA TECHNOLOGIES PVT LTD		DRAWN BY	TERESA	DATE	18.09.17
		TITLE	SKB FIRE RATED ROLLER SHUTTER	REV. DATE	CHECKED BY	MARILYN LAI	SCALE	N.T.S
		DRAWING NO.	SKB/D/NIHVA/2017-09-001	.			CAD REF	FRS-1



MODEL : SKB-G65
THICKNESS 3mm
GALVANISED STEEL GUIDE RAIL



MODEL : SKB-A7
SHUTTER SLAT



MODEL : SKB-T120
FIRE RATED BOTTOM BAR


60 DAYS FABRICATION LEAD TIME

STANDARD RAL COLOR:
RAL 7055 GREY
RAL 9010 WHITE


SHUTTER TYPE	SKB 2 HOURS FIRE RATED ROLLER SHUTTER
SHUTTER SLATS	GALVALUME/ELECRO-GALVANIZED STEEL; SKB-A7(1.0mm)
FINISHING OF SLATS	POWDER COAT TO SKB STANDARD RAL COLOUR
GUIDE RAIL	GALVANISED SKB-G65 SURFACE MOUNTED
FINISHING OF GUIDE	POWDER COAT TO SKB STANDARD RAL COLOUR
BOTTOM BAR	DOUBLE ANGLE T-SHAPE 38x38x3mm T-120
FINISHING OF B/BAR	POWDER COAT TO SKB STANDARD RAL COLOUR
BOX DESIGN	MILD STEEL SECTION FRAME DESIGN
FINISHING OF BOX	POWDER COAT TO SKB STANDARD RAL COLOUR
BOX COVER PLATE	0.8mm GALVANIZED STEEL SHEET
FINISHING OF COVER	POWDER COAT TO SKB STANDARD RAL COLOUR
OPERATION	SKB400KG WITH MANUAL OVERRIDE CHAIN
MOTOR POWER SOURCE	230 VOLTS, 1 PHASE, 50 Hz.
FIRE MODE	THERMAL FUSIBLE LINK WILL AUTO CLOSE BY GRAVITY FORCE
	WHEN ROOM TEMPERATURE RISES UP TO 68 C
	FIRE SIGNAL FROM FIRE CONTROL ROOM AND SHUTTER
	SHALL CLOSE DOWN BY GRAVITY FORCE WITHOUT DELAY
ADDITIONAL ITEM	.

LOCATION	SHUTTER NO.	CLEAR WIDTH	CLEAR HEIGHT	QTTY.	MOTOR POSITION
.	FRS-2	1750 mm	2550 mm	1	RH


REMARKS:
STEEL OR R.C STRUCTURE MUST ABLE TO WITHSTAND THE SHUTTER WEIGHT 30KG/M2 (MINIMUM 300KGS)

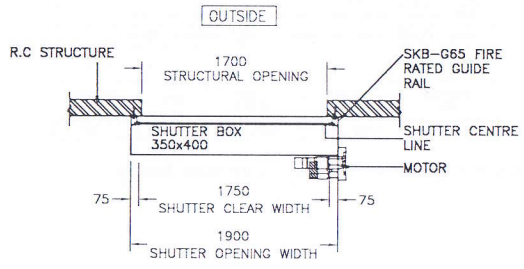


PLAN VIEW

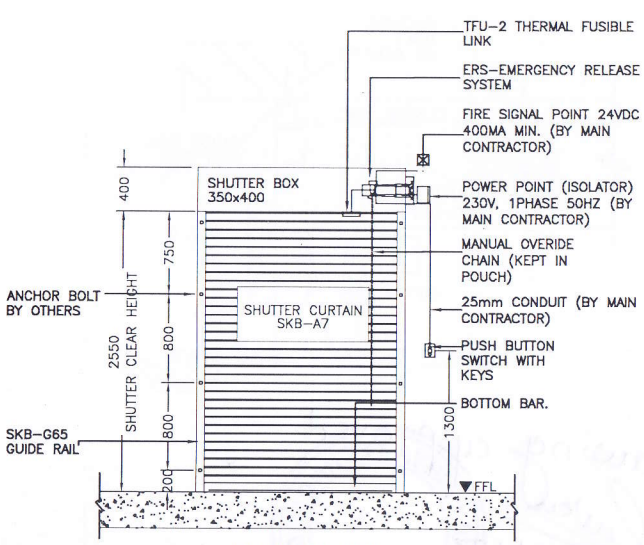

ELEVATION VIEW

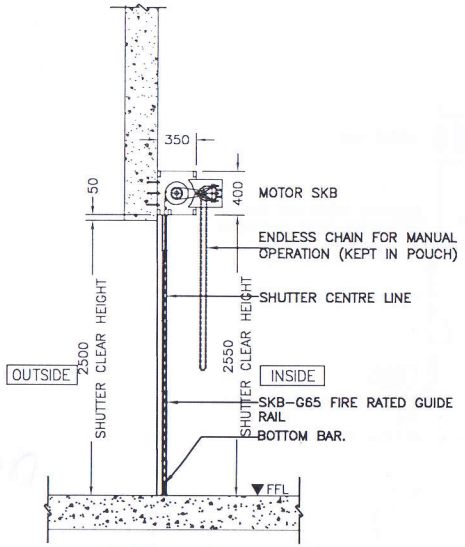

SECTION VIEW

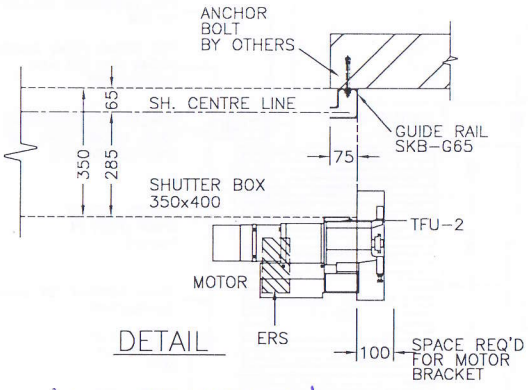

DETAIL

Drawing approved
Luka
18191

NIHVA TECHNOLOGIES PVT LTD * PENANG *

CONTRACTOR	SKB® SKB SHUTTERS MANUFACTURING SDN BHD. KUALA LUMPUR TEL:03-61572277 FAX:03-61572211	PROJECT	NIHVA TECHNOLOGIES PVT LTD	DRAWN BY	TERESA
		TITLE	SKB FIRE RATED ROLLER SHUTTER	CHECKED BY	MARILYN LAI
		DRAWING NO.	SKB/D/NIHVA/2017-09-002	REV. DATE	.
				DATE	18.09.17
				SCALE	N.T.S
				CAD REF	FRS-2