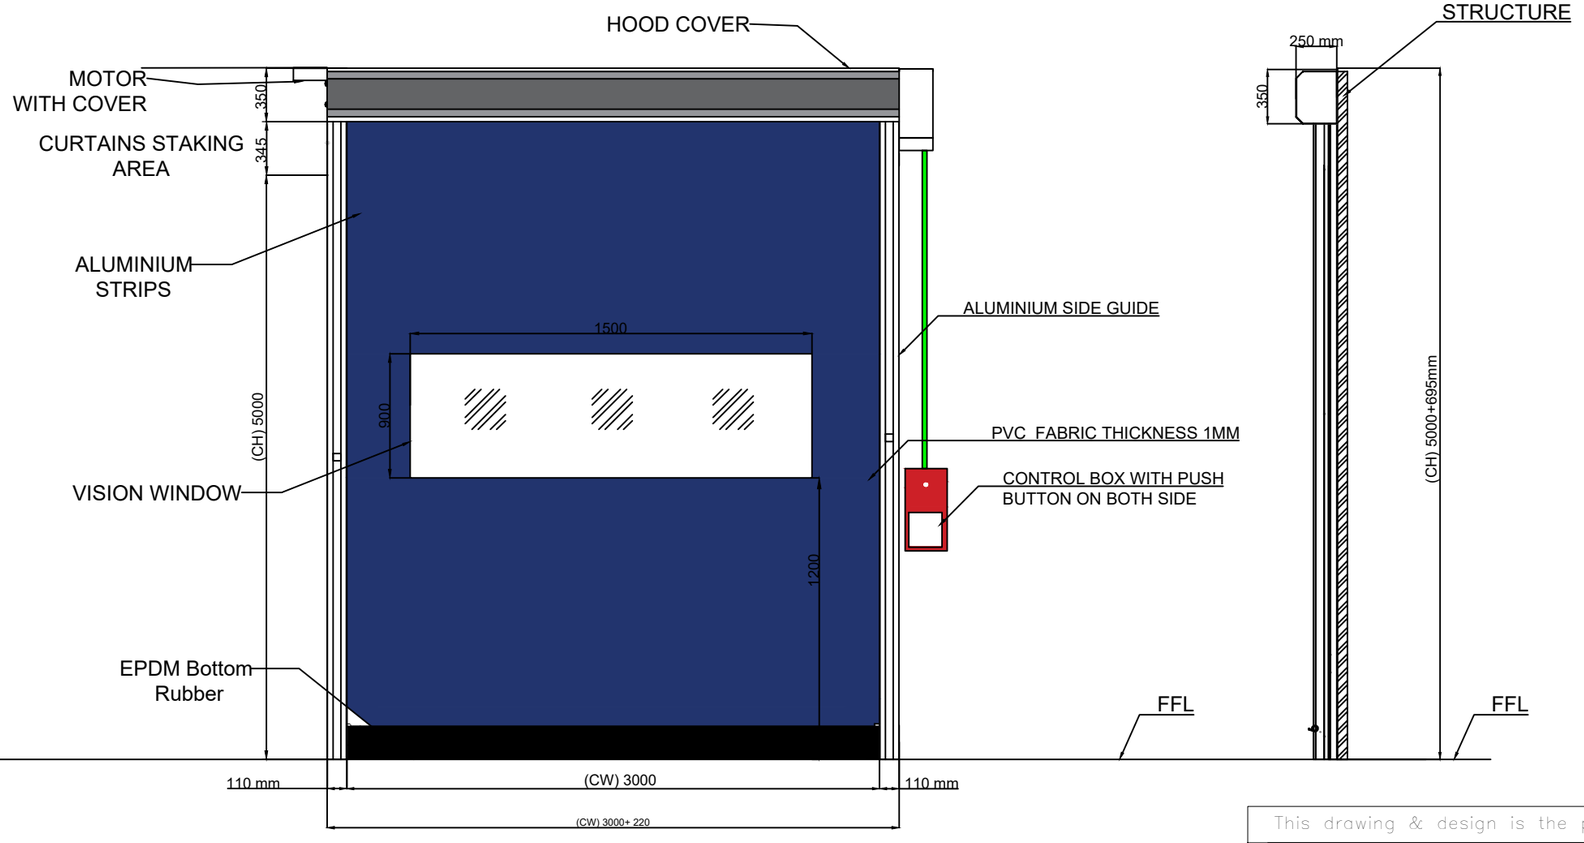


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	Use	Internal Door
2	Mounting	On Structure: Inside / outside
3	CURTAIN Panel	PVC FABRIC THICKNESS 1 MM
	Manual Release	Crank HANDLE
5	Door Travel Speed	Opening: UPTO 1.5m/Sec & Closing: 0.8 m/Sec
6	Safety Device	Safety Photocell Pair & Safety Edges
7	Accessories	REMOTE,REVOLVING LIGHT, MAGNETIC LOOP DETECTOR,GUARD PROTECTION,THREE WAY PUSH BUTTON, FLOOR SENSOR FOR FORKLIFT
8	RAL CODE	RAL 5010

HIGH SPEED ROLL UP DOOR SIZES :-

Sr	Clear Width (CW)	Clear Height (CH)	QTY
1	**3000**	**5000**	01

NOTE :-

1. All DIMENSIONS ARE IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR			NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
	NAME	SIGN	DATE		
DRAWN	B.S		26.08.2025	CLIENT - MARS PETCARE IND PVT LTD	
CHECK	V.T		26.08.2025	PROJECT - HIGH SPEED DOOR	
APPRD.	V.T		26.08.2025	FORMAT NO - NIHVA-DD-F-03	
If any queries contact : projectsupport@nihva.com				DWG. NO. : NIHVA/24-25/MP/1308001	REV- R00
ALL DIMENSION ARE IN mm				SCALE: NTS	WT: SHEET: