

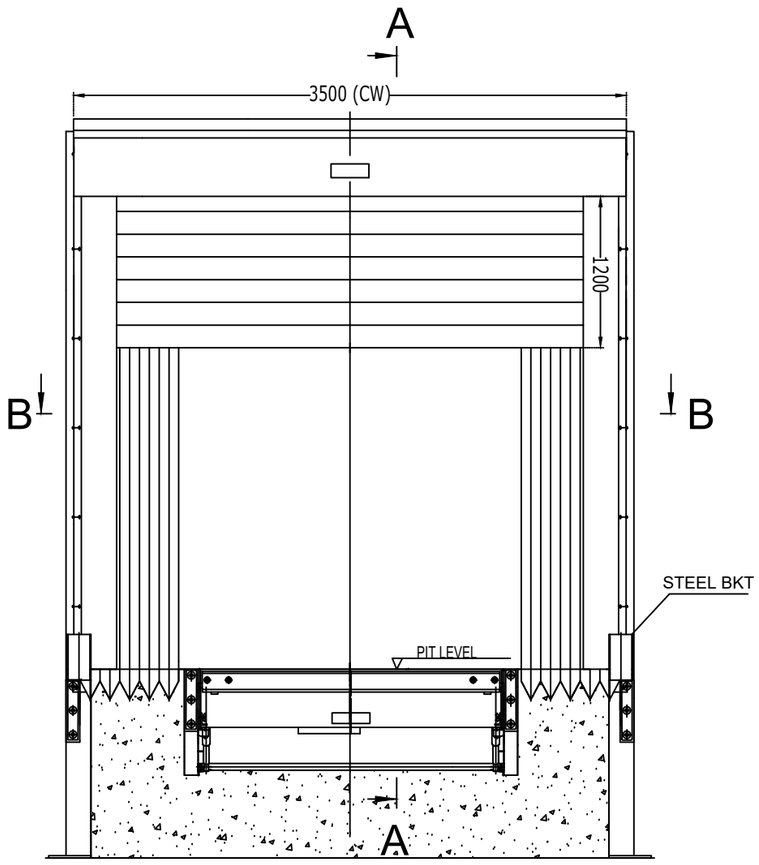



FRONT VIEW

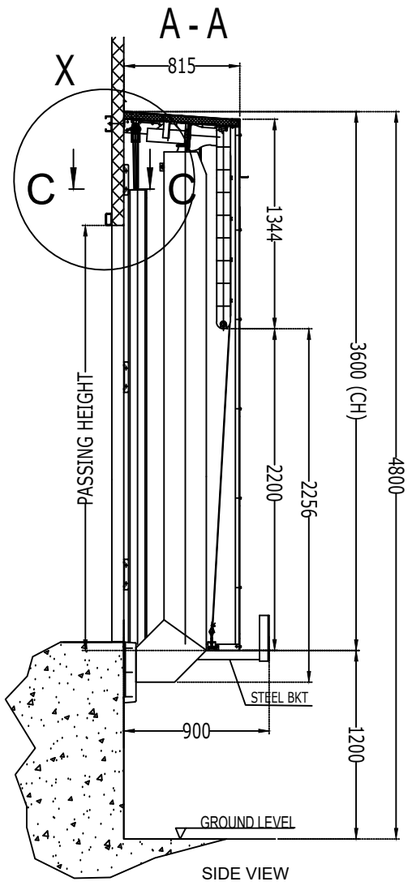


SIDE VIEW

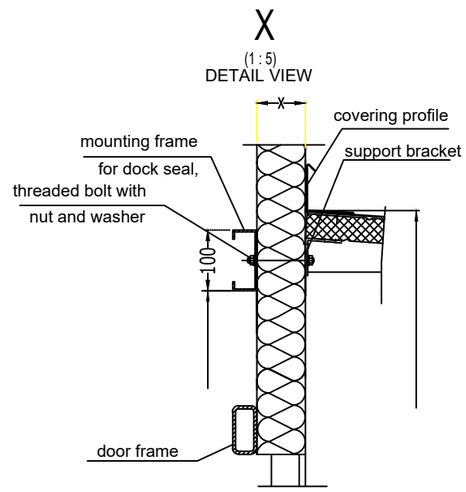

B - B

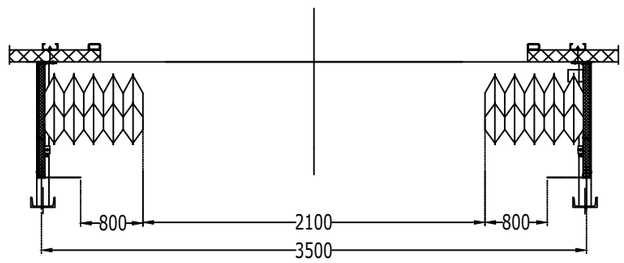

TOP VIEW

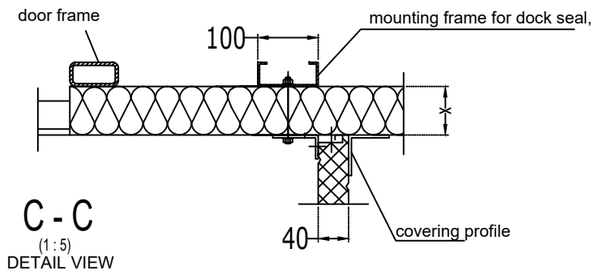

NOTE:-

1. ALL DIMENSION ARE IN MM.
2. THIS DRAWING IS ONLY FOR UNDERSTANDING PURPOSE.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

DIMENSION :

Sr.No	Clear Width (CW)	Clear Height (CH)	Qty
1.	3500	3600	02

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
COMMON CONTROL SYSTEM	———	220V,50Hz ,0.75KW IP54
INFLATING TIME OT THE AIRBAG	———	20 SEC
FOAMED CURTAIN		0.5mm THIK MIX STRENGTH ->290N/mm² OPERATING TEMPERATURE - -35°C TO +70°C FOAM TYPE - POLYURETHANE
DOOR SEAL SUPPORT (INSIDE/OUTSIDE)		WHITE (RAL9003)

IMPORTANT NOTES:

1. ALL DIMENSION ARE IN MM.
2. THIS DRAWING IS ONLY FOR UNDERSTANDING PURPOSE.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

CLIENT APPROVAL :

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES
PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

INFLATABLE DOCK SHELTER

CLIENT - MARS INTERNATIONAL INDIA PVT LTD

PROJECT - INFLATABLE DOCK SHELTER

LOCATION - TELANGANA

DWG. NO. : NIHVA/24-25/00XX

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 0

	NAME	DATE	SIGN
DRAWN	S.J	21/11/2024	
CHECK & APPROVAL	V.T.	21/11/2024	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.