
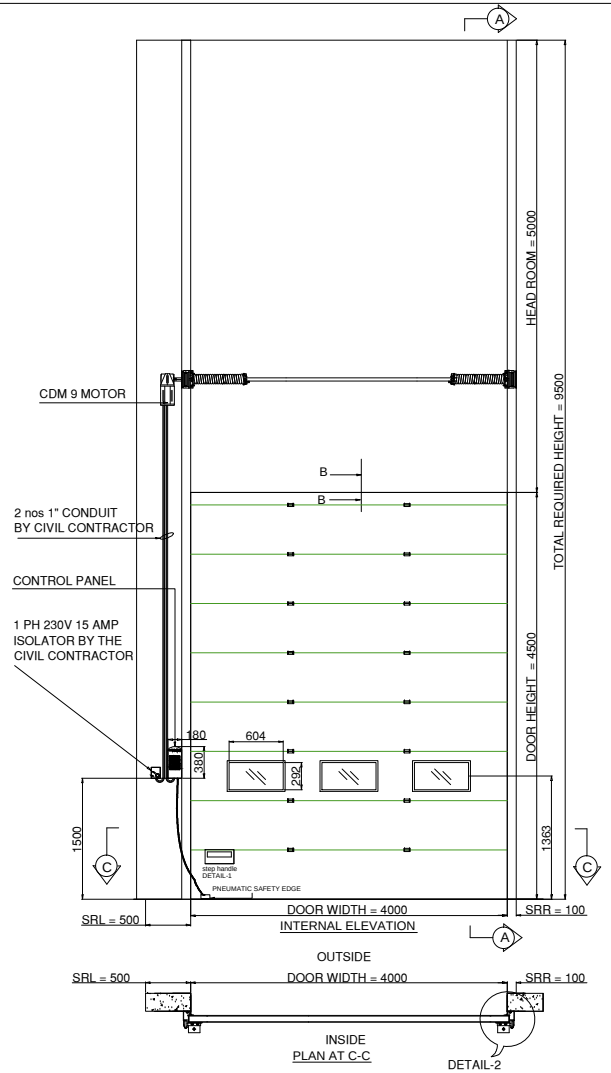


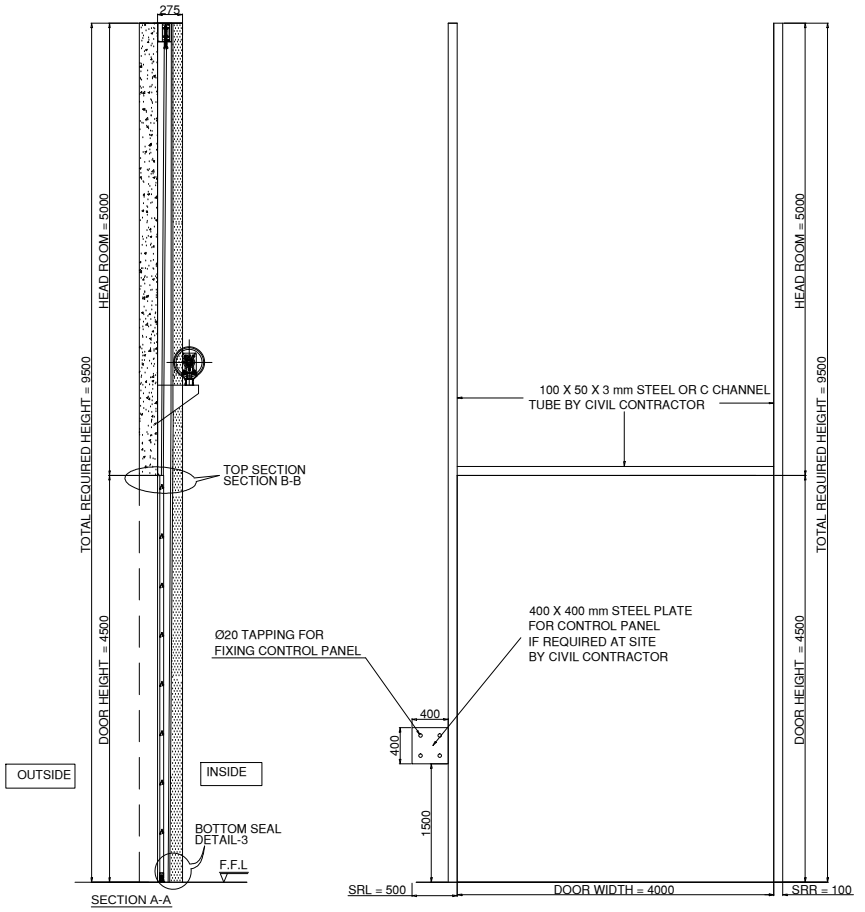

QTY	DOOR WIDTH DW	DOOR HEIGHT DH	HEAD ROOM (HR)	SIDE ROOM LEFT (SRL)	SIDE ROOM RIGHT (SRR)	DEPTH D
02	4000	4500	5000	500	100	550

NOTES

TO BE PROVIDED BY MAIN CONTRACTOR

1) SURFACE FOR FIXATION
a) SURFACE TO BE FLUSH AND IN ONE LEVEL
b) ANY OF THE FOLLOWING MATERIALS ARE SUITABLE FOR FIXATION (CONCRETE,HOLLOW BLOCKS IN FILLED WITH CONCRETE,STEEL,WOOD)
2) STRUCTURE TO CARRY THE ENTIRE WEIGHT OF THE DOOR


ELECTRICAL REQUIREMENTS

3) 1 PHASE 230V 15AMP INCOMING POWER SUPPLY NEAR THE CONTROL PANEL WITH ISOLATED SWITCH 15-A
4) 1"CONDUIT 1no FROM THE CONTROL UNIT TO OPERATOR TO BE PROVIDED BY MAIN CONTRACTOR
5) 1"CONDUIT 1no FROM THE ISOLATOR TO OPERATOR TO BE PROVIDED BY MAIN CONTRACTOR


MODEL NUMBER	1042 ALUMINUM
COLOUR	IN SIDE -RAL 9002
HARDWARE	VL

OPERATOR: CDM9 MOTOR TECHNICAL SPECIFICATION


OPERATION	CDM-9
SUPPLY VOLTAGE VOLTAGE ELECTRICAL (INTERNAL) MOTOR	230 V 1-PHASE 50/60HZ 230V AC
IP CLASS	
DOOR WEIGHT(MAX)	400 Kg
DOOR SPEED OPENING m/s	0.25 m/s INCREASING SPEED AT START
DOOR SPEED CLOSING m/s	0.25 m/s DECREASING SPEED BEFORE STOP
OPERATOR WEIGHT Kg	13.5 Kg
CLASSIFICATION	IP55 (excl adaptor which is IP44)




STEP HANDLE (DETAIL-1)




FINGER PROTECTION




TOP SEAL EPDM
SECTION B-B




CONTROL UNIT



BOTTOM SEAL
EPDM RUBBER

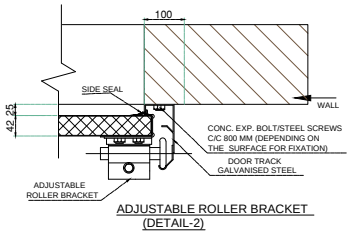

ADJUSTABLE ROLLER BRACKET
(DETAIL-2)



DOOR DESIGN

DOOR DESIGN

1. TOP SEAL
2. SECTION JOINT WITH FINGERPINCH PROTECTION AND SEALING
3. INNER AND OUTER SHEET
4. INTERNAL STEEL REINFORCEMENT, TO PROVIDE POSITIVE FIXING POINTS
5. WINDOW
6. HIGH IMPACT POLYSTYRENE FRAME
7. WIND REINFORCEMENT (IF NECESSARY)
8. STEP / LIFT HANDLE
9. INSULATION (CFC - FREE)
10. BOTTOM SEAL

CLIENT:
PHENIX CONSTRUCTION TECHNOLOGIES

PROJECT:

TITLE:
CRAWFORD SECTIONAL DOOR

SUBCONTRACTOR/SUPPLIER

Crawford
ASSA ABLOY

DUBAI
P.O. BOX: 80983
TEL: 04-8852888
FAX: 04-8854919

ABU DHABI
P.O. BOX: 32996
TEL: 02-6318200
FAX: 02-6210607

DESIGNED BY:-	DATE: 24-11-2015
DRAWN BY:RTA	ALL DIMENTIONS ARE IN MM
CHECKED BY: VARG	SCALE:- N.T.S
APPROVED BY:-	
DRAWING NUMBER ME-11271	REV:- 01