


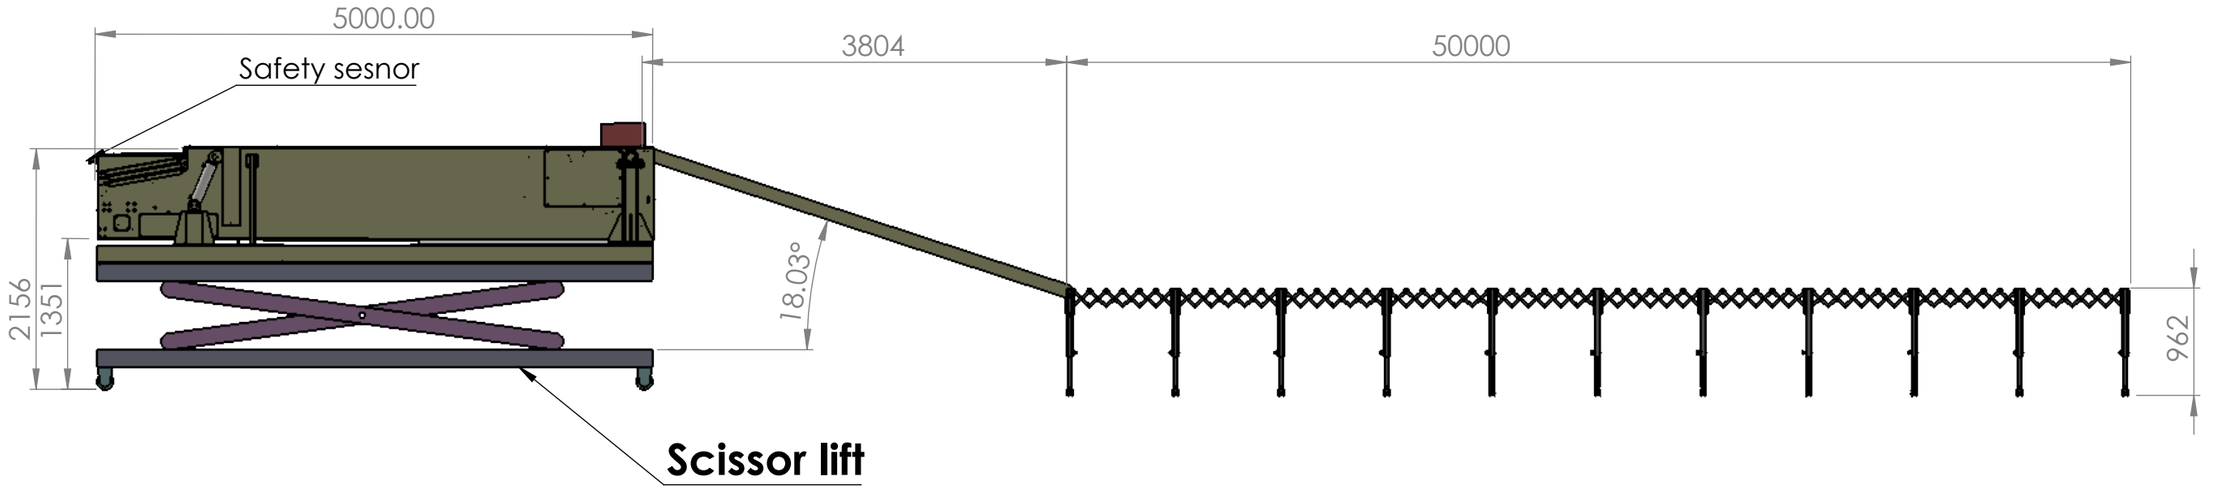

Use Tolerance as per ISO-2768 part 1&2:1989

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:	DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING | REVISION

NIHVA TECHNOLOGIES PVT LTD
Email:-info@nihva.com
Website:-www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	Rohit		24.03.21
CHK'D	MAYUR		
APPV'D			
MFG			
Q.A			

TITLE:

LT000028 Telescopic conveyor layout

MATERIAL:

DWG NO.

A3

WEIGHT: GMS

SCALE:1:200

SHEET 1 OF 2

Technical specification of elescopic conveyor		
Sr no	Item	Description
1	Product	Box
2	Product size max	550x 450x 300(LxWxH)
3	Product size min	250x 170x100(LxWxH)
4	Product weight	15 kg
5	Conveyor capacity	Up to 50 kg/mtr
6	Speed of conveyor	Up to 25mtr/min
7	Conveyor infeed height	2150 mm(Adjustable through scissor lift)
8	Conveyor outfeed height	2150 mm(Adjustable through scissor lift)
9	Contact parts	MS powder coated
10	Non -contact parts	MS powder coated
11	Gear motor	Bonfiglioli
12	Foot	Spectra plast/ equivalent
13	Belt	PVC green belt(2M10-U0-V10)
14	Belt make	Habasit
15	Belt width	550 mm
16	Conveyor width	As per layout
17	Finish	Powder coated
18	Speed control through	VFD
19	Safety	Sensor and physical safety
20	Sensor	P & F

Technical specification of flexible drive roller conveyor		
Sr no	Item	Description
1	Product	Box
2	Product size max	550x 450x 300(LxWxH)
3	Product size min	250x 170x100(LxWxH)
4	Product weight	25 kg
5	Conveyor capacity	Up to 50 kg/mtr
6	Speed of conveyor	Up to 25mtr/min
7	Conveyor infeed height	900 mm
8	Conveyor outfeed height	900mm
9	Contact parts	SS-304
10	Non -contact parts	SS-304
11	Gear motor	Bonfiglioli
12	Foot	Spectra plast/ equivalent
13	Roller	PU coated ss-304 rolelr
14	Roller make	Interroll
15	Roller width	550 mm
16	Conveyor width	50 mtr
17	Finish	Matt buffed
18	Speed control through	VFD(optional)

Component Make		
Sr no	Item	Description
1	PVC Top Nylon Fabric Straight Belt	Habasit
2	Friction(Rubber) Top Nylon Fabric Inclined Belt	Habasit
3	Idler Rollers	Interrol
4	Transmission Chain	Diamond
5	Transmission 'V' Belts	Fenner/Gates
6	Geared Motors for Modules	Bonfiglioli
7	Gearbox	Bonfiglioli
8	Drive & Tail Pulley	Crowned
9	Bearing/Pillow Blocks	NTN/FAG/SKF
10	Modular Belts	Eurobelt/Intralox
11	Aux. Relay/24V DC relay	Siemens / L&T / Telemecanique
12	Power Cables	Finolex, Polycab, Lapp
13	Control Panel, Boxes, Consoles	Rittal /Other equivqlent
14	MCB & MCCB	Siemens / L&T / ABB
15	Over Load Relay	Siemens / L&T / Telemecanique
16	Power Contractor	Siemens/L&T/BCH/ABB
17	MCCB/ Main incomer	Siemens / L&T / ABB/Renu
18	Terminals	Wago (Germany)/Connectwel/Phoenix(Germany)
19	Pushbuttons illuminated	Tecknic
20	Emergency Push button	Tecknic
21	Profibus cable	Lapp / Siemens
22	Ethernet cable	Finolex / Polycab / Lapp
23	Micro PLC	Siemens(Germany) / MITSUBISHI
24	Sensors	P&F

Use Tolerance as per ISO-2768 part 1&2:1989

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:				DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION
	NAME	SIGNATURE	DATE			NIHVA TECHNOLOGIES PVT LTD Email:-info@nihva.com Website:-www.nihva.com
DRAWN	Rohit		24.03.21			TITLE: LT000028 Telescopic conveyor layout
CHK'D	MAYUR					
APPV'D						
MFG						
Q.A				MATERIAL:		DWG NO. A3
				WEIGHT: GMS		SCALE:1:200 / SHEET 2 OF 2