Welcome To

NIHVA

NIHVA Technologies Pvt. Ltd.

SHIVAAH
Division

Why to Choose NIHVA?

NIHVA
NIHVA Technologies Pvt. Ltd.

- Detailed Technical-NIHVA Make Automatic Retractable Roof.
- Prominent Brand for Automation products.
- Pioneers in offering Intelligent, Innovative and Economical Solutions.
- Continuous Improvement in - Change, Communication, Gratitude, Performance & Leadership
- Integrity, Quality & Commitment.
- Innovation & Novelty in Design.
- Experienced & Skilled Manpower.
- Specialized in Integrated solutions of Automations.
- Customer Centric Organization to deliver Best Quality Products & On Time Services.

NIHVA
NIHVA Technologies Pvt. Ltd.

USP's of Automatic Retractable Roof :-

- Specially extruded non-corrosive Aluminium Profile and MS.
- We used Saint-Gobain glass. (11.52mm)
- Italian/ German make motor with remote control.
- High heat resistant EPDM gasket to make the system leak-proof.
- Stainless steel parts & fasteners.
- RAL Powder coating finish as per requirement.
- No need of any licence from municipal authorities for terrace roofing's since it is completely retractable.

NIHVA
NIHVA Technologies Pvt. Ltd.

USP's of Automatic Retractable Roof :-

- Retractable roof is a new innovation done be the NIHVA Technologies for Bungalows, Hotels, Villas, Restaurants, Apartments, Commercial complex, and Offices where we can add more glory by allowing partial sunlight to enter in the premises at day and beautiful starry sky view at night.

- Roofs can be of different types such as folding roof, sliding roof, telescopic roof, single sided, double sided, vertical lift, inclined lift and etc.

- The Retractable Roof provides better Air ventilation or Sun Light and make your day with more fresh Oxygen.

NIHVA

NIHVA Technologies Pvt. Ltd.


Key - BOM

NIHVA
NIHVA Technologies Pvt. Ltd.

Special Extruded profile:-






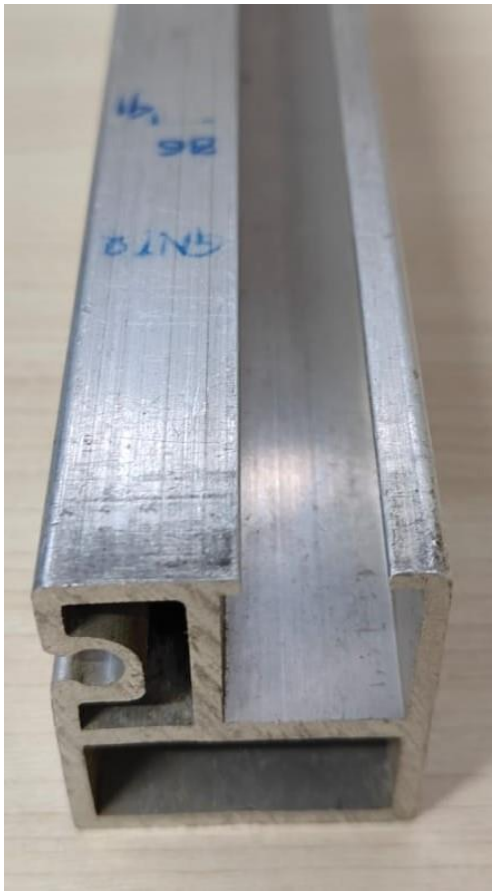

NIHVA
NIHVA Technologies Pvt. Ltd.

Special Extruded aluminium profile:-

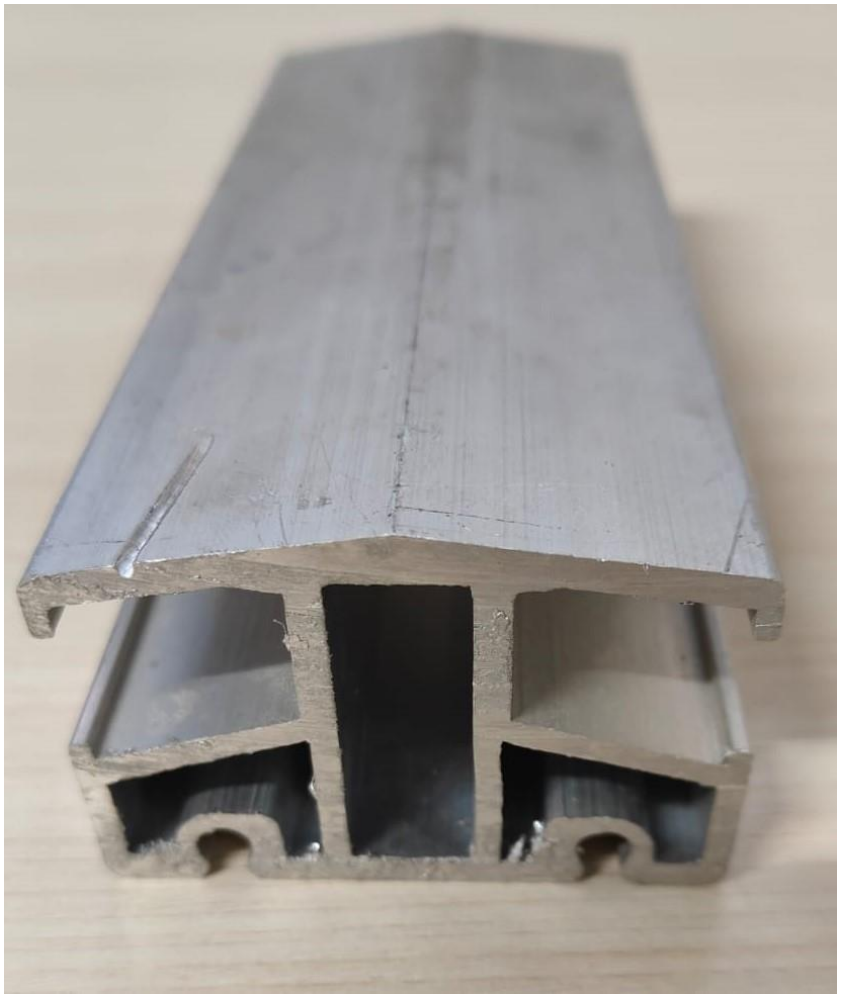



NIHVA
NIHVA Technologies Pvt. Ltd.

EPDM Rubber :-

1. We have special various types of EPDM rubber seals which are designed and manufactured only for NIHVA Technologies Pvt Ltd.


2. We used EPDM rubber seal which have shore hardness A60 with Tensile strength 115kg/cm2.

3. Our EPDM rubber seal are withstand in temperature upto120 degree Celsius.

4. Some sample photos of our special EPDM rubber as follows,

EPDM rubber seals :-



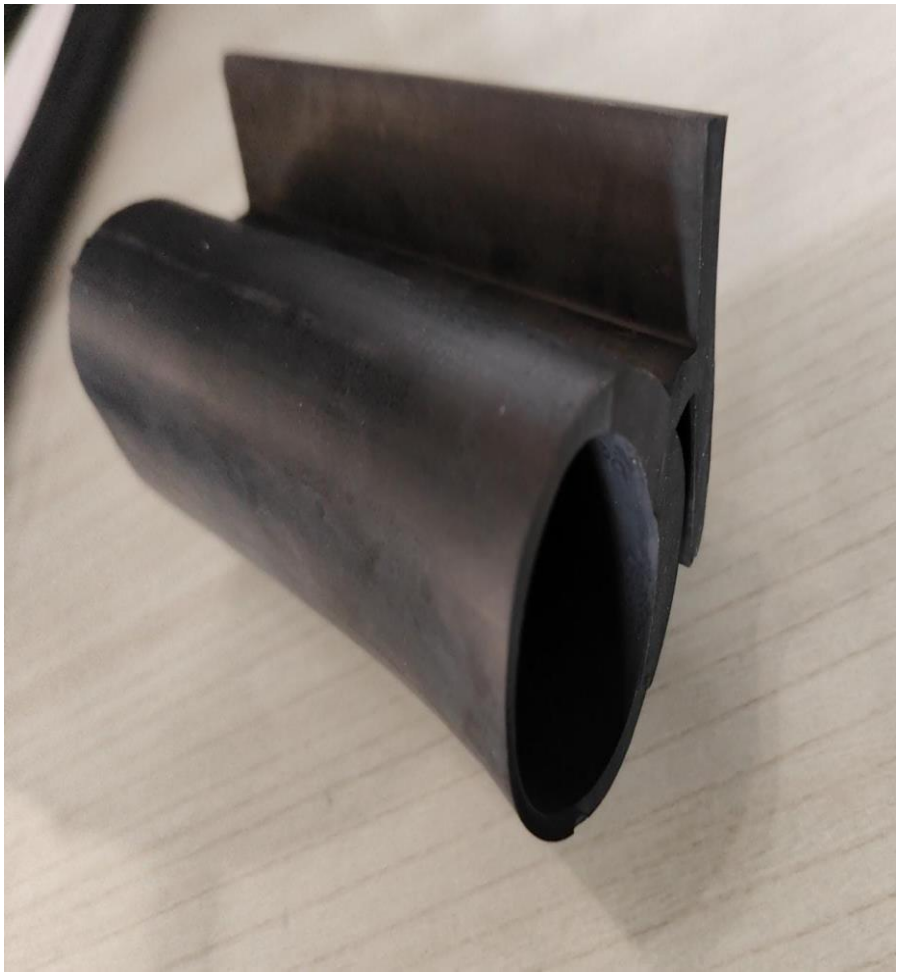

NIHVA
NIHVA Technologies Pvt. Ltd.

EPDM rubber seals :-







NIHVA
NIHVA Technologies Pvt. Ltd.

Polycarbonate sheet

1. We have used various types of polycarbonate sheet which having wide UV protection range and Scratch protection.

2. Control and testing of Polycarbonate sheet is carried out in accordance to ISO 9001:2008.

3. The Polycarbonate sheet not display a change in yellowness for a period of 10 years.

4. Polycarbonate sheet not break up to a result of impact of hail , measuring up to 25mm diameter attending a velocity up to 20m/s.

NIHVA

NIHVA Technologies Pvt. Ltd.





Polycarbonate sheet:-

NIHVA
NIHVA Technologies Pvt. Ltd.

PALRAM AMERICAS INC
9735 Commerce Cir
Kutztown, PA 19530 USA

E221255

Material Dsg	Color	Min. Thk mm	Flame Class	HWI	HAI	RTI Elec	RTI Mech Imp	RTI Mech Str	HVTR	D495	CTI
Polycarbonate (PC), flame retardant, "Palsun", furnished as sheets.											
Palsun FR (a)	NC	1.5	V-0	3	0	80	80	80	2	6	3
	ALL	3.0	V-0	3	0	80	80	80			
		6.0	V-0	0	0	80	80	80			
Polycarbonate (PC), "Palsun", furnished as sheets.											
Palsun	NC, RD, BK	1.0	V-2	4	0	80	80	80	0	5	2
	WT	0.9-1.1	V-2	4	0	80	80	80			
	ALL	3.0	V-2	2	0	80	80	80			
		6.0	V-2	0	0	80	80	80			
		10.0	V-2	0	0	80	80	80			
Palsun Basic FR	ALL	2.0	V-0	0	0	125	115	125	3	6	3
		3.0	V-0	0	0	125	115	125			

Polycarbonate sheet:-

PALRAM

Physical Properties

PALSUN® Basic FR

Material: Non - UV protected Fire Retardant Polycarbonate Sheet
Updated: 01/10/10 (MDW)

Notes: The table depicting the typical properties of PALSUN Basic FR sheet appears below. Note that some of the displayed properties are typical to polycarbonate (the material PALSUN Basic FR is made of) while others relate to a typical 3 mm (.118 in.) thick PALSUN Basic FR sheet.
Conditions, units and values in U.S. Customary units are presented in the table within parentheses. All the results depicted in the table were obtained by following the indicated ASTM method except where another method is indicated by the appearance of the symbol (b).

Property	Conditions (U.S. Customary)	Test Method	Units - SI (U.S. Customary)	Value (U.S. Customary)
Physical				
Density		D-1505	g/cm³ (lb/ft³)	1.2 (75)
Water Absorption	24 hr. @ 25°C	D-570	%	0.15
Mechanical				
Tensile strength at yield	10 mm/min (0.4 in./min)	D-638	MPa (psi)	62 (9,000)
Tensile strength at break	10 mm/min (0.4 in./min)	D-638	MPa (psi)	62 (9,000)
Elongation at yield	10 mm/min (0.4 in./min)	D-638	%	6
Elongation at break	10 mm/min (0.4 in./min)	D-638	%	110
Tensile Modulus of Elasticity	10 mm/min (0.4 in./min)	D-638	MPa (psi)	2,379 (345,000)
Flexural Modulus	1.3 mm/min (0.05 in./min)	D-790	MPa (psi)	2,379 (345,000)
Flexural Strength at Yield	1.3 mm/min (0.05 in./min)	D-790	MPa (psi)	93 (13,500)
Rockwell Hardness		D-785	R scale / M scale	120 / 70
Abrasion (Taber Process)	100 Cycles, CS-10F Wheel, 500g	D-1044	% Haze	5.0
Compressive Strength	1.3 mm/min (.05 in./min)	D-695	MPa (psi)	86 (12,500)
Compressive Modulus	1.3 mm/min (.05 in./min)	D-695	MPa (psi)	2379 (345,000)
Shear strength at Break	1.3 mm/min (.05 in./min)	D-732	MPa (psi)	69 (10,000)
Shear Modulus	1.3 mm/min (.05 in./min)	D-732	MPa (psi)	758 (110,000)
Thermal				
Long Term Service Temperature			°C (°F)	-35 to +100 (-175 to +212)
Short Term Service Temperature			°C (°F)	-35 to +130 (-175 to +266)
Heat Deflection Temperature	Load: 1.82 Mpa (264 psi)	D-648	°C (°F)	132 (270)
Vicat Softening Temperature	Load: 1 kg (2.2 lb)	D-1525	°C (°F)	150 (300)
Coefficient of Linear Thermal Expansion		D-696	10^{-5}/°C (10^{-5}/°F)	6.5 (3.6)
Thermal Conductivity		C-177	W/m°K (Btu-in./hr-ft²-°F)	0.21 (1.46)
Specific Heat Capacity		C-351	J/g/°K (Btu/lb/°F)	1.26 (0.31)
Optical				
Haze	3 mm (0.12 in.) Clear Sheet	D-1003	%	<0.5
Light Transmission	3 mm (0.12 in.) Clear Sheet	D-1003	%	89
Refractive Index	Clear Sheet	D-542		1.59
Yellowness Index	3 mm (0.12 in.) Clear Sheet	D-1925		<1
Electrical				
Dielectric Constant	50 Hz	D-150		3
	1 MHz	D-150		2.9
Dissipation Factor	50 Hz	D-150		0.9
	1 MHz	D-150		11
Dielectric Strength Short Time	500 V/s	D-149	kV/mm (V/mil)	23 (584)
Surface Resistance	Kelley	D-257	Ohm	5.1×10^{14}
Volume Resistance	Kelley	D-257	10^{x} Ohm-cm	16
Comparative Tracking Index (CTI)		IEC 60112	Volts (Max)	3
Hot Wire Ignition (HWI)		UL746a	Ignition Range (PLC)	UL File #E222268
High Current Arc Ignition (HAI)		UL746a	Number of Arcs to Cause Ignition (PLC)	UL File #E222268
UL Flame Class	2mm and 3mm Sheet Thickness All Colors	UL94	Flame Rating	V-0
Relative Temperature Index (RTI)		UL 746b	C°(°F)	125 (257)

Major Installed Projects in FY 2022 -2023

NIHVA
NIHVA Technologies Pvt. Ltd.

Sr. No.	Zone	Location	Qty In Nos.
1	North Zone	Delhi	4
2		Moradabad	1
3		Chandigarh	1
4		Himachal Pradesh	1
5	West Zone	Pune	6
6		Mumbai	2
7		Valsad	1
8		Ahmedabad	6
9	South Zone	Bangalore	1
10		Hubli	1
11		Chennai	3
12		Tiruchirapalli	1
13	East Zone	Kolkata	
14		Odisha	
15		Assam	
16		Raipur	
		Total =	**28**

NIHVA

NIHVA Technologies Pvt. Ltd.

Key Installed Projects 2022-23

AURANGABAD

NIHVA

NIHVA Technologies Pvt. Ltd.



NANDED

NIHVA
NIHVA Technologies Pvt. Ltd.



CIVIL LINE, DELHI

NIHVA
NIHVA Technologies Pvt. Ltd.



MORADABAD

NIHVA

NIHVA Technologies Pvt. Ltd.



CHANDIGARH

NIHVA
NIHVA Technologies Pvt. Ltd.



PUNE

NIHVA

NIHVA Technologies Pvt. Ltd.



NIHVA
NIHVA Technologies Pvt. Ltd.

Gujrat



NIHVA
NIHVA Technologies Pvt. Ltd.

Haryana



NIHVA
NIHVA Technologies Pvt. Ltd.

Noida



NIHVA

NIHVA Technologies Pvt. Ltd.

Chandigarh



TIRCHY

NIHVA

NIHVA Technologies Pvt. Ltd.



NIHVA
NIHVA Technologies Pvt. Ltd.

Karnataka



NIHVA
NIHVA Technologies Pvt. Ltd.

Chennai



NIHVA

NIHVA Technologies Pvt. Ltd.





NIHVA

NIHVA Technologies Pvt. Ltd.



LONAVALA



NIHVA

NIHVA Technologies Pvt. Ltd.



JODHPUR



NIHVA

NIHVA Technologies Pvt. Ltd.





Pune

Video-



NIHVA

NIHVA Technologies Pvt. Ltd.

Project –Brahma corp

NIHVA

NIHVA Technologies Pvt. Ltd.


Site Photos


Viva
Viva
Viva
Viva
Viva


NIHVA
NIHVA


NIHVA

NIHVA Technologies Pvt. Ltd.

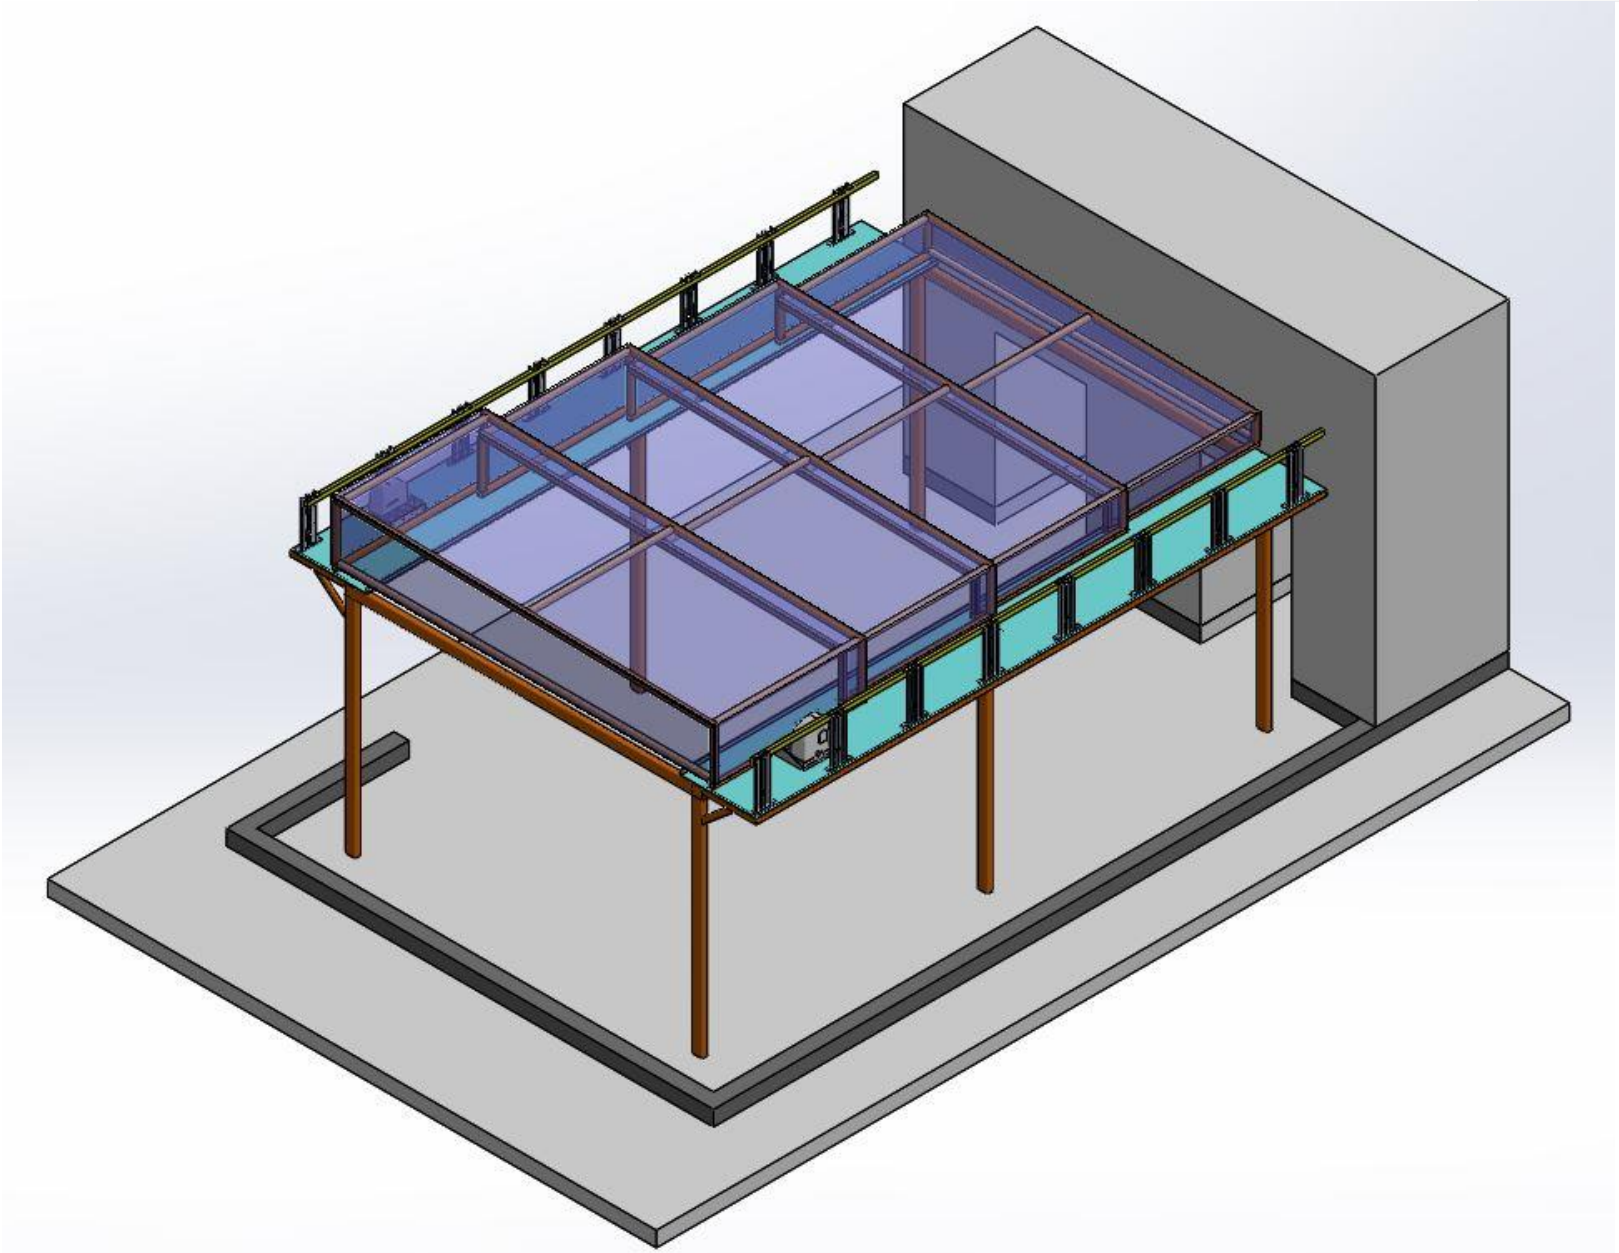


NIHVA


NIHVA Technologies Pvt. Ltd.

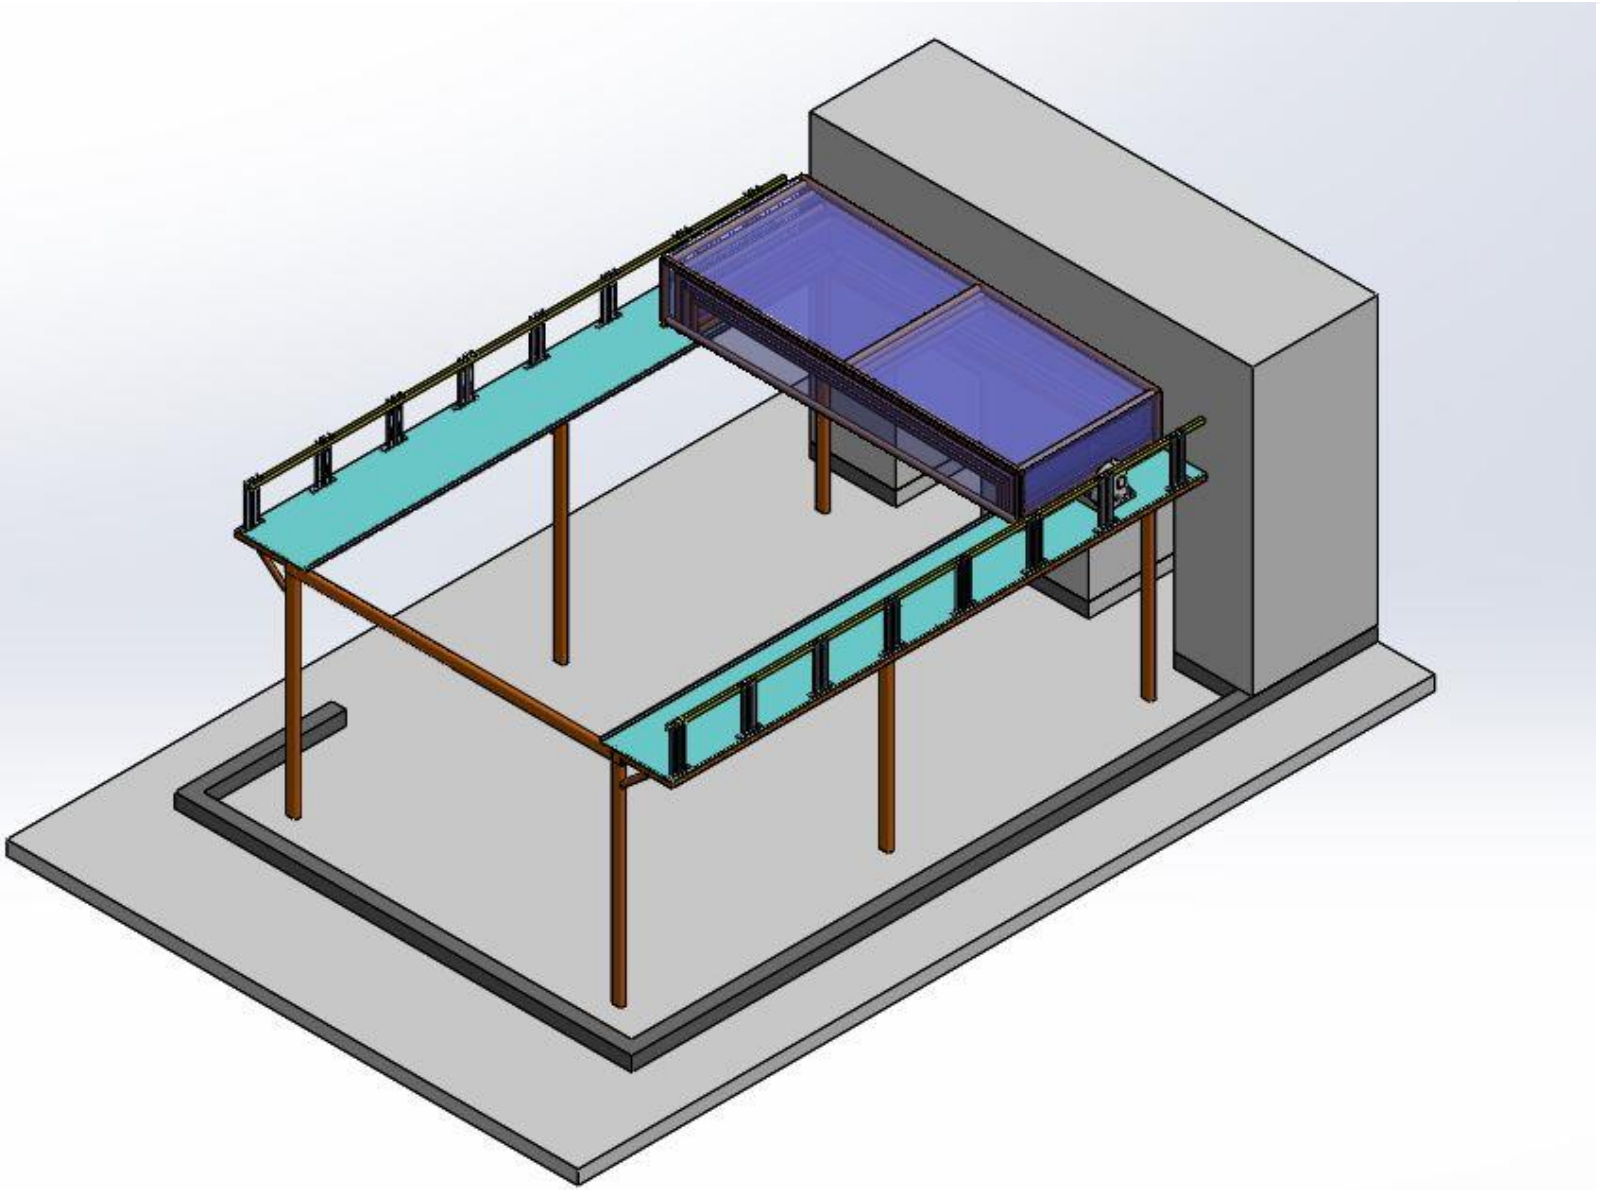


NIHVA

NIHVA Technologies Pvt. Ltd.

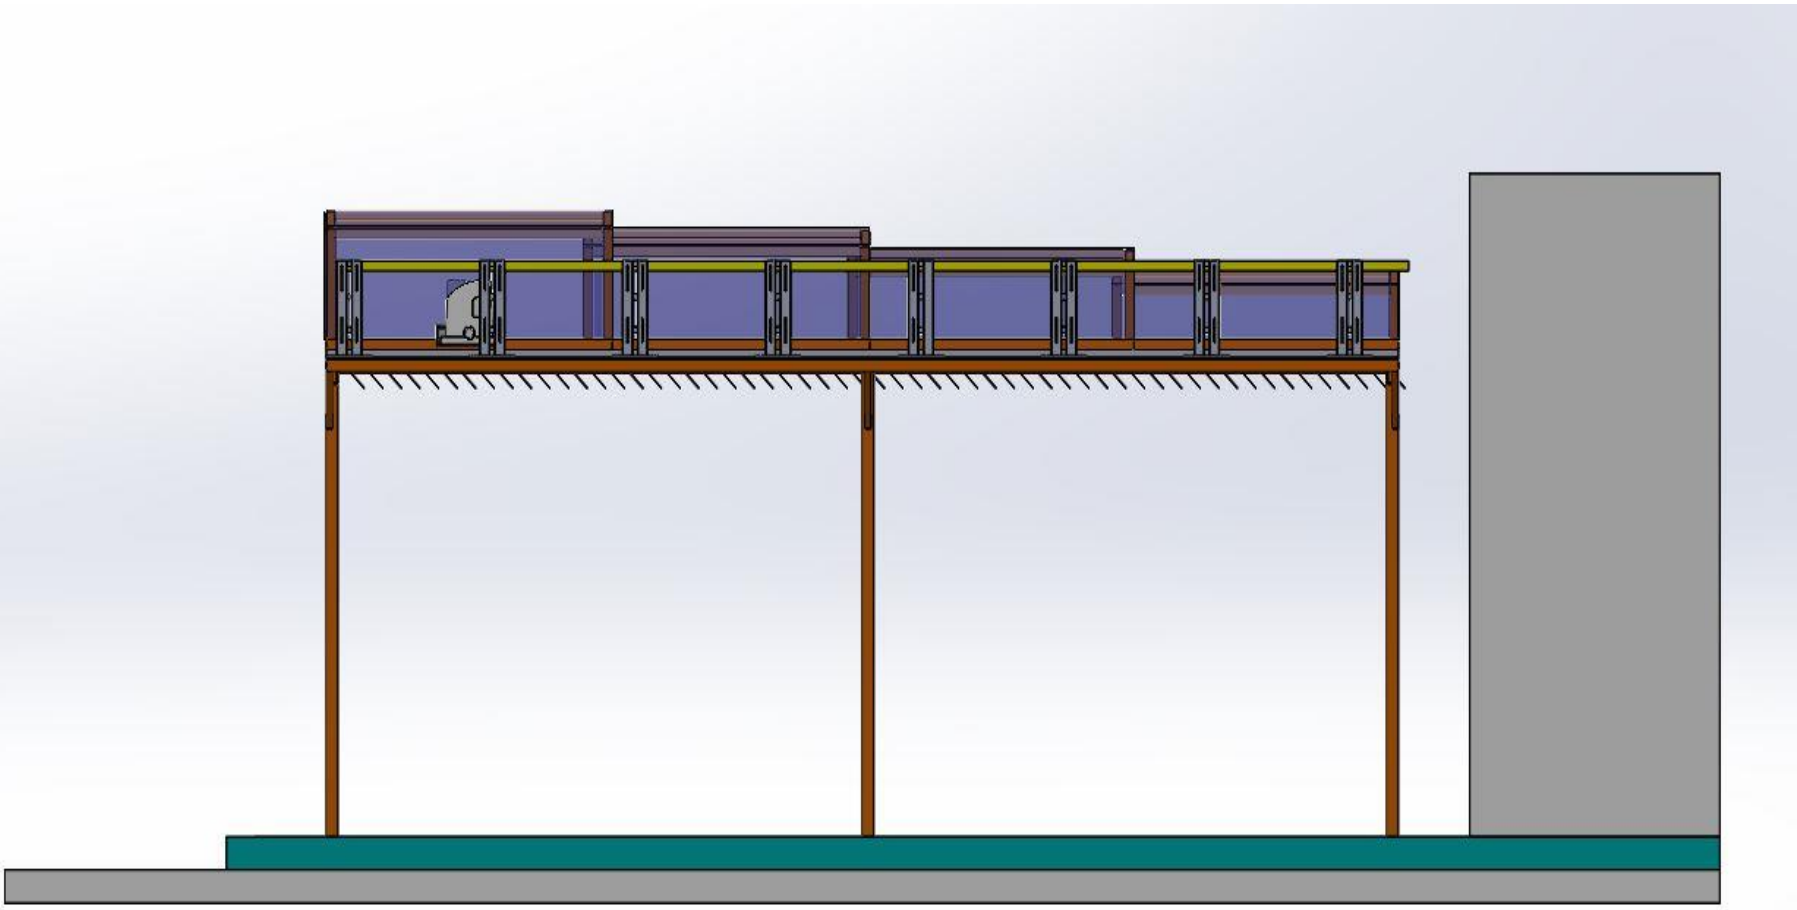

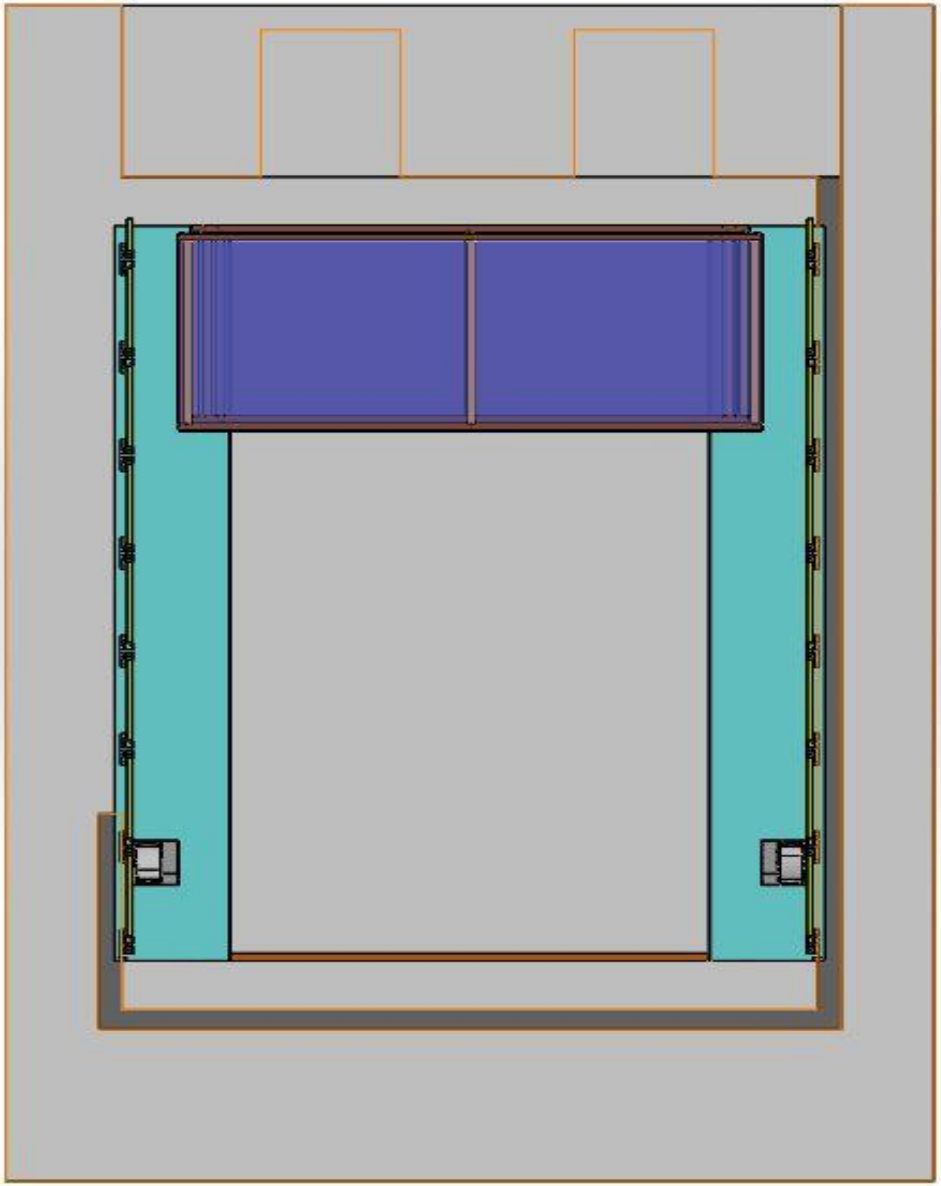

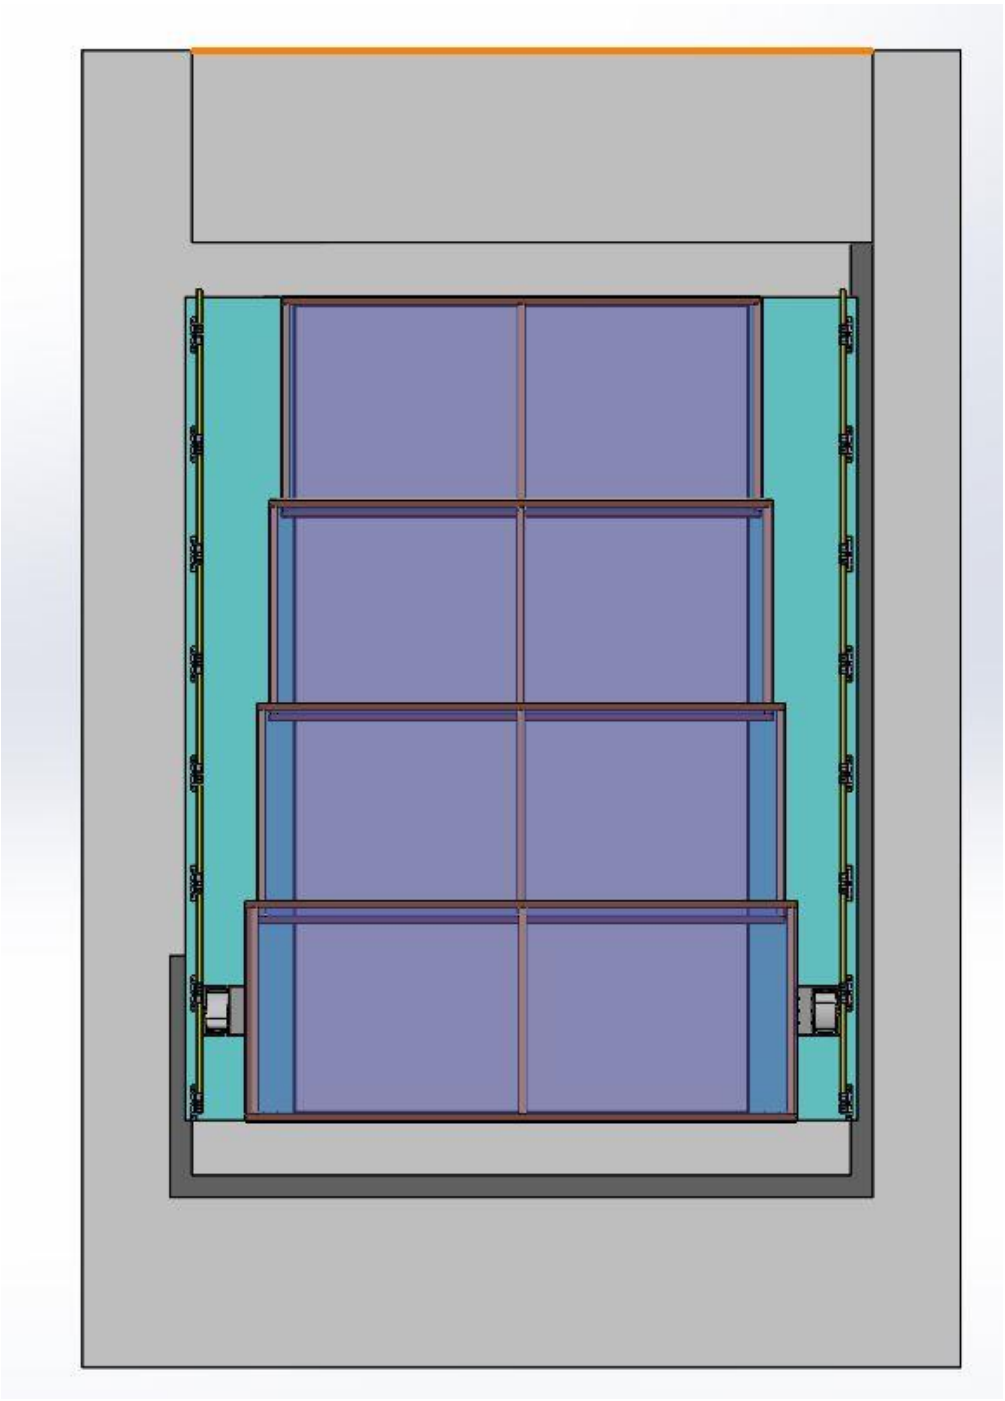





www.nihva.com

NIHVA

NIHVA Technologies Pvt. Ltd.

International Business Partners

ALBANY
ASSA ABLOY

MEGADOOR
ASSA ABLOY

Crawford
ASSA ABLOY

ACO

Teckentrup
Türen · Tore · Zargen