FOLDING DOORS / SLIDING PANELS

LOGISTIC SOLUTIONS

KOPRON



DATA SHEETS

FOLDING DOOR KPL CG


Folding door with ground tracks.

This is a sliding door with several panels folding to a side.

Sliding is guaranteed by a overhead steel track, including a space to gather the folds, and an in-built ground guide in galvanized steel.

Protection from atmospheric dust is guaranteed by brushes in the side frame and by EPDM finger protection gaskets..

FIG 39

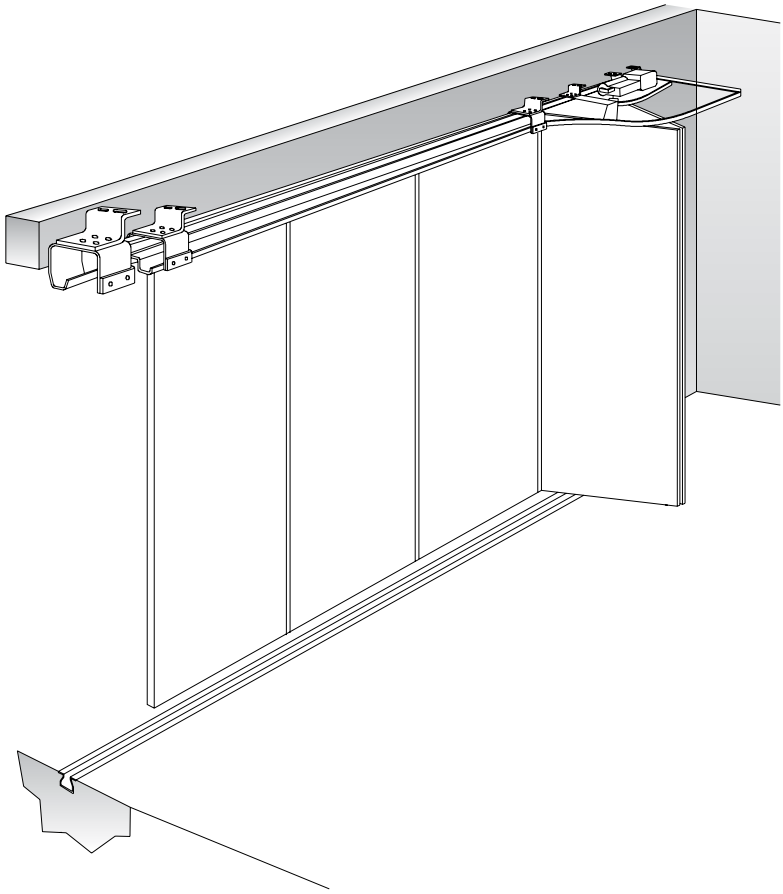

FOLDING DOOR WITH GROUND TRACK KPL CG

FIG 40

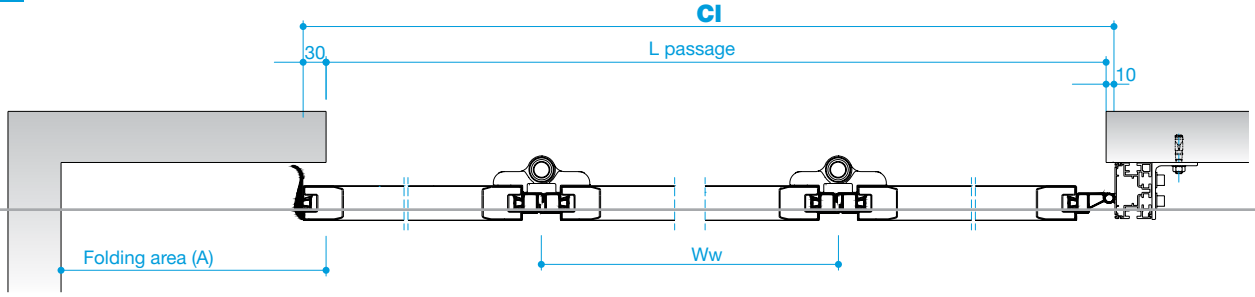




FIG 41

PANELS	Cl (Commercial Lenght) MIN	Cl (Commercial Lenght) MAX		Panel width (Ww)	PARAMETER A		Ch MAX
3+0	2210	4010		Cl/3	560		6000
4+0	2960	5360		Cl/4	560		6000
5+0	3710	6710		Cl/5	760		6000
6+0	4460	8060		Cl/6	760		6000
7+0	5210	9410		Cl/7	960		6000
8+0	5960	10760		Cl/8	960		6000
9+0	6710	12110		Cl/9	1160		6000
10+0	7460	13460		Cl/10	1160		6000
3+3	4400	8000		(Cl+30)/6	560	560	6000
4+4	5900	10700		(Cl+30)/8	560	560	6000
5+5	7400	13400		(Cl+30)/10	760	760	6000
6+6	8900	16100		(Cl+30)/12	760	760	6000
7+7	10400	18800		(Cl+30)/14	960	960	6000
8+8	11900	21500		(Cl+30)/16	960	960	6000
9+9	13400	24200		(Cl+30)/18	1160	1160	6000
10+10	14900	26900		(Cl+30)/20	1160	1160	6000


FIG 42



OVERHEAD TRACKS

In the KPL CG folding doors the overhead track consists of a rail provided with fixing brackets, a dividing fold track and space to gather the folds.


FIG 43

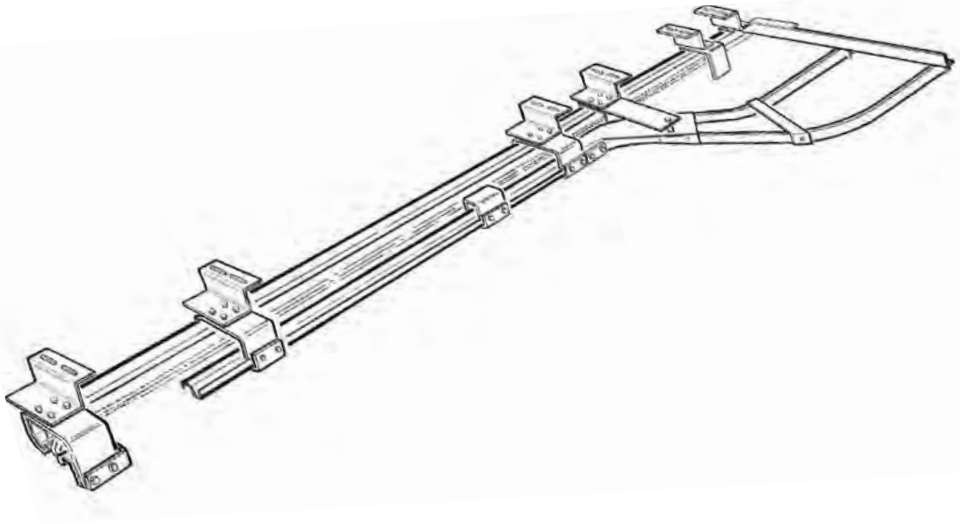

GROUND TRACKS

The ground tracks consists of a galvanized steel profile to build in the floor.

FIG 44

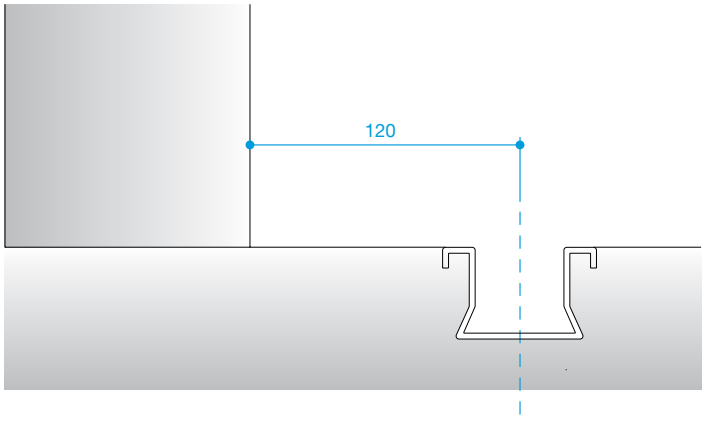

GROUND TRACKS

FIG 45





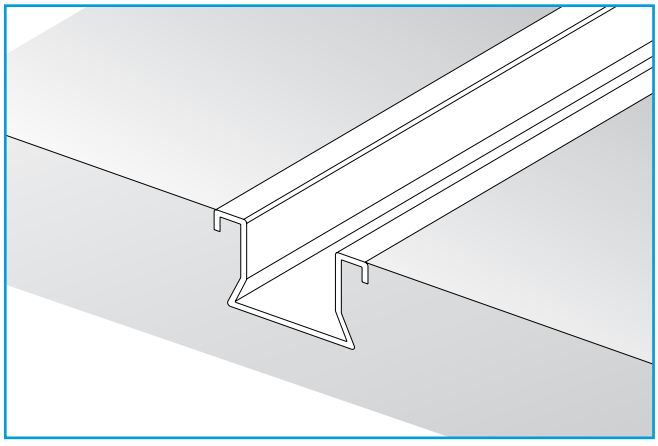


FIG 46

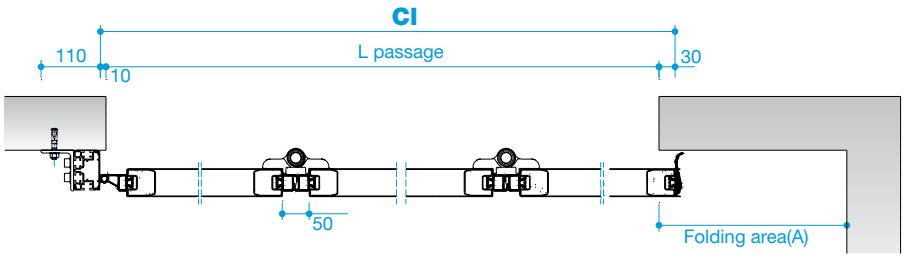


WALL FACED ASSEMBLY HORIZONTAL SECTION WITH SINGLE FOLDING

FIG 47

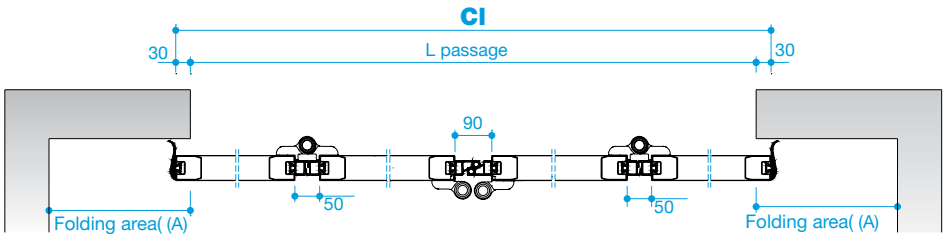

WALL FACED ASSEMBLY HORIZONTAL SECTION WITH DOUBLE FOLDING

FIG 48

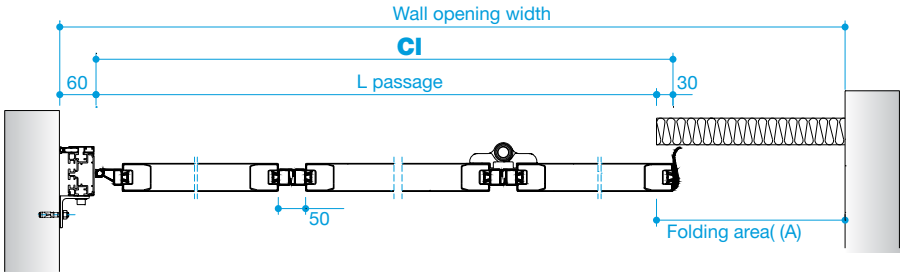


ASSEMBLY WITHIN WALL OPENING HORIZONTAL SECTION WITH SINGLE FOLDING

Cl = commercial length

In assemblies within doorway real sizes are reduced by 20 mm in width and by 10 mm in height to make up in case of uneven ceilings or walls.

FIG 49

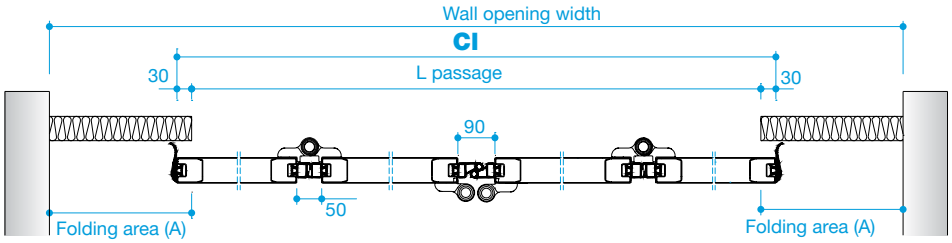

ASSEMBLY WITHIN WALL OPENING HORIZONTAL SECTION WITH DOUBLE FOLDING

VERTICAL SECTION (WALL FACED ANCHORING)

FIG 50


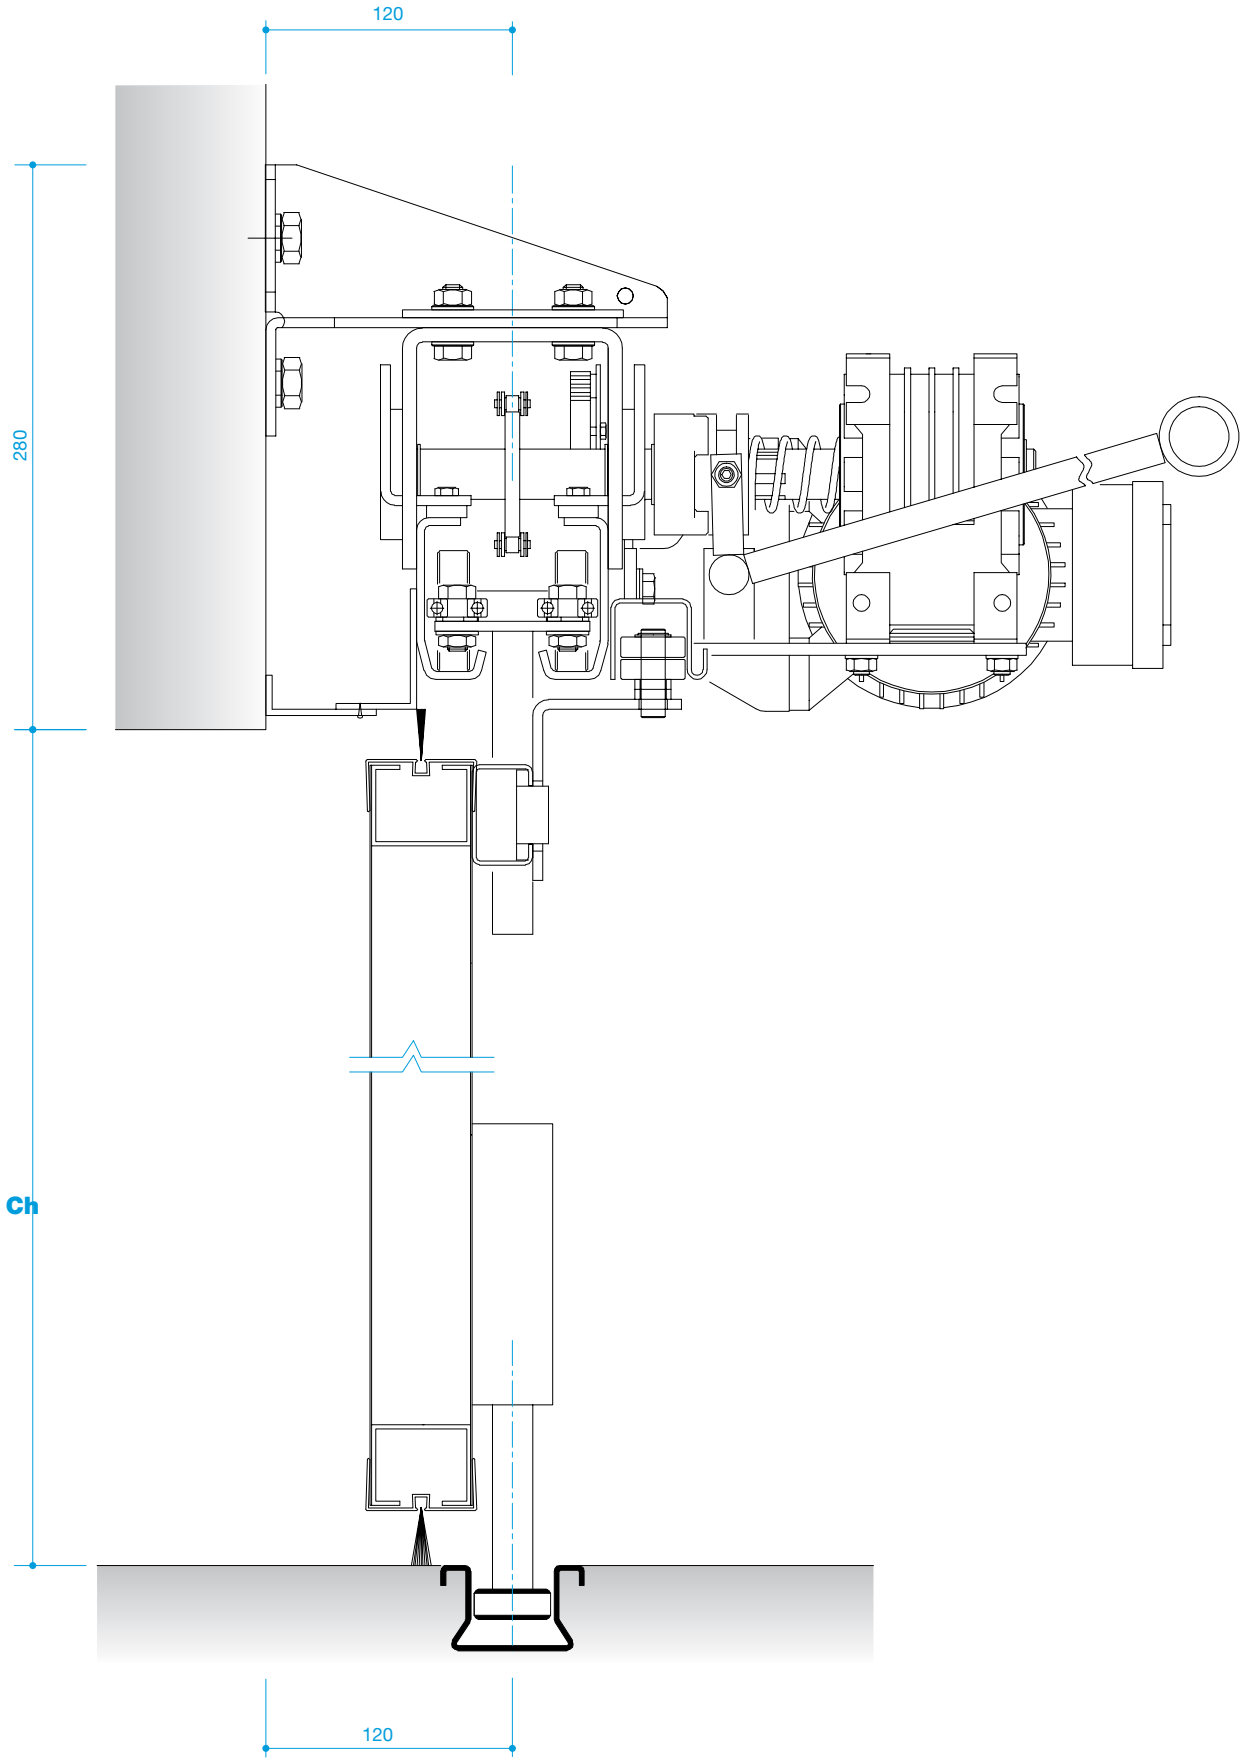


FIG 51

VERTICAL SECTION (ANCHORING TO THE CEILING)

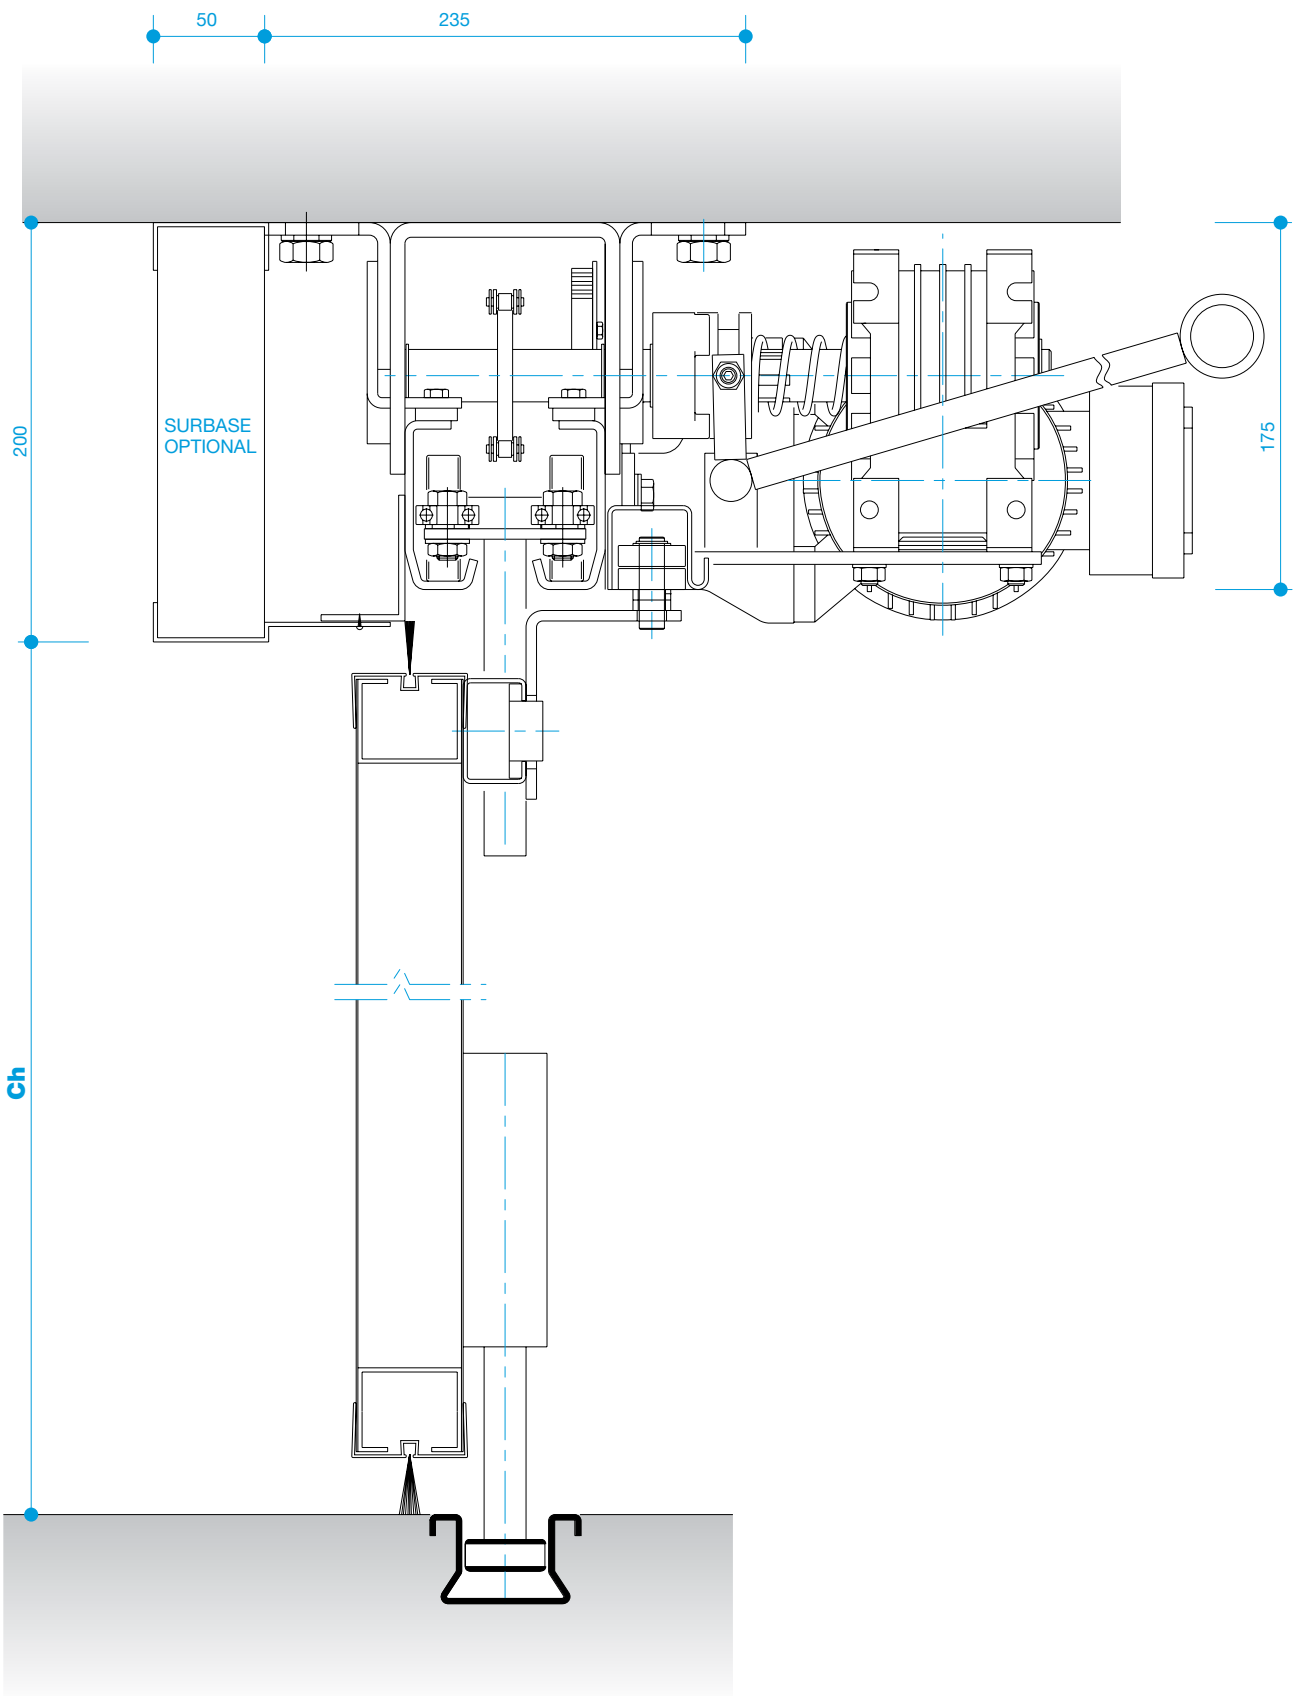

WICKET DOOR

Folding door KPL SG can have a wicket door with lock and internal/external handle.

The door consists of black painted aluminium profiles (Ral 9005) and in case of a drive unit it has a safety micro switch which prevents movements if the door isn't completely closed.


SIZES

X = 600 mm by Panel width > 950 mm
X = 700 mm by Panel width > 1050 mm
X = 800 mm by Panel width > 1150 mm
X = 900 mm by Panel width > 1250 mm

LIST OF WINDOWS WHICH CAN BE INSTALLED

WICKET DOOR	WINDOW		
	300x600	450x650	Ø 450
600	■		
700	■	■	■
800	■	■	■
900	■	■	■

FIG 52

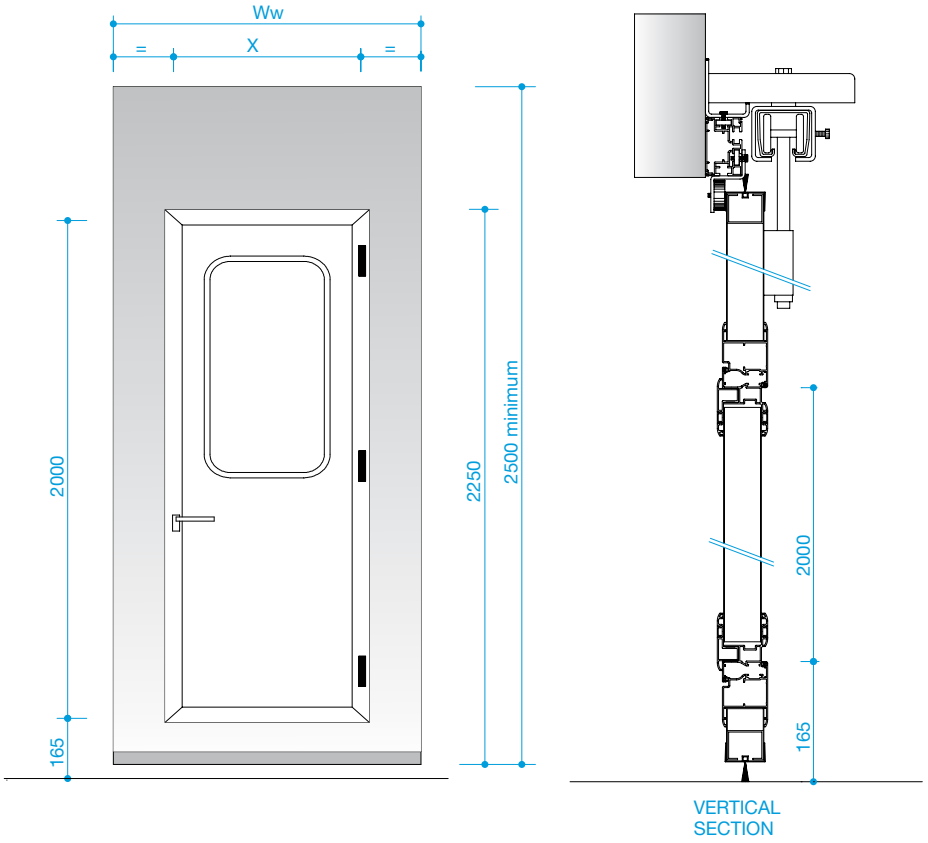

WICKET DOOR POSITIONING

FIG 53


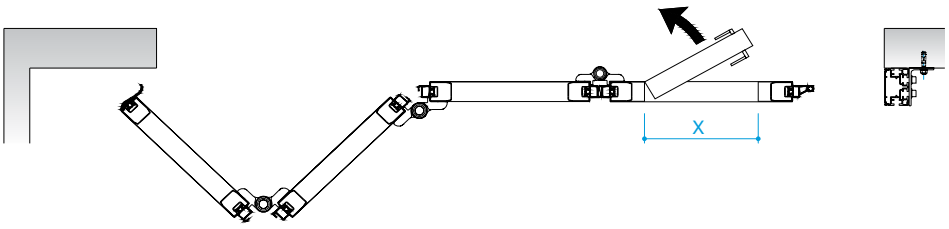



FIG 54

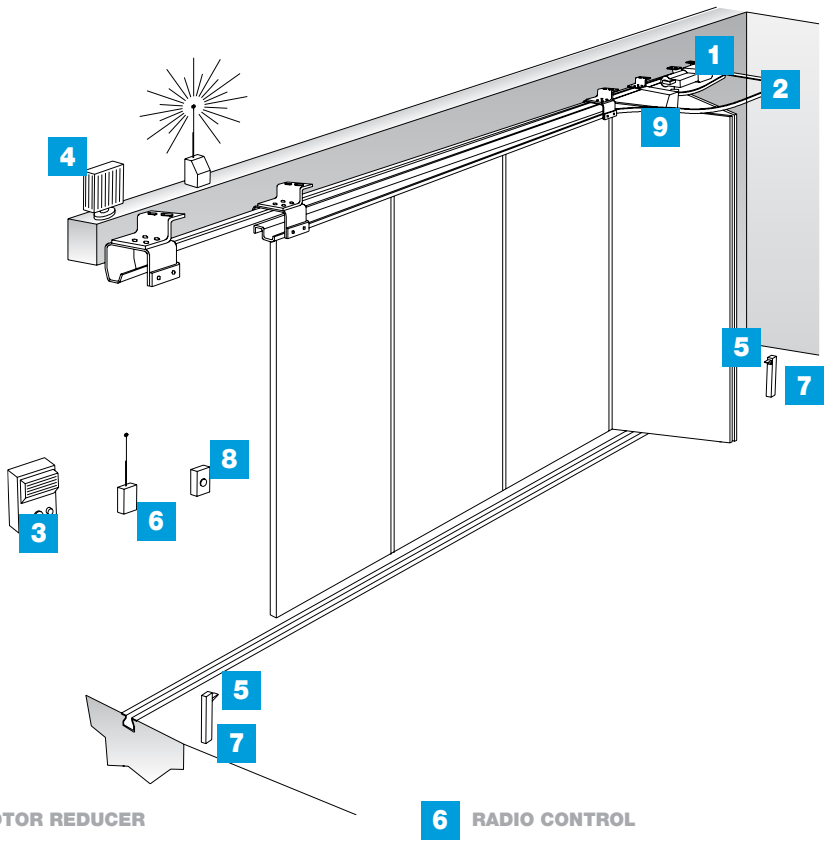

1 MOTOR REDUCER
2 SPACE FOR GATHERING THE FOLDS
3 ELECTRONIC EQUIPMENT
4 FLASHER
5 COUPLE OF PHOTOCELLS
6 RADIO CONTROL
7 PHOTOCELL TOWERS
8 KEY SELECTOR
9 MOTOR UNLOCK SYSTEM

FIG 55

MOTOR REDUCER CHARACTERISTICS	M/R-2000	T/FR-2000
Motor	230V (+10% -10%) 50Hz	400V (+10% -10%) 50Hz
Power	0,3 kW	0,37 kW
Capacitor	20 µF	
Max door weight	2000 kg *	2000 kg *
Couple supplied	40 Nm	40 Nm
Door speed	6,2 m/min	6,2 m/min
Operating temperature	-15 +60 °C	-15 +60 °C
Working frequency	S1 - 100%	S1 - 100%
Protection level	IP 30	IP 30
Control panel	DEC-SM	DEC-ST
Safety	Electronic clutch+ Reverser	Mechanical clutch

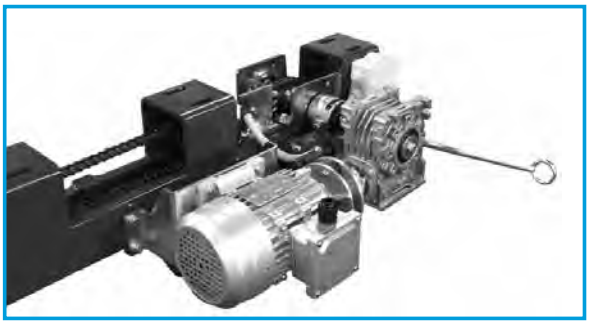

MOTORIZATION

Automatic doors the motor reducer is assembled inside the track.

Supply consists of:

- N°1 electromechanical nonreversable motor reducer with REVERSER system and travel stop already assembled and provided with cables 230V-50Hz
- Control panel

Upon request you can have the following options:

- Two-way and four-way radio controls
- Aluminium photocell towers
- Key selector
- Safety micro for lever bolt
- Safety micro for pedestrian door
- Yellow flasher 230V
- External couple of photocells


* NOTE

For weight you may consider 22 Kg/m2.

For doors with different characteristics from the one described other motors can be installed


OVERHEAD TRACK WITH MOTORIZATION

FIG 56

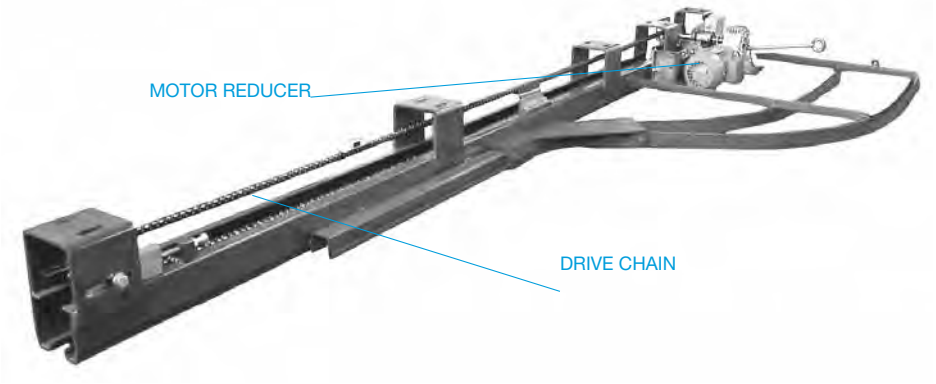


SIDE PARTING LINE WITH SPACE FOR GATHERING THE FOLDS ON THE RIGHT

FIG 57

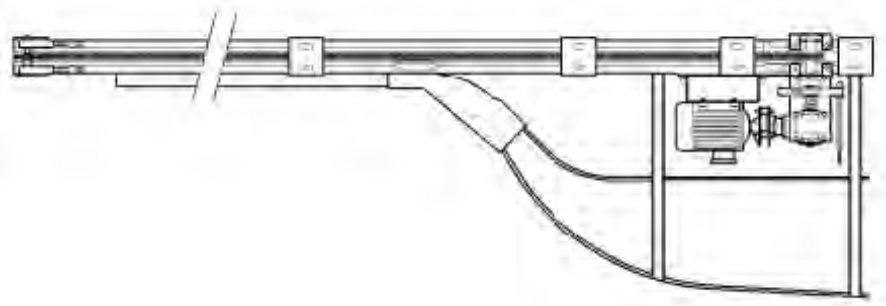


SIDE PARTING LINE WITH SPACE FOR GATHERING THE FOLDS ON THE LEFT

FIG 58

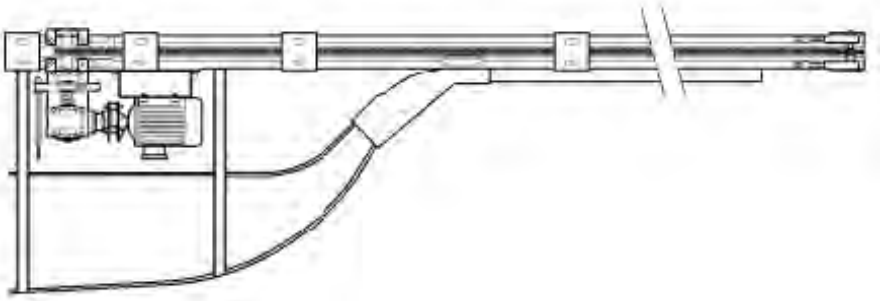

CENTRAL PARTING LINE

FIG 59

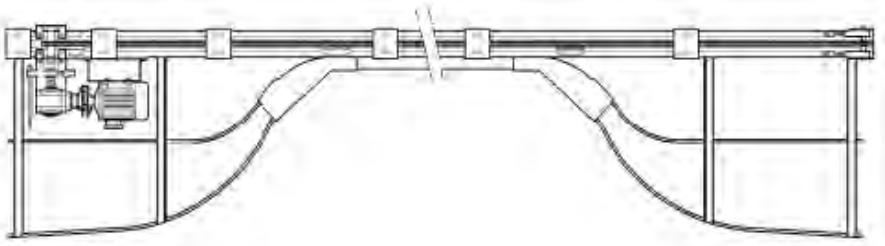


CENTRAL PARTING LINE

FIG 60




DRAWING 1

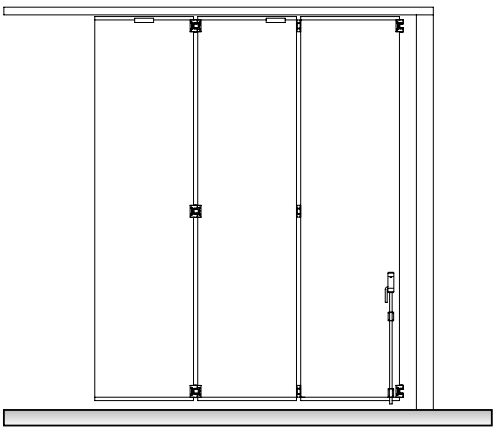

Assembly: INTERNAL/ESTERNAL

Type: 3 LEFT PANELS


DRAWING 2

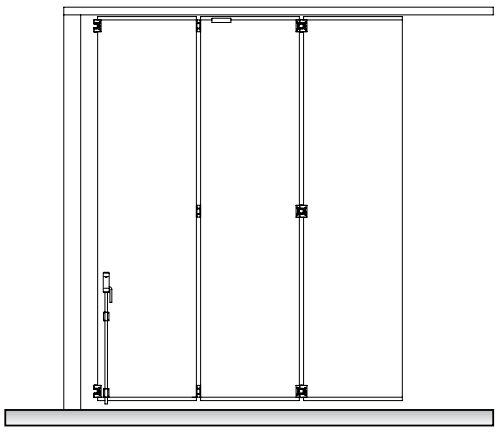

Assembly: INTERNAL/ESTERNAL

Type: 3 RIGHT PANELS


DRAWING 3

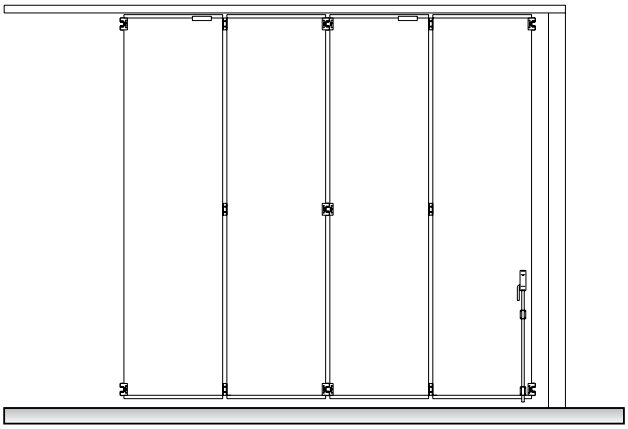

Assembly: INTERNAL/ESTERNAL

Type: 4 LEFT PANELS


DRAWING 4

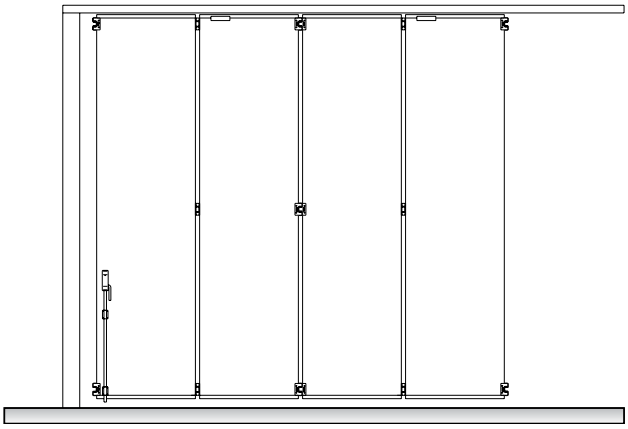

Assembly: INTERNAL/ESTERNAL

Type: 4 RIGHT PANELS


DRAWING 5

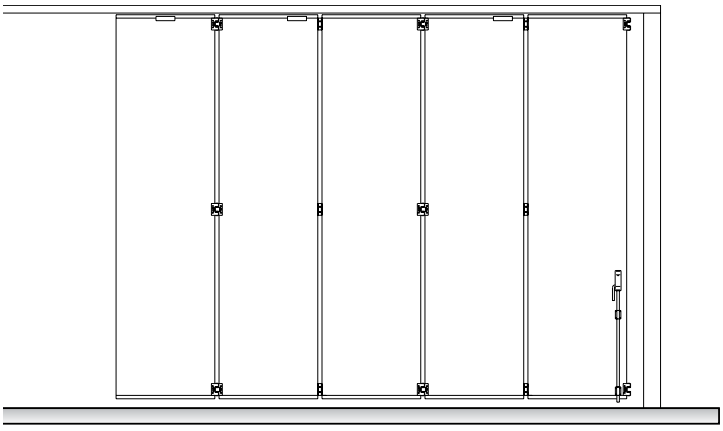

Assembly: INTERNAL/ESTERNAL

Type: 5 LEFT PANELS

DRAWING 6

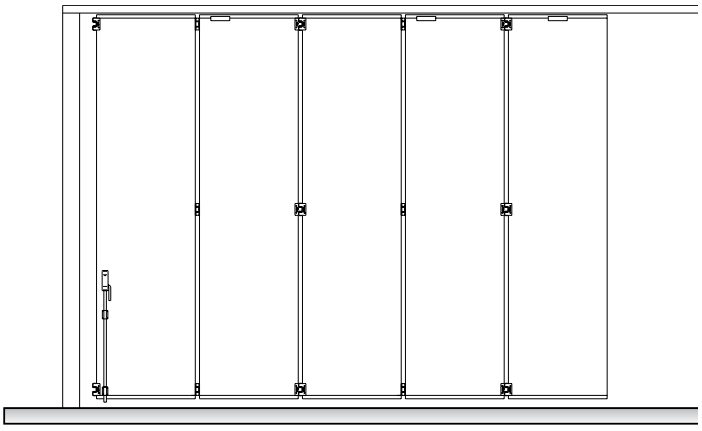


Assembly: INTERNAL/ESTERNAL

Type: 5 RIGHT PANELS

DOOR DRAWINGS KPL CG


DRAWING 7

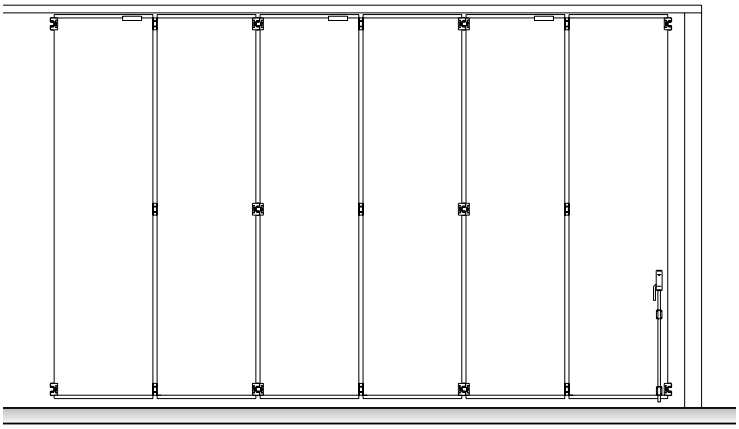

Assembly: INTERNAL/EXTERNAL

Type: 6 LEFT PANELS


DRAWING 8

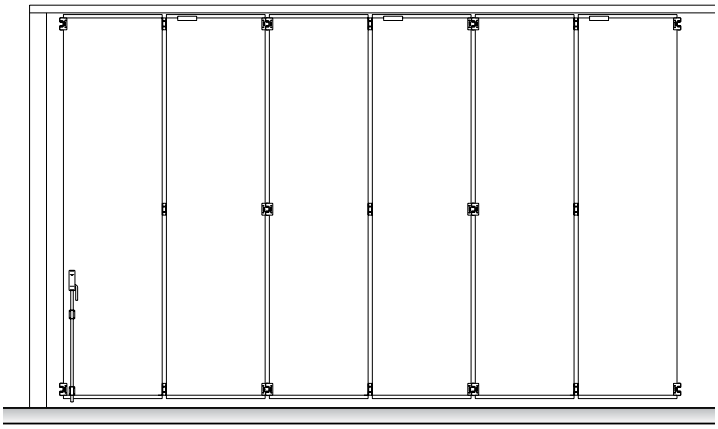

Assembly: INTERNAL/EXTERNAL

Type: 6 RIGHT PANELS


DRAWING 9

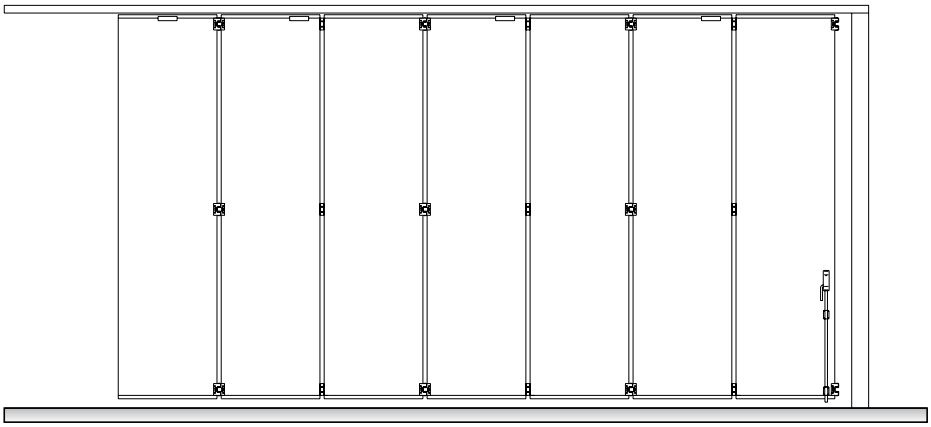

Assembly: INTERNAL/EXTERNAL

Type: 7 LEFT PANELS


DRAWING 10

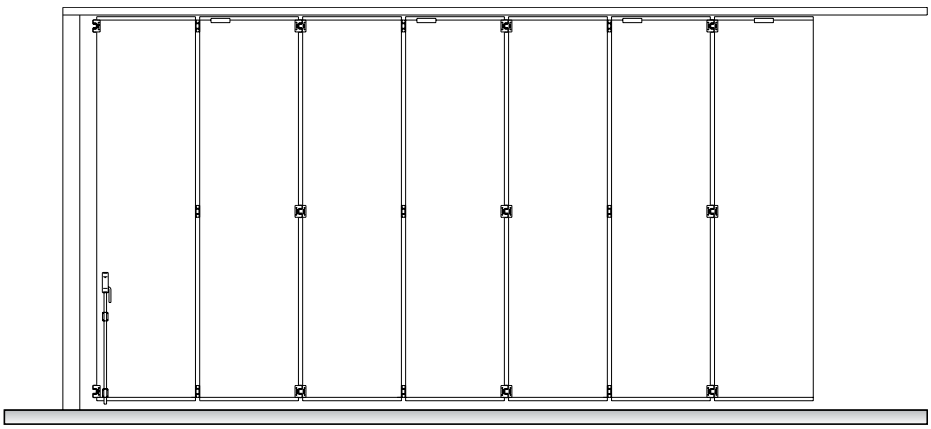

Assembly: INTERNAL/EXTERNAL

Type: 7 RIGHT PANELS


DRAWING 11

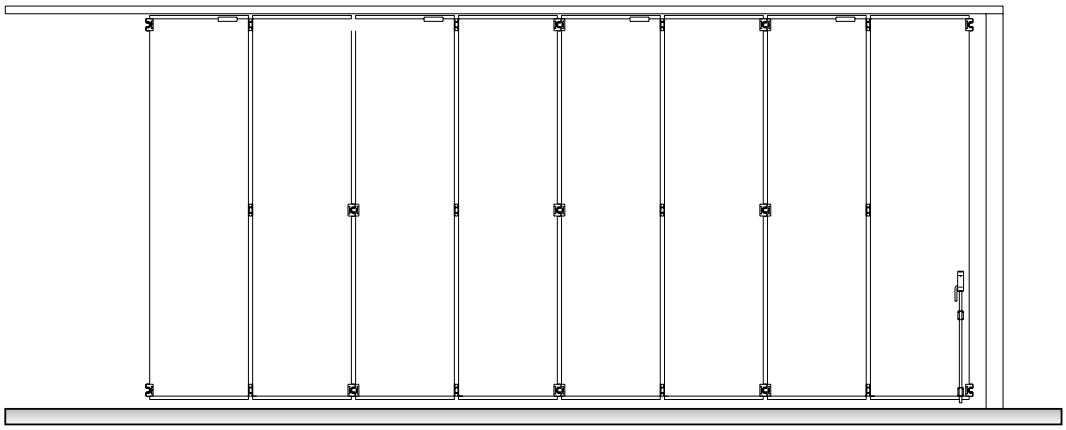

Assembly: INTERNAL/EXTERNAL

Type: 8 LEFT PANELS


DRAWING 12

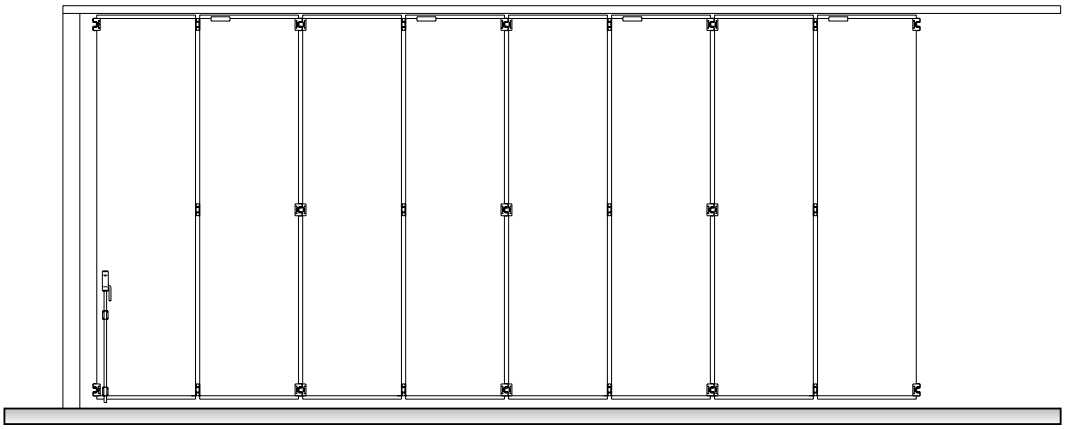

Assembly: INTERNAL/EXTERNAL

Type: 8 RIGHT PANELS

DRAWING 13

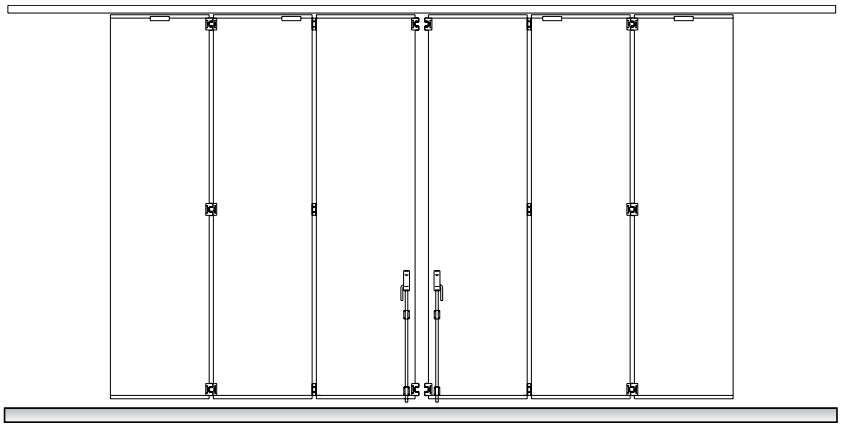


Assembly: INTERNAL/EXTERNAL

Type: 3 LEFT PANELS + 3 RIGHT


DOOR DRAWINGS KPL CG

DRAWING 14

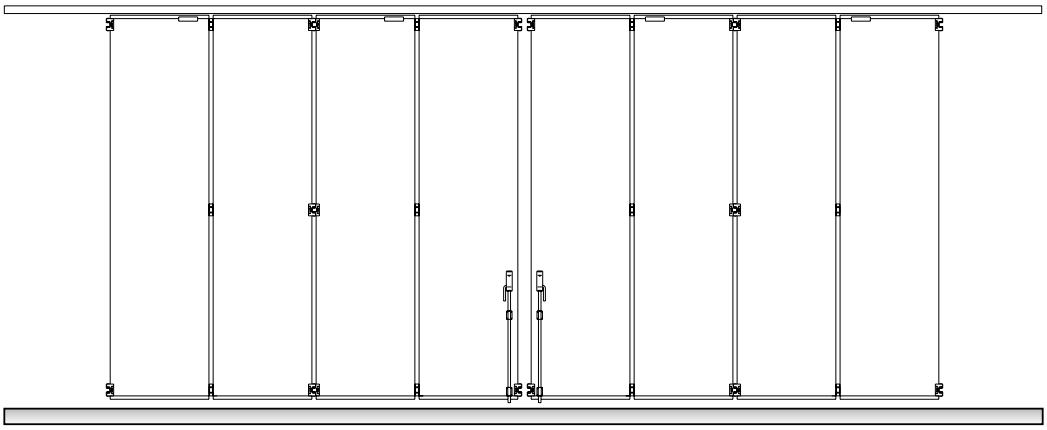


Assembly: INTERNAI/EXTERNAL
Type: 4 LEFT PANELS + 4 RIGHT

DRAWING 15

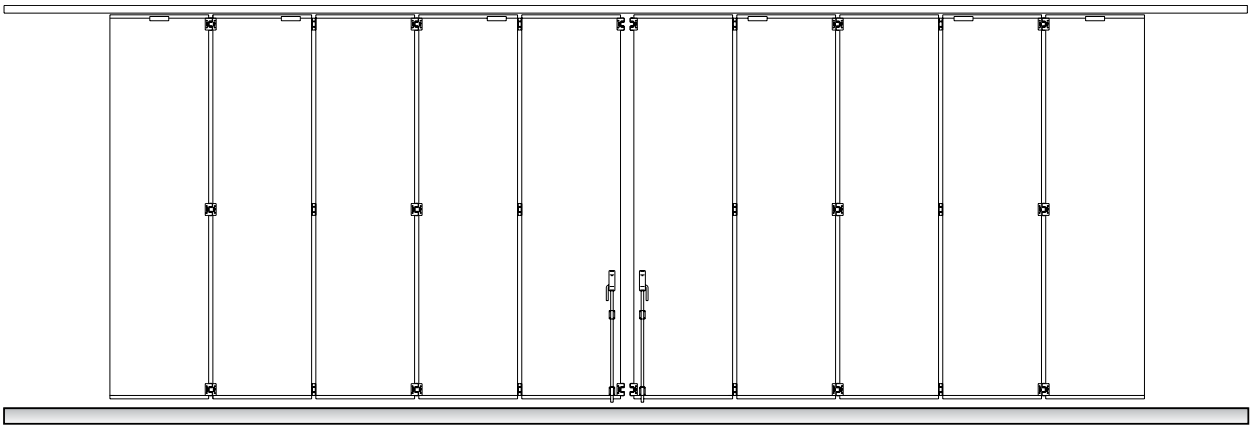


Assembly: INTERNAI/EXTERNAL
Type: 5 LEFT PANELS + 5 RIGHT

DRAWING 16

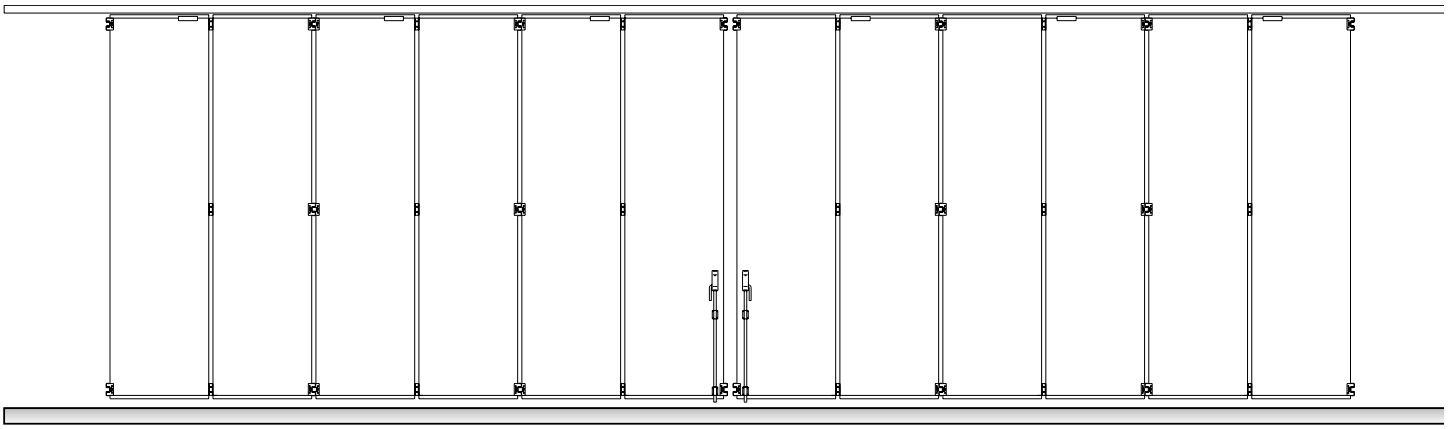

Assembly: INTERNAI/EXTERNAL
Type: 6 LEFT PANELS + 6 RIGHT

FIG 78

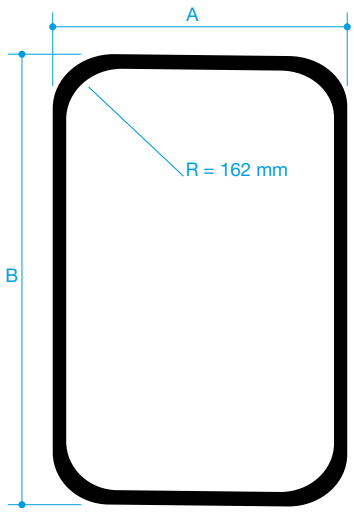


Commercial sizes	
A (mm)	B (mm)
750	1200
750	750
550	900
550	550
450	650
300	600

RECTANGULAR VISION PANELS

Vision panels with rubber EPDM profiles with rounded edges and Visarm transparent glass 4+4.

FIG 79

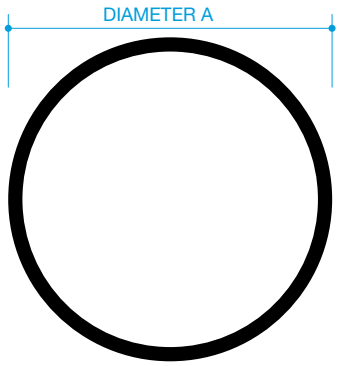


Commercial sizes
Diam. A (mm)
550
450

ROUND VISION PANELS

Vision panels with rubber EPDM profiles with Visarm transparent glass 4+4.


FIG 80

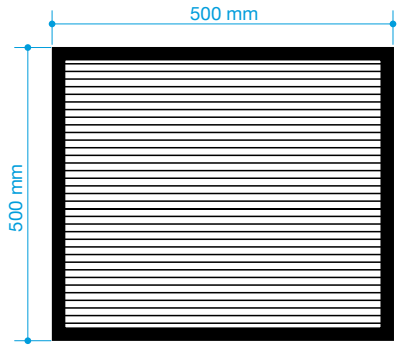

Aeration surface
1280 cmq

AERATION LOUVERS BIG SIZE

FIG 81

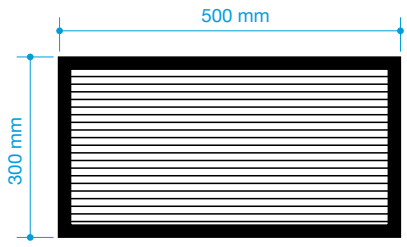


Aeration surface
695 cmq

AERATION LOUVER SMALL SIZE

MINIMUM SPACES TO KEEP WHEN INSERTING VISION PANELS AND LOUVERS

FIG 82

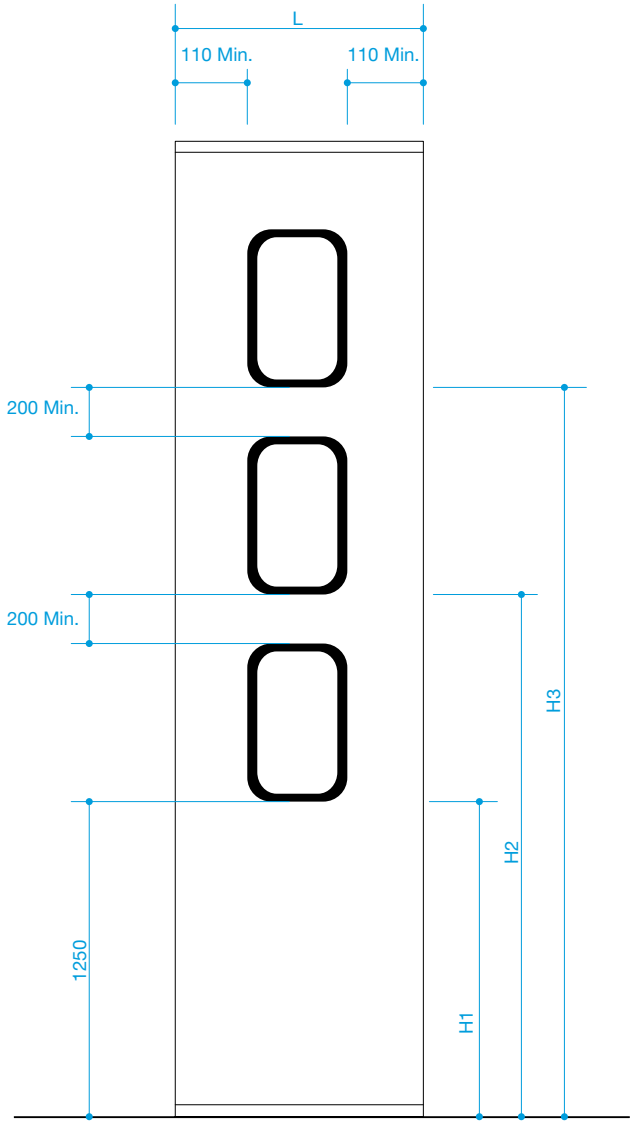

LOCK BOLT WITH KEY OPENING FROM EITHER INSIDE OR OUTSIDE

FIG 83



KOPRON TEAM SPORT

sponsor
F.C. Internazionale

WINNING PARTNERS FOR YOUR BUSINESS!

CERTIFICAZIONI
CERTIFICATIONS

Kopron attraverso la certificazione di qualità offre un'ulteriore garanzia sull'efficacia e l'efficienza dei propri prodotti.

Through certification Kopron offer a further guarantee on efficiency and quality of their products.



Quality Management System
Certificate ISO 9001:2008

www.kopron.com

LOGISTIC SOLUTIONS

Kopron S.p.A.
Via I Maggio s.n.
20064 Gorgonzola (Mi) - Italy
t +39 02 92 15 21
f +39 02 92 15 29 20
kopron@kopron.com

Export Sales
t +39 02 92 15 27 51
f +39 02 92 15 29 23
export@kopron.com

Kopron SERVICE
Assistenza e ricambi/ *Spare parts*
t +39 02 92 15 21
assistenza@kopron.com
www.kopronservice.com

Kopron France
Parc de Chavanne
817, Route des Frênes
69400 Arnas - France
t +33 04 74 68 16 57
www.kopron.fr

Kopron do Brasil
Rua Antonio Ovídio Rodrigues, 820
Pq Industrial III - Faz Gran
Jundiaí SP Brasil - CEP: 13213 - 180
t +55 11 45 25 25 20
www.kopron.com.br

Kopron China
江苏省 无锡市新区城南路207号
207 chengnan road
New district Wuxi Jiang su China
电话 *t* +86 0510 85 36 30 50
www.kopronchina.com