



" U " TYPE GUIDE

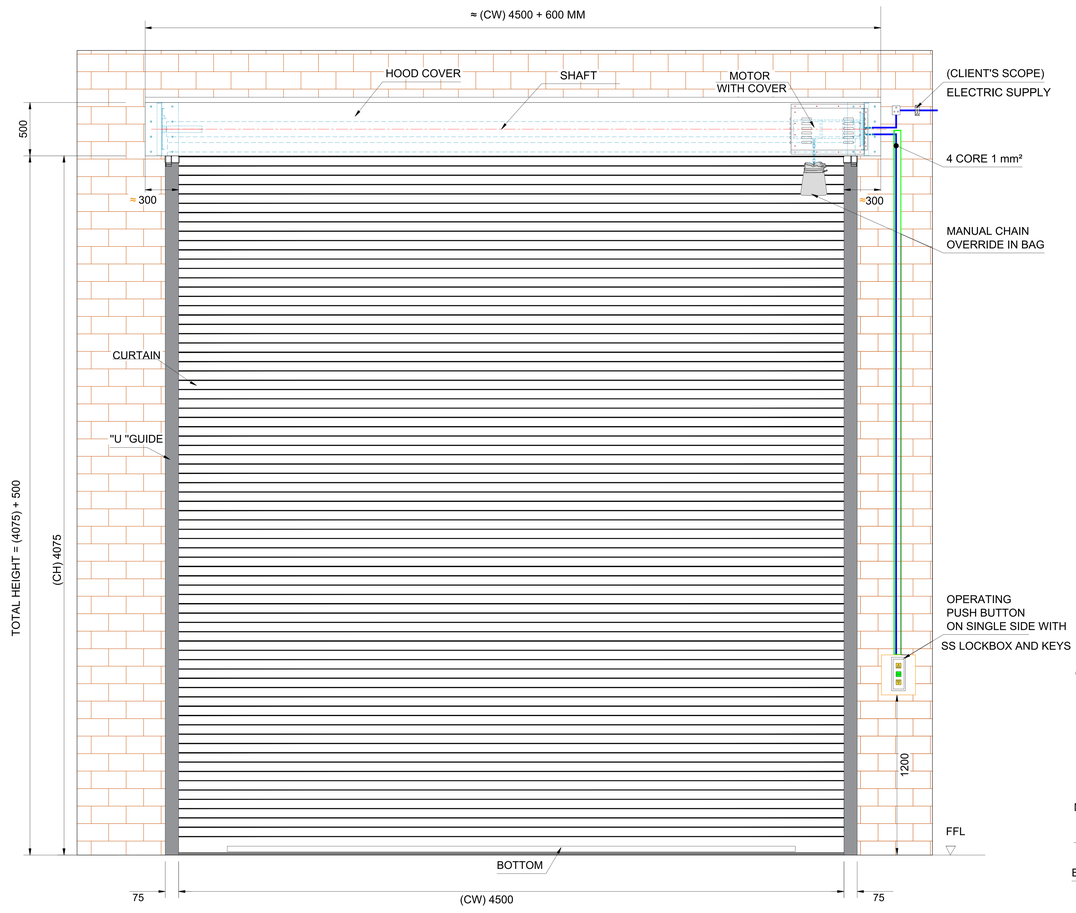

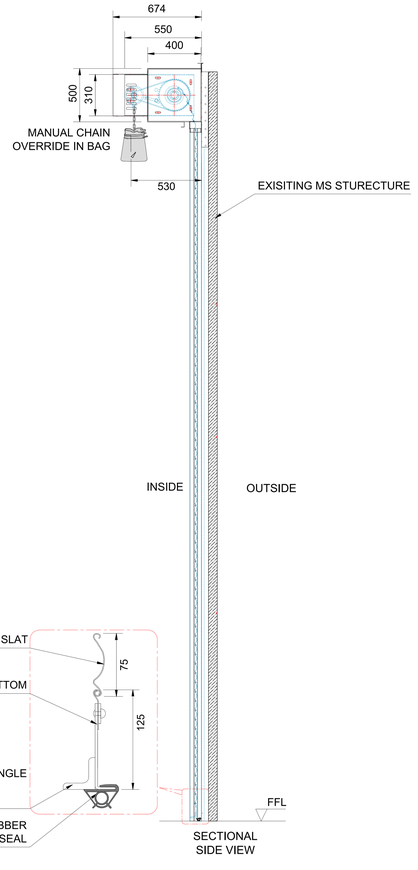

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside
3.	Mounting Surface	Side Brackets: MS Steel
4.	Slat	Curved 75 mm MS Sheet - 1.0 mm Thk
5.	Bottom Profile	MS Plate 100 x 2.5 mm thick with Angle Stiffner with rubber seal
6.	Guide Profile	U " Shape profile 75 x 2.5 mm Thk. (L-4225mm)
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Surface finish	Fire Retardant Paint
9.	Accessories	Push Button Single side
10.	Motor	Swift Roll Make
11.	Slat Qty	65 Nos

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4500 mm	4075 mm	01

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	S.J	20/09/2024	CLIENT -
CHECK	B.B	21/09/2024	PROJECT - ROLLING SHUTTER
APPROVAL	V.T.	21/09/2024	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/XX00 REV-00
			SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com