SELL YOUR PRODUCTS

- USD - $
  - Back
  - EUR - €
  - USD - $
  - GBP - £
  - CNY - ¥
  - BRL - R$
  - JPY - ¥
  - AUD - $
  - CAD - $
  - CHF - Fr
  - MXN - $
  - NZD - $

MyDirectIndustry

- English
  - Back
  - Français
  - Español
  - Italiano
  - Deutsch
  - 中文
  - 日本語
  - português
  - Русский

Direct

Search for a product, a branc

- Products
- Catalogs
- Projects
- News & Trends
- E-MAGAZINE

123



1. Catalogs >
2. ACE >
3. AGS Gas Springs Catalog

Website: ACE


Group: SKF VIDEO CAD

Catalogs


- Products
- Catalogs
- News & Trends
- Exhibitions

AGS Gas Springs Catalog
5 / 59Pages

Add to favorites

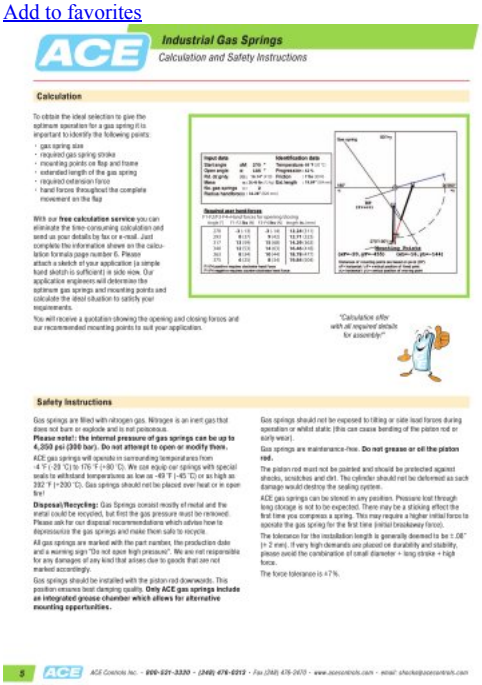

Catalog excerpts



oods, Panels and Guards eludes New Line of Stainless Steel Models Packaging, Food Processing, Medical,

Open the catalog to page 1



Function, Calculation and Mounting Tips Gas springs are universally accepted, covers, lids or other components by hand without using an external energy source. ACE gas springs are individually filled to a predetermined pressure to suit a custom- er's requirement (extension Force F^. The cross-sectional area of the piston rod and filling pressure determines the extension force F = p*A. During the compression of the piston rod, nitrogen flows through an orifice in the piston. The nitrogen is compressed by the volume of the piston pressure increases, so increasing the reaction force...

Open the catalog to page 2




Application Examples Doors open and close safely ACE industrial gas springs make opening and closing doors of rescue helicopters easier. The maintenance-free, sealed systems are installed in the access doors of helicopters of the type EC 135. There, they allow the crew to enter or exit the helicopter quickly, thus contributing to en- hanced safety. The GS-19-300-CC gas springs provide a defined retraction speed and secure engagement of the door lock. The integrated end position damper allows gentle closing of the door and saves wear and tear on the valuable, lightweight material. Industrial...

Open the catalog to page 3



Application Examples Stainless Steel Gas Springs in Yachts, Ships & Boats are ideal for lifting large, heavy hatches, lids, panels, lockers, companionways and access doors. ACE Gas Springs in military vehicles open heavy doors to help with quick ingress and egress of troops. Heavy hatches and panels are opened with minimal effort. Gas spring added to image below for application example only. Industrial Gas Springs from ACE remove the need for muscle power and provide controlled lifting motion for large, heavy doors, covers, lids, machine guards and access panels on production machinery. Gas...

Open the catalog to page 4



Calculation and Safety Instructions To obtain the ideal selection to give the optimum operation for a gas spring it is important to identify the following points: required gas spring stroke mounting points on flap and frame extended length of the gas spring required extension force hand forces throughout the complete With our free calculation service you can eliminate the time-consuming calculation and send us your details by fax or e-mail. Just complete the information shown on the calcu- lation formula page number 6. Please attach a sketch of your application (a simple hand sketch is...

Open the catalog to page 5




Industrial Gas Springs Calculation Formula Please send us a sketch with dimensions of your application! Sketch is required in order to calculate. Push type Pull type Desired Mounting Fittings End Fitting Input date Gas spring fixing points A The fixed point of the frame and the moving point of the flap are critical for the optimum operation. Therefore please attach a sketch of your application (a few lines with their dimensions are sufficient)! Moving mass* Number of gas springs in parallel* Number of movements* Ambient temperature If not shown by the sketch: Radius of centre of gravity...

Open the catalog to page 6




ndustrial Gas Springs GS-8 to GS-70 (Push Type) "Force adjustable to your specific requirements - with ACE industrial gas springs are mainte- nance-free and self-contained. They are avail- able with body diameters from .31" (8 mm) up springs offer a high service life with a wear-resistant coating on the piston rod. Also an integrated low friction bearing with grease chamber which provides a very low break away force (GS-19 to GS-40). It allows them to be mounted in any orientation, although rod downwards is preferable if you want to take advantage of the built-in end position damping. The...

Open the catalog to page 7




Industrial Gas Springs GS-8 (Push Type) Extension Forces 2 lbs to 22 lbs (10 N to 100 N) [when Piston Rod Compressed up to 29 lbs (130 N)] End Fitting Standard Dimensions – inches and (mm) Ø 0.16 (4.1) Ø 0.31 (8) A3,5 End Fitting Eye A3,5 Stud Thread B3,5 Angle Ball Joint C3,5 max. force 83 lbs (370 N) 0.31 (8) Radius R0.16 (R4) 0.47 (12) B3,5 0.20 (5) Ø 0.31 (8) 0.33 (8.5) 0.24 0.71 (6) (18) M4x0.7 0.39 (10) 36° D3,5 Ø 0.16 (4) 0.16 (4) 0.31 (8) 0.20 (5) E3,5 0.28 (7) G3,5 0.16 (4) Rod Shroud W3,5-8 Stroke Ø 0.12 (3) Ø 0.31 (8) 0.31 (8) 0.63 (16) Ø 0.31 24° (7.8) Ø 0.21 0.16 (5.3) (4) 0.47...

Open the catalog to page 8




Industrial Gas Springs GS-10 (Push Type) Extension Forces 2 lbs to 22 lbs (10 N to 100 N) [when Piston Rod Compressed up to 27 lbs (120 N)] End Fitting Standard Dimensions – inches and (mm) Ø 0.16 (4.1) Ø 0.31 (8) 0.16 (4) thick 0.16 (4) thick A3,5 Ø 0.16 (4.1) End Fitting Eye A3,5 Stud Thread B3,5 Angle Ball Joint C3,5 max. force 83 lbs (370 N) 0.31 (8) Radius R0.16 (R4) 0.47 (12) B3,5 C3,5Ø 0.51 0.20 (5) Ø 0.31 (8) (13) 0.33 (8.5) 0.24 0.71 (6) (18) M4x0.7 0.39 (10) 36° Ø 0.16 (4) 0.16 (4) 0.31 (8) 0.20 (5) E3,5 0.28 (7) G3,5 0.16 (4) Ø0.39 (10) 0.31 (8) 0.63 (16) Ø 0.31 24° (7.8) Ø 0.21...

Open the catalog to page 9



Industrial Gas Springs AGS-15 (Push Type) Extension Forces 2 lbs to 90 lbs (10 N to 400 N) End Fitting R0.2 (R5) A Standard Dimensions – inches and (mm) 0.12 thick (3 thick) Ø 0.33 (8.5) Eye Ø 0.24 (6) 0.27 (7) B Stroke Angle Ball Joint 0.20 (5) Ø 0.32 (8) Ø 0.51 (13) 0.32 (8) 0.47 (12) 0.87 (22) M5x0.8 0.39 (10) 36° Ø 0.20 (5) D 0.20 (5) 0.39 (10) 0.24 (6) E 24° Ø 0.24 (6) 0.39 (10) 0.79 (20) 0.51 Ø (13) Ø 0.18 0.39 (4.5) (10) 0.24 (6) 0.47 (12) 0.39 (10) M5x0.8 1.18 (30) L - extended inches (mm) 5.79 (147) 7.36 (187) 8.94 (227) 10.51 (267) 12.87 (327) 16.81 (427) AGS-15-150-AC-V-150...

Open the catalog to page 11




Industrial Gas Springs AGS-19 (Push Type) Extension Forces 11 lbs to 157 lbs (50 N to 700 N) End Fitting Standard Dimensions – inches and (mm) Ø 0.32 (8.1) A Ø 0.55 (14) Eye 0.55 (14) Radius R0.28 (R7) Stroke 0.79 (20) B 0.39 (10) Ø 0.51 (13) 0.47 (12) 0.59 (15) 1.18 (30) M8x1.25 0.65 (16.5) 36° D Ø 0.31 (8) 0.31 (8) 0.63 (16) E 0.39 (10) 24° Ø 0.31 (8) 0.63 (16) 1.26 (32) 0.63 Ø (16) Ø 0.24 0.47 (6) (12) 0.31 (8) 0.51 (13) 0.47 (12) M8x1.25 1.42 (36) 0.87 (22) H 1.22 (31) Ø 0.79 (20) Ø 0.75 (19) Stroke inches (mm) 3.94 (100) 5.91 (150) 7.87 (200) 9.84 (250) Model AGS-19-100 AGS-19-150...

Open the catalog to page 12

All ACE catalogs and technical brochures

1.

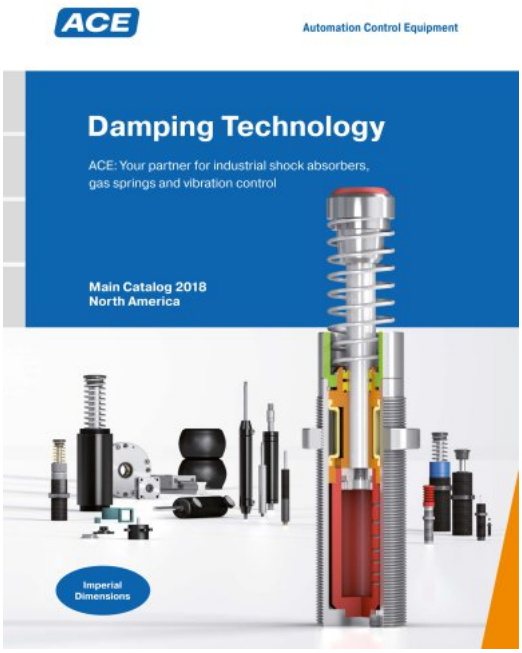

Damping Technology 2018

294 Pages


2.



Damping Technology

306 Pages


3.

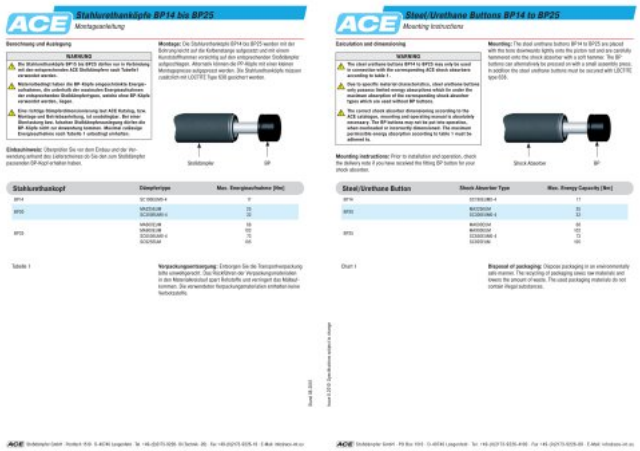

ACE Accessories BP-SteelUrethaneButton Mounting

1 Pages


4.

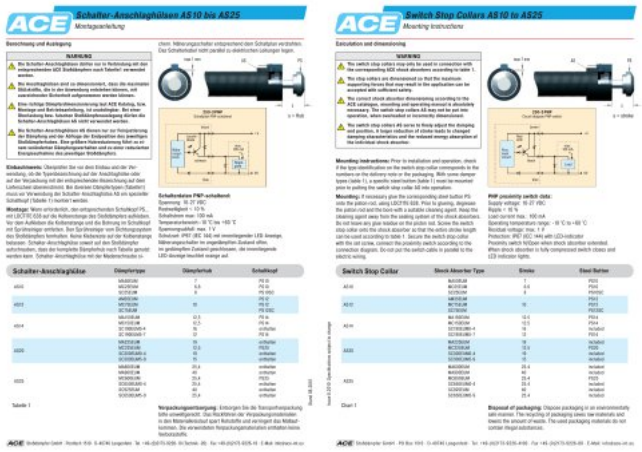

ACE Accessories AS-SwitchStopCollar Mounting

1 Pages

5.

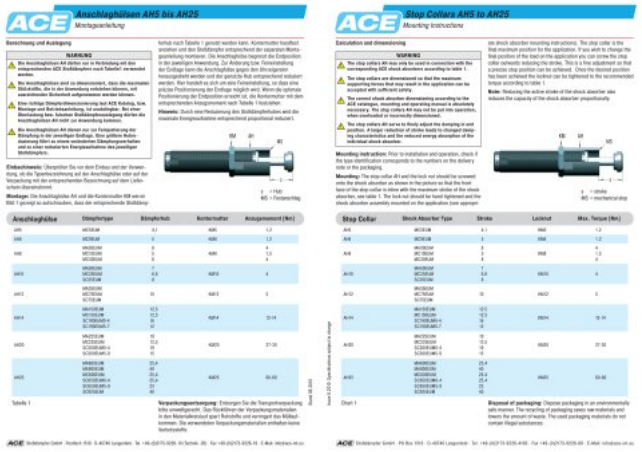

ACE Accessories AH-StopCollar Mounting

1 Pages


6.



Mechanical Motion & Vibration Controls

16 Pages


7.

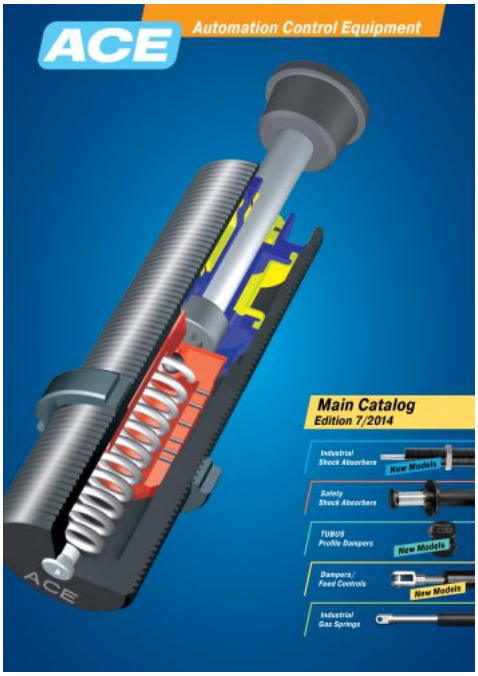

ACE Main Catalog

212 Pages

8.

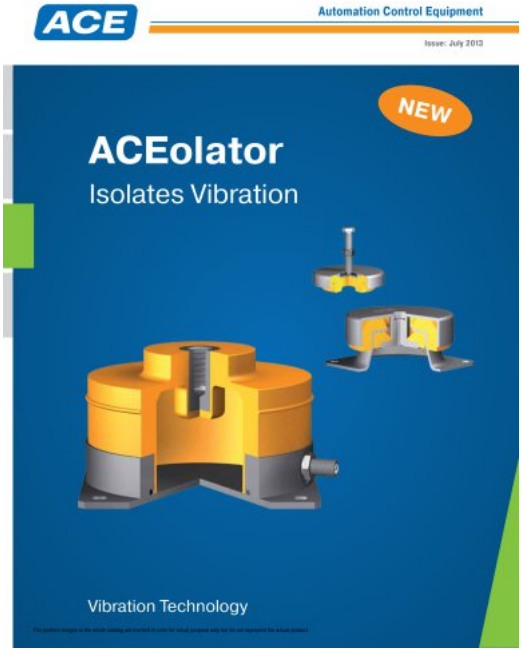

ACEolator Isolates Vibration


68 Pages

9.



Rotary Dampers Catalog

37 Pages

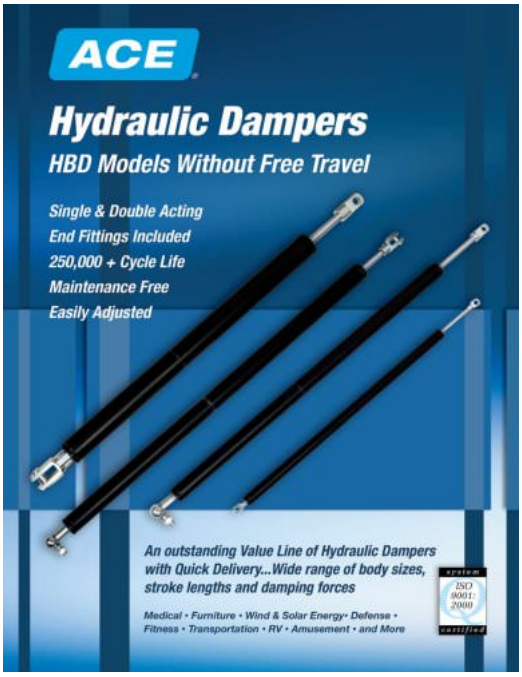10. 

Hydraulic Dampers HBD Models Without Free Travel


6 Pages

11.



Ultra-High Effective Weight Piston Tube Magnum Shocks


2 Pages

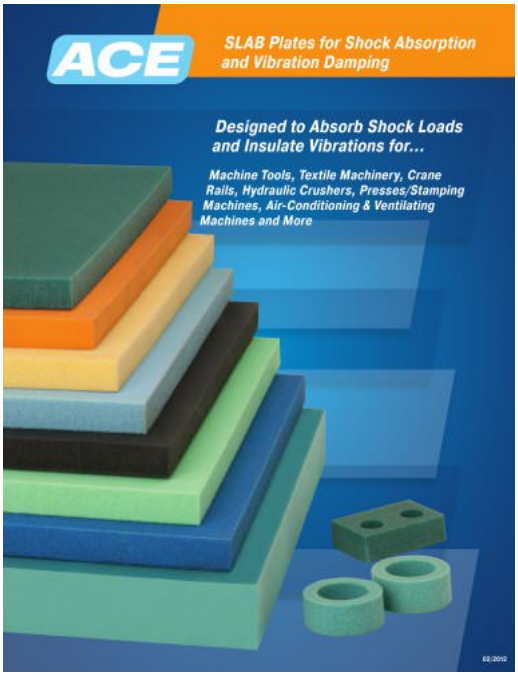12. 

SLAB Plates Absorb Shock Loads and Insulate Vibrations

22 Pages

13.

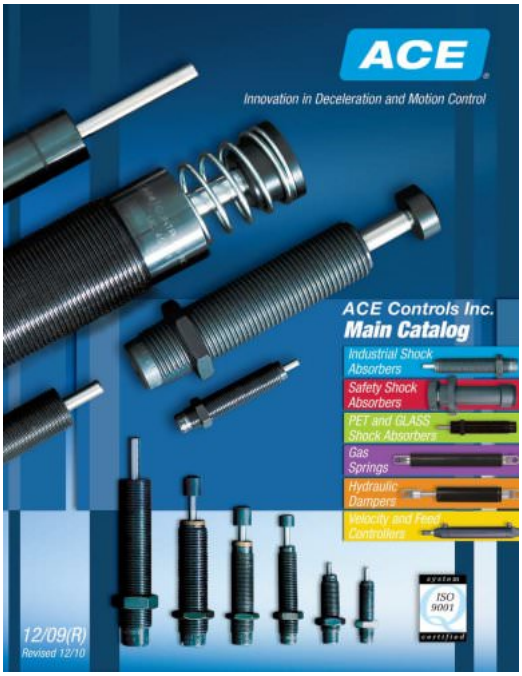

ACE Controls Main Catalog


132 Pages

14. 

New Generation SCP2 PET Container Industry Shock Absorbers

12 Pages

15.

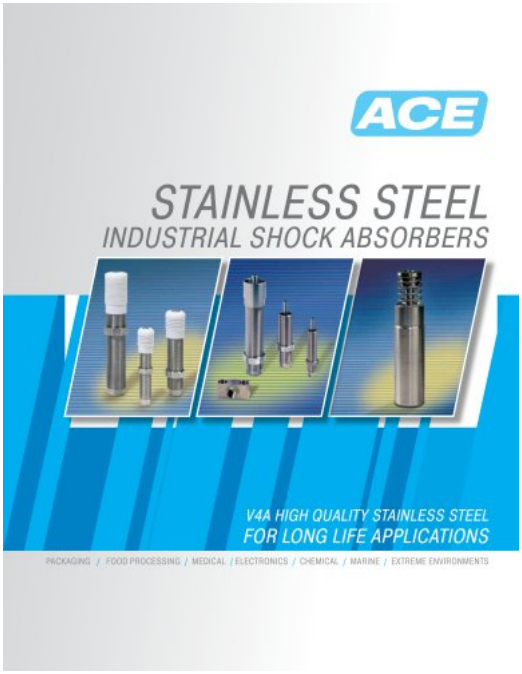

StainleSS Steel induStrial Shock abSorberS

8 Pages

16.



V-Sensors


4 Pages

17.



GLASS Shocks - M64 x 2 Heavy-Duty Models


4 Pages

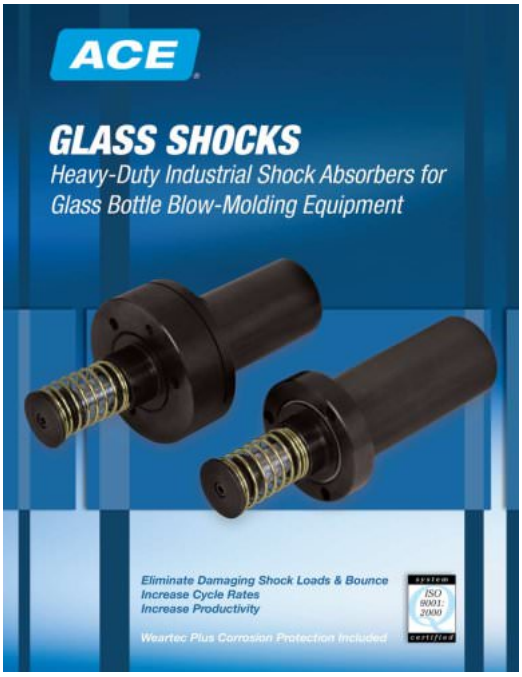18. 

GLASS Shocks

4 Pages


19.

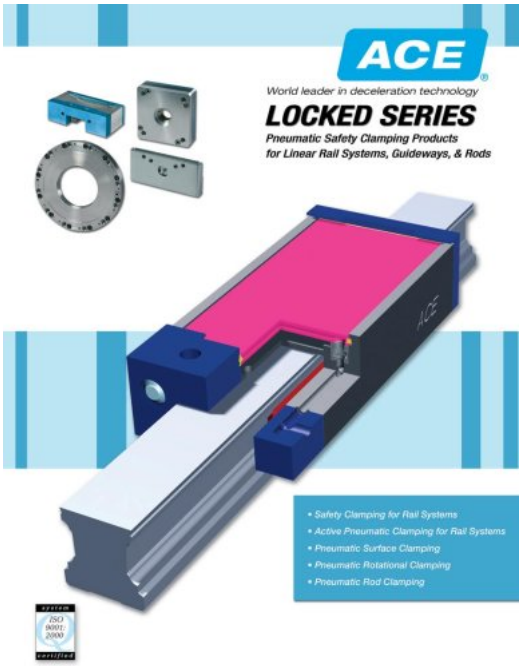

Locked Series - Pneumatic Safety Clamping Products

20 Pages

20.

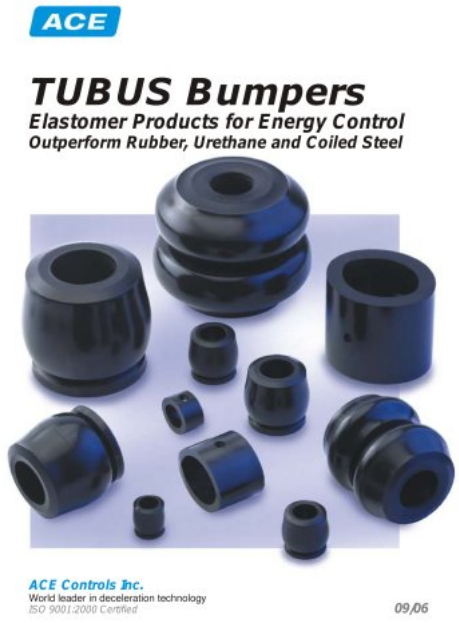

TUBUS Elastomer Bumpers Catalog


12 Pages

Related Searches

- Cylinder
- Pneumatic cylinder
- ACE clamping
- Hydraulic cylinder
- ACE shock damper
- ACE hydraulic damper
- ACE anti-vibration mount
- Compact cylinder
- ACE piston damper
- ACE metal damper
- ACE mechanical damper
- ACE industrial damper
- ACE rubber anti-vibration mount
- ACE cylindrical anti-vibration mount
- Rubber anti-vibration mount
- ACE clamping element
- ACE compact damper
- ACE machine damper
- ACE plastic damper
- Oil buffer

*Prices are pre-tax. They exclude delivery charges and customs duties and do not include additional charges for installation or activation options. Prices are indicative only and may vary by country, with changes to the cost of raw materials and exchange rates.

© 2022 All rights reserved - Terms - Privacy policy - General Terms - Manage cookies - Distributor list - 鄂ICP备16017613号-2 -

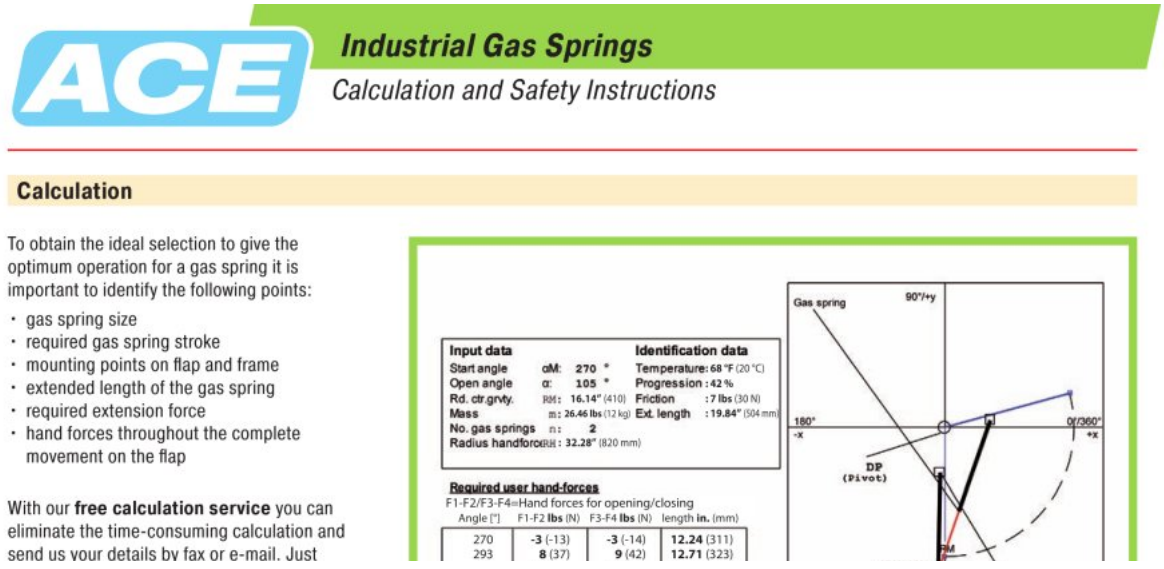


complete the information shown on the calculation formula page number 6. Please attach a sketch of your application (a simple hand sketch is sufficient) in side view. Our application engineers will determine the optimum gas springs and mounting points and calculate the ideal situation to satisfy your requirements.

You will receive a quotation showing the opening and closing forces and our recommended mounting points to suit your application.

317	13 (59)	15 (68)	14.29 (363)
340	12 (53)	14 (63)	16.46 (418)
363	8 (34)	10 (44)	18.78 (477)
375	6 (25)	8 (34)	19.84 (504)

F1-F4 positive requires clockwise hand force
F1-F4 negative requires counter-clockwise hand force



Distances of mounting points are based on pivot (DP)
xF= horizontal / yF= vertical position of fixed point
xL= horizontal / yL= vertical position of moving point

"Calculation offer with all required details for assembly!"



Safety Instructions

Gas springs are filled with nitrogen gas. Nitrogen is an inert gas that does not burn or explode and is not poisonous.
Please note!: the internal pressure of gas springs can be up to 4,350 psi (300 bar). Do not attempt to open or modify them.

ACE gas springs will operate in surrounding temperatures from -4 °F (-20 °C) to 176 °F (+80 °C). We can equip our springs with special seals to withstand temperatures as low as -49 °F (-45 °C) or as high as 392 °F (+200 °C). Gas springs should not be placed over heat or in open fire!

Disposal/Recycling: Gas Springs consist mostly of metal and the metal could be recycled, but first the gas pressure must be removed. Please ask for our disposal recommendations which advise how to depressurize the gas springs and make them safe to recycle.

All gas springs are marked with the part number, the production date and a warning sign "Do not open high pressure". We are not responsible for any damages of any kind that arises due to goods that are not marked accordingly.

Gas springs should be installed with the piston rod downwards. This position ensures best damping quality. **Only ACE gas springs include an integrated grease chamber which allows for alternative mounting opportunities.**

Gas springs should not be exposed to tilting or side load forces during operation or whilst static (this can cause bending of the piston rod or early wear).

Gas springs are maintenance-free. **Do not grease or oil the piston rod.**

The piston rod must not be painted and should be protected against shocks, scratches and dirt. The cylinder should not be deformed as such damage would destroy the sealing system.

ACE gas springs can be stored in any position. Pressure lost through long storage is not to be expected. There may be a sticking effect the first time you compress a spring. This may require a higher initial force to operate the gas spring for the first time (initial breakaway force).

The tolerance for the installation length is generally deemed to be ±.08" (± 2 mm). If very high demands are placed on durability and stability, please avoid the combination of small diameter + long stroke + high force.

The force tolerance is ±7%.

1. 

P. 1

2. 

P. 2-3

3. 

P. 4-5

4. 

P. 6-7

5. 

P. 8-9

6. 

P. 10-11

7. 

P. 12-13

8. 

P. 14-15

9. 

P. 16-17

10. 

P. 18-19

11. 

P. 20-21

12. 

P. 22-23

13. 

P. 24-25

14. 

P. 26-27

15. 

P. 28-29

16. 

P. 30-31

17. 

P. 32-33

18. 

P. 34-35

19. 

P. 36-37

20. 

P. 38-39

21. 

P. 40-41

22. 

P. 42-43

23. 

P. 44-45