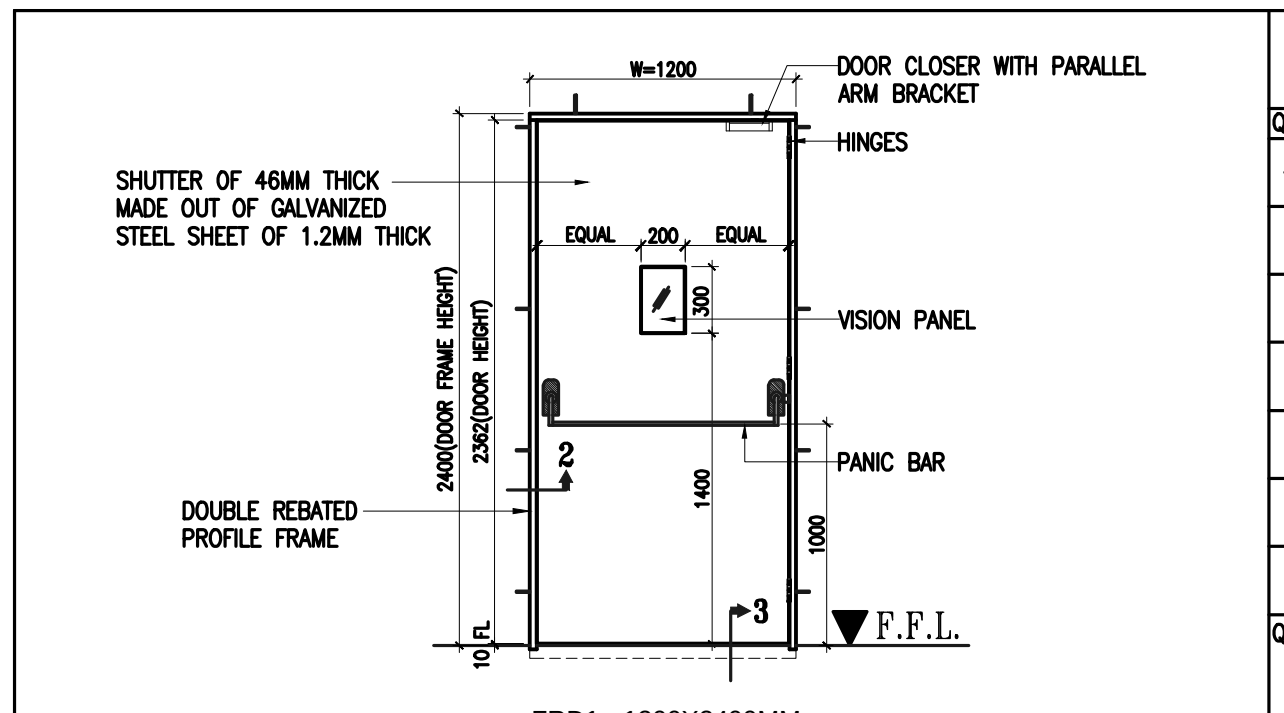
W=1200
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
EQUAL
200
EQUAL
300
VISION PANEL
PANIC BAR
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
1400
1000
2
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD1 - 1200X2400MM
120MINS FIRE RATED DOOR SINGLE LEAF WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
4	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	ONE POINT PANIC DEVICE PHA 2001 – PHA2102, PHA 2105 L=1300MM	DORMA	SILVER
1	EACH	EP HALF CYL. 3010, 5PIN ONE SIDE KEY LENGTH=42MM, SNP	DORMA	SNP
1	EACH	EXTERNAL TRIM PHT 3905 PREPARED FOR EURO PROFILE CYLINDER.	DORMA	SILVER
1	EACH	DOOR CLOSER TS 72 EN 2–4 WITH STD. ARM	DORMA	SILVER
1	EACH	MORTISED AUTO DOOR BOTTOM 355A FOR METAL DOORS 48", ALUMINUM	ZERO	ALUM
6	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK

QUANTITY:
CAR AND FACTORY: 35
NMX: 22
OFFICE BUILDING: 08
CAFETERIA: 10
SUBSTATION: 05
DPG: 02
UG SUMP: 02
SECURITY KIOSK: --
COMPRESSOR ROOM: --
TOTAL NOS: 84 NOS

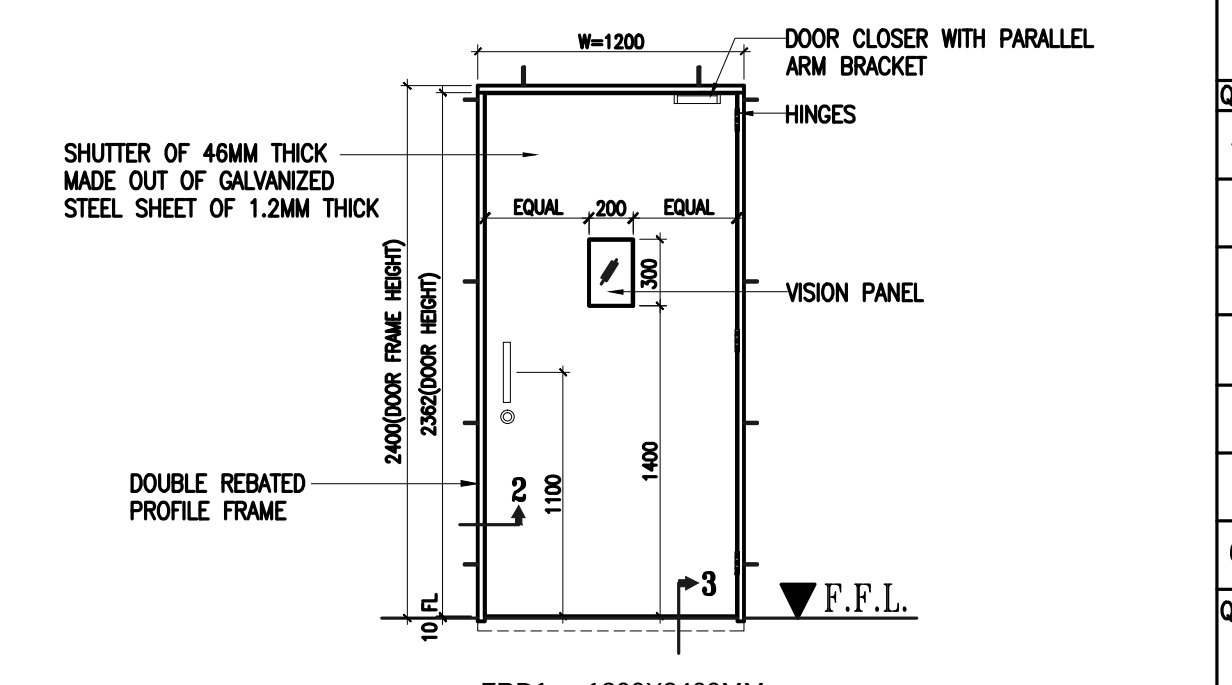
W=1200
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
EQUAL
200
EQUAL
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
1100
1400
2
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD1a - 1200X2400MM
120MINS FIRE RATED DOOR SINGLE LEAF WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
4	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	FIRE RATED MORTICE DEAD LOCK 288, 55MM BS/20MM SQ. FORND, SSS	DORMA	SSS
1	PAIR	ESCUTHEIONS ZS 6612 FOR EUROPROFILE CYLINDER SSS	DORMA	SNP
1	EACH	EP CYL. 3525, 5PIN BOTH SIDE KEY LENGTH=70MM, SNP	DORMA	SSS
1	EACH	DOOR CLOSER TS 72 EN 2–4 WITH STD. ARM	DORMA	SILVER
1	PAIR	PULL HANDLE D TYPE TGDI–D300, B/B 22DIA, IN SSS 304	DORMA	SSS
6	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK

QUANTITY:
CAR AND FACTORY: 06
NMX: 07
OFFICE BUILDING: 08
CAFETERIA: 01
SUBSTATION: 02
DPG: 03
UG SUMP: 01
SECURITY KIOSK: --
STP: --
TOTAL NOS: 28 NOS.

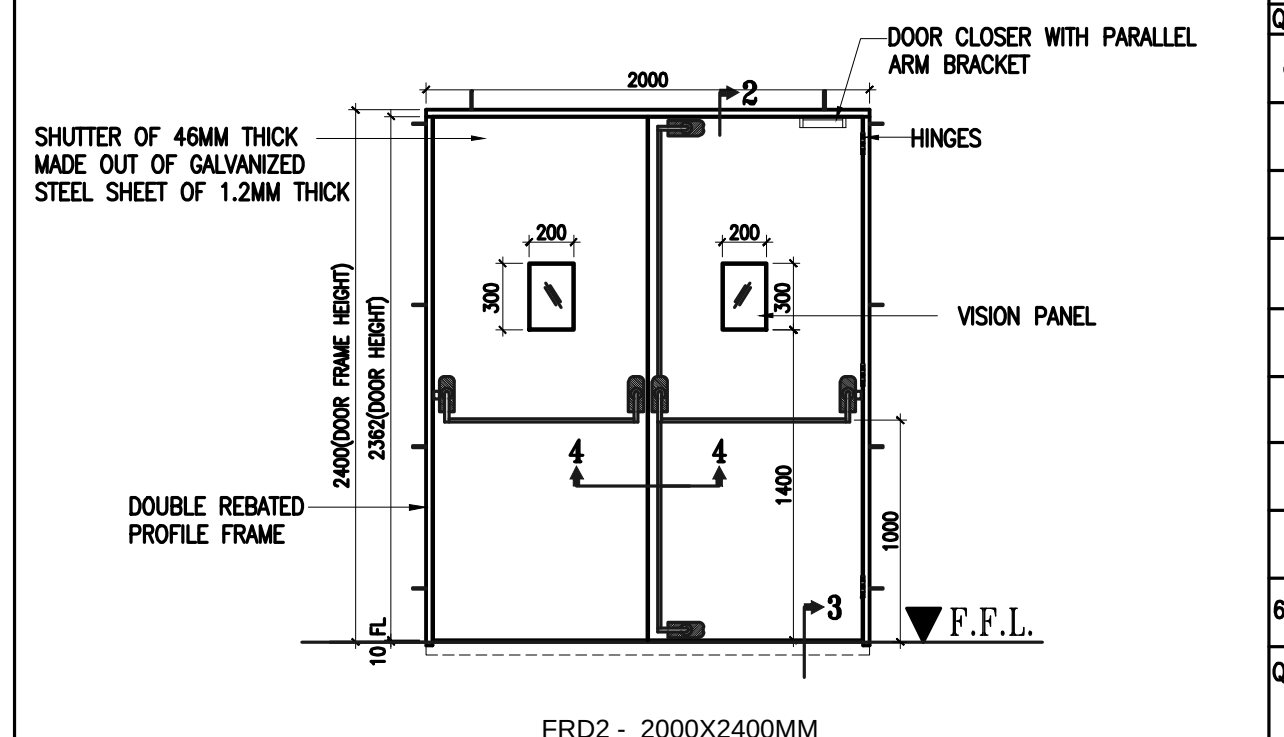
2000
2
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
200
200
300
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
4
4
1400
1000
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD2 - 2000X2400MM
120MINS FIRE RATED DOOR DOUBLE LEAF WITH PANIC BAR

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
8	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	ONE POINT PANIC DEVICE PHA 2001 – PHA2102, PHA 2105 L=1300MM	DORMA	SILVER
1	SET	TWO POINT PANIC DEVICE PHA 2002 – PHA2102, PHA 2105, PHX 03, PHX 04	DORMA	SILVER
1	EACH	EP HALF CYL. 3010, 5PIN ONE SIDE KEY LENGTH=42MM, SNP	DORMA	SNP
1	EACH	EXTERNAL TRIM PHT 3905 PREPARED FOR EURO PROFILE CYLINDER.	DORMA	SILVER
2	EACH	DOOR CLOSER TS 72 EN 2–4 WITH STD. ARM	DORMA	SILVER
1	EACH	DOOR COORDINATOR SR390	DORMA	SILVER
2	EACH	SURFACE AUTO DOOR BOTTOM 351AA FOR WOOD/METAL DOORS 36", ALUMINUM	ZERO	ALUM
6.8	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK

QUANTITY:
CAR AND FACTORY: --
NMX: 01
OFFICE BUILDING: --
CAFETERIA: 01
SUBSTATION: --
DPG: --
UG SUMP: --
SECURITY KIOSK: --
COMPRESSOR ROOM: --
TOTAL NOS: 02 NO.

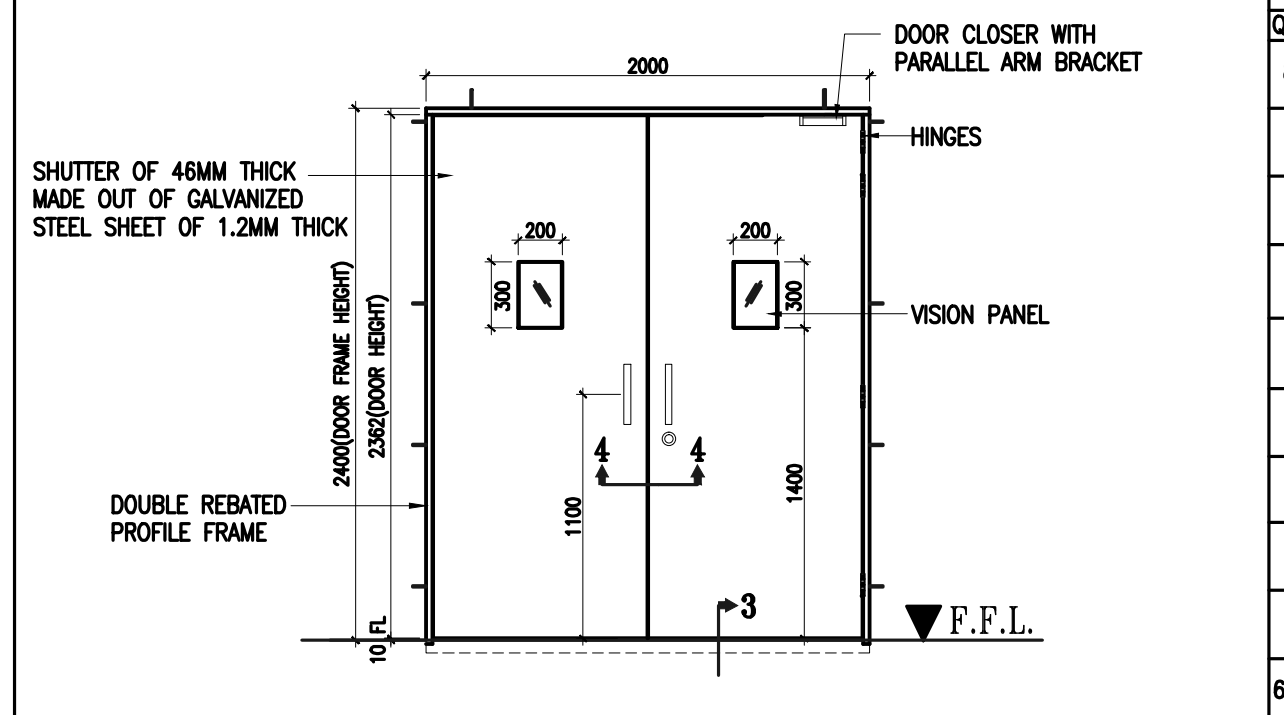
2000
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
200
200
300
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
4
4
1100
1400
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD2a - 2000X2400MM
120MINS FIRE RATED DOUBLE LEAF DOOR WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
8	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	FIRE RATED MORTICE DEAD LOCK 288, 55MM BS/20MM SQ. FORND, SSS	DORMA	SSS
1	SET	ESCUTHEIONS ZS 6612 FOR EUROPROFILE CYLINDER SSS	DORMA	SSS
1	SET	EP CYL. 3525, 5PIN BOTH SIDE KEY LENGTH=70MM, SNP	DORMA	SNP
1	EACH	DOOR CLOSER TS 71 EN 3/4 WITH STD. ARM	DORMA	SILVER
1	EACH	PULL HANDLE D TYPE TGDI–D300, B/B 22DIA, IN SSS 304	DORMA	SSS
1	EACH	LEVER ACTION FLUSH BOLT 3101–1, L=300MM, SC	DORMA	SC
1	EACH	LEVER ACTION FLUSH BOLT 3101–2, L=600MM, SC	DORMA	SC
1	EACH	DUST EXCLUDING SOCKET 3124, 16DIA HOLE, SSS	DORMA	SSS
6.3	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK
2	EACH	FLOOR STOP HALF DOME 3108, 45DIA SSS	DORMA	SSS

QUANTITY:
CAR AND FACTORY: --
NMX: --
OFFICE BUILDING: --
CAFETERIA: --
SUBSTATION: --
DPG: 01
UG SUMP: --
SECURITY KIOSK: --
COMPRESSOR ROOM: --
TOTAL NOS: 01 NO.

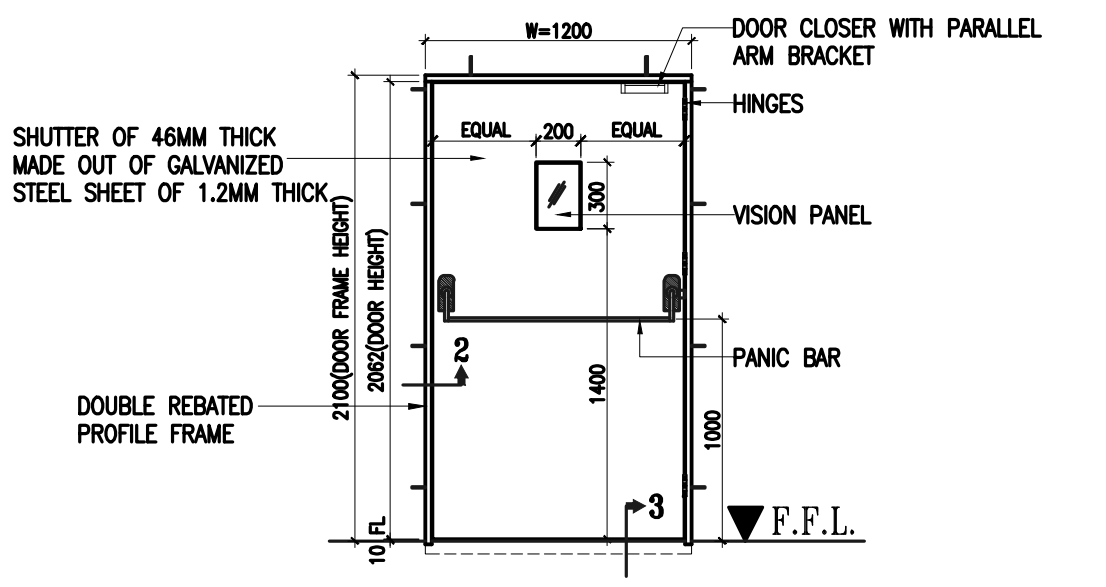
W=1200
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
EQUAL
200
EQUAL
300
VISION PANEL
PANIC BAR
2100(DOOR FRAME HEIGHT)
2062(DOOR HEIGHT)
1400
1000
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD3 - 1200X2100MM
120MINS FIRE RATED SINGLE LEAF DOOR WITH PANIC BAR

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
4	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	ONE POINT PANIC DEVICE PHA 2001 – PHA2102, PHA 2105 L=1300MM	DORMA	SILVER
1	EACH	EP HALF CYL. 3010, 5PIN ONE SIDE KEY LENGTH=42MM, SNP	DORMA	SNP
1	EACH	EXTERNAL TRIM PHT 3905 PREPARED FOR EURO PROFILE CYLINDER.	DORMA	SILVER
1	EACH	DOOR CLOSER TS 72 EN 2–4 WITH STD. ARM	DORMA	SILVER
1	EACH	MORTISED AUTO DOOR BOTTOM 355A FOR METAL DOORS 48", ALUMINUM	ZERO	ALUM
6	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK

QUANTITY:
CAR AND FACTORY: --
NMX: --
OFFICE BUILDING: --
CAFETERIA: --
SUBSTATION: 02
DPG: --
UG SUMP: --
SECURITY KIOSK: --
COMPRESSOR ROOM: --
TOTAL NOS: 02 NOS

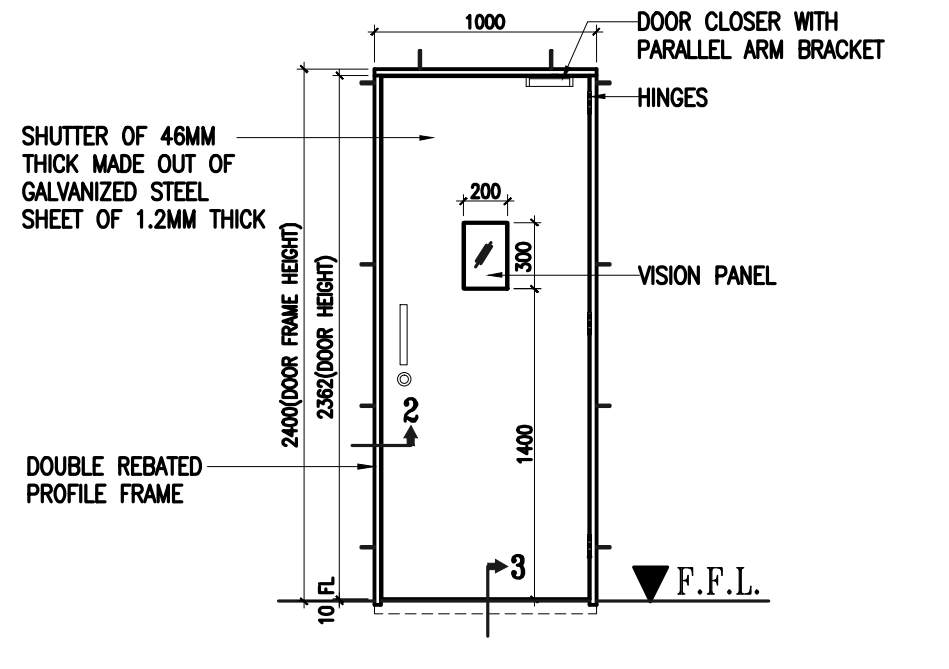
1000
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
200
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
2
1400
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD3a - 1000X2400MM
120MINS FIRE RATED SINGLE LEAF DOOR WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
4	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	FIRE RATED MORTICE DEAD LOCK 288, 55MM BS/20MM SQ. FORND, SSS	DORMA	SSS
1	PAIR	ESCUTHEIONS ZS 6612 FOR EUROPROFILE CYLINDER SSS	DORMA	SNP
1	EACH	EP CYL. 3525, 5PIN BOTH SIDE KEY LENGTH=70MM, SNP	DORMA	SSS
1	EACH	DOOR CLOSER TS 72 EN 2–4 WITH STD. ARM	DORMA	SILVER
1	PAIR	PULL HANDLE D TYPE TGDI–D300, B/B 22DIA, IN SSS 304	DORMA	SSS
6	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK

QUANTITY:
CAR AND FACTORY: --
NMX: --
OFFICE BUILDING: --
CAFETERIA: --
SUBSTATION: 03
DPG: --
COMPRESSOR: 02
UG SUMP: --
SECURITY KIOSK: --
STP: --
TOTAL NOS: 05 NOS.

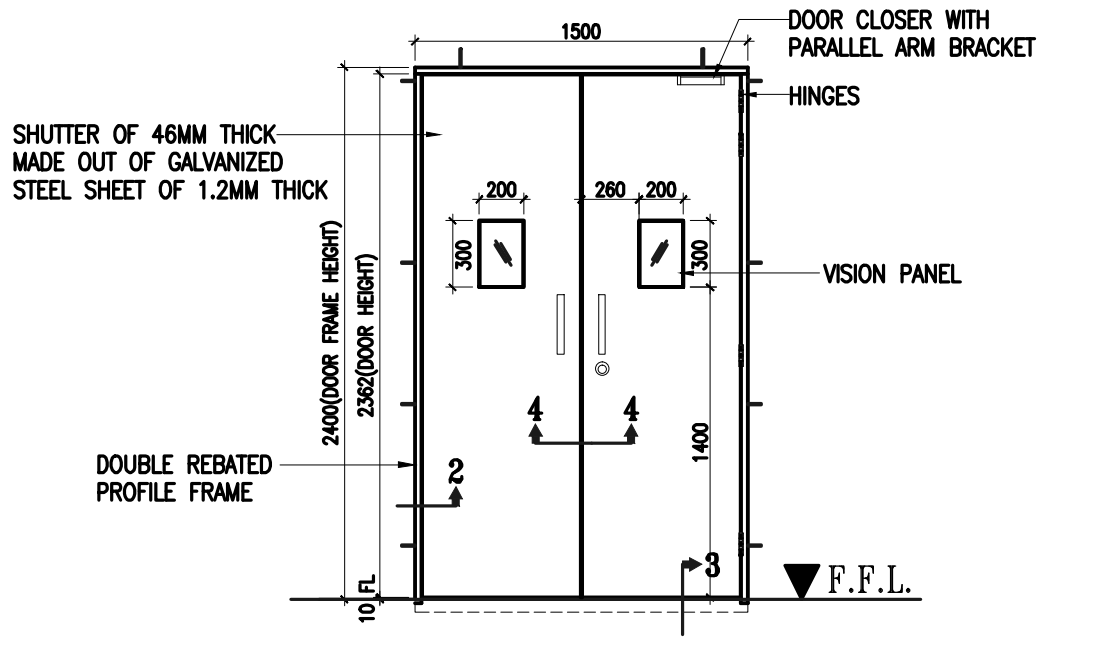
1500
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
200
260
200
300
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
4
4
2
1400
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD4 - 1500X2400MM
120MINS FIRE RATED DOUBLE LEAF DOOR WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
8	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	FIRE RATED MORTICE DEAD LOCK 288, 55MM BS/20MM SQ. FORND, SSS	DORMA	SSS
1	SET	ESCUTHEIONS ZS 6612 FOR EUROPROFILE CYLINDER SSS	DORMA	SSS
1	SET	EP CYL. 3525, 5PIN BOTH SIDE KEY LENGTH=70MM, SNP	DORMA	SNP
1	EACH	DOOR CLOSER TS 71 EN 3/4 WITH STD. ARM	DORMA	SILVER
1	EACH	PULL HANDLE D TYPE TGDI–D300, B/B 22DIA, IN SSS 304	DORMA	SSS
1	EACH	LEVER ACTION FLUSH BOLT 3101–1, L=300MM, SC	DORMA	SC
1	EACH	LEVER ACTION FLUSH BOLT 3101–2, L=600MM, SC	DORMA	SC
1	EACH	DUST EXCLUDING SOCKET 3124, 16DIA HOLE, SSS	DORMA	SSS
6.3	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK
2	EACH	FLOOR STOP HALF DOME 3108, 45DIA SSS	DORMA	SSS

QUANTITY:
CAR AND FACTORY: --
NMX: --
OFFICE BUILDING: 03
CAFETERIA: 04
SUBSTATION: 01
DPG: --
UG SUMP: --
STP: --
PUMP ROOM: --
TOTAL NOS: 08 NOS.

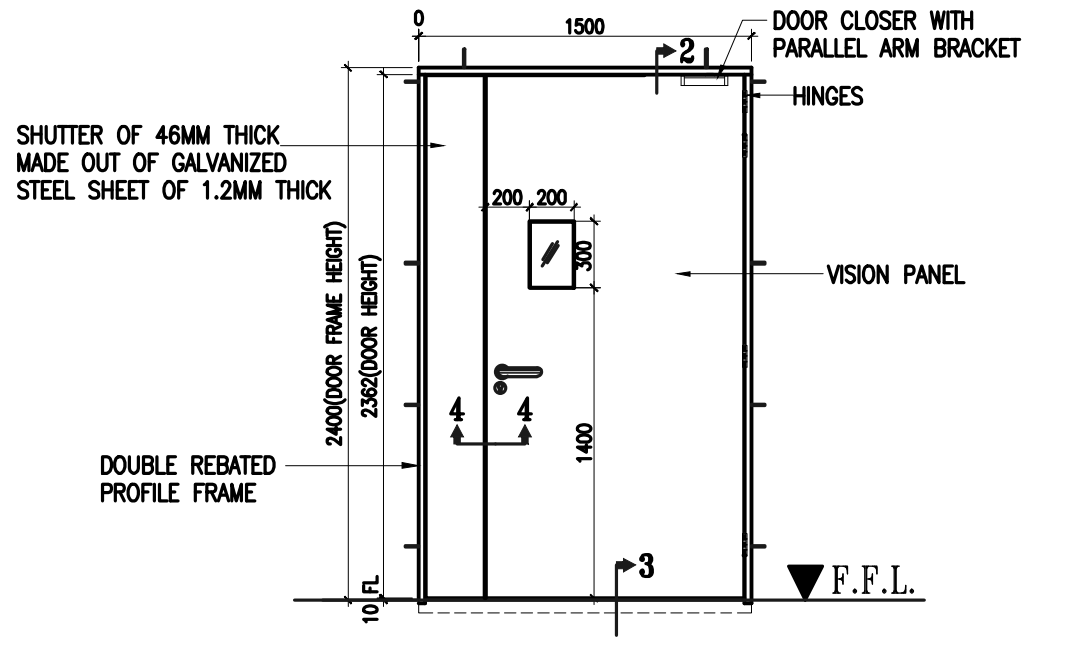
0
1500
2
DOOR CLOSER WITH PARALLEL ARM BRACKET
HINGES
SHUTTER OF 46MM THICK MADE OUT OF GALVANIZED STEEL SHEET OF 1.2MM THICK
200
200
300
VISION PANEL
2400(DOOR FRAME HEIGHT)
2362(DOOR HEIGHT)
4
4
1400
3
DOUBLE REBATED PROFILE FRAME
10 FL
F.F.L.

FRD5 - 1500X2400MM
120MINS FIRE RATED UNEQUAL DOUBLE LEAF DOOR WITH VISION PANEL

FRAME SIZE: 143 X 58 MM ;FRAME SHEET: 1.6MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 1.2MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
8	EACH	HINGES 3090 F, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	SET	FIRE RATED MORTICE SASH LOCK 281, 55MM BS/20MM SQ. FORND, SSS	DORMA	SSS
1	SET	EP CYL. 3525, 5PIN BOTH SIDE KEY LENGTH=70MM, SNP	DORMA	SNP
1	EACH	LEVER HANDLE PURE 8100/6501 –S114, WITH ROSES & ESC. SSS	DORMA	SSS
1	EACH	LEVER ACTION FLUSH BOLT 3101–1, L=300MM, SC	DORMA	SC
1	EACH	LEVER ACTION FLUSH BOLT 3101–2, L=600MM, SC	DORMA	SC
1	EACH	DUST EXCLUDING SOCKET 3124, 16DIA HOLE, SSS	DORMA	SSS
1	EACH	DOOR CLOSER TS 71 EN 3/4 WITH STD. ARM	DORMA	SILVER
6.3	MT	FIRE DOOR HORMANN PRODUCT CODE NO:315092 –SEALING FOR FRAME BLACK(EPDM/PP) HRM	HORMANN	BLACK
2	EACH	FLOOR STOP HALF DOME 3108, 45DIA SSS	DORMA	SSS

QUANTITY:
CAR AND FACTORY: --
NMX: --
OFFICE BUILDING: 05
CAFETERIA: 01
SUBSTATION: --
DPG: --
UG SUMP: --
SECURITY KIOSK: --
COMPRESSOR ROOM: --
TOTAL NOS: 06 NOS.

KEY PLAN :-



LEGEND :-

N

GENERAL NOTES :

- ALL DIMENSIONS ARE IN MILLIMETRES AND ARE UNFINISHED DIMENSIONS UNLESS OTHERWISE SPECIFIED.
- ALL LEVELS ARE IN METRES AND ARE UNFINISHED LEVELS UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE DRAWINGS. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED, ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.

Construction work shall be executed only as per the latest revision drawing. Once a revision drawing is issued, the validity of the previous revision drawing stands cancelled and as such construction shall not be carried out as per superseded revisions. The Contractor is expected to:
1. Maintain a register of Drawing Receipts, listing drawing number & revision number, title, from whom received, date received, number of copies received, details of transmittal from the issuer & any other relevant details to be advised from time to time.
2. Archive all previous revision issues immediately upon receipt of a new revision and no superseded drawing shall remain in the site of works except in the Contractor's archives for record and reference purposes only.
3. While archiving superseded drawing, the Contractor is expected to stamp all previously issued drawings / prints appropriately, mentioning the date and revision number of the new revision on account of which the previous revision is archived.
4. The Contractor shall allow the representative of Client / PMC / Architect to inspect Contractor's archives for ensuring compliance.
5. Any work carried out by the Contractor using a superseded drawing after the issue of a new revision is liable for rejection and reinstatement as per new revision at Contractor's risk and cost without any entitlement to extension of time

REV.	DESCRIPTION	DATE	BY	CHD.
T3	ISSUED FOR TENDER	02.03.17	SOPI	V.A
T2a	RE–TENDER DRAWING ISSUED FOR CLIENT REVIEW	08.12.16	SOPI	V.A
T2	ISSUED AS ADDENDUM	27.04.15	CB	V.A

AMENDMENT

GRAPHIC SCALE:
0.5M 0 0.5M 1.0M 2.0M 3.0M 4.0M 5.0M

CLIENT:
KONE ELEVATOR INDIA PVT. LTD.

PROJECT:
PROPOSED KONE ELEVATOR FACTORY
AT PILLAIPAKKAM, NEAR CHENNAI.

DRAWING TITLE:
JOINERY DETAILS - FIRE RATED STEEL DOORS

SCALE : 1=30
DRAWN : CHINABABU
DATE : 24.11.2014
CHKD : V. ADHISIVAN
REV
DRAWING NO:
KEIPL-P-FAC1-AR11-GR-02-188922
T3

ARCHITECTURE INTERIOR DESIGN ENGINEERING PLANNING CONSTRUCTION MANAGEMENT

CRN
C R NARAYANA RAO

10, KARPAGAMBAL NAGAR,
MYLAPORE, CHENNAI-600 004

B.Arch. (Hons.), M.Arch., (Calif.), F.I.I.A., Intl.Assoc.A.I.A.,
Registered Architect.

THESE DRAWINGS ARE UNDER COPYRIGHT AND ARE THE PROPERTY OF CRN. NONE OF THE DRAWINGS AND RELATED DOCUMENTS CAN BE REPRODUCED, COPIED IN WHOLE OR IN PART WITHOUT PRIOR EXPRESSED WRITTEN CONSENT OF CRN. THESE DRAWINGS CANNOT BE HANDED OVER TO A THIRD PARTY OR USED FOR ANY PURPOSE, OTHER THAN THAT FOR WHICH IT HAS BEEN LOANED. AFTER FULFILLING THE PURPOSE OF ISSUE THE DRAWINGS SHALL BE RETURNED TO CRN.