SHLARA-MHT-120-SM1/2

Full Height Turnstile

APPLICATION

The **SHLARA-MHT-120-SM1/02** Series of Full Man Height Turnstiles are deployed at Border Control, Embassies, Defence, Govt., establishments etc. They are installed in industries typically for greater level of security.

MECHANISM

SHLARA full Man Height Turnstiles are powered by either a Motor & alternately offer simple Manually Powered System with Solenoid Locking Mechanism. All turnstiles offer the option of choosing between Fail Safe & Fail Secure modes of Operation.

INDEXING AND PASSAGE

The Full Man Height Turnstiles as a standard come with a 3 X 120º indexing arm. This design offers hindrance-free movement to pedestrians. For special requirements Turnstiles with 2 Passages for managing traffic is also offered.

PASSENGER SIGNAL

Turnstiles are offered with Red/Green Signal Lamps indicating Access Denied or Access Granted. SHLARA is committed to extending solutions that are not just reliable, offering long life but also aesthetically built thus complimenting the creativity of a building designer & architect.

MATERIAL OF CONSTRUCTION

SHLARA offers turnstiles that are well engineered and integrated with reliable technology housed in well finished stainless steel housings, The full Man Height Turnstiles are generally offered in SS but as an option may also be offered in Mild Steel. The SHLARA-MHT-120-SM1 is in SS, Motorised for Single Passage & SHLARA-MHT-120-SM2 is in SS, Motorised for Dual Access Passage.

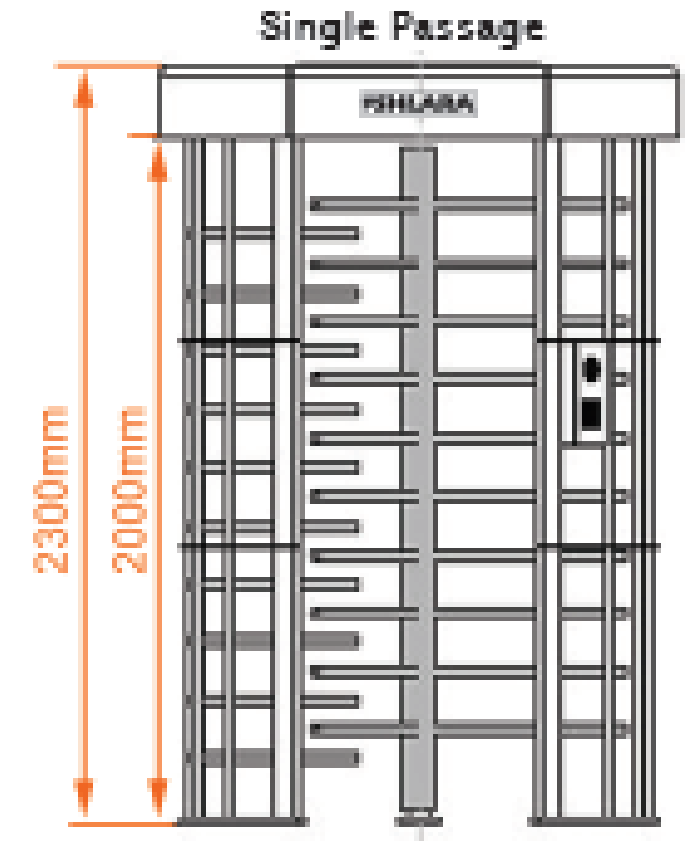



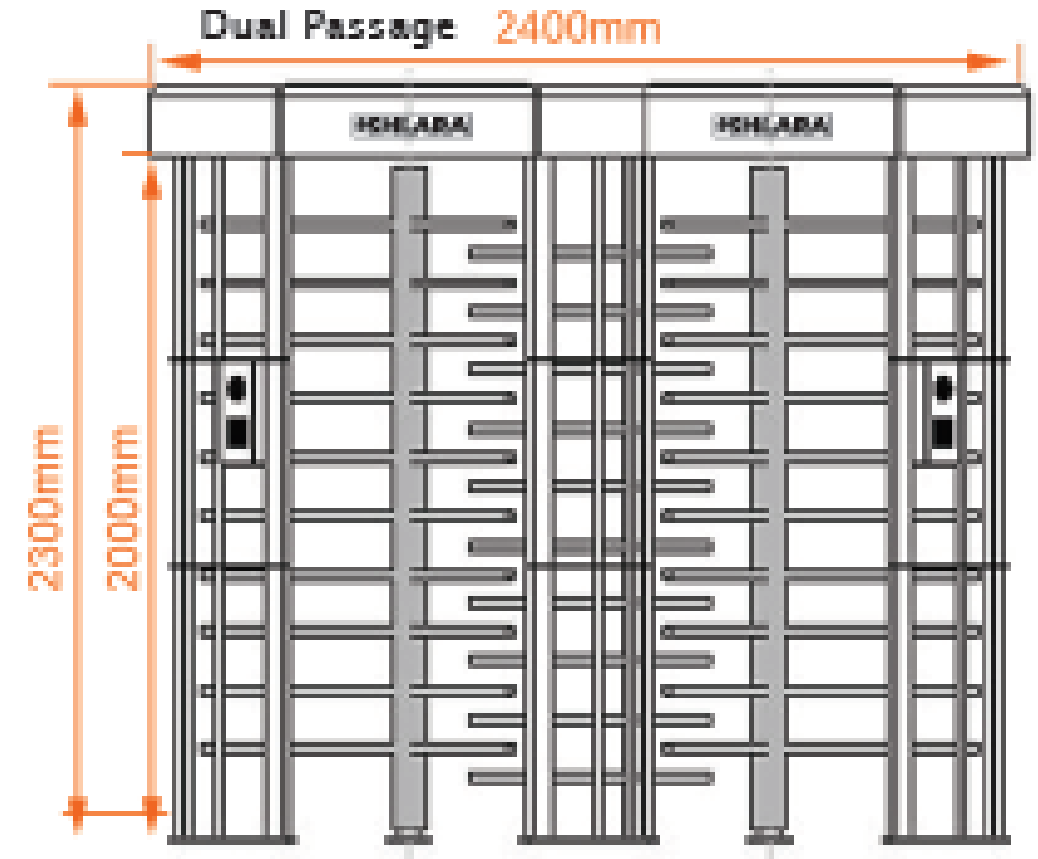

Port
Airport
Railway Station
Hospital
Hotel
Factory
Government
Bank

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Shlara, its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Shlara"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

35 pers/min
CROSSING CAPACITY

600 mm
PASSAGE WIDTH

ANTI BUFFERING FUNCTION

ANTI-TAILING FUNCTION

BI-DIRECTIONAL

MOTORISED

CAN BE CUSTOMIZED

Technical Specifications

Description	Particulars
Make	SHLARA
Model	Single Passage: SHLARA-MHT-120-SM1
	Dual Passage: SHLARA-MHT-120-SM2
Material of Construction	304 Stainless steel cabinet and arms
Finish	Brushed or Satin Finish aka Grade 4 finish
Housing Material Thickness	1.5mm
Housing Dimension (in mm)	Single Passage : 1700X 1460 X 2000mm Clear height & 2300 Total Height
	Dual Passage: 2400 X 1460 X 2000mm Clear height & 2300 Total Height
Arm Diameter	40mm
Thickness of Arm Material	1.3mm
Length of the Arm	550mm
Passage Width	550 - 600 mm
Drive Mechanism	Brushless DC Motor for reliable long life with Digital Position Sensing
Power	AC 230V±10V, 50Hz
Power Consumption	70W
Working Temperature	-10℃to +60~C
Condensation	5 to 95%, ROH Non Condensing
Throughput	30 Persons / min
Voltage	24 VDC
IP Rating	IP54
Installation	Indoor/ Outdoor
Direction of Operation	In & Out Bi-Directional OR Either In or Out Only Uni-Directional
Hold Open Time	1 Sec. to 5 Sec. Adjustable. Factory Default Setting 5 Secs.
Pulse Storage for access in High Traffic Environment	Around 200ms one time
Emergency/Safely	Arms Rotate Freely in Case of Emergency
Lane Indicator	LED passing arrow can show direction to move (Optional)
Operational Noise	Stable running with less noise
Weight of the Product	Single Passage: 350 Kg
Weight of the Product	Dual Passage: 500 Kg

Disclaimer: Shlara products are subject to change attributable to improvement to reliability and/or functionality of its products. Shlara & its representatives absolve themselves of any liability pertaining to claims that may arise out of differences, variations or inconsistencies from documents or disclosures indicated in any marketing or product information & promotional communication.