Accessories

Radius B Lta

Blinker with built-in antenna for 24V or 230V motors.

230 V D113748 00002
24 V D113748 00003

Ipnos B Ltb

Blinker with built-in antenna for 24V motors. LED Technology.

24 V D113783

Mitto B Rcb

Two and four-channel 433 MHz rolling code transmitter

2 Channels D111904
4 Channels D111906

Kleio B Rca

Two and four-channel 433 MHz rolling code transmitter. “Soft touch” finish

2 Channels D111888
4 Channels D111890

Mitto B Rcb Replay

2 Channels D111905
4 Channels D111907

Two and four-channel 433 MHz copyable with rolling code transmitter

Cellula 130

P111273

Set of self-aligning wall-mount photocells (range 24 m) Power supply 24V ac/dc.

Cellula 180

P111452

Set of wall-mount adjustable (180° horiz./20° vert.) photocells (range 30 m). Power supply 24V ac/dc.

Tango cover

P111454

Anodised aluminium vandal-proof cover for Tango and Cellula 180 photocell.

Kits

Phobos n bt Thalia Kit R935292 00003

Up to 1.8 m, 250 kg - Voltage 24V

24V

The Kit includes

- → 2 Phobos n bt operators.
- → 1 Thalia, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 24V blinker with built-in antenna.

Phobos n l bt Thalia Kit R935296 00002

Up to 5 m, 250 kg - Voltage 24V

24V

The Kit includes

- → 2 Phobos n l bt operators.
- → 1 Thalia, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 24 V blinker with built-in antenna.

Phobos n Kit R935251 00003

Up to 1.8m, 250 kg - Voltage 230V

The Kit includes

- → 2 Phobos n operators.
- → 1 Altair p, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 230 V blinker with built-in antenna.

Phobos n l Kit R935252 00003

Up to 5 m, 250 kg - Voltage 230V

The Kit includes

- → 2 Phobos n l operators.
- → 1 Altair p, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 230 V blinker with built-in antenna.

Virgo Kit R930130 00001

Up to 2 m, 200 kg - Voltage 24V

24V

The Kit includes

- → 1 Virgo operator, with control unit and built-in rolling code receiver.
- → 1 Virgo sq operator, (Virgo without control unit).
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 24 V blinker with built-in antenna.

Kit Igea bt Thalia R935297 00002

Up to 2,5 m, 250 kg - Voltage 24V

24V

The Kit includes

- → 2 Igea Bt operators.
- → 1 Thalia, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 24 V blinker with built-in antenna.

Kit Igea R935221 00002

Up to 2,5 m, 250 kg - Voltage 230V

The Kit includes

- → 2 Igea operators.
- → 1 Altair p, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 230 V blinker with built-in antenna.

Kit Hide Sw R930138 00002

Up to 2 m, 150 kg - Voltage 24V

24V

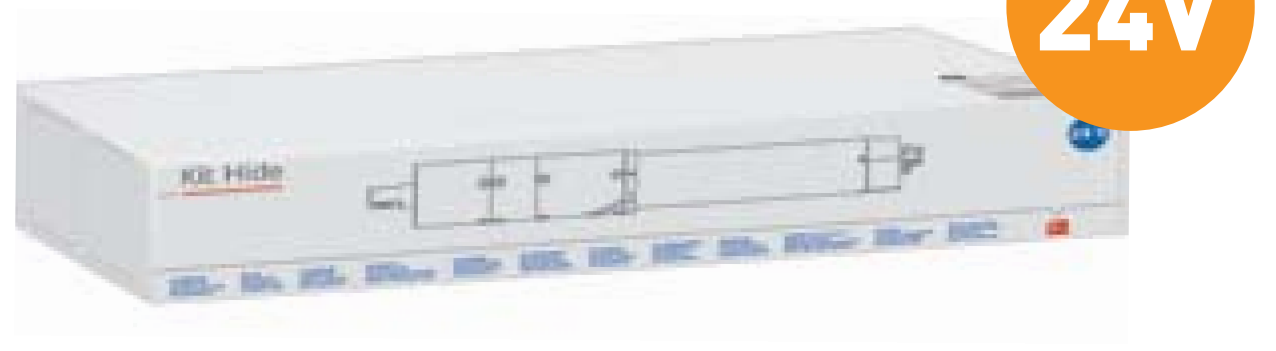

EE link D-TRACK ((ER-Ready))

- 24V residential operator for gates of up to 150 kg, it can be completely concealed within the jambs of swinging gates.
- Disappearing completely, it keeps the look of the gate “clean” while remaining a fundamental element of operational performance.
- The Hide range is offered with every kind of accessory needed to complete the installation of the gate, including top and bottom hinges.

The Kit includes

- → 2 Hide sw operators.
- → 1 Libra cb hide, control unit with built-in rolling code receiver.
- → 2 Mitto B Rcb 4 12V, four channel rolling code transmitter.
- → 1 Cellula 130, set of photocells.
- → 1 Radius B lta, 24 V blinker with built-in antenna.

*See specific illustrative brochure for information on the Fast-Net Easy Bus and Aliseo lines.

SWINGING GATES

Electromechanical automation systems for swinging gates

BFT
tuned to you

RESIDENTIAL USE

Phobos n

Linear electromechanical operator
for swinging gates

D-TRACK U-link ((ER-Ready))

- → Electromechanical operator for residential use, 24 V and 230 V for leaves up to 1.8 m (250 kg).
- → Magnetic limit switches and D-Track torque control system (n bt). Torque limiter managed via control panel (n).
- → Total useful travel 295 mm, opening time 15 sec (n bt).
- → Total useful travel 305 mm, opening time 15 sec (n).

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
Phobos n bt P935066 00004	24	1.8	250	Thalia	15	D-Track	Intensive
Phobos n P935067 00004	230	1.8	250	Altair p (recommended)	15	Electric clutch	Semi-Intensive

RESIDENTIAL USE

Phobos nl

Linear electromechanical operator
for swinging gates

D-TRACK U-link ((ER-Ready))

- → Electromechanical operator for residential use, 24V and 230V for leaves up to 5 m (250 kg).
- → Magnetic limit switches and D-Track torque control system (nl bt). Torque limiter managed via control panel (nl).
- → Total useful travel 410 mm, opening time 20 sec (nl bt).
- → Total useful travel 470 mm, opening time 20 sec (nl).

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
Phobos nl bt P935074 00003	24	5	250	Thalia	20	D-Track	Intensive
Phobos nl P935073 00003	230	5	250	Altair p (recommended)	20	electric clutch	Semi-Intensive

RESIDENTIAL USE

E5

Electromechanical articulated arm operator
for swinging gates

((ER-Ready))

- → 230V reversible electromechanical articulated arm operator for residential use, for leaves up to 1.8 m (200 kg).
- → Anti-crushing safety guaranteed by adjustable mechanical clutch.
- → Opening time 22 sec.

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
E5 P930003 00001	230	1.8	200	Alcor n (recommended)	22	Mechanical clutch	Semi-Intensive

RESIDENTIAL USE

Virgo

Electromechanical articulated arm operator
for swinging gates

24V

((ER-Ready))

- → 24V electromechanical articulated arm operator, for residential use; for leaves up to 2 m (200 kg).
- → Operator with incorporated control unit with built-in radio receiver; electric limit switches and built-in mechanical stops; anti-crushing system managed via control panel.
- → Opening angle up to 120° (90° in 14 sec).

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
Virgo Kit See kit code	24	2	200	Linx ((incorporated)	14	Electronic torque limiter	Semi-Intensive

RESIDENTIAL AND COMMERCIAL

Igea

Electromechanical articulated arm operator
for swinging gates

((ER-Ready))

U-link

Igea bt
24V

D-TRACK

- → 24V and 230V electromechanical articulated arm operator for residential and commercial use, for leaves up to 2.5 m (250kg).
- → Incorporated electric limit switches, D-Track torque control system (Igea bt) torque limiting system managed via control panel (Igea).
- → Opening angle up to 125° (90° in 15 sec).

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
Igea bt P935070 00002	24	2.5	250	Thalia	15	D-Track	Intensive
Igea P935065 00002	230	2.5	250	Altair p (recommended)	15	Electric clutch	Intensive

RESIDENTIAL AND COMMERCIAL

Eli 250 n

Underground electromechanical operator
for swinging gates

((ER-Ready))

U-link

Eli 250 n bt
24V

D-TRACK

- → 24V and 230V underground electromechanical operator for and commercial use, gate leaves up to 3.5 m - 400 kg (Eli 250 n bt), up to 3.5 m - 300 kg (Eli 250 n) and 2 m - 150 kg (Eli 250 n v).
- → Magnetic limit switches (Eli 250 n bt) and built-in mechanical stops; D-Track torque control system (Eli 250 n bt); torque limiting system managed via control panel (Eli 250 n - Eli 250 n v).
- → Opening angle up to120° in 15 sec (Eli 250 n bt), in 28 sec (Eli 250 n) and in 14 sec (Eli 250 n v).

DESCRIPTION	VOLTAGE	LEAF MAX LENGTH	LEAF MAX WEIGHT	CONTROL UNIT	OPENING TIME	IMPACT REACTION	USE
	(V)	(m)	(KG)		(s)		
Eli 250 n bt P930125 00001	24	3.5	400	Thalia	15 (120°)	D-Track	Intensive
Eli 250 n P930125 00002	230	3.5	300	Altair p (recommended)	28 (120°)	Electric clutch	Semi-Intensive
Eli 250 n v P930126 00002	230	2	150	Altair p (recommended)	14 (120°)	Electric clutch	Semi-Intensive

The contents of this catalogue (pictures, technical descriptions, illustrations) are the exclusive property of Bft s.p.a. Reproduction forbidden in any form or medium. All rights reserved copyright 2011.
The data in this publication are to be considered as indicative. Bft reserves the right to make any changes whatsoever without prior notice.

D8325090 00203

Bft Spa
Via Lago di Vico, 44
36015 Schio (VI)
T +39 0445 69 65 11
F +39 0445 69 65 22

→ www.bft.it