



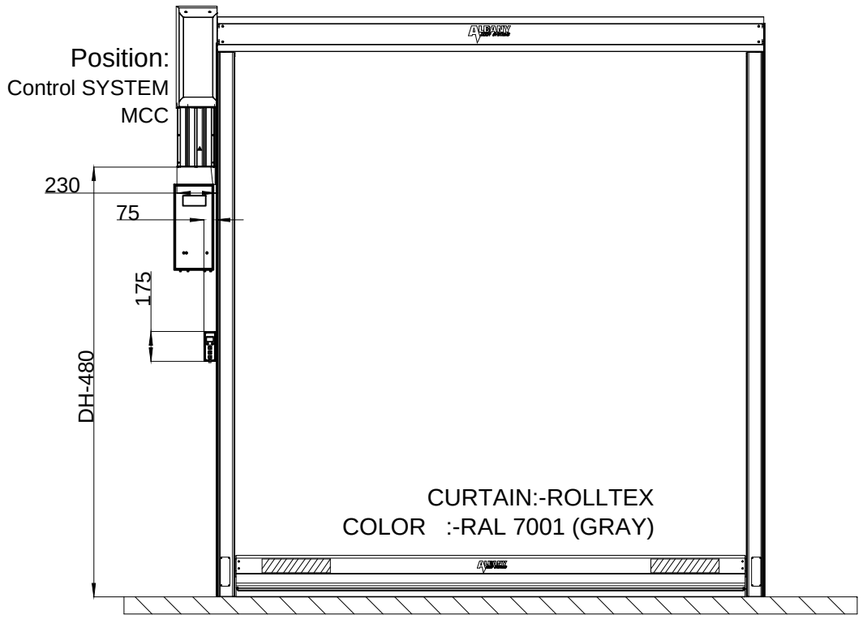


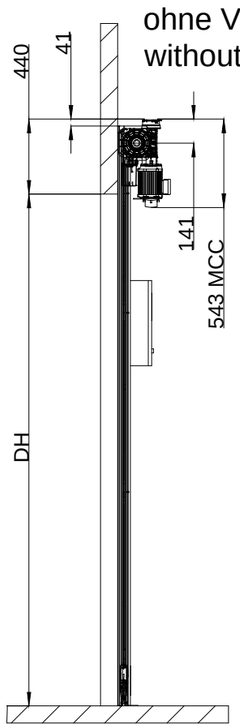


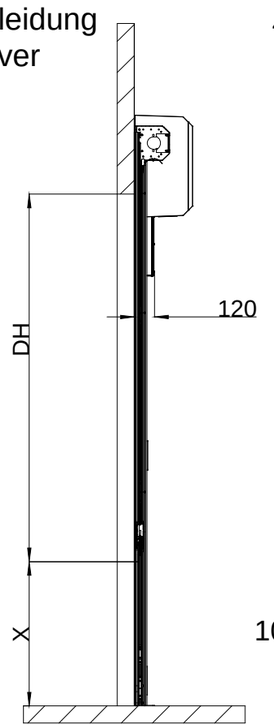

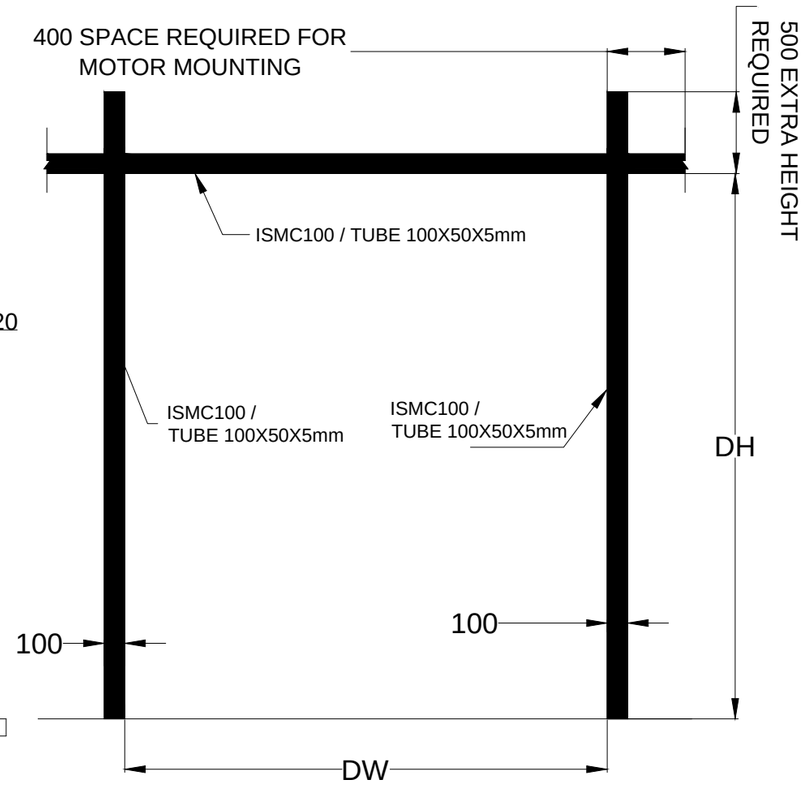

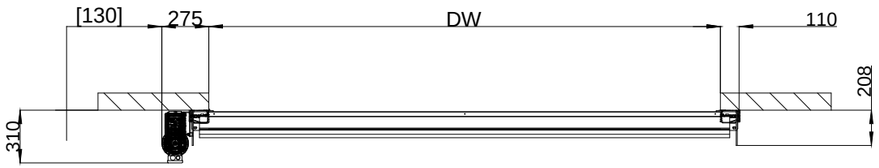

ohne Verkleidung
without cover

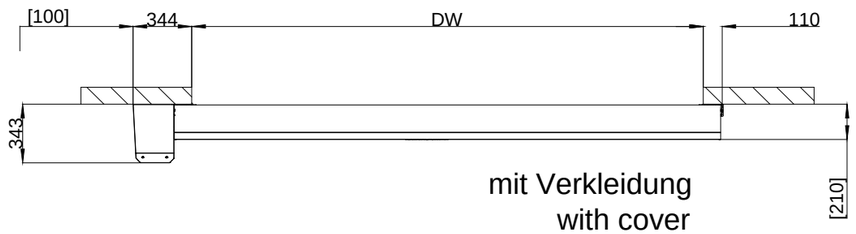

mit Verkleidung
with cover

NOTE :
1. CURTAIN : ROLLTEX.
2. COLOR : RAL 7001 (GRAY).
3. SAFETY EDGE AVAILABLE.
4. DOOR LINE (PRE RUNNING) PHOTOCELL AVAILABLE.
5. SUPPLY VOLTAGE REQUIRED : 415 VOLT, 3 PHASE (PAPL SCOPE).
6. CABLE REQUIRED : 4 CORE(PAPL SCOPE) FOR SUPPLY.
7. STD CABLE REQUIRED FOR MOTOR & PUSH BUTTON PENDENT FROM CONTROL BOX : NIHVA SCOPE.
8. STRUCTURE REQUIRED IS IN CLIENT SCOPE

CURTAIN:-ROLLTEX
COLOR : RAL 7001 (GRAY).

Tolerance ±3 mm (for all dimensions)

Dimensions in [ ] ==> clearance for installation

SR. NO.	CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY	MOTOR LOC.	
				LEFT	RIGHT
1.	1800mm	2200mm	01 NOS		
2.	1200mm	1800mm	01 NOS		
3.	1900mm	1800mm	02 NOS		

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR RP300 & STRUCTURE			NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	SIGN	DATE	Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
DRAWN	A.K.		24.12.18	CLIENT :- PAPL
CHECK	P.A.		24.12.18	PROJECT :-PAPL
APPV'ED	R.D.		24.12.18	LOCATION :- CHAKAN.
If any queries contact : design@nihva.com				DWG. NO. :- NIHVA/18-19/0226 REV.:- 00
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01