


Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
FFL-Finished Floor Level

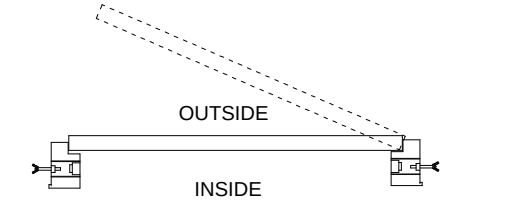


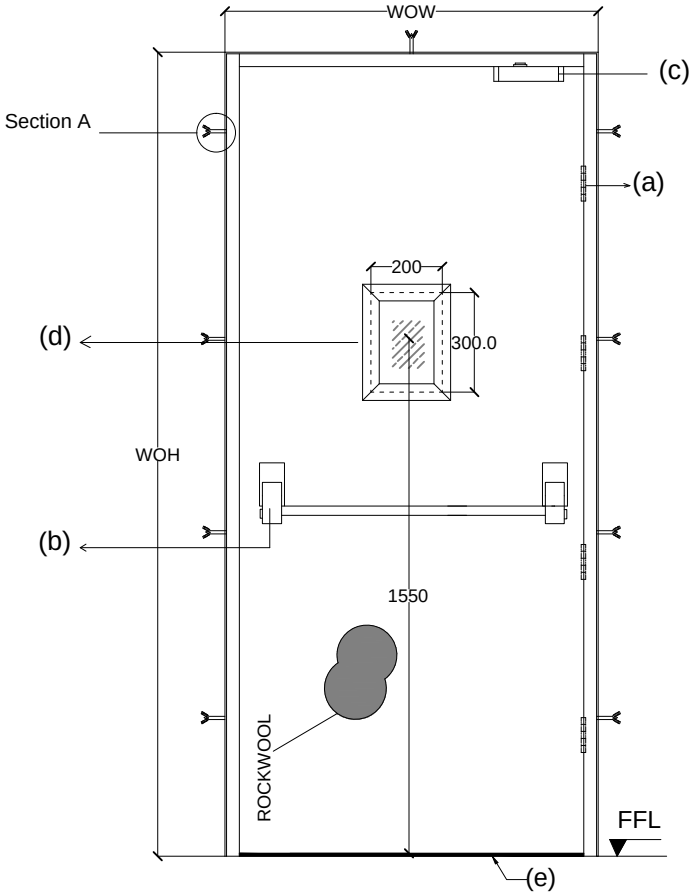

Inside Elevation



Top View

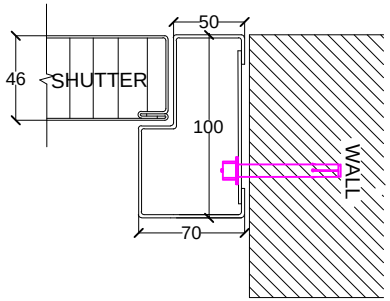

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 4"x3"x3mm(MAKE DORMA)

(b) LOCK : Panic bar(IR-BRITON 378 E) with external trim(IR-BRITON 1413E).

(c) DOOR CLOSER: RYOBI.

(d) GLASS : 5mm Thk. Vision Glass of size 200x300mm.

(e) AUTO DROOP DOWN SEAL

Shutter thickness : 46 mm
Frame Sheet thick : 1.5mm
Shutter sheet thick : 1.2mm
Fixing : On Solid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

FIRE RATED EXIT DOOR

SR. NO.	WOW	WOH	TYPE 1 (LH)	TYPE 2 (RH)	TYPE 3 (LHR)	TYPE 4 (RHR)	QUANTITY
01	1200	2430					02 NOS
01	1200	2430					01 NOS

NOTE- 1.CLIENT HAS TO SELECT DOOR HANDLING TYPE FROM ATTACHED DOOR HANDLING SHEET.
2.CLIENT SHOULD ALSO SELECT COLOR FOR DOOR FROM GIVEN OPTIONS.

COLOR
1.TRAFFIC WHITE (RAL 9016)
2.LIGHT GREY (RAL 7035)
3.GENTION BLUE (RAL 5010)
4.SIGNAL RED (RAL 3001)

This drawing & design is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE:- FIRE RATED EXIT DOOR

	NAME	DATE	SIGN.
DRAWN	SURAJ	11/05/18	
CHECK	OMKAR	11/05/18	
APPRD.	PRADEEP	11/05/18	

If any queries contact :design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - CNH
PROJECT - CNH
LOCATION - CHAKAN
DWG. NO. - NIHVA/18-19/0033 REV. : 0
SCALE: 01 WT: SHEET: 01 OF 01