
编号 No.	名称 Name	数量 Quantity
QM1021 1000*2100	冷净室金属板手开单扇密闭门	10


立面（洞口尺寸）Elevation（opening size）

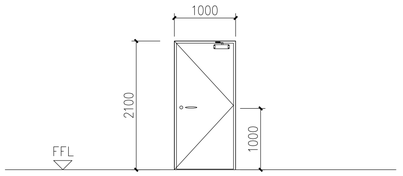

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	— —		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
QM1521 1500*2100	冷净室金属板手开双扇密闭门	6


立面（洞口尺寸）Elevation（opening size）

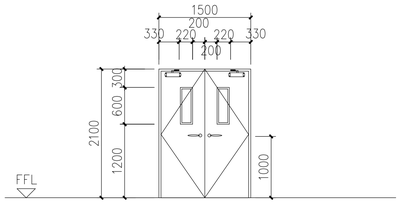

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
QM1821 1800*2100	冷净室金属板手开双扇密闭门	6


立面（洞口尺寸）Elevation（opening size）

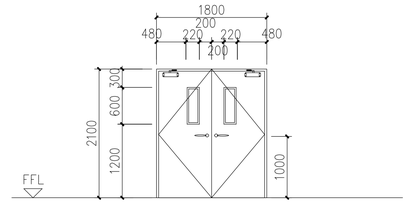

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
QM3023 3000*2300	冷净室金属板手开双扇密闭门	2


立面（洞口尺寸）Elevation（opening size）

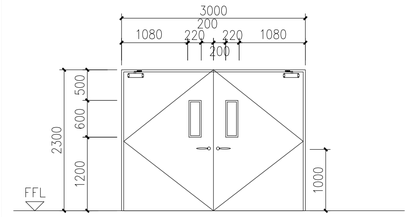

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
QM3030 3000*3000	冷净室金属板手开双扇密闭门	2

立面（洞口尺寸）Elevation（opening size）

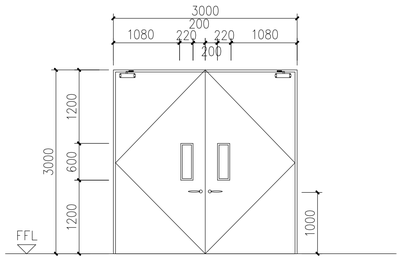

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
QM3030 3000*3000	冷净室金属板手开单扇密闭门	10

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel							
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 Support	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 Support	
备注 Note	冷净室密闭门，需满足冷净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static							

编号 No.	名称 Name	数量 Quantity
MM0621 600*2100	木制平开单扇门	3

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚电镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray							
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	— —		制动 Closure	闭门器 Door closer		锁具 Lock	配套 —	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 —	
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.							

编号 No.	名称 Name	数量 Quantity
BYM1021 1000*2100	百叶木质平开门	6

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚电镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray							
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	— —		制动 Closure	闭门器 Door closer		锁具 Lock	配套 —	
百叶 Louver	木百叶 Wood shutters		门槛 Sill	— —		执手 Handle	配套 —	
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.							

编号 No.	名称 Name	数量 Quantity
MM1021 1000*2100	木制平开单扇门	12

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚电镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray							
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	— —		制动 Closure	闭门器 Door closer		锁具 Lock	配套 —	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 —	
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.							

编号 No.	名称 Name	数量 Quantity
MM1521 1500*2100	木制平开双扇门	2

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚电镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray							
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge		纱窗 Screen	— —	
玻璃 Glass	6厚白玻 6 thick white glass		制动 Closure	闭门器 Door closer		锁具 Lock	配套 —	
百叶 Louver	— —		门槛 Sill	— —		执手 Handle	配套 —	
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.							

Description:

1、The number of keys is confirmed by the owner and the supplier.

2、Doors and windows should be confirmed with the owner before ordering.

3、If the individual quantity in this door and window table does not match the actual dosage, the actual dosage shall prevail.

4、The division of the glass partition is only an indication, and the division is determined by the professional manufacturer according to the actual situation on the spot and the aesthetics.

5、All doors and windows are manufactured and installed by quality assurance manufacturers.

6、The high window on the wall (including the power window) is equipped with a manual hinge opening.

7、Aluminum alloy gold rainproof louvers are equipped with insect nets.

8、The sliding window sash should have means to prevent detachment from the outside, and when used for the external wall, a device for preventing the sash from falling out of the room should be provided.

9、A transparent glass door should be marked to prevent personal injury.

11、The height of the door opening should be calculated from the completion of the building. All doors and windows must be checked for actual hole size before machining.

12、Except as noted, see the "General Description of Building Construction Drawing Design".

13、＜ Indicates the opening direction of the door and window.

14、If there are no corresponding windows and doors in the doors and windows of the door and window table, it must be confirmed with the design before purchase, customization and construction.

15、The overall heat transfer coefficient of the external doors and windows with energy-saving requirements shall meet the requirements of the corresponding external doors and windows in the "Building Energy Efficiency Calculation Analysis Report". Exterior window structure: metal heat insulation profile (insulation strip height 26.0mm (5Low-e+15A+5 (medium light transmission, offline single silver), heat transfer coefficient 2.2W/m2.K, glass shading coefficient 0.65, window frame The coefficient is 0.75, the visible light transmittance is 0.60. The openable area of the outer window is not less than 30% of the window area. The outer door structure: 1.0mm steel plate + aluminum silicate fiber cotton (dry density 160Kg/m3) + 1.0mm steel plate), heat transfer coefficient The airtightness, watertightness and wind pressure rating of 2.2W/m2.K outer door and window shall comply with the relevant provisions of GB/T7106-2008, "Airtight, Watertight, Wind Pressure Performance Classification and Detection Methods for Building Exterior Doors and Windows". Airtight The property is not less than grade 6, that is, 1.5q1>1.0m3/m·h; the watertightness is not lower than grade 4, that is, 350Pa≤ΔP≤500Pa; the wind resistance is not lower than grade 5, that is, 3000Pa≤P3≤3500pa. The sound insulation performance classification is not lower than the level 4 of GB/T8485-2008 in the classification and detection method of air sound insulation performance of building doors and windows, that is, 40dB>R+C≥35dB.

16、Except as noted, the wall thickness of ordinary steel door frame is not less than 1.5mm, and the wall thickness of steel door panel is not less than 0.8mm. The minimum wall thickness of the aluminum alloy door is 2.0mm, and the minimum wall thickness of the aluminum alloy window is 1.6mm.

17、Metal and heat insulation profiles for door and window glass (insulation strip height 26.0mm) (5Low-e+15A+5 (medium light transmission, offline single silver), heat transfer coefficient 2.2W/m2.K, glass shading coefficient 0.65, window The frame factor is 0.75, and the visible light transmittance is 0.60. Regardless of the size of the glass, it is necessary to use tempered glass for various ceilings, indoor partitions, inclined assembly windows, stairs, balconies, platforms, corridors, halls, and public panels. Building entrances, entrance halls and other parts that may injure people; fireproof glass with fire protection requirements shall comply with the "Technical Regulations for the Application of Building Glass" JGJ113-2015 7.2 and the "Building Safety Glass Management Regulations" Development and Reform Commission [2003] 2116 and local supervisors Relevant regulations of the department. All glass, single glass, 5mm thick glass on the door and window is greater than or equal to 0.5m2, and the glass with thickness of 6mm is greater than or equal to 0.9m2. Tempered glass should be used. The glass for blocking the vertical wall of the smoke is made of 12 thick laminated fireproof glass. There shall be no dust or water vapor in the hollow layer of the hollow glass. The coating layer of the single-coated glass and the frosted surface of the frosted glass shall face indoors; the single-coated glass of the insulating glass shall be the most The outer layer and the coating layer should face indoors. The size of the door and window glass should be matched with the frame slot, and the door and window glass should not directly contact the metal profile; the glass should be in close contact with the positioning block, the caulking strip and the sealing paste. It should be firm and sealed.

18、The smoke prevention performance of the fire shutter door should be less than 0.2m3/m2.min when the pressure difference is 20Pa. The fire endurance of the fire shutter should comply with the current national standard "Fireproofing Test Method for Fireproof Roller" GB7633 Judging conditions. Fire shutter doors should be equipped with fire detectors and alarm systems.

19、All swing doors have door closers and double fire doors with sequencers.

索引图 Keyplan

1	IFC	20190329
版本 REV.	版本说明 Description	日期 Date

注册执业印章 Registered Stamp

注册执业师 Professional Engineer

出图印章 Print Stamp

咨询公司 Consultant

JLL

设计单位 Designer

十一科技

信息产业电子第十一设计研究院科技工程股份有限公司
The IT Electronics Eleventh Design & Research Institute Scientific and Technological Engineering Corporation Ltd.
中国 成都 新华大道双林路252.5号
NO. 251 Shuanglin Rd. Xinhua Avenue. Chengdu, China
设计证号: A151000523
邮编：610021 P.C.:610021

建设单位 Owner

Hengtong Optic-Electric India Private Ltd

项目名称 Project Name

Indian Optical Fiber and Cable Project

图纸名称 Drawing Title

建筑-Architecture

光纤光缆厂房-Optical Fiber Plant

门窗大样图五

DOOR AND WINDOW PICTURE 5

设 计 Designed By	莱智浩		项目号 Project No.	2017-08A-042
制 图 Drawn By	莱智浩		设计阶段 Des. Stage	施工图
校 对 Checked By	张凤磊		专 业 Discipline	建筑
审 核 Reviewed By	赵琴		比 例 Scale	1:100
审 定 Approved			版 本 Version	1
专业负责人 Discipline Leader	赵琴		日 期 Date	20190329
项目负责人 Design Manager	汤敏		页 数 Sheet No.	
图 号 Drawing No.	HTIN-AR-01-DWS-00-005			

专业 Discipline: 给排水 PL / 空调通风 HV / 工艺管道 PP / 电气 EL / 供电 IC / 自控 CO / 通信 TC / 电照 LI / 工艺 PR / 总图 MP / 建筑 AR / 结构 ST

签署 Signature