
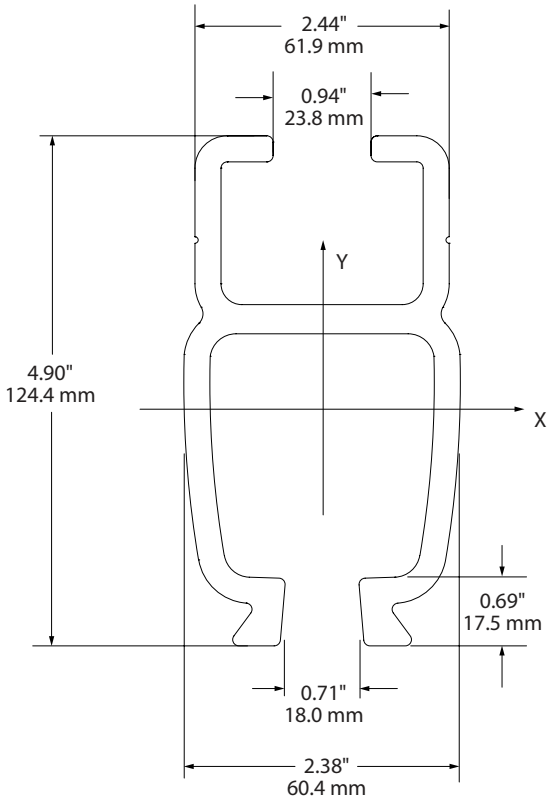


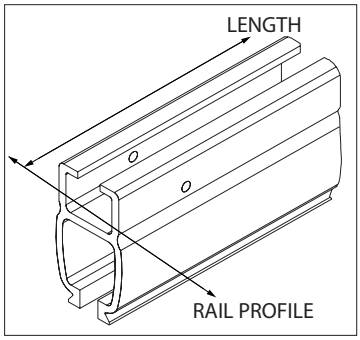

MOMENT OF INERTIA: I_{yy} = 2.80 IN^4 [1.16E6 mm^4]


I_{xx} = 6.81IN^4 [2.83E6 mm^4]


EXAMPLE
ORDER NUMBER:
30200 - 210 - 2

INDICATES SPLICE LUGS WELDED ON
INDICATES LENGTH OF RAIL IN FEET (210=21 FEET)
INDICATES RAIL PROFILE

NOTE: ALL RUNWAY RAIL WILL BE DRILLED FOR BOTH END STOPS AND WILL HAVE SPLICE LUGS WELDED ON.

Beam Hanger Kit • ZRA1/Parallel/Standard Flange/Part No. 30290

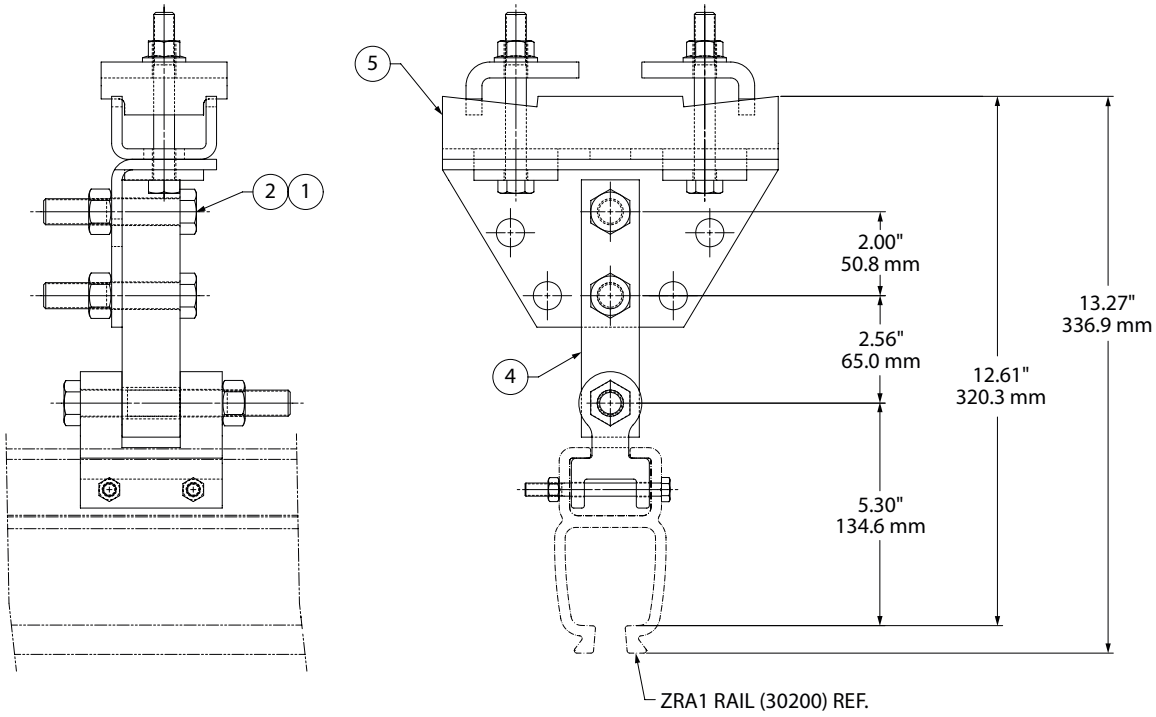

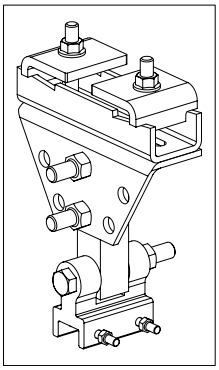

NOTE: SEE INSTALLATION MANUAL FOR EXPLODED VIEW.


STANDARD FLANGE HANGER KIT WILL ACCOMMODATE FROM 2.5"(63.5 mm) TO 5"(127.0 mm) FLANGE WIDTH.


ULTIMATE STRENGTH.....22,400 LBS.(10160.4 KG)
YIELD STRENGTH.....14,000 LBS.(6350.3 KG)
CAPACITY.....2,000 LBS.(907.18 KG)
MINIMUM RAIL RADIUS.....36"(914.4 mm)
WEIGHT OF ASSEMBLY.....15 LBS.(6.80 KG)

(Dwg. 54094271)

Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75587	Lock Nut, 5/8 - 11	2
2	ZHS72646	5/8 - 11 x 3.25" HHB Grade 5	2
3	30907 - 06	Safety Cable Assembly, Close Kit (not shown)	1
4	30285	Hanger Kit, ZRA1/T, Block, Perpendicular	1
5	30186	Hanger Kit, Standard Flange Beam	1

End Truck Assembly • ZRS2/3 on ZRA1/1000 lbs. (453.6 kg) Capacity/ Dual Trolley/Part No. 30298

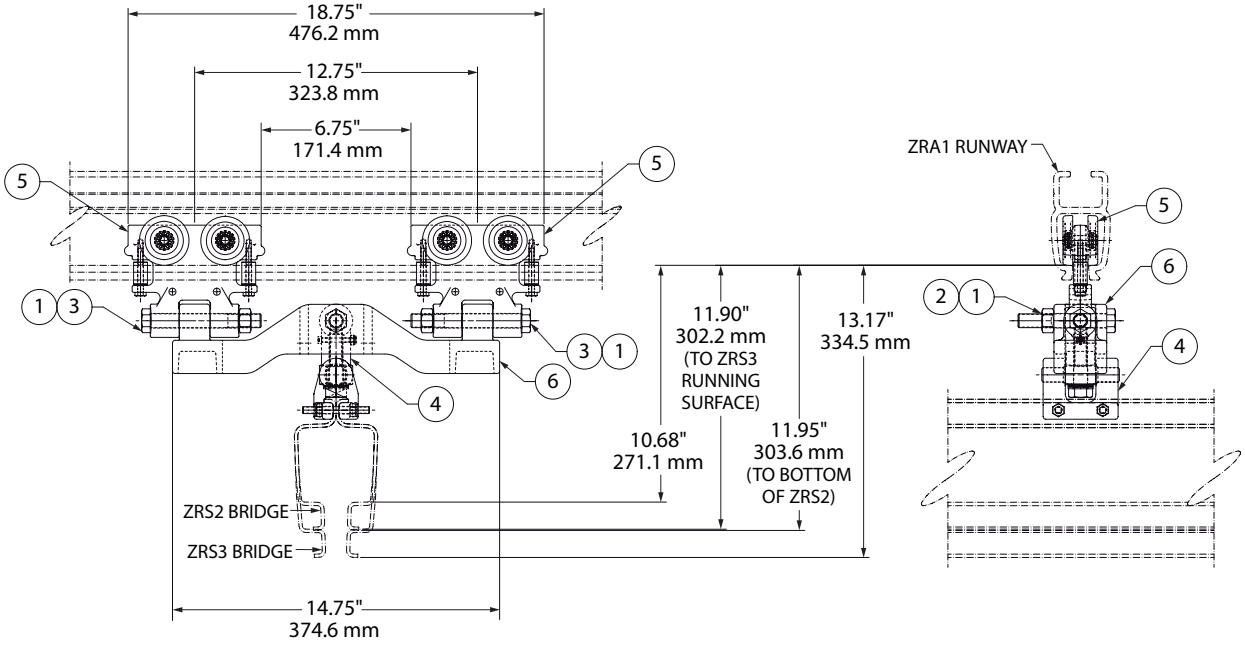



NOTE: SEE INSTALLATION MANUAL FOR EXPLODED VIEW.

ROLLING FRICTION ..... ONE PERCENT
ULTIMATE STRENGTH ..... 13,250 LBS.(6010.1 KG)
YIELD STRENGTH ..... 10,600 LBS.(4808.07 KG)
CAPACITY..... 1,000 LBS.(453.6 KG)
WEIGHT OF ASSEMBLY ..... 13 LBS.(5.9 KG)


NOTE: SAFETY CABLE ASSEMBLIES ARE INCLUDED IN BRIDGE CRANE ASSEMBLY. IF YOU NEED TO ORDER AN END TRUCK ASSEMBLY SEPERATELY, YOU MUST ALSO ORDER A SAFETY CABLE ASSEMBLY.

REF: PART NO. 30907 - LENGTH IN FEET (EXAMPLE: 06 = 6 FEET)

(Dwg. 54094347)


Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75587	Lock Nut, 5/8 - 11	3
2	ZHS72644	Hexagonal Bolt, 5/8 - 11 x 4.00 Grade 5	1
3	72623	Hexagonal Bolt, 5/8 - 11 x 5”	2
4	30596	Bridge Suspension Sub-assembly, ZRAS	1
5	30281	Aluminum Trolley ZRA1	2
6	30173	Dual Trolley Tie Bar, Machining	1

End Stops • ZRA1/Part No. Single - 30275/Redundant - 30277

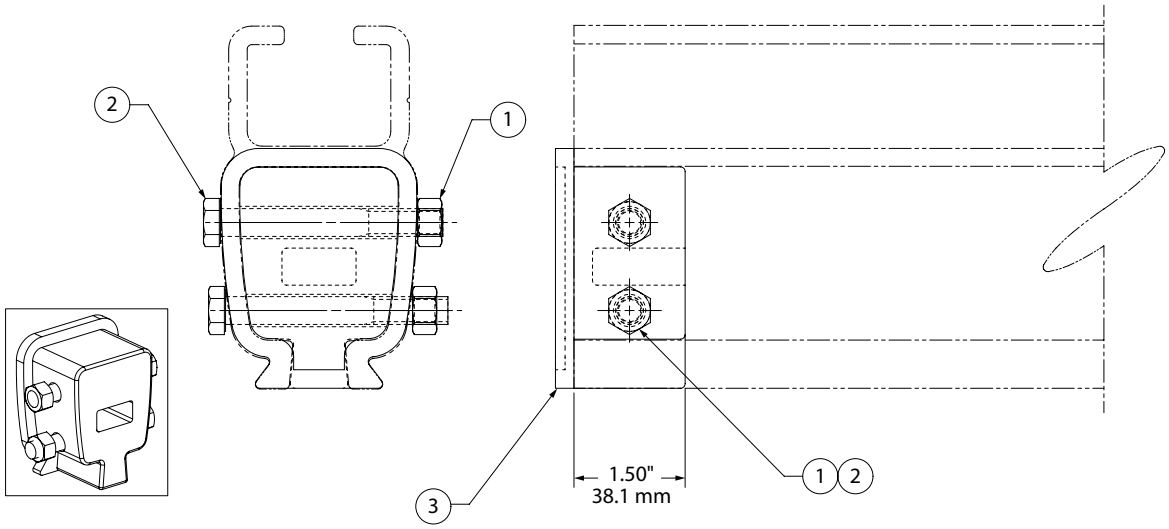

(Dwg. 54094024)


Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75583	Lock Nut, 3/8-16	2
2	ZHS71479	3/8-16 x 3" HCS Grade 5	2
3	30274	End Stop - ZRA1	1

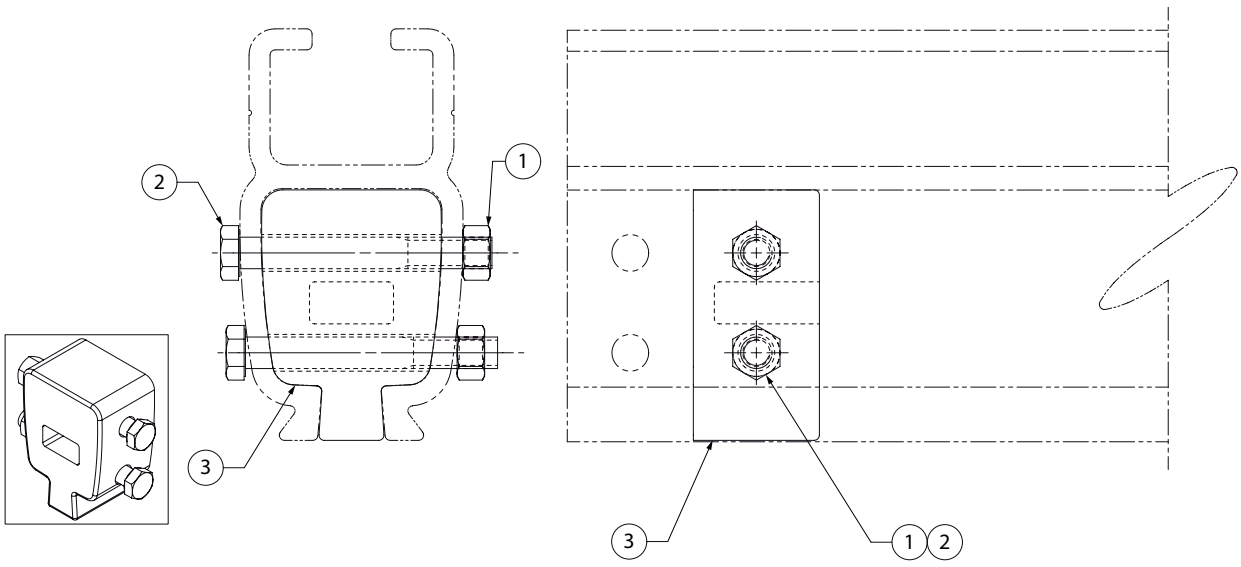


(Dwg. 54094032)

Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75583	Lock Nut, 3/8-16	2
2	ZHS71479	3/8 - 16 x 3" HCS Grade 5	2
3	30276	Redundant End Stop, ZRA1	2

Splice Bolt Kit • ZRA1/Part No. 30231

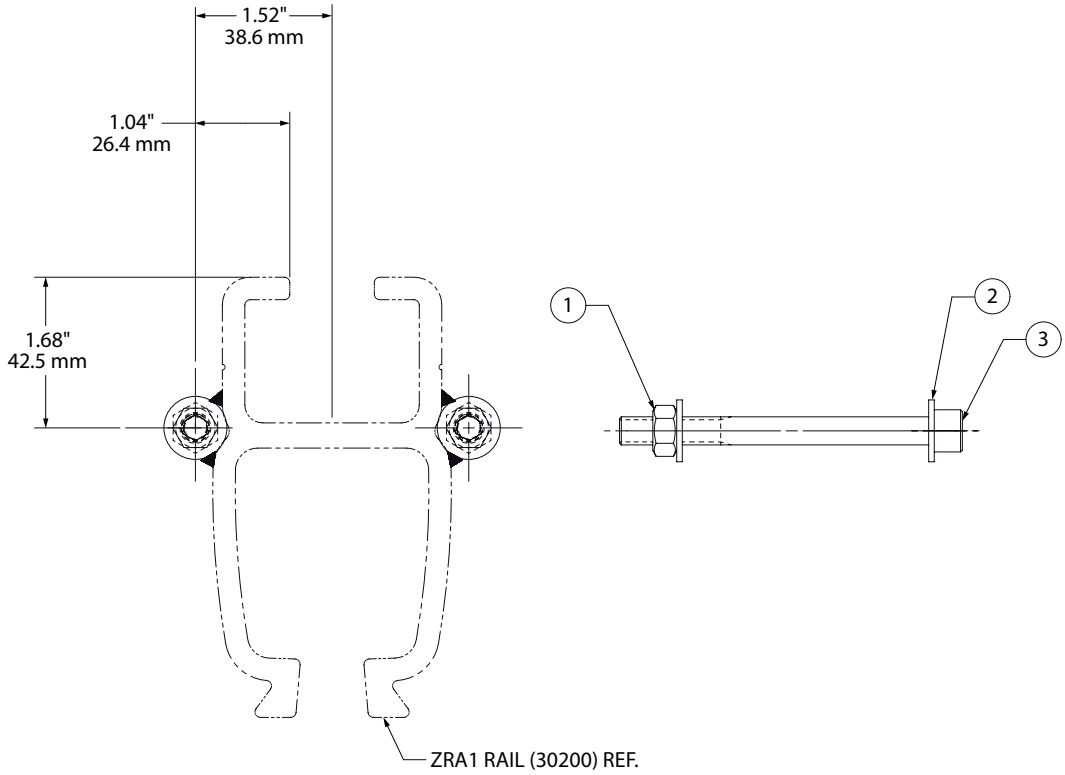

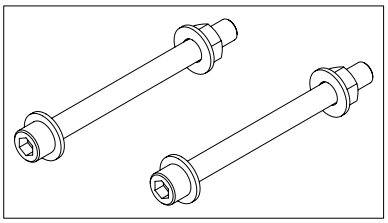


NOTE: THERE MUST BE A HANGER KIT WITHIN 12”(304.8 mm) OF THE SPLICE JOINT ON THE RUNWAY.


CONSULT THE FACTORY IF MODIFICATIONS NEED TO BE MADE TO SPLICE JOINTS THAT REQUIRE WELDING OF SPLICE LUGS.

(Dwg. 54093885)

Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75518	5/16 - 18, Nylon Insert Lock	2
2	74505	5/16, SAE Flat Washer	4
3	70926	5/16 - 18 x 3.5” SCS	2

ZRS2 Reaction Trolley • 1000 lbs. (453.6 kg) Capacity/Part No. 30511

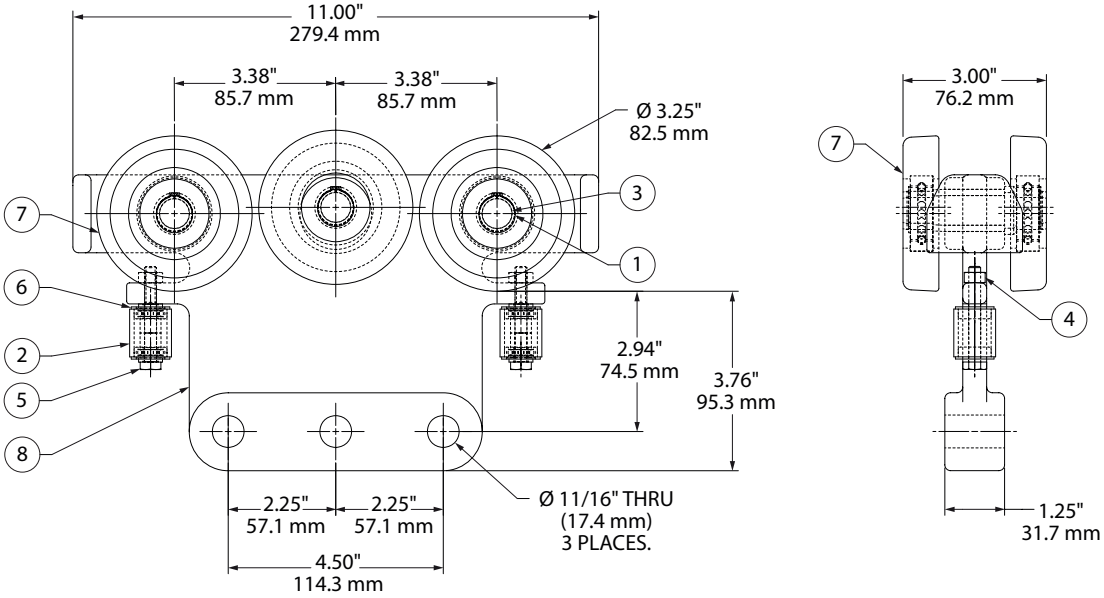



NOTE: SEE INSTALLATION MANUAL FOR EXPLODED VIEW.

ROLLING FRICTION ..... ONE PERCENT
MAXIMUM WHEEL LOAD ..... 250 LBS.(113.4 KG)
ULTIMATE STRENGTH ..... 17,250 LBS.(7824.46 KG)
YIELD STRENGTH ..... 14,575 LBS.(6611.10 KG)
CAPACITY..... 1000 LBS.(453.6 KG)
BODY..... HIGH TENSILE ALMAG
WHEELS..... 3.25"(82.5 mm) DIA. DELRIN
BEARINGS..... BALL, LUBRICATED
SIDE GUIDE ROLLERS..... DELRIN
WEIGHT OF TROLLEY..... 6.4 LBS.(2.90 KG)
MINIMUM RAIL RADIUS (ZRS2)..... 60.00"(1524.0 mm)


NOTE: A SAFETY CABLE ASSEMBLY IS NOT INCLUDED WITH THIS TROLLEY. YOU MUST ORDER IT SEPERATELY.

REF: PART NO. 30907 - LENGTH IN FEET (EXAMPLE: 06 = 6 FEET)

(Dwg. 54095211)


Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	93939	External Retaining Ring	6
2	93936	Guide Roller	2
3	93934	Axle	3
4	75581	Lock Nut, 1/4 - 20 PT	2
5	ZHS70484	HCS 1/4 - 20 x 2 Z5	2
6	65038	Radial Ball Bearing	4
7	30056	Trolley Wheel Assembly	6
8	30014	Trolley Body, Machining	1

End Stops • ZRS2 Steel Rail/Part No. (Single-30804) (Redundant-30806)

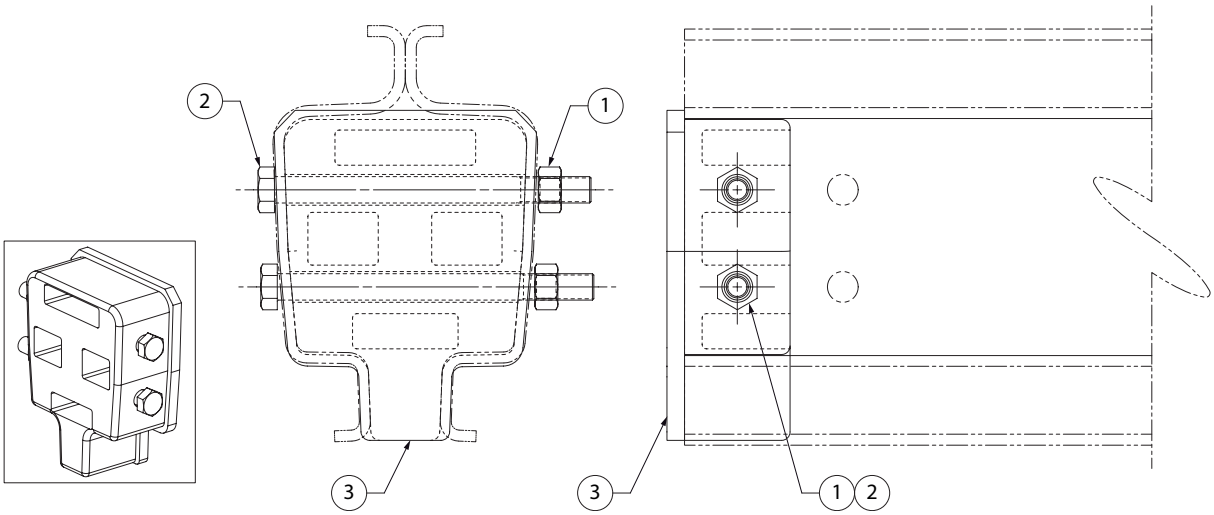

(Dwg. 54096110)


Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75583	Lock Nut, 3/8 - 16	2
2	ZHS71481	3/8 - 16 x 4.5" HCS Grade 5	2
3	30803	End Stop - ZRS2	1

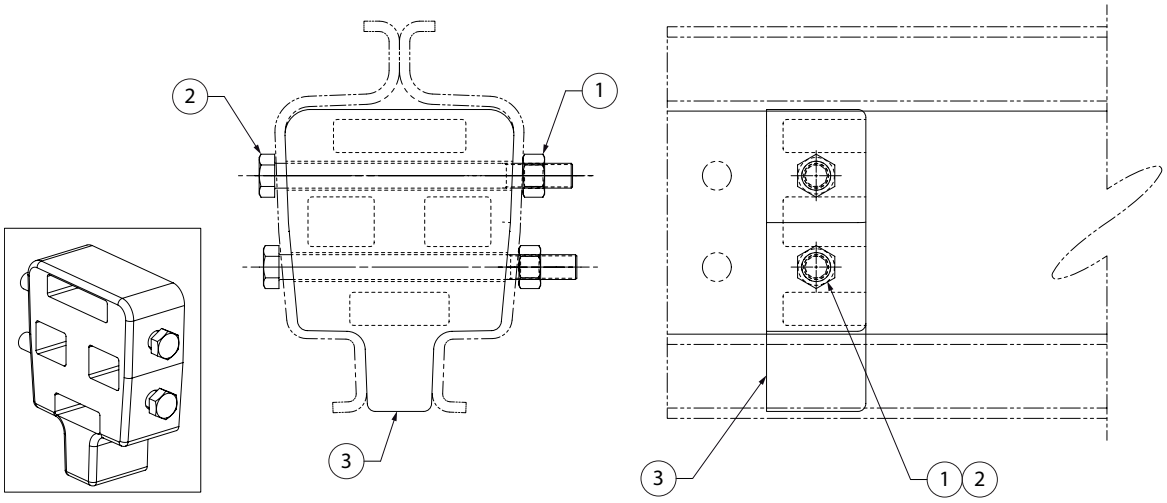

(Dwg. 54096136)

Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	75583	Lock Nut, 3/8 - 16	2
2	ZHS71481	3/8 - 16 x 4.5" HCS Grade 5	2
3	30805	Redundant End Stop - ZRS2	1

Safety Cable Assembly • Part No. 30907 - XX

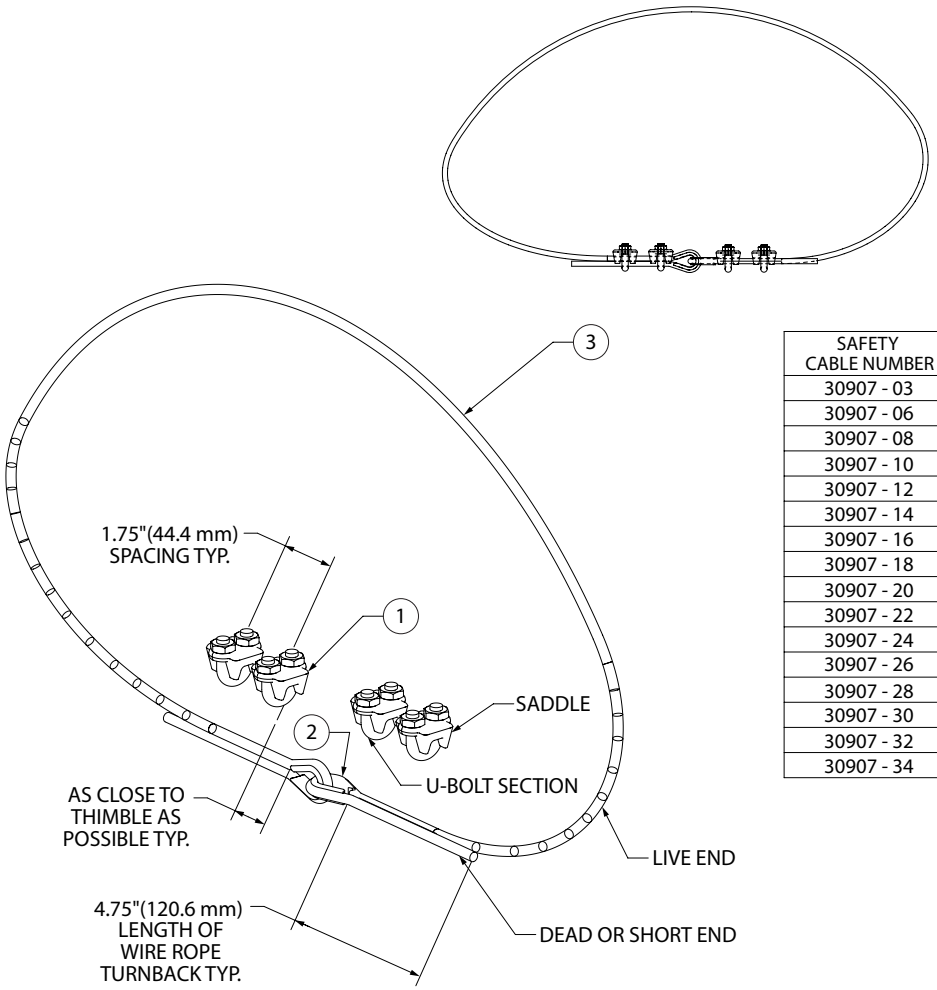

SAFETY CABLE NUMBER	WIRE ROPE LENGTH (FT.)
30907 - 03	3
30907 - 06	6
30907 - 08	8
30907 - 10	10
30907 - 12	12
30907 - 14	14
30907 - 16	16
30907 - 18	18
30907 - 20	20
30907 - 22	22
30907 - 24	24
30907 - 26	26
30907 - 28	28
30907 - 30	30
30907 - 32	32
30907 - 34	34

1. Safety cables are to be assembled as illustrated above and installed to allow free movement of the Hanger Kit, to provide minimum free drop of the components if the primary support should fail.
2. The "U" bolt portion of the Wire Rope Clamp should be positioned on the dead end of the cable as shown.
3. Thimble must be used on both ends of the cable.
4. Inboard clamps should be positioned to retain thimble in place. Outboard clamps should be placed one clamp saddle width from dead end of cable.
5. If cable is too long, it should be cut to a suitable length.

NOTE: SEE INSTALLATION MANUAL FOR EXPLODED VIEW.

(Dwg. 54096698)

Bill of Materials			
Item No.	**Part No.**	**Description**	**Amt.**
1	10235	Wire Rope Clamp, 1/4 U-Bolt	4
2	10212	Thimble, 1/4 Wire Rope	2
3	10099	Wire Rope, 1/4 Galvanized (Measured in FT.)	1