Price list







ACO DRAIN®

Line and spot drainage

Price list 1/2005

valid as from 01.01.2005


ACO *drain*
passavant

Definition of load classes DIN EN 1433


Class A 15[1)]	Traffic areas used exclusively by pedestrians and cyclists and similar areas, for example green areas.
Class B 125[1)]	Paths, pedestrian precincts and similar areas, car parks and car parking buildings.
Class C 250[1)]	Gutter areas of roads, foot paths and kerbs of roads.
Class D 400[1)]	Traffic lanes of roads, also pedestrian roads, parking areas and similar paved traffic areas (for example motorway parking areas).
Class E 600[1)]	Non-public traffic areas exposed to particularly high wheel loads, for example traffic lanes in industrial estates.
Class F 900[1)]	Special areas, such as for example certain aircraft traffic areas at airports.

1) Test load (kN) according to DIN EN 1433

Definition of slope types



1 Water level slope/ terrain slope



2 Base slope as integrated slope in channel bottom 0.5 %



3 Base slope as step slope, height difference 2.5/5 cm

SF = Line drainage systems with ACO safety groove principle (SF) for setting-up of liquid-tight channel trains, permanently elastic sealing of the ACO safety groove with sealing compound/primer

Powerlock® = screwless stop for heavy duty areas D 400, E 600, F 900
Drainlock® = screwless stop for load classes A 15 to E 600


Contents


NEW!	**Line drainage system ACO DRAIN® Multiline V 100 S/G to V 300 S/G for applications up to E 600 with edge protection of steel/stainless steel/cast iron GGG**	*Load class*	*Page*
	V 100 with Drainlock®	c/o* 100	A - E	8 - 15
	V 100 Flat channel with Drainlock®	c/o* 100	A - E	8 - 15
	V 150 with Drainlock®	c/o* 150	A - E	16 - 21
	V 150 Flat channel with Drainlock®	c/o*150	A - E	16 - 21
	V 200 with Drainlock®	c/o* 200	A - E	22 - 27
	V 200 Flat channel with Drainlock®	c/o* 200	A - E	22 - 27
	V 300 with Drainlock®	c/o* 300	A - E	28 - 33
	V 300 Flat channel with Drainlock®	c/o* 300	A - E	28 - 33
	Line drainage system ACO DRAIN® S 100 K to S 300 K for heavy duty applications up to class F, with cast iron edge protection 6 mm and cast iron grating	*Load class*	*Page*
	S 100 K with Powerlock®	c/o* 100	A - F	34
	S 100 K Flat channel with Powerlock®	c/o* 100	A - F	36
	S 150 K with Powerlock®	c/o* 150	A - F	39
	S 200 K with Powerlock®	c/o* 200	A - F	42
	S 200 K Flat channel with Powerlock®	c/o* 200	A - F	43
	S 300 K with Powerlock®	c/o* 300	A - F	45
	Line drainage system ACO DRAIN® Monoblock PD 100 C/PD 200 C and RD 100 D/RD 200 D/RD 300 F of polymerbeton	*Load class*	*Page*
	PD 100 C/PD 200 C	c/o* 100/c/o* 200	A - C	47
NEW!	RD 100 D/RD 200 D	c/o* 100/c/o* 200	A - D	50
NEW!	RD 300 F	c/o* 300	A - F	55
	Slotted channel systems	*Load class*	*Page*
	SR 100 S with steel top/stainless steel top	c/o* 100	A - C	57
	SR 150 S with steel top/stainless steel top	c/o* 150	A - D	58
	Special channel systems	*Load class*	*Page*
	Line drainage system for road edge drainage ACO DRAIN Kerb Drain®		A - D	60
	System solution channels of large nominal widths c/o* 400/500		A - E	63
	System solution seepage			64
	Spot drainge	*Load class*	*Page*
NEW!	Yard drain with Pointlock with lip labyrinth seal		A - B	65
	Spot drain		A - F	66
	Accessories suitable for all systems	*Load class*	*Page*
	Accessories for liquid-tight channel trains, pre-cut parts and bores			68
	Gullies with Powerlock®		A - F	69
	Outlet sockets and odour seals			71
	ACO Wedges		*Page*
	ACO Wedges for the height adjustment of manhole covers			72
	Service		*Page*
				73
				74
				75
	Supplementary component range for line drainage systems	*Load class*	*Page*
NEW!	Multiline® V 400 G		A - E	77
	Multiline® V 500 G		A - E	78
	Cover gratings Multiline® V 100 S and Multiline® V 100 G with Drainlock®		A - D	79
	ACO DRAIN® Light point		D	79

*c/o = clear opening


Line drainage


Multiline Product data

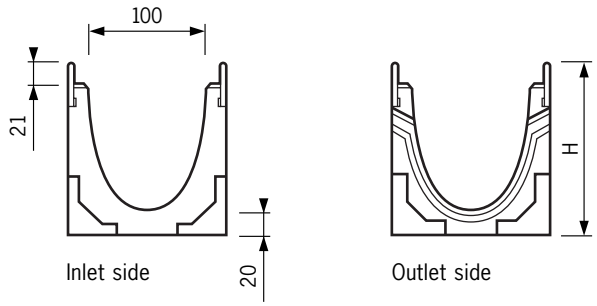

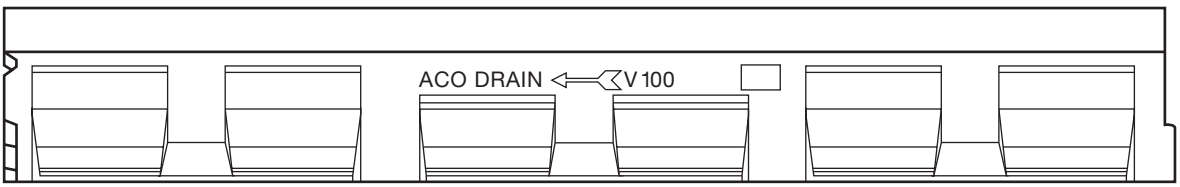

Multiline channel V 100

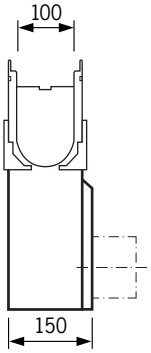


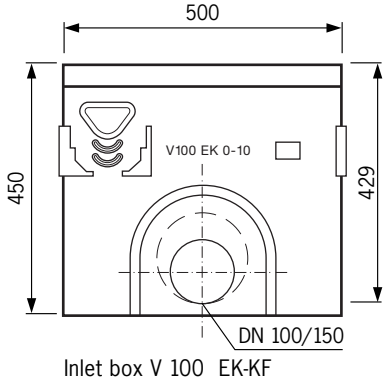


Inlet box V 100 EK-KF

Structure length cm	Structure width cm	Height front cm	end cm	Type	Base slope 0.5%
100.0	13.5	15.0	15.0	0.0	
100.0	13.5	16.0	16.0	0.0.2**	
50.0	13.5	15.0	15.0	0.1	
50.0	13.5	16.0	16.0	0.2**	
100.0	13.5	15.0	15.5	1	■
100.0	13.5	15.5	16.0	2	■
100.0	13.5	16.0	16.5	3	■
100.0	13.5	16.5	17.0	4	■
100.0	13.5	17.0	17.5	5	■
100.0	13.5	17.5	17.5	5.0	
100.0	13.5	18.5	18.5	5.0.2**	
50.0	13.5	17.5	17.5	5.1	
50.0	13.5	18.5	18.5	5.2**	
100.0	13.5	17.5	18.0	6	■
100.0	13.5	18.0	18.5	7	■
100.0	13.5	18.5	19.0	8	■
100.0	13.5	19.0	19.5	9	■
100.0	13.5	19.5	20.0	10	■
100.0	13.5	20.0	20.0	10.0	
100.0	13.5	21.0	21.0	10.0.2**	
50.0	13.5	20.0	20.0	10.1	
50.0	13.5	21.0	21.0	10.2**	
100.0	13.5	22.5	22.5	15.0	
100.0	13.5	23.5	23.5	15.0.2**	
50.0	13.5	22.5	22.5	15.1	
50.0	13.5	23.5	23.5	15.2**	
100.0	13.5	25.0	25.0	20.0	
100.0	13.5	26.0	26.0	20.0.2**	
50.0	13.5	25.0	25.0	20.1	
50.0	13.5	26.0	26.0	20.2**	

**with integrated lip labyrinth sealing for liquid-tight connection to ground line

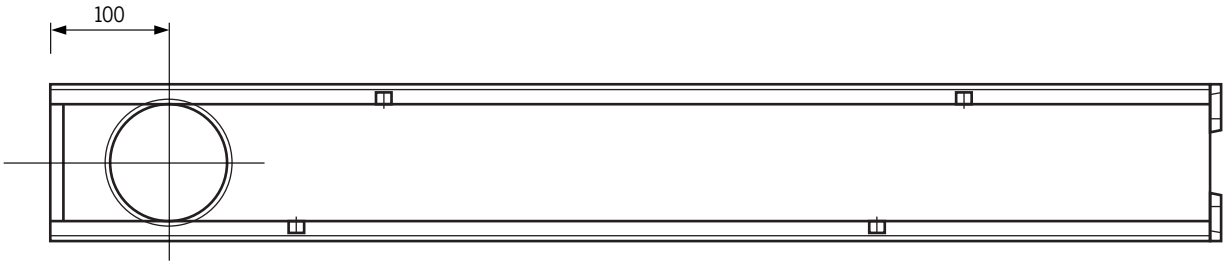



with integrated lip labyrinth sealing

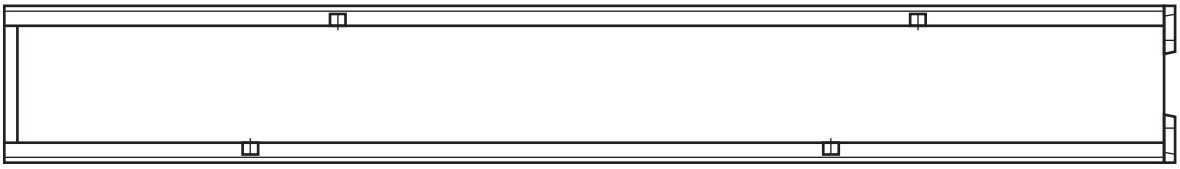

without opening

Slope types			Connection with ground line			
Step slope	**Water level slope**	**Corner-T-cross connection**	**With integr. lip labyrinth sealing DN 100**	**Pre-shaped for vertical outlet DN 100**	**Front wall for horizontal connection DN 100**	**Connection to inlet box**
■	■				■	■
■	■		■		■	■
■	■	■		■	■	■
■	■	■	■		■	■
						■
						■
						■
						■
					■	■
■	■				■	■
■	■		■		■	■
■	■	■		■	■	■
■	■	■	■		■	■
						■
						■
						■
						■
					■	■
■	■				■	■
■	■		■		■	■
■	■	■		■	■	■
■	■	■	■		■	■
■	■				■	■
■	■		■		■	■
■	■	■		■	■	■
■	■	■	■		■	■
■	■				■	■
■	■		■		■	■
■	■	■		■	■	■
■	■	■	■		■	■

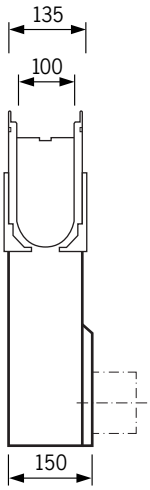


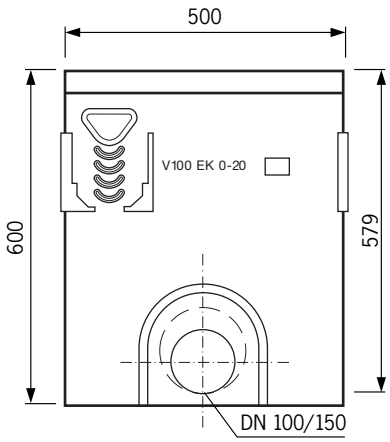


Inlet box V 100 EK-LF

System overview

ACO DRAIN® Multiline V 100

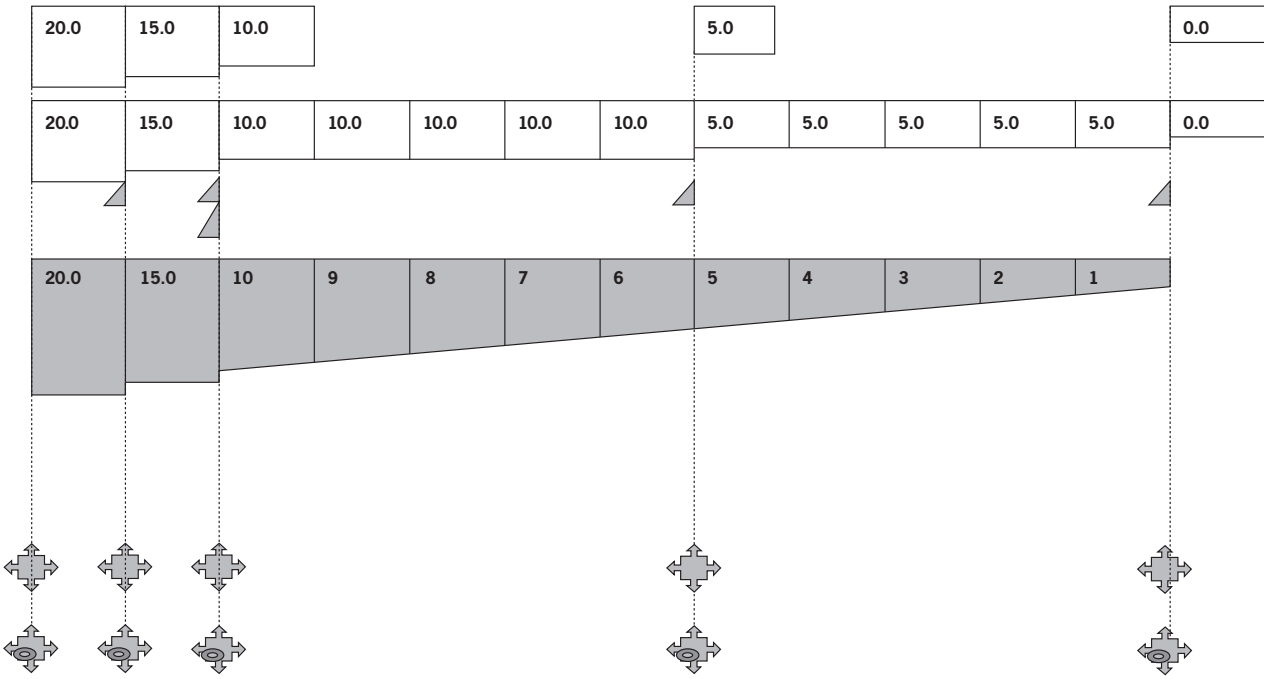

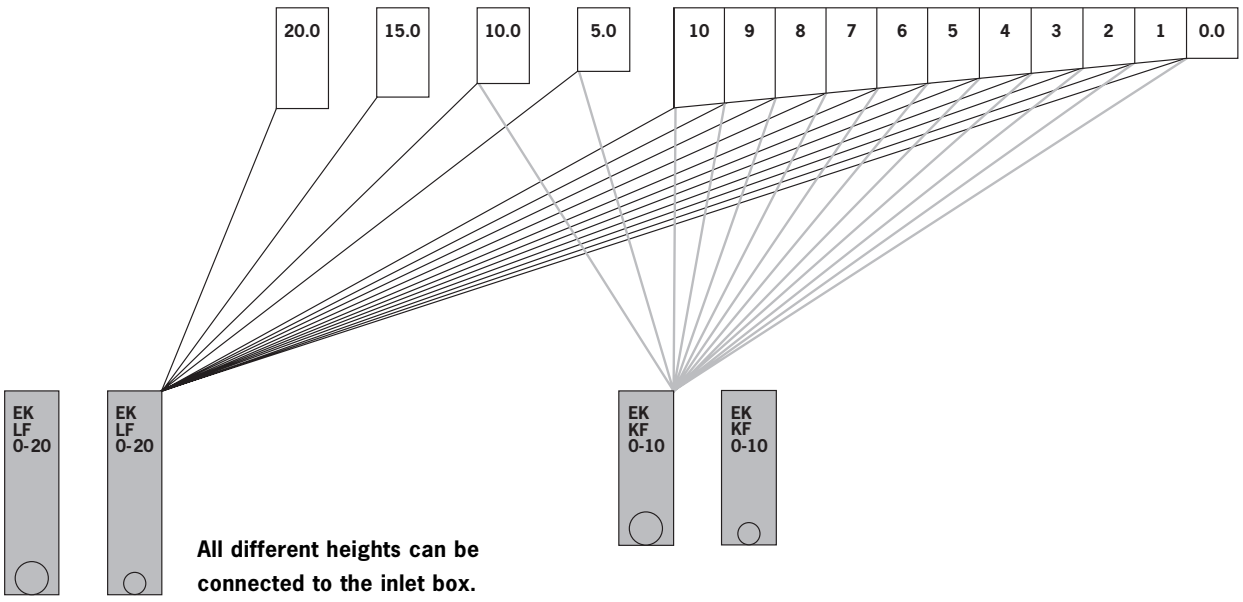

All different heights can be connected to the inlet box.



1 m channel, optionally with lip labyrinth sealing DN 100 for vertical outlet **NEW**



1 m channel with 0.5 % slope **NEW**



0.5 m channel, pre-shaped for corner-, T- and cross connection and pre-shaped for vertical outlet (to be knocked out) **NEW**




0.5 m channel, pre-shaped for corner-, T- and cross connection and with vertical outlet with integrated lip labyrinth sealing **NEW**




Adaper piece 2.5 cm **NEW**




Adaper piece 5.0 cm **NEW**



Short design of inlet box 0.5 m length with continuous connection of heights 0–10 and pre-shaped for corner-, T- and cross connection in connecting heights 0 + 5 + 10 and horizontal **drain DN 100 or DN 150** with integrated lip labyrinth sealing. **NEW**



Long design of inlet box 0.5 m length with continuous connection of heights 0–20 and pre-shaped for corner-, T- and cross connection in connecting heights 0 + 5 + 10 + 15 + 20 and horizontal **drain DN 100 or DN 150** with integrated lip labyrinth sealing. **NEW**

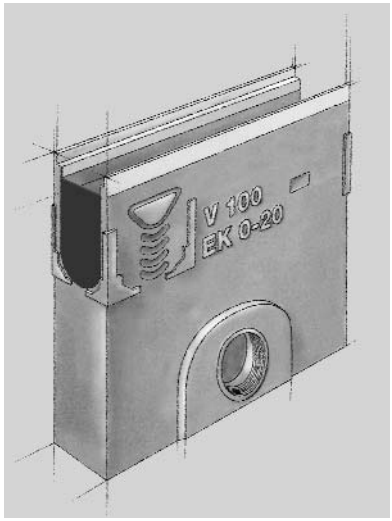

Inlet box for connection of all heights with connection template to be cut out and with newly developed lip labyrinth sealing for liquid-tight connection of ground line.

Line drainage

NEW!

Line drainage system Multiline V 100[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Official test sign Z-74.4-51[7]

Technical details for download see also www.acodrain.de

Channel body V 100 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting

							Cast iron frame GGG 5 mm		Galvanised steel frame 4 mm		Stainless steel frame 4 mm	
	Length	Width	Height									
Type	cm	cm	Front cm	End cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
0.0	100,0	13,5	15,0	15,0	16,5	24	12530		12330		12430	
0.0.2 [1]	100,0	13,5	16,0	16,0	16,7	12	12531		12334		12434	
0.1 [3] [4]	50,0	13,5	15,0	15,0	9,1	12	12532		12332		12432	
0.2 [1] [3]	50,0	13,5	16,0	16,0	9,0	12	12533		12333		12433	
1	100,0	13,5	15,0	15,5	16,5	12	12501		12301		12401	
2	100,0	13,5	15,5	16,0	16,5	12	12502		12302		12402	
3	100,0	13,5	16,0	16,5	17,0	12	12503		12303		12403	
4	100,0	13,5	16,5	17,0	17,6	12	12504		12304		12404	
5	100,0	13,5	17,0	17,5	18,0	12	12505		12305		12405	
5.0	100,0	13,5	17,5	17,5	19,0	24	12540		12340		12440	
5.0.2 [1]	100,0	13,5	18,5	18,5	18,7	12	12541		12344		12444	
5.1 [3] [4]	50,0	13,5	17,5	17,5	9,7	12	12542		12342		12442	
5.2 [1] [3]	50,0	13,5	18,5	18,5	9,4	12	12543		12343		12443	
6	100,0	13,5	17,5	18,0	18,5	12	12506		12306		12406	
7	100,0	13,5	18,0	18,5	19,0	12	12507		12307		12407	
8	100,0	13,5	18,5	19,0	19,3	12	12508		12308		12408	
9	100,0	13,5	19,0	19,5	19,7	12	12509		12309		12409	
10	100,0	13,5	19,5	20,0	20,0	12	12510		12310		12410	
10.0	100,0	13,5	20,0	20,0	21,0	24	12550		12350		12450	
10.0.2 [1]	100,0	13,5	21,0	21,0	20,1	12	12551		12354		12454	
10.1 [3] [4]	50,0	13,5	20,0	20,0	11,3	12	12552		12352		12452	
10.2 [1] [3]	50,0	13,5	21,0	21,0	11,0	12	12553		12353		12453	
15.0	100,0	13,5	22,5	22,5	23,0	12	12560		12360		12460	
15.0.2 [1]	100,0	13,5	23,5	23,5	22,0	6	12561		12364		12464	
15.1 [3] [4]	50,0	13,5	22,5	22,5	13,3	12	12562		12362		12462	
15.2 [1] [3]	50,0	13,5	23,5	23,5	13,0	12	12563		12363		12463	
20.0	100,0	13,5	25,0	25,0	25,0	12	12570		12370		12470	
20.0.2 [1]	100,0	13,5	26,0	26,0	24,4	6	12571		12374		12474	
20.1 [3] [4]	50,0	13,5	25,0	25,0	13,5	12	12572		12372		12472	
20.2 [1] [3]	50,0	13,5	26,0	26,0	13,2	12	12573		12373		12473	

Flat channel Multiline V 100 of polymer concrete, with integrated edge protection, height 8.0 cm/10.0 cm, load class A 15 - E 600 with ACO DRAIN® safety groove (SF)

Channel body BH 8	100,0	13,5	8,0	8,0	9,0	30	12523		12323		12423	
Channel body BH 10	100,0	13,5	10,0	10,0	9,0	30	12521		12321		12421	
Channel body BH 8 with integrated sealing DN 100	100,0	13,5	9,0	9,0	12,0	10	12524		12324		12424	
Channel body BH 10 with integrated sealing DN 100	100,0	13,5	11,0	11,0	12,0	10	12522		12322		12422	


NEW!

Line drainage system Multiline V 100[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection


With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Official test sign Z-74.4-51[7]


Technical details for download see also www.acodrain.de

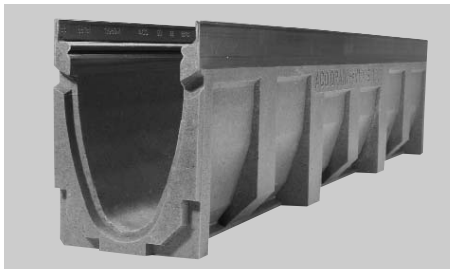


Channel body V 100 of polymer concrete with integrated edge protection

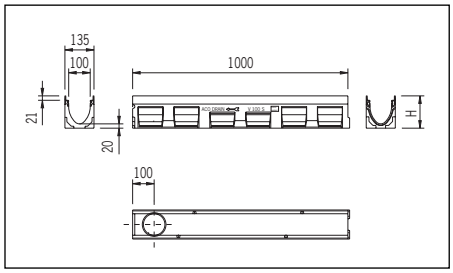


Dimensioning of channel body V 100, 1m

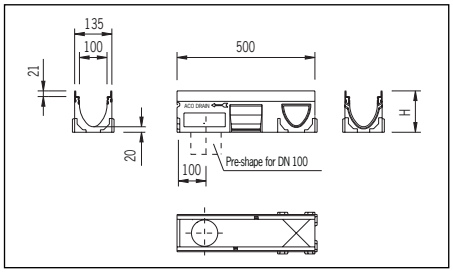


Dimensioning of channel body V 100, 0.5 m pre-shaped

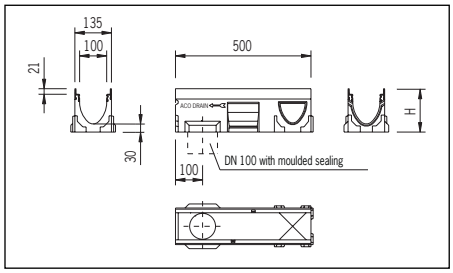

Dimensioning of channel body V 100, 0.5 m with lip labyrinth sealing

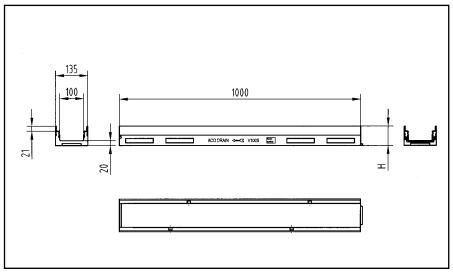

Dimensioning of flat channel V 100, height 8/10 cm

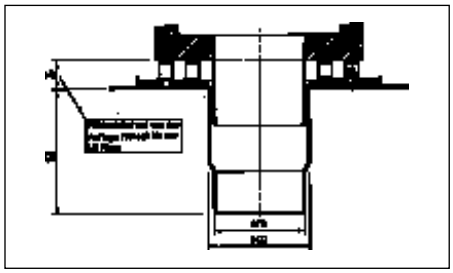

ACO DRAIN® intermediate raising element DN 100 with clamping sealing flange (prices see page 71)

1) With integrated lip labyrinth sealing for liquid-tight connection to ground line DN 100
3) Channel body with lateral pre-shapes for corner-, T- and cross connections
4) Pre-shaped for vertical outlet DN 100 to be knocked out
5) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
7) Not applicable to flat channels.

Cover gratings see page 14/15.

Line drainage

NEW!

Line drainage system Multiline V 100[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Official test sign Z-74.4-51

Inlet box V 100 short design/long design with Drainlock®, of polymer concrete, with integrated edge protection, with sludge bucket, with connecting template to be cut out up to height 10./20. with integrated lip labyrinth sealing DN 100 or DN 150

						Cast iron frame GGG 5 mm		Galvanised steel frame 4 mm		Stainless steel frame 4 mm	
Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
Inlet box DN 100	50,0	13,5	45,0	25,3	10	12591		12391		12491	
Inlet box DN 100	50,0	13,5	60,0	30,0	10	12592		12392		12492	
Inlet box DN 150	50,0	13,5	45,0	25,3	10	12598		12398		12498	
Inlet box DN 150	50,0	13,5	60,0	30,0	10	12599		12399		12499	

Polymer concrete universal front wall, with edge protection, for channel front and end

Type 0. - 20.				1,4	15	12585		12385		12485	

Polymer concrete universal front wall, with edge protection, for flat channels 8 cm and 10 cm for channel front and end

for 8 cm				0,6	20	12581		12381		12481	
for 10 cm				0,7	20	12580		12380		12480	

Polymer concrete front wall for channel end, with integrated lip labyrinth sealing, with edge protection, for connection DN 100

for height 0.				0,7	6	12586		12386		12486	
for height 5.				0,8	6	12587		12387		12487	
for height 10.				0,9	6	12588		12388		12488	
for height 15.				1,1	6	12589		12389		12489	
for height 20.				1,2	6	12590		12390		12490	

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.


NEW!

Line drainage system Multiline V 100[5)] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection


With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Official test sign Z-74.4-51


Technical details for download see also www.acodrain.de

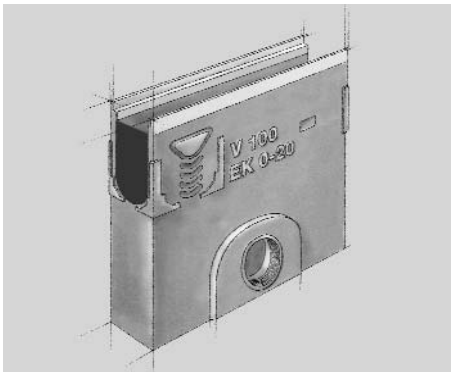


Inlet box V 100

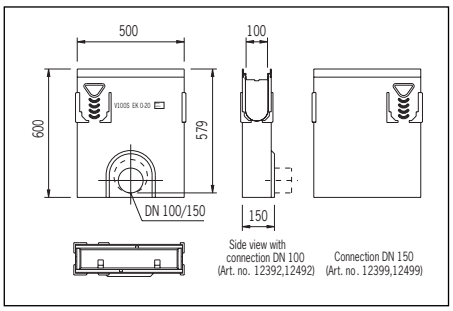

Dimensioning of inlet box V 100, long design

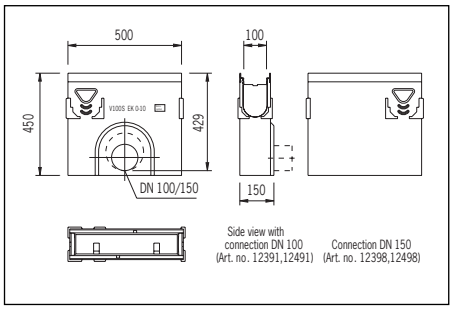

Dimensioning of inlet box V 100, short design

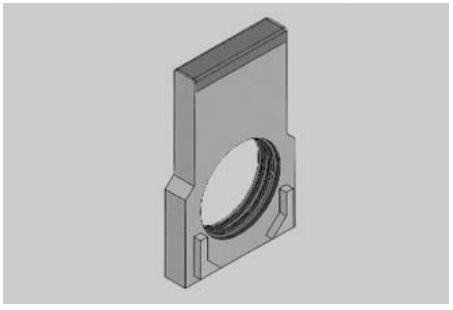

Front wall with edge, with lip labyrinth sealing

Line drainage

NEW!

Line drainage system Multiline V 100[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Adapter piece for bridging of height differences when fitting in step slope

Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	Cast iron frame GGG 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame 4 mm EDP order no.	€uro/ unit
Adapter piece suitable for adapting 0. to 5.											
adapting 5. to 10.											
adapting 10. to 15.											
adapting 15. to 20.				0,4	10	12600		12600		12600	
Adapter piece suitable for adapting 0. to 10.											
adapting 10. to 20.				0,8	10	12601		12601		12600	

Polymer concrete adapter for flow direction change with edge protection

suitabe for type 0.				0,7	6	12593		12393		12493	
suitabe for type 5.				0,8	6	12594		12394		12494	
suitabe for type 10.				0,9	6	12595		12395		12495	
suitabe for type 15.				1,0	6	12596		12396		12496	
suitabe for type 20.				1,1	6	12597		12397		12497	

Odour seal for inlet box DN 100

Odour seal, PP, single-body						01509		01509		01509	
Odour seal, PVC, dual-body						02640		02640		02640	

Grating hook for cover gratings with Drainlock®

Grating hook to lift out the cover gratings				0,25		01290		01290		01290	


[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

NEW!


Line drainage system Multiline V 100[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

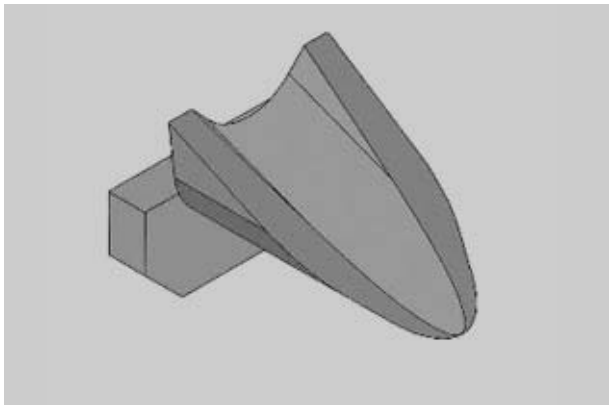


Adapter piece for adapting 5 cm

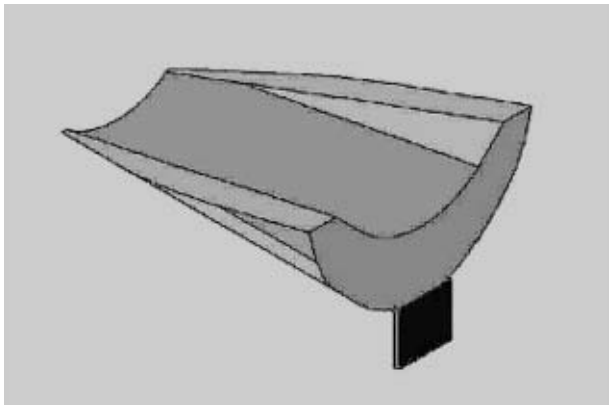

Adapter piece for adapting 2.5 cm

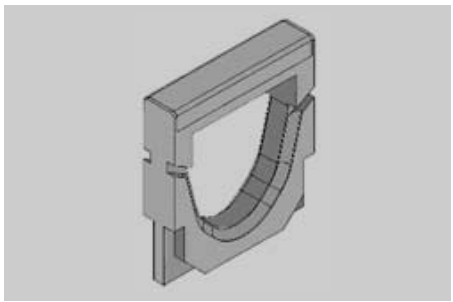

Adapter for flow direction change

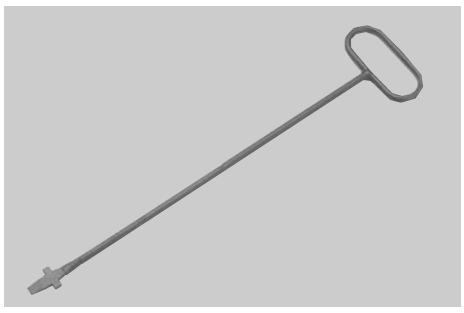

ACO DRAIN® grating hook

Line drainage

NEW!

Cover gratings for line drainage system Multiline V 100 S[5]/V 100 G[5] with Drainlock®, with edge protection galvanised steel, stainless steel and cast iron

Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Cover gratings with Drainlock® for channel bodies and inlet boxes V 100 S/V 100 G

Load class A 15


	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Bar grating SW 10 mm	100,0	12,3	312	2,2	200	12610	
SK design, galvanised steel	50,0	12,3	312	1,0	200	12611	
Bar grating SW 10 mm	100,0	12,3	312	2,2	200	12640	
SK design, stainless steel	50,0	12,3	312	1,0	200	12641	
Perforated grating	100,0	12,3	178	2,6	100	12652	
of stainless steel	50,0	12,3	178	1,3	50	12653	


Load class B 125


Mesh grating	100,0	12,3	880	2,8	200	12616	
MW 25 x 12.5	50,0	12,3	880	1,5	200	12617	
galvanised steel							
Mesh grating	100,0	12,3	880	2,8	100	12646	
MW 25 x 12.5	50,0	12,3	880	1,5	100	12647	
stainless steel							


Load class C 250


Bar grating SW 12 mm	50,0	12,3	371	3,3	200	12670	
SK design cast iron GGG							
Longtudinal rod grating	50,0	12,3	433	3,5	200	12673	
cast iron, in mesh optics							
MW 41.5 x 17							
Bar grating SW 10 mm	100,0	12,3	312	4,3	200	12614	
SK design, galvanised steel	50,0	12,3	312	2,2	200	12615	
Bar grating SW 10 mm	100,0	12,3	312	4,3	200	12644	
SK design, stainless steel	50,0	12,3	312	2,2	200	12645	
Mesh grating	100,0	12,3	880	3,1	100	12618	
MW 25 x 12.5	50,0	12,3	880	1,5	100	12619	
galvanised steel							
Mesh grating	100,0	12,3	880	3,1	100	12648	
MW 25 x 12.5	50,0	12,3	880	1,5	100	12649	
stainless steel							

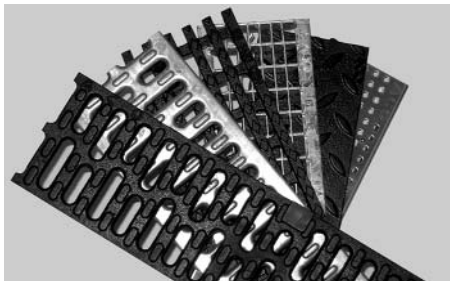
Cover gratings V 100 S/V 100 G


Bar grating


Perforated grating


Mesh grating


Longitudinal rod grating

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

Cover gratings for line drainage system Multiline V 100 S[5]/V 100 G[5] with Drainlock®, with edge protection galvanised steel, stainless steel and cast iron

Clear opening 10.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Cover gratings with Drainlock® for channel bodies and inlet boxes V 100 S/V 100 G


Load class D 400

	Length cm	Width cm	Inlet section cm^2/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Bar grating SW 12 mm SK design cast iron GGG	50,0	12,3	371	4,0	200	12671	
Longitudinal rod grating cast iron, in mesh optics MW 41.5 x 17	50,0	12,3	433	4,7		12674	
Mesh grating	100,0	12,3	880	5,2	100	12620	
MW 25 x 12.5 galvanised steel	50,0	12,3	880	2,8	100	12621	
Mesh grating	100,0	12,3	880	5,2	100	12650	
MW 25 x 12.5 stainless steel	50,0	12,3	880	2,8	100	12651	


Load class E 600

Bar grating SW 12 mm SK design cast iron GGG	50,0	12,3	371	4,0	200	12671	
Longitudinal rod grating cast iron, in mesh optics MW 41,5 x 17	50,0	12,3	433	4,7	200	12674	
Cast iron cover plate	50,0	12,3	—	5,6	200	12672	


[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

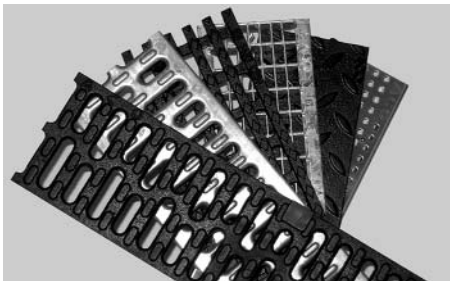


Cover gratings V 100 S/V 100 G



Bar grating



Longitudinal rod grating



Mesh grating



Cast iron cover plate

Line drainage

NEW!

Line drainage system Multiline V 150[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 15.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Channel body V 150 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting

							Cast iron frame GGG 5 mm		Galvanised steel frame 4 mm		Stainless steel frame [8] 4 mm	
	Length	Width	Height									
Type	cm	cm	Front cm	End cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
0.0	100,0	18,5	21,0	21,0	27,8	16	12930		12730		12830	
0.0.2 [1]	100,0	18,5	22,0	22,0	31,2	8	12931		12731		12831	
0.1 [3] [4]	50,0	18,5	21,0	21,0	17,3	8	12932		12732		12832	
0.2 [1] [3]	50,0	18,5	22,0	22,0	17,1	8	12933		12733		12833	
1	100,0	18,5	21,0	21,5	27,9	8	12901		12701		12801	
2	100,0	18,5	21,5	22,0	28,9	8	12902		12702		12802	
3	100,0	18,5	22,0	22,5	29,4	8	12903		12703		12803	
4	100,0	18,5	22,5	23,0	30,1	8	12904		12704		12804	
5	100,0	18,5	23,0	23,5	30,5	8	12905		12705		12805	
5.0	100,0	18,5	23,5	23,5	30,4	16	12940		12740		12840	
5.0.2 [1]	100,0	18,5	24,5	24,5	35,8	8	12941		12741		12841	
5.1 [3] [4]	50,0	18,5	23,5	23,5	19,8	8	12942		12742		12842	
5.2 [1] [3]	50,0	18,5	24,5	24,5	19,5	8	12943		12743		12843	
6	100,0	18,5	23,5	24,0	31,2	8	12906		12706		12806	
7	100,0	18,5	24,0	24,5	31,9	8	12907		12707		12807	
8	100,0	18,5	24,5	25,0	31,8	8	12908		12708		12808	
9	100,0	18,5	25,0	25,5	33,2	8	12909		12709		12809	
10	100,0	18,5	25,5	26,0	34,1	8	12910		12710		12810	
10.0	100,0	18,5	26,0	26,0	32,7	16	12950		12750		12850	
10.0.2 [1]	100,0	18,5	27,0	27,0	36,5	8	12951		12751		12851	
10.1 [3] [4]	50,0	18,5	26,0	26,0	20,2	8	12952		12752		12852	
10.2 [1] [3]	50,0	18,5	27,0	27,0	20,0	8	12953		12753		12853	
15.0	100,0	18,5	28,5	28,5	35,1	8	12960		12760		12860	
15.0.2 [1]	100,0	18,5	29,5	29,5	38,4	4	12961		12761		12861	
15.1 [3] [4]	50,0	18,5	28,5	28,5	21,3	8	12962		12762		12862	
15.2 [1] [3]	50,0	18,5	29,5	29,5	21,1	8	12963		12763		12863	
20.0	100,0	18,5	31,0	31,0	36,1	8	12970		12770		12870	
20.0.2 [1]	100,0	18,5	32,0	32,0	40,9	4	12971		12771		12871	
20.1 [3] [4]	50,0	18,5	31,0	31,0	22,7	8	12972		12772		12872	
20.2 [1] [3]	50,0	18,5	32,0	32,0	22,5	8	12973		12773		12873	

Flat channel Multiline V 150 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting


Channel body with edge protection	100,0	18,5	12,0	12,0	16,8	16	12921		12721		12821	
Channel body with integrated sealing DN 100	100,0	18,5	12,0	12,0	16,8	4	12922		12722		12822	

NEW!


Line drainage system Multiline V 150[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 15.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

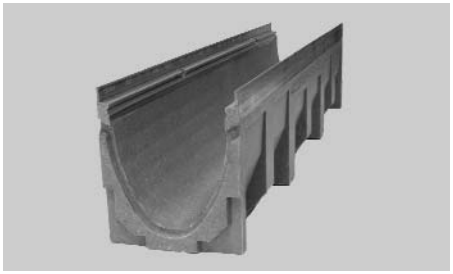


Channel body V 150 of polymer concrete with integrated edge protection

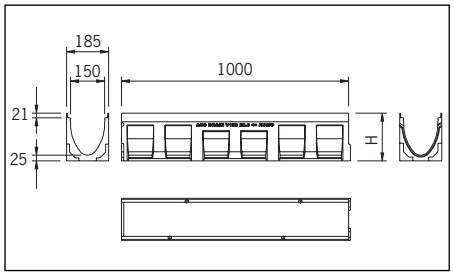


Dimensioning of channel body V 150, 1m

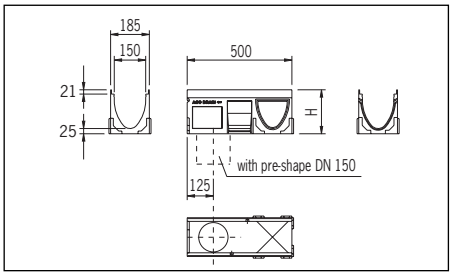


Dimensioning of channel body V 150, 0.5 m pre-shaped

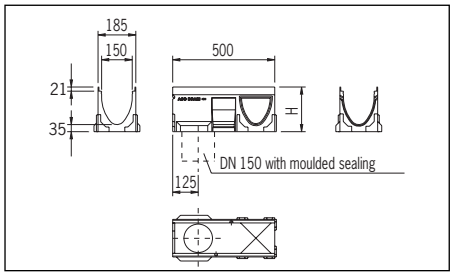

Dimensioning of channel body V 150, 0.5 m with lip labyrinth sealing

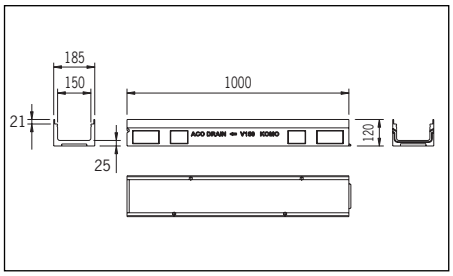

Dimensioning of flat channel V 150

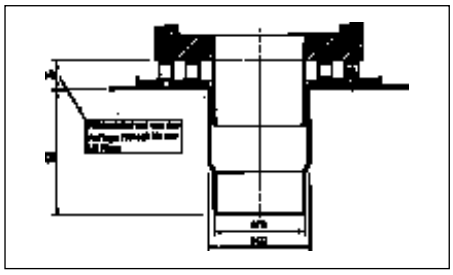

ACO DRAIN® intermediate raising element DN 150 with clamping sealing flange (prices see page 71)

1) With integrated lip labyrinth sealing for liquid-tight connection to ground line DN 150
3) Channel body with lateral pre-shapes for corner-, T- and cross connections
4) Pre-shaped for vertical outlet DN 150 to be knocked out
5) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
8) Delivery time upon request.

Cover gratings see page 21.

Line drainage

NEW!

Line drainage system Multiline V 150[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 15.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Inlet box, single-body, V 150 with Drainlock®, of polymer concrete, with integrated edge protection, with sludge bucket, with connection template to be cut out up to height 20. with integrated lip labyrinth sealing DN 150 or DN 200

Type	Length cm	Width cm	Height cm	kgs/ unit	PU/ units/ pallet	Cast iron frame GGG 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame [8] 4 mm EDP order no.	€uro/ unit
Inlet box DN 150	50,0	18,5	61,0	36,4	8	12991		12791		12891	
Inlet box DN 200	50,0	18,5	61,0	36,4	8	12992		12792		12892	

Polymer concrete universal front wall, with edge protection, for channel front and end

Type 0. - 20.		3,0	20	12985		12785	12885

Polymer concrete universal front wall, with edge protection, for flat channels, for channel front and end

for 12 cm		1,5	20	12980		12780	12880

Front wall for channel end of polymer concrete, with integrated lip labyrinth sealing, with edge protection, for connection DN 150

for height 0.		2,3	6	12986		12786	12886
for height 5.		2,7	6	12987		12787	12887
for height 10.		3,0	6	12988		12788	12888
for height 15.		3,6	6	12989		12789	12889
for height 20.		4,0	6	12990		12790	12890

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.


[8] **Delivery time upon request.**

NEW!


Line drainage system Multiline V 150[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 15.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

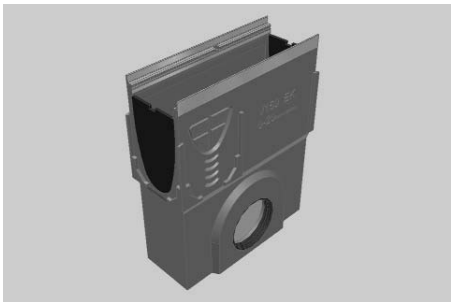


Inlet box V 150

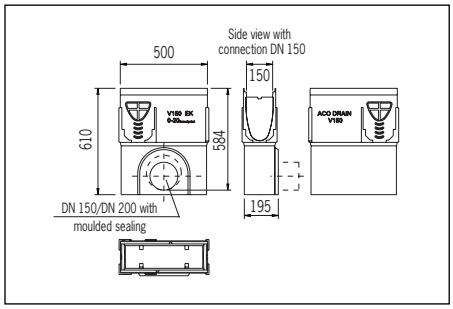


Dimensioning of inlet box V 150

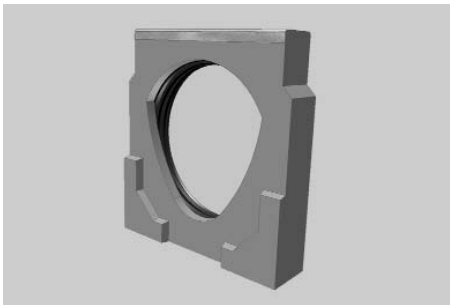


Front wall with edge protection, with lip labyrinth sealing

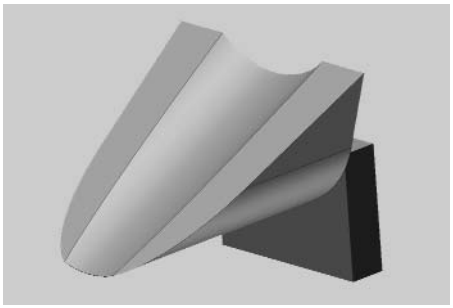


Adapter piece for adapting 5 cm

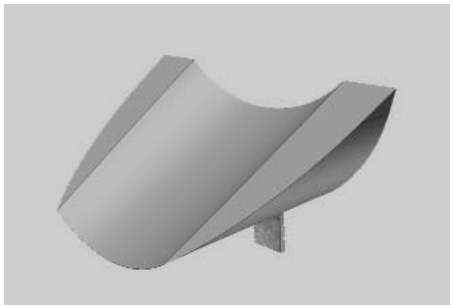

Adapter piece for adapting 2.5 cm

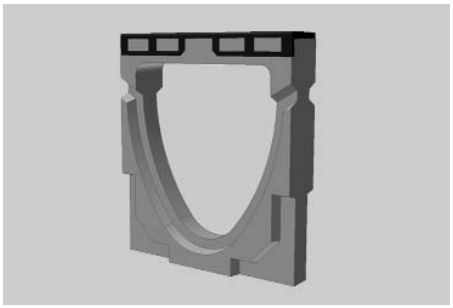

Adapter for flow direction change

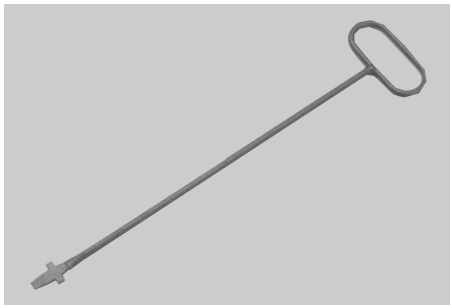

ACO DRAIN® grating hook

Line drainage

NEW!

Line drainage system Multiline V 150[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 15.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Adapter piece for bridging of height differences when fitting in step slope

Type	Length cm	Width cm	Height cm	kgs/ unit	Unit/ pallet	Cast iron frame GGG 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame [8] 4 mm EDP order no.	€uro/ unit
Adapter piece suitable for adapting 0. to 5.											
adapting 5. to 10.											
adapting 10. to 15.											
adapting 15. to 20.				0,5	10	13000		13000		13000	
Adapter piece suitable for adapting 0. to 10.											
adapting 10. to 20.				1,3	10	13001		13001		13001	

Adapter for flow direction change of polymer concrete with edge protection

suitable for type 0.	1,2	6	12993		12793	12893
suitable for type 5.	1,4	6	12994		12794	12894
suitable for type 10.	1,7	6	12995		12795	12895
suitable for type 15.	1,9	6	12996		12796	12896
suitable for type 20.	2,0	6	12997		12797	12897

Odour seal (PVC) for inlet box DN 150

Odour seal			02638		02638	02638

Grating hook for cover gratings with Drainlock®

Grating hook to lift out the cover gratings	0,25		01290		01290	01290

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[8] **Delivery time upon request.**

Cover gratings for line drainage systems Multiline V 150 S[5]/V 150 G[5] with Drainlock®, with edge protection galvanised steel, stainless steel and cast iron

Clear opening 15.0 cm

Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Cover gratings with Drainlock® for channel bodies and inlet boxes V 150 S/V 150 G

Load class C 250


	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Cast bar grating SW 12 mm	50	17,3	578	6,0	96	13070	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 18	50	17,3	595	5,3	96	13073	
Mesh grating	100	17,3	1151	7,4	100	13018	
MW 20 x 25 galvanised steel	50	17,3	1151	3,7	48	13019	
Mesh grating	100	17,3	1151	7,4	40	13048	
MW 20 x 25 stainless steel	50	17,3	1151	3,7	24	13049	

Load class D 400


	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Cast bar grating SW 12 mm	50	17,3	578	7,8	96	13071	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 18	50	17,3	514	8,2	96	13074	
Mesh grating	100	17,3	1151	9,2	100	13020	
MW 20 x 25 galvanised steel	50	17,3	1151	4,6	48	13021	
Mesh grating	100	17,3	1151	5,2	40	13050	
MW 20 x 25 stainless steel	50	17,3	1151	2,8	24	13051	

Load class E 600


	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Cast bar grating SW 12 mm	50	17,3	578	7,8	96	13071	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 18	50	17,3	514	8,2	96	13074	
Cast iron cover closed GGG	50	17,3	—	9,0	96	13072	

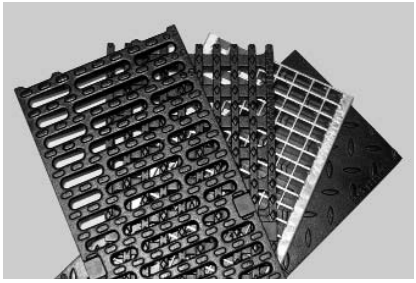


Cover gratings V 150 S/V 150 G

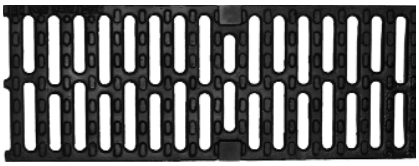


Bar grating

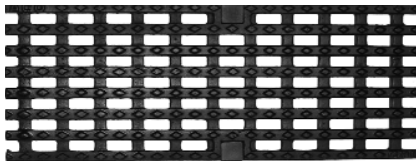

Longitudinal rod grating

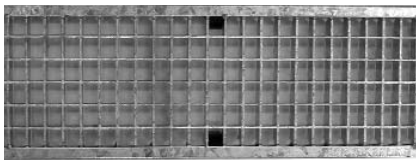

Mesh grating

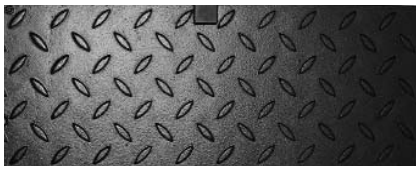

Cast iron cover plate

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

Line drainage

NEW!

Line drainage system Multiline V 200[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Channel body V 200 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting

							Cast iron frame GGG [9] 5 mm		Galvanised steel frame 4 mm		Stainless steel frame [8] 4 mm	
	Length	Width	Height									
Type	cm	cm	Front cm	End cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
0.0	100,0	23,5	26,5	26,5	41,9	9	13330		13130		13230	
0.0.2 [1]	100,0	23,5	27,5	27,5	45,7	6	13331		13131		13231	
0.1 [3] [4]	50,0	23,5	26,5	26,5	22,6	6	13332		13132		13232	
0.2 [1] [3]	50,0	23,5	27,5	27,5	22,5	6	13333		13133		13233	
1	100,0	23,5	26,5	27,0	42,0	6	13301		13101		13201	
2	100,0	23,5	27,0	27,5	43,1	6	13302		13102		13202	
3	100,0	23,5	27,5	28,0	43,6	6	13303		13103		13203	
4	100,0	23,5	28,0	28,5	43,9	6	13304		13104		13204	
5	100,0	23,5	28,5	29,0	44,0	6	13305		13105		13205	
5.0	100,0	23,5	29,0	29,0	44,1	9	13340		13140		13240	
5.0.2 [1]	100,0	23,5	30,0	30,0	47,2	6	13341		13141		13241	
5.1 [3] [4]	50,0	23,5	29,0	29,0	26,1	6	13342		13142		13242	
5.2 [1] [3]	50.0	23,5	30,0	30,0	25,9	6	13343		13143		13243	
6	100,0	23,5	29,0	29,5	45,2	6	13306		13106		13206	
7	100,0	23,5	29,5	30,0	45,9	6	13307		13107		13207	
8	100,0	23,5	30,0	30,5	46,5	6	13308		13108		13208	
9	100,0	23,5	30,5	31,0	47,0	6	13309		13109		13209	
10	100,0	23,5	31,0	31,5	47,4	6	13310		13110		13210	
10.0	100,0	23,5	31,5	31,5	47,5	9	13350		13150		13250	
10.0.2 [1]	100,0	23,5	32,5	32,5	49,8	6	13351		13151		13251	
10.1 [3] [4]	50,0	23,5	31,5	31,5	27,6	6	13352		13152		13252	
10.2 [1] [3]	50,0	23,5	32,5	32,5	27,3	6	13353		13153		13253	
15.0	100,0	23,5	34,0	34,0	49,2	6	13360		13160		13260	
15.0.2 [1]	100,0	23,5	35,0	35,0	52,1	3	13361		13161		13261	
15.1 [3] [4]	50,0	23,5	34,0	34,0	28,8	6	13362		13162		13262	
15.2 [1] [3]	50,0	23,5	35,0	35,0	28,5	6	13363		13163		13263	
20.0	100,0	23,5	36,5	36,5	51,7	6	13370		13170		13270	
20.0.2 [1]	100,0	23,5	37,5	37,5	54,0	3	13371		13171		13271	
20.1 [3] [4]	50,0	23,5	36,5	36,5	30,0	6	13372		13172		13272	
20.2 [1] [3]	50,0	23,5	37,5	37,5	29,7	6	13373		13173		13273	

Flat channel Multiline V 200 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting


Channel body with edge protection	100,0	23,5	12,0	12,0	18,9	12	13321		13121		13221	
Channel body with integrated sealing DN 100	100,0	23,5	12,0	12,0	18,5	3	13322		13122		13222	

NEW!


Line drainage system Multiline V 200[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

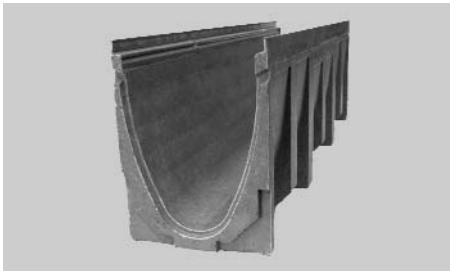


Channel body V 200 S of polymer concrete with integrated edge protection, galvanised steel

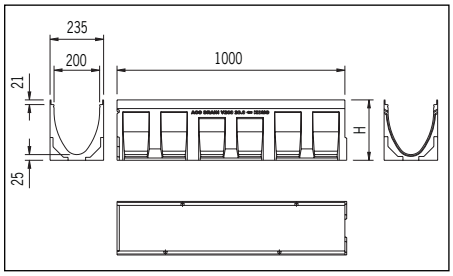


Dimensioning of channel body V 200, 1m

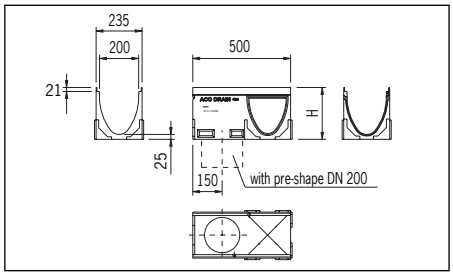


Dimensioning of channel body V 200, 0.5 m pre-shaped

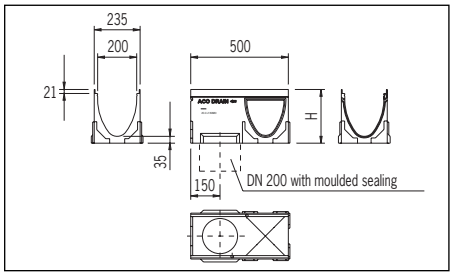

Dimensioning of channel body V 200, 0.5 m with lip labyrinth sealing

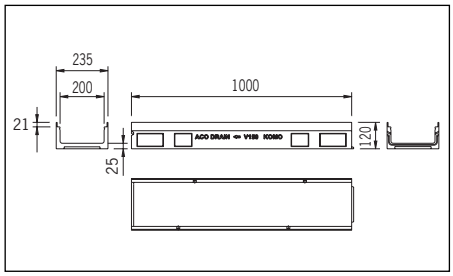

Dimensioning of flat channel V 200

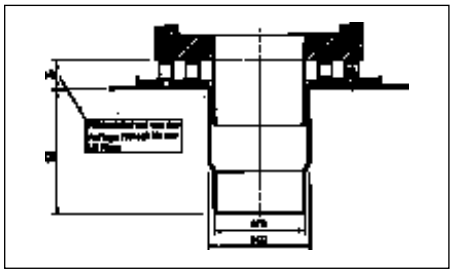

ACO DRAIN® intermediate raising element DN 200 with clamping sealing flange (prices see page 71)

1) With integrated lip labyrinth sealing for liquid-tight connection to ground line DN 200
3) Channel body with lateral pre-shapes for corner-, T- and cross connections
4) Pre-shaped for vertical outlet DN 200 to be knocked out
5) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
8) Delivery time upon request.
9) Available as from March 2005.

Cover gratings see page 27.

Line drainage

NEW!

Line drainage system Multiline V 200[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Inlet box, single-body, V 200 with Drainlock®, of polymer concrete, with integrated edge protection, with sludge bucket, with connecting template to be cut out up to height 20. with integrated lip labyrinth sealing DN 150 or DN 200

						Cast iron frame GGG [9]		Galvanised steel frame		Stainless steel frame [8]	
	Length	Width	Height			5 mm		4 mm		4 mm	
Type	cm	cm	cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
Inlet box DN 150	50,0	23,5	67,0	41,4	6	13391		13191		13291	
Inlet box DN 200	50,0	23,5	67,0	41,2	6	13392		13192		13292	

Polymer concrete universal front wall, with edge protection, for channel front and end

Type 0. - 20.	4,8	10	13385	13185		13285	

Polymer concrete universal front wall, with edge protection, for flat channels, for channel front and end

	2,4	20	13380	**23,50**	13180	**19,50**	13280	**36,25**

Front wall for channel end of polymer concrete, with integrated lip labyrinth sealing, with edge protection, for connection DN 200

for height 0.	4,1	6	13386		13186		13286	
for height 5.	4,9	6	13387		13187		13287	
for height 10.	5,3	6	13388		13188		13288	
for height 15.	5,6	6	13389		13189		13289	
for height 20.	6,1	6	13390		13190		13290	

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[8] Delivery time upon request.


[9] Available as from March 2005.

NEW!


Line drainage system Multiline V 200[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

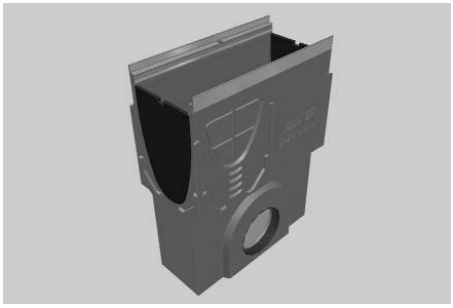


Inlet box V 200

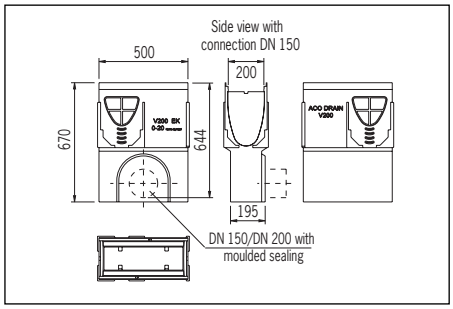


Dimensioning of inlet box V 200

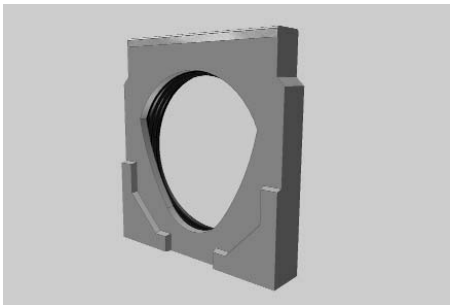


Front wall with edge, with lip labyrinth sealing

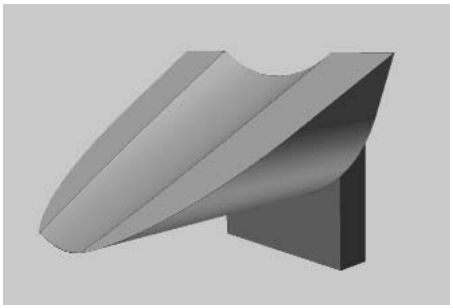


Adapter piece for adapting 5 cm

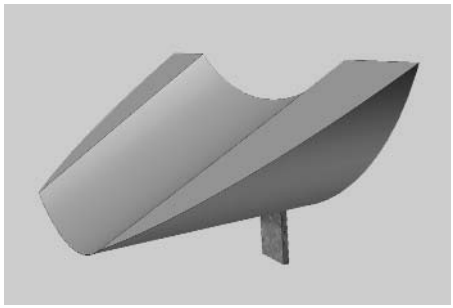

Adapter piece for adapting 2.5 cm

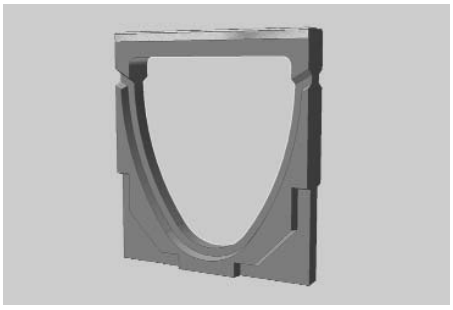

Adapter for flow direction change

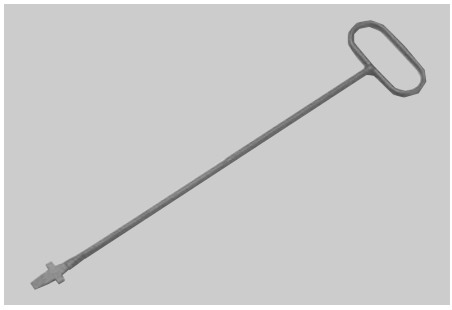

ACO DRAIN® grating hook

Line drainage

NEW!

Line drainage system Multiline V 200[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Adapter piece for bridging of height differences when fitting in step slope

Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	Cast iron frame GGG [9] 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame [8] 4 mm EDP order no.	€uro/ unit
Adapter piece suitable for adapting 0. to 5.											
adapting 5. to 10.											
adapting 10. to 15.											
adapting 15. to 20.				1,2	10	13400		13400		13400	
Adapter piece suitable for adapting 0. to 10.											
adapting 10. to 20.				2,0	10	13401		13401		13401	

Adapter for flow direction change of polymer concrete with edge protection

suitable for type 0.				1,8	6	13393		13193		13293	
suitable for type 5.				2,1	6	13394		13194		13294	
suitable for type 10.				2,6	6	13395		13195		13295	
suitable for type 15.				3,0	6	13396		13196		13296	
suitable for type 20.				3,4	6	13397		13197		13297	

Odour seal (PVC) for inlet box DN 150

Odour seal						02638		02638		02638	

Grating hook for cover gratings with Drainlock®

Grating hook to lift out the cover gratings				0,25		01290		01290		01290	

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[8] **Delivery time upon request.**

[9] **Available as from March 2005.**

Cover gratings for line drainage systems Multiline V 200 S[5]/V 200 G[5] with Drainlock®, with edge protection galvanised steel, stainless steel and cast iron

Clear opening 20.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also auch www.acodrain.de

Cover gratings with Drainlock® for channel bodies and inlet boxes V 200 S/V 200 G

Load class C 250

	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Cast bar grating SW 12 mm	50	22,3	740	8,6	90	13470	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 19	50	22,3	905	7,5	90	13473	
Mesh grating	100	22,3	1541	12,0	48	13418	
MW 20 x 25 galvanised steel	50	22,3	1541	6,0	24	13419	
Mesh grating	100	22,3	1541	12,0	40	13448	
MW 20 x 25 stainless steel	50	22,3	1541	6,0	16	13449	


Load class D 400

Cast bar grating SW 12 mm	50	22,3	740	11,4	90	13471	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 19	50	22,3	756	11,6	90	13474	
Mesh grating	100	22,3	1391	19,0	48	13420	
MW 20 x 25 galvanised steel	50	22,3	1391	9,5	24	13421	
Mesh grating	100	22,3	1391	19,0	40	13450	
MW 20 x 25 stainless steel	50	22,3	1391	9,5	16	13451	


Load class E 600

Cast bar grating SW 12 mm	50	22,3	740	11,4	90	13471	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.5 x 19	50	22,3	756	11,6	90	13474	
Cast iron cover closed GGG	50	22,3	—	12,5	90	13472	


[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

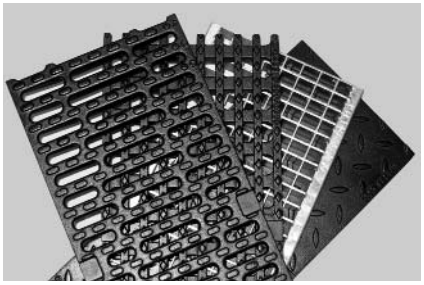


Cover gratings V 200 S/V 200 G

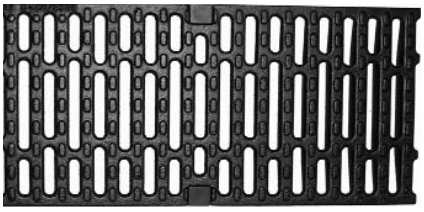


Bar grating

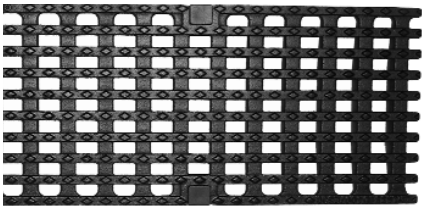

Longitudinal rod grating

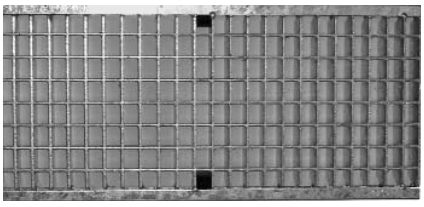

Mesh grating

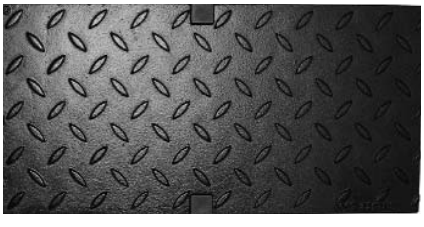

Cast iron cover plate

Line drainage

NEW!

Line drainage system Multiline V 300[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also auch www.acodrain.de

Channel body V 300 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting

							Cast iron frame GGG [9] 5 mm		Galvanised steel frame 4 mm		Stainless steel frame [8] 4 mm	
	Length	Width	Height									
Type	cm	cm	Front cm	End cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit	EDP order no.	€uro/ unit
0.0	100,0	35,0	38,5	38,5	63,9	4	13730		13530		13630	
0.0.2 [1]	100,0	35,0	39,5	39,5	70,3	4	13731		13531		13631	
0.1 [3] [4]	50,0	35,0	38,5	38,5	38,8	4	13732		13532		13632	
0.2 [1] [3]	50,0	35,0	39,5	39,5	38,2	4	13733		13533		13633	
1	100,0	35,0	38,5	39,0	64,3	4	13701		13501		13601	
2	100,0	35,0	39,0	39,5	64,7	4	13702		13502		13602	
3	100,0	35,0	39,5	40,0	65,1	4	13703		13503		13603	
4	100,0	35,0	40,0	40,5	65,7	4	13704		13504		13604	
5	100,0	35,0	40,5	41,0	65,9	4	13705		13505		13605	
5.0	100,0	35,0	41,0	41,0	66,7	4	13740		13540		13640	
5.0.2 [1]	100,0	35,0	42,0	42,0	73,4	4	13741		13541		13641	
5.1 [3] [4]	50,0	35,0	41,0	41,0	40,5	4	13742		13542		13642	
5.2 [1] [3]	50,0	35,0	42,0	42,0	39,5	4	13743		13543		13643	
6	100,0	35,0	41,0	41,5	67,2	4	13706		13506		13606	
7	100,0	35,0	41,5	42,0	67,6	4	13707		13507		13607	
8	100,0	35,0	42,0	42,5	67,9	4	13708		13508		13608	
9	100,0	35,0	42,5	43,0	68,2	4	13709		13509		13609	
10	100,0	35,0	43,0	43,5	68,8	4	13710		13510		13610	
10.0	100,0	35,0	43,5	43,5	69,2	4	13750		13550		13650	
10.0.2 [1]	100,0	35,0	44,5	44,5	76,1	4	13751		13551		13651	
10.1 [3] [4]	50,0	35,0	43,5	43,5	42,2	4	13752		13552		13652	
10.2 [1] [3]	50,0	35,0	44,5	44,5	41,7	4	13753		13553		13653	
15.0	100,0	35,0	46,0	46,0	72,1	4	13760		13560		13660	
15.0.2 [1]	100,0	35,0	47,0	47,0	77,4	4	13761		13561		13661	
15.1 [3] [4]	50,0	35,0	46,0	46,0	43,1	4	13762		13562		13662	
15.2 [1] [3]	50,0	35,0	47,0	47,0	42,8	4	13763		13563		13663	
20.0	100,0	35,0	48,5	48,5	75,6	4	13770		13570		13670	
20.0.2 [1]	100,0	35,0	49,5	49,5	82,5	4	13771		13571		13671	
20.1 [3] [4]	50,0	35,0	48,5	48,5	45,5	4	13772		13572		13672	
20.2 [1] [3]	50,0	35,0	49,5	49,5	44,8	4	13773		13573		13673	

Flat channel Multiline V 300 with Drainlock® of polymer concrete, with integrated edge protection, with ACO DRAIN safety groove (SF), for liquid-tight fitting


Channel body with edge protection	100,0	35,0	12,0	12,0	25,3	12	13721		13521		13621	
Channel body with integrated sealing DN 100	100,0	35,0	12,0	12,0	25,0	4	13722		13522		13622	

NEW!


Line drainage system Multiline V 300[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

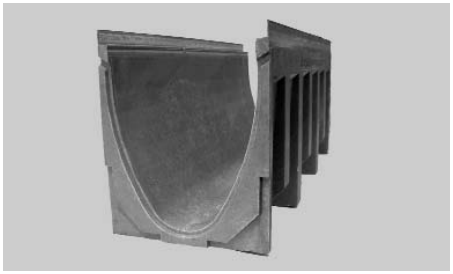


Channel body V 300 of polymer concrete with integrated edge protection

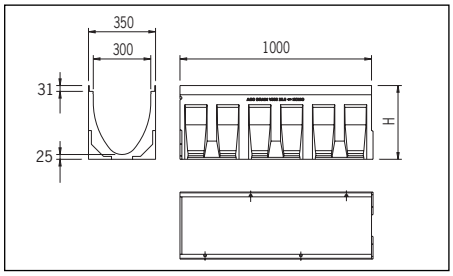


Dimensioning of channel body V 300, 1m

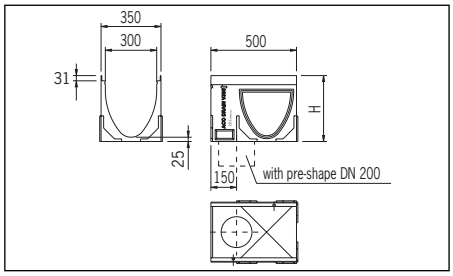


Dimensioning of channel body V 300, 0.5 m pre-shaped

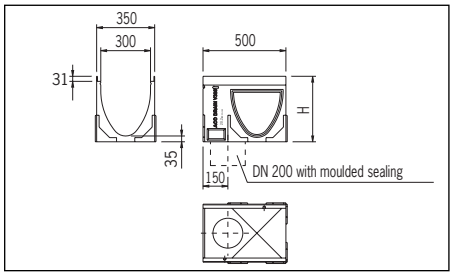

Dimensioning of channel body V 300, 0.5 m with lip labyrinth sealng

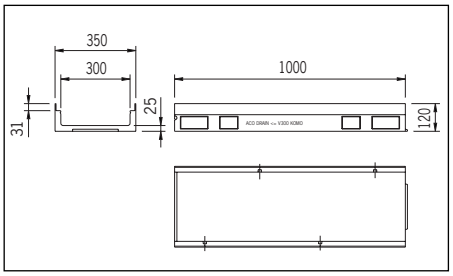

Dimensioning of flat channel V 300

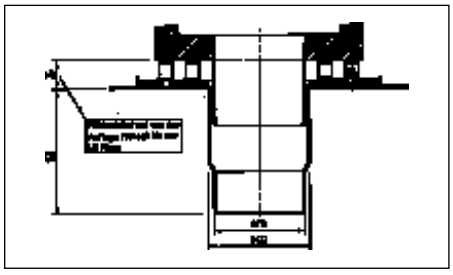

ACO DRAIN® intermediate raising element DN 200 with clamping sealing flange (prices see page 71)

1) With integrated lip labyrinth sealing for liquid-tight connection to ground line DN 200
3) Channel body with lateral pre-shapes for corner-, T- and cross connections
4) Pre-shaped for vertical outlet DN 200 to be knocked out
5) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
8) Delivery time upon request.
9) Available as from March 2005.

Cover gratings see page 33.

Line drainage

NEW!

Line drainage system Multiline V 300[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Inlet box, single-body, V 300 with Drainlock®, of polymer concrete, with integrated edge protection, with sludge bucket, with connecting template to be cut out up to height 20. with integrated lip labyrinth sealing DN 150 or DN 200

Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	Cast iron frame GGG [9] 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame [8] 4 mm EDP order no.	€uro/ unit
Inlet box DN 150	50,0	35,0	86,0	64,2	4	13791		13591		13691	
Inlet box DN 200	50,0	35,0	86,0	63,9	4	13792		13592		13692	

Polymer concrete universal front wall, with edge protection, for channel front and end

Type 0. - 20.	8,3	7	13785		13585		13685	

Polymer concrete universal front wall, with edge protection, for flat channels, for channel front and end

	3,4	10	13780		13580		13680	

Front wall for channel end of polymer concrete, with integrated lip labyrinth sealing, with edge protection, for connection DN 200

for height 0.	6,8	6	13786		13586		13686	
for height 5.	7,1	6	13787		13587		13687	
for height 10.	7,3	6	13788		13588		13688	
for height 15.	7,6	6	13789		13589		13689	
for height 20.	8,1	6	13790		13590		13690	

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[8] **Delivery time upon request.**


[9] **Available as from March 2005.**

NEW!


Line drainage system Multiline V 300[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433


Technical details for download see also www.acodrain.de

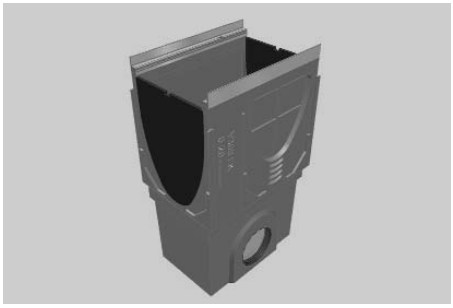


Inlet box V 300

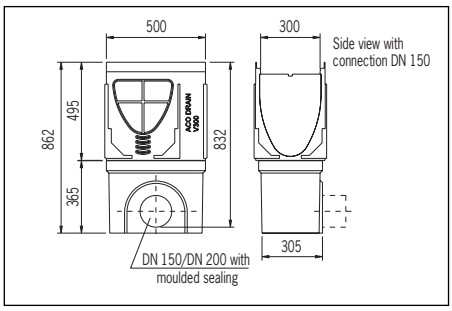


Dimensioning of inlet box V 300

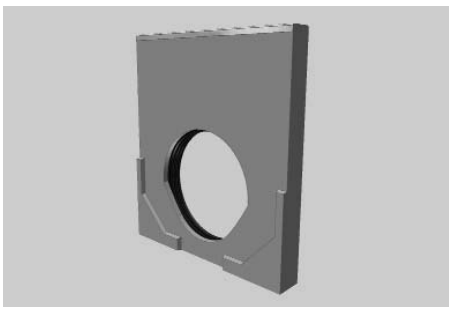


Front wall with edge, with lip labyrinth sealing

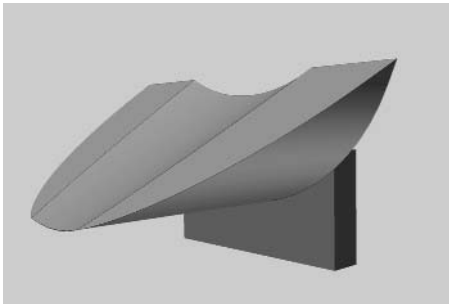


Adapter piece for adapting 5 cm

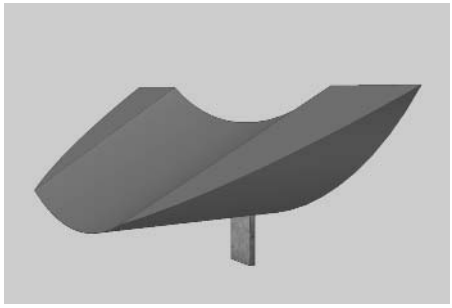

Adapter piece for adapting 2.5 cm

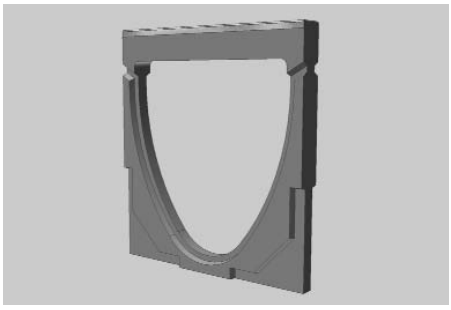

Adapter for flow direction change

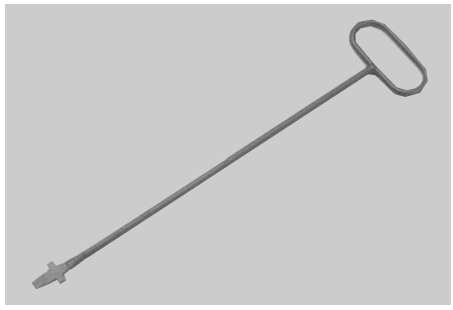

ACO DRAIN® grating hook

Line drainage

NEW!

Line drainage system Multiline V 300[5] according to DIN EN 1433 / DIN V 19580 with Drainlock®, with edge protection

With V-section
Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Technical details for download see also www.acodrain.de

Adapter piece for bridging of height differences when fitting in step slope

Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	Cast iron frame GGG [9] 5 mm EDP order no.	€uro/ unit	Galvanised steel frame 4 mm EDP order no.	€uro/ unit	Stainless steel frame [8] 4 mm EDP order no.	€uro/ unit
Adapter piece suitable for adapting 0. to 5.											
adapting 5. to 10.											
adapting 10. to 15.											
adapting 15. to 20.				1,3	10	13800		13800		13800	
Adapter piece suitable for adapting 0. to 10.											
adapting 10. to 20.				2,4	10	13801		13801		13801	

Adapter for flow direction change of polymer concrete with edge protection

suitable for type 0.	2,0	6	13793	13593	13693
suitable for type 5.	2,2	6	13794	13594	13694
suitable for type 10.	2,6	6	13795	13595	13695
suitable for type 15.	2,8	6	13796	13596	13696
suitable for type 20.	3,1	6	13797	13597	13697

Odour seal (PVC) for inlet box DN 150

Odour seal		02638	02638	02638

Grating hook for cover gratings with Drainlock®

Grating hook to lift out the cover gratings	0,25	01290	01290	01290

[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[8] **Delivery time upon request.**

[9] **Available as from March 2005.**

Cover gratings for line drainage systems Multiline V 300 S[5]/V 300 G[5] with Drainlock®, with edge protection galvanised steel, stainless steel and cast iron

Technical details for download see also www.acodrain.de

Clear opening 30.0 cm
Load classes A 15, B 125, C 250, D 400, E 600 according to DIN EN 1433

Cover gratings with Drainlock® for channel bodies and inlet boxes V 300 S/V 300 G

Load class C 250

	Length cm	Width cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Cast bar grating SW 12 mm	50	33,8	1146	17,3	40	13870	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.4 x 23	50	33,8	1381	13,0	40	13873	
Mesh grating MW 20 x 25 galvanised steel	50	33,8	2139	14,9	40	13819	
Mesh grating MW 20 x 25 stainless steel	50	33,8		14,9	15	13849	


Load class D 400


Cast bar grating SW 12 mm	50	33,8	1146	22,5	40	13871	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.4 x 23	50	33,8	1193	24,0	40	13874	
Mesh grating MW 20 x 25 galvanised steel	50	33,8	2139	19,6	40	13821	
Mesh grating MW 20 x 25 stainless steel	50	33,8		19,6	15	13851	


Load class E 600


Cast bar grating SW 12 mm	50	33,8	1146	22,5	40	13871	
Longitudinal rod grating cast iron, in mesh optics GGG MW 41.4 x 23	50	33,8	1193	24,0	40	13874	
Cast iron cover closed GGG	50	33,8	—	25,0	40	13872	


[5] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

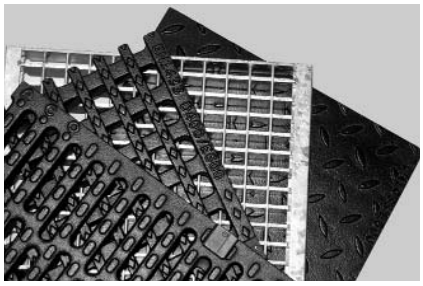
Cover gratings V 300 S/V 300 G

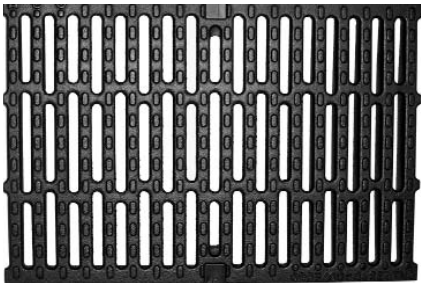

Bar grating

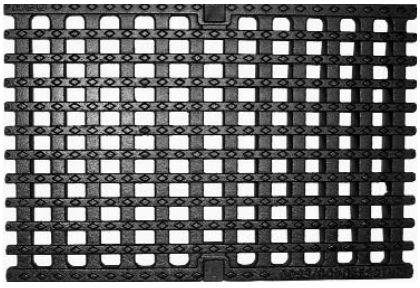
Longitudinal rod grating

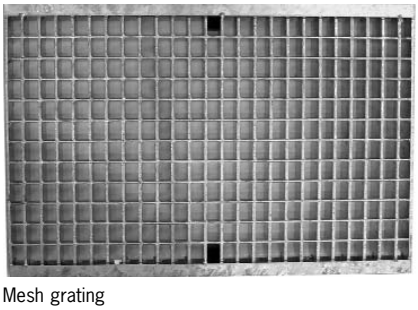
Mesh grating

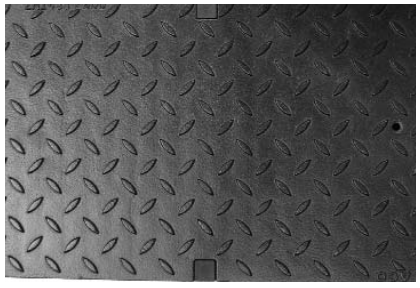
Cast iron cover plate

ACO DRAIN® S 100 K:
Overview of the system

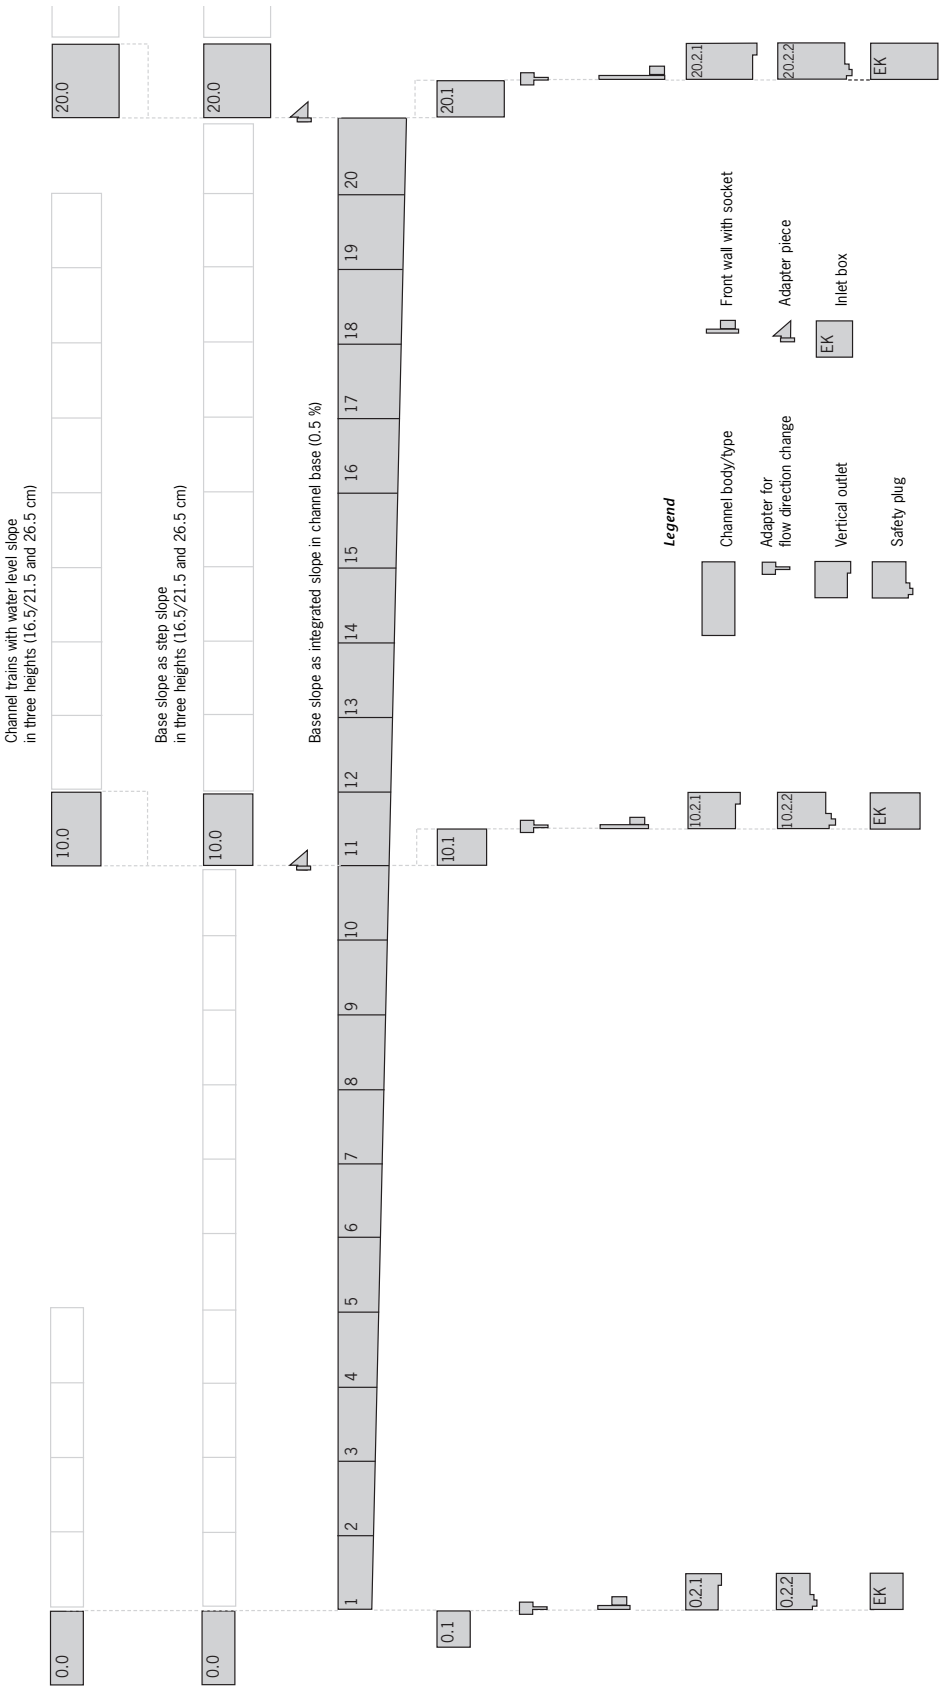

Line drainage system S 100 K[1)] according to DIN EN 1433 / DIN V 19580 with Powerlock® edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 10.0 cm
Load classes A 15 to F 900 according to DIN EN 1433


Official test sign Z-74.4-14 [8)]

Channel body S 100 K[1)] with Powerlock® of polymer concrete


with ACO DRAIN® safety groove (SF) at outlet side of channel,
with integrated edge protection, 6 mm, of cast iron (GG),
specially coated, with nodular graphite bar grating (GGG)

Type	Length	Width	Height Front	Height End	Inlet section cm²/m	Slope type[G)]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0*	100,0	16,0	16,5	16,5	380	1/3	37,6	25	00841	
0.1[2)]*	50,0	16,0	16,5	16,5	380	1/3	20,7	10	00844	
0.2/1[2)3)6)]	50,0	16,0	20,5	22,5	380	1/3	22,5		00847	
0.2/2[2)5)6)]	50,0	16,0	20,5	24,0	380	1/3	24,0		10630	
1	100,0	16,0	16,5	17,0	380	2	38,0	25	00821	
2	100,0	16,0	17,0	17,5	380	2	38,4	25	00822	
3	100,0	16,0	17,5	18,0	380	2	39,3	25	00823	
4	100,0	16,0	18,0	18,5	380	2	39,8	25	00824	
5	100,0	16,0	18,5	19,0	380	2	40,8	25	00825	
6	100,0	16,0	19,0	19,5	380	2	40,9	25	00826	
7	100,0	16,0	19,5	20,0	380	2	41,3	25	00827	
8	100,0	16,0	20,0	20,5	380	2	40,0	25	00828	
9	100,0	16,0	20,5	21,0	380	2	42,1	25	00829	
10*	100,0	16,0	21,0	21,5	380	2	43,0	25	00830	
10.0*	100,0	16,0	21,5	21,5	380	1/3	40,3	25	00842	
10.1[2)]*	50,0	16,0	21,5	21,5	380	1/3	23,5	10	00845	
10.2/1[2)3)6)]	50,0	16,0	25,5	27,5	380	1/3	25,0		00848	
10.2/2[2)5)6)]	50,0	16,0	25,5	29,0	380	1/3	24,0		10640	
11	100,0	16,0	21,5	22,0	380	2	43,2	20	00831	
12	100,0	16,0	22,0	22,5	380	2	43,5	20	00832	
13	100,0	16,0	22,5	23,0	380	2	41,8	20	00833	
14	100,0	16,0	23,0	23,5	380	2	44,1	20	00834	
15	100,0	16,0	23,5	24,0	380	2	45,0	20	00835	
16	100,0	16,0	24,0	24,5	380	2	45,0	20	00836	
17	100,0	16,0	24,5	25,0	380	2	45,0	20	00837	
18	100,0	16,0	25,0	25,5	380	2	44,7	20	00838	
19	100,0	16,0	25,5	26,0	380	2	45,4	20	00839	
20*	100,0	16,0	26,0	26,5	380	2	47,4	20	00840	
20.0*	100,0	16,0	26,5	26,5	380	1/3	43,7	20	00843	
20.1[2)]*	50,0	16,0	26,5	26,5	380	1/3	26,0	10	00846	
20.2/1[2)3)6)]	50,0	16,0	30,5	32,5	380	1/3	27,5		00849	
20.2/2[2)5)6)]	50,0	16,0	30,5	34,0	380	1/3	24,0		10650	


1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
3) Channel body with moulded NBR-O-ring for socket PVC/PE-HD DN 100.
5) Channel body with ACO DRAIN® stainless steel safety plug, DN 100.
6) Channel body with 2 inlet sides.
8) Not applicable to flat channel and sealing compound.
G) Definition of slope types see page 2.
* Channel body, pre-shaped, for vertical outlet DN 100 cannot be connected liquid-tight!

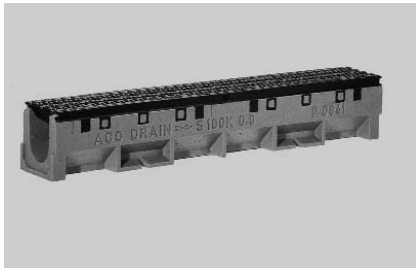


Channel body S 100 K, 100,0 cm, type 0.0

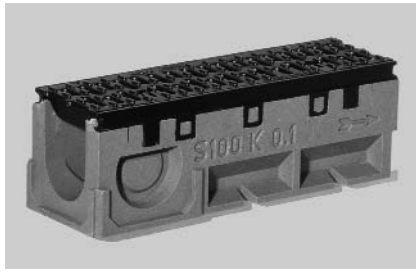

Channel body S 100 K, 0.5 m, type 0.1 with lateral pre-shapes for corner-, T- and cross connections

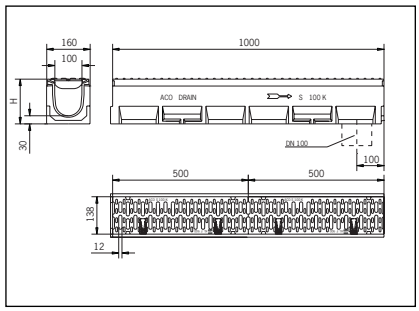

Dimensioning of channel body S 100 K
(www.acodrain.de)

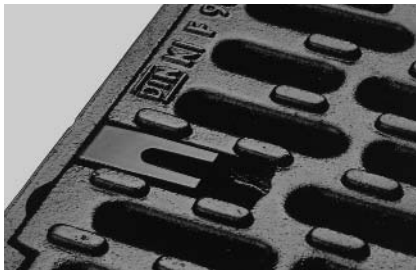

Powerlock® slide bolt, stop spring of stainless steel

Line drainage


Line drainage system S 100 K[1] according to DIN EN 1433 / DIN V 19580 with Powerlock® edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 10.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Flat channel S 100 K[1] with Powerlock®, clear opening 10.0 cm, of polymer concrete

with integrated edge protection, 6 mm, of cast iron (GG), specially coated, with nodular graphite bar grating (GGG), class A 15 - F 900 according to EN 1433


	Length cm	Width cm	Height cm	Slope type[G]	kgs/ unit	Units/ pallet	EDP order-no.	€uro/ unit
Flat channel S 100 K*	100,0	16,0	10,0	1	31,7	25	10080	
Flat channel S 100 K[4]	100,0	16,0	10,0	1	31,5	10	10081	

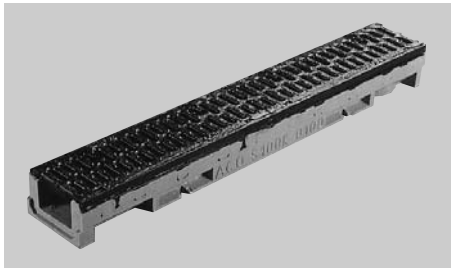

Flat channel S 100 K

ACO DRAIN® intermediate element DN 100, stainless steel, with compression-sealing flange for connection of sealing membranes

for flat channels Multiline V 100 - V 300, S 100 K, S 200 K	5,0	01043	

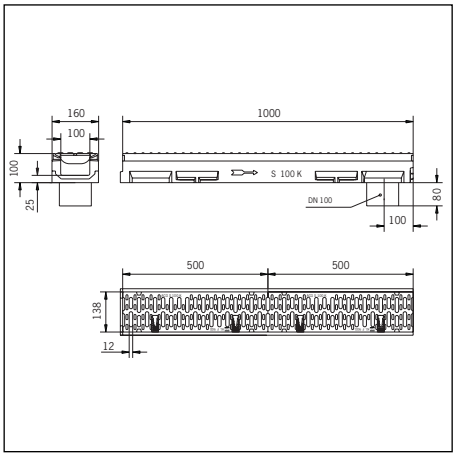

Dimensioning of flat channel S 100 K

Note: please observe!
Accessories for liquid-tight channel trains page 68.



Processing kit with sealing compound/primer, for permanently elastic sealing of SF, also page 68.

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
4) Channel with PE-HD socket DN 100, moulded in our works.
G) Definition of slope types see page 2.
* Channel body, pre-shaped, for vertical outlet DN 100 cannot be connected liquid-tight!

Accessories for line drainage system S 100 K[1] according to DIN EN 1433 / DIN V 19580 with Powerlock® edge protection 6 mm, of cast iron and cast iron grating (GGG)


For heavy duty areas, clear opening 10.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14

Inlet box S 100 K[1] single-body, of polymer concrete with new integrated lip labyrinth sealing

to be connected liquid-tight with integrated edge protection of cast iron, specially coated, with nodular graphite bar grating GGG, with integrated plastic sludge bucket
with MPA certificate for pressure-tightness of lip labyrinth sealing


	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Inlet box DN 100	50,0	16,0	52,0	380	42,0	10	10545	
Inlet box DN 150	50,0	16,0	52,0	380	41,0	10	10546	

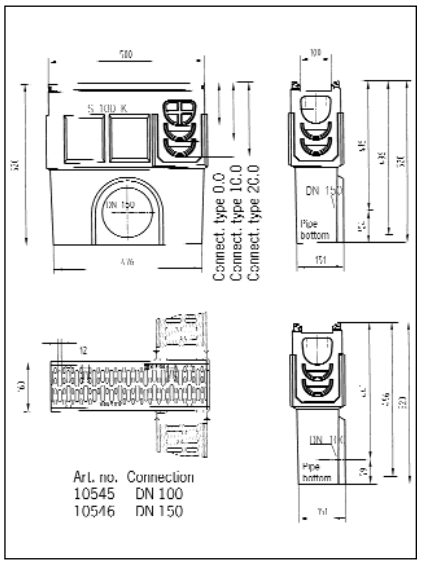

Dimensioning of inlet box S 100 K

Universal front wall S 100 K[1] of polymer concrete for channel front and end with cast iron edge


Suitable for type 0.0 - 20.2	2,0	12	00854
Front wall for flat channel	0,9	6	76098

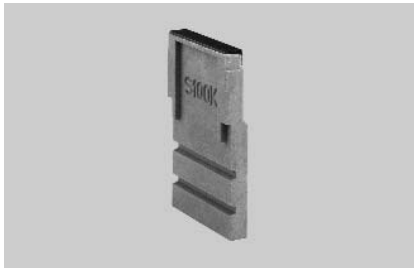

Universal front wall S 100 K

Front wall S 100 K[1] of polymer concrete for channel end with cast iron edge, moulded NBR-O-ring and PE-HD socket, DN 100

Suitable for type 0.	1,3	6	00855
Suitable for type 10 / 10.	1,8	6	00856
Suitable for type 20 / 20.	2,3	4	00857

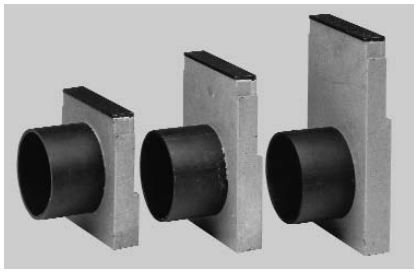

S 100 K front wall with socket PE-HD, DN 100

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
6) Channel body with 2 inlet sides.


Line drainage

Accessories for line drainage system S 100 K[1)] according to DIN EN 1433 / DIN V 19580 with Powerlock® edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 10.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Adapter piece S 100 K[1)] for bridging of height differences when fitting with step slope

	kgs/ unit	Unit PU	EDP order no.	€uro/ unit
Adapter piece	1,0	15	00853	

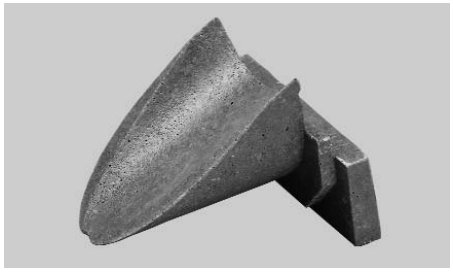


Adapter piece for channel body to bridge height differences when fitting with step slope

Adapter S 100 K[1)] of polymer concrete for flow direction change with cast iron edge

Suitable for type 0. / 1	1,0	00912
Suitable for type 10. / 11	1,2	00913
Suitable for type 20.	1,4	00914

Pipe sockets and odour seals see accessories suitable for all systems on page 71.

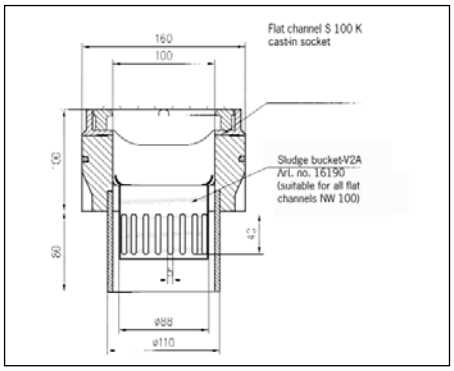


Dimensioning of channel body with sludge bucket

Sludge bucket of stainless steel for flat channels NW 100 with moulded socket DN 100

Sludge bucket	0,3	16190

Grating hooks for cover gratings with Powerlock® S 100 K/S 150 K/S 200 K/S 300 K

Grating hook to open and lift out the cover gratings	0,25	01290

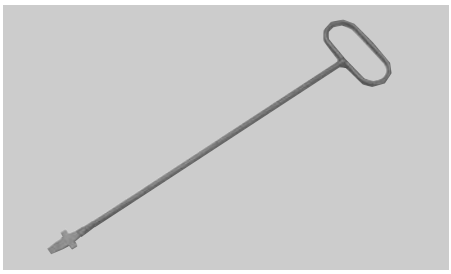

ACO DRAIN® grating hook

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
6) Channel body with 2 inlet sides.

Line drainage system S 150 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 15.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14


Upon request also available with integrated slope

Channel body S 150 K[1] with Powerlock® of polymer concrete


with ACO DRAIN® safety groove (SF) at outlet side of channel,
with integrated edge protection, 6 mm, of cast iron (GG),
specially coated, with nodular graphite bar grating (GGG)

Type	Length cm	Width cm	Height Front cm	Height End cm	Inlet section cm²/m	Slope type[G]	kgs/ unit	Units/ pallet	EDP order-no.	€uro/ unit
0.0*	100,0	21,0	22,0	22,0	680	1/3	55,1	16	03050	
0.1[2]*	50,0	21,0	22,0	22,0	680	1/3	29,2	8	03053	
0.2/1[2][3][6]	50,0	21,0	26,0	26,0	680	1/3	33,2	6	03077	
10.0*	100,0	21,0	27,0	27,0	680	1/3	60,8	12	03051	
10.1[2]*	50,0	21,0	27,0	27,0	680	1/3	31,9	8	03054	
10.2/1[2][3][6]	50,0	21,0	31,0	31,0	680	1/3	36,2	6	03078	
20.0*	100,0	21,0	32,0	32,0	680	1/3	65,8	12	03052	
20.1[2]*	50,0	21,0	32,0	32,0	680	1/3	33,9	8	03055	
20.2/1[2][3][6]	50,0	21,0	36,0	36,0	680	1/3	38,2	6	03079	


Channel elements with safety plug available upon request.

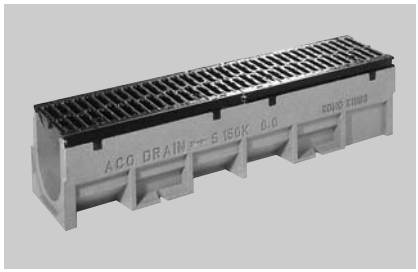


Channel body S 150 K, 1.0 m

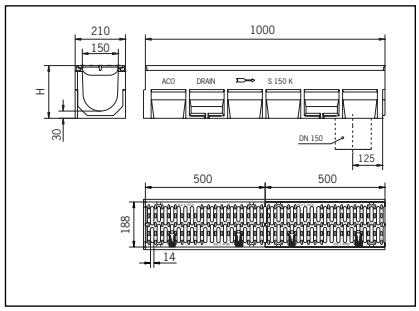

Dimensioning of channel body S 150 K, 1.0 m

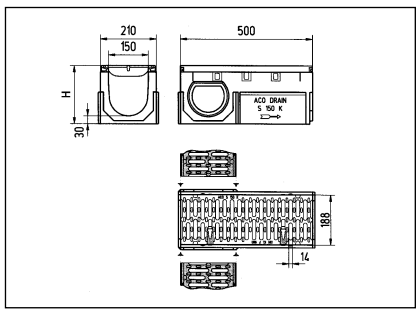

Dimensioning of channel body S 150 K, 0.5 m

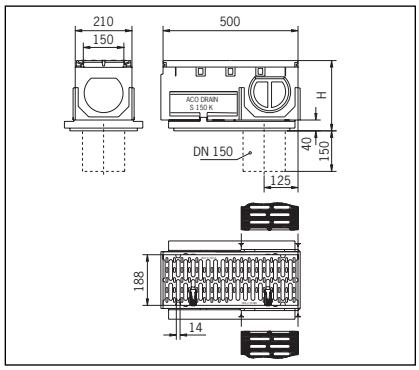

Dimensioning of channel body S 150 K, 0.5 m with vertical outlet DN 150

Note: please observe!
Accessories for liquid-tight channel trains page 68.

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
3) Channel body with moulded NBR-O-ring for socket PVC/PE-HD DN 150.
6) Channel body with 2 inlet sides.
G) Definition of slope types see page 2.
* Channel body, pre-shaped, for vertical outlet DN 150 cannot be connected liquid-tight!

Line drainage

Line drainage system S 150 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)


For heavy duty areas, clear opening 15.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14

Inlet box S 150 K[1] single-body, of polymer concrete with new integrated lip labyrinth sealing

to be connected liquid-tight with integrated edge protection of cast iron, specially coated, with nodular graphite bar grating GGG, with integrated galvanised steel sludge bucket
with MPA certificate for pressure-tightness of lip labyrinth sealing


	Length cm	Width cm	Height cm	Inlet section cm^2/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Inlet box DN 150	50,0	21,0	62,0	680	58,5	10	10547	
Inlet box DN 200	50,0	21,0	62,0	680	58,2	10	10548	

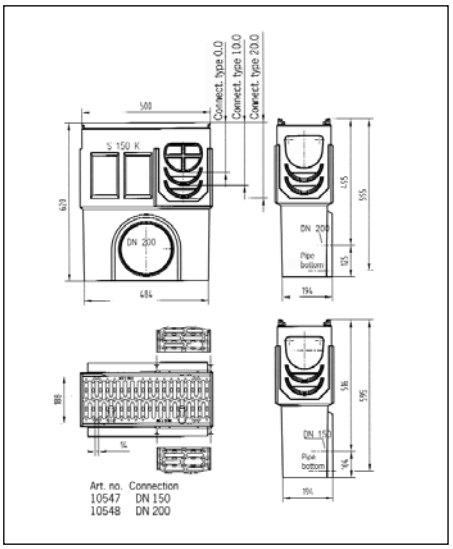

Dimensioning of inlet box S 150 K

Universal front wall S 150 K[1] of polymer concrete for channel front and end with cast iron edge

Suitable for type 0. / 10. / 20.	3,3	00699

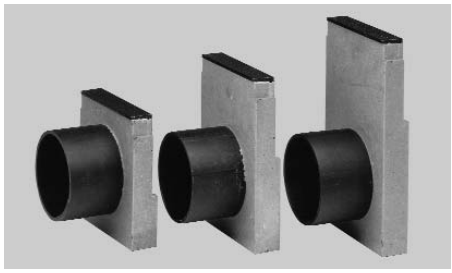

Front wall with socket PE-HD

Front wall S 150 K[1] of polymer concrete for channel end with cast iron edge, moulded NBR-O-ring and PE-HD socket, DN 150

Suitable for type 0.	2,2	00885
Suitable for type 10.	3,1	00886
Suitable for type 20.	3,7	00887

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
6) Channel body with 2 inlet sides.

Accessories for line drainage system S 150 K[1)] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 15.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Adapter piece S 150 K[1)] for channel body,for bridging of height differences when fitting with step slope

	kgs/ unit	EDP order no.	€uro/ unit
Adapter piece	1,2	00698	



Adapter piece for channel body to bridge height differences when fitting with step slope

Adapter S 150 K[1)] of polymer concrete for flow direction change with cast iron edge

Suitable for type 0.	1,4	00970
Suitable for type 10.	1,8	00971
Suitable for type 20.	2,2	00972




Adapter for flow direction change

Pipe sockets and odour seals see accessories suitable for all systems on page 71.

Grating hook for cover gratings S 100 K / S 150 K / S 200 K / S 300 K

Grating hook to open and lift out the cover gratings	0,25	01290

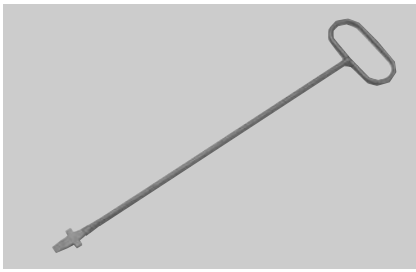

ACO DRAIN® grating hook

1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

Line drainage

Line drainage system S 200 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 20.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14

Upon request also available with integrated slope

Channel body S 200 K[1] with Powerlock® of polymer concrete


with ACO DRAIN® safety groove (SF) at outlet side of channel,
with integrated edge protection, 6 mm, of cast iron (GG),
specially coated, with nodular graphite bar grating (GGG)

Type	Length cm	Width cm	Height Front cm	Height End cm	Inlet section cm²/m	Slope type(G)	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0*	100,0	26,0	29,0	29,0	935	1/3	87,0	9	00571	
0.1[2]*	50,0	26,0	29,0	29,0	935	1/3	45,2	6	00574	
0.2/1[2][3][6]	50,0	26,0	32,0	33,0	935	1/3	46,3		02981	
10.0*	100,0	26,0	34,0	34,0	935	1/3	92,6	6	00572	
10.1[2]*	50,0	26,0	34,0	34,0	935	1/3	48,0	6	00575	
10.2/1[2][3][6]	50,0	26,0	37,0	38,0	935	1/3	49,3		02983	
20.0*	100,0	26,0	39,0	39,0	935	1/3	95,8	6	00573	
20.1[2]*	50,0	26,0	39,0	39,0	935	1/3	50,6	6	00576	
20.2/1[2][3][6]	50,0	26,0	42,0	43,0	935	1/3	51,3		02985	


Channel elements with safety plug available upon request.

Note: please observe!
Accessories for liquid-tight channel trains page 68.


1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic .
For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D.
Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
3) Channel body with moulded NBR-O-ring for socket PVC/PE-HD DN 200.
6) Channel body with 2 inlet sides.
G) Definition of slope types see page 2.
* Channel body, pre-shaped, for vertical outlet DN 150 cannot be connected liquid-tight!

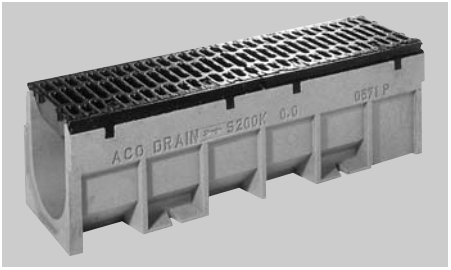


Channel body S 200 K, 1.0 m

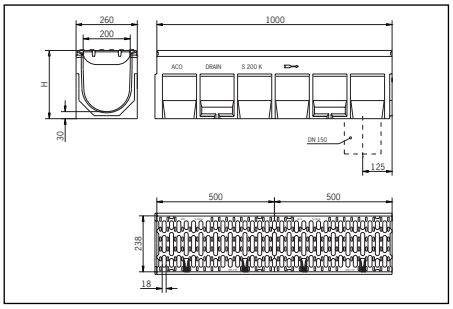

Dimensioning of channel body S 200 K, 1.0 m

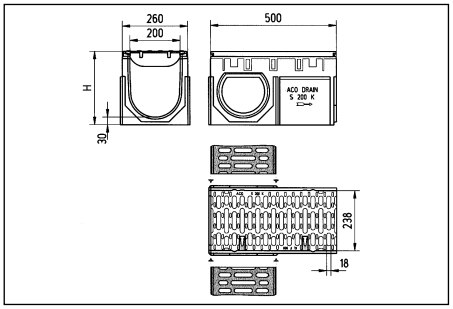

Dimensioning of channel body S 200 K, 0.5 m

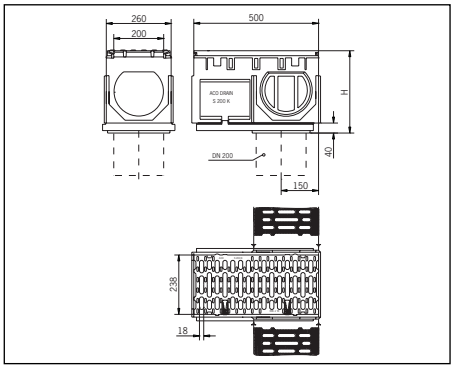

Dimensioning of channel body S 200 K, 0.5 m
with vertical outlet DN 200


Line drainage system S 200 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 20.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Flat channel S 200 K[1] with Powerlock®, clear opening 20.0 cm, of polymer concrete

with integrated edge protection, 6 mm, of cast iron (GG), specially coated, with nodular graphite bar grating (GGG), class A 15 - F 900 according to EN 1433

	Length cm	Width cm	Height cm	Slope type[G]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Channel body								
Flat channel S 200 K	100,0	26,0	13,0	1	64,8	15	08013	
with socket PE-HD, DN 100	100,0	26,0	13,0	1	60,0	6	10036	

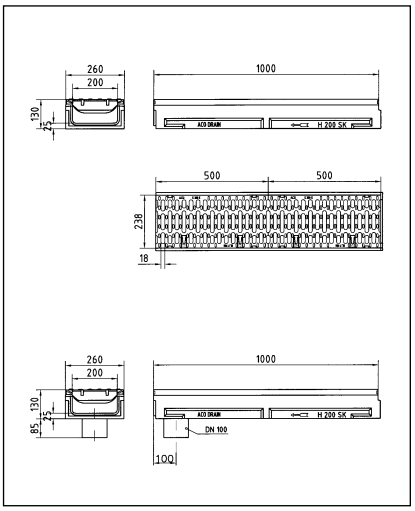


Dimensioning of flat grating S 200 K

Official test sign Z-74.4-14

Inlet box S 200 K[1] single-body, of polymer concrete with new integrated lip labyrinth sealing

to be connected liquid-tight with integrated edge protection of cast iron, specially coated, with nodular graphite bar grating GGG, with integrated galvanised steel sludge bucket
with MPA certificate for pressure-tightness of lip labyrinth sealing.

	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Inlet box DN 150	50,0	26,0	70,0	935	73,5	6	10549	
Inlet box DN 200	50,0	26,0	70,0	935	73,3	6	10550	

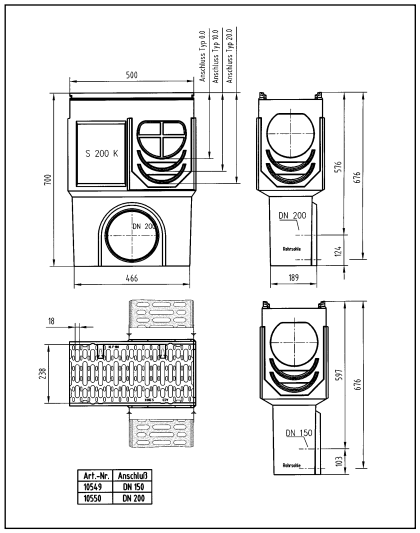

Dimensioning of inlet box, single-body, S 200 K

[1] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

[G] Definition of slope types see page 2.


Line drainage

Accessories for line drainage system S 200 K[1)] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 20.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Front wall for flat channel S 200 K[1)] of polymer concrete for channel front and end, with cast iron edge

	kgs/ unit	EDP order no.	€uro/ unit
Front wall, height to be adjusted on site	3,7	01516	

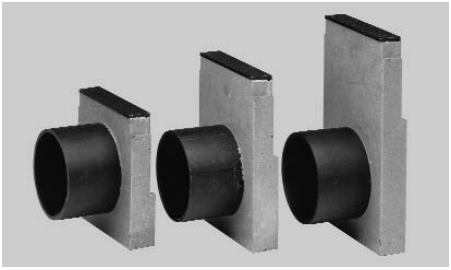


Front wall with socket PE-HD

Universal front wall S 200 K[1)] of polymer concrete for channel front and end with cast iron edge

Suitable for type 0. / 10. / 20.	4,7	00578

Front wall S 200 K[1)] of polymer concrete for channel end with cast iron edge, moulded NBR-O-ring and PE-HD socket, DN 200

Suitable for type 0.	3,7	00565
Suitable for type 10.	4,5	00566
suitable for type 20.	5,4	00567

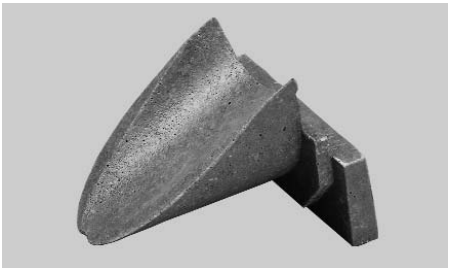


Adapter piece for channel body to bridge height differences when fitting with step slope

Pipe sockets and odour seals see accessories suitable for all systems on page 71.

Adapter piece S 200 K[1)] for channel body, for bridging of height differences when fitting with step slope

Adapter piece	1,6	00577

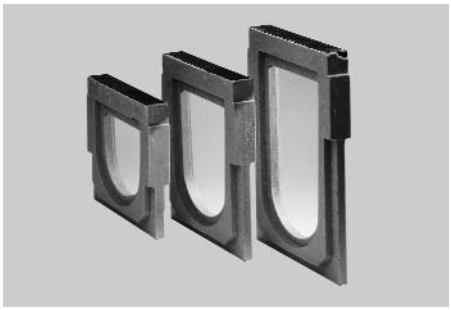


Adapter for flow direction change

Adapter S 200 K[1)] of polymer concrete for flow direction change with cast iron edge

Suitable for type 0.	1,9	02991
Suitable for type 10.	2,0	02992
Suitable for type 20.	2,6	02993

Grating hook for cover gratings S 100 K / S 150 K / S 200 K / S 300 K

Grating hook to open and lift out the cover gratings	0,25	01290

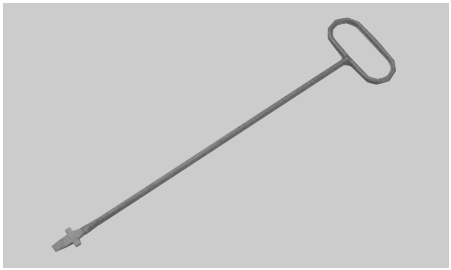

ACO DRAIN® grating hook

[1)] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

Line drainage system S 300 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 30.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14

Channel body S 300 K[1] with Powerlock® of polymer concrete

with ACO DRAIN® safety groove (SF) at outlet side of channel,
with integrated edge protection, 6 mm, of cast iron (GG),
specially coated, with nodular graphite bar grating (GGG)


Type	Length cm	Width cm	Height Front cm	Height End cm	Inlet section cm²/m	Slope type[G]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0*	100,0	36,0	40,0	40,0	1511	1	118,4	6	02700	
0.1[2]*	50,0	36,0	40,0	40,0	1511	1	68,0	4	02703	
0.2/1[2][3][6]	50,0	36,0	44,0	44,0	1511	1	66,6	4	02740	
0.2/2[2][5][6]	50,0	36,0	44,0	45,5	1511	1	69,8		10660	

Note: please observe!
Accessories for liquid-tight channel trains page 68.


1) Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.
2) Channel body with lateral pre-shapes for corner-, T- and cross connections.
3) Channel body with moulded NBR-O-ring for socket PVC/PE-HD DN 200.
5) Channel body with ACO DRAIN® stainless steel safety plug, DN 150.
6) Channel body with 2 inlet sides.
G) Definition of slope types see page 2.
* Channel body, pre-shaped, for vertical outlet DN 200 cannot be connected liquid-tight!




Channel body S 300 K, 1,0 m

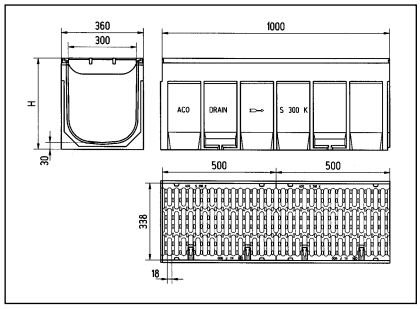

Dimensioning of channel body S 300 K, 1.0 m

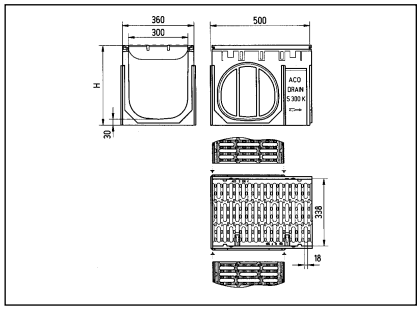

Dimensioning of channel body S 300 K, 0.5 m

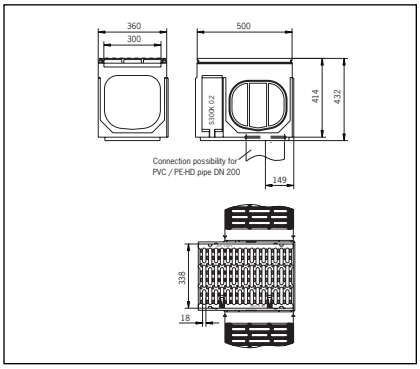

Dimensioning of channel body S 300 K, 0.5 m
with vertical outlet DN 200

Line drainage


Line drainage system S 300 K[1] according to DIN EN 1433 / DIN V 19580 edge protection 6 mm, of cast iron and cast iron grating (GGG)

For heavy duty areas, clear opening 30.0 cm
Load classes A 15 to F 900 according to DIN EN 1433

Official test sign Z-74.4-14

Inlet box, multi-part, S 300 K[1] of polymer concrete, with new integrated lip labyrinth sealing, with MPA certificate for pressure-tightness of lip labyrinth sealing

	Type	Length cm	Width cm	Height cm	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Upper part for type 0.	OT	50,0	36,0	41,5	63,1		00670	
Bottom part short design DN 150	UT	50,0	32,2	36,5	28,5	5	01614	
Bottom part short design DN 200	UT	50,0	32,2	36,5	27,0	5	06190	
Bottom part long design DN 150	UT	50,0	32,2	71,5	49,9	4	03217	
Bottom part long design DN 200	UT	50,0	32,2	71,5	49,9	4	08565	
Intermediate section	ZT	50,0	32,2	30,0	20,7		01697	
Bucket short design					4,7		01616	
Bucket long design					6,2		01617	

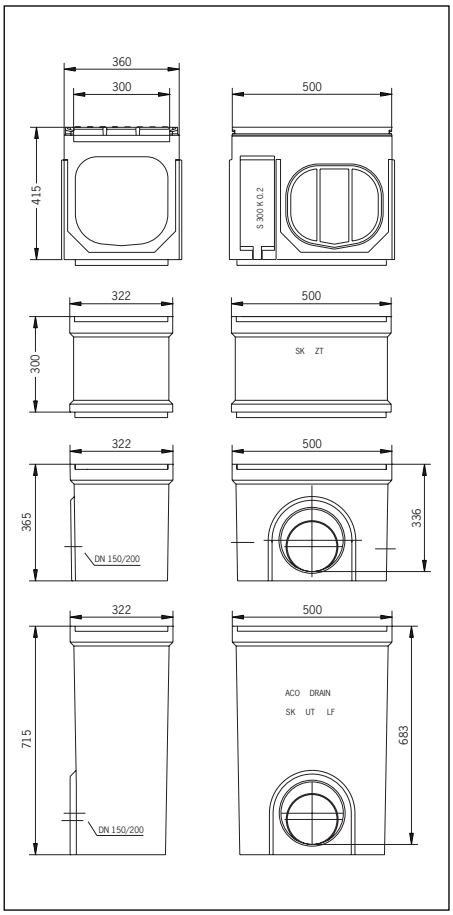

Dimensioning of inlet box S 300 K

Universal front wall S 300 K[1] of polymer concrete for channel front and end with cast iron edge

Suitable for type 0.		8,2	00677

Front wall S 300 K[1] of polymer concrete for channel end with cast iron edge, moulded NBR-O-ring and PE-HD socket, DN 200

Suitable for type 0.		8,0	01490


Adapter piece S 300 K[1] of polymer concrete for flow direction change, with cast iron edge

Suitable for type 0.		3,0	01493

Pipe sockets and odour seals see accessories suitable for all systems on page 71.

Grating hook for cover gratings S 100 K / S 150 K / S 200 K / S 300 K

Grating hook to open and lift out the cover gratings		0,25	01290

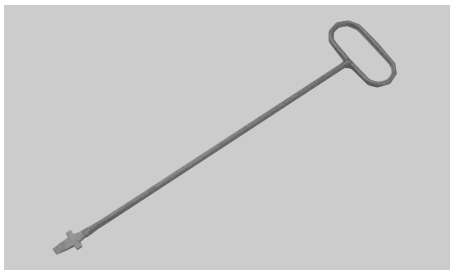

ACO DRAIN® grating hook

[1] Exception: transverse drainage of roads/level crossings particularly exposed to heavy traffic . For these application scopes, we recommend ACO DRAIN® Monoblock RD 100/200 D. Please contact our application technology service for free.

Linienentwässerungssystem S 200

Für Schwerlastbereiche, lichte Weite 20,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Rinnenkörper S 200 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	Einlaufquersch. cm^2/m	Gefällearten[G)]	kg/Stk.	Stk./Pal.	EDV-Best.-Nr.	€uro/Stk.
Rinnenkörper mit integrierter Gusszarge*) und verkehrssicher befestigten Abdeckrosten, mit Vorformung für senkrechten Ablauf DN 150	1	100,0	26,0	30,9	918	1	89,0	12	01427	**399,-**
wie vor, mit Öffnung für Sinkkastenunterteil		100,0	26,0	30,9	918	1	82,0	12	01621	**463,-**
wie vor, mit seitl. Vorformung für Eck-, T- und Kreuzverbindungen	4	50,0	26,0	30,9	918	1	40,0	24	02847	**267,-**
Sinkkastenunterteil Kurzform	UT KF	50,0	32,2	34,5		–	28,5	12	01614	**128,-**
Sinkkastenunterteil Langform	UT LF	50,0	32,2	69,5		–	49,9	6	03217	**196,-**
Schlammeimer, verz.							2,8		01506	**102,-**

Rinnenkörper S 200 mit integrierter Gusszarge*), mit verkehrssicher befestigtem Stegrost aus Kugelgraphitguss GGG, werkseitig verschraubt, mit Vorformung für senkrechten Ablauf DN 150.

Rinnenkörper S 200, Baulänge 50 cm, mit seitlichen Vorformungen für Eck-, T- und Kreuzverbindungen

Kombistirnwand aus Polymerbeton für Rinnenanfang und -ende mit Gusskante

passend für Typ 1/4							3,7	64	01516	**28,-**

Rinnenkörper S 200 mit Öffnung für Sinkkastenunterteil

Stirnwand aus Polymerbeton für Rinnenende mit Gusskante, mit Stutzen PVC, DN 150

Stutzen PVC										
passend für Typ 1/4							3,5	16	01517	**48,-**

Vermaßung des Rinnenkörpers S 200

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
*) Europatent 0081762
G) Definition der Gefällearten siehe Seite 3.

Rohrstutzen und Geruchsverschlüsse s. Systemzubehör Seite 50.

Linienentwässerungssystem S 300

Für Schwerlastbereiche, lichte Weite 30,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Rinnenkörper S 300 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	Einlaufquersch. cm^2/m	Gefällearten[G)]	kg/ Stk.	Stk./ Pal.	EDV-Best.-Nr.	€uro/ Stk.
Rinnenkörper mit integrierter Gusszarge*) und verkehrssicher befestigten Abdeckrosten, mit Vorformung für senkrechten Ablauf DN 200	1	100,0	36,0	39,9	1388	1	125,0	9	02632	**688,-**
wie vor, mit Öffnung für Sinkkastenunterteil		100,0	36,0	39,9	1388	–	123,0	9	03102	**728,-**
wie vor, mit seitl. Vorformung für Eck-, T- und Kreuzverbindungen	4	50,0	36,0	39,9	1388	1	62,0	18	01766	**433,-**
Sinkkastenunterteil Kurzform	UT KF	50,0	32,2	34,5		–	28,5	12	01614	**128,-**
Sinkkastenunterteil Langform	UT LF	50,0	32,2	69,5		–	49,9	6	03217	**196,-**
Eimer für Unterteil Kurzform							4,7		01616	**79,-**
Eimer für Unterteil Langform							6,2		01617	**94,-**

Rinnenkörper S 300 mit integrierter Gusszarge*), mit verkehrssicher befestigtem Stegrost aus Kugelgraphitguss GGG, werkseitig verschraubt, mit Vorformung für senkrechten Ablauf DN 150.

Rinnenkörper S 300 mit Öffnung für Sinkkastenunterteil

Kombistirnwand aus Polymerbeton für Rinnenanfang und -ende mit Gusskante

passend für Typ 1/4	6,3	54	02573	**39,-**

Vermaßung des Rinnenkörpers S 300

Stirnwand aus Polymerbeton für Rinnenende mit Gusskante, mit Stutzen PVC, DN 200

Stutzen PVC				
passend für Typ 1/4	3,0	10	02574	**69,-**

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
*) Europatent 0081762
G) Definition der Gefällearten siehe Seite 3.

Rohrstutzen und Geruchsverschlüsse s. Systemzubehör Seite 50.

Linienentwässerungssystem S 150

Für Schwerlastbereiche, lichte Weite 15,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Rinnenkörper S 150 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	Einlaufquersch. cm^2/m	Gefällearт[G)]	kg/ Stk.	Stk./ Pal.	EDV-Best.-Nr.	€uro/ Stk.
Rinnenkörper mit integrierter Gusszarge*)										
und verkehrssicher befestigten Abdeckrosten,	1	100,0	20,5	22,0	638	1/3	48,0	20	01151	**258,-**
	4[2)]	50,0	20,5	22,0	638	1/3	27,0	40	01176	**132,-**
mit Vorformung für	2	100,0	20,5	27,0	638	1/3	51,5	15	01152	**258,-**
senkrechten Ablauf	5[2)]	50,0	20,5	27,0	638	1/3	28,0	30	01154	**132,-**
DN 150	3	100,0	20,5	32,0	638	1/3	55,0	15	01153	**258,-**

Rinnenkörper S 150 mit integrierter Gusszarge*), mit Stegrost aus Kugelgraphitguss GGG, je 50 cm mit 4 korrosionsgeschützten Sicherheitsschrauben, werkseitig verschraubt, mit Vorformung für senkrechten Ablauf DN 150

Übergangsstück für Rinnenkörper zur Überbrückung von Höhendifferenzen bei Verlegung mit Stufengefälle

Übergangsstück				0,9		01159	**15,-**

Rinnenkörper S 150, Baulänge 50 cm, mit seitlichen Vorformungen für Eck-, T- und Kreuzverbindungen

Adapter für Rinnenkörper S 150 zum Anschluss am ACO DRAIN® Sinkkasten S 200

passend für Typ 1 – 5	8,0	20,5	32,0		8,0		01160	**55,-**

Vermaßung des Rinnenkörpers S 150

Kombistirnwand aus Polymerbeton für Rinnenanfang und -ende mit Gusskante

passend für Typ 1 – 5				2,6	120	01130	**22,-**

Stirnwand aus Polymerbeton für Rinnenende mit Gusskante, mit Stutzen PVC, DN 150

Stutzen PVC								
passend für Typ 1/4				2,4	25	01131	**36,50**
passend für Typ 2/5				2,7	24	01132	**36,50**
passend für Typ 3				3,0	22	01133	**36,50**

Adapter für Rinnenkörper S 150 zum Anschluss an Sinkkasten

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
2) Rinnenkörper mit seitlichen Vorformungen für Eck-, T- und Kreuzverbindungen.
*) Europatent 0081762
G) Definition der Gefällearten siehe Seite 3.

Line drainage

Linienentwässerungssystem S 150

Für Schwerlastbereiche, lichte Weite 15,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Einlaufkasten S 150 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	kg/ Stk.	EDV-Best.-Nr.	€uro/ Stk.	€uro/ ges.
Einlaufkasten S 150 bestehend aus:								**435,50**
Oberteil	OT	50,0	20,5	35,0	43,0	01166	**240,-**	
Unterteil	UT	50,0	20,5	55,0	30,3	01167	**93,50**	
Eimer		–	–	–	2,8	01506	**102,-**	
Zwischenteil zur Aufstockung der Bauhöhe mit Vorformung DN 200	ZT	35,0	20,1			01168	**86,-**	

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
*) Europatent 0081762

2- bzw. 3teiliger Einlaufkasten in Breite des Rinnenkörpers, mit integrierter Gusszarge*) und verkehrssicher verschraubten Abdeckrosten, mit verzinktem Schlammeimer

Rohrstutzen und Geruchsverschlüsse s. Systemzubehör Seite 50.

Vermaßung Einlaufkasten S 150 ohne Zwischenteil

ACO DRAIN®

System S 150

Vermaßung Einlaufkasten S 150 mit Zwischenteil

Linienentwässerungssystem S 200

Für Schwerlastbereiche, lichte Weite 20,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Rinnenkörper S 200 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	Einlaufquersch. cm^2/m	Gefällearten[G)]	kg/Stk.	Stk./Pal.	EDV-Best.-Nr.	€uro/Stk.
Rinnenkörper mit integrierter Gusszarge*) und verkehrssicher befestigten Abdeckrosten, mit Vorformung für senkrechten Ablauf DN 150	1	100,0	26,0	30,9	918	1	89,0	12	01427	**399,-**
wie vor, mit Öffnung für Sinkkastenunterteil		100,0	26,0	30,9	918	1	82,0	12	01621	**463,-**
wie vor, mit seitl. Vorformung für Eck-, T- und Kreuzverbindungen	4	50,0	26,0	30,9	918	1	40,0	24	02847	**267,-**
Sinkkastenunterteil Kurzform	UT KF	50,0	32,2	34,5		–	28,5	12	01614	**128,-**
Sinkkastenunterteil Langform	UT LF	50,0	32,2	69,5		–	49,9	6	03217	**196,-**
Schlammeimer, verz.							2,8		01506	**102,-**

Rinnenkörper S 200 mit integrierter Gusszarge*), mit verkehrssicher befestigtem Stegrost aus Kugelgraphitguss GGG, werkseitig verschraubt, mit Vorformung für senkrechten Ablauf DN 150.

Rinnenkörper S 200, Baulänge 50 cm, mit seitlichen Vorformungen für Eck-, T- und Kreuzverbindungen

Kombistirnwand aus Polymerbeton für Rinnenanfang und -ende mit Gusskante

passend für Typ 1/4							3,7	64	01516	**28,-**

Rinnenkörper S 200 mit Öffnung für Sinkkastenunterteil

Stirnwand aus Polymerbeton für Rinnenende mit Gusskante, mit Stutzen PVC, DN 150

Stutzen PVC										
passend für Typ 1/4							3,5	16	01517	**48,-**

Vermaßung des Rinnenkörpers S 200

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
*) Europatent 0081762
G) Definition der Gefällearten siehe Seite 3.

Rohrstutzen und Geruchsverschlüsse s. Systemzubehör Seite 50.

Linienentwässerungssystem S 300

Für Schwerlastbereiche, lichte Weite 30,0 cm
Belastungsklassen D 400[1)], E 600, F 900 gemäß DIN 19 580

Rinnenkörper S 300 aus Polymerbeton

	Typ	Baulänge cm	Baubreite cm	Bauhöhe cm	Einlaufquersch. cm^2/m	Gefällearten[G)]	kg/ Stk.	Stk./ Pal.	EDV-Best.-Nr.	€uro/ Stk.
Rinnenkörper mit integrierter Gusszarge*) und verkehrssicher befestigten Abdeckrosten, mit Vorformung für senkrechten Ablauf DN 200	1	100,0	36,0	39,9	1388	1	125,0	9	02632	**688,-**
wie vor, mit Öffnung für Sinkkastenunterteil		100,0	36,0	39,9	1388	–	123,0	9	03102	**728,-**
wie vor, mit seitl. Vorformung für Eck-, T- und Kreuzverbindungen	4	50,0	36,0	39,9	1388	1	62,0	18	01766	**433,-**
Sinkkastenunterteil Kurzform	UT KF	50,0	32,2	34,5		–	28,5	12	01614	**128,-**
Sinkkastenunterteil Langform	UT LF	50,0	32,2	69,5		–	49,9	6	03217	**196,-**
Eimer für Unterteil Kurzform							4,7		01616	**79,-**
Eimer für Unterteil Langform							6,2		01617	**94,-**

Rinnenkörper S 300 mit integrierter Gusszarge*), mit verkehrssicher befestigtem Stegrost aus Kugelgraphitguss GGG, werkseitig verschraubt, mit Vorformung für senkrechten Ablauf DN 150.

Rinnenkörper S 300 mit Öffnung für Sinkkastenunterteil

Vermaßung des Rinnenkörpers S 300

Kombistirnwand aus Polymerbeton für Rinnenanfang und -ende mit Gusskante

passend für Typ 1/4	6,3	54	02573	**39,-**

Stirnwand aus Polymerbeton für Rinnenende mit Gusskante, mit Stutzen PVC, DN 200

Stutzen PVC				
passend für Typ 1/4	3,0	10	02574	**69,-**

1) Ausnahme: Querentwässerung von Schnellstraßen und Autobahnen. Für diese Einsatzgebiete empfehlen wir ACO DRAIN® Q 100/Q 200.
*) Europatent 0081762
G) Definition der Gefällearten siehe Seite 3.


Rohrstutzen und Geruchsverschlüsse s. Systemzubehör Seite 50.

Line drainage system ACO DRAIN® Monoblock PD 100 C according to DIN EN 1433 / DIN V 19580 in monolithic design, dyed evenly in anthracite black

For landscape gardening areas as well as for traffic areas, clear opening 10.0 cm
Load classes A 15, B 125, C 250 according to DIN EN 1433

Channel body Monoblock PD 100 C of polymer concrete monolithical, dyed evenly in anthracite black

Type	Length cm	Width cm	Height cm	Inlet section cm²/m	Slope-type[G]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0	100,0	15,0	20,0	202	1	28,5	25	30000	

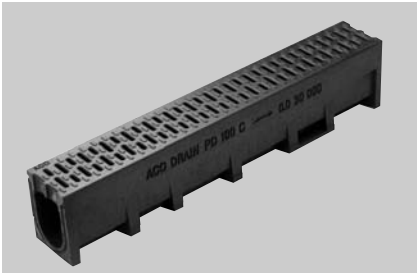

Channel body Monoblock PD 100 C, 1.0 m slot width 8 mm

Channel body Monoblock PD 100 C of polymer concrete dyed evenly in anthracite black as revision opening with plastic cover grating, with GRP edge protection, load class C 250

0.1	50,0	15,0	20,0	202	1	14,0	10	30001	



0.5 m element with GRP cover, with GRP edge protection and centrally-placed pre-shape

Inlet box combination Monoblock PD 100 C of polymer concrete, consisting of: upper part, bottom part, GRP cover grating, with GRP edge protection and plastic sludge bucket

Inlet box combination	50,0	15,0	44,0	202		22,2		30003	



Inlet box combination consisting of upper part, bottom part and sludge bucket

Polymer concrete front wall, dyed evenly in anthracite black for channel front and end

	kgs/ unit	Units/ PU	EDP order no.	€uro/ unit
Front wall	1,4	25	30006	

Polymer concrete front wall, dyed evenly in anthracite black for channel end with PVC socket DN 100

Front wall	1,2	6	30008	

[G] Definition of slope types see page 2.


Monoblock

Line drainage system ACO DRAIN® Monoblock PD 200 C according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, dyed evenly in anthracite black

For landscape gardening areas as well as for traffic areas, clear opening 20.0 cm
Load classes A 15, B 125, C 250 according to DIN EN 1433

Channel body Monoblock PD 200 C of polymer concrete monolithical, dyed evenly in anthracite black


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	Slope type[G]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0	100,0	25,0	32,5	487	1	68,0	9	10541	

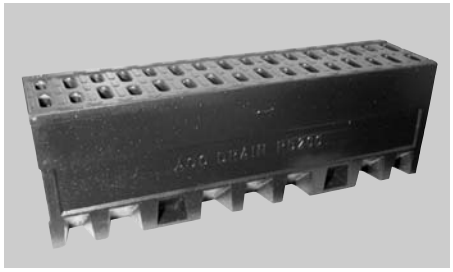

Channel body Monoblock PD 200 C, 1.0 m slot width 24 mm, anthracite black

Channel body Monoblock PD 200 C of polymer concrete dyed evenly in anthracite black as revision opening, with cast iron cover grating (GGG), with cast iron edge protection, load class F 900, pre-shaped, DN 200

0.1	50,0	26,0	33,0	935	1	46,5	10	10561

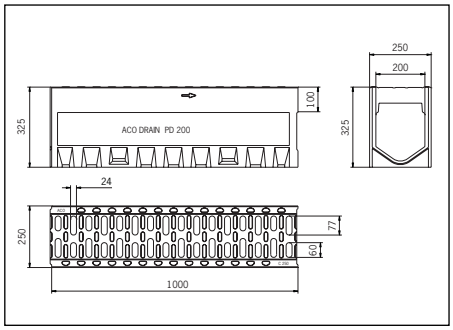


0.5 m element with cover, with edge protection and pre-shape

Polymer concrete front wall, dyed evenly in anthracite black

Front wall channel front	4,7	10576
Front wall channel end	4,9	10569

Polymer concrete front wall, dyed evenly in anthracite black for channel end with PE-HD socket DN 200

Front wall	4,0	10583

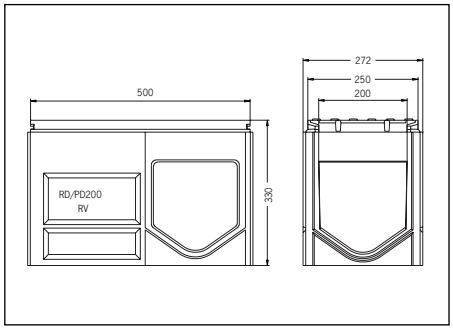

Revision element PD 200

Adapter for flow direction change, dyed evenly in anthracite black

Adapter	2,9	10578

[G] Definition of slope types see page 2.

Line drainage system ACO DRAIN® Monoblock PD 200 C according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, natural-coloured

For landscape gardening areas as well as for traffic areas, clear opening 20.0 cm
Load classes A 15, B 125, C 250 according to DIN EN 1433

Channel body Monoblock PD 200 C of polymer concrete monolithical, natural-coloured


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	Slope type[G]	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
0.0	100,0	25,0	32,5	487	1	68,0	9	10542	



Channel body Monoblock PD 200 C, 1.0 m slot width 24 mm, natural-coloured

Channel body Monoblock PD 200 C of polymer concrete natural-coloured, as revision opening, with cast iron cover grating (GGG), with cast iron edge protection, load class F 900, pre-shaped, DN 200


0.1	50,0	26,0	33,0	935	1	46,5	10	10564

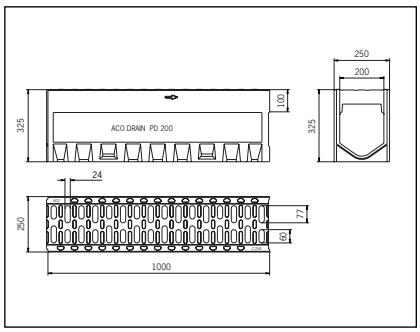

0.5 m element with cover, with edge protection and pre-shape

Inlet box, single-body, Monoblock PD 200 C of polymer concrete, natural-coloured, with cast iron cover grating (GGG), with cast iron edge protection, sludge bucket, load class F 900

Inlet box						
DN 150	50,0	26,0	65,0	935	68,0	10565
DN 200	50,0	26,0	65,0	935	68,0	10566

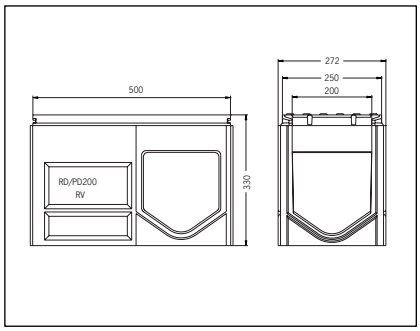

Revision element PD 200

Polymer concrete front wall, natural-coloured


Front wall channel front	4,7	10575
Front wall channel end	4,9	10579

Polymer concrete front wall, natural-coloured, for channel end with PE-HD socket DN 200

Front wall	4,0	10582

Adapter for flow direction change, natural-coloured

Adapter	2,9	10577

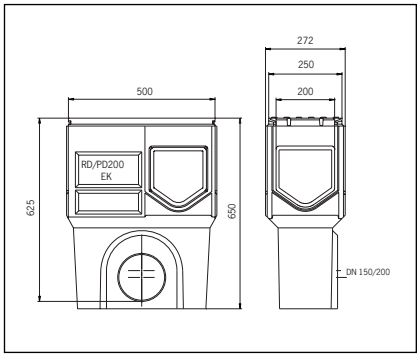

Inlet box, single-body, with sludge bucket

[G] Definition of slope types see page 2.

Monoblock

Line drainage system ACO DRAIN® Monoblock RD 100 D according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, dyed evenly in anthracite black

Field of application: Motorways, expressways, highly frequented traffic areas, for fields of use with high dynamic loads
Clear opening 10.0 cm
Load class D 400 according to DIN EN 1433

Channel body Monoblock RD 100 D of polymer concrete, monolithical, dyed evenly in anthracite black


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
0.0	100,0	16,0	26,5	292	49,0	10502	



Channel body Monoblock RD 100 D, 1.0 m anthracite black

Polymer concrete front wall, dyed evenly in anthracite black

Front wall channel front	2,3	10506
Front wall channel end	2,3	10513

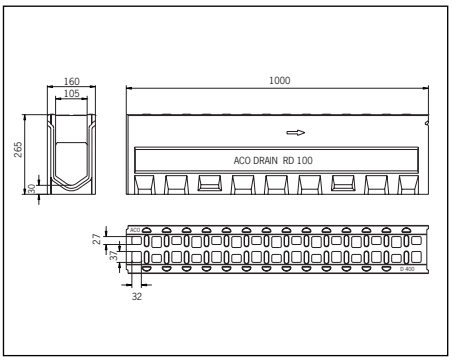

Dimensioning of channel body Monoblock RD 100 D, 1.0 m

Polymer concrete front wall with socket DN 100, dyed evenly in anthracite black, for channel end


Front wall with socket	2,0	10505

Adapter for flow direction change of polymer concrete, dyed evenly in anthracite black

Adapter	2,0	10516

Channel body Monoblock RD 100 D of polymer concrete dyed evenly in anthracite black, as revision opening, with cast iron cover grating, with cast iron edge protection, load class F 900, pre-shaped, DN 100


Revision element	50,0	16,0	26,5	380	32,6	10503	

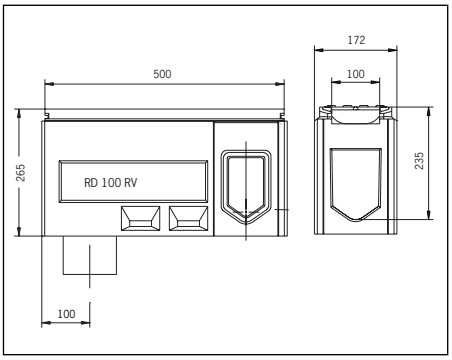

Revision element RD 100 D

Inlet box, single-body, Monoblock RD 100 D of polymer concrete, natural-coloured, with cast iron cover grating (GGG), with cast iron edge protection, sludge bucket, load class F 900

Inlet box								
DN 100	50,0	16,0	60,0	380		380	43,0	10525
DN 150	50,0	16,0	60,0	380		380	43,0	10526

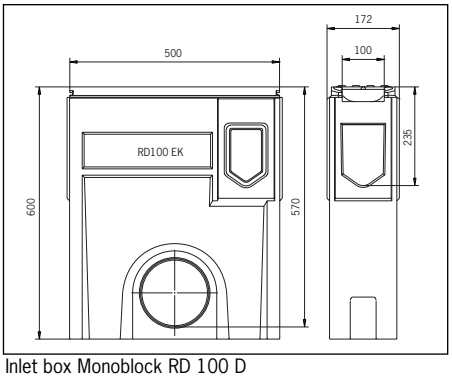


Inlet box Monoblock RD 100 D

Line drainage system ACO DRAIN® Monoblock RD 100 D according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, natural-coloured

Field of application: Motorways, expressways, highly frequented traffic areas, for fields of use with high dynamic loads
Clear opening 10.0 cm
Load class D 400 according to DIN EN 1433

Channel body Monoblock RD 100 D of polymer concrete, monolithical, natural-coloured


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
0.0	100,0	16,0	26,5	292	49,0	10507	

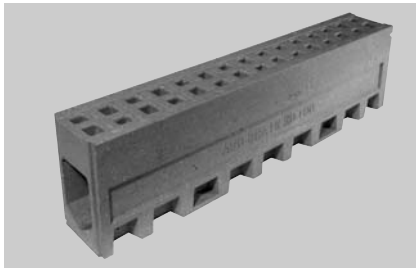

Channel body Monoblock RD 100 D, 1.0 m natural-coloured

Polymer concrete front wall, natural-coloured

Front wall channel front	2,3	10511	
Front wall channel end	2,3	10512	

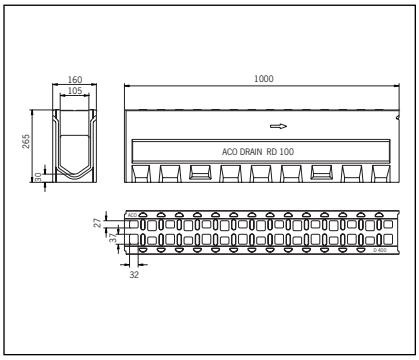


Dimensioning of channel body Monoblock RD 100 D, 1.0 m

Front wall with socket DN 100 of polymer concrete, natural-coloured, for channel end

Front wall with socket	2,0	10510	

Adapter for flow direction change of polymer concrete, natural-coloured

Adapter	2,0	10517	

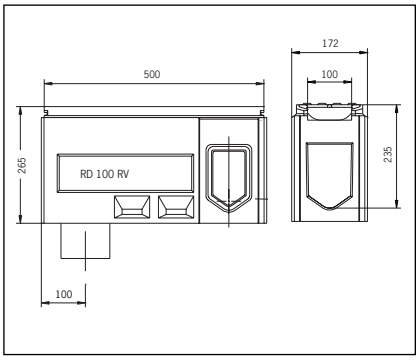


Revision element RD 100 D

Channel body Monoblock RD 100 D of polymer concrete natural-coloured, as revision opening, with cast iron cover grating, with cast iron edge protection, load class F 900, pre-shaped, DN 100

Revision element	50,0	16,0	26,5	380	33,0	10508	

Inlet box, single-body, Monoblock RD 100 D of polymer concrete, natural-coloured, with cast iron cover grating (GGG), with cast iron edge protection, sludge bucket, load class F 900

Inlet box								
DN 100	50,0	16,0	60,0	380	380	43,0	10525	
DN 150	50,0	16,0	60,0	380	380	43,0	10526	

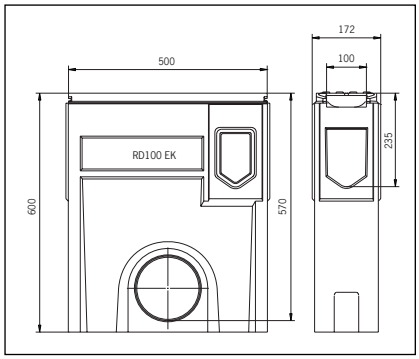

Inlet box Monoblock RD 100 D

Monoblock

Line drainage system ACO DRAIN® Monoblock RD 200 D according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, dyed evenly in anthracite black

Field of application: Motorways, expressways, highly frequented traffic areas, for fields of use with high dynamic loads
Clear opening 20.0 cm
Load class D 400 according to DIN EN 1433

Channel body Monoblock RD 200 D of polymer concrete, monolithical, dyed evenly in anthracite black


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
0.0	100,0	25,0	32,5	524	80,0	10571	



Channel body Monoblock RD 200 D, 1.0 m anthracite black

Polymer concrete front wall, dyed evenly in anthracite black, for channel front and end

Front wall channel front	4,7	10576
Front wall channel end	4,9	10569

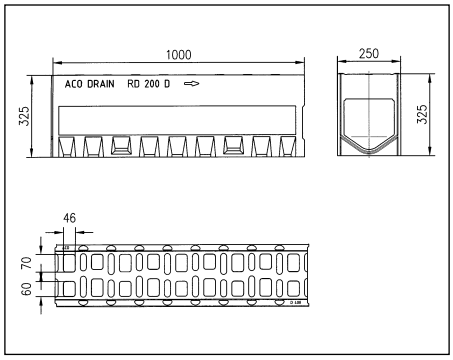

Dimensioning of channel body Monoblock RD 200 D, 1.0 m

Polymer concrete front wall with socket DN 200, dyed evenly in anthracite black, for channel front and end

Front wall with socket	4,0	10583

Adapter for flow direction change of polymer concrete, dyed evenly in anthracite black

Adapter	2,9	10578

Channel body Monoblock RD 200 D of polymer concrete dyed evenly in anthracite black, as revision opening, with cast iron cover grating (GGG), with edge protection, load class F 900, pre-shaped, DN 200

Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
0.1	50,0	26,0	33,0	935	46,5	10561	




0.5 m element as revision opening and corner-, T- and cross connection

Line drainage system ACO DRAIN® Monoblock RD 200 D according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint, natural-coloured

Field of application: Motorways, expressways, highly frequented traffic areas, for fields of use with high dynamic loads
Clear opening 20.0 cm
Load class D 400 according to DIN EN 1433

Channel body Monoblock RD 200 D of polymer concrete, monolithical, natural-coloured


Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
0.0	100,0	25,0	32,5	524	80,0	10570	

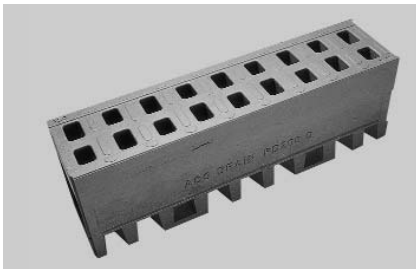

Channel body Monoblock RD 200 D, 1.0 m, natural-coloured

Polymer concrete front wall, natural-coloured

Front wall channel front	4,7	10575	
Front wall channel end	4,9	10579	

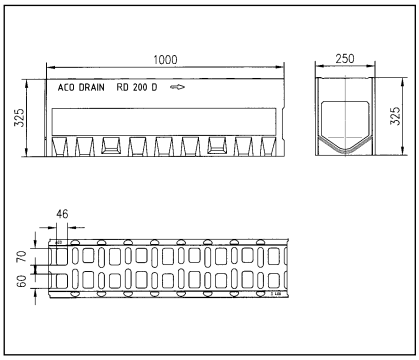

Dimensioning of channel body Monoblock RD 200 D, 1.0 m

Front wall with socket DN 200 of polymer concrete, natural-coloured, for channel end


Front wall with socket	4,0	10582	

Adapter for flow direction change of polymer concrete

Adapter	2,9	10577	

Channel body Monoblock RD 200 D of polymer concrete natural-coloured, as revision opening, with cast iron cover grating (GGG), with edge protection, load class F 900, pre-shaped, DN 200

Revision element	50,0	26,0	33,0	935	46,5	10564	

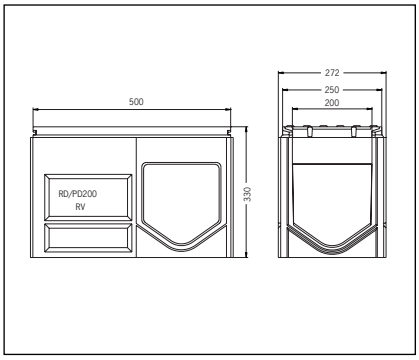

Dimensioning of 0.5 m element as revision opening and corner-, T- and cross connection

Monoblock

Line drainage system ACO DRAIN® Monoblock RD 200 D according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint


Field of application: Motorways, expressways, highly frequented traffic areas, for fields of use with high dynamic loads
Clear opening 20.0 cm
Load class D 400 according to DIN EN 1433

Inlet box, single-body, Monoblock RD 200 D of polymer concrete, with cast iron cover grating (GGG), with cast iron edge protection, load class F 900 complete with sludge bucket

Type	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Inlet box natural-coloured DN 150	50,0	26,0	65,0	935	68,0		10565	
natural-coloured DN 200	50,0	26,0	65,0	935	68,0		10566	



Inlet box RD 200

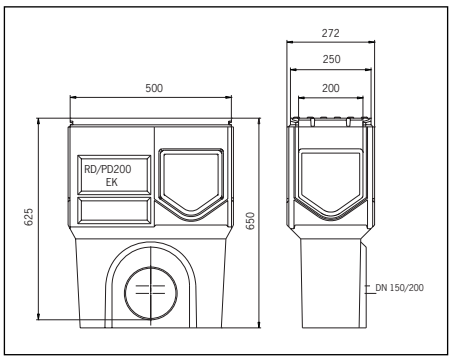


Dimensioning of inlet box

Inlet box, multi-part, RD 200 D of polymer concrete,

with **new integrated lip labyrinth sealing, with MPA certificate for pressure-tightness of lip labyrinth sealing**, with screwless stop Powerlock system, with integrated cast iron edge protection, with bar grating of nodular graphite (GGG) for load classes A 15 to F 900

Upper part	50,0	36,0	43,0	1511	87,0		10574	
Bottom part short design DN 150			36,5		28,5	5	01614	
Bottom part short design DN 200			36,5		27,0	5	06190	
Bottom part long design DN 150			71,5		49,9	4	03217	
Bottom part long design DN 200			71,5		49,9	4	08565	
Intermediate section			30,0		20,7		01697	
Bucket short design					4,7		01616	
Bucket long design					6,2		01617	

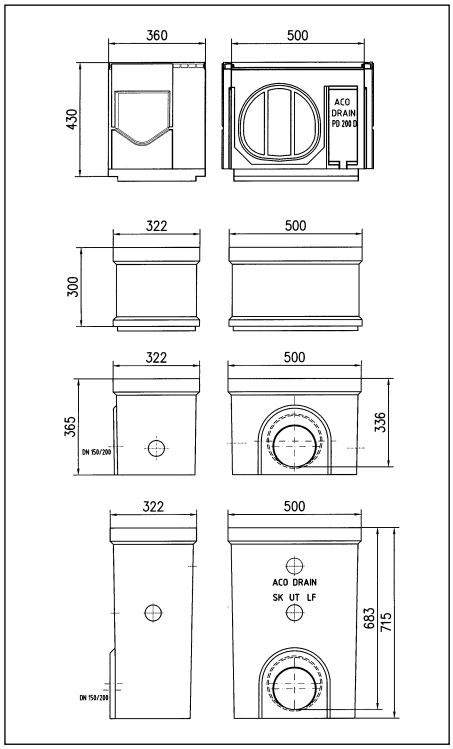

Dimensioning of inlet box, multi-part, RD 200 D

Line drainage system ACO DRAIN® Monoblock RD 300 according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint

Field of application: Motorways, expressways, airports, highly frequented traffic areas, for fields of use with high dynamic loads

with V-section

Clear opening 30.0 cm

Load classes A 15, B 125, C 250, D 400, F 900 according to DIN EN 1433


Official test sign Z-74.4-53 for use in LAU plants.

Delivery time and price upon request.

Channel body Monoblock RD 300 of polymer concrete, natural-coloured, with ACO DRAIN safety groove (SF) for liquid-tight fitting

Type	Length cm	Width cm	Height cm	Inlet section cm^2/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Channel D 400	200,0	40,0	59,5	800*	484,0	2	10800	
Channel F 900	200,0	40,0	59,5	800*	484,0	2	10820	

* Throughflow section 995 cm^2

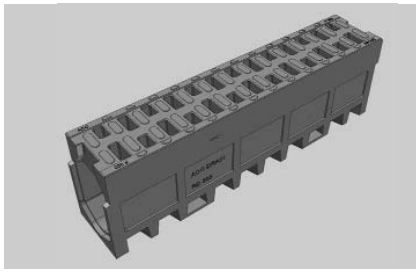

Channel body Monoblock RD 300, 2.0 m, natural-coloured

Channel body Monoblock RD 300 of polymer concrete, natural-coloured, as revision element with cast iron grating GGG, class F 900, with screwless stop, with ACO DRAIN safety groove (SF) for liquid-tight fitting

0.1	75,0	40,0	64,5	219,0		10803	

Adapter revision element

Adapter		40,0	59,5	29,1		10804	

Polymer concrete front wall for channel front and end

Front wall channel front		40,0	59,5	31,2	4	10802	
Front wall channel end		40,0	59,5	38,8	4	10801	

Polymer concrete front wall for channel end with integrated lip labyrinth sealing DN 300

Front wall channel end with sealing		40,0	59,5	29,5		10805	

Adapter for flow direction change of polymer concrete

Adapter		40,0	59,5	17,0		10806	

Monoblock

Line drainage system ACO DRAIN® Monoblock RD 300 according to DIN EN 1433 / DIN V 19580 in monolithic design, without adhesive joint

Field of application: Motorways, expressways, airports, highly frequented traffic areas, for fields of use with high dynamic loads

with V-section

Clear opening 30.0 cm

Load classes A 15, B 125, C 250, D 400, F 900 according to DIN EN 1433


Official test sign Z-74.4-53 for use in LAU plants.

Delivery time and price upon request.


Inlet box combination* Monoblock RD 300 of polymer concrete, natural-coloured, with cast iron grating GGG, class F 900, with screwless stop, with ACO DRAIN safety groove (SF) for liquid-tight fitting, with lip labyrinth sealing, DN 400

Type	Length cm	Width cm	Height cm	Inlet section cm^2/m	kgs/ unit	Units/ pallet	EDP order no.	€uro/ unit
Upper part	75,0	40,0	64,0		174,0		10821	
Intermediate section ZW			33,0		80,0		10822	
Bottom part with sealing DN 400			71,5		190,0		10823	
Adapter bucket support galv. steel					3,0		10824	
Sludge bucket					6,2		01617	

* Upon request, also available completely glued.

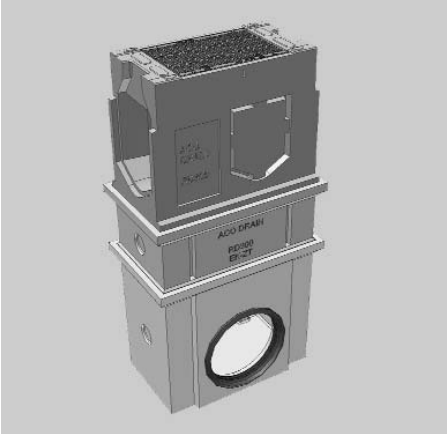

Inlet box RD 300

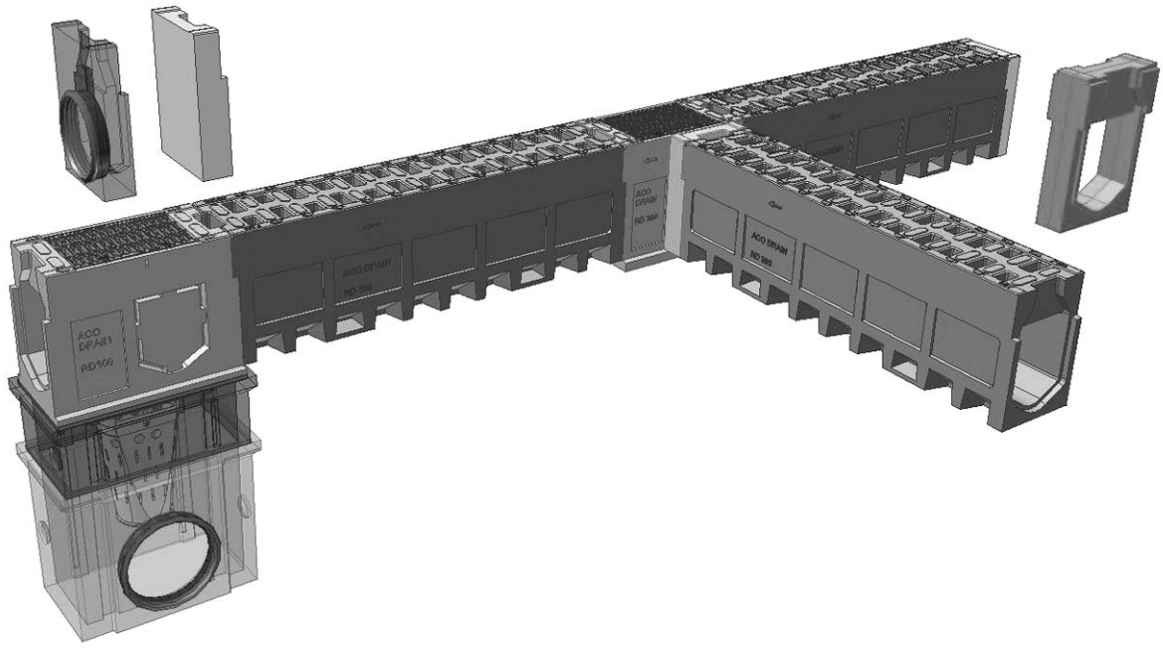

Slotted channel systems

Application: Paved areas, high-quality special paved surfaces,
large-size marble top surfaces in the outside area (also see system solutions page 59)

Line drainage system SR 100 S with gully top of galvanised steel/stainless steel slot height 7.5 cm with guide straps, with reinforced edge

Clear opening 10.0 cm, slot width 1.5 cm
Load classes A 15, B 125, C 250, following DIN EN 1433

Also available with integrated slope upon request.

Slotted channel SR 100 S of polymer concrete with slotted frame, galvanised steel/stainless steel

	Length cm	Width cm	Height cm	Inlet section cm^2/m	kgs/ unit	EDP order no.	€uro/ unit
Channel element							
with slotted frame,	100,0	13,0	22,2	150	17,6	06112	
galvanised steel	50,0	13,0	22,2	150	10,6	06113	
with slotted frame	100,0	13,0	22,2	150	17,6	06115	
stainless steel	50,0	13,0	22,2	150	10,6	06116	

Inlet box of slotted channel SR 100 S of polymer concrete with inspection top, galvanised steel/stainless steel

Inlet box with slotted frame							
and revision opening, galvanised steel							
with PP sludge bucket	50,0	15,5	44,7	150	21,2	06114	
Inlet box with slotted frame							
and revision opening, stainless steel							
with PP sludge bucket	50,0	15,5	44,7	150	21,2	06117	


Front wall SR 100 S of polymer concrete for channel front and end

Galvanised edge						1,4	06340
Stainless steel edge						1,4	06246

Front wall SR 100 S of polymer concrete with PVC socket

Galvanised edge							
with PVC socket							
DN 100						0,7	06241
Stainless steel edge							
with PVC socket							
DN 100						0,7	06262


**Slotted frame system SR 100 S, laterally flush, available upon request in various designs.
Pleae contact our application technology service for free, see also www.acodrain.de.**

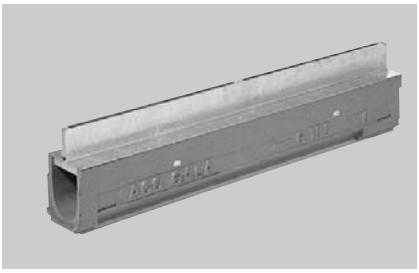


SR 100 S, 1,0 m




Inlet box SR 100 S, 0.5 m

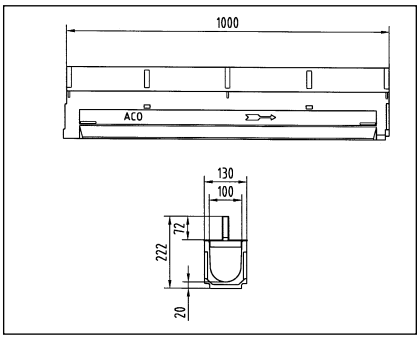

Dimensioning of channel element SR 100 S

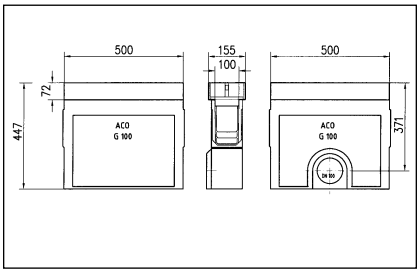

Dimensioning of inlet box SR 100 S

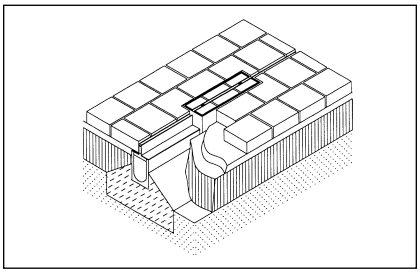

Section view SR 100 S

Slotted channel systems


NEW!

Schlitzrinnensysteme

Application: Paved areas, high-quality special paved surfaces,
large-size natural stone surfaces in the outside area (also see system solutions page 59)

Line drainage system SR 150 S with gully top of galvanised steel/stainless steel slot height 15.0 cm with guide straps, with reinforced edge

Clear opening 15.0 cm, slot width 1.5 cm
Load classes A 15, B 125, C 250, D 400, following DIN EN 1433

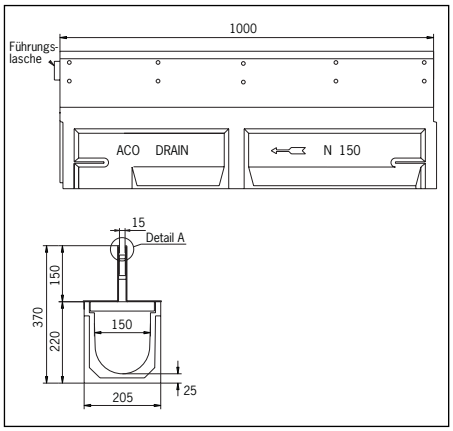


SR 150 S, 1,0 m

Slotted channel SR 150 S of polymer concrete with slotted frame, galvanised steel/stainless steel

	Length cm	Width cm	Height cm	Inlet section cm²/m	kgs/ unit	EDP order no.	€uro/ unit
Channel element							
with slotted frame,	100,0	20,5	37,0	150		10533	
galvanised steel	50,0	20,5	37,0	150		10534	
with slotted frame	100,0	20,5	37,0	150		10535	
stainless steel	50,0	20,5	37,0	150		10536	

Inlet box of slotted channel SR 150 S of polymer concrete with inspection top, galvanised steel/stainless steel

Inlet box combination							
and revision opening, galvanised steel							
with sludge bucket	50,0	20,5	95,0	150		10537	
Inlet box combination							
and revision opening, stainless steel							
with sludge bucket	50,0	20,5	95,0	150		10538	

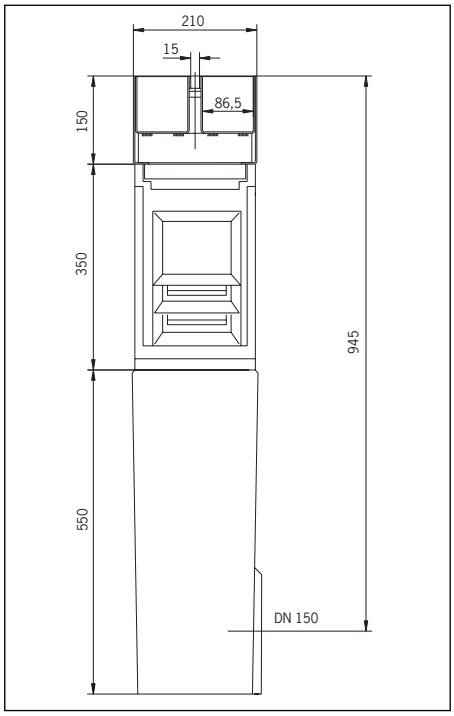

Inlet box combination with revision opening

Combination of polymer concrete for channel front and end

Front wall						01155	

Grating hook for cover gratings with Drainlock®


Grating hook to lift							
out the revision opening							
(to be ordered in pairs)						16364	



Application example for grating hook

**Slotted frame system SR 150 S, laterally flush, available upon request in various designs.
Pleae contact our application technology service for free, see also www.acodrain.de.**

Slotted channel systems
ACO DRAIN® Slotted channel SR 150 S laterally flush

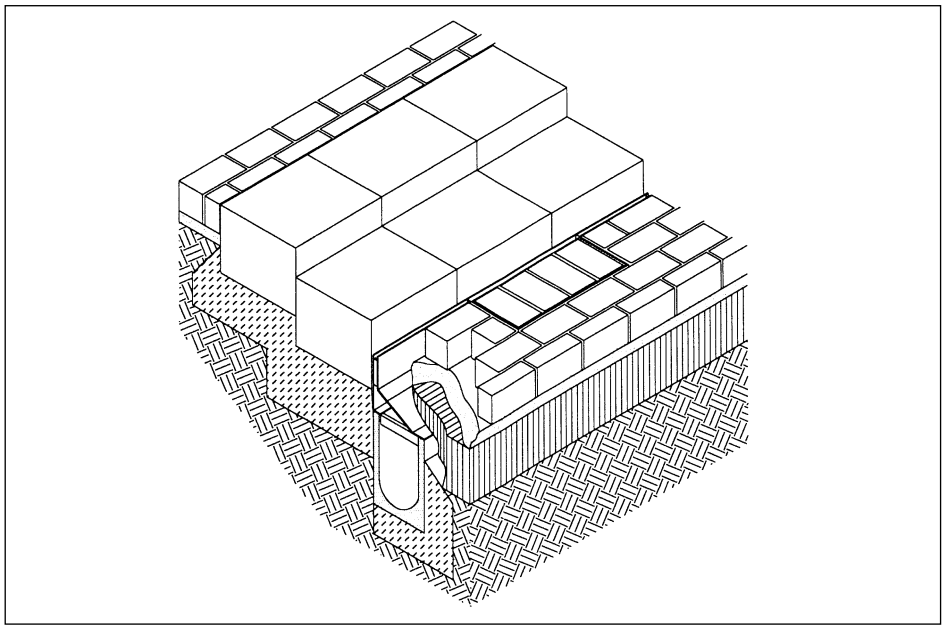

View of installation situation SR 150 S laterally flush




Slotted channel system SR 100 S laterally flush as façade drainage

Line drainage

ACO DRAIN® G 100 K
die Rinne für den Garten- und Lanschaftsbau

Clear opening 15.0 cm, slot width 1.5 cm
Load classes A 15, B 125, C 250, D 400, following DIN EN 1433

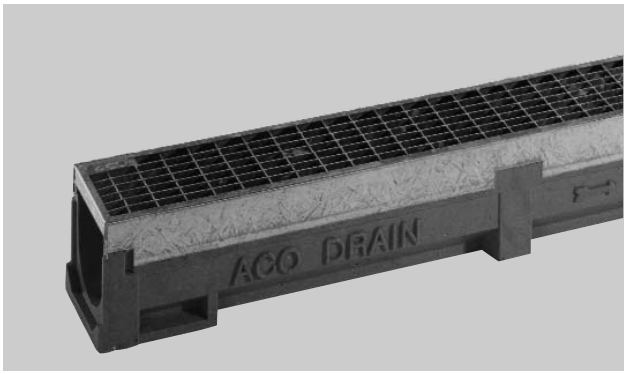


Die praktische Systemlösung: ACO DRAIN® G 100 K mit Quicklock®

			Gefällearten			Anschluss an Grundleitung		
Typ	Baulänge cm	Eck-, T-, Kreuzverbindung	Wasserspiegelgefälle	Stufengefälle	Sohlengefälle 0,5%	Stirnwand mit Stutzen DN 100	Vorformung für senkrechten Ablauf DN 100	Anschluss an Einlaufkasten
0.0	100,0		■	■		■	■	■
0.1	50,0	■	■	■		■	■	■
1	100,0				■			
2	100,0				■			
3	100,0				■			
4	100,0				■			
5	100,0				■	■	■	■
5.0	100,0		■	■		■	■	■
5.1	50,0	■	■	■		■	■	■

Rinnenkörper G 100 K für Wasserspiegelgefälle, Stufengefälle und Sohlengefälle

Was immer Sie planen – ACO DRAIN® bietet die passende Lösung.
Das G 100 K System mit der praktischen Quicklock®-Arretierung ist ein bewährtes Produktpaket, mit dem schnell ökonomische Entwässerungsanlagen geschaffen werden. Hohe Verarbeitungsqualität und funktionelle Verriegelungstechnik zeichnen dieses Rinnensystem aus, auf das Sie sich in jeder Situation verlassen können. Auch unter schwierigen Geländebedingungen gestatten die aufeinander abgestimmten Elemente praktische und vor allem dauerhafte Linienentwässerungen – in Formen und Größen, die leistungsgerecht optimiert, perfekt und ohne Verschnitt zu montieren sind.

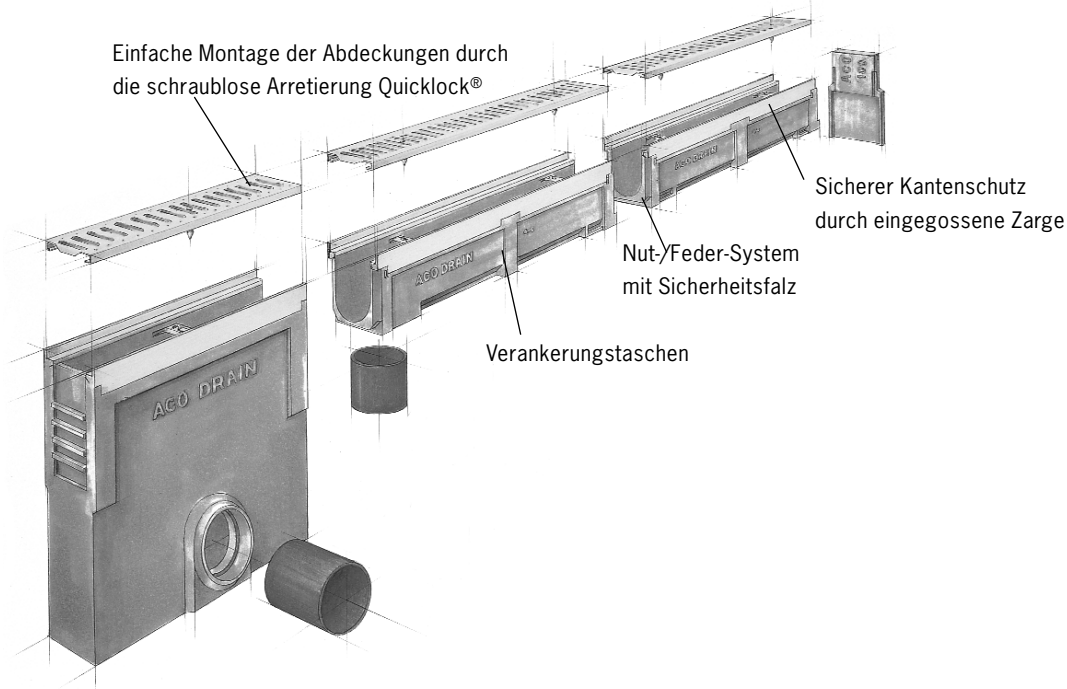


Linienentwässerungssystem G 100 K mit Quicklock® Kantenschutz aus Stahl verzinkt

Lichte Weite 10,0 cm
Belastungsklassen A 15, B 125 gemäß EN 1433


Rinnenkörper G 100 K mit Quicklock® aus Polymerbeton mit integriertem Kantenschutz, Stahl verzinkt mit ACO DRAIN Sicherheitsfalz (SF) für flüssigkeitsdichte Verlegung

Typ	Baulänge cm	Baubreite cm	Bauhöhe Anfang cm	Bauhöhe Ende cm	kg/ Stk.	Stk./ Pal.	EDV-Best.-Nr.	**Euro/ Stk.**
0.0*	100,0	13,0	15,0	15,0	13,8	24	10710	
0.1*	50,0	13,0	15,0	15,0	9,0	12	10701	
1	100,0	13,0	15,0	15,5	14,0	12	10671	
2	100,0	13,0	15,5	16,0	14,3	12	10672	
3	100,0	13,0	16,0	16,5	14,7	12	10673	
4	100,0	13,0	16,5	17,0	15,1	12	10674	
5*	100,0	13,0	17,0	17,5	15,4	12	10675	
5.0*	100,0	13,0	17,5	17,5	15,6	24	10750	
5.1*	50,0	13,0	17,5	17,5	9,2	12	10751	

* mit ausschlagbarer Vorformung für senkrechten Anschluss DN 100, nicht flüssigkeitsdicht anschließbar.

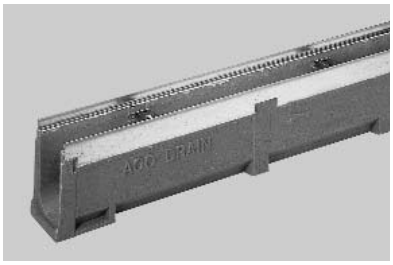

Rinnenkörper G 100 K aus Polymerbeton mit integriertem Kantenschutz, Stahl verzinkt

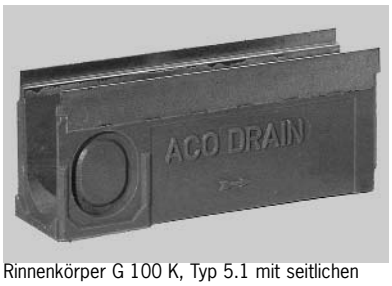

Rinnenkörper G 100 K, Typ 5.1 mit seitlichen Vorformungen für Eck-, T- und Kreuzverbindungen

Einlaufkasten G 100 K Kurzform mit Quicklock® aus Polymerbeton mit integriertem Kantenschutz, Stahl verzinkt mit Schlammeimer, mit intgrierter Dichtung DN 100


EK	50,0	40,0	24,3	10	10720

Kombistirnwand aus Polymerbeton mit Kante Stahl verzinkt für Rinnenanfang und -ende

mit Kant verzinkt Typ 0 - 5.0	1,4	20	06340	

Stirnwand für Rinnenende aus Polymerbeton mit Stutzen PVC, DN 100, mit Kante Stahl verzinkt


für Bauhöhe 0.	0,7	6	06241	
für Bauhöhe 5.	0,6	6	06242	

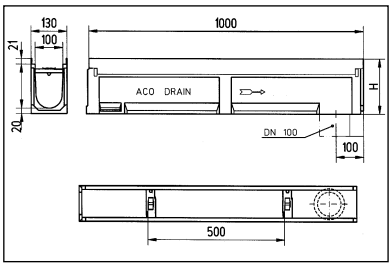

Vermaßung des Rinnenkörpers G 100 K

Abdeckroste für das Linienentwässerungssystem G 100 K mit schraubloser Arretierung System Quicklock®

	Baulänge cm	Baubreite cm	Einlaufquerschnitt cm^2/m	kg/ Stk.	Stk./ Pal.	EDV-Best.-Nr.	**Netto Euro/ Stk.**
Belastungsklasse A 15							
Stegrost SW 10 mm,	100	12,3	245	2,2	200	31530	
Stahl verzinkt	50	12,3	246	1,0	100	31531	
Belastungsklasse B 125							
Maschenrost MW 30 x 14,	100	12,3	862	2,8	200	02807	
Stahl verzinkt	50	12,3	862	1,5	100	02808	



Stegrost verzinkt, Klasse A 15, EDV-Best.-Nr. 31530



Maschenrost verzinkt, Klasse B 125, EDV-Best.-Nr. 02807

Die Preise verstehen sich netto/netto in Verbindung mit dem ACO Drain Passavant Programmangebot und setzen die Abnahme kompletter Paletten/VPE voraus.