
CLIENT													
WEIGHT ESTIMATION SHEET													
CLIENT			Chem tech								DATE	15-01-2025	
PROJECT			Motorised Single Leaf Sliding Gate (One side opening)								LOCATION	chakan pune	
FINISH SIZE			6m x1.5m								PREPARED BY	BHARATI	
SR	**DESC**	**DETAILS**	**MATERIAL GRADE**	**SP.GRAVITY**	**DIA**	**WIDTH**	**HEIGHT**	**THICKNESS**	**LENGTH**	**UOM**	**QUANTITY**	**WEIGHT**	**REMARK**
1	SINGLE LEAF (6M X 1.5 M)	Tube - Outer Frame	MS	7.85		100	50	3	15000	mm	1	102	169
		Vertical Inner Support - Tube	MS	7.85		40	40	2	28000	mm	1	67	Weight OF leaf
2		Post	MS	7.85		75	75	3	10200	mm	1	72	
3	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				15	M	1	40	
		If ISMB 100 x 50 x 5 in our scope	MS	7.85					15	M	1	159	
		Rack & pinion							14	M	1		
4	Accessories	Bottom Side wheel Assembly (4 inch)	MS	7.85						No's	4		
		Nylon Roller with bearing								No's	12		
										Weight For Required Qty	1	440	
										Weight Including Safety Factor	1.5	659	
Mode Of Operation = Motorised													
Motor Selection = According		252.8	kg	Motor Consider = 1800 kg									
CD between 2 Tube = 100 mm													

REFERENCE IMAGE



CLIENT													
WEIGHT ESTIMATION SHEET													
CLIENT			Chem tech								DATE	15-01-2025	
PROJECT			Motorised double Leaf Sliding Gate (One side opening)								LOCATION	chakan pune	
FINISH SIZE			6m x1.5m								PREPARED BY	BHARATI	
SR	**DESC**	**DETAILS**	**MATERIAL GRADE**	**SP.GRAVITY**	**DIA**	**WIDTH**	**HEIGHT**	**THICKNESS**	**LENGTH**	**UOM**	**QUANTITY**	**WEIGHT**	**REMARK**
1	SINGLE LEAF (3M X 1.5 M)	Tube - Outer Frame	MS	7.85		100	50	3	19200	mm	1	130	217
		Vertical Inner Support - Tube	MS	7.85		40	40	2	36400	mm	1	87	Weight OF leaf
2		Post	MS	7.85		75	75	3	10200	mm	1	72	
3	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				15	M	1	40	
		If ISMB 100 x 50 x 5 in our scope	MS	7.85					15	M	1	159	
		Rack & pinion							14	M	1		
4	Accessories	Bottom Side wheel Assembly (4 inch)	MS	7.85						No's	4		
		Nylon Roller with bearing								No's	12		
										Weight For Required Qty	1	488	
										Weight Including Safety Factor	1.5	732	
Mode Of Operation = Motorised													
Motor Selection = According		325.6	kg	Motor Consider = 1800 kg									
CD between 2 Tube = 100 mm													

REFERENCE IMAGE

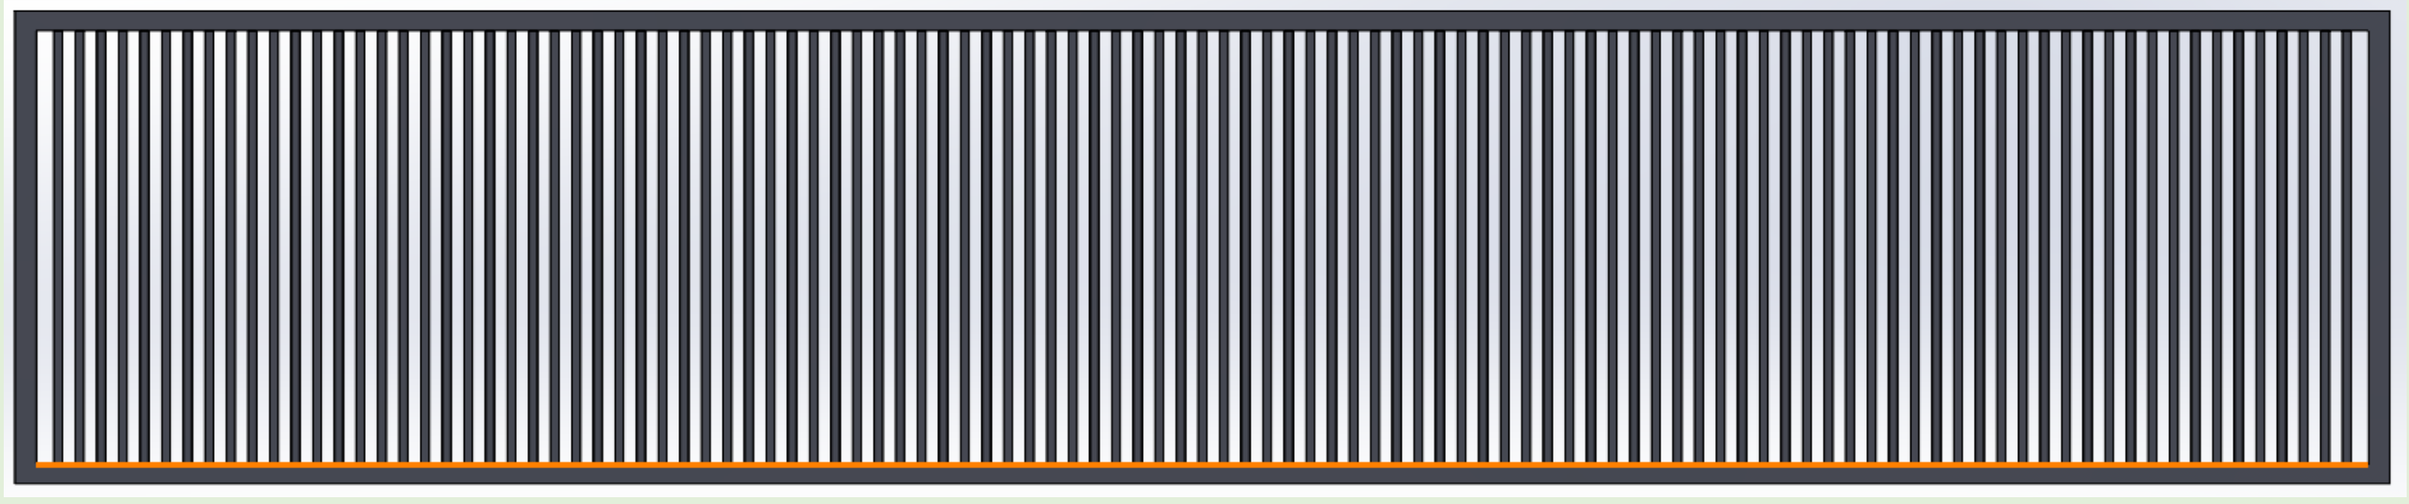