




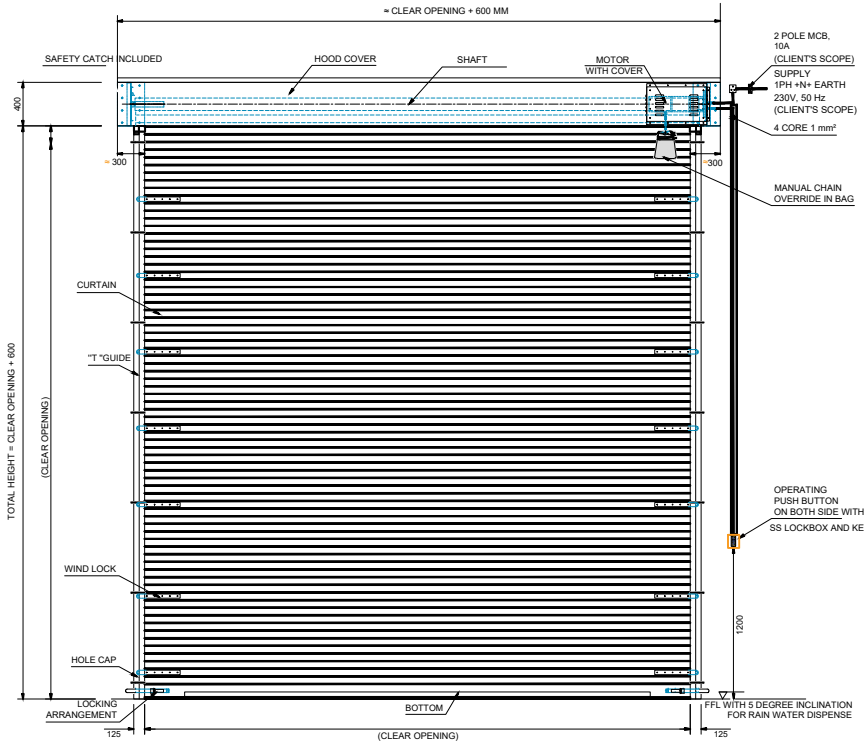

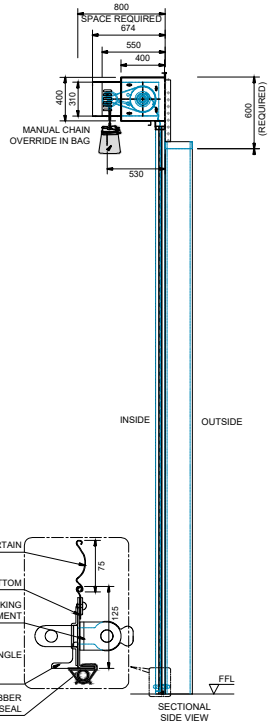



INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside / Outside
3.	Mounting Surface	Side Brackets: Optional / Structure
4.	Slat	Curved 75 mm PPGI Sheet - 1.0 mm Thk. & Windlock Consider Above 4 Metre Height
5.	Bottom Profile	MS Plate 125 x 2.5 mm thick with Angle Stiffner
6.	Guide Profile	M.S." T " Shape profile 125 x 3.15 mm Thk. For Shutter Above 4 Metre Height M.S." U " Shape profile 100 x 2 mm Thk. For Shutter Below 4 Metre Height
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Accessories	Safety Catch,Push Button On Both SIde

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	6000	8000	01
02	6000	6000	02
03	4500	4500	07
04	3000	3500	06
05	4500	4200	01

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :-
MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	J.S.	19/01/2024
CHECK	A.K.	19/01/2024
APPROVAL	V.T.	19/01/2024

CLIENT - RINAC
PROJECT -ROLLING SHUTTER
DWG. NO. :
REV-01
SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm
If any queries contact : design@nihva.com