


TOP VIEW
(SECTION 'X-X')

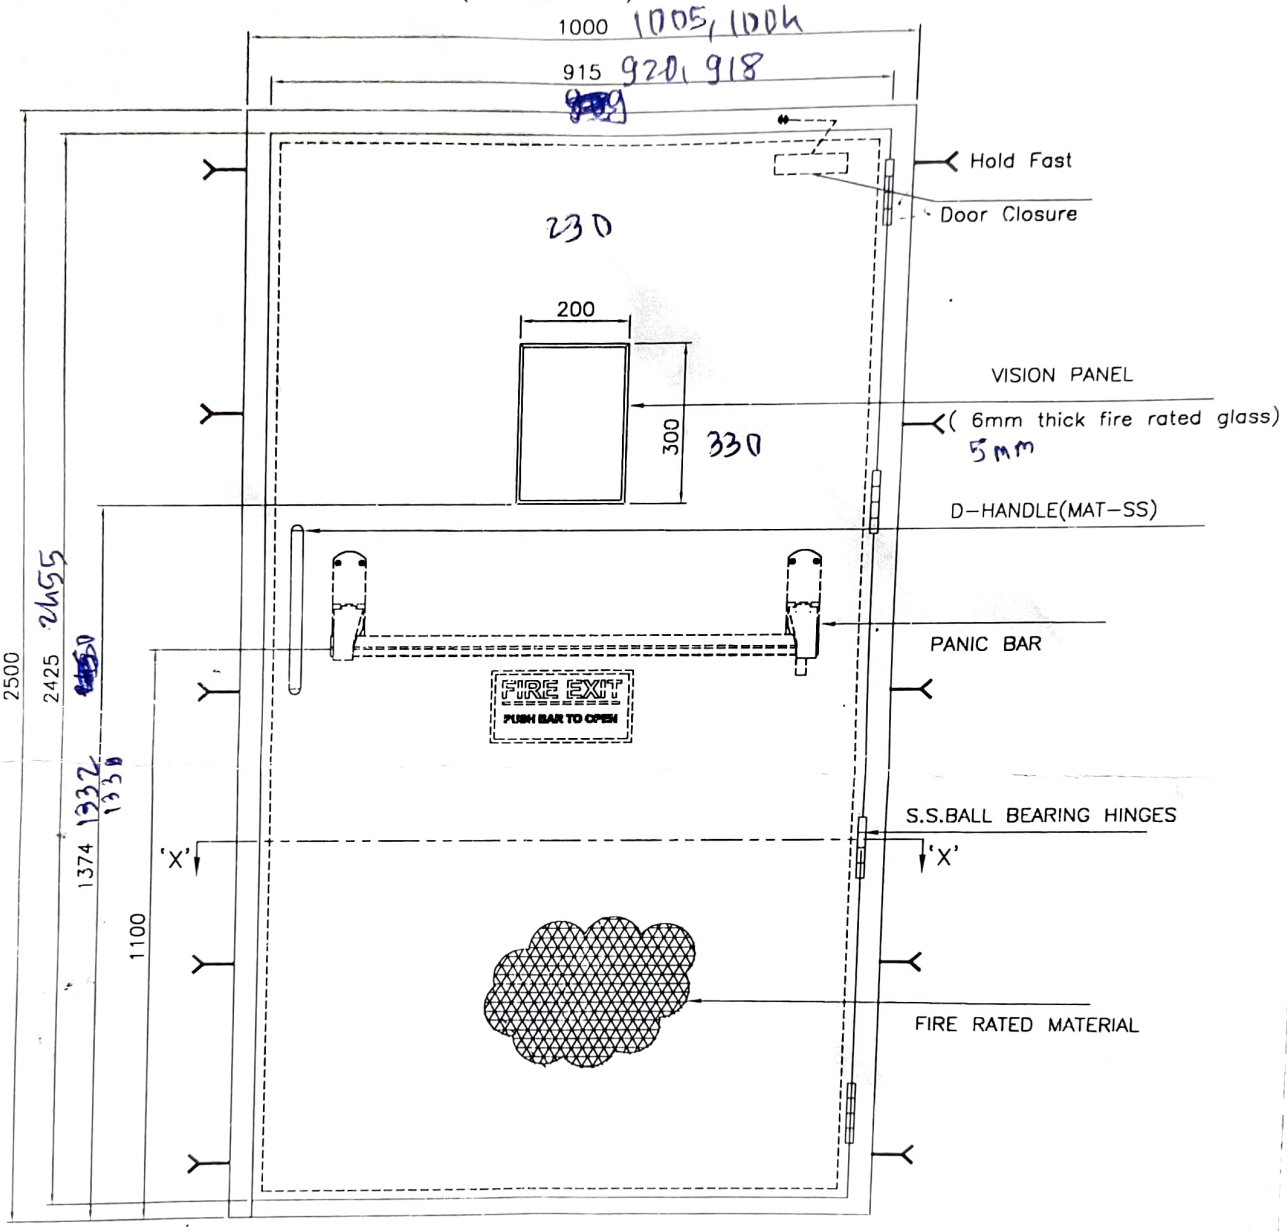

FRONT VIEW

TECHNICAL SPECIFICATION :

Sr. No	Specification	2 Hrs Fire Rated Single Leaf Door
1	Door Type	Fire Resistant Door Single / Double Leaf Hinge Type (2 Hours Fire Rated) 1.20 mm thick G.I. Sheet cladded 46mm thick shutter with infill Material Honeycomb complete with G.I. frame (Single Ribet - 100 x 57mm) made from 1.60mm thick G.I. Sheet & Fixing arrangements. Paint Finish
2	Frame & Shutter Material	GI
3	Fastner	Anchor Fastner CSK Type with GI Plating Size : 8 mm x 80 mm with PVC Sleve
4	Door Closure	Heavy Duty Door Closer
5	Vision Panel	Vision Panel (200 x 300mm) 6 m thick fire rated glass - (Fire Door)
6	Accessories	Panic Exit Device for Single Leaf Door, External Trim Bar (Panic Latch)

SIZE:-

WIDTH	HEIGHT	QTY
1000	2500	2No's.

NOTE:- ALL DIMENSIONS ARE IN mm

This drawing & design is the property of NIHVA TECHNOLOGIES Not to be used or copied to any other concern

TITLE :- FIRE DOOR

	NAME	DATE	SIGN
DRAWN	GS	17.01.2024	
CHECK	AK	17.01.2024	
APPRD	VT	17.01.2024	

ALL DIMENSION ARE IN mm

NIHVA
NIHVA TECHNOLOGIES PVT LTD

NIHVA TECHNOLOGIES PVT LTD
Tel : 020 66304039
Email- info@nihva.com
Website - www.nihva.com

CLIENT :- TATA MOTORS
LOCATION :- PUNE
PRODUCT :- FIRE DOOR
DWG NO :- NIHVA/23-24/CLT/103
REV :- 00
SCALE :- NTS
SHEET 1 OF 01

① Hinges not equally distance
② Panic bar
③ D - ~~Torch~~ Handle
④ glass - 198 x 296 x 5 mm
⑤ door closer

} loose material

⑥ Hole fast only fournos instead of 5 nos

Hinges distance

