

SHUTTER TYPE	2HRS FIRE RATED SHUTTER
SHUTTER SLATS	1.0 mm GALVALUME STEEL SOLID SLATS
FINISHING OF SLATS	POWER COAT STANDARD RAL COLOUR
GUIDE RAIL	GALVANIZED ,3mm THICK
FINISHING OF GUIDE	POWDER COAT STANDARD RAL COLOUR
BOTTOM BAR	T-120
FINISHING OF B/BAR	POWDER COAT STANDARD RAL COLOUR
BOX DESIGN	MILD STEEL SECTION FRAME DESIGN
FINISHING OF BOX	POWDER COAT STANDARD RAL COLOUR
BOX COVER PLATE	0.8mm GALVANISED STEEL SHEET
FINISHING OF COVER	POWDER COAT STANDARD RAL COLOUR
OPERATION	MOTORIZE WITH MANUAL OVERRIDE CHAIN
MOTOR POWER SOURCE	230 VOLTS,1 PHASE,50HZ
FIRE MODE	THERMAL FUSIBLE LINK WILL AUTO CLOSE BY GRAVITY FORCE
	WHEN ROOM TEMP RISES UP TO 68°C
	FIRE SIGNAL FROM FIRE CONTROL ROOM AND SHUTTER
	SHALL CLOSE DOWN BY GRAVITY FORCE WITHOUT DELAY


LOCATION	SHUTTER NO.	CLEAR WIDTH (STRUCTURE)	CLEAR WIDTH (STRUCTURE)	QUANTITY	MOTOR POSITION
	FRS	1700 mm	3000 mm	1	RH

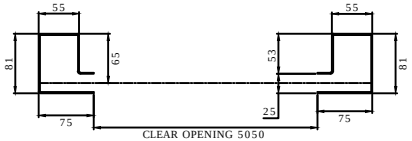


GALVANISED STEEL GUIDE RAIL
THICKNESS 3mm




SHUTTER SLAT




FIRE RATED BOTTOM BAR

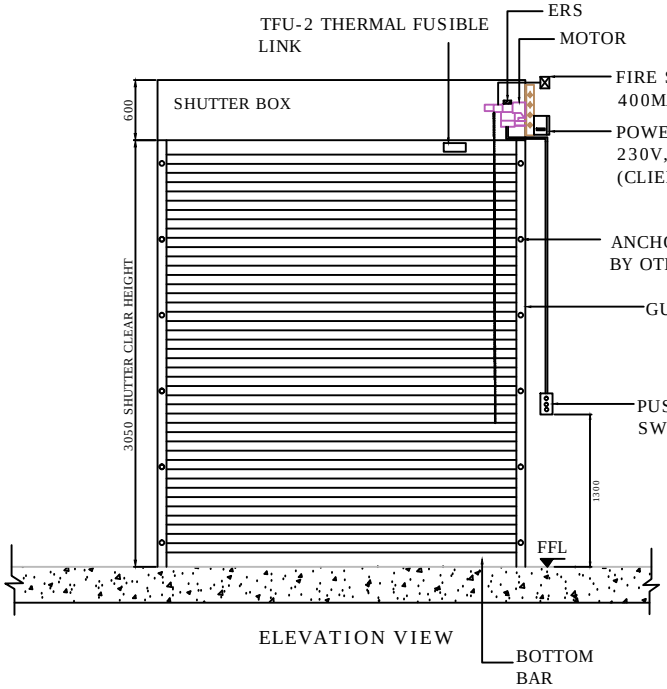


ELEVATION VIEW

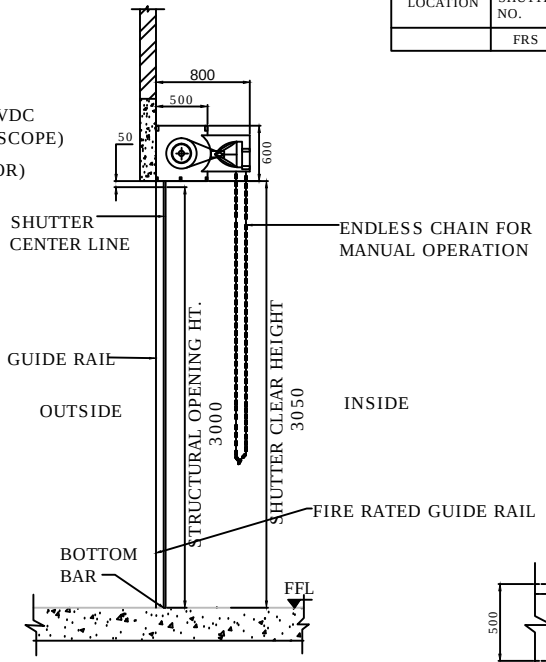

SIDE VIEW

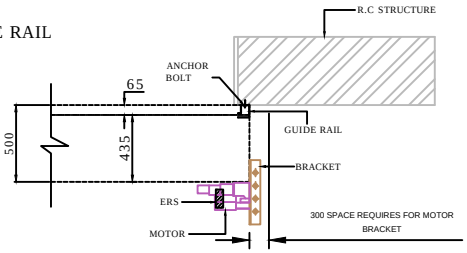

GUIDE & MOTOR ASSEMBLY DETAILS

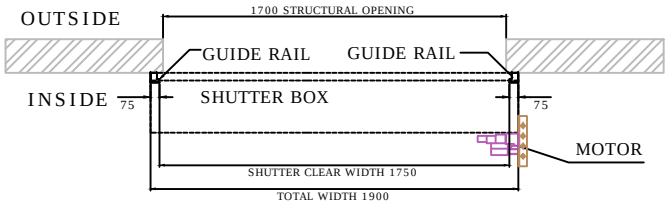

PLAN VIEW

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
1700	3000	01 NOS