
Technical Specifications For 300 mm - Red Traffic Light



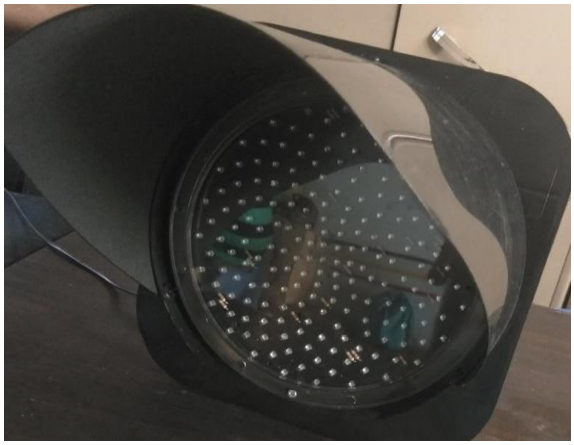

No.	Item	Specifications	Compliances
1	Brand		Nucleonics traffic equipments
2	Model		NTE10054
3	Technology	LED based 5mm oval type	yes
4	Dimension	280mm x 560mm x 350mm	350mm*350mm*360mm
5	Led retrofit dia.	200mm (±10%) full round	300mm
6	Material and finishes	Polycarbonate black color powder coated with Sun visor	yes Polycarbonate housing with HDPE visor (one side glossy and one side matt finish)
7	Aspect diameter	200mm	300 mm dia
8	PCB	Green masking Pads- Tin plated Conformal coating for moisture protection	yes
9	Type of signal	Ball type	Yes

10	Luminance	200cd	Yes
11	Chain failure	No chain failure of LED's. Failed LED will not work	Failed LED with 9 LED's in series will not work
12	Wavelength	Red - 625nm	Yes
13	Aspect Color	Red and Pure Green	yes
14	Interface	230VAC switching from potential free devices	yes
15	Visibility	>20mtrs	200-500 mtrs
16	Viewing Angle	< 23 degrees	23 degree
17	Cables	Power Cable	yes
18	LED Type	5mm Super Bright Day visible-clear	yes
19	LED intensity	Lense 12000 - 14000 mcd at 20 mA, 30˚ viewing angle for Red 21000 - 24000 mcd at 20 mA, 30˚ viewing angle for GREEN	15000 to 20000mcd at 20ma 23 degree standard viewing angle 21000 to 24000mcd at 20ma 23 degree standard viewing angle
20	Weight	<6 Kg	3 Kg
21	Operating Voltage	220-270VAc /50-60 Hz	yes
22	Power Consumption	10W max	8 watts
23	Installation	Bolting Arrangement to the Traffic Pole	yes clamps and brackets with hose clip to the traffic pole
24	Environment Conditions	Operating Temp : -10˚C to 60˚C Humidity : 0 to 90%	Yes Yes
25	Reliability	MBTF: 50,000 hours MTTR: 0.20 hrs	Yes Yes
26	Access For maintenance	Front Door Access for Easy Maintenance	yes
27	Protection	IP65	yes
28	Operating Temperature	5 ºC to 65 ºC	yes
29	Auto Diming	Night Dimming facility available (optionally)	No