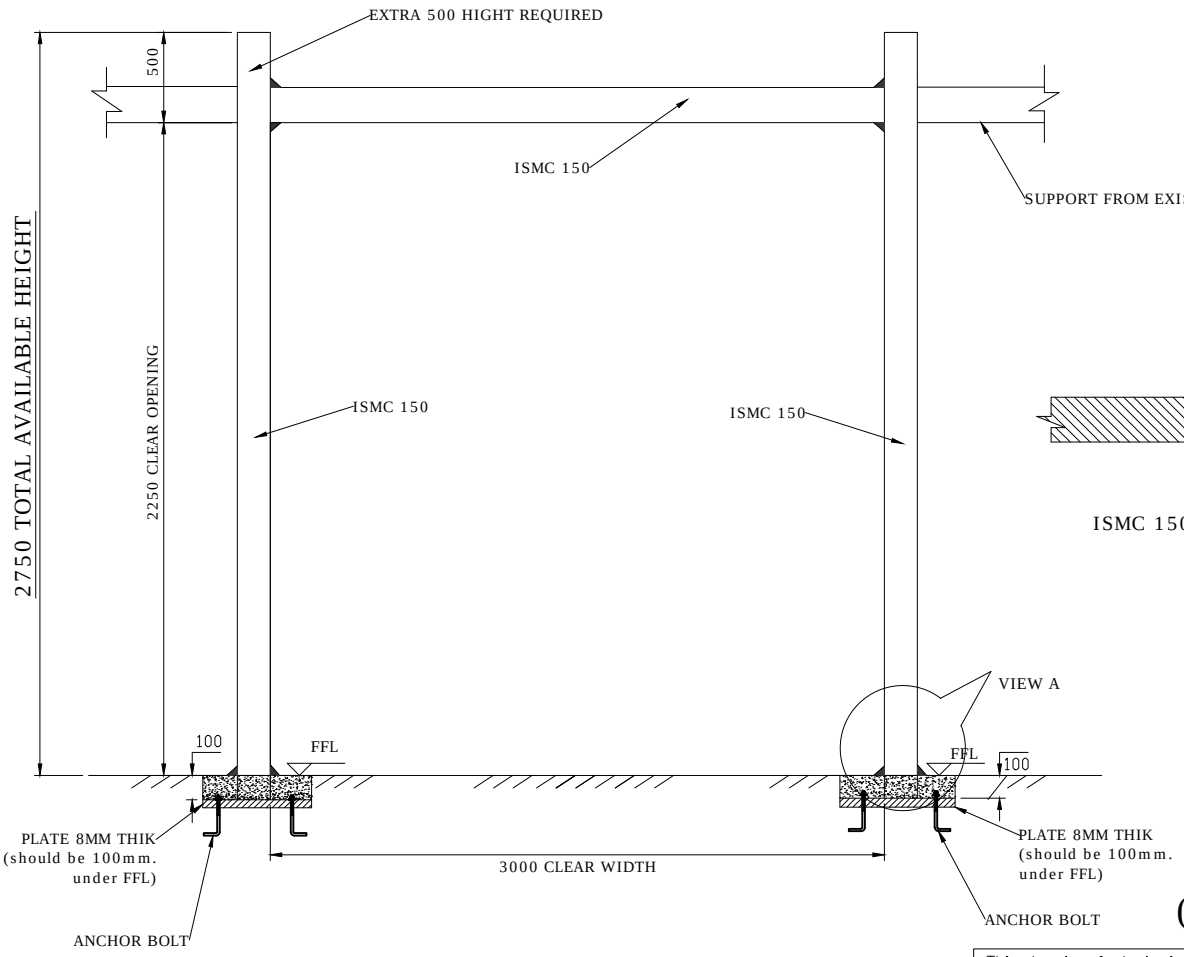
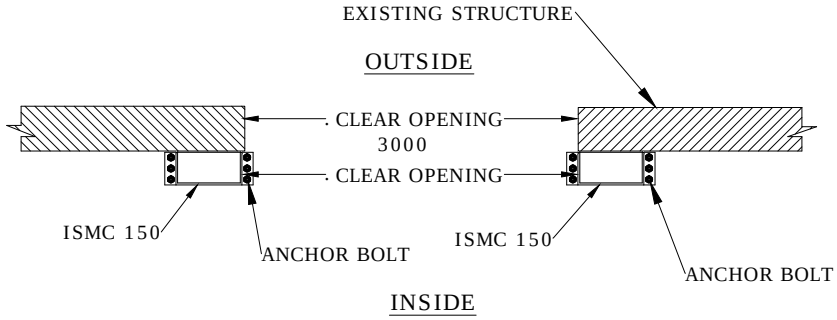



DETAIL VIEW A

(CLEAR OPENING (W)3000X(H)2250)

structure should be bear approx. 800 k.g. weight. (wind pressure included). While Door is in operation, structure should not be vibrate and bear/sustain all movements of High Speed Doors.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR HIGH SPEED DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

| | SIGN | DATE |
|---|---|---|
| DRAWN | ABHIJIT | 25/08/15 |
| CHECK | ANIL | 25/08/15 |
| ENG | | |
| APPRD. | | |
| MFG | | |
| Ref. No. | | |

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -GEICO PAINT SHOP INDIA PVT.LTD.

PROJECT--

SITE - PUNE

DWG. NO. - NIHVA/15-16/070

SCALE: 01 | WT: | SHEET: 01

If any queries contact : projects@nihva.com