
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

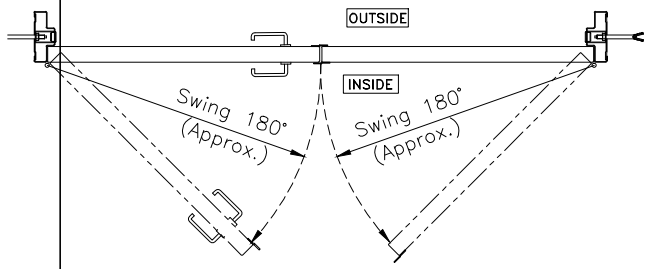


SPECIFICATIONS :–


H – Overall Height of Door Frame.
W – Overall Width of Door Frame.
h – Clear Height opening (H–132 mm approx).
C – Clear Width opening (W–200 mm).
T – Nominal Shutter Thickness = (60mm approx).
D – Depth of Door Frame (142mm approx).
– Dimension Active shutter side.
– Dimension Inactive shutter side.

NOTES :–


1) Door Frame shall be fabricated from 2Thk. CRCA steel sheets to form a stepped profile & fixed to wall with Holdfasts.
2) Shutter Panels shall be fabricated from 1.25Thk. Galv. steel having lock seam joints to provide a nominal thickness of 60mm. Shutter flatness may vary till 8mm depending upon the door size & shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. 4" Ball Bearing Hinges shall be provided on each shutter.
4) Accessories to be provided on Door are as follows :–
   a) 300mm Aldrop – 1no.
   b) 200mm D Handle Pair – 1no.
   c) 300mm towerbolt inactive leaf– 1nos.
   d) Door closer – 2no.

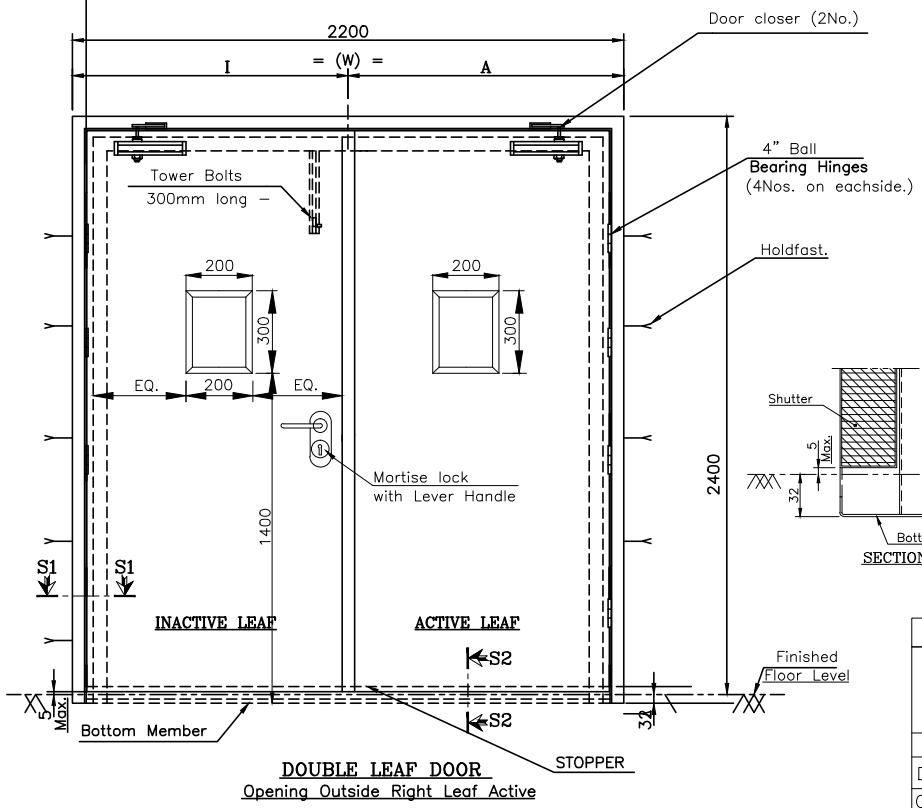

DOUBLE LEAF DOOR
Opening Outside Right Leaf Active

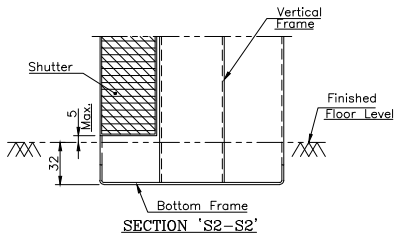

SECTION 'S2–S2'

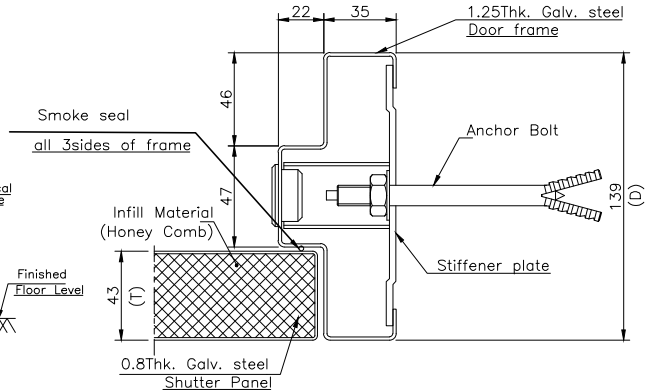

SECTION 'S1–S1'

COLOUR: BLUE

QUANTITY:–1Nos.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: FIRE RATED DOOR			NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	ABHIJIT	16/10/15	CLIENT – SWAROVSKI
CHECK	ANIL	16/10/15	PROJECT – SWAROVSKI
REV.	02		SITE – RANJANGAON MIDC
CLIENT APPROVAL			DWG. NO. – NIHVA/15–16/103
			SCALE: 01 / Ref. No. / SHEET: 01
ALL DIMENSION ARE IN mm			If any queries contact : projects@nihva.com

NIHVA TECHNOLOGY PVT. LTD. PUNE.
Tel : 020 66304031
Email:– info@nihva.com
Website:– www.nihva.com

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT