
Befestigungsplan
Schnelllauf-Rolltor RapidRoll 600

ALBANY
ASSA ABLOY


Fixingplan
High speed roll door RapidRoll 600

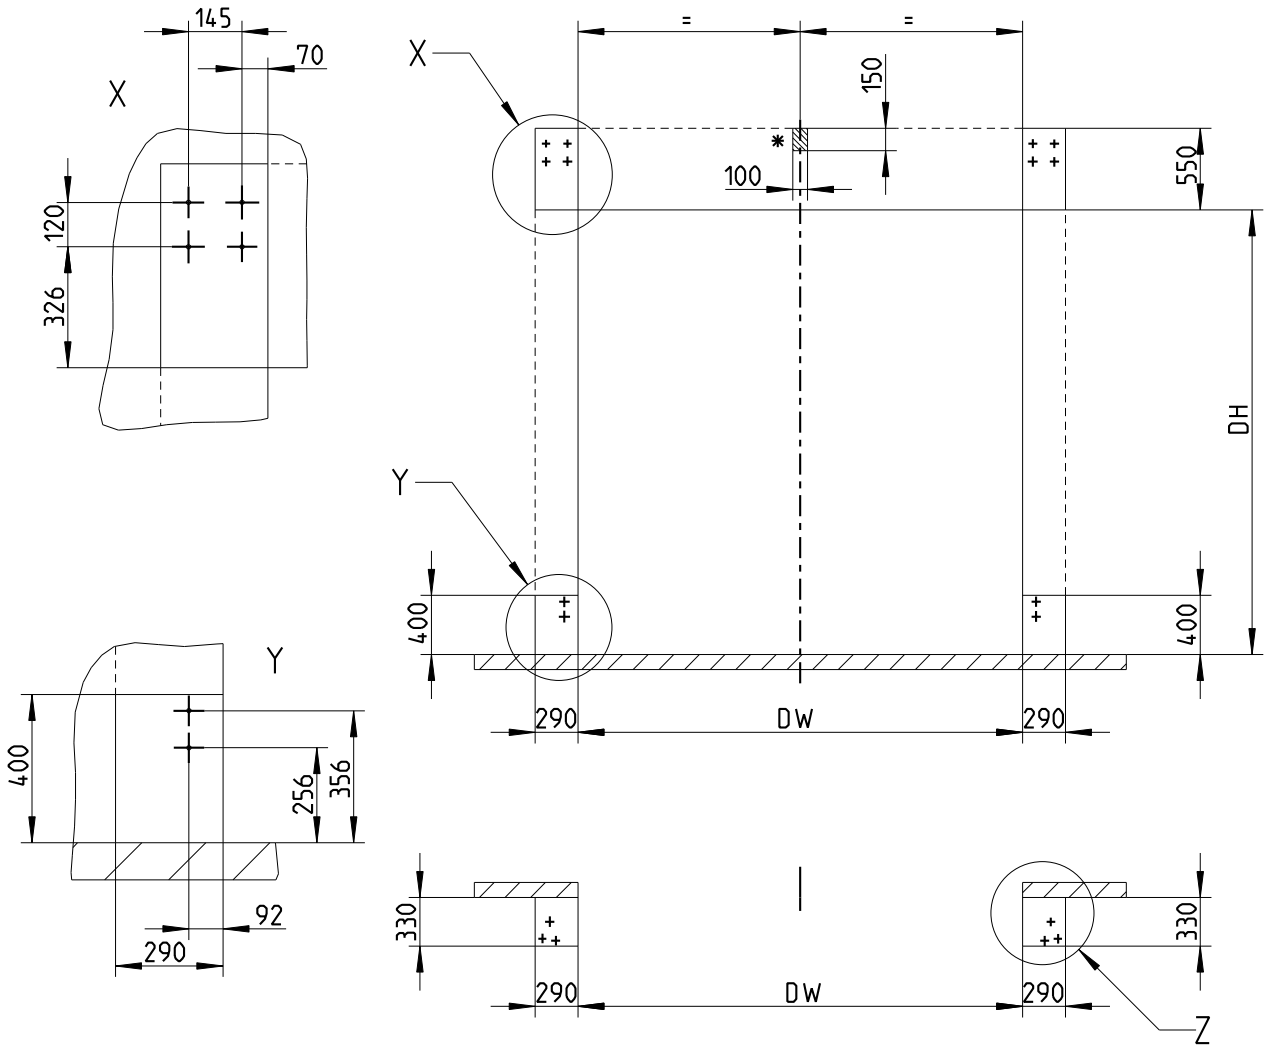

* Mittenabstützung bei Toren mit Breite > 3500mm
* Support middle at doors with width > 3500mm

Der Einbauort ist hinsichtlich der benötigten Befestigungspunkte und Aufstellbedingungen zu inspizieren. Gegebenenfalls ist eine Unterkonstruktion oder andere geeignete Befestigungsmöglichkeiten zu erstellen. Die Kopfplatten sollten an eine Stahl-Unterkonstruktion oder an einem Betonelement verschraubt werden.
Achtung! Isopaneel-Wände, Gittersteine und Leichtbauwände sind auf Eignung für die Montage zu prüfen.

Inspect the install location relative to the required anchoring points and set-up conditions. It may be necessary to prepare a support construction or other suitable anchoring possibilities. The head plates should be bolted to a steel support construction or to a concrete element.
Attention! Check isolated panel walls, rider brick, and lightweight construction walls to ensure that they are suitable for the installation.

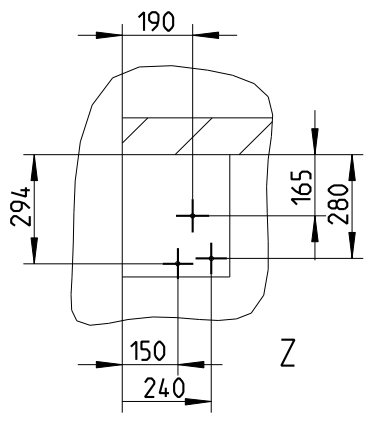

Untere senkrechte Befestigungsbereiche werden nur benötigt, wenn das Tor nicht direkt auf dem Boden befestigt werden kann.
Fixing points in the lower vertical area are only needed, if the door can not be fixed on the floor.

8300R0024/0
Stand: 08-02-08