

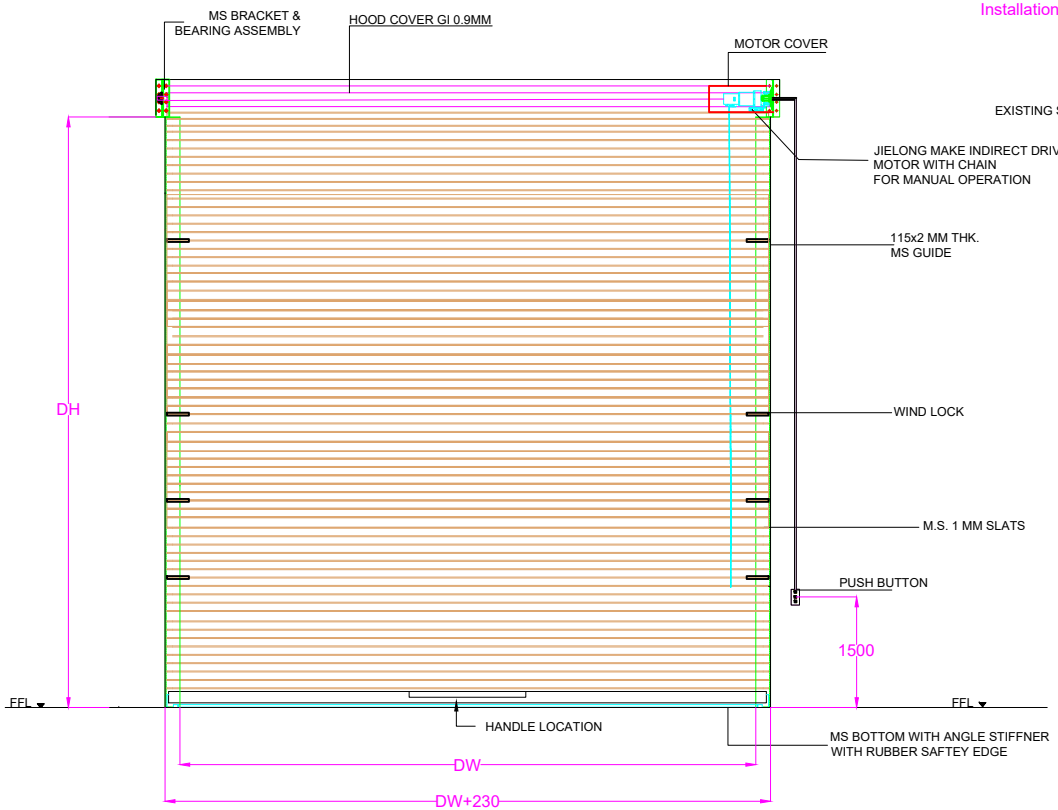


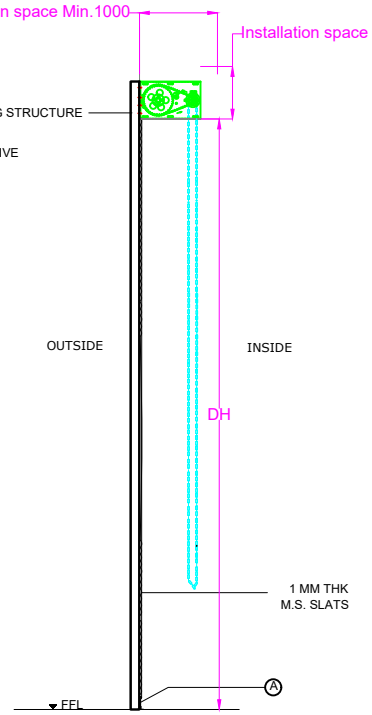


SIDE VIEW

Curve Type MS Shutter SLATS



DETAILS A

TECHNICAL SPECIFICATIONS		
SHUTTER SIZE - DW 5000 x DH 6000 - 3 NOS		
SR NO	DESCRIPTION	SPECIFICATION
1.	SOLID SLAT & QTY	1 mm THK M.S. SLAT
2.	M.S.GUIDE TYPE & SIZE	T GUIDE OF 115x95x2 THK
3.	MOTOR & HOOD COVER 0.9 mm GI	1/SHUTTER + 1/SHUTTER
4.	BOTTOM	STURDY ALLUMINIUM BOTTOM PROFILE WITH ANGLE STIFFNER WITH RUBBER SAFTEY EDGE
5.	WIND LOCK	CONSIDERED
6.	SAFETY BREAK	NOT CONSIDERED
7.	CABLE WITH CONDUIT	CONSIDERED
8.	CHAIN	UPTO MAN HEIGHT/SHUTTER
9.	MOTOR LOCATION	RH SIDE
10.	SHUTTER MTG LOCATION	INSIDE
11.	SHUTTER MOUNTING BASE	M.S. STRUCTURE (IN CLIENT SCOPE)
12.	APPROVED RAL SHADE	AS CLIENT APPROVED RAL 1015 (IVORY)

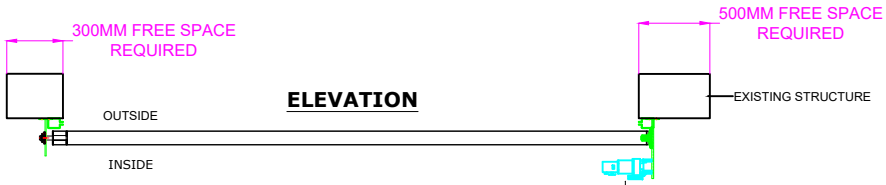


ELEVATION

PLAN

NOTE:-

1. ALL CIVIL WORK WILL BE IN CLIENT SCOPE.
2. SURFACE FINISH: POWDER COATING OF APPROVED RAL 1015 (IVORY) CODE
3. MOUNTING: MS STRUCTURE & INSIDE
4. THERE WILL BE JOINT IN MS GUIDE NOT IN SINGLE PIECE.
5. IF MS STRUCTURE REQUIRED FOR ROLLING SHUTTER MOUNTING WILL BE IN CLIENT SCOPE.
6. SAFETY CATCH IS NOT CONSIDER FOR ABOVE ROLLING SHUTTER
7. WIND LOCK QTY MAY VARY AS PER SHUTTER HEIGHT
8. JIELONG MAKE MOTOR - CAPACITY 1000 KG
9. 1000 KG MOTOR SPEED 4.1 RPM

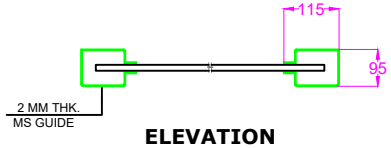

ELEVATION

TOLERANCE - ±10mm

DW	DH	QTY
5000MM	6000MM	3nos

Rev.No	Revision	Date	Revised By
2	QUANTITY CHANGED FROM 8 NOS TO 3 NOS	17.07.2023	Nirmala
1	Required Motor capacity and RPM added in note	29.06.2023	Nirmala

This drawing & design1ing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

NIHVA TECHNOLOGIES PVT. LTD.

M.S. MOTORIZED SINGLE SKIN ROLLING SHUTTER (INDIRECT DRIVE)

	NAME	DATE
DRAWN	NIRMALA	21/06/2023
CHECK	A.K.	21/06/2023
APPRD	V.T.	21/06/2023

CLIENT - RBCC

PROJECT - ROLLING SHUTTER

SITE - PUNE

DWG. NO. -NIHVA/23-24/CLT/033 | REV.02

SCALE: 01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com