

General drawing Albany RR300 Retail

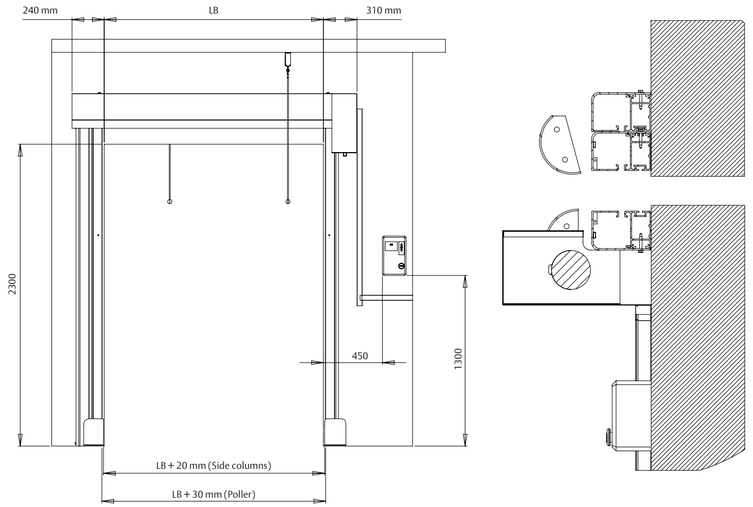

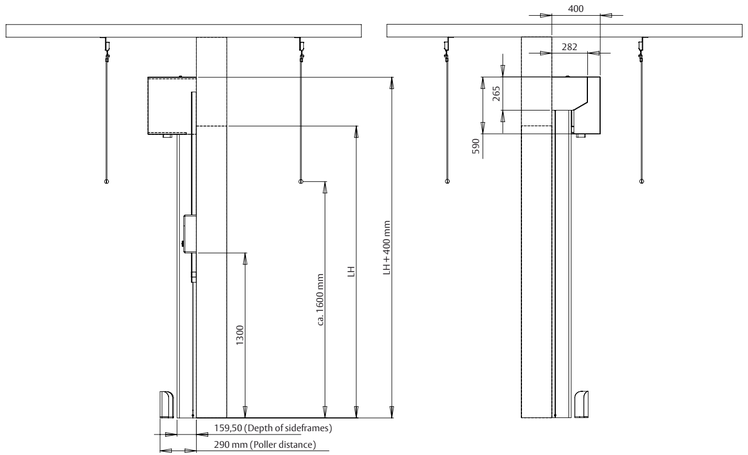

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Megadoor and Albany, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

assaabloyentrance.com

ASSA ABLOY Entrance Systems

info.aaes@assaabloy.com
assaabloyentrance.com

Follow us:

Please enter *ASSA ABLOY Entrance* in the channel's search field.

© ASSA ABLOY Entrance Systems AB PL.MAN/Albany RR300 Retail/DEU,EN+1.1/1411/64 100 147 Technical data subject to change without notice

High performance door Albany RR300 Retail

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Albany RR300 Retail

- Sight-protection between sales – and storage area
- Avoids access of unauthorized persons
- Certified for emergency exit applications
- Crash-resistent & safe



DOOR MATERIAL/CONSTRUCTION

The guide rails and the top roll are made of aluminium. The construction is self-supporting.

GUIDE RAILS

The guide rails designed in two parts (Main rail + cover rail) allow easy assembly and easy access for maintenance.

DOOR CURTAIN

By default, a coloured vinyl curtain is available, which may be supplied with clear view stripes or a window on request.

AUTOMATIC EMERGENCY OPENING

A balancing weight located in the side guide rails allows the full emergency opening in the event of a power cut.

FLOUR POLLERS

The 300 mm high flour pollers made of steel protect the guide rails effectively against damages by fork lifts.

MOTOR AND BARREL COVER

In standard all doors have a RAL coloured motor and barrel cover.

MOTOR POSITION

The doors are avaialbe with motorside left or right.

FREQUENCY CONVERTER DOOR CONTROL

The comfortable frequency converter door control Albany MCS-FC with integrated control unit combines high flexibility, quick setup and easy usability.

BREAK AWAY SYSTEM

After a collision, the Albany RR300 Retail door curtain resets itself automatically into the guide rails during the next cycle.

SAFETY LIGHT GRID

The Albany RR300 Retail contains a light curtain integrated in the side guides as a standard safety device. This means additional higher safety and better working conditions for operating stuff.

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

High performance door Albany RR300 Retail

The Albany RR300 Retail door is adapted for applications in supermarkets and warehouses.

THE ADVANTAGES OF THE ALBANY RR300 RETAIL

- Accelerated logistics through a high opening speed
- The flour pollers and the break-away-system minimizes service costs
- A high degree of safety through the flexible door curtain and flexible bottom profile combined with the safety light barrier
- Automatic opening in the event of a power cut

TECHNICAL DETAILS

- Self-supporting door construction
- Side frames from two-piece aluminium profiles coloured
- Door curtain made from coloured vinyl fabric
- Motor and barrel cover coloured in RAL
- Based on its "automatic opening by power cut" insertable in emergency exit applications
- Door control with a frequency converter
- Integrated light grid

OPTIONS AND ACCESSORIES

- Colours for the door curtain and door at the request of the client
- Door curtain with horizontal window
- Prepared for the connection of all common impulse activators and transponder systems
- Europe-wide delivery and installation possible
- Short delivery times

TECHNICAL DATA	
Inside	✓
Outside	-
Door dimensions Max. width Max. height	 2500 mm 3000 mm
Required space Motor side	 310 mm
Bearing side (Counterweight)	220 mm
Upper side	400 mm
Motor placement Left / right	•
Wind resistance	class 0 = EN 12424
Motor and top roll cover, steel, paint coated	✓
Mechanical Construction	
Alu, 2 pieces anodised	✓
Painted side columns	✓
Door leaf	
Opaque vinyl	✓
With window	•
With windribs	•
Control / Drive	
Hollowshaft Gearmotor	✓
With open circuit brake	✓
Digital limit switch	✓
Motor power	0,37 kW
Opening/closing speed up to max.	1,5 / 0,8 m/s
Frequency converter 230 V; 50/60 Hz	✓
Dimensions door control	215 × 345 × 140 mm
Dimensions frequency converter	106 × 355 × 106 mm
Safety	
EN 13241	✓
Photocell	•
Light grid	✓
Emergency opening	
Automatic self opening on power failure with counterweight	✓