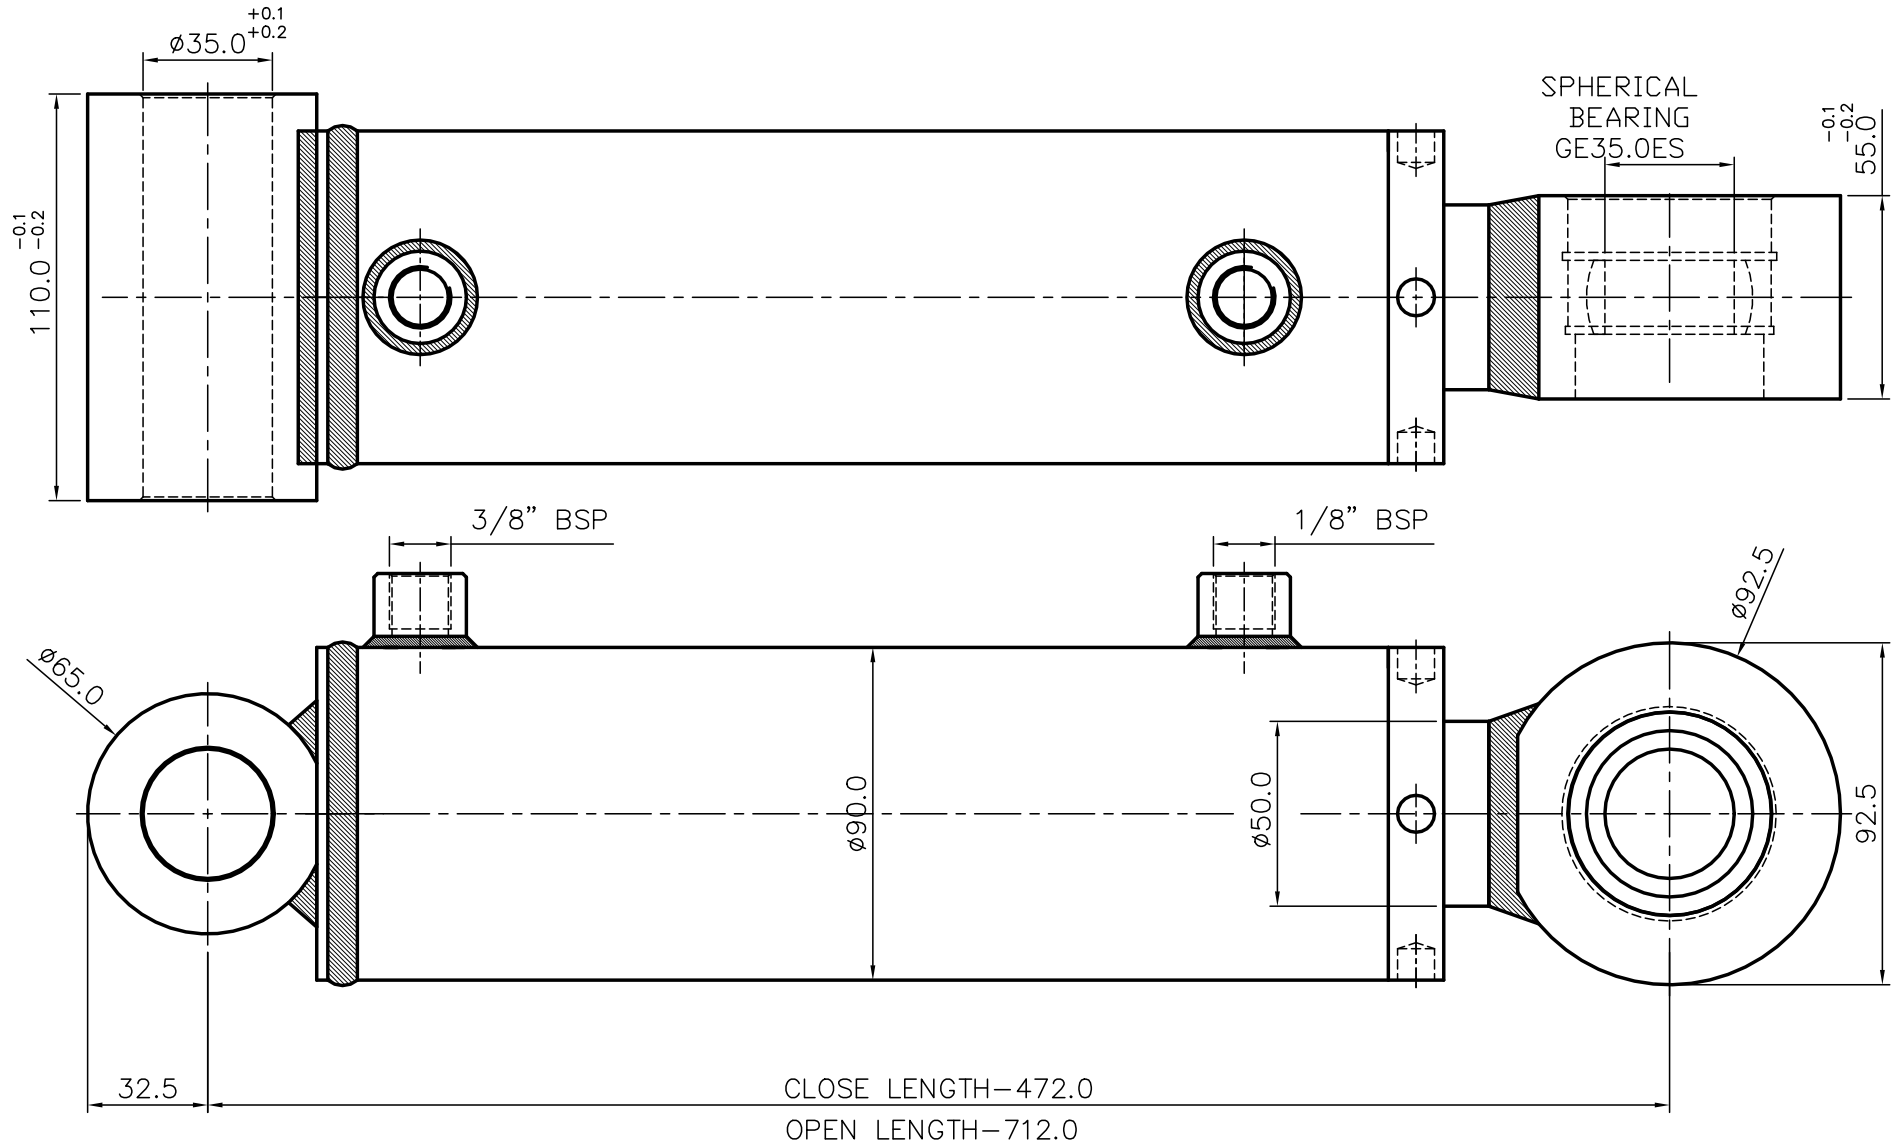


SPECIFICATIONS.–
SINGLE ACTING HYDRAULIC CYLINDER
WELDED CONSTRUCTION
BORE – ø80mm
STROKE –240mm
PISTON ROD – ø50mm
MTG – REAR EYE & ROD EYE WITH SPHERICAL BEARING
Wkg. PRESSURE - 200 bar.
TEMP.--20°C TO 80°C

CLIENT: – M/s NIHVA TECHNOLOGIES PVT. LTD.

DUTTA CONTROL
GAT NO.83,JYOTIBANAGAR,
TALWADE,TAL–HAVELI,
PUNE–412114 (INDIA)

	NAME
DGN.	
DRN.	AVINASH
CHD.	
APPD.	R.S.C.
DATE	14/12/20

ALL DIMENSIONS ARE IN mm.

SCALE–1:1

DRG. NAME
G.A.DRG. FOR ø80x240 STROKE SINGLE ACTING HYD. CYL.

DRG. NO.
11_12_001_80_240R1