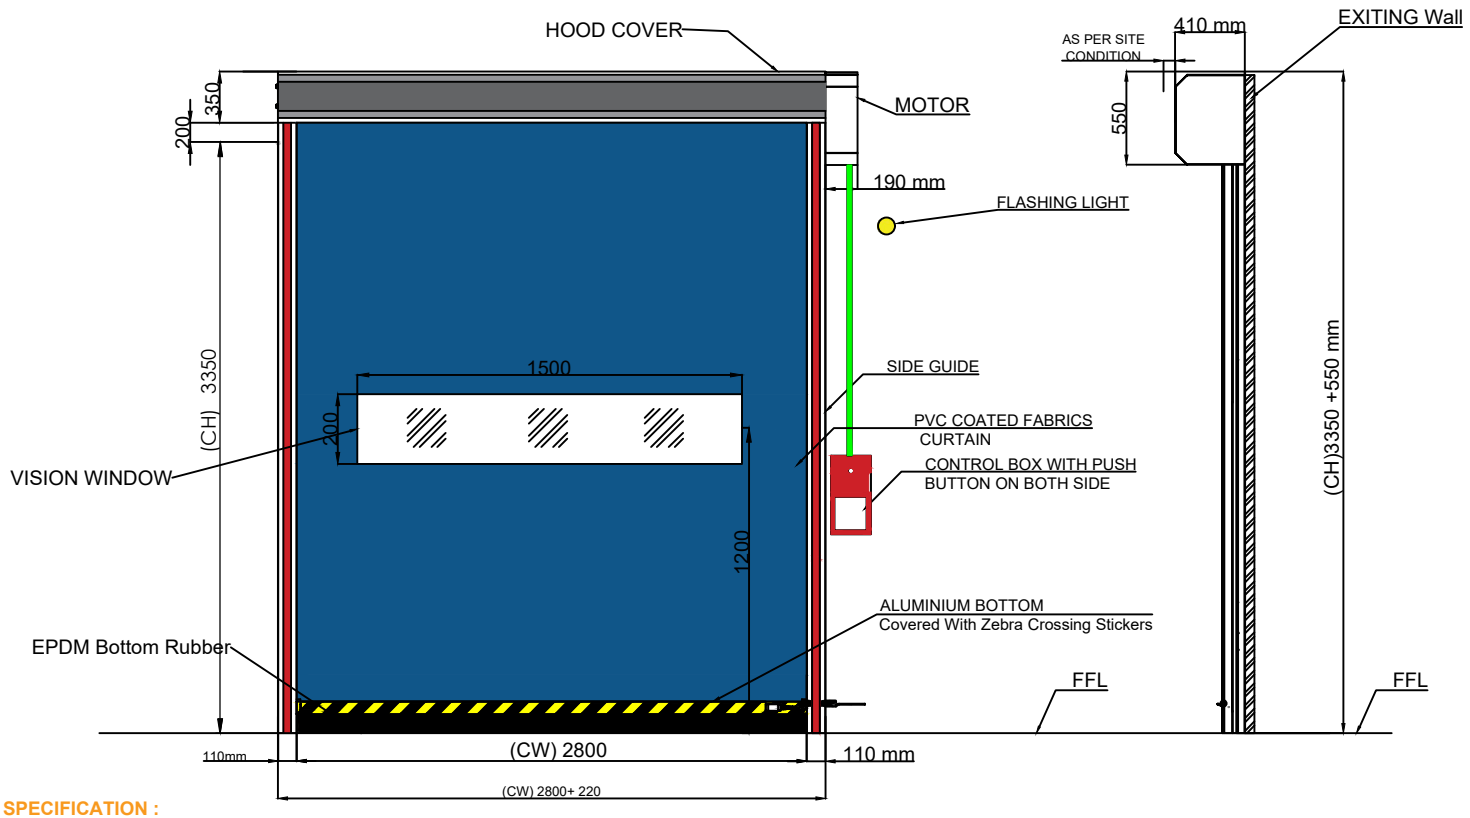


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	Control Panel	LED Display Servo Controller : - Working Temperature : -30°C to +85°C Water Resistant : IP65 Make IDER, manufactured under European Standards
2	Motor	Servo Motor Make IDER Make ,CE Certified
3	Manual Release	Hand Crank
4	Door Travel Speed	Opening: 0.5m /Sec & Closing: 0.5m/Sec
5	Safety Device	Safety Photocell Pair & Safety Edges
6	Accessories	Dual Magnetic Loop Detector ,Flashing Light
4	PVC CURTAIN	RAL 5010
5	Door Guide & Buttom	Aluminium

Note:-
1. All Dimension are in mm
2. Side guide & Bottom Off-white Colour
3. Zebra Crossing Stickers on Bottom Profile

Sr	Clear Width (CW)	Clear Height (CH)	QTY
1	2800	3350	1

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	SELF REPAIRABLE HIGH SPEED DOOR WITH GA DRAWING		
	NAME	SIGN	DATE
DRAWN	S.J		16.07.2024
CHECK	B.B		17.07.2024
APPRD.	V.T		17.07.2024
If any queries contact : projectsupport@nihva.com			
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT - HIGH SPEED DOOR
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/24-25/00XX | REV- R02
SCALE: NTS | WT: | SHEET: