
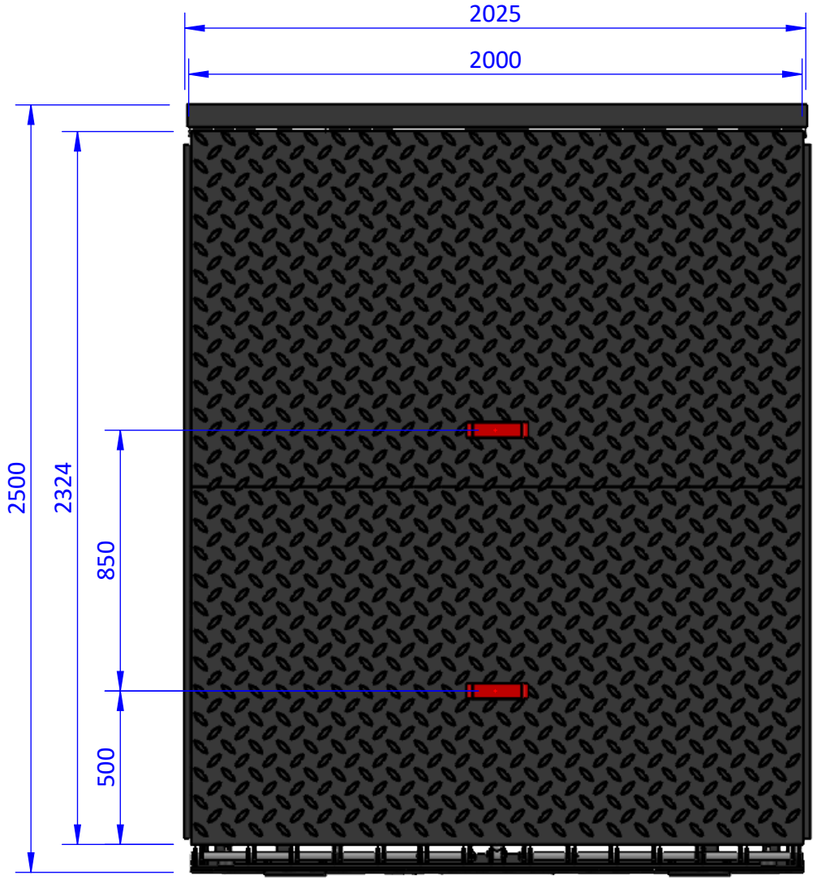


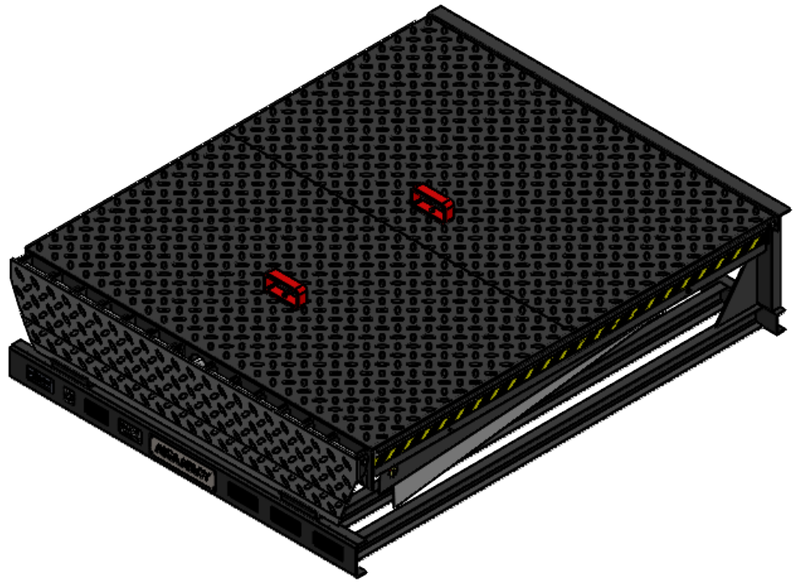

DOCK LEVELER SPECIFICATIONS


SIZE- 2000X2500X600
QTY - 2 NOS
CAPACITY- 15 TON UDL
SWING LIP SIZE- 2000X400X10


MAIN CYLINDERS (Double Cylinder)
Dia= ∅ 45mm, Length = 630mm
Piston Dia. = 30mm, Stroke = 451mm

SWING LIP CYLINDER
Dia= ∅ 55mm, Length = 273mm
Piston Dia.=30mm, Stroke =100MM

Longitudnal Support
I-Beam 125x70x6 = (2 Nos.)
L-Plate 150x38x4 = (8 Nos.)

Hydrualic Unit= 1.1kw, 380V, 3 Phase

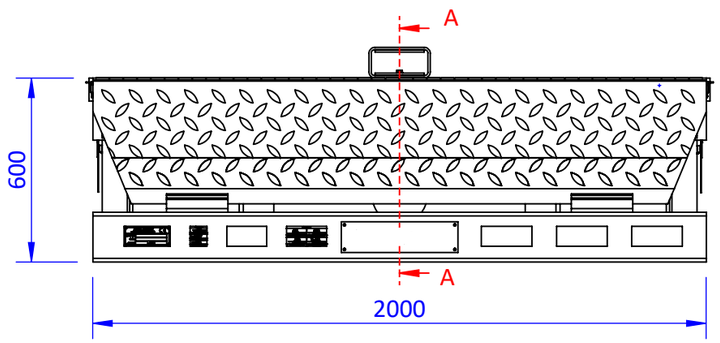

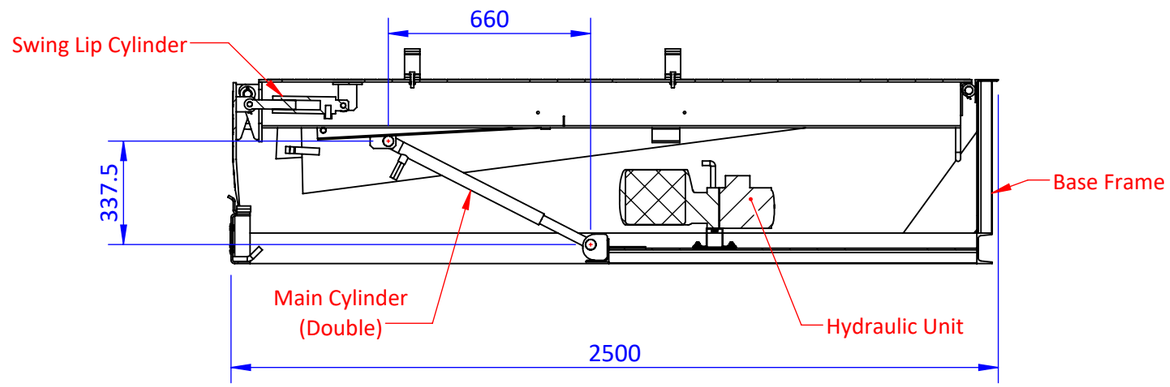

SECTION A-A

Permissible deviations for linear dimensions									
Tolerance Class		Permissible deviation for basic size range							
Designation	Description		over	over	over	over	over	over	over
		0.5	3	6	30	120	400	1000	2000
		to	to	to	to	to	to	to	to
		3	6	30	120	400	1000	2000	4000
c	coarse	±0.2	±0.3	±0.5	±0.8	±1.2	± 2	±3	±4

NIHVA
187, G-Block, Thermax chowk,
MIDC Chinchwad,
Pune - 411019
+91 8551091333
sales@nihva.com

Dep.	Config.

Projection	Tol.	Ref. Table	Drawn By	J.P	Project
	NC-File		Dr. Date	10/11/2025	
	SheetM.		Chkd By	B.S	
Material	---		Ch.date	10/11/2025	
Finish			Dim.	mm	
Weight(Kg)	858		Scale	1:20	

This drawing contains confidential information and is the property of NIHVA. Without whose permission it may not be copied, shown or handed to a third party or otherwise used

Description	DOCK LEVELER 2000x2500x600- DOUBLE CYLINDER		Sheet
Dwg no.	302051000747	Rev. 00	01 of 02