NIHVA Inflatable Dock Shelter



Technical Data

Nominal width	-	3600 mm
Nominal depth	-	770, 1020 mm
Walls and roof	-	insulated panel, 42 mm
Standard RAL colours	-	9002, 9016, 1 021, 3002, 501 0,6005, 7016, 9006, 9007, 9010
Fabric quality	-	PVC coated polyester
Top bag	-	500 glm2, thickness 0,5 mm
Side bag rear	-	600 glm2, thickness 0,5 mm
Side bag front	-	2500 glm 2, thickness 2 mm
Fan	-	230 V, 1-phase, 50 Hz, 250 W noise level: 65 CIBA in working position
Operating	-	Switch control included Other controls available as option
Temperature range	-	-3 o oc to +60 0 C

Insulated top and side panels

The NIHVA inflatable dock shelter is installed into a frame construction covered by insulated panels, giving additional insulation effects. The design facilitates easy and fast component exchange, should this be needed.

High quality material composition

The side and top inflatable airbags are made of impact resistant material with a strong, woven core. It is non-flammable, colour stable and highly resistant to weather impacts - in other words a material well suited for optimal function in rough docking environments

Inflatable dock shelter

The food industry puts high demands on loading bay sealing in order to keep the cold chain as intact as possible. The dock shelter must provide continuous weather protection throughout the entire loading and unloading operation.

Contrary to other types of dock shelters, with the NIHVA inflatable shelter the vehicle does not push towards the shelter. Instead, the shelter is inflated around the docked vehicle, providing complete sealing. The inflatable shelters are suitable for a wide range of vehicle sizes and their sealing capacity exceeds by far the standard normally required by operators.
In rest position, the NIHVA inflatable shelter is completely retracted behind the side structures, giving the vehicle driver the possibility to use the complete width of the loading bay when reversing into it. In addition, yellow front line indicators further facilitate the dock-in navigation. Stable collision protectors at the ramp height prevent shelter damages.

Dimensions




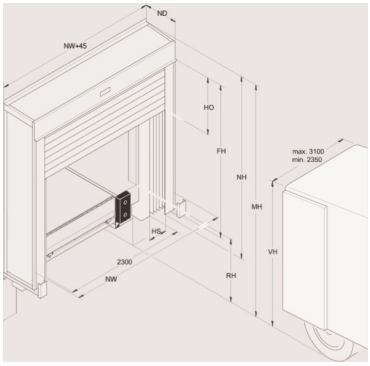



Abb.	Dimension	Value (mm)
NW	Nominal width	3600
NH	Nominal height	3755, 4055, 4355, 4555
ND	Nominal depth	770, 1020
FH	Free height above level*	3300.3600,3
HO	Top bag extension	1000, 1300
HS	Side bag extension	650
MH	Installation height	VH+500
RH	Dock height	
VH	Vehicle height depending on MH (installation height) maximum sizes	

Fixing points

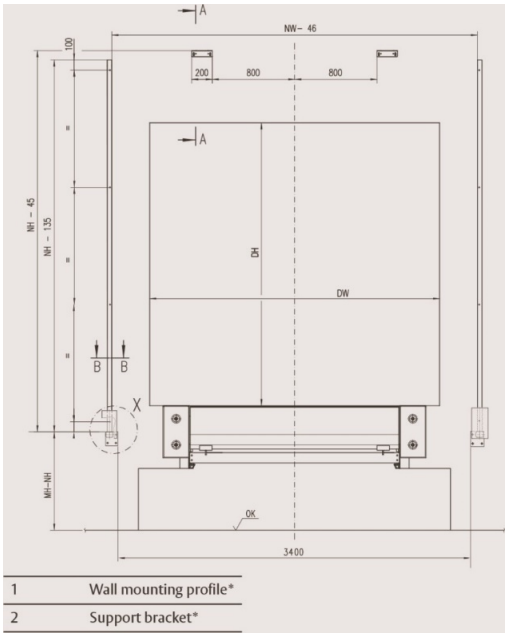










Wall fixings


Concrete wall

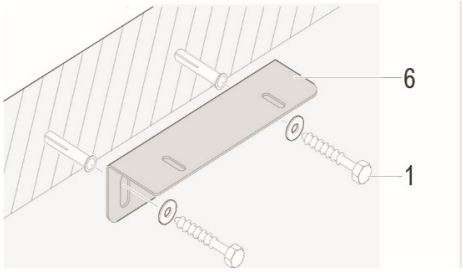

Insulated wall

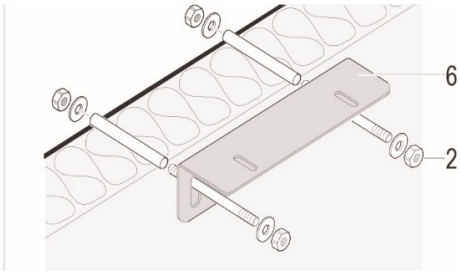





G-Block, 1 st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411 019
Contact: - +91 85 51091 333 Email:- sales@nihva.com Website:- www.nihva.com