


OUTSIDE ELEVATION

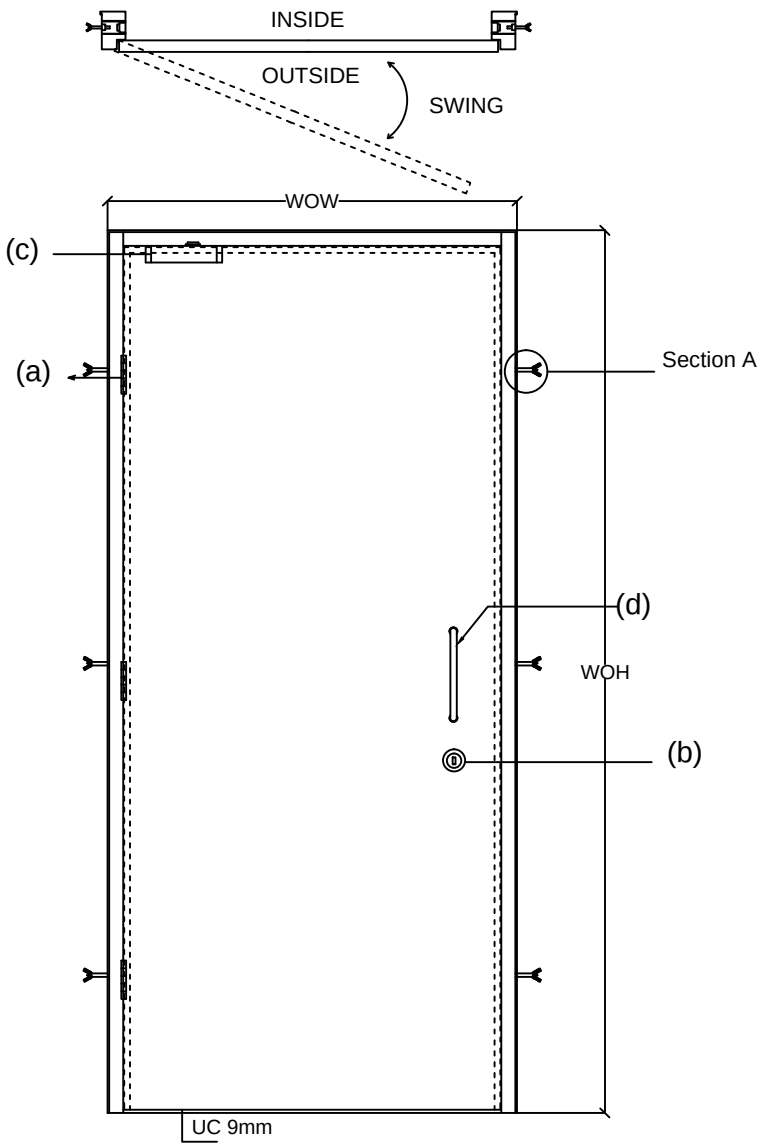

TOP VIEW

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES

(a) HINGES: 3 No. SS Ball bearing butt hinges 100x75x3mm(Make Dorma)


(b) LOCK : Mortise Dead lock

(c) DOOR CLOSER: 1 No. Door Closer

(d) HANDLE : SS D HANDLE(254mm) (Pair)

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

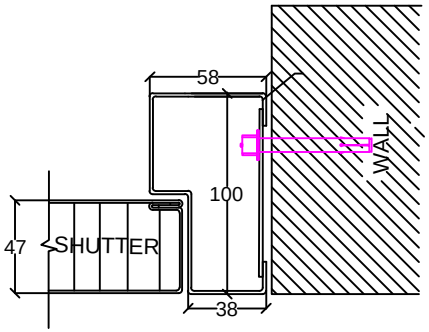

Section A

Non Fire door size		
WOW	WOH	QUANTITY
840	2035	1

COLOR:- Gentian Blue(RAL 5010)

ORIENTATION- LEFT HAND REVERSE(OPTION 3)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Non Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	07/03/16	
CHECK	ANIL	07/03/16	
REV.	03		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - SWAROVSKI
PROJECT -
SITE - RANJANGAON MIDC
DWG. NO. - NIHVA/15-16/188/R03
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com