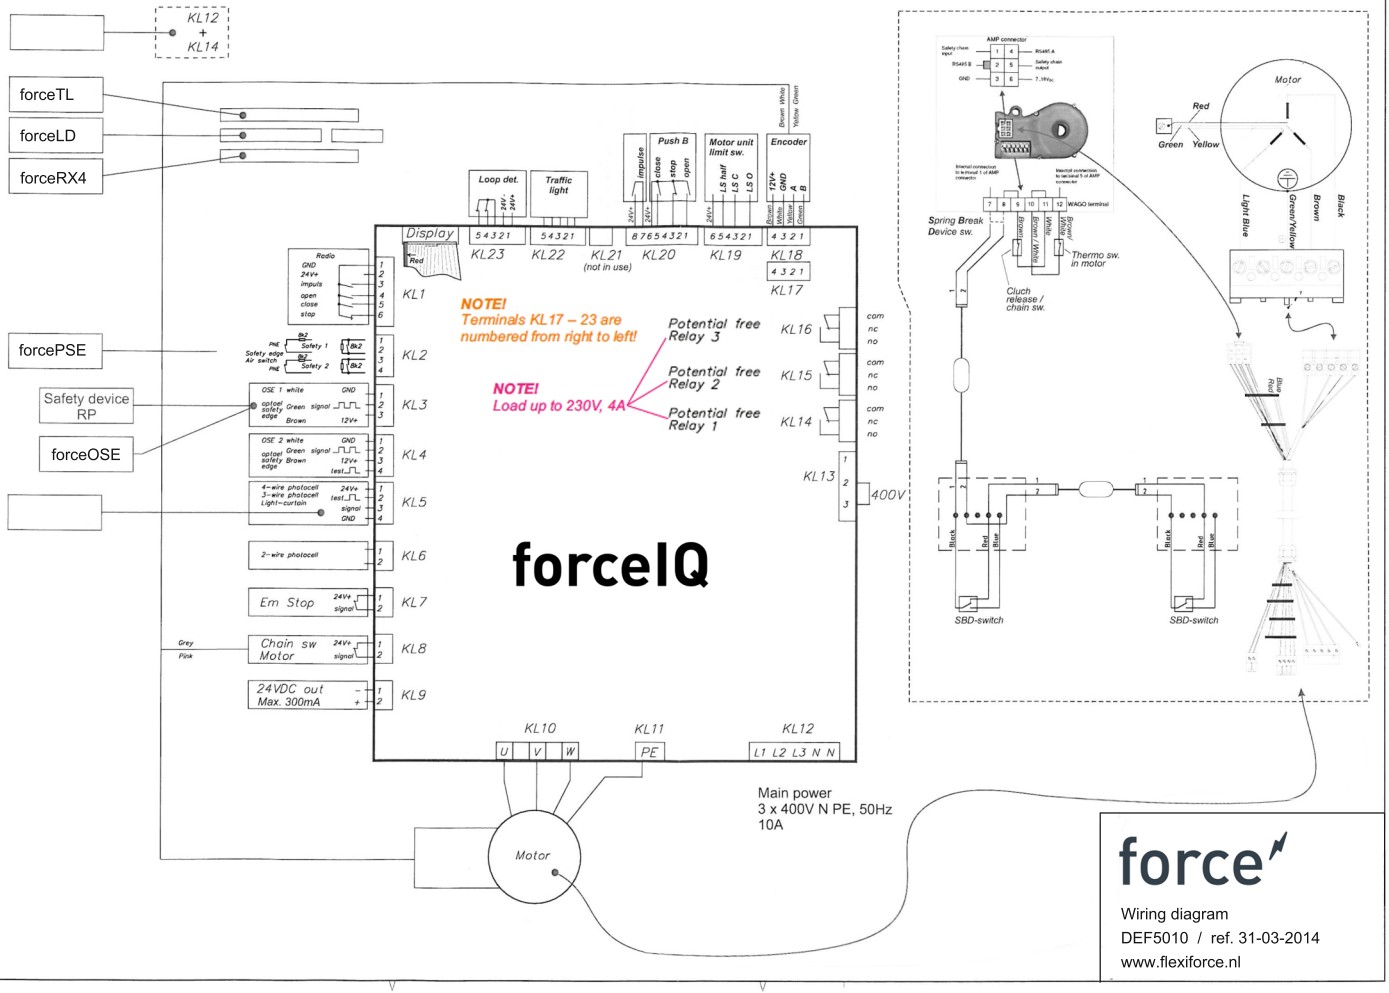

KL12
+
KL14
forceTL
forceLD
forceRX4
forcePSE
Safety device
RP
forceOSE
Display
Red
Loop det.
Traffic
light
Push B
Motor unit
limit sw.
Encoder
KL23
KL22
KL21
(not in use)
KL20
KL19
KL18
KL17
KL1
KL2
KL3
KL4
KL5
KL6
KL7
KL8
KL9
NOTE!
Terminals KL17 – 23 are
numbered from right to left!
NOTE!
Load up to 230V, 4A
Potential free
Relay 3
Potential free
Relay 2
Potential free
Relay 1
KL16
KL15
KL14
KL13
400V
forceIQ
KL10
KL11
KL12
U
V
W
PE
L1 L2 L3 N N
Main power
3 x 400V N PE, 50Hz
10A
Motor
AMP connector
Spring Break
Device sw.
Cluch
release /
chain sw.
Thermo sw.
in motor
WAGO terminal
SBD-switch
SBD-switch
Red
Green
Yellow
Light Blue
Green/Yellow
Brown
Black
force
Wiring diagram
DEF5010 / ref. 31-03-2014
www.flexiforce.nl