




SUNSTERA
Shadow Technology

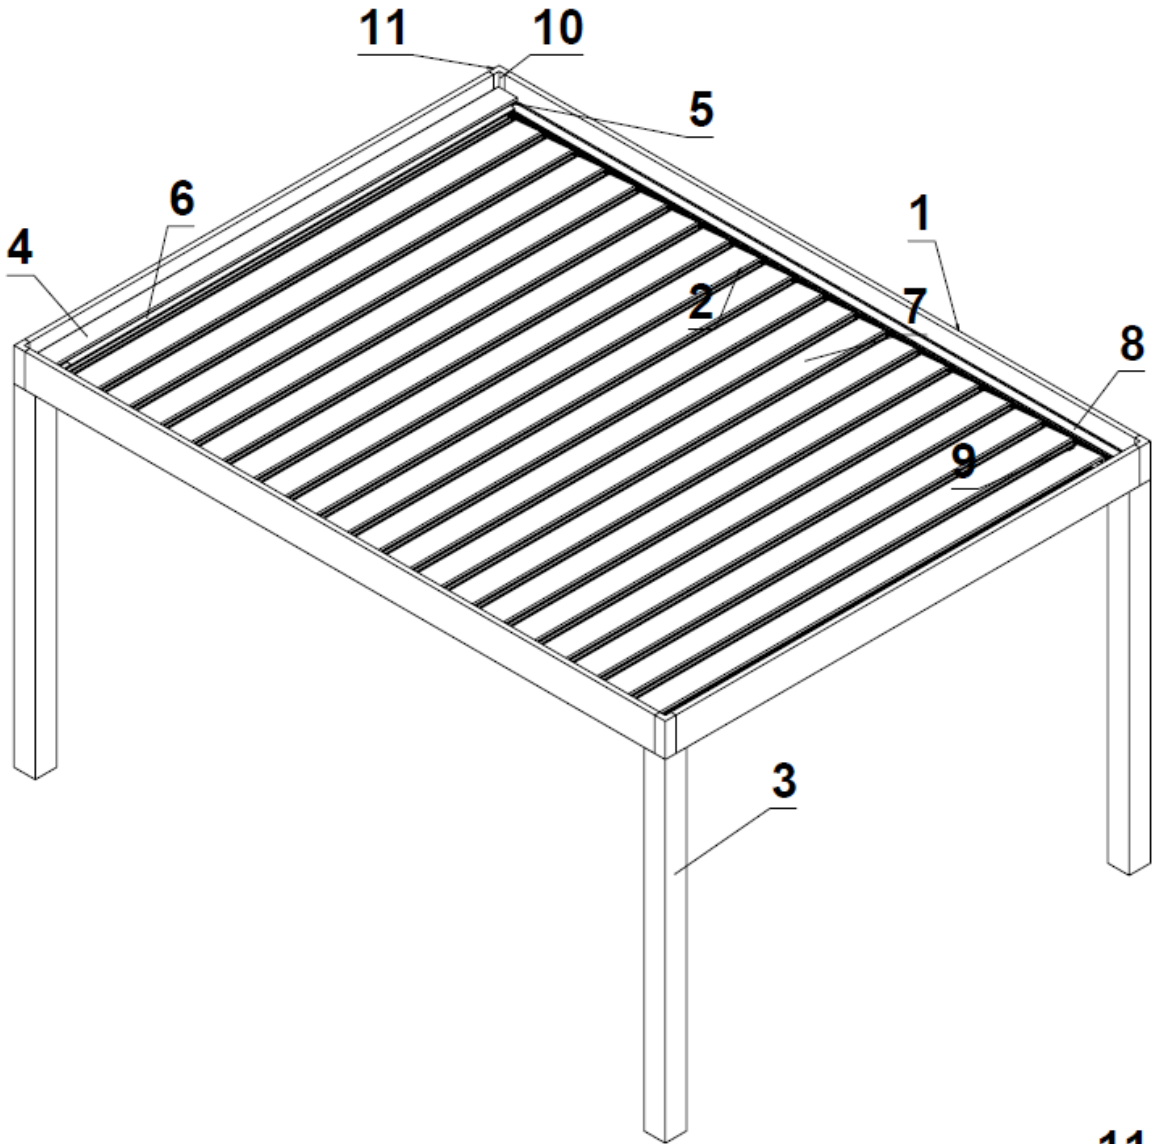




SUNSTERA
Shadow Technology

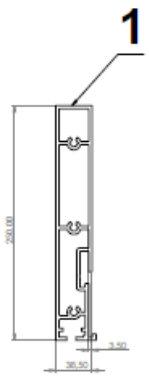












SUNSTERA
Shadow Technology

# TECHNICAL PROPERTIES OF BIOCLIMATIC SYSTEMS

**System Specifications**

Bioclimatic System is a roof system which is made of aluminum panels which can be rotated about 90 degrees has use four seasons .It has high performance in insulation due to airtight sealing systems. Snow load carrying capacity can be as much as 235 kg per sqm depending on the dimensions.The wind resistance of the product can reach up to 123 km / h depending on the dimensions.The system has a retractability. Since it works retractability, it can be opened up to 90 degrees. When the system retracted, an opening of 70% is created.In rainy weather, when the system is open between 1% and 4%, it provides ventilation to the interior without water penetration.

**Technical Details**

-All the profiles and the construction are painted with electrostatic powder.

-The system's construction is made of aluminum.

-The iron construction is used as a carrier where the system is mounted

-Integrated lighting solutions (Optional)

-Remote control for system and lighting

-High quality stainless steel fasteners

-Air and waterproof insulation around the entire system

-Foldable glass , Sliding Glass ,Guıllotine Glass and Zip Screen applicability around the system

-Production on CE and TUV standards

-The brand which the engine that provides the movement of the Bioclimatic system is 'Somfy' and has remote control

-As an optional LED lighting modules which is remote control can be added to the Bioclimatic system.

-The engine torque in the Bioclimatic system is 120 Nm and turnover 27 rpm.

-The gutter profile is used in the Bioclimatic system to supply water drainage

- The movement of the Bioclimatic system is provided by using the "Trigger Tension System".

-All fasteners, bolts and pins of the Bioclimatic system are INOX stainless

SUNSTERA
Shadow Technology

**Cross-sectional dimension details:**

GUTTER PROFİLE : 238 x 250 x 3 mm

RAFTER PROFİLE : 102 x 92 x 2 mm

MOBILE PANEL: The ceiling of the product consists of folding panels. The panels are 274 mm x 41 mm in size . Panel section is in detail.The detents on the back of the panels prevent the materials that could be caught on the panels from falling down (indoor) during the roof opening movement.

PİLLAR : The product is carried on aluminum posts with dimensions of 160 x 160 x 3,5 mm. Flange and ground connection details of aluminum struts are done in accordance with the detail drawing specified in the project.

**Water Drainage**

The rain water pouring into the upper panels is transferred to the right and left internal water channels, and water is discharged in a controlled manner through the front pillars. It is designed to ensure the perfect water flow between the system. In the case of windy rainfall, rain water is prevented from dripping into the interior if reverse pressure is applied. With this feature, water never pressures downwards and drains the water into the lower stage in a controlled manner.

**PAINTED**

The product is painted with electrostatic powder furnace showing high resistance to the harmful effects of sunlight and corrosion to the outdoor conditions.Products will be painted according to the desired RAL code in color.

**GUARANTEE**

The product is guaranteed for 2 (two) years against assembly and material defects,5 (five) years for motor.

Sunstera


@sunsteraofficial
SUNSTERA
Shadow Technology
www.sunstera.com