



ENCLOSED PLAN

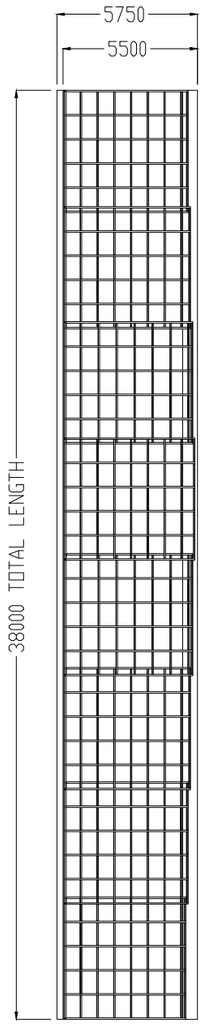


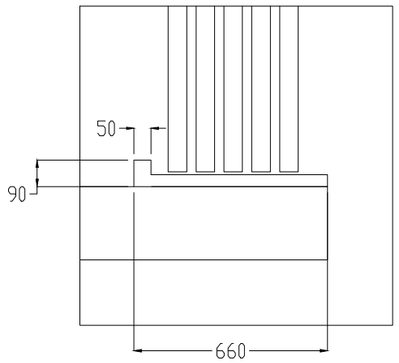


DETAIL VIEW A

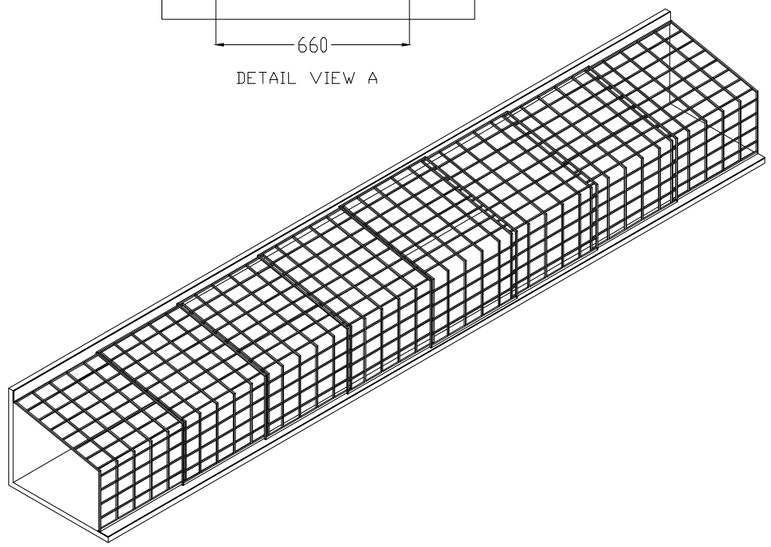

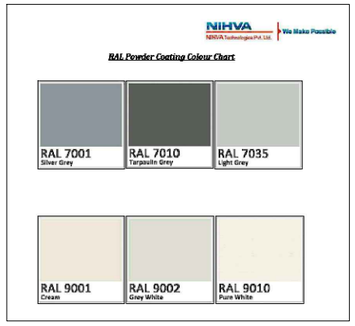

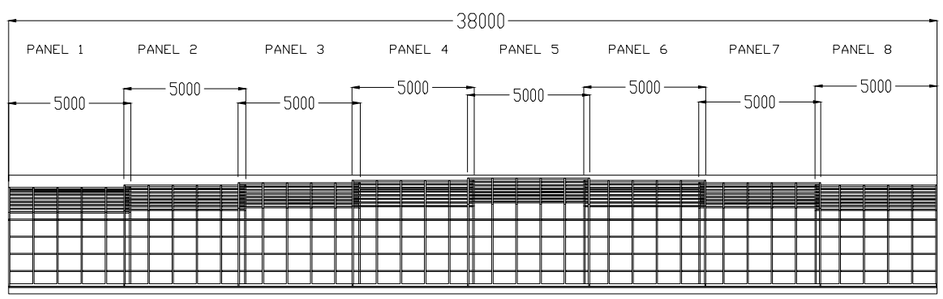



1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE 20 MM OF GRANITE FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 50MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. PLOYCARBONATE SHEET - UV2 PROTECTED POLYCARBONATE SHEET
8. RAL CODE - PLEASE SELECT AS PER ATTACHED SHEET
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK IS IN CLIENT SCOPE

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	ENCLOSED PLAN			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	D.V.		26.04.23	CLIENT - RSGL
CHECK	P.M.		26.04.23	LOCATION -
APPRD.	V.T.		26.04.23	PRODUCT - RETRACTABLE ROOF
If any queries contact : supportautomation@nihva.com				NIHVA\22-23\02XX / REV- 1
ALL DIMENSION ARE IN mm				SCALE:NTS / SHEET:01 OF 01