NIHVA

Telescopic Conveyor



We Make Possible

www.nihva.com

NIHVA Telescopic Conveyor – NIHVA designed the Customized Telescopic conveyor according to your required weight and speed to improve both productivity and the work environment NIHVA telescopic belt conveyor is an effective and ergonomic alternative to labor-intensive routines. NIHVA telescopic belt conveyors can be used to load/unload any type of loose-loaded cargo - typically parcels boxes, bags, loose items, sacks, tires and so many variety of material.

Features

- Can be customized as per application
- Considered Maximum safety
- Side panel, Boom support,
- Belt speed 30m per minute
- Extends up to 15m
- Push button controls
- Ideal for boxes, bags, totes and loose items
- Reversible belt direction
- Front LED lighting as standard
- Emergency stops in three positions
- Soft start motor and belt
- Variety of models and options available NIHVA Telescopic Conveyor Benefits:
- Save Human efforts by minimizing manual handling
- Save time
- Low energy cost
- Design based on safety and easy operate







Technical Specification - Telescopic Belt Conveyor (Made in India)


Sr. No.	Particular	Specification
1	Material To Be Handle	Boxes
2	Weight Of The Box/Bags	40 Kg. maximum
3	Size of Box/Bags	600 (L) x 300 (W) x 400 (H) (OVERALL)
4	Temperature	Ambient
5	Capacity	550 Boxes per hour
6	Type	Collapsible Boom type hinged Telescopic Belt Conveyor
7	Design Capacity	600 per hour
8	Size Of Belt	600 MM Width
9	Type Of Belt	Smooth Top 2 Ply, PVC Coated Endless type,
10	ngth of conveyor	Fixed length : 4800 mm Telescopic (expanded) : 6000 mm Total : 10800 mm
11	Main Body Of Conveyor	Manufacturing from 6 MM Thick. IS 226 Plate Material
12	Snub Pulley For Conveyor	Precision Machine from 3 Inch OD Schedule 40 Pipe With Inverted Bearing Fitted
13	Drive Pulley	Manufacture from 8 Inch ID Schedule 40 Pipe With Rubber Legging & hearing bone surface
14	Telescopic Movement	Mechanical arrangement (“Diamond” make chain)
15	Mounting	On Fixed MS Chassis Mounted On fabricated frame with FIX and CASTOR wheel with manual toeing bar
16	Height Adjustment	With 2 HP power pack & cylinder for height adjustment (“Rexroth” parts) ,(!BB motor)
17	Panel	The conveyor comes with a fixed main panel on rear side and fron t side only operating panel with emergency stopper sensor bar , LED lighting , totally consoled wiring.
18	Painting	INTERNAL: Two coat of Epoxy red oxide and white paint. EXTERNAL: Two coat of primar y & Two coat of high gloss Duco paints.



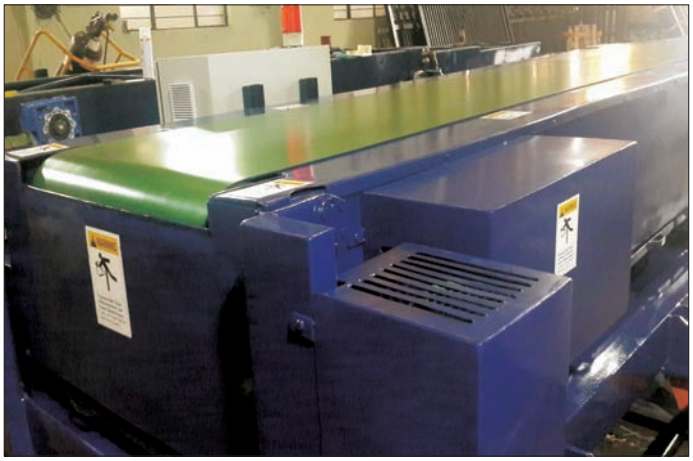

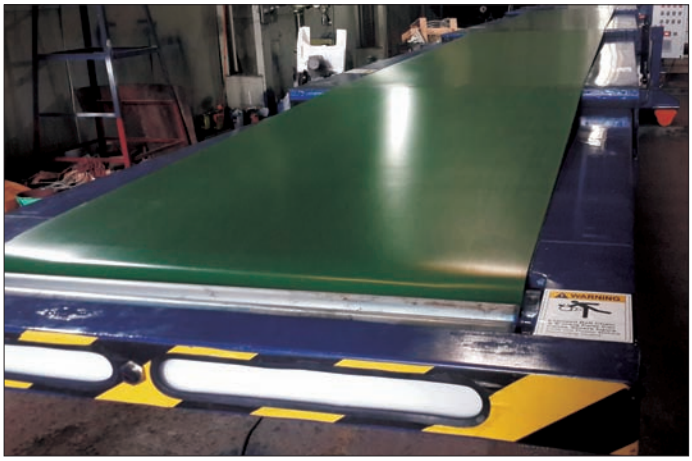



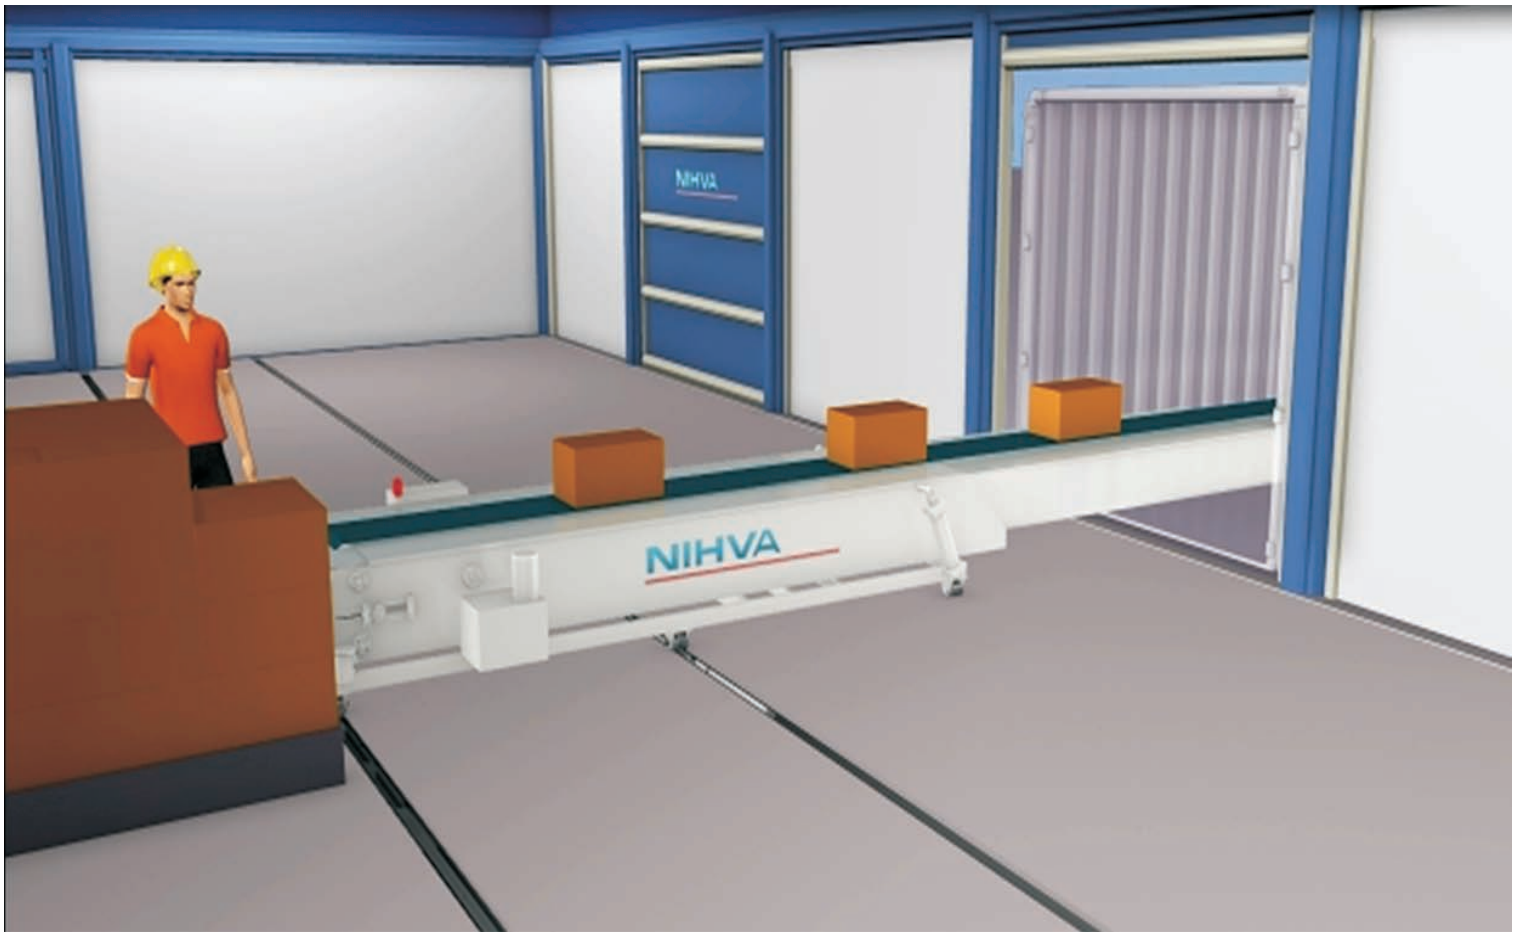

NIHVA

Automation Solutions	Material Handling Equipments	Door Automation
Automation Solutions	Dock Levellers	High speed doors / Sectional doors
Pick & Place Machines	Scissor lifts / Mobile ramp	Sliding doors / Folding Doors
SPM	Dock Shelters / Dock Seals / Dock House	Fire rated - Mot. Rolling shutters / Sliding doors
Wireless Automation (M2M)	Goods Lift	Hanger Doors / Extra large opening doors
Automation Softwares	Spiral Conveyors / Belt Conveyors	Boom barriers / Turnstiles / Bollards
Grease / Oil Separator	Telescopic Conveyors	Sliding / Cantilever Gates

International Business Partners

ALBANY ASSA ABLOY | MEGADOOR ASSA ABLOY | Crawford ASSA ABLOY | besam ASSA ABLOY | ACO

Head Office: G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019

NIHVA

NIHVA Technologies Pvt. Ltd.

+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com

NETWORKS

WEST	NORTH	SOUTH	EAST
Pune I Mumbai I Nashik I Nagpur Indore I Ahmedabad I Surat I Vadodara	Delhi I Chandigarh	Chennai I Hyderabad I Bengaluru	Kolkata I Bhubaneshwar