
HYD CYL - Ø50 (Bore) X 35(Rod)X 381 (Stroke length) (Single Acting)

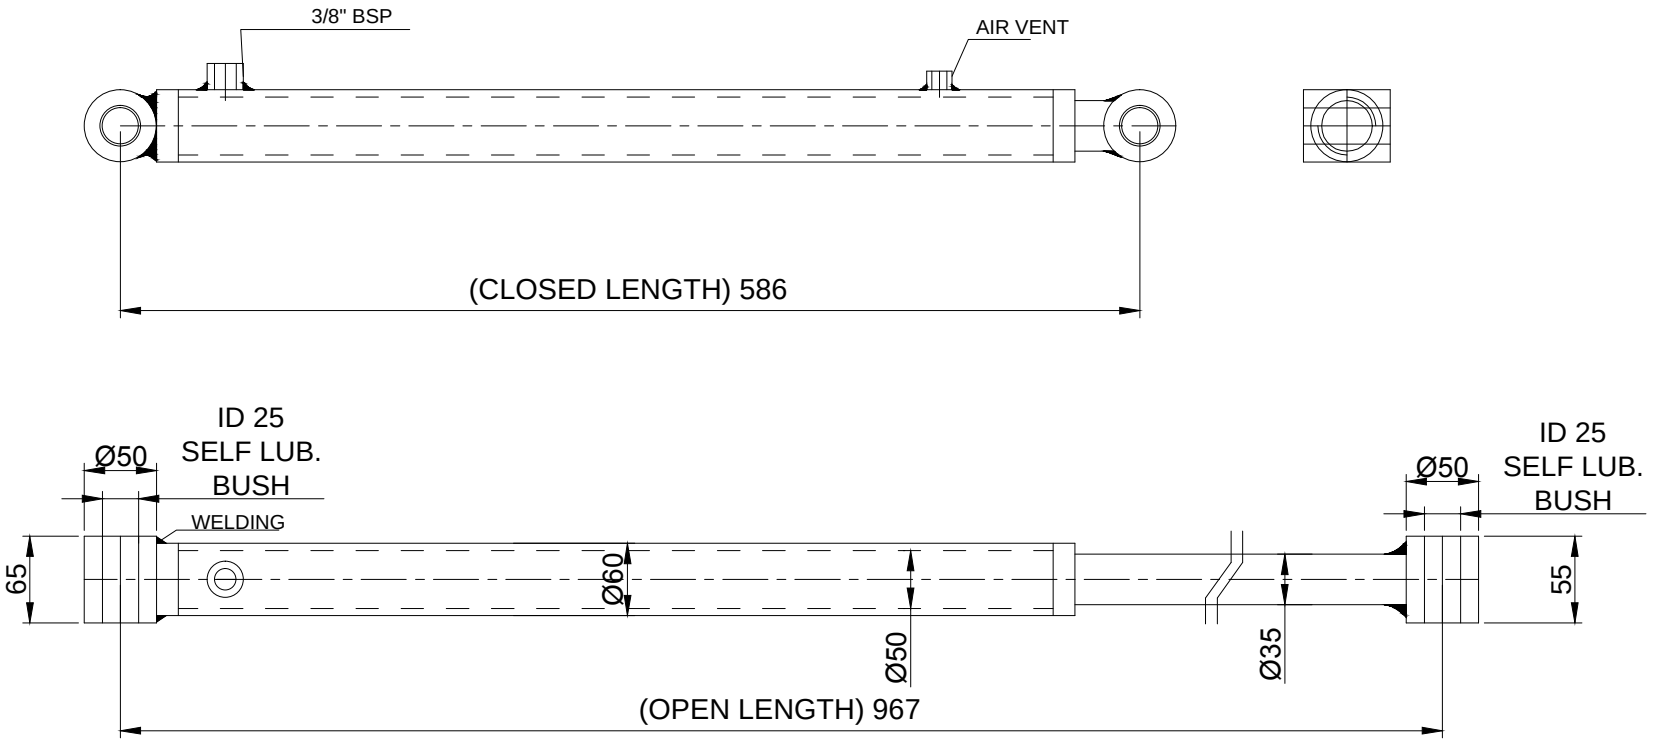


SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 381 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 1 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

| TITLE | | | | |
|---|---|---|---|---|
| LIFT CYLINDER | | | | |
| | NAME | SIGN | DATE | |
| DRAWN | P.A | | 03.12.18 | CLIENT - |
| CHECK | P.A | | 03.12.18 | PROJECT - |
| APPRD. | R.D | | 03.12.18 | SITE LOCATION - |
| If any queries contact : design@nihva.com | | | | DWG. NO. : NIHVA/18-19/VDR/242 REV- 0 |
| ALL DIMENSION ARE IN mm | | | | SCALE: NTS WT: SHEET: 01 OF 01 |

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com