

HYD CYL - Ø50 (Bore) X 25(Rod)X 140 (Stroke length) (Single Acting)

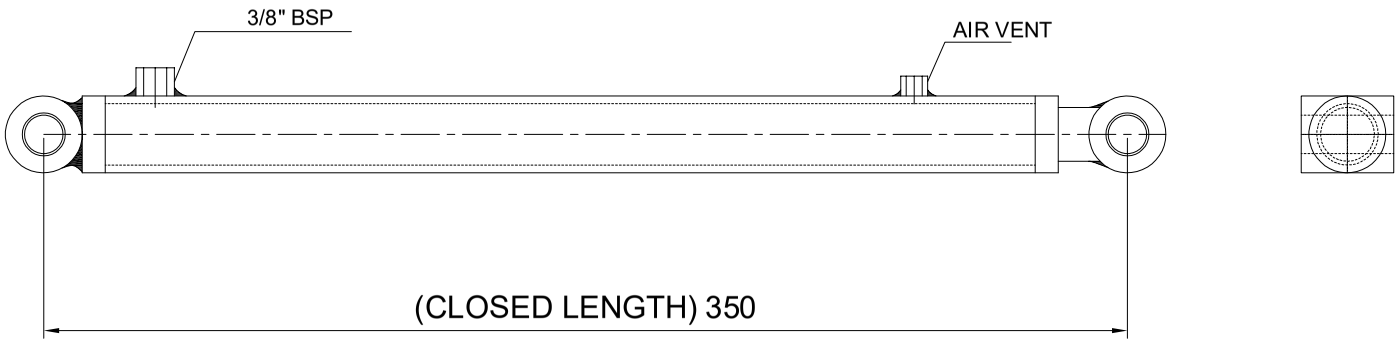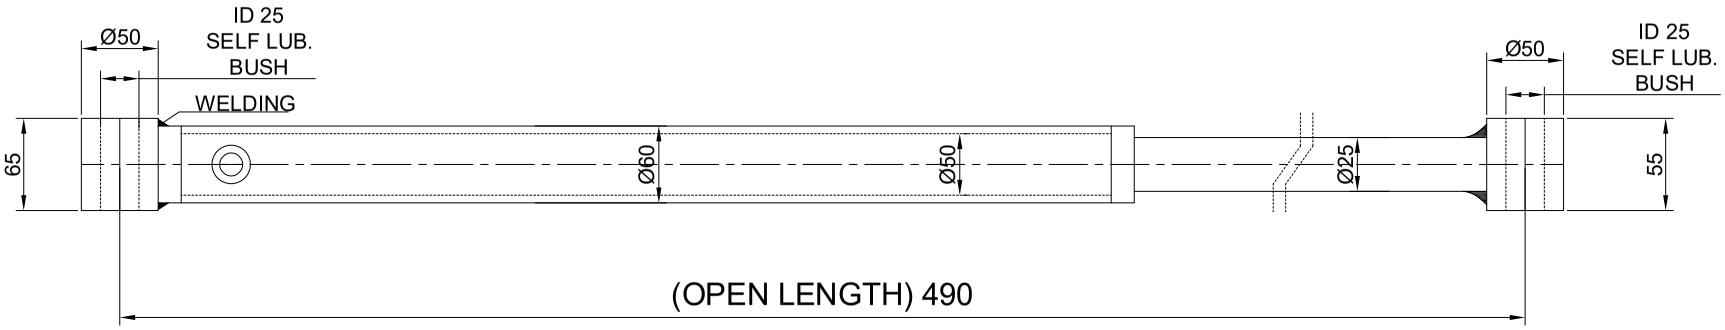


SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 140 mm
- PISTON ROD :-Ø25mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 160 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 04 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

| | | | |
|---|---|---|---|
| TITLE: LIP CYLINDER | | | NIHVA TECHNOLOGIES PVT. LTD. PUNE<br>Tel : 020 66304033<br>Email:- info@nihva.com<br>Website:- www.nihva.com |
| | NAME | DATE | |
| DRAWN | SUJATA | 17/04/2023 | CLIENT -NIHVA TECHNOLOGIES PVT LTD |
| CHECK | A.K | 17/04/2023 | PROJECT - DL |
| APPRD. | V.T | 17/04/2023 | SITE LOCATION - PUNE |
| If any queries contact : design1@nihva.com | | | DWG. NO. :NIHVA/23-24/VDR/0123 / REV- 0 |
| ALL DIMENSION ARE IN mm | | | SCALE: NTS / WT: / SHEET: 01 OF 01 |